



Test Data Appendix of Test Report

1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	65.61	1.83	4.03
NVNT	a	5785	Ant1	65.61	1.83	4.03
NVNT	a	5825	Ant1	66.14	1.8	4
NVNT	n20	5745	Ant1	63.79	1.95	4.37
NVNT	n20	5785	Ant1	63.97	1.94	4.37
NVNT	n20	5825	Ant1	63.97	1.94	4.37
NVNT	n40	5755	Ant1	50	3.01	7.75
NVNT	n40	5795	Ant1	50.39	2.98	7.69

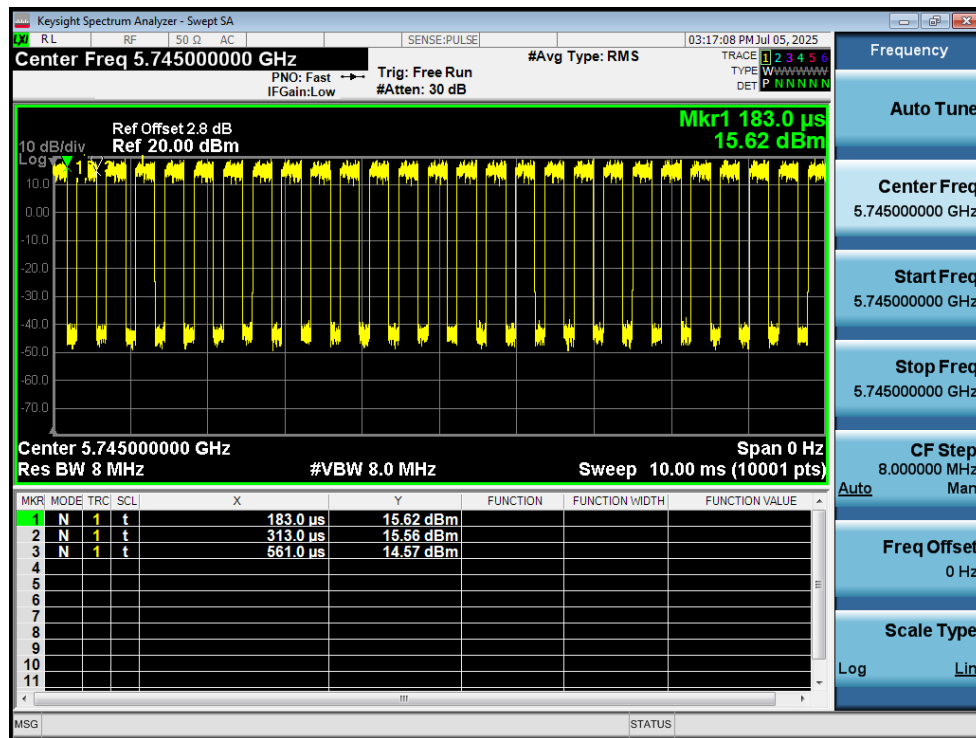


Duty Cycle NVNT a 5745MHz Ant1

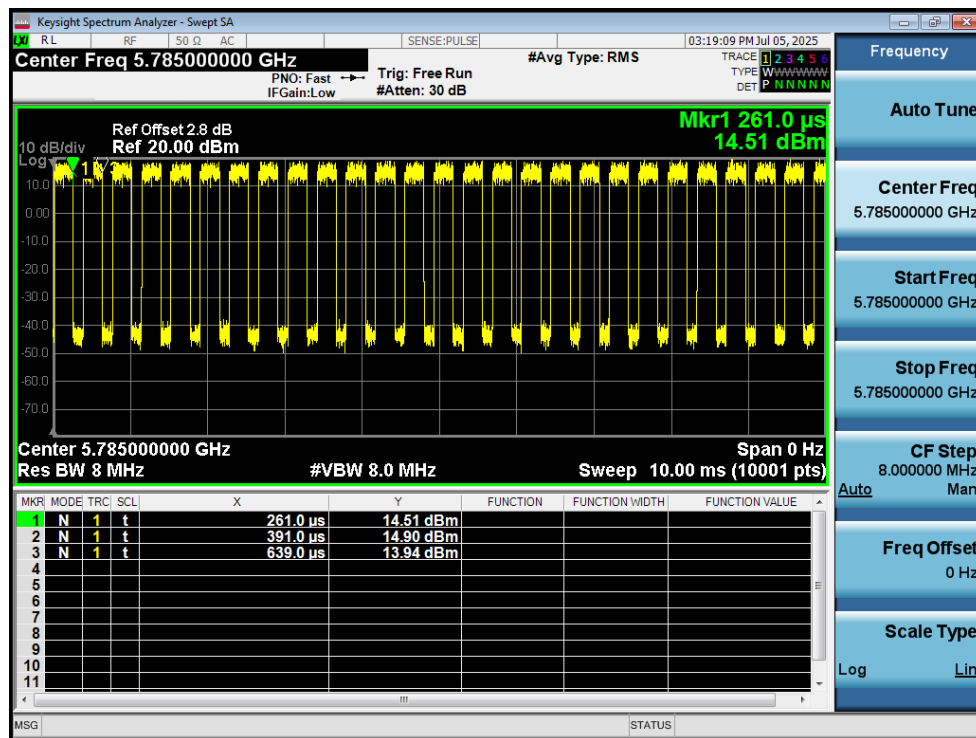


Duty Cycle NVNT a 5785MHz Ant1

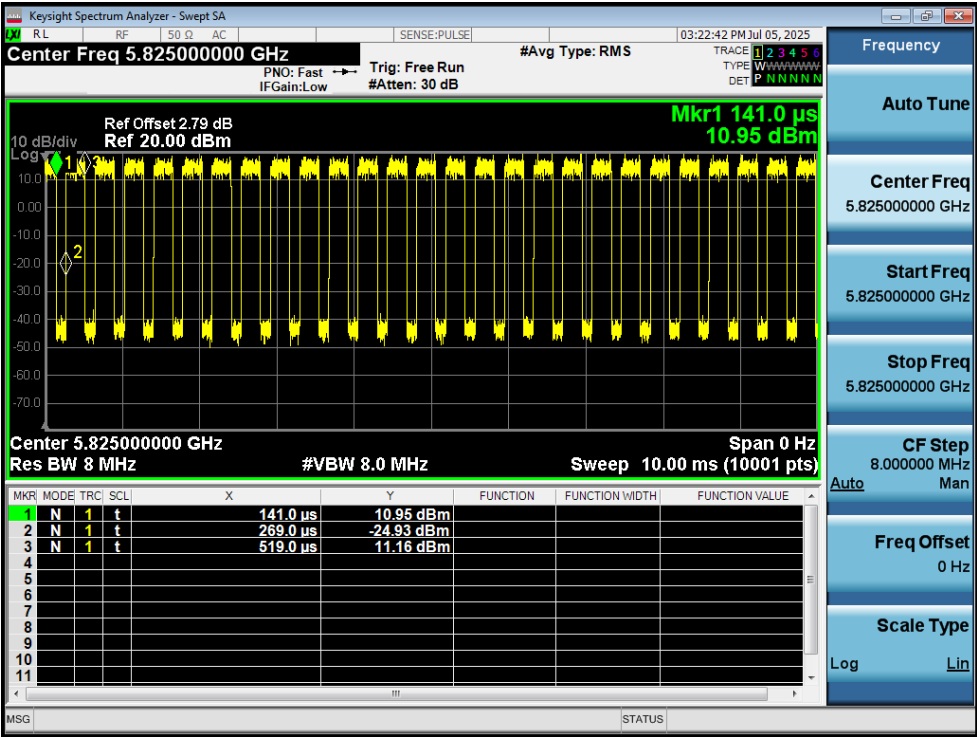


Duty Cycle NVNT a 5825MHz Ant1

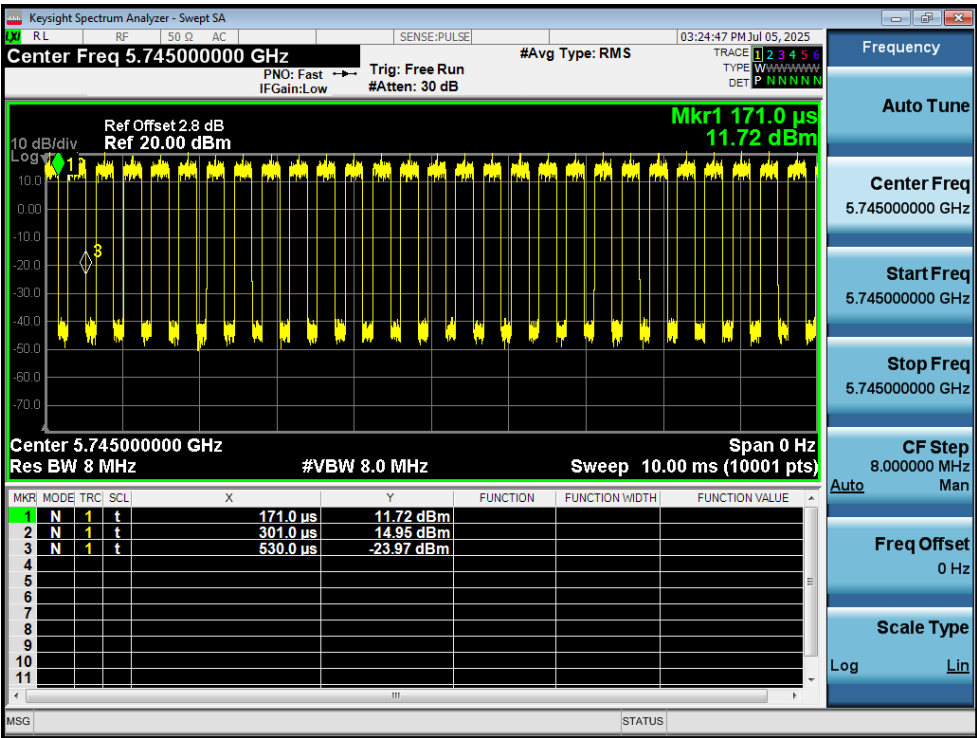


Duty Cycle NVNT n20 5745MHz Ant1

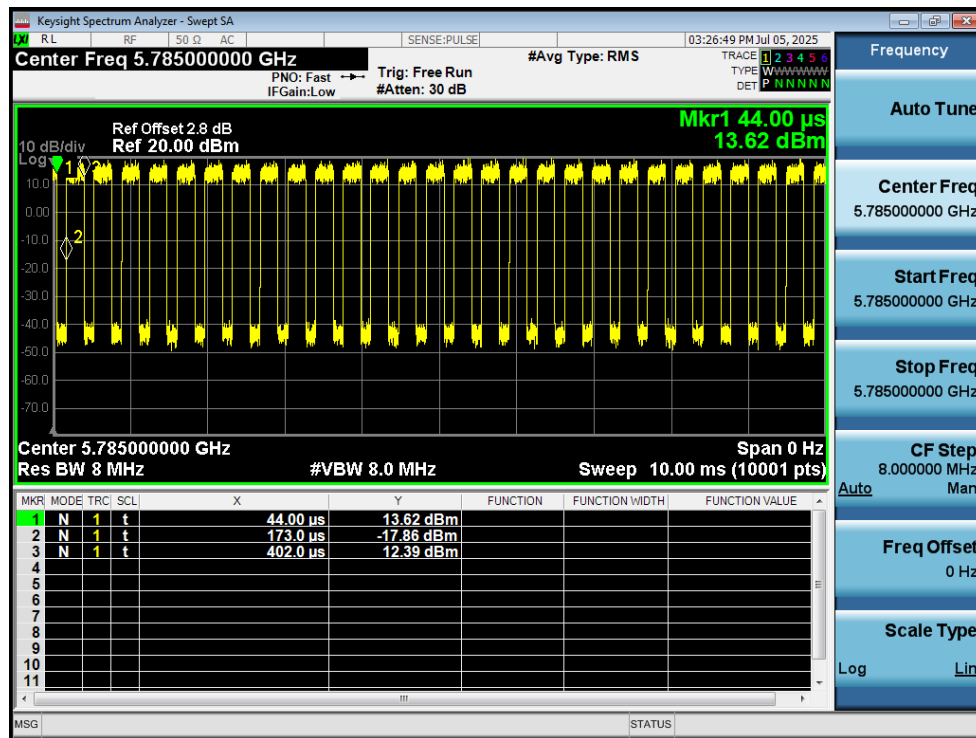


Duty Cycle NVNT n20 5785MHz Ant1

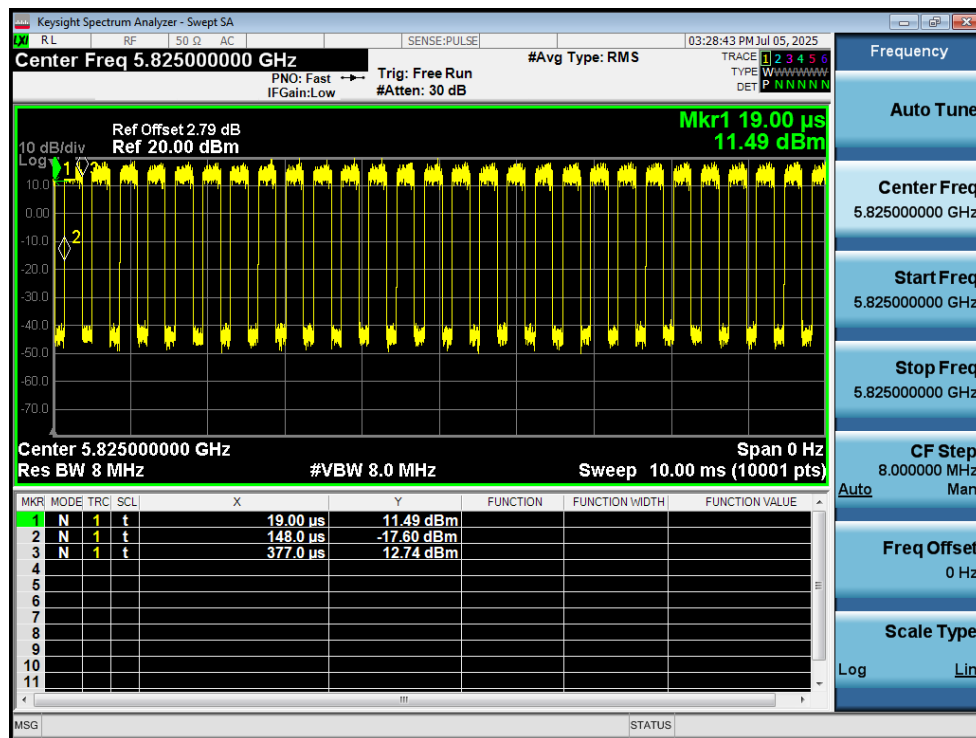

Duty Cycle NVNT n20 5825MHz Ant1

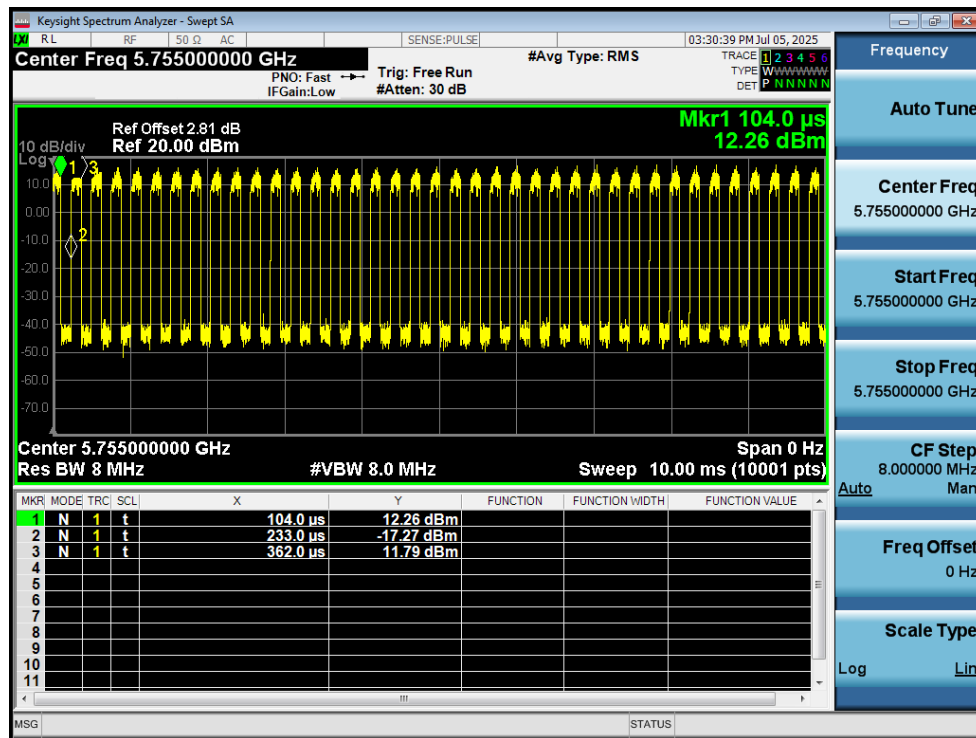

Duty Cycle NVNT n40 5755MHz Ant1

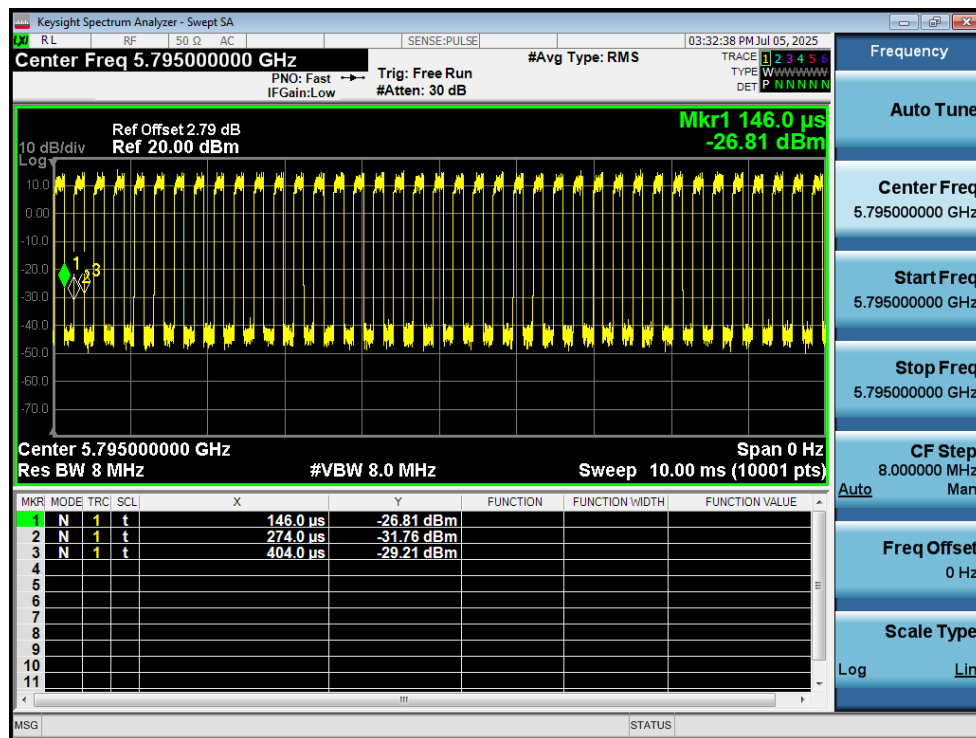


Duty Cycle NVNT n40 5795MHz Ant1

2. Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	11.61	1.83	13.44	30	Pass
NVNT	a	5785	Ant1	11.12	1.83	12.95	30	Pass
NVNT	a	5825	Ant1	10.82	1.8	12.62	30	Pass
NVNT	n20	5745	Ant1	10.95	1.95	12.9	30	Pass
NVNT	n20	5785	Ant1	10.98	1.94	12.92	30	Pass
NVNT	n20	5825	Ant1	10.66	1.94	12.6	30	Pass
NVNT	n40	5755	Ant1	10.4	3.01	13.41	30	Pass
NVNT	n40	5795	Ant1	9.87	2.98	12.85	30	Pass

Note1: Total power=Conducted power + Duty factor


Note 2: Antenna Gain: 2.69dBi

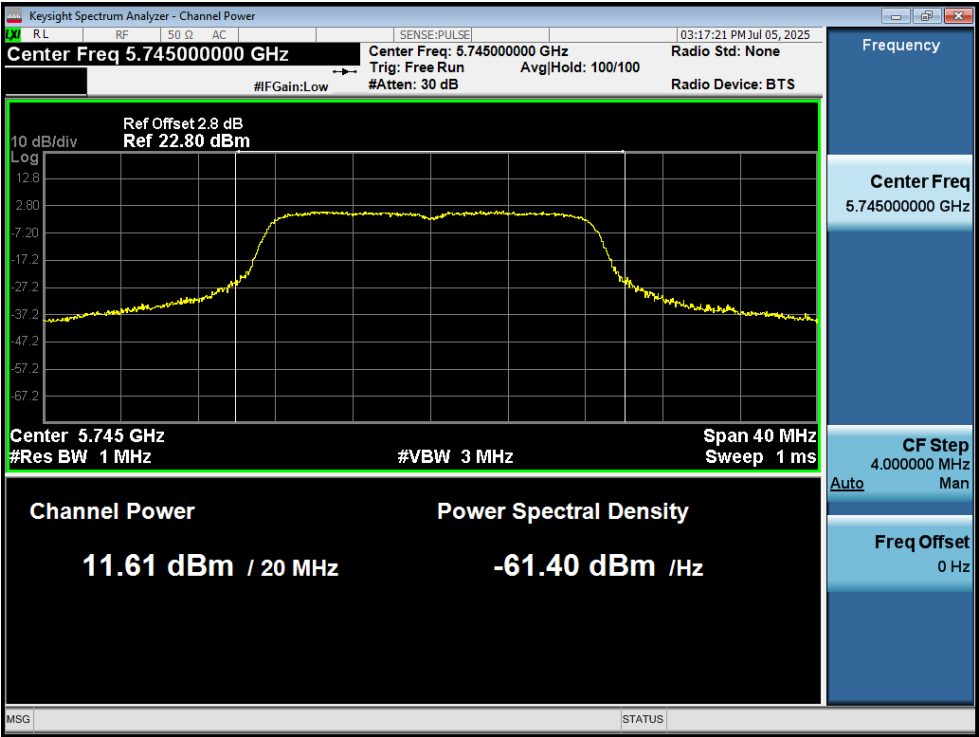


Power NVNT a 5745MHz Ant1

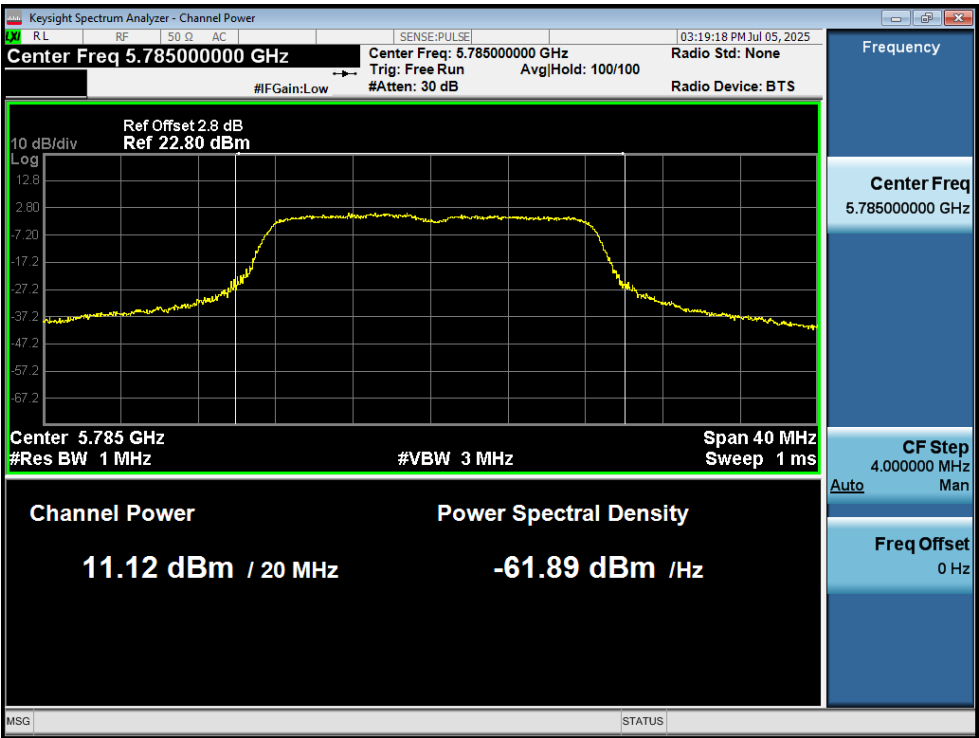


Power NVNT a 5785MHz Ant1

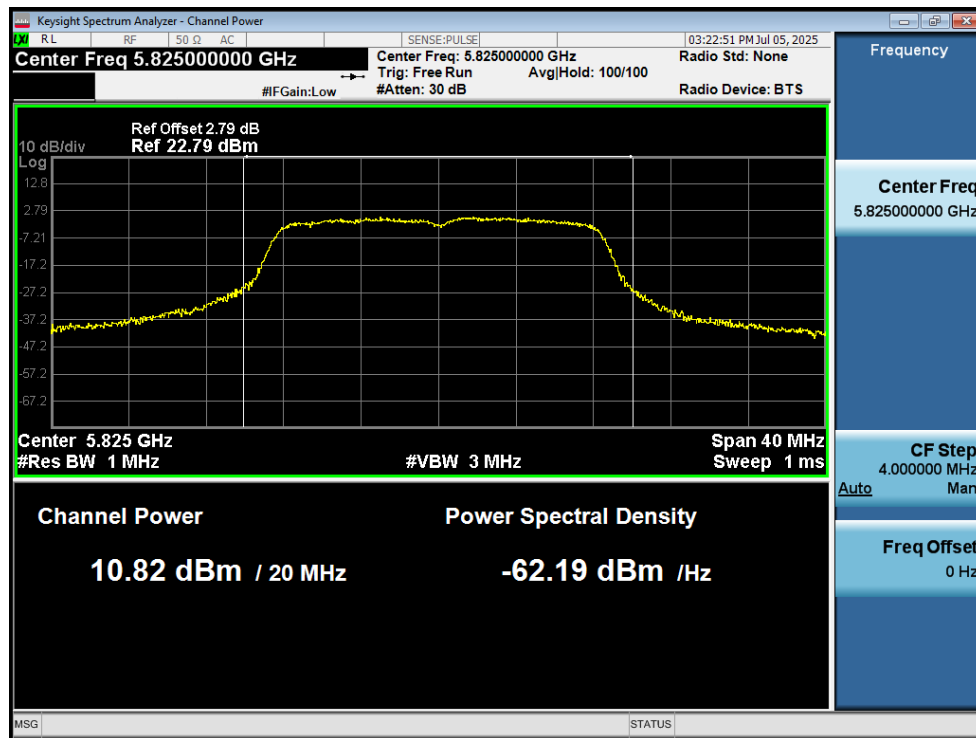


Power NVNT a 5825MHz Ant1

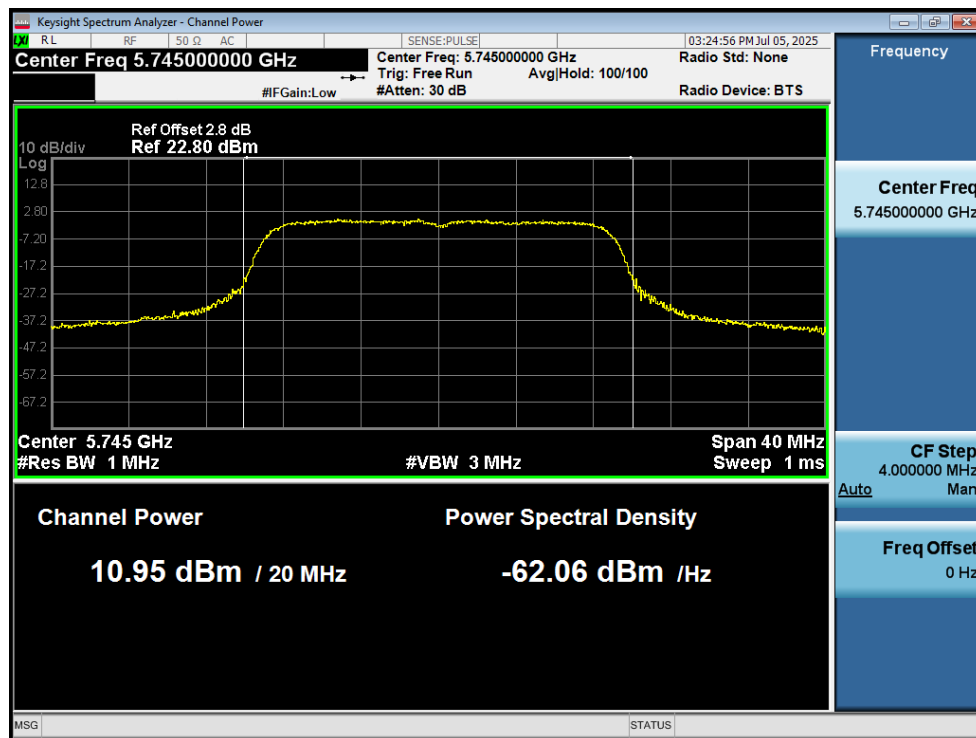


Power NVNT n20 5745MHz Ant1

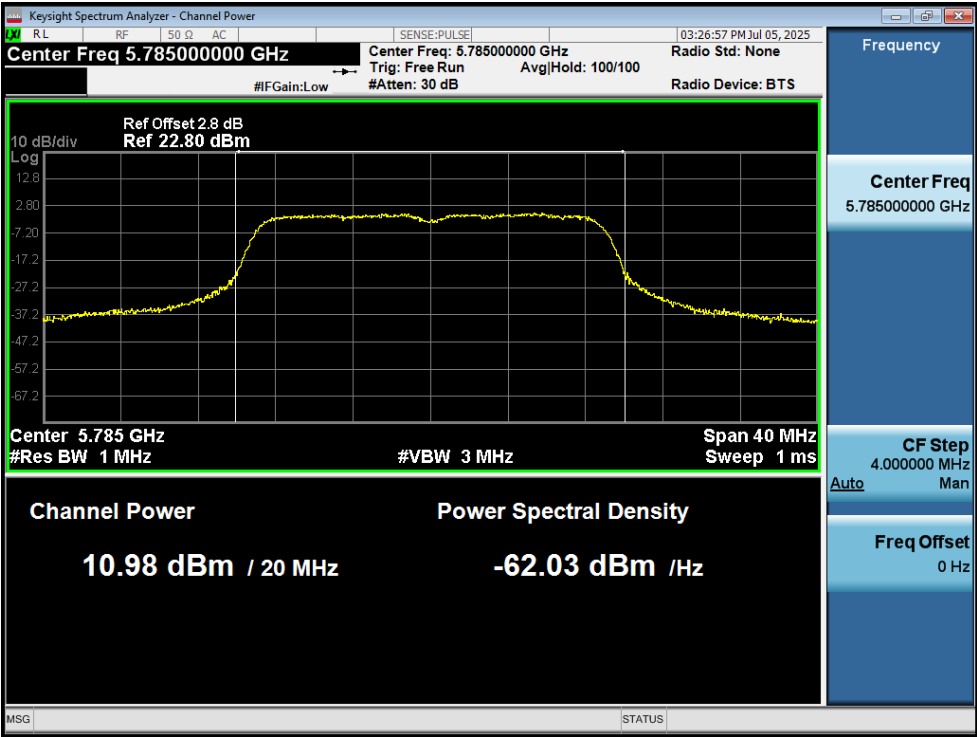


Power NVNT n20 5785MHz Ant1

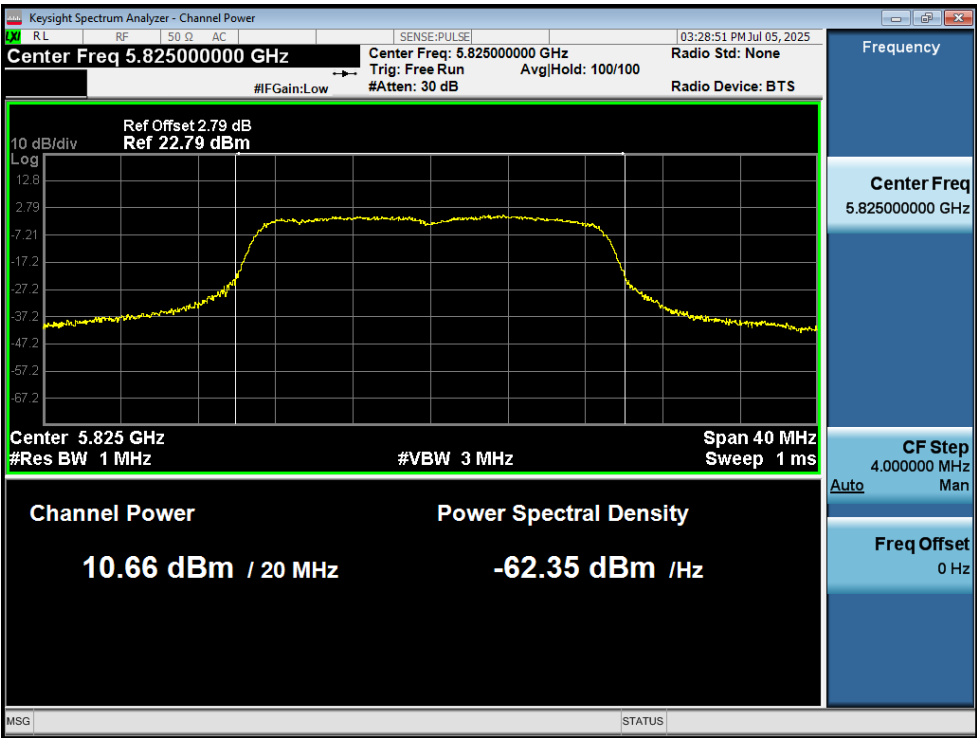

Power NVNT n20 5825MHz Ant1

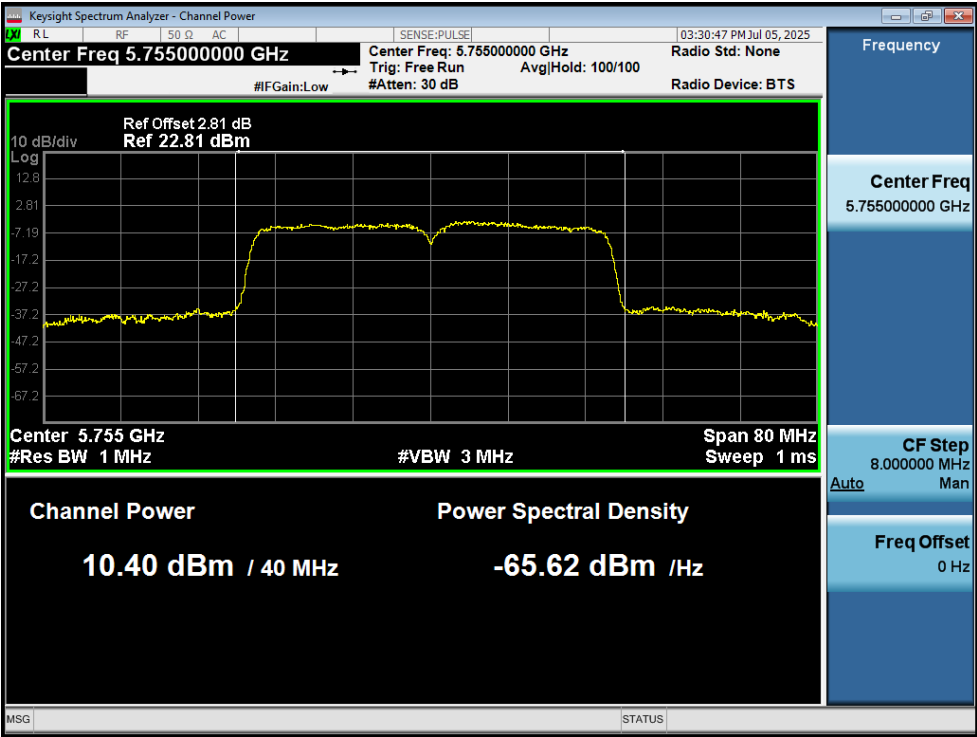


Power NVNT n40 5755MHz Ant1

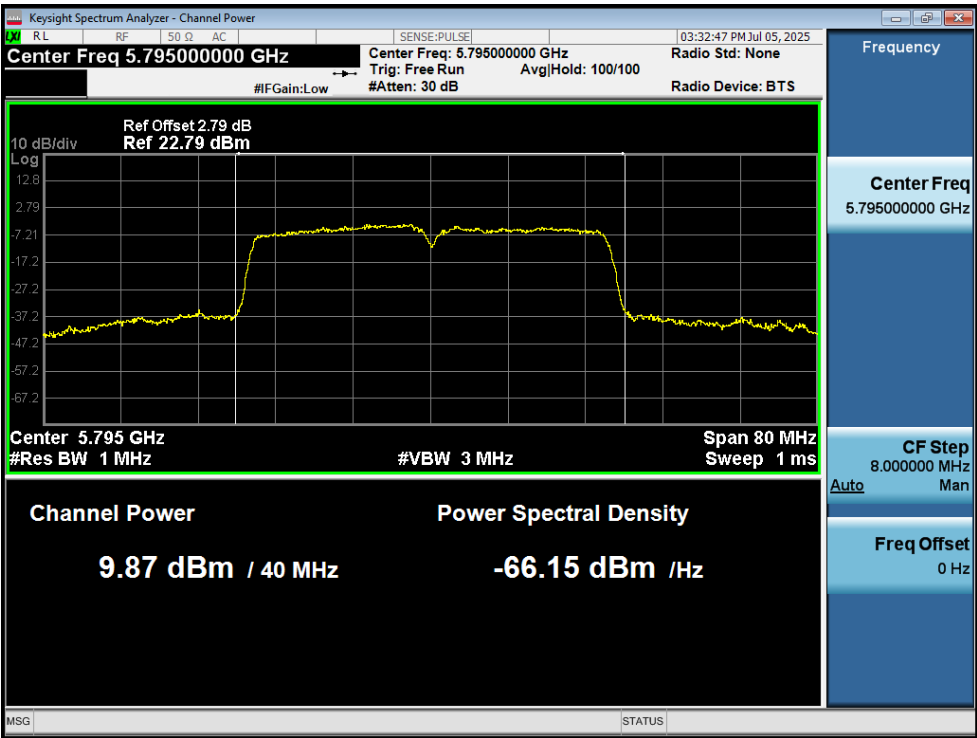


Power NVNT n40 5795MHz Ant1

3. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.396	Pass
NVNT	a	5785	Ant1	16.47	Pass
NVNT	a	5825	Ant1	16.37	Pass
NVNT	n20	5745	Ant1	17.581	Pass
NVNT	n20	5785	Ant1	17.674	Pass
NVNT	n20	5825	Ant1	17.61	Pass
NVNT	n40	5755	Ant1	35.463	Pass
NVNT	n40	5795	Ant1	35.141	Pass

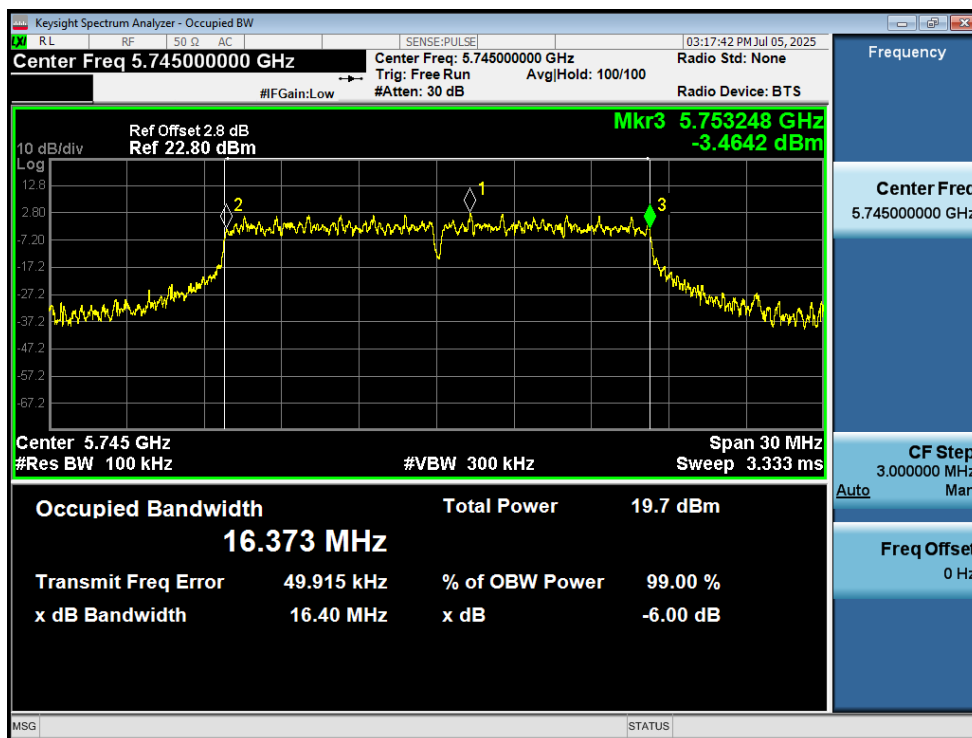


-6dB Bandwidth NVNT a 5745MHz Ant1

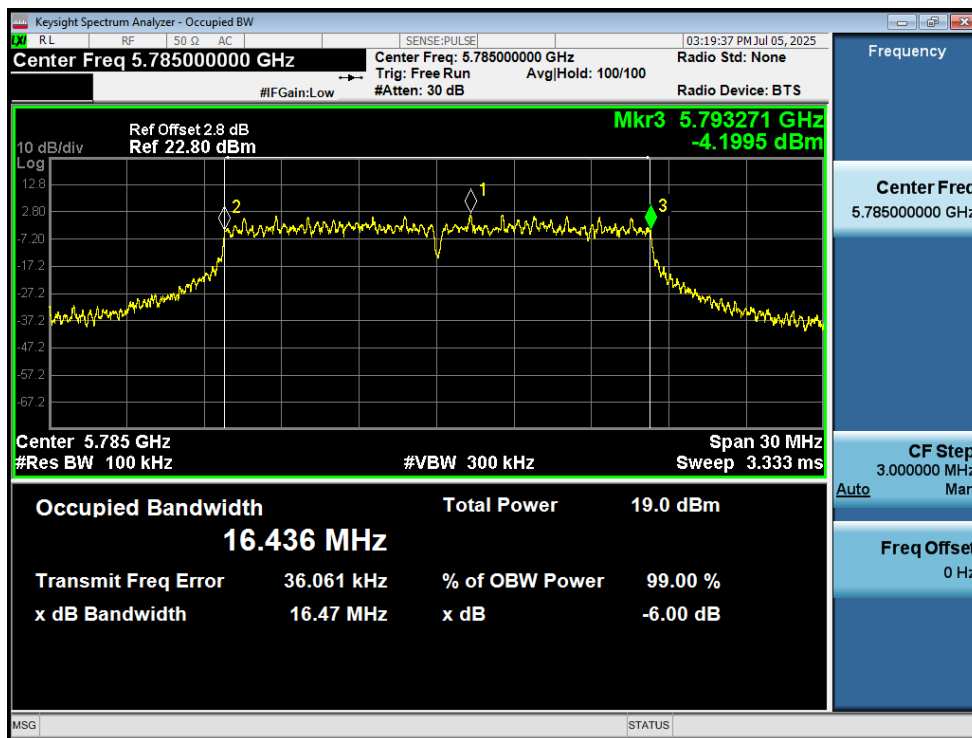


-6dB Bandwidth NVNT a 5785MHz Ant1

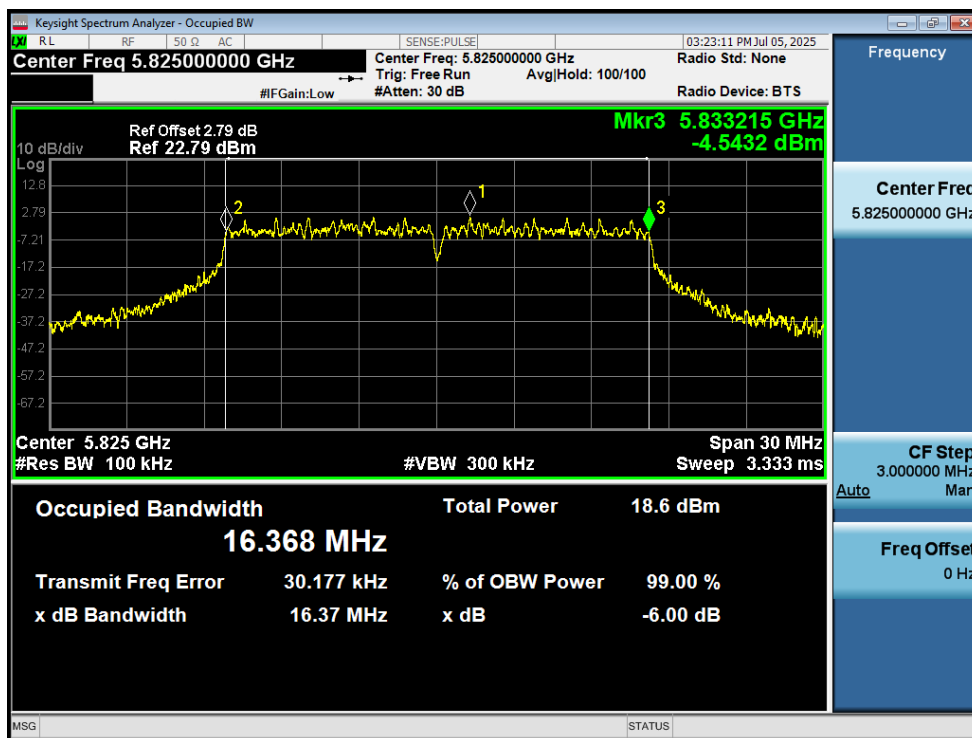


-6dB Bandwidth NVNT a 5825MHz Ant1

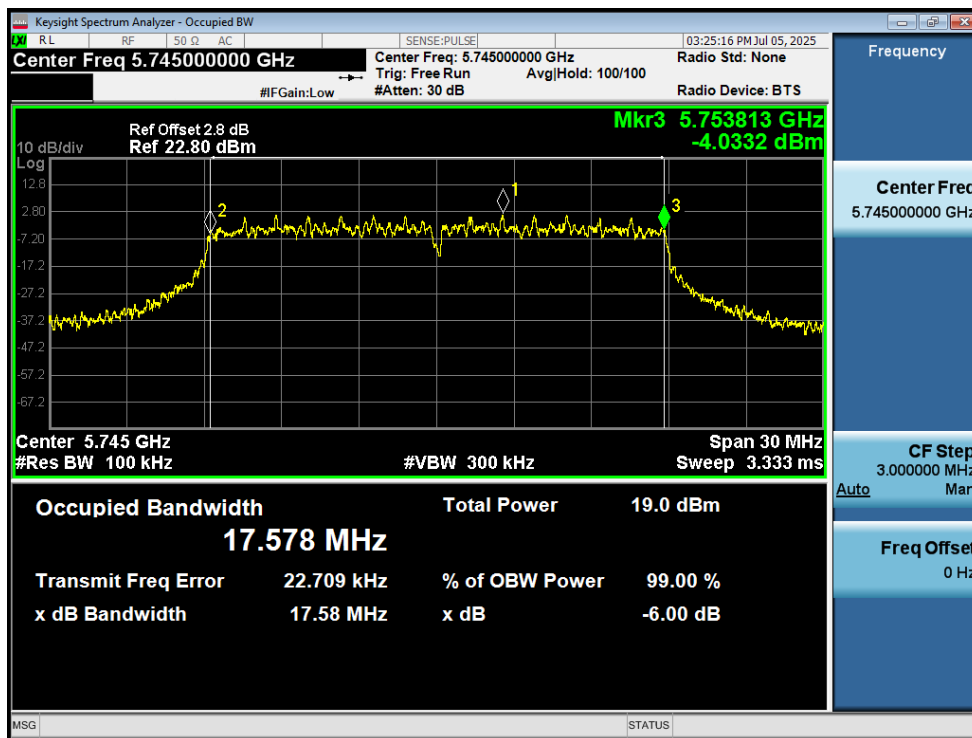


-6dB Bandwidth NVNT n20 5745MHz Ant1

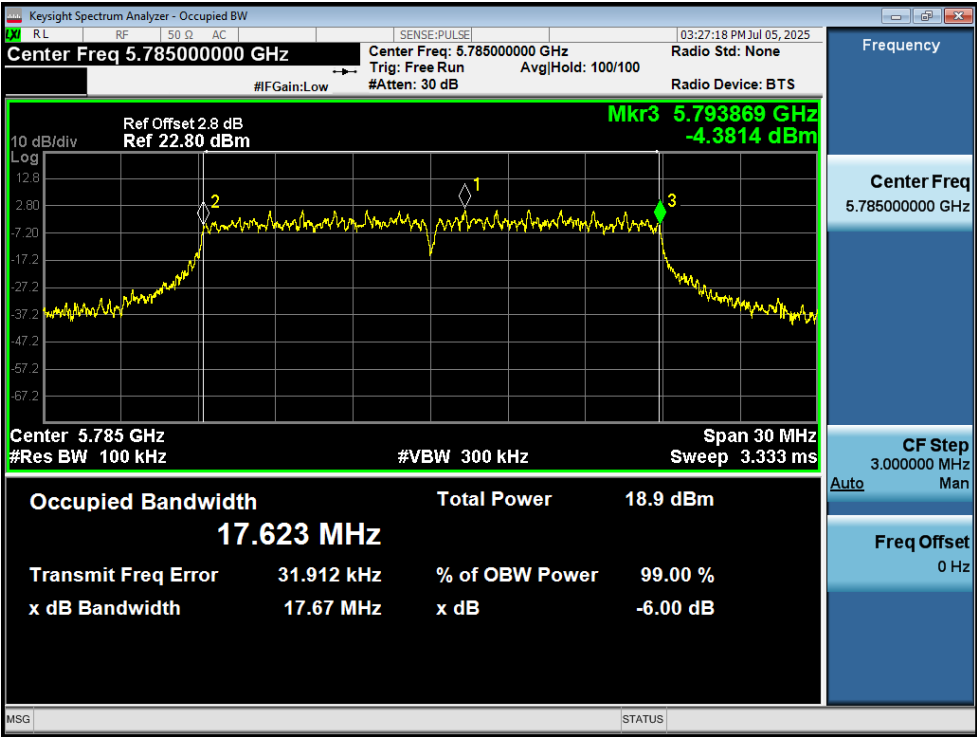


-6dB Bandwidth NVNT n20 5785MHz Ant1

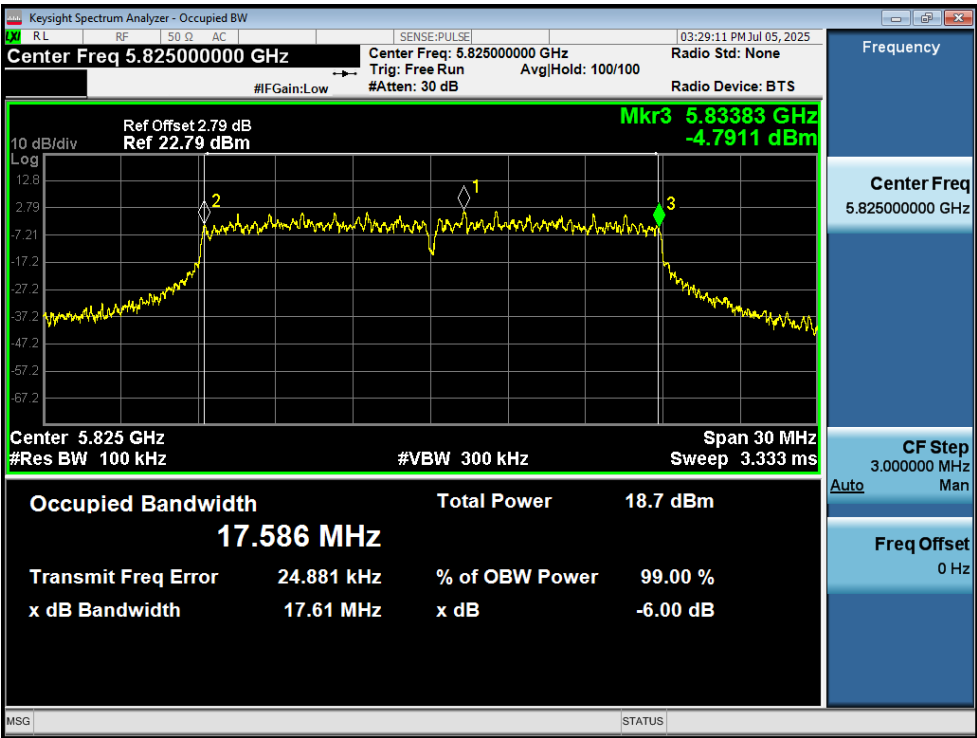

-6dB Bandwidth NVNT n20 5825MHz Ant1

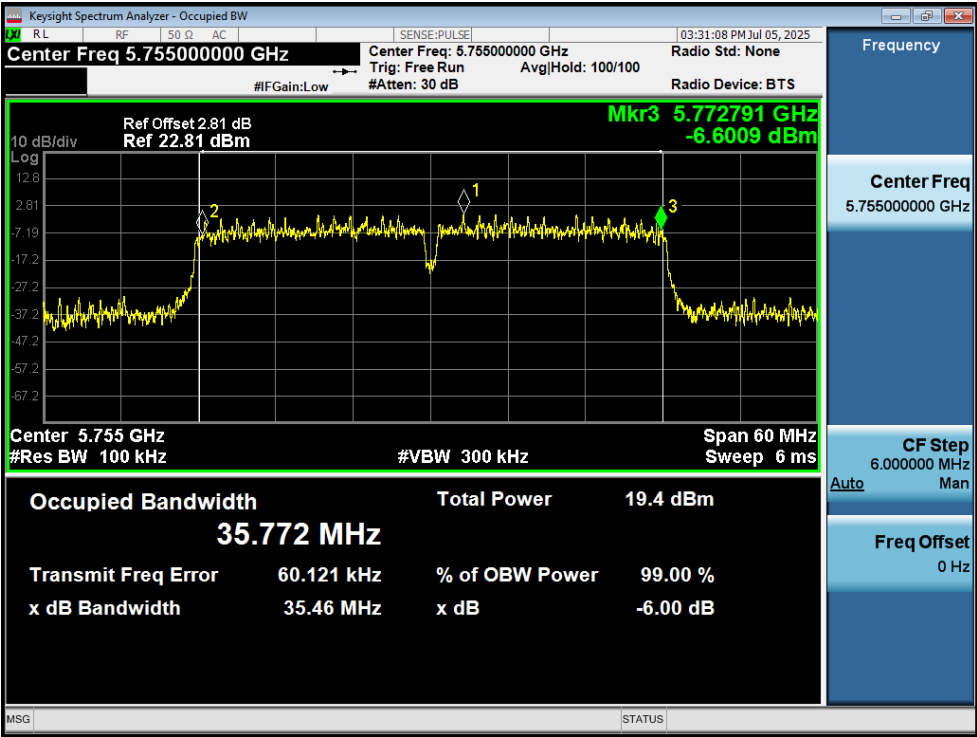


-6dB Bandwidth NVNT n40 5755MHz Ant1

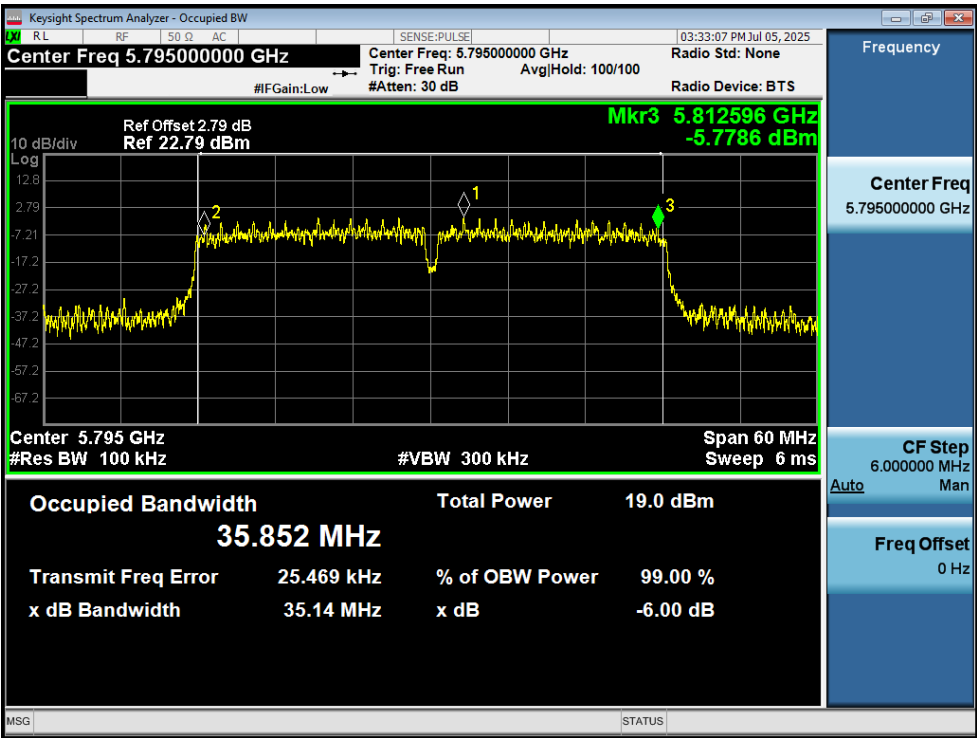


-6dB Bandwidth NVNT n40 5795MHz Ant1

4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.459
NVNT	a	5785	Ant1	16.514
NVNT	a	5825	Ant1	16.464
NVNT	n20	5745	Ant1	17.633
NVNT	n20	5785	Ant1	17.679
NVNT	n20	5825	Ant1	17.624
NVNT	n40	5755	Ant1	35.961
NVNT	n40	5795	Ant1	35.906

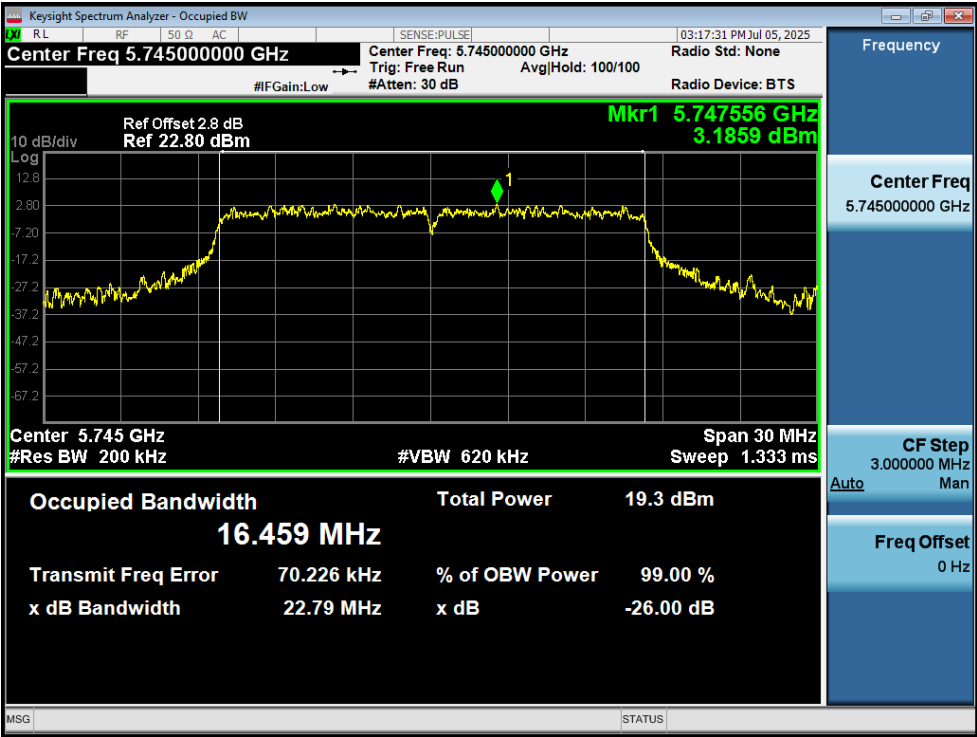


OBW NVNT a 5745MHz Ant1

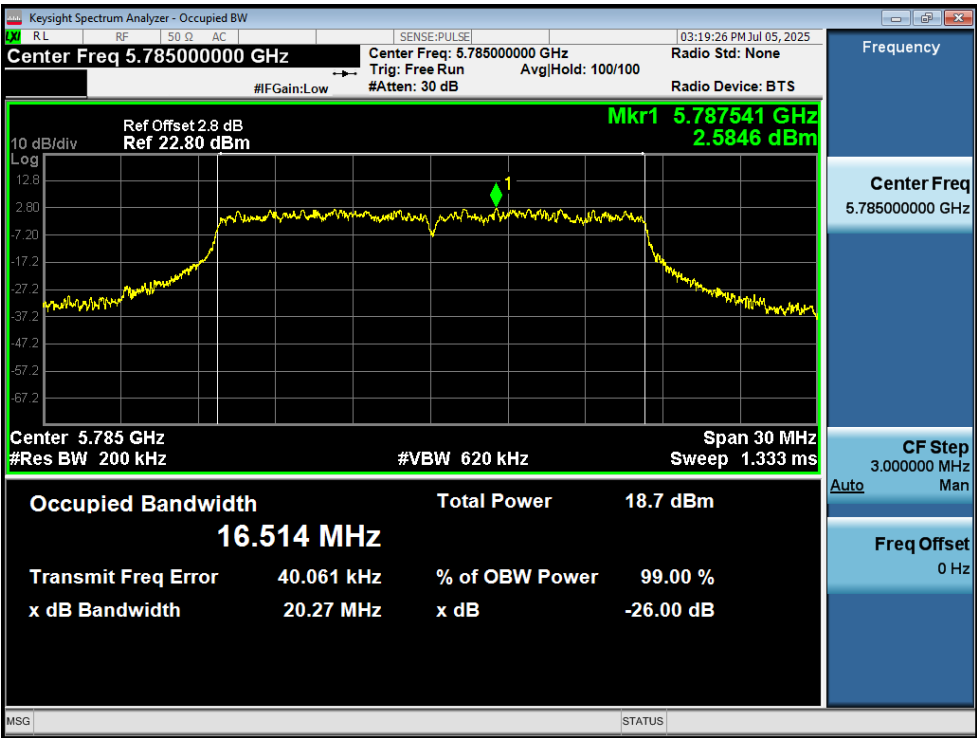


OBW NVNT a 5785MHz Ant1

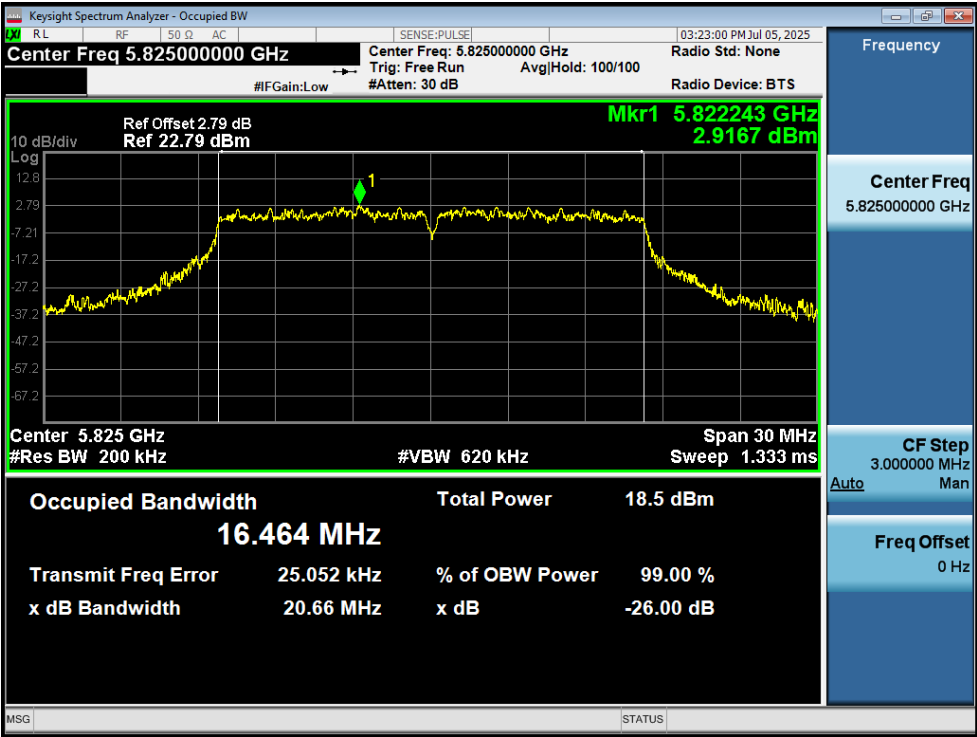


OBW NVNT a 5825MHz Ant1

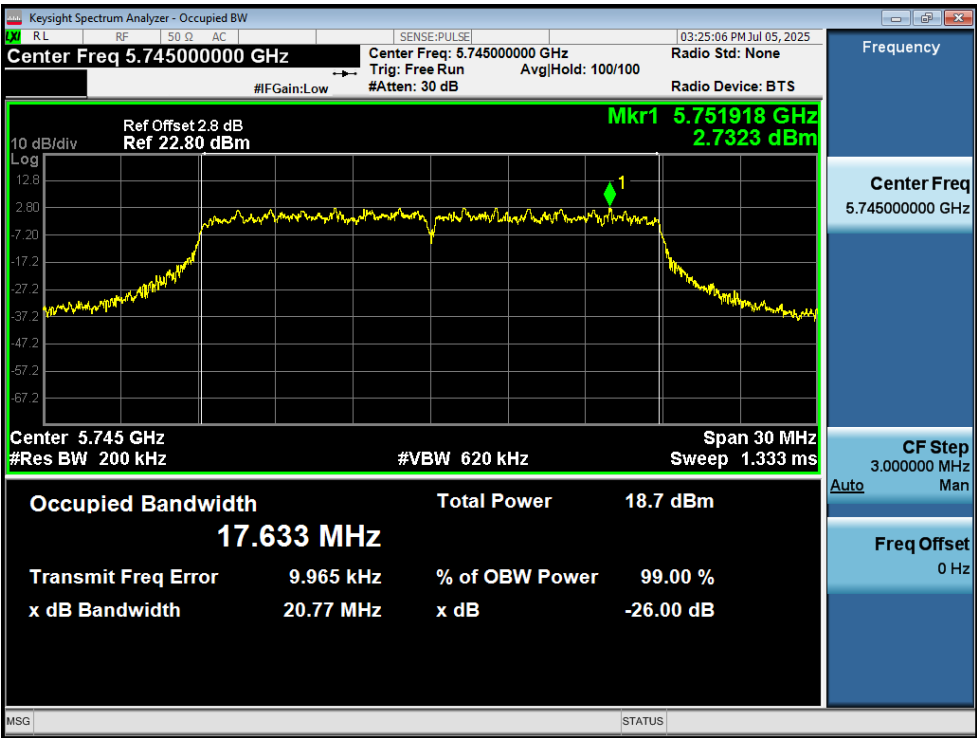


OBW NVNT n20 5745MHz Ant1

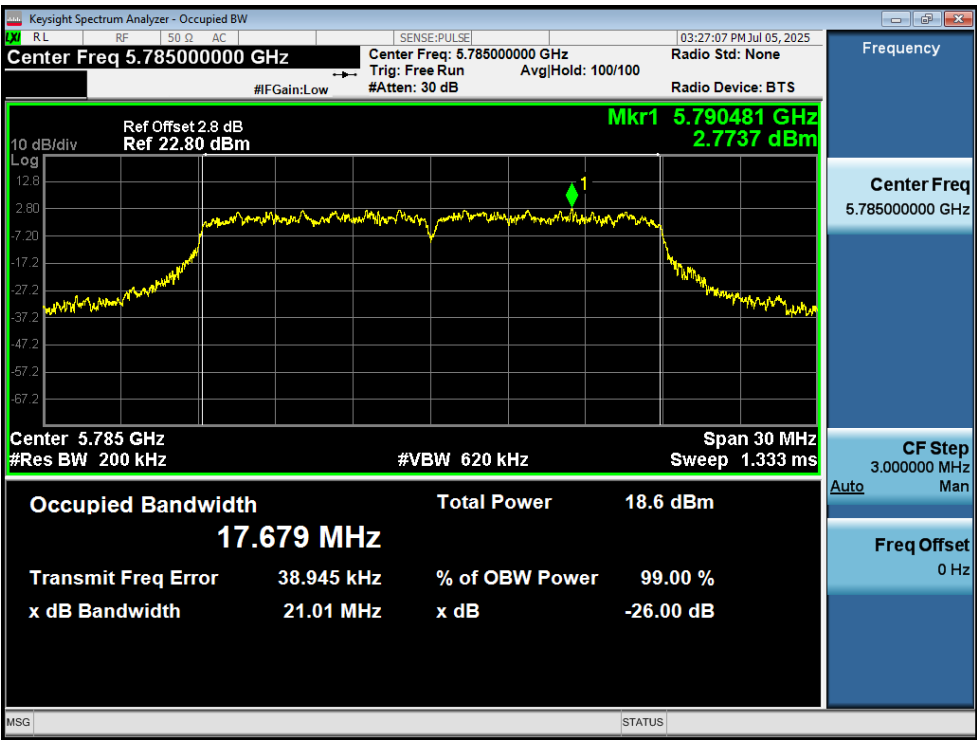


OBW NVNT n20 5785MHz Ant1

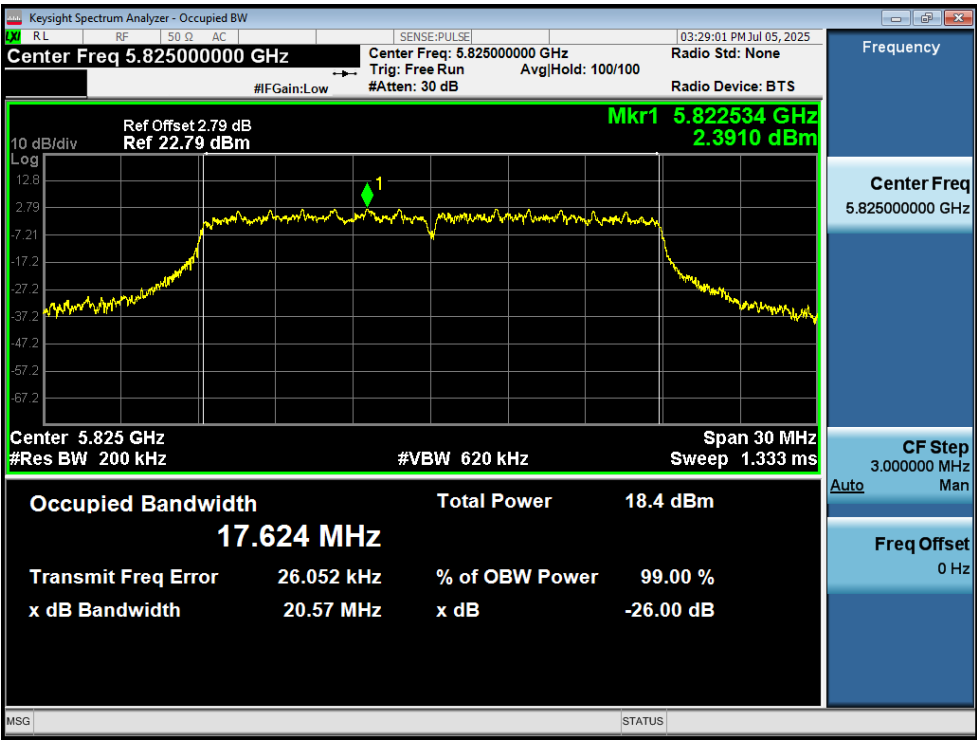

OBW NVNT n20 5825MHz Ant1

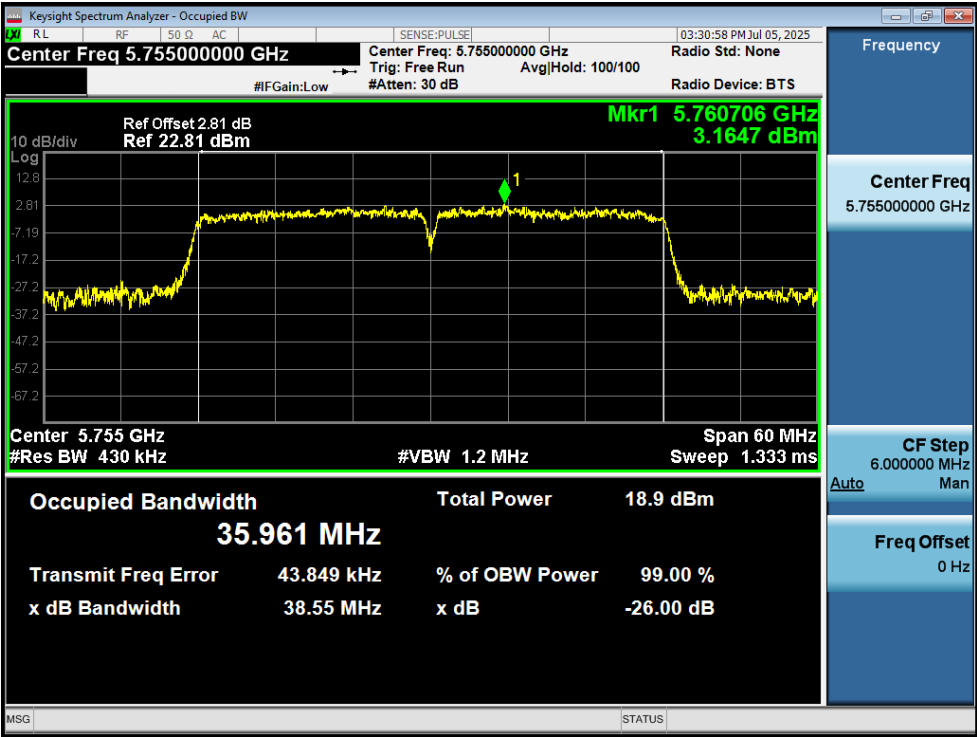

OBW NVNT n40 5755MHz Ant1

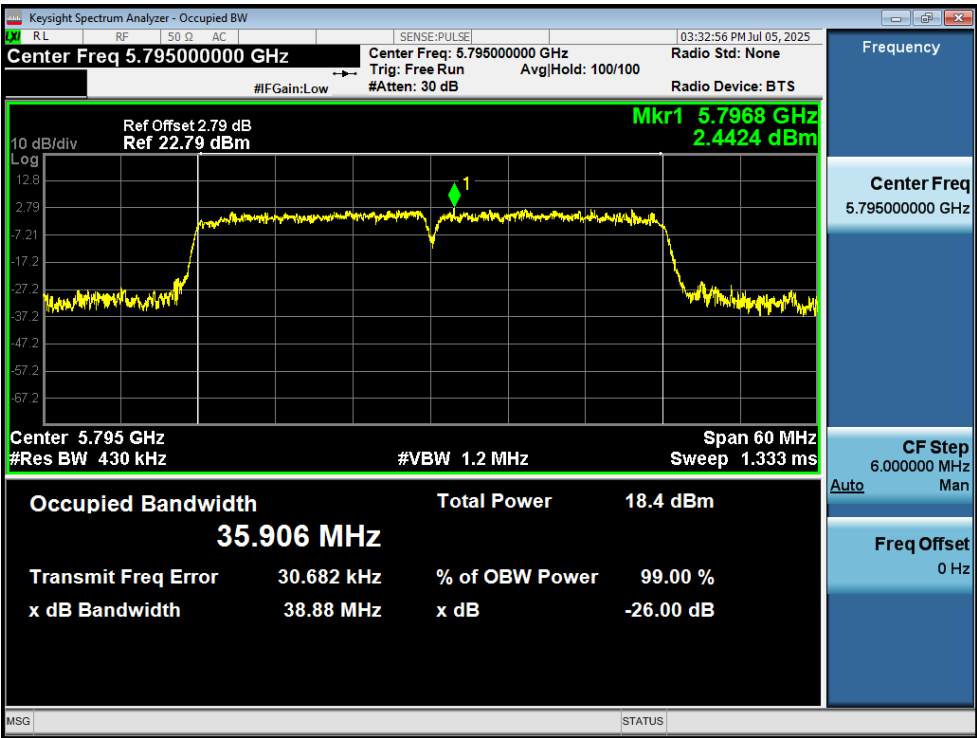

OBW NVNT n40 5795MHz Ant1

5. Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	10log (510/500)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant1	-1.32	1.83	0.086	0.596	30	Pass
NVNT	a	5785	Ant1	-1.97	1.83	0.086	-0.054	30	Pass
NVNT	a	5825	Ant1	-1.96	1.8	0.086	-0.074	30	Pass
NVNT	n20	5745	Ant1	-1.84	1.95	0.086	0.196	30	Pass
NVNT	n20	5785	Ant1	-2.15	1.94	0.086	-0.124	30	Pass
NVNT	n20	5825	Ant1	-2.5	1.94	0.086	-0.474	30	Pass
NVNT	n40	5755	Ant1	-5.37	3.01	0.086	-2.274	30	Pass
NVNT	n40	5795	Ant1	-5.08	2.98	0.086	-2.014	30	Pass

Note 1: Total PSD=Conducted PSD + Duty factor+(10log(Test RBW / Limit RBW)

Note 2: Antenna Gain: 2.69dBi




PSD NVNT a 5745MHz Ant1

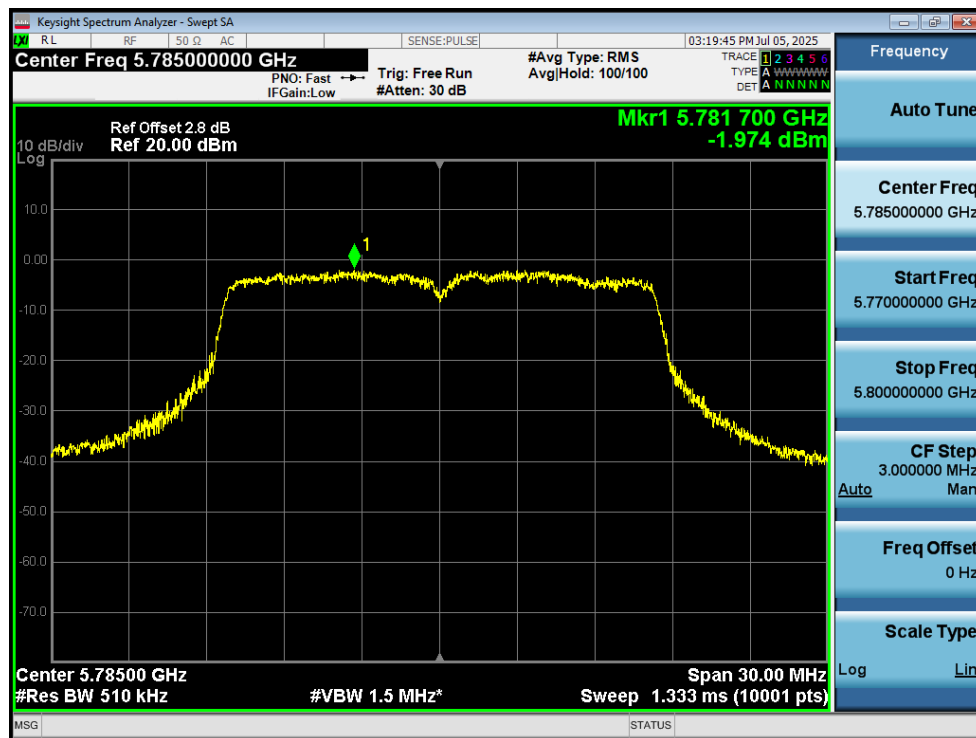


PSD NVNT a 5785MHz Ant1



PSD NVNT a 5825MHz Ant1

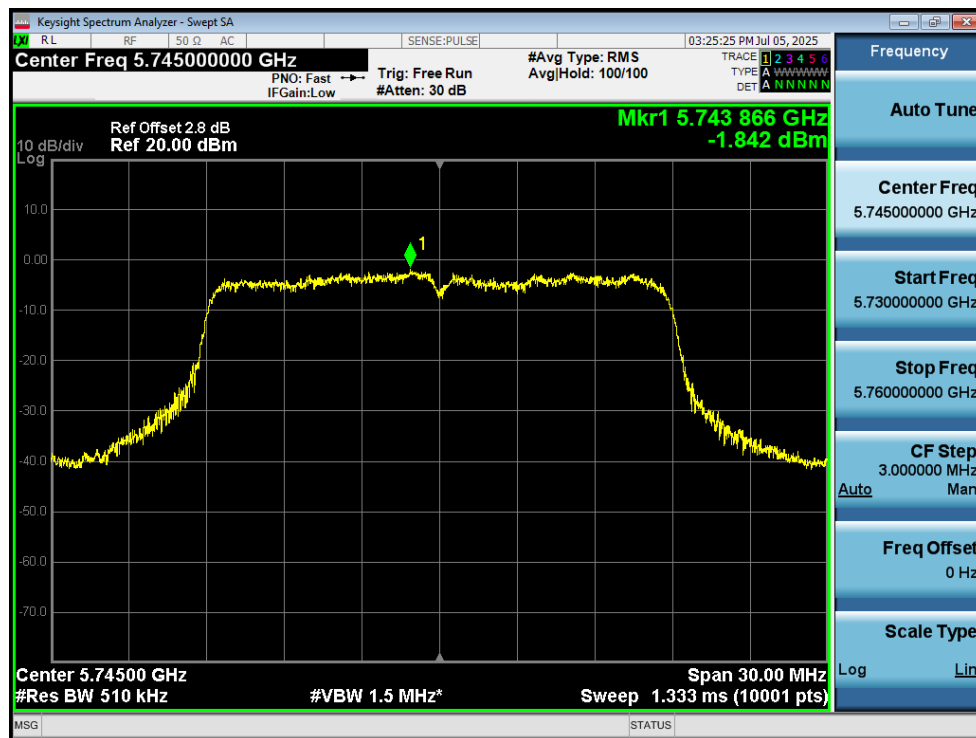

PSD NVNT n20 5745MHz Ant1

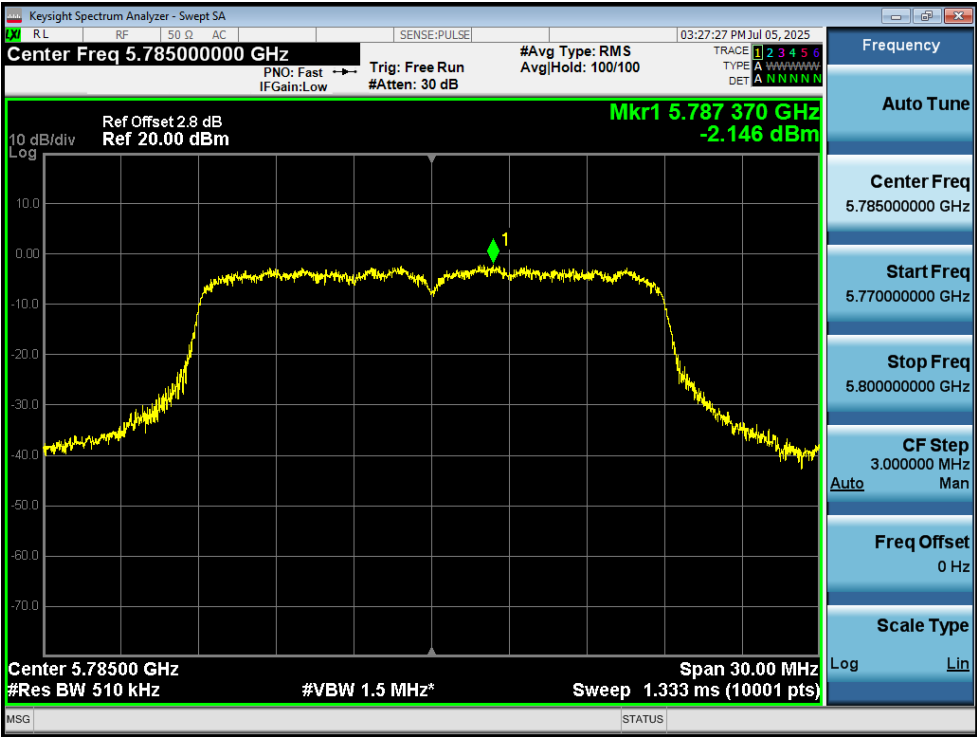


PSD NVNT n20 5785MHz Ant1



PSD NVNT n20 5825MHz Ant1



PSD NVNT n40 5755MHz Ant1

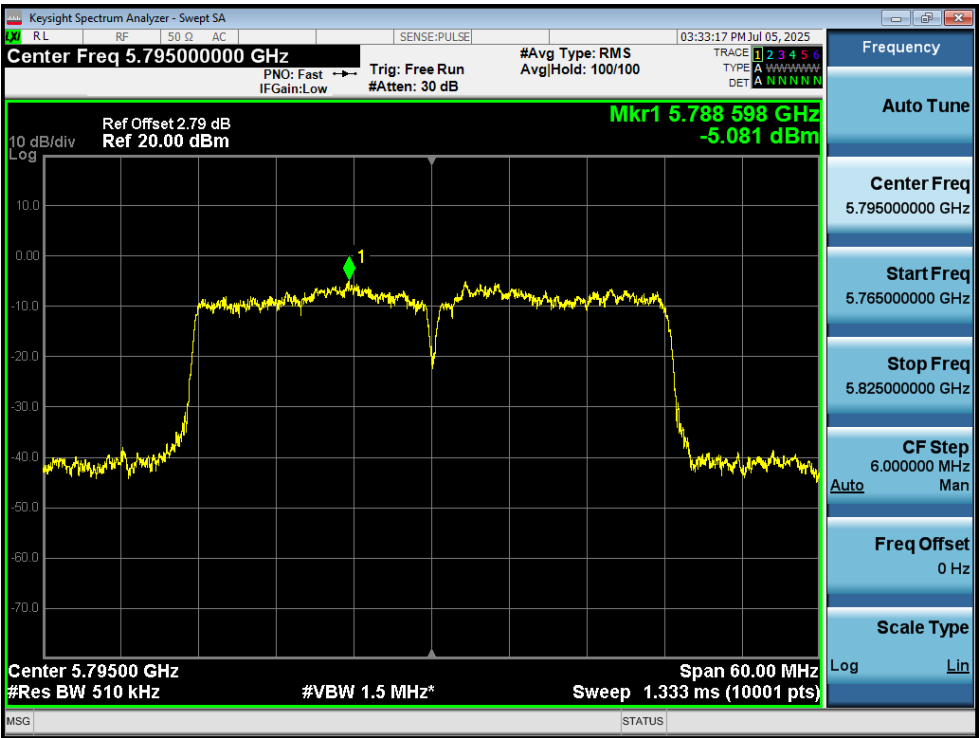


PSD NVNT n40 5795MHz Ant1

6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Verdict
NVNT	a	5745	Ant1	-26.83	Pass
NVNT	a	5825	Ant1	-34	Pass
NVNT	n20	5745	Ant1	-24.04	Pass
NVNT	n20	5825	Ant1	-32.76	Pass
NVNT	n40	5755	Ant1	-22.17	Pass
NVNT	n40	5795	Ant1	-34.68	Pass




Band Edge NVNT a 5745MHz Low Ant1

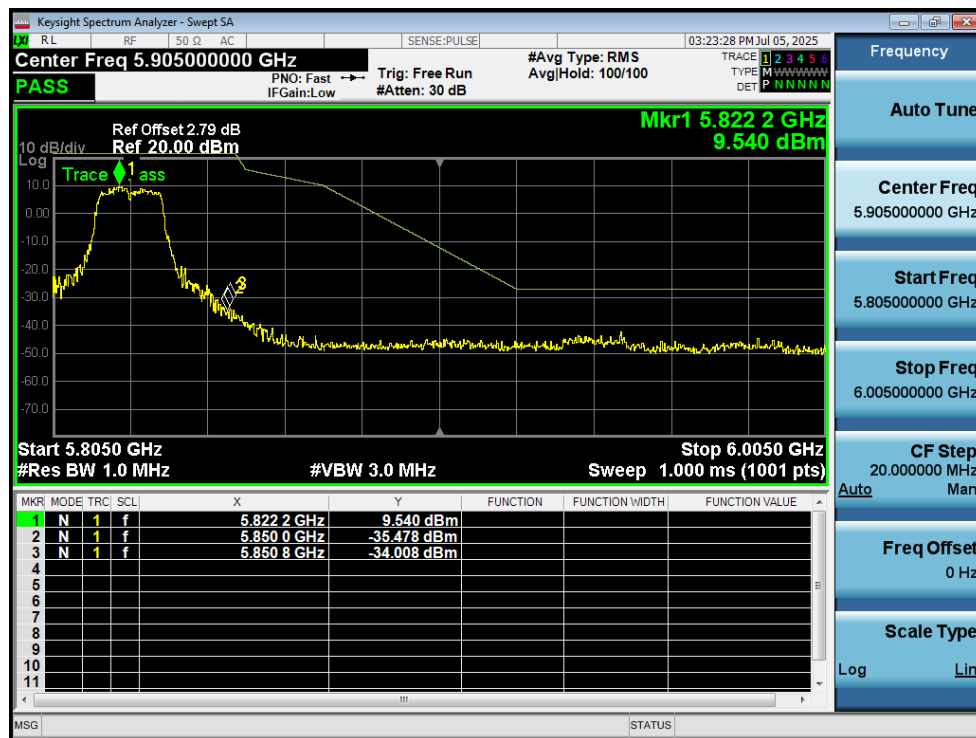


Band Edge NVNT a 5825MHz High Ant1

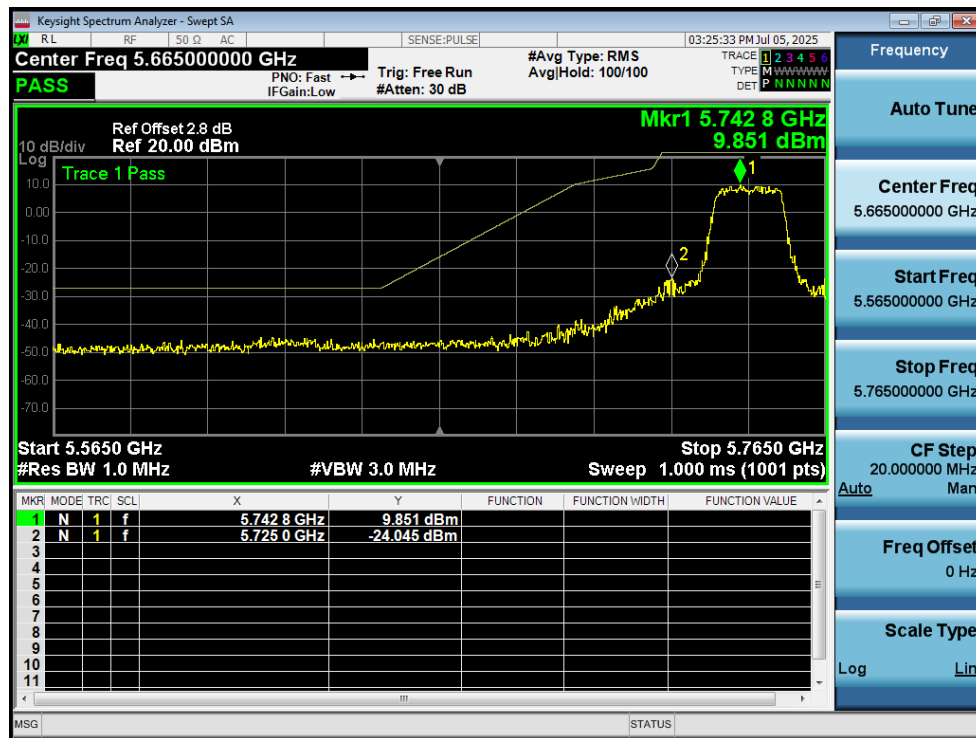

Band Edge NVNT n20 5745MHz Low Ant1

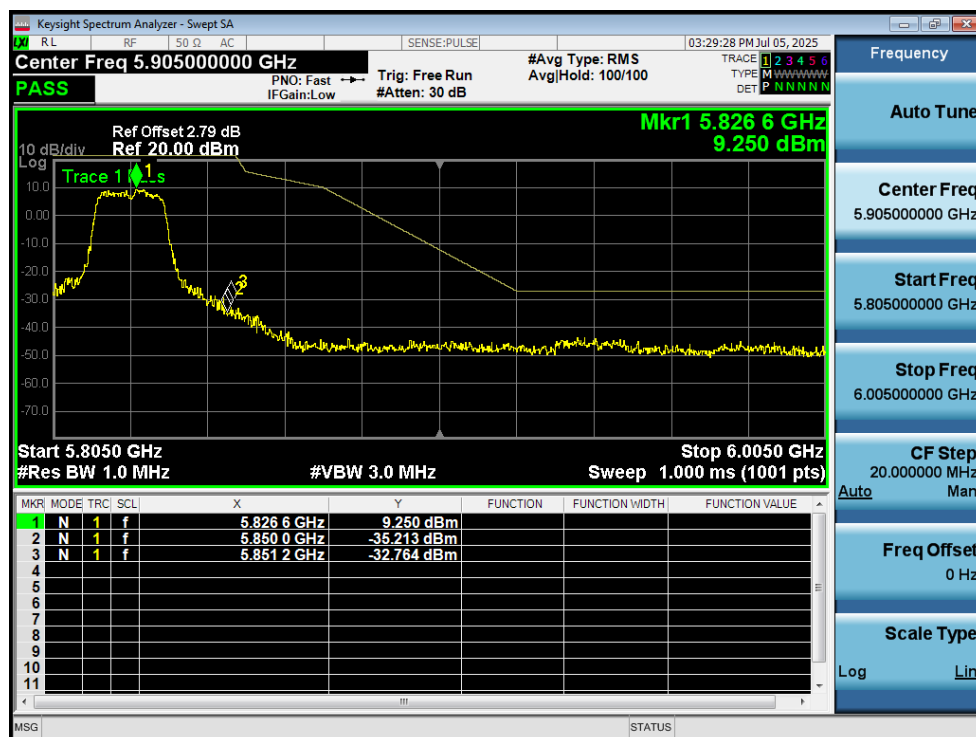

Band Edge NVNT n20 5825MHz High Ant1

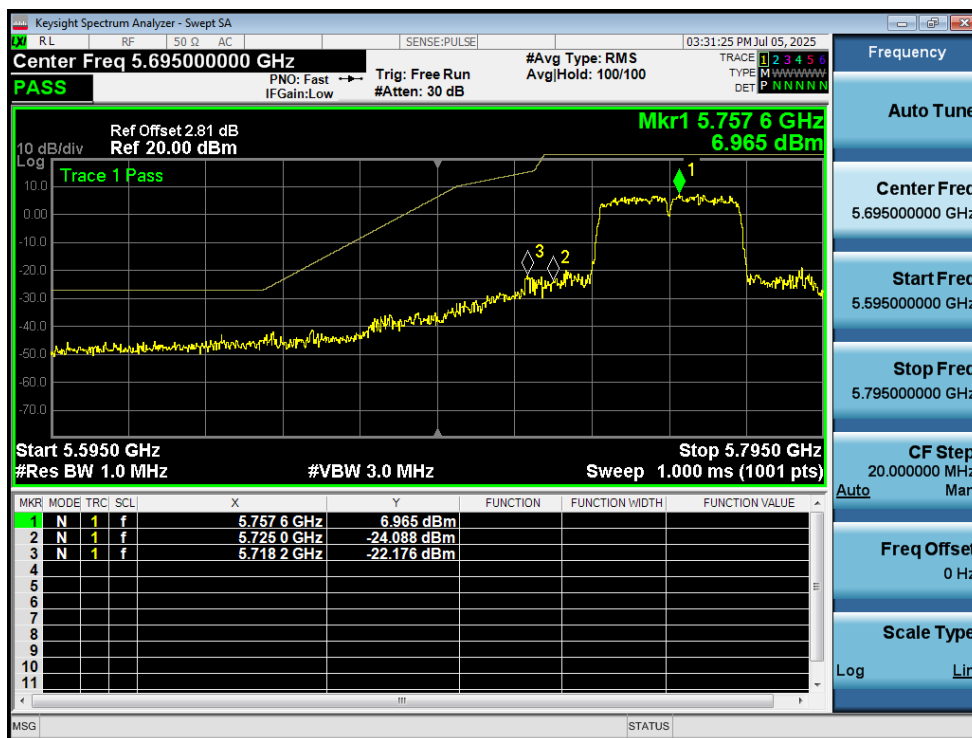

Band Edge NVNT n40 5755MHz Low Ant1




Band Edge NVNT n40 5795MHz High Ant1


7. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5745	Ant1	-34.47	-27	Pass
NVNT	a	5785	Ant1	-34.25	-27	Pass
NVNT	a	5825	Ant1	-34.35	-27	Pass
NVNT	n20	5745	Ant1	-34.05	-27	Pass
NVNT	n20	5785	Ant1	-34.56	-27	Pass
NVNT	n20	5825	Ant1	-34.63	-27	Pass
NVNT	n40	5755	Ant1	-33.85	-27	Pass
NVNT	n40	5795	Ant1	-34.28	-27	Pass


Note: Testing is carried out with frequency rang 30MHz to the 40GHz, above 27GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.

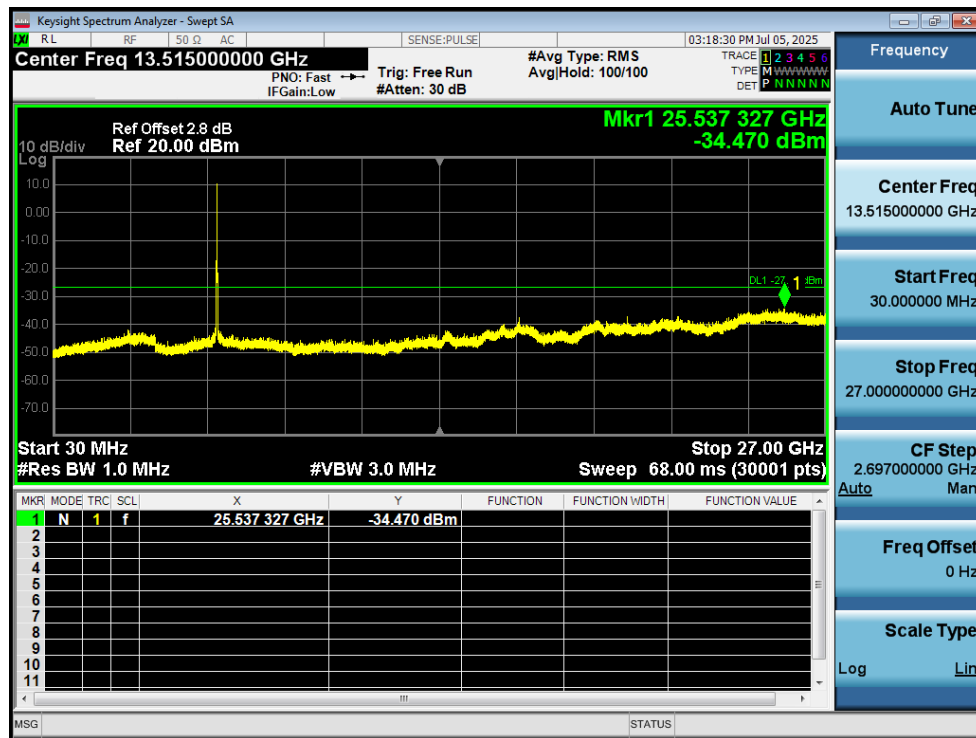


Tx. Spurious NVNT a 5745MHz Ant1 Emission

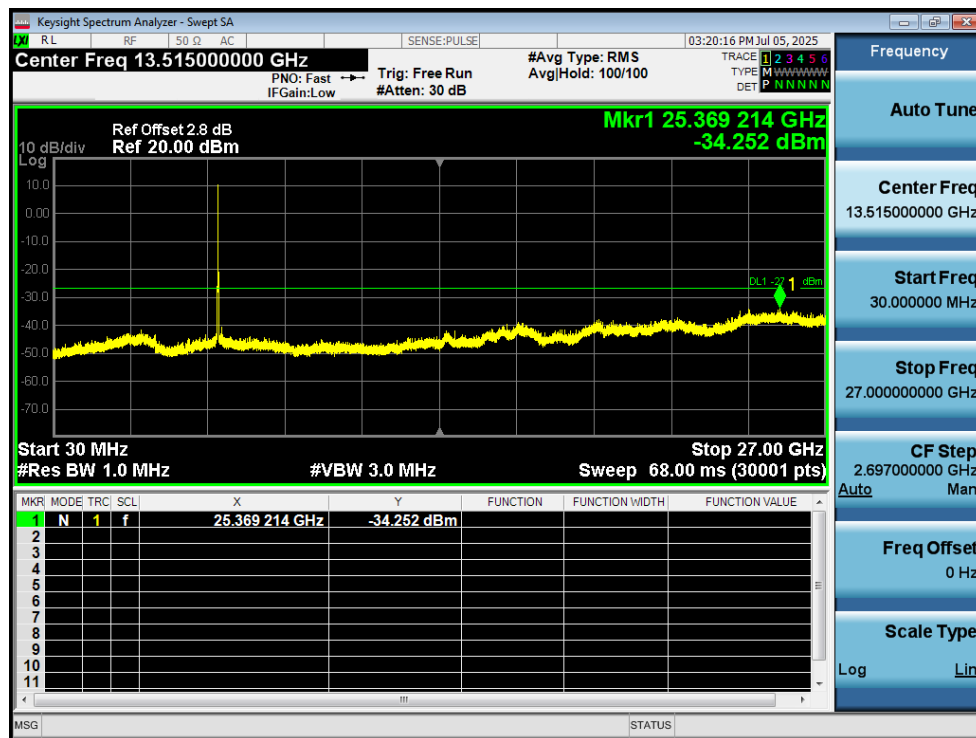


Tx. Spurious NVNT a 5785MHz Ant1 Emission

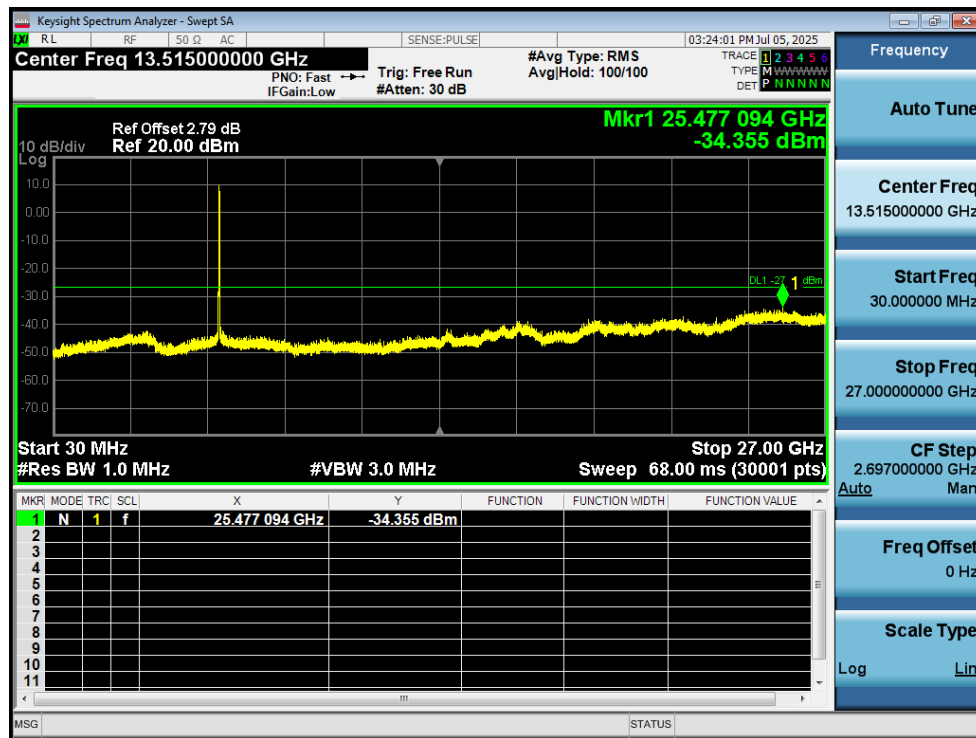


Tx. Spurious NVNT a 5825MHz Ant1 Emission

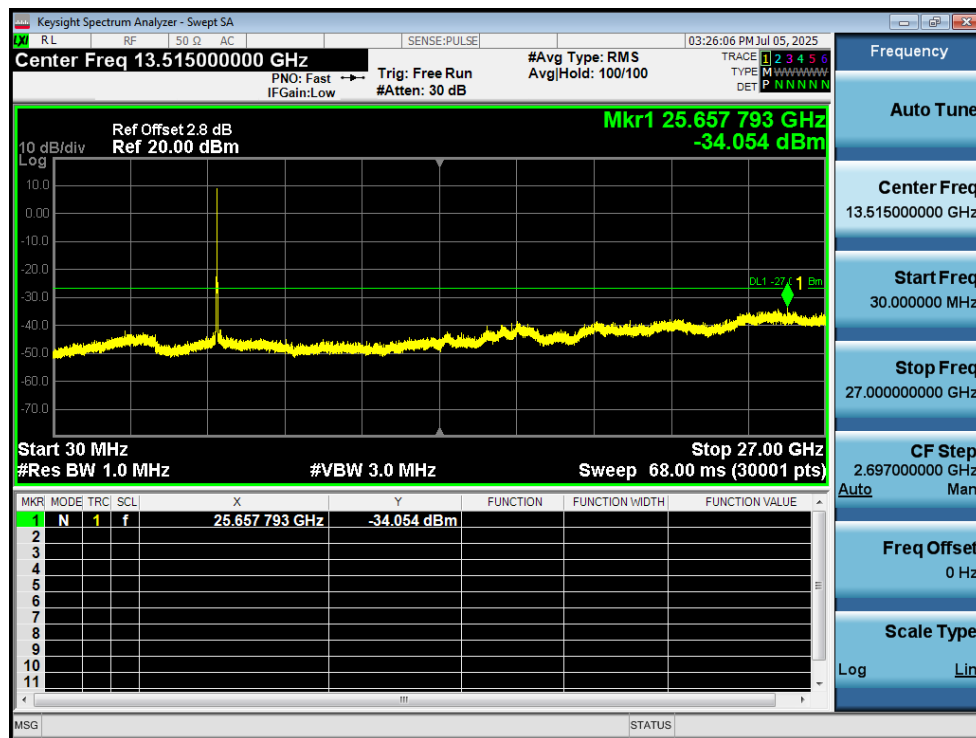


Tx. Spurious NVNT n20 5745MHz Ant1 Emission

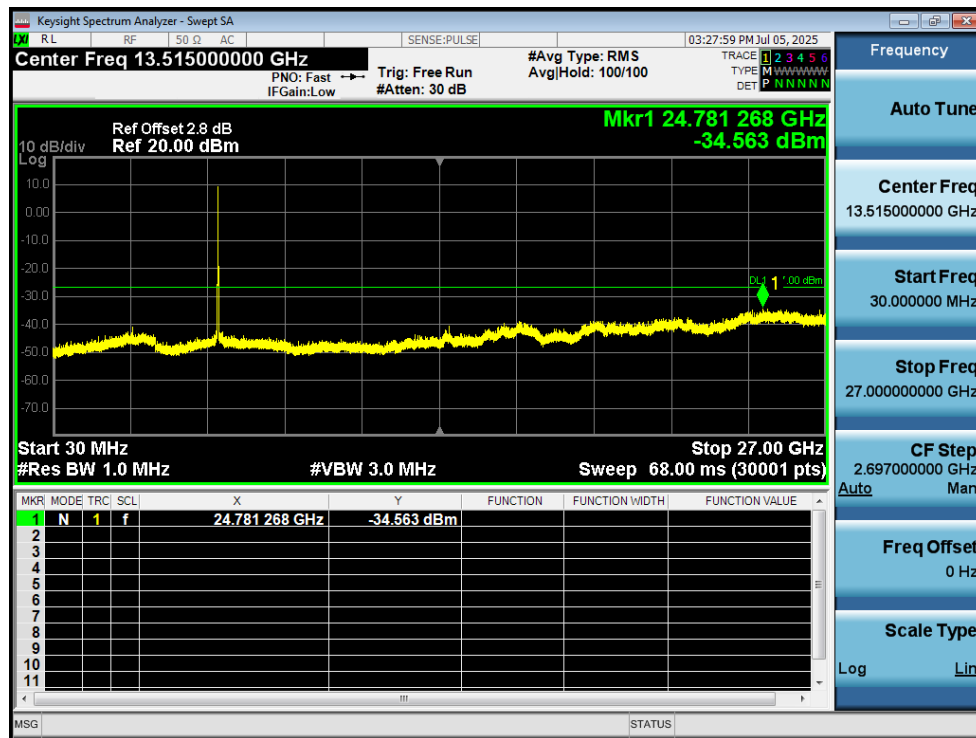


Tx. Spurious NVNT n20 5785MHz Ant1 Emission

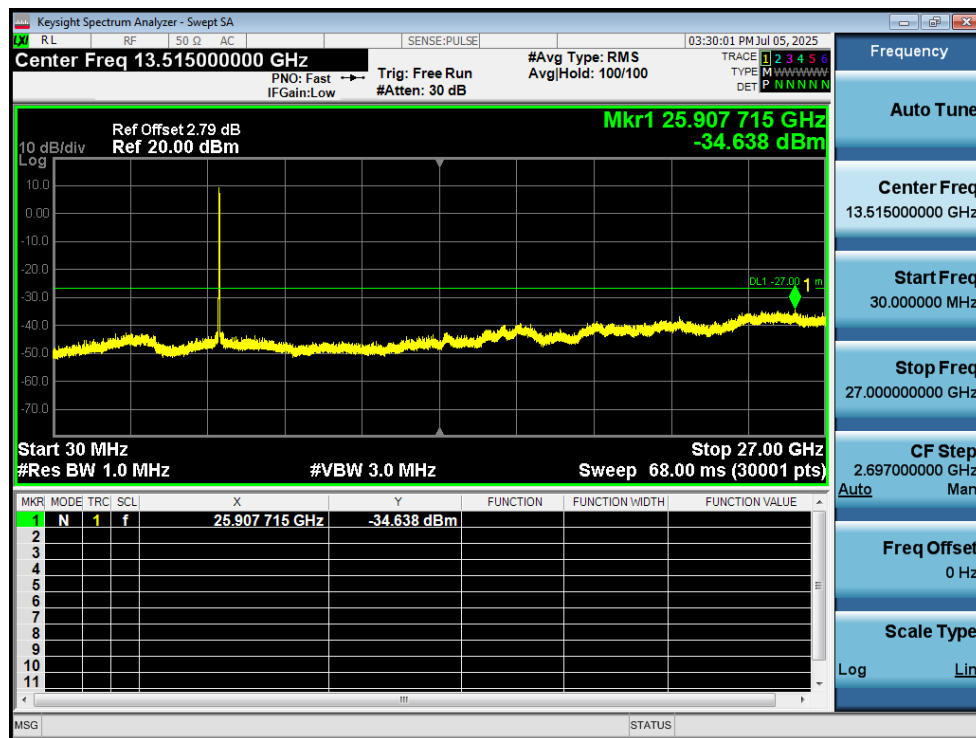

Tx. Spurious NVNT n20 5825MHz Ant1 Emission

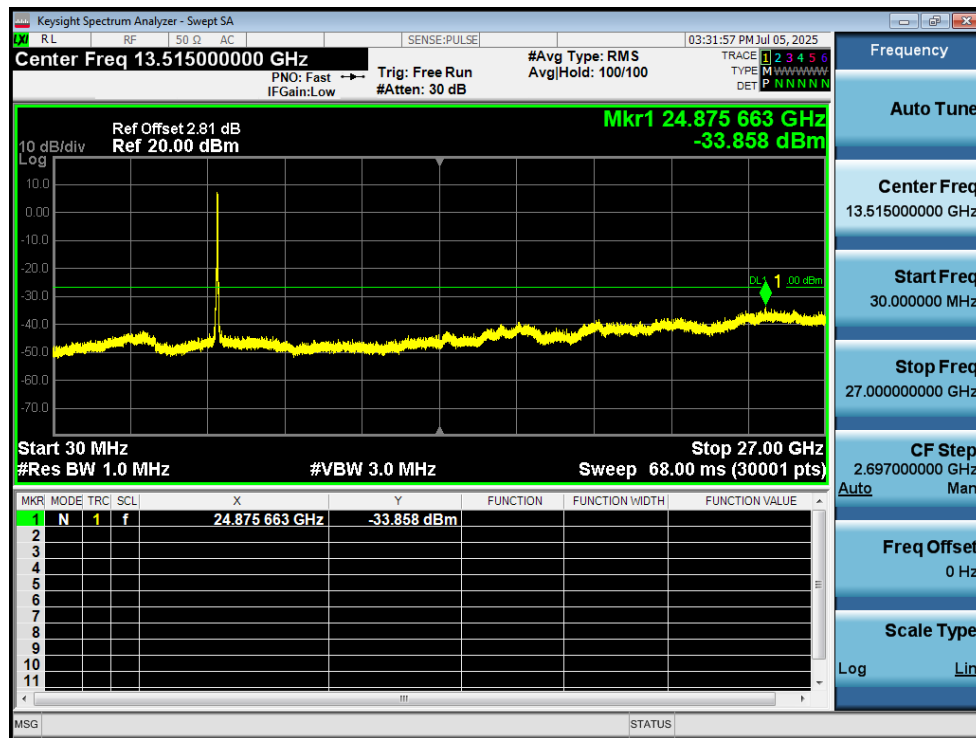

Tx. Spurious NVNT n40 5755MHz Ant1 Emission

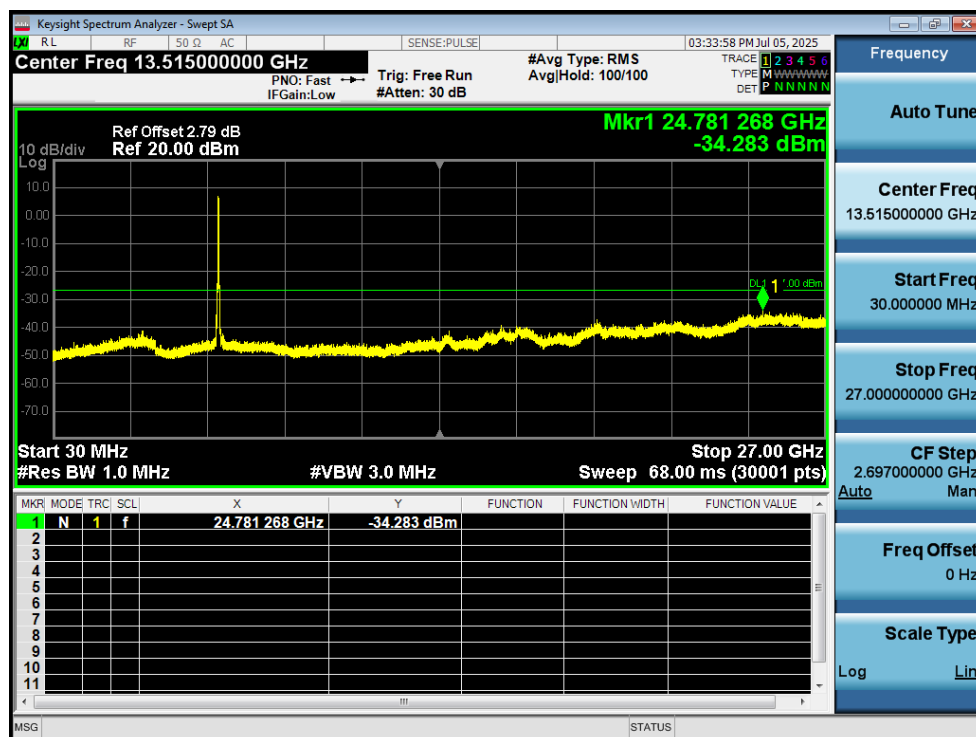

Tx. Spurious NVNT n40 5795MHz Ant1 Emission