

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

WIFI2.4G- Horizontal-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_10.08.44

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

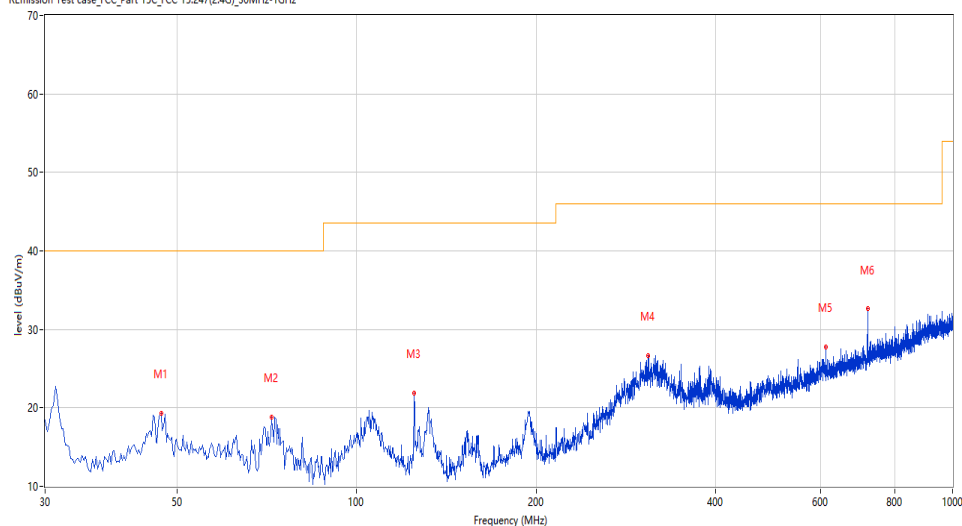

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	46.971	19.32	-19.56	40.0	-20.68	Peak	360.00	200	Horizontal	Pass
2	71.942	18.81	-24.25	40.0	-21.19	Peak	359.90	200	Horizontal	Pass
3	124.794	21.90	-23.36	43.5	-21.60	Peak	92.70	200	Horizontal	Pass
4	308.078	26.70	-17.65	46.0	-19.30	Peak	0.00	200	Horizontal	Pass
5	612.582	27.75	-9.50	46.0	-18.25	Peak	322.60	200	Horizontal	Pass
6	719.983	32.61	-7.88	46.0	-13.39	Peak	163.10	100	Horizontal	Pass

WIFI2.4G-Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_10.05.18

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ


Test Standard: FCC

Work Addition: normal

Load: full load

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

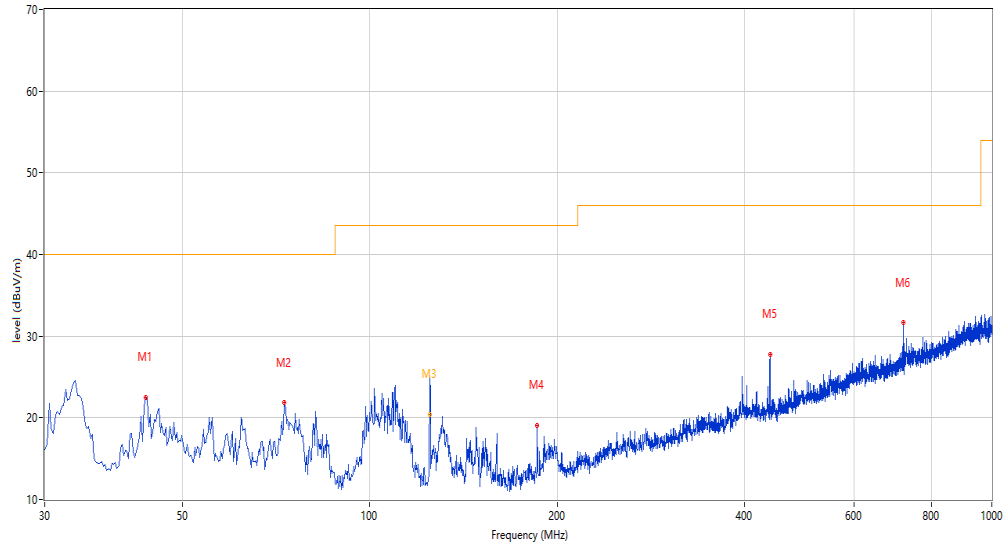

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	43.577	22.53	-19.75	40.0	-17.47	Peak	228.30	100	Vertical	Pass
2	72.912	21.83	-24.63	40.0	-18.17	Peak	172.70	100	Vertical	Pass
3	125.001	19.97	-23.36	43.5	-23.53	Peak	291.10	247	Vertical	Pass
3*	125.001	20.45	-23.36	43.5	-23.05	QP	291.10	247	Vertical	Pass
4	185.889	19.11	-21.71	43.5	-24.39	Peak	184.30	100	Vertical	Pass
5	439.965	27.75	-14.34	46.0	-18.25	Peak	207.80	100	Vertical	Pass
6	719.983	31.63	-7.88	46.0	-14.37	Peak	137.10	100	Vertical	Pass

1-18G

WIFI2.4G-B- Low channel-Horizontal-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_10.56.26

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

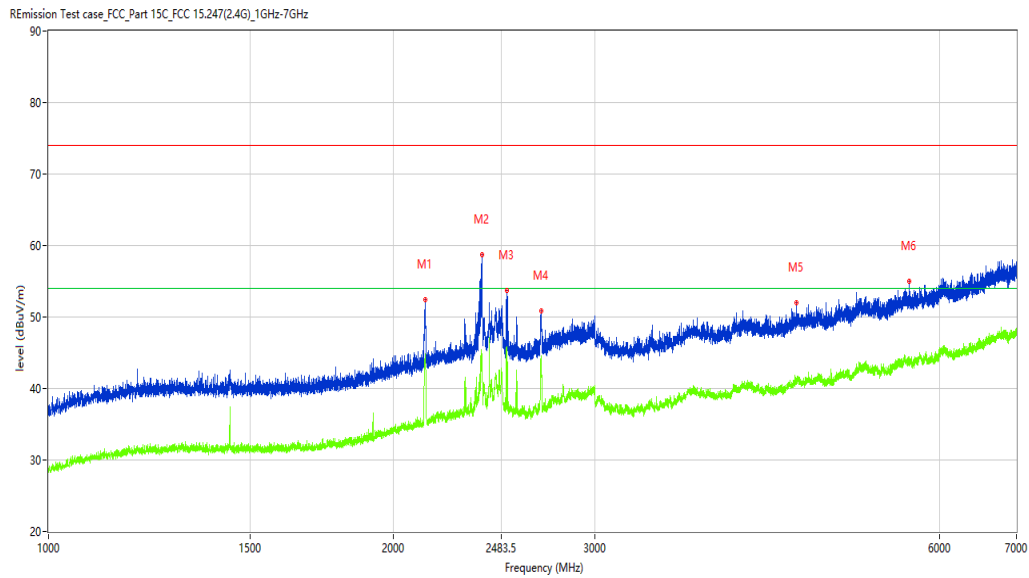

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2131.859	52.45	-9.30	74.0	-21.55	Peak	127.60	100	Horizontal	Pass
1**	2131.859	44.84	-9.30	54.0	-9.16	AV	127.60	100	Horizontal	Pass
2	2390.576	58.78	-6.27	74.0	-15.22	Peak	123.10	100	Horizontal	Pass
2**	2390.576	43.53	-6.27	54.0	-10.47	AV	123.10	100	Horizontal	Pass
3	2511.561	53.76	-7.07	74.0	-20.24	Peak	127.60	100	Horizontal	Pass
3**	2511.561	45.86	-7.07	54.0	-8.14	AV	127.60	100	Horizontal	Pass
4	2692.038	50.86	-6.56	74.0	-23.14	Peak	142.10	100	Horizontal	Pass
4**	2692.038	44.55	-6.56	54.0	-9.45	AV	142.10	100	Horizontal	Pass
5	4496.313	52.06	-1.02	74.0	-21.94	Peak	112.30	100	Horizontal	Pass
5**	4496.313	41.11	-1.02	54.0	-12.89	AV	112.30	100	Horizontal	Pass
6	5641.670	55.00	1.05	74.0	-19.00	Peak	344.00	100	Horizontal	Pass
6**	5641.670	43.50	1.05	54.0	-10.50	AV	344.00	100	Horizontal	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_10.53.25

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8039.240	38.33	8.26	74.0	-35.67	Peak	3.50	100	Horizontal	Pass
1**	8039.240	28.16	8.26	54.0	-25.84	AV	3.50	100	Horizontal	Pass
2	9402.899	41.10	11.52	74.0	-32.90	Peak	293.70	100	Horizontal	Pass
2**	9402.899	32.22	11.52	54.0	-21.78	AV	293.70	100	Horizontal	Pass
3	11184.454	44.99	14.44	74.0	-29.01	Peak	307.80	100	Horizontal	Pass
3**	11184.454	36.34	14.44	54.0	-17.66	AV	307.80	100	Horizontal	Pass
4	13180.455	49.44	18.52	74.0	-24.56	Peak	125.40	100	Horizontal	Pass
4**	13180.455	40.96	18.52	54.0	-13.04	AV	125.40	100	Horizontal	Pass
5	14183.954	52.24	22.24	74.0	-21.76	Peak	192.90	100	Horizontal	Pass
5**	14183.954	45.43	22.24	54.0	-8.57	AV	192.90	100	Horizontal	Pass
6	17796.551	58.27	25.07	74.0	-15.73	Peak	99.40	100	Horizontal	Pass
6**	17796.551	49.42	25.07	54.0	-4.58	AV	99.40	100	Horizontal	Pass

WIFI2.4G-B-Low channel-Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.00.55

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

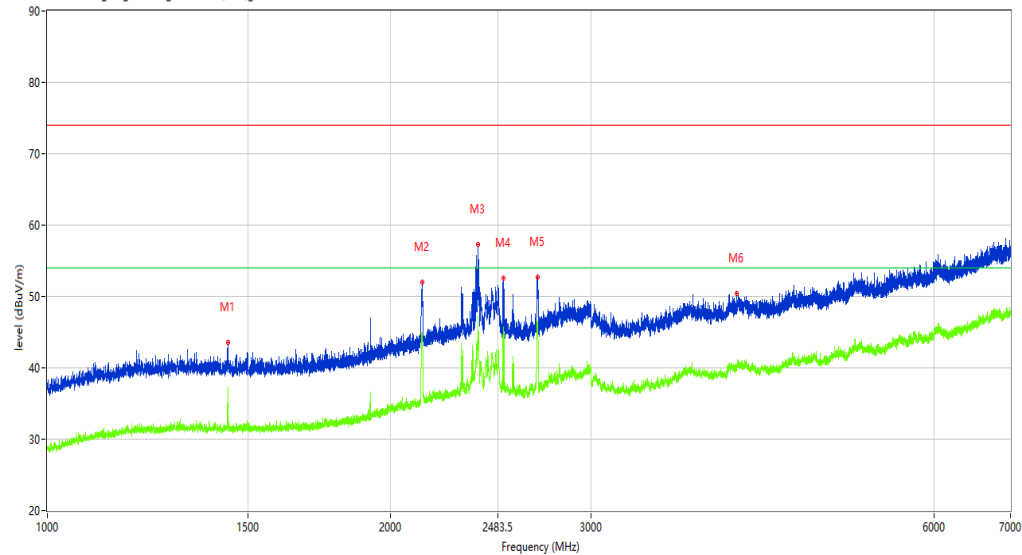

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.195	43.51	-13.03	74.0	-30.49	Peak	212.10	100	Vertical	Pass
1**	1440.195	36.85	-13.03	54.0	-17.15	AV	212.10	100	Vertical	Pass
2	2131.609	51.99	-9.30	74.0	-22.01	Peak	128.60	100	Vertical	Pass
2**	2131.609	44.89	-9.30	54.0	-9.11	AV	128.60	100	Vertical	Pass
3	2387.577	57.26	-7.18	74.0	-16.74	Peak	177.20	100	Vertical	Pass
3**	2387.577	45.79	-7.18	54.0	-8.21	AV	177.20	100	Vertical	Pass
4	2512.061	52.50	-7.03	74.0	-21.50	Peak	177.20	100	Vertical	Pass
4**	2512.061	41.38	-7.03	54.0	-12.62	AV	177.20	100	Vertical	Pass
5	2692.288	52.67	-6.56	74.0	-21.33	Peak	91.70	100	Vertical	Pass
5**	2692.288	46.52	-6.56	54.0	-7.48	AV	91.70	100	Vertical	Pass
6	4025.872	50.38	-1.55	74.0	-23.62	Peak	167.50	100	Vertical	Pass
6**	4025.872	40.48	-1.55	54.0	-13.52	AV	167.50	100	Vertical	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_10.52.10

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

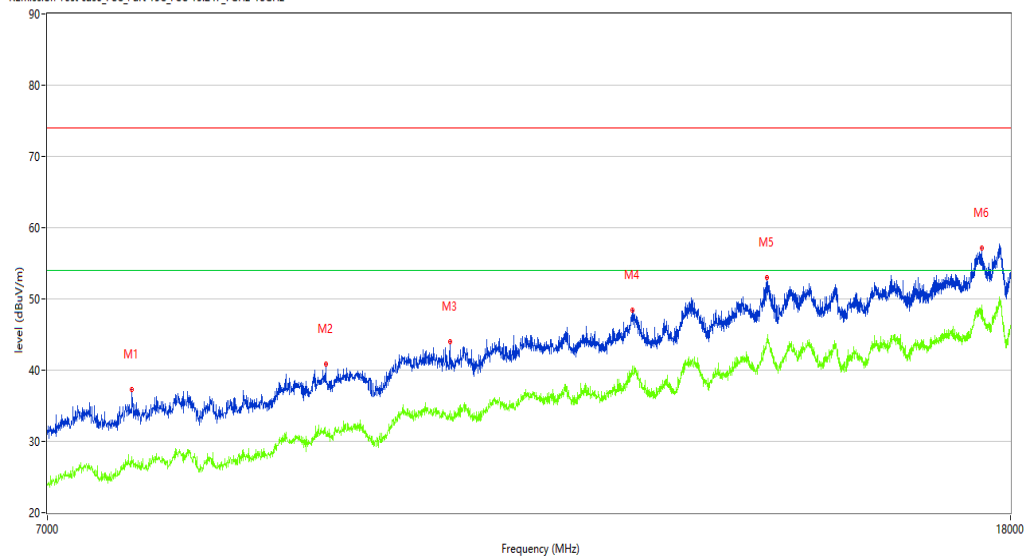

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7604.849	37.33	6.29	74.0	-36.67	Peak	15.60	100	Vertical	Pass
1**	7604.849	27.91	6.29	54.0	-26.09	AV	15.60	100	Vertical	Pass
2	9196.701	40.87	10.45	74.0	-33.13	Peak	0.50	100	Vertical	Pass
2**	9196.701	30.78	10.45	54.0	-23.22	AV	0.50	100	Vertical	Pass
3	10387.153	43.96	12.58	74.0	-30.04	Peak	24.60	100	Vertical	Pass
3**	10387.153	34.35	12.58	54.0	-19.65	AV	24.60	100	Vertical	Pass
4	12427.143	48.42	17.04	74.0	-25.58	Peak	47.30	100	Vertical	Pass
4**	12427.143	39.53	17.04	54.0	-14.47	AV	47.30	100	Vertical	Pass
5	14170.207	53.06	21.83	74.0	-20.94	Peak	20.10	100	Vertical	Pass
5**	14170.207	44.31	21.83	54.0	-9.69	AV	20.10	100	Vertical	Pass
6	17507.873	57.12	24.58	74.0	-16.88	Peak	56.60	100	Vertical	Pass
6**	17507.873	49.19	24.58	54.0	-4.81	AV	56.60	100	Vertical	Pass

WIFI2.4G-B-Middle channel-Horizontal-TX

Test result

Project Number: E21030014

Test Time: 2021-04-02_18.24.16

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RSE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

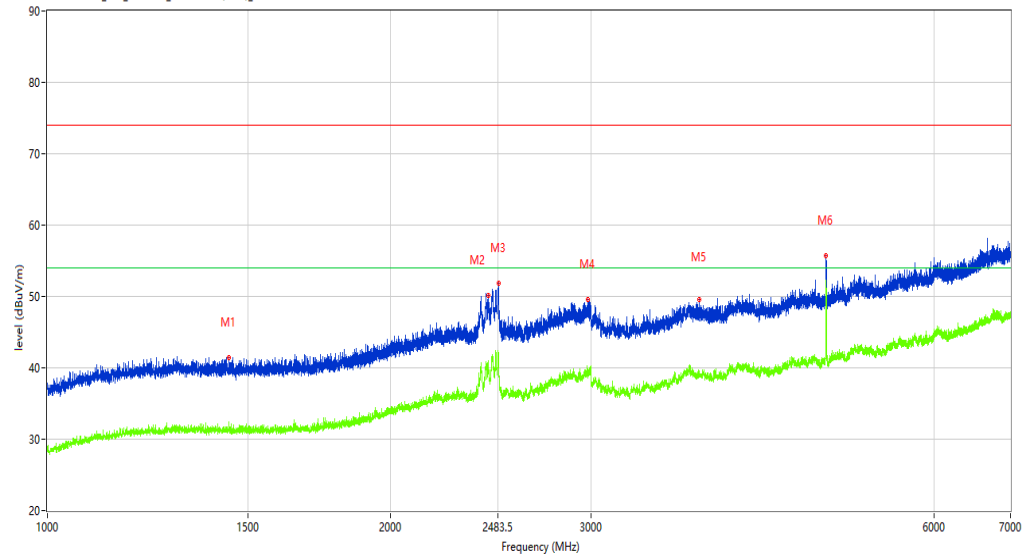

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1443.445	41.42	-13.08	74.0	-32.58	Peak	276.60	100	Horizontal	Pass
1**	1443.445	31.16	-13.08	54.0	-22.84	AV	276.60	100	Horizontal	Pass
2	2439.320	50.08	-3.55	74.0	-23.92	Peak	121.20	100	Horizontal	Pass
2**	2439.320	40.03	-3.55	54.0	-13.97	AV	121.20	100	Horizontal	Pass
3	2487.814	51.88	-2.43	74.0	-22.12	Peak	354.20	100	Horizontal	Pass
3**	2487.814	41.91	-2.43	54.0	-12.09	AV	354.20	100	Horizontal	Pass
4	2980.502	49.56	-3.24	74.0	-24.44	Peak	330.80	100	Horizontal	Pass
4**	2980.502	39.11	-3.24	54.0	-14.89	AV	330.80	100	Horizontal	Pass
5	3729.909	49.61	-2.73	74.0	-24.39	Peak	178.30	100	Horizontal	Pass
5**	3729.909	38.81	-2.73	54.0	-15.19	AV	178.30	100	Horizontal	Pass
6	4823.772	55.76	-1.33	74.0	-18.24	Peak	279.60	100	Horizontal	Pass
6**	4823.772	52.32	-1.33	54.0	-1.68	AV	279.60	100	Horizontal	Pass

Test result

Project Number: E21030014

Test Time: 2021-04-02_17:57.43

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RSE01-E21030014-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8041.990	37.22	8.30	74.0	-36.78	Peak	338.00	100	Horizontal	Pass
1**	8041.990	28.23	8.30	54.0	-25.77	AV	338.00	100	Horizontal	Pass
2	9287.428	40.58	10.29	74.0	-33.42	Peak	335.00	100	Horizontal	Pass
2**	9287.428	31.13	10.29	54.0	-22.87	AV	335.00	100	Horizontal	Pass
3	10145.214	43.68	13.11	74.0	-30.32	Peak	58.70	100	Horizontal	Pass
3**	10145.214	34.55	13.11	54.0	-19.45	AV	58.70	100	Horizontal	Pass
4	10871.032	45.26	14.71	74.0	-28.74	Peak	9.80	100	Horizontal	Pass
4**	10871.032	35.98	14.71	54.0	-18.02	AV	9.80	100	Horizontal	Pass
5	12454.636	48.59	17.15	74.0	-25.41	Peak	181.50	100	Horizontal	Pass
5**	12454.636	39.69	17.15	54.0	-14.31	AV	181.50	100	Horizontal	Pass
6	14197.701	53.10	22.13	74.0	-20.90	Peak	6.80	100	Horizontal	Pass
6**	14197.701	44.19	22.13	54.0	-9.81	AV	6.80	100	Horizontal	Pass

WIFI2.4G-B-Middle channel-Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-04-02_18.18.25

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RSE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

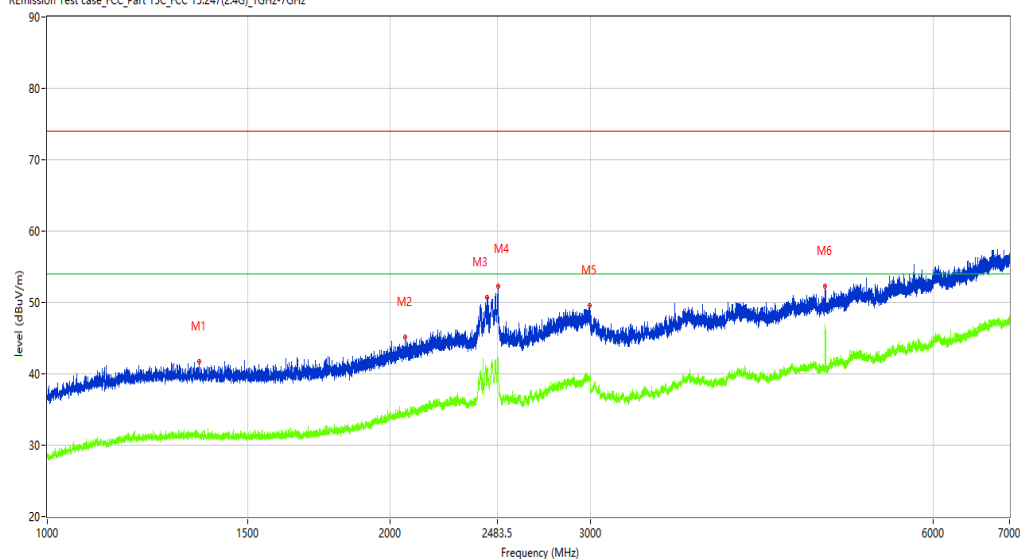

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1358.705	41.78	-12.87	74.0	-32.22	Peak	128.40	100	Vertical	Pass
1**	1358.705	31.12	-12.87	54.0	-22.88	AV	128.40	100	Vertical	Pass
2	2061.367	45.12	-9.69	74.0	-28.88	Peak	253.20	100	Vertical	Pass
2**	2061.367	34.54	-9.69	54.0	-19.46	AV	253.20	100	Vertical	Pass
3	2434.071	50.65	-3.67	74.0	-23.35	Peak	141.50	100	Vertical	Pass
3**	2434.071	40.16	-3.67	54.0	-13.84	AV	141.50	100	Vertical	Pass
4	2487.314	52.23	-2.44	74.0	-21.77	Peak	121.80	100	Vertical	Pass
4**	2487.314	41.96	-2.44	54.0	-12.04	AV	121.80	100	Vertical	Pass
5	2996.500	49.51	-3.11	74.0	-24.49	Peak	162.00	100	Vertical	Pass
5**	2996.500	39.41	-3.11	54.0	-14.59	AV	162.00	100	Vertical	Pass
6	4823.772	52.35	-1.33	74.0	-21.65	Peak	294.20	100	Vertical	Pass
6**	4823.772	46.88	-1.33	54.0	-7.12	AV	294.20	100	Vertical	Pass

Test result

Project Number: E21030014

Test Time: 2021-04-02_17.55.35

EUT Name: N.A

Test Engineer: Xiang Cheng Jie

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 20.1

Load: Full load

Hum.: 54%

Remark: DR-RSE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7995.251	37.59	7.58	74.0	-36.41	Peak	208.70	100	Vertical	Pass
1**	7995.251	28.44	7.58	54.0	-25.56	AV	208.70	100	Vertical	Pass
2	9512.872	41.26	11.87	74.0	-32.74	Peak	55.30	100	Vertical	Pass
2**	9512.872	31.72	11.87	54.0	-22.28	AV	55.30	100	Vertical	Pass
3	10535.616	43.34	13.33	74.0	-30.66	Peak	202.80	100	Vertical	Pass
3**	10535.616	34.94	13.33	54.0	-19.06	AV	202.80	100	Vertical	Pass
4	11847.038	46.12	15.68	74.0	-27.88	Peak	133.60	100	Vertical	Pass
4**	11847.038	37.36	15.68	54.0	-16.64	AV	133.60	100	Vertical	Pass
5	13133.717	49.58	18.54	74.0	-24.42	Peak	328.20	100	Vertical	Pass
5**	13133.717	40.91	18.54	54.0	-13.09	AV	328.20	100	Vertical	Pass
6	14178.455	52.48	22.08	74.0	-21.52	Peak	139.30	100	Vertical	Pass
6**	14178.455	44.75	22.08	54.0	-9.25	AV	139.30	100	Vertical	Pass

WIFI2.4G-B-High channel-Horizontal-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_10.28.24

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

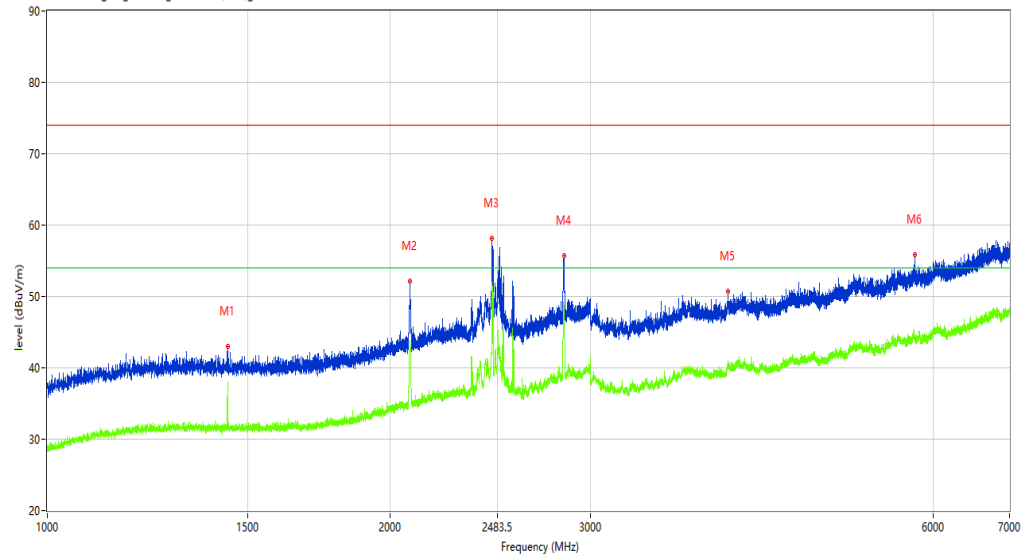

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.445	42.94	-13.03	74.0	-31.06	Peak	212.50	100	Horizontal	Pass
1**	1440.445	35.68	-13.03	54.0	-18.32	AV	212.50	100	Horizontal	Pass
2	2081.865	52.13	-9.32	74.0	-21.87	Peak	124.60	100	Horizontal	Pass
2**	2081.865	43.91	-9.32	54.0	-10.09	AV	124.60	100	Horizontal	Pass
3	2459.068	58.11	-3.09	74.0	-15.89	Peak	129.00	100	Horizontal	Pass
3**	2459.068	52.01	-3.09	54.0	-1.99	AV	129.00	100	Horizontal	Pass
4	2843.270	55.71	-4.24	74.0	-18.29	Peak	129.00	100	Horizontal	Pass
4**	2843.270	47.56	-4.24	54.0	-6.44	AV	129.00	100	Horizontal	Pass
5	3963.880	50.70	-2.00	74.0	-23.30	Peak	320.70	100	Horizontal	Pass
5**	3963.880	40.14	-2.00	54.0	-13.86	AV	320.70	100	Horizontal	Pass
6	5779.153	55.81	1.53	74.0	-18.19	Peak	94.20	100	Horizontal	Pass
6**	5779.153	44.23	1.53	54.0	-9.77	AV	94.20	100	Horizontal	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_10.46.57

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

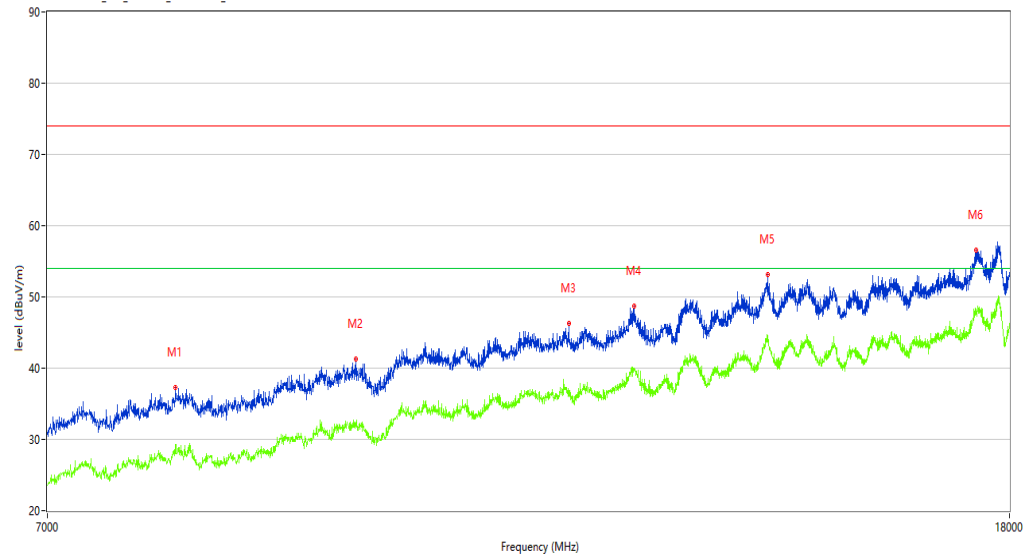

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7940.265	37.26	7.03	74.0	-36.74	Peak	102.40	100	Horizontal	Pass
1**	7940.265	29.11	7.03	54.0	-24.89	AV	102.40	100	Horizontal	Pass
2	9477.131	41.22	11.63	74.0	-32.78	Peak	189.90	100	Horizontal	Pass
2**	9477.131	32.21	11.63	54.0	-21.79	AV	189.90	100	Horizontal	Pass
3	11676.581	46.29	14.88	74.0	-27.71	Peak	278.40	100	Horizontal	Pass
3**	11676.581	36.56	14.88	54.0	-17.44	AV	278.40	100	Horizontal	Pass
4	12454.636	48.67	17.15	74.0	-25.33	Peak	52.90	100	Horizontal	Pass
4**	12454.636	39.76	17.15	54.0	-14.24	AV	52.90	100	Horizontal	Pass
5	14200.450	53.17	22.07	74.0	-20.83	Peak	48.50	100	Horizontal	Pass
5**	14200.450	44.08	22.07	54.0	-9.92	AV	48.50	100	Horizontal	Pass
6	17414.396	56.63	24.49	74.0	-17.37	Peak	13.10	100	Horizontal	Pass
6**	17414.396	48.22	24.49	54.0	-5.78	AV	13.10	100	Horizontal	Pass

WIFI2.4G-B-High channel-Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_10.30.48

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

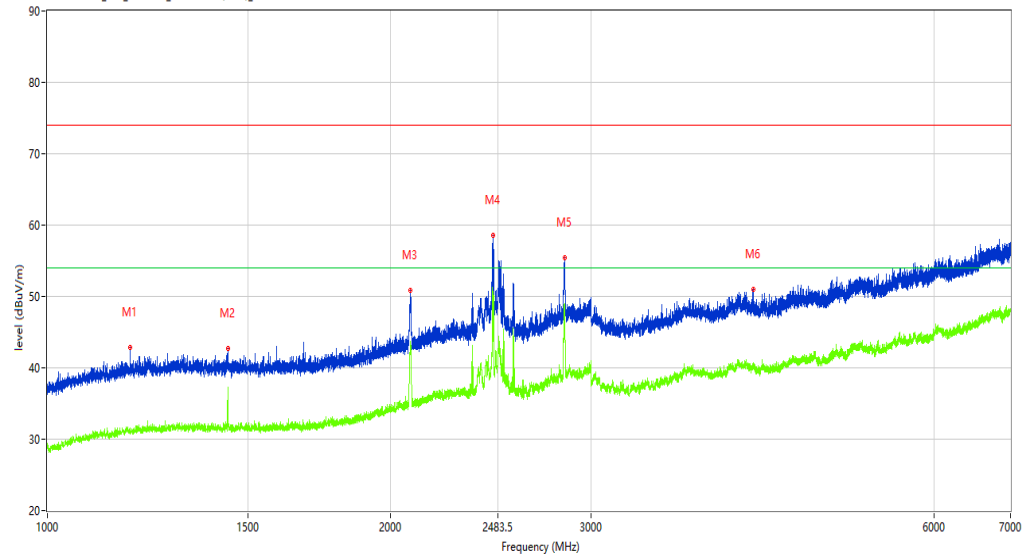

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1182.227	42.84	-13.12	74.0	-31.16	Peak	176.10	100	Vertical	Pass
1**	1182.227	30.67	-13.12	54.0	-23.33	AV	176.10	100	Vertical	Pass
2	1439.945	42.73	-13.02	74.0	-31.27	Peak	211.10	100	Vertical	Pass
2**	1439.945	37.29	-13.02	54.0	-16.71	AV	211.10	100	Vertical	Pass
3	2083.615	50.79	-9.29	74.0	-23.21	Peak	122.90	100	Vertical	Pass
3**	2083.615	42.98	-9.29	54.0	-11.02	AV	122.90	100	Vertical	Pass
4	2459.318	58.54	-3.08	74.0	-15.46	Peak	122.90	100	Vertical	Pass
4**	2459.318	50.39	-3.08	54.0	-3.61	AV	122.90	100	Vertical	Pass
5	2842.770	55.47	-4.25	74.0	-18.53	Peak	132.20	100	Vertical	Pass
5**	2842.770	48.29	-4.25	54.0	-5.71	AV	132.20	100	Vertical	Pass
6	4165.854	51.04	-2.14	74.0	-22.96	Peak	0.40	100	Vertical	Pass
6**	4165.854	39.89	-2.14	54.0	-14.11	AV	0.40	100	Vertical	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_10.48.26

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7973.257	37.48	7.36	74.0	-36.52	Peak	51.40	100	Vertical	Pass
1**	7973.257	27.57	7.36	54.0	-26.43	AV	51.40	100	Vertical	Pass
2	10180.955	43.46	12.95	74.0	-30.54	Peak	248.20	100	Vertical	Pass
2**	10180.955	34.49	12.95	54.0	-19.51	AV	248.20	100	Vertical	Pass
3	11203.699	46.35	14.64	74.0	-27.65	Peak	69.60	100	Vertical	Pass
3**	11203.699	38.05	14.64	54.0	-15.95	AV	69.60	100	Vertical	Pass
4	12432.642	48.64	17.07	74.0	-25.36	Peak	69.60	100	Vertical	Pass
4**	12432.642	39.46	17.07	54.0	-14.54	AV	69.60	100	Vertical	Pass
5	14186.703	52.18	22.33	74.0	-21.82	Peak	203.20	100	Vertical	Pass
5**	14186.703	44.14	22.33	54.0	-9.86	AV	203.20	100	Vertical	Pass
6	15764.809	53.68	18.12	74.0	-20.32	Peak	2.00	100	Vertical	Pass
6**	15764.809	45.28	18.12	54.0	-8.72	AV	2.00	100	Vertical	Pass

WIFI2.4G-G-Low channel-Horizontal-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_13.59.27

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

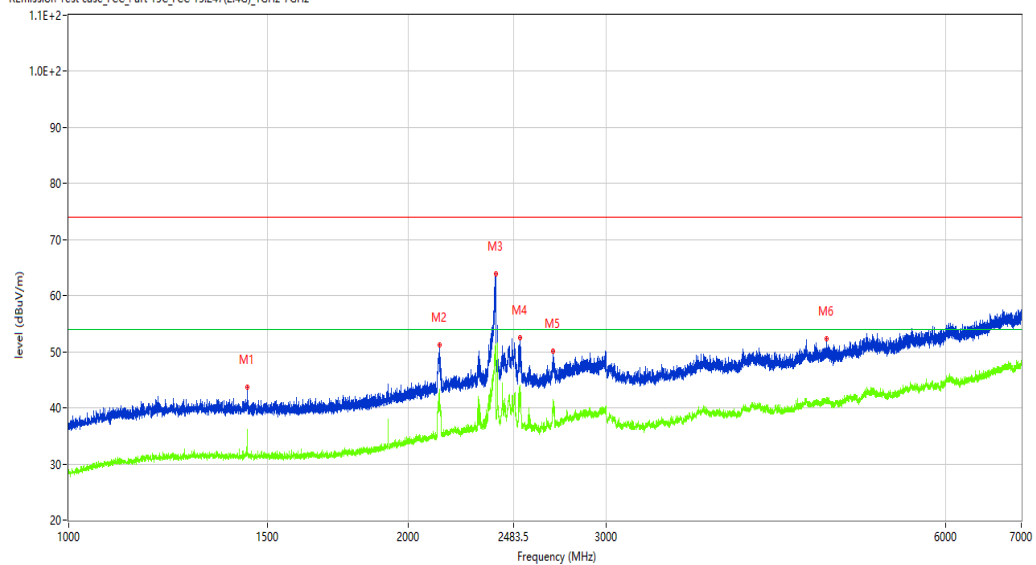

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.195	43.66	-13.03	74.0	-30.34	Peak	0.50	100	Horizontal	Pass
1**	1440.195	35.80	-13.03	54.0	-18.20	AV	0.50	100	Horizontal	Pass
2	2132.108	51.25	-9.29	74.0	-22.75	Peak	137.70	100	Horizontal	Pass
2**	2132.108	43.32	-9.29	54.0	-10.68	AV	137.70	100	Horizontal	Pass
3	2392.826	63.81	-4.57	74.0	-10.19	Peak	150.40	100	Horizontal	Pass
3**	2392.826	49.28	-4.57	54.0	-4.72	AV	150.40	100	Horizontal	Pass
4	2514.311	52.49	-6.79	74.0	-21.51	Peak	129.20	100	Horizontal	Pass
4**	2514.311	42.53	-6.79	54.0	-11.47	AV	129.20	100	Horizontal	Pass
5	2690.789	50.13	-6.59	74.0	-23.87	Peak	146.30	100	Horizontal	Pass
5**	2690.789	41.47	-6.59	54.0	-12.53	AV	146.30	100	Horizontal	Pass
6	4701.787	52.31	-0.94	74.0	-21.69	Peak	32.10	100	Horizontal	Pass
6**	4701.787	41.02	-0.94	54.0	-12.98	AV	32.10	100	Horizontal	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.02.38

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9158.210	40.94	10.92	74.0	-33.06	Peak	106.10	100	Vertical	Pass
1**	9158.210	31.61	10.92	54.0	-22.39	AV	106.10	100	Vertical	Pass
2	9996.751	43.33	13.03	74.0	-30.67	Peak	119.90	100	Vertical	Pass
2**	9996.751	34.14	13.03	54.0	-19.86	AV	119.90	100	Vertical	Pass
3	12446.388	49.77	17.12	74.0	-24.23	Peak	196.20	100	Vertical	Pass
3**	12446.388	41.10	17.12	54.0	-12.90	AV	196.20	100	Vertical	Pass
4	14205.949	52.77	21.94	74.0	-21.23	Peak	269.10	100	Vertical	Pass
4**	14205.949	44.37	21.94	54.0	-9.63	AV	269.10	100	Vertical	Pass
5	16850.787	54.64	20.84	74.0	-19.36	Peak	66.30	100	Vertical	Pass
5**	16850.787	44.90	20.84	54.0	-9.10	AV	66.30	100	Vertical	Pass
6	17491.377	57.04	24.97	74.0	-16.96	Peak	0.00	100	Vertical	Pass
6**	17491.377	47.51	24.97	54.0	-6.49	AV	0.00	100	Vertical	Pass

WIFI2.4G-G-Low channel-Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_14.05.44

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

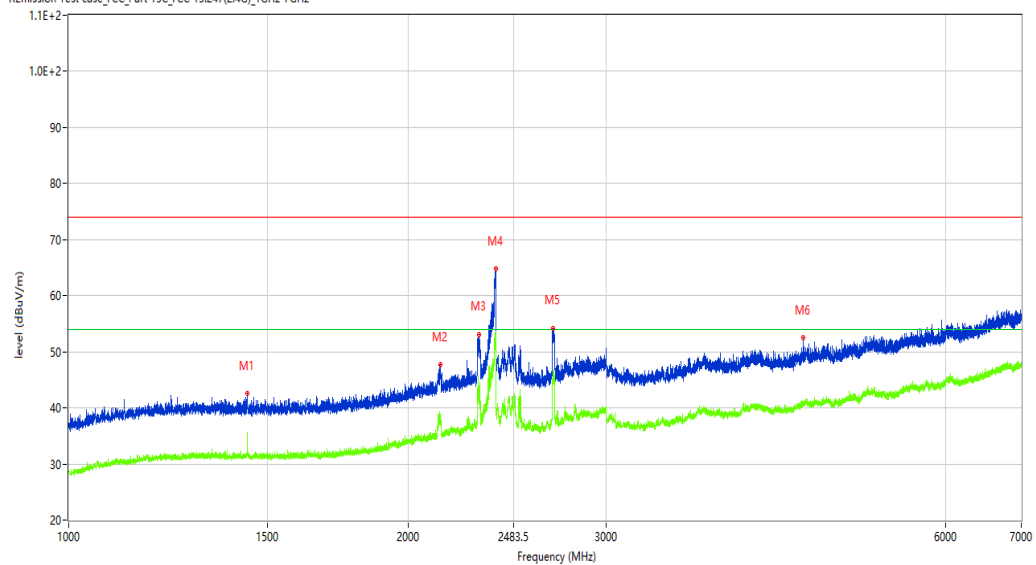

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1439.445	42.63	-13.02	74.0	-31.37	Peak	113.50	100	Vertical	Pass
1**	1439.445	33.92	-13.02	54.0	-20.08	AV	113.50	100	Vertical	Pass
2	2135.358	47.78	-9.24	74.0	-26.22	Peak	207.90	100	Vertical	Pass
2**	2135.358	38.90	-9.24	54.0	-15.10	AV	207.90	100	Vertical	Pass
3	2313.086	53.04	-7.68	74.0	-20.96	Peak	99.70	100	Vertical	Pass
3**	2313.086	43.85	-7.68	54.0	-10.15	AV	99.70	100	Vertical	Pass
4	2392.076	64.72	-4.59	74.0	-9.28	Peak	203.50	100	Vertical	Pass
4**	2392.076	53.51	-4.59	54.0	-0.49	AV	203.50	100	Vertical	Pass
5	2689.039	54.25	-6.62	74.0	-19.75	Peak	99.70	100	Vertical	Pass
5**	2689.039	45.19	-6.62	54.0	-8.81	AV	99.70	100	Vertical	Pass
6	4487.314	52.50	-1.22	74.0	-21.50	Peak	357.30	100	Vertical	Pass
6**	4487.314	41.16	-1.22	54.0	-12.84	AV	357.30	100	Vertical	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.15.10

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal

Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7976.006	37.20	7.39	74.0	-36.80	Peak	359.40	100	Vertical	Pass
1**	7976.006	28.30	7.39	54.0	-25.70	AV	359.40	100	Vertical	Pass
2	9482.629	40.45	11.67	74.0	-33.55	Peak	46.90	100	Vertical	Pass
2**	9482.629	31.98	11.67	54.0	-22.02	AV	46.90	100	Vertical	Pass
3	10145.214	43.41	13.11	74.0	-30.59	Peak	42.50	100	Vertical	Pass
3**	10145.214	35.01	13.11	54.0	-18.99	AV	42.50	100	Vertical	Pass
4	12443.639	48.79	17.11	74.0	-25.21	Peak	360.00	100	Vertical	Pass
4**	12443.639	40.02	17.11	54.0	-13.98	AV	360.00	100	Vertical	Pass
5	14494.626	53.02	20.07	74.0	-20.98	Peak	164.60	100	Vertical	Pass
5**	14494.626	43.64	20.07	54.0	-10.36	AV	164.60	100	Vertical	Pass
6	17815.796	57.93	24.58	74.0	-16.07	Peak	236.10	100	Vertical	Pass
6**	17815.796	49.65	24.58	54.0	-4.35	AV	236.10	100	Vertical	Pass

WIFI2.4G-G-Middle channel-Horizontal-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_13.55.32

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

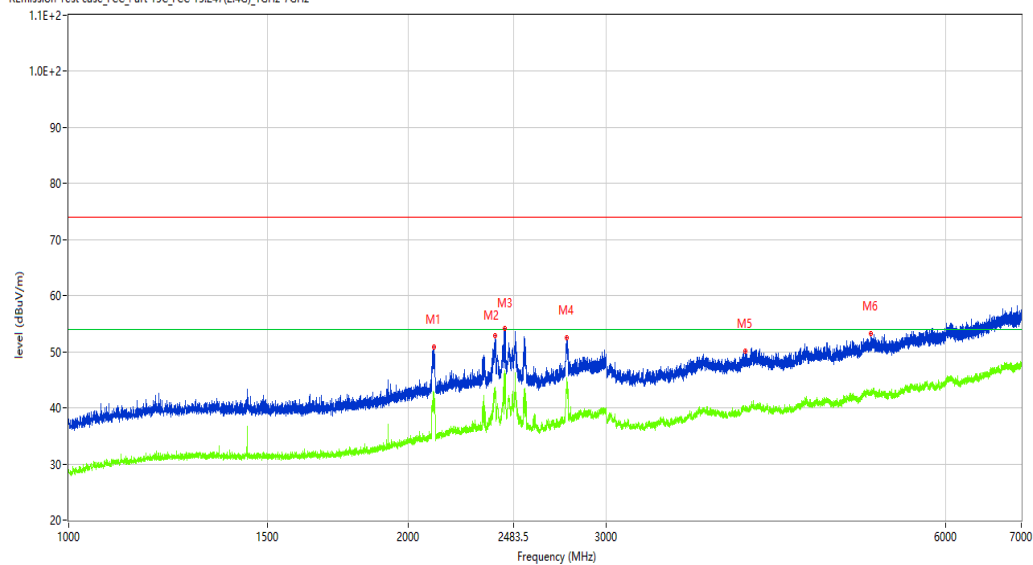

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2107.362	50.81	-9.23	74.0	-23.19	Peak	128.80	100	Horizontal	Pass
1**	2107.362	42.84	-9.23	54.0	-11.16	AV	128.80	100	Horizontal	Pass
2	2388.326	52.85	-6.98	74.0	-21.15	Peak	151.90	100	Horizontal	Pass
2**	2388.326	43.07	-6.98	54.0	-10.93	AV	151.90	100	Horizontal	Pass
3	2438.070	54.15	-3.58	74.0	-19.85	Peak	124.40	100	Horizontal	Pass
3**	2438.070	46.58	-3.58	54.0	-7.42	AV	124.40	100	Horizontal	Pass
4	2767.529	52.42	-5.21	74.0	-21.58	Peak	151.90	100	Horizontal	Pass
4**	2767.529	45.41	-5.21	54.0	-8.59	AV	151.90	100	Horizontal	Pass
5	3986.877	50.16	-1.88	74.0	-23.84	Peak	319.10	100	Horizontal	Pass
5**	3986.877	39.81	-1.88	54.0	-14.19	AV	319.10	100	Horizontal	Pass
6	5151.731	53.19	0.24	74.0	-20.81	Peak	52.30	100	Horizontal	Pass
6**	5151.731	42.73	0.24	54.0	-11.27	AV	52.30	100	Horizontal	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.07.20

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7923.769	36.93	6.86	74.0	-37.07	Peak	14.40	100	Horizontal	Pass
1**	7923.769	28.05	6.86	54.0	-25.95	AV	14.40	100	Horizontal	Pass
2	9911.522	43.70	13.48	74.0	-30.30	Peak	342.30	100	Horizontal	Pass
2**	9911.522	34.00	13.48	54.0	-20.00	AV	342.30	100	Horizontal	Pass
3	10975.506	45.55	14.38	74.0	-28.45	Peak	100.80	100	Horizontal	Pass
3**	10975.506	34.94	14.38	54.0	-19.06	AV	100.80	100	Horizontal	Pass
4	12440.890	48.49	17.10	74.0	-25.51	Peak	149.20	100	Horizontal	Pass
4**	12440.890	39.57	17.10	54.0	-14.43	AV	149.20	100	Horizontal	Pass
5	13194.201	49.94	18.51	74.0	-24.06	Peak	24.50	100	Horizontal	Pass
5**	13194.201	41.13	18.51	54.0	-12.87	AV	24.50	100	Horizontal	Pass
6	14764.059	52.17	21.52	74.0	-21.83	Peak	0.40	100	Horizontal	Pass
6**	14764.059	44.49	21.52	54.0	-9.51	AV	0.40	100	Horizontal	Pass

WIFI2.4G-G-Middle channel-Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_13.53.09

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

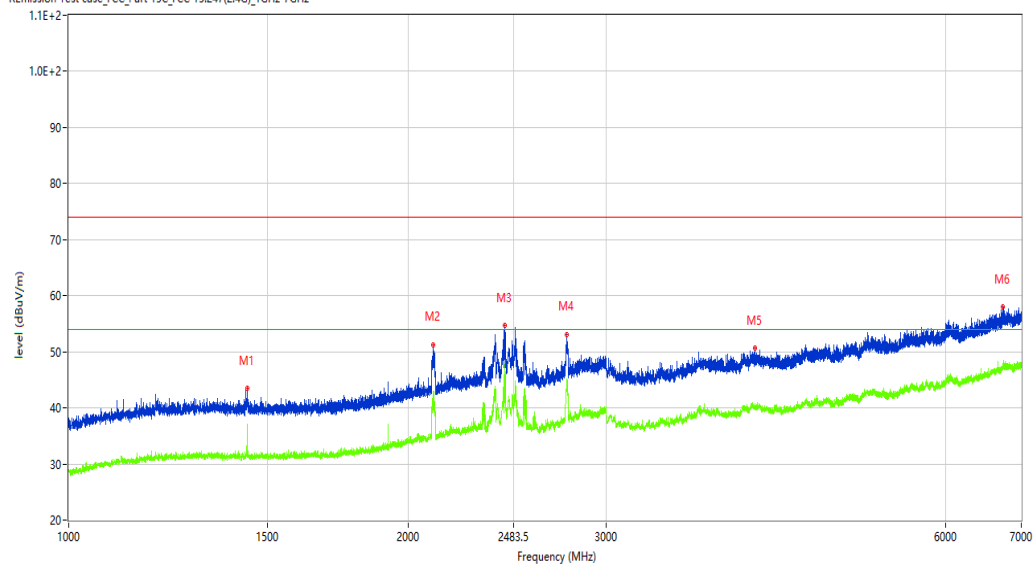

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1439.945	43.56	-13.02	74.0	-30.44	Peak	12.30	100	Vertical	Pass
1**	1439.945	37.04	-13.02	54.0	-16.96	AV	12.30	100	Vertical	Pass
2	2106.612	51.15	-9.23	74.0	-22.85	Peak	138.10	100	Vertical	Pass
2**	2106.612	42.88	-9.23	54.0	-11.12	AV	138.10	100	Vertical	Pass
3	2437.820	54.73	-3.59	74.0	-19.27	Peak	129.50	100	Vertical	Pass
3**	2437.820	46.21	-3.59	54.0	-7.79	AV	129.50	100	Vertical	Pass
4	2768.029	53.14	-5.20	74.0	-20.86	Peak	147.00	100	Vertical	Pass
4**	2768.029	45.10	-5.20	54.0	-8.90	AV	147.00	100	Vertical	Pass
5	4063.867	50.60	-1.26	74.0	-23.40	Peak	255.10	100	Vertical	Pass
5**	4063.867	40.40	-1.26	54.0	-13.60	AV	255.10	100	Vertical	Pass
6	6743.032	57.99	3.75	74.0	-16.01	Peak	327.70	100	Vertical	Pass
6**	6743.032	47.33	3.75	54.0	-6.67	AV	327.70	100	Vertical	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.32.10

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

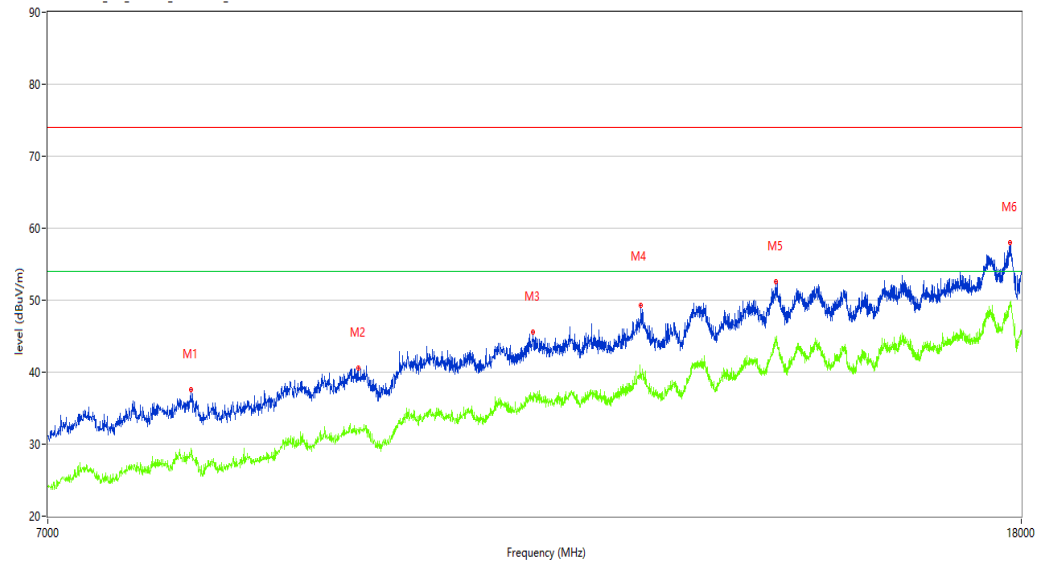

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8041.990	37.62	8.30	74.0	-36.38	Peak	105.00	100	Vertical	Pass
1**	8041.990	28.52	8.30	54.0	-25.48	AV	105.00	100	Vertical	Pass
2	9457.886	40.61	11.56	74.0	-33.39	Peak	185.70	100	Vertical	Pass
2**	9457.886	32.01	11.56	54.0	-21.99	AV	185.70	100	Vertical	Pass
3	11209.198	45.60	14.70	74.0	-28.40	Peak	231.20	100	Vertical	Pass
3**	11209.198	36.69	14.70	54.0	-17.31	AV	231.20	100	Vertical	Pass
4	12446.388	49.26	17.12	74.0	-24.74	Peak	358.40	100	Vertical	Pass
4**	12446.388	39.72	17.12	54.0	-14.28	AV	358.40	100	Vertical	Pass
5	14183.954	52.52	22.24	74.0	-21.48	Peak	348.10	100	Vertical	Pass
5**	14183.954	44.57	22.24	54.0	-9.43	AV	348.10	100	Vertical	Pass
6	17802.049	58.00	25.00	74.0	-16.00	Peak	68.50	100	Vertical	Pass
6**	17802.049	49.62	25.00	54.0	-4.38	AV	68.50	100	Vertical	Pass

WIFI2.4G-G-High channel-Horizontal-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_13.33.23

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

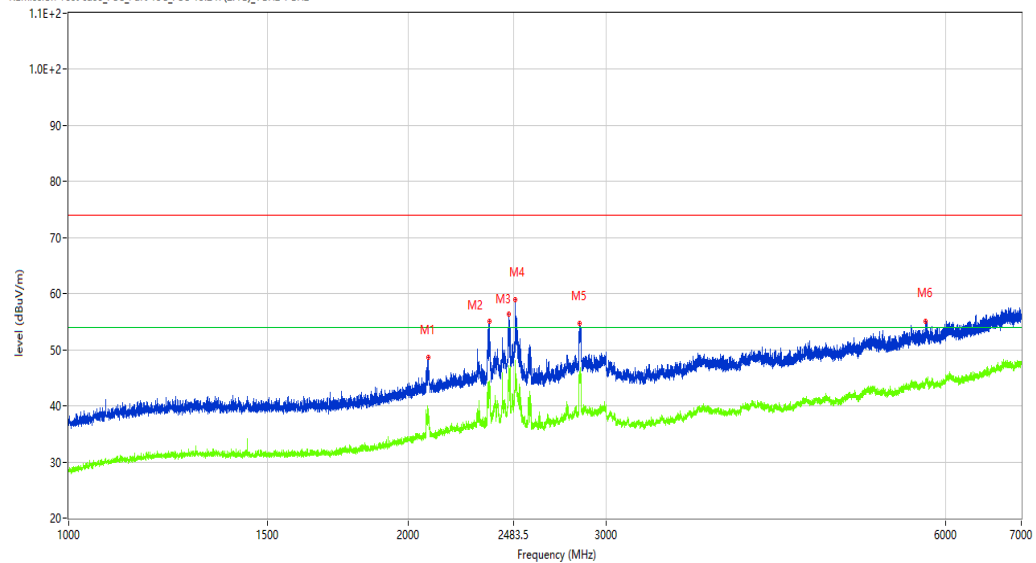

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2083.115	48.68	-9.29	74.0	-25.32	Peak	98.60	100	Horizontal	Pass
1**	2083.115	39.32	-9.29	54.0	-14.68	AV	98.60	100	Horizontal	Pass
2	2361.330	55.05	-8.22	74.0	-18.95	Peak	98.60	100	Horizontal	Pass
2**	2361.330	44.51	-8.22	54.0	-9.49	AV	98.60	100	Horizontal	Pass
3	2459.068	56.38	-3.09	74.0	-17.62	Peak	208.80	100	Horizontal	Pass
3**	2459.068	47.14	-3.09	54.0	-6.86	AV	208.80	100	Horizontal	Pass
4	2490.314	58.97	-3.17	74.0	-15.03	Peak	204.40	100	Horizontal	Pass
4**	2490.314	47.70	-3.17	54.0	-6.30	AV	204.40	100	Horizontal	Pass
5	2841.520	54.64	-4.28	74.0	-19.36	Peak	204.40	100	Horizontal	Pass
5**	2841.520	46.17	-4.28	54.0	-7.83	AV	204.40	100	Horizontal	Pass
6	5759.155	55.15	1.31	74.0	-18.85	Peak	250.20	100	Horizontal	Pass
6**	5759.155	44.09	1.31	54.0	-9.91	AV	250.20	100	Horizontal	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.12.30

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

RÉmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7954.011	37.18	7.17	74.0	-36.82	Peak	269.00	100	Horizontal	Pass
1**	7954.011	28.19	7.17	54.0	-25.81	AV	269.00	100	Horizontal	Pass
2	10145.214	44.25	13.11	74.0	-29.75	Peak	192.80	100	Horizontal	Pass
2**	10145.214	35.30	13.11	54.0	-18.70	AV	192.80	100	Horizontal	Pass
3	12465.634	49.14	17.20	74.0	-24.86	Peak	53.60	100	Horizontal	Pass
3**	12465.634	40.25	17.20	54.0	-13.75	AV	53.60	100	Horizontal	Pass
4	14219.695	51.97	21.62	74.0	-22.03	Peak	188.30	100	Horizontal	Pass
4**	14219.695	43.38	21.62	54.0	-10.62	AV	188.30	100	Horizontal	Pass
5	15968.258	53.23	20.56	74.0	-20.77	Peak	170.10	100	Horizontal	Pass
5**	15968.258	43.30	20.56	54.0	-10.70	AV	170.10	100	Horizontal	Pass
6	17524.369	56.49	24.34	74.0	-17.51	Peak	161.10	100	Horizontal	Pass
6**	17524.369	46.98	24.34	54.0	-7.02	AV	161.10	100	Horizontal	Pass

WIFI2.4G-G-High channel-Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_13.37.28

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

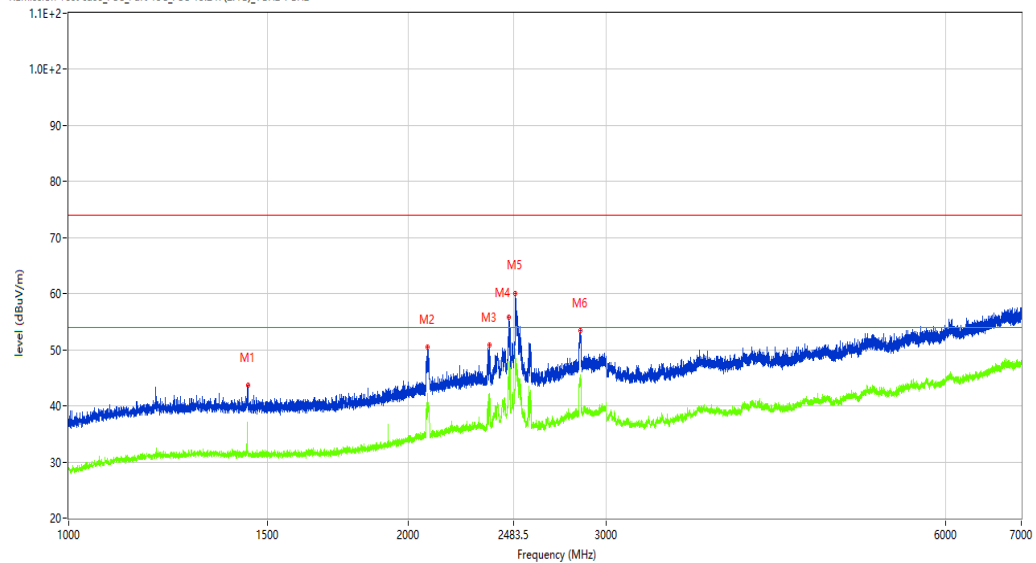

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1443.195	43.69	-13.08	74.0	-30.31	Peak	0.20	100	Vertical	Pass
1**	1443.195	31.86	-13.08	54.0	-22.14	AV	0.20	100	Vertical	Pass
2	2082.115	50.47	-9.31	74.0	-23.53	Peak	131.80	100	Vertical	Pass
2**	2082.115	42.17	-9.31	54.0	-11.83	AV	131.80	100	Vertical	Pass
3	2360.830	50.82	-8.23	74.0	-23.18	Peak	144.80	100	Vertical	Pass
3**	2360.830	42.30	-8.23	54.0	-11.70	AV	144.80	100	Vertical	Pass
4	2459.068	55.76	-3.09	74.0	-18.24	Peak	123.20	100	Vertical	Pass
4**	2459.068	47.83	-3.09	54.0	-6.17	AV	123.20	100	Vertical	Pass
5	2490.814	60.11	-4.42	74.0	-13.89	Peak	127.30	100	Vertical	Pass
5**	2490.814	48.61	-4.42	54.0	-5.39	AV	127.30	100	Vertical	Pass
6	2844.019	53.35	-4.23	74.0	-20.65	Peak	123.20	100	Vertical	Pass
6**	2844.019	44.68	-4.23	54.0	-9.32	AV	123.20	100	Vertical	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.17.54

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7943.014	37.49	7.06	74.0	-36.51	Peak	89.70	100	Vertical	Pass
1**	7943.014	27.76	7.06	54.0	-26.24	AV	89.70	100	Vertical	Pass
2	9928.018	42.92	13.48	74.0	-31.08	Peak	103.10	100	Vertical	Pass
2**	9928.018	35.12	13.48	54.0	-18.88	AV	103.10	100	Vertical	Pass
3	12454.636	49.39	17.15	74.0	-24.61	Peak	230.00	100	Vertical	Pass
3**	12454.636	40.30	17.15	54.0	-13.70	AV	230.00	100	Vertical	Pass
4	13202.449	49.82	18.51	74.0	-24.18	Peak	359.20	100	Vertical	Pass
4**	13202.449	40.82	18.51	54.0	-13.18	AV	359.20	100	Vertical	Pass
5	14192.202	52.63	22.26	74.0	-21.37	Peak	84.50	100	Vertical	Pass
5**	14192.202	45.13	22.26	54.0	-8.87	AV	84.50	100	Vertical	Pass
6	17469.383	57.33	25.02	74.0	-16.67	Peak	84.50	100	Vertical	Pass
6**	17469.383	48.78	25.02	54.0	-5.22	AV	84.50	100	Vertical	Pass

WIFI2.4G-N-Low channel-Horizontal-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_14.37.58

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

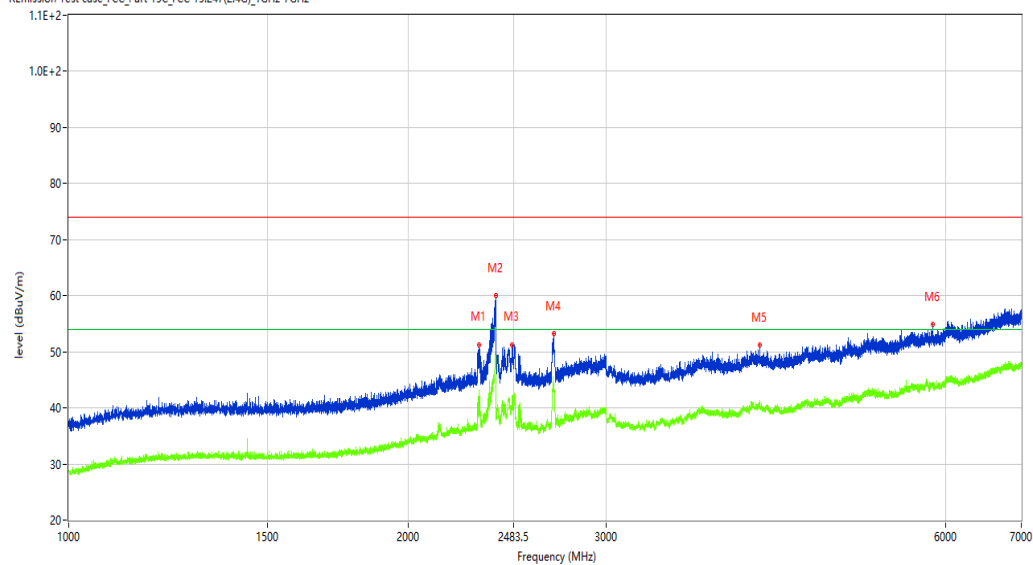

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2313.836	51.28	-7.72	74.0	-22.72	Peak	101.80	100	Horizontal	Pass
1**	2313.836	41.90	-7.72	54.0	-12.10	AV	101.80	100	Horizontal	Pass
2	2392.576	60.02	-4.58	74.0	-13.98	Peak	96.90	100	Horizontal	Pass
2**	2392.576	47.94	-4.58	54.0	-6.06	AV	96.90	100	Horizontal	Pass
3	2475.316	51.29	-2.69	74.0	-22.71	Peak	358.60	100	Horizontal	Pass
3**	2475.316	41.90	-2.69	54.0	-12.10	AV	358.60	100	Horizontal	Pass
4	2692.288	53.28	-6.56	74.0	-20.72	Peak	205.20	100	Horizontal	Pass
4**	2692.288	43.03	-6.56	54.0	-10.97	AV	205.20	100	Horizontal	Pass
5	4104.362	51.24	-1.57	74.0	-22.76	Peak	211.90	100	Horizontal	Pass
5**	4104.362	41.36	-1.57	54.0	-12.64	AV	211.90	100	Horizontal	Pass
6	5839.145	54.89	1.25	74.0	-19.11	Peak	354.20	100	Horizontal	Pass
6**	5839.145	44.03	1.25	54.0	-9.97	AV	354.20	100	Horizontal	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.04.26

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8391.152	37.13	7.42	74.0	-36.87	Peak	259.40	100	Horizontal	Pass
1**	8391.152	27.51	7.42	54.0	-26.49	AV	259.40	100	Horizontal	Pass
2	10142.464	43.14	13.13	74.0	-30.86	Peak	211.00	100	Horizontal	Pass
2**	10142.464	33.85	13.13	54.0	-20.15	AV	211.00	100	Horizontal	Pass
3	11852.537	47.88	15.78	74.0	-26.12	Peak	32.20	100	Horizontal	Pass
3**	11852.537	38.22	15.78	54.0	-15.78	AV	32.20	100	Horizontal	Pass
4	13194.201	49.80	18.51	74.0	-24.20	Peak	264.60	100	Horizontal	Pass
4**	13194.201	40.99	18.51	54.0	-13.01	AV	264.60	100	Horizontal	Pass
5	14216.946	52.72	21.69	74.0	-21.28	Peak	360.00	100	Horizontal	Pass
5**	14216.946	43.99	21.69	54.0	-10.01	AV	360.00	100	Horizontal	Pass
6	17829.543	58.20	24.17	74.0	-15.80	Peak	277.60	100	Horizontal	Pass
6**	17829.543	49.24	24.17	54.0	-4.76	AV	277.60	100	Horizontal	Pass

WIFI2.4G-N-Low channel-Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_14.30.05

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

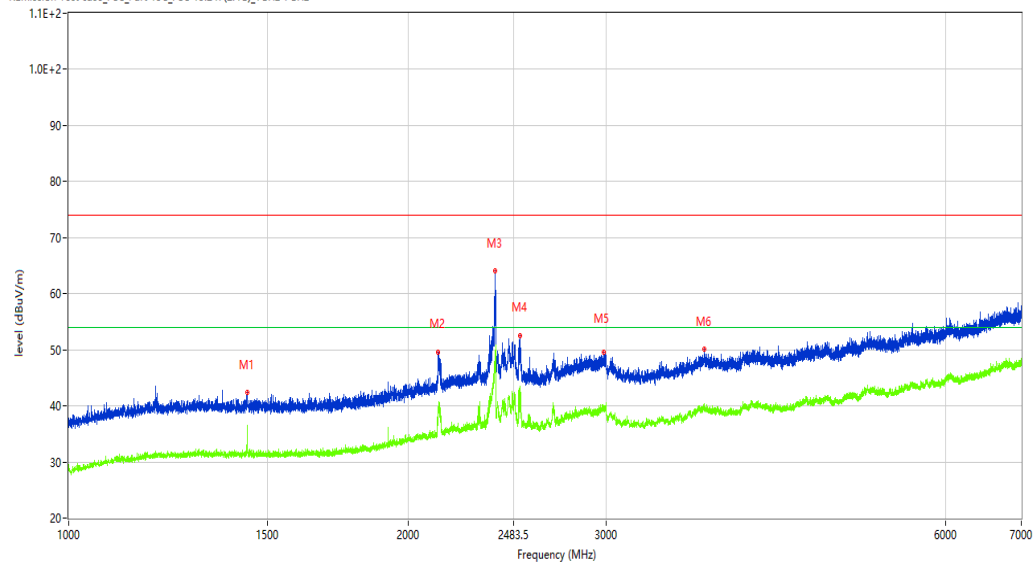

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1439.945	42.36	-13.02	74.0	-31.64	Peak	262.40	100	Vertical	Pass
1**	1439.945	36.52	-13.02	54.0	-17.48	AV	262.40	100	Vertical	Pass
2	2124.859	49.63	-9.31	74.0	-24.37	Peak	129.60	100	Vertical	Pass
2**	2124.859	39.09	-9.31	54.0	-14.91	AV	129.60	100	Vertical	Pass
3	2391.076	64.05	-6.02	74.0	-9.95	Peak	147.10	100	Vertical	Pass
3**	2391.076	49.95	-6.02	54.0	-4.05	AV	147.10	100	Vertical	Pass
4	2515.061	52.56	-6.80	74.0	-21.44	Peak	129.60	100	Vertical	Pass
4**	2515.061	43.60	-6.80	54.0	-10.40	AV	129.60	100	Vertical	Pass
5	2982.752	49.59	-3.22	74.0	-24.41	Peak	275.80	100	Vertical	Pass
5**	2982.752	39.05	-3.22	54.0	-14.95	AV	275.80	100	Vertical	Pass
6	3661.417	50.06	-2.33	74.0	-23.94	Peak	313.80	100	Vertical	Pass
6**	3661.417	40.04	-2.33	54.0	-13.96	AV	313.80	100	Vertical	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.34.59

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

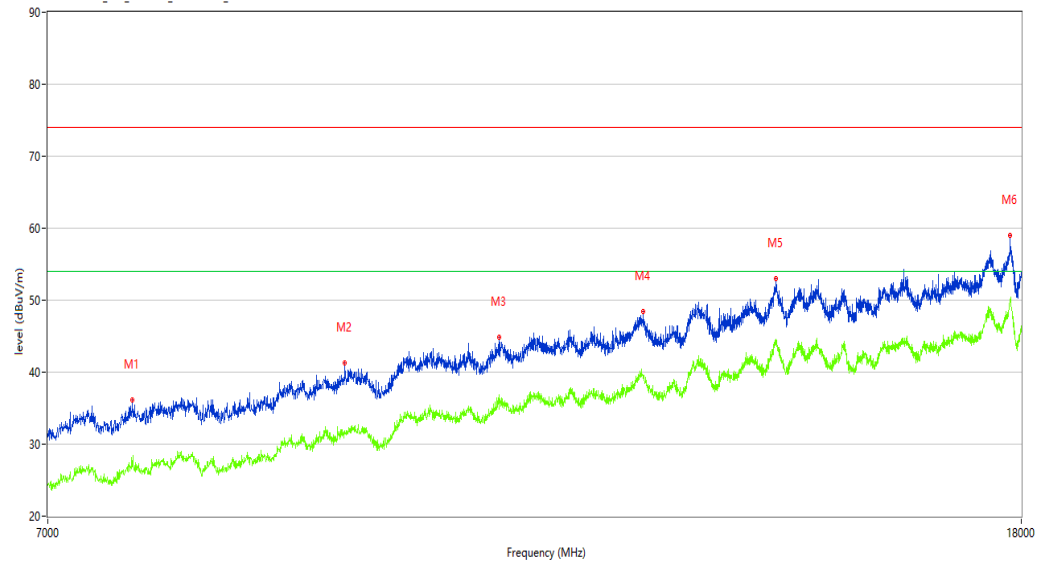

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7599.350	36.10	6.32	74.0	-37.90	Peak	261.60	100	Vertical	Pass
1**	7599.350	27.04	6.32	54.0	-26.96	AV	261.60	100	Vertical	Pass
2	9339.665	41.27	11.15	74.0	-32.73	Peak	39.90	100	Vertical	Pass
2**	9339.665	31.73	11.15	54.0	-22.27	AV	39.90	100	Vertical	Pass
3	10846.288	44.82	14.65	74.0	-29.18	Peak	189.10	100	Vertical	Pass
3**	10846.288	36.88	14.65	54.0	-17.12	AV	189.10	100	Vertical	Pass
4	12473.882	48.38	17.02	74.0	-25.62	Peak	229.30	100	Vertical	Pass
4**	12473.882	39.50	17.02	54.0	-14.50	AV	229.30	100	Vertical	Pass
5	14192.202	53.05	22.26	74.0	-20.95	Peak	359.20	100	Vertical	Pass
5**	14192.202	44.53	22.26	54.0	-9.47	AV	359.20	100	Vertical	Pass
6	17802.049	59.05	25.00	74.0	-14.95	Peak	139.20	100	Vertical	Pass
6**	17802.049	50.00	25.00	54.0	-4.00	AV	139.20	100	Vertical	Pass

WIFI2.4G-N-Middle channel-Horizontal-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_14.48.39

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

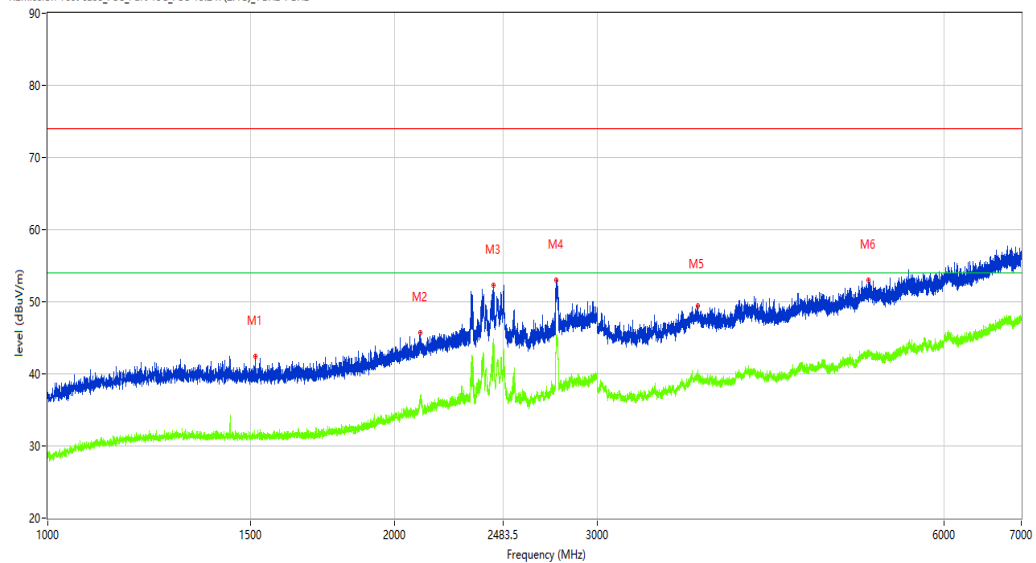

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1515.436	42.42	-13.24	74.0	-31.58	Peak	2.40	100	Horizontal	Pass
1**	1515.436	31.23	-13.24	54.0	-22.77	AV	2.40	100	Horizontal	Pass
2	2105.612	45.71	-9.23	74.0	-28.29	Peak	275.40	100	Horizontal	Pass
2**	2105.612	36.23	-9.23	54.0	-17.77	AV	275.40	100	Horizontal	Pass
3	2439.070	52.30	-3.56	74.0	-21.70	Peak	227.40	100	Horizontal	Pass
3**	2439.070	44.58	-3.56	54.0	-9.42	AV	227.40	100	Horizontal	Pass
4	2763.030	52.95	-5.33	74.0	-21.05	Peak	92.00	100	Horizontal	Pass
4**	2763.030	43.95	-5.33	54.0	-10.05	AV	92.00	100	Horizontal	Pass
5	3667.417	49.47	-2.43	74.0	-24.53	Peak	219.80	100	Horizontal	Pass
5**	3667.417	39.18	-2.43	54.0	-14.82	AV	219.80	100	Horizontal	Pass
6	5154.731	52.96	0.24	74.0	-21.04	Peak	58.30	100	Horizontal	Pass
6**	5154.731	42.89	0.24	54.0	-11.11	AV	58.30	100	Horizontal	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.08.32

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

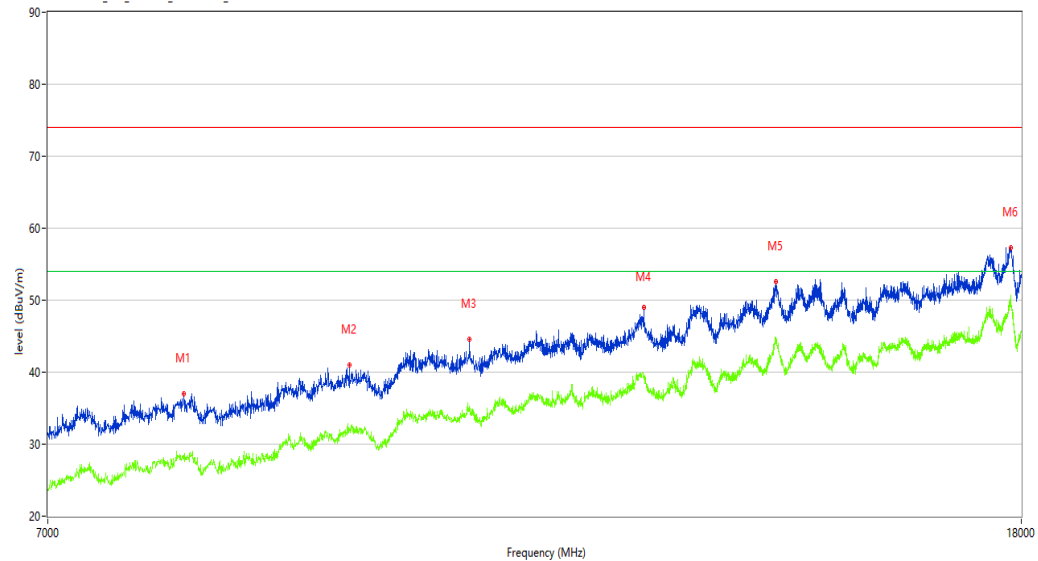

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7989.753	37.06	7.52	74.0	-36.94	Peak	199.80	100	Horizontal	Pass
1**	7989.753	28.18	7.52	54.0	-25.82	AV	199.80	100	Horizontal	Pass
2	9380.905	40.93	11.47	74.0	-33.07	Peak	181.90	100	Horizontal	Pass
2**	9380.905	31.93	11.47	54.0	-22.07	AV	181.90	100	Horizontal	Pass
3	10538.365	44.56	13.33	74.0	-29.44	Peak	293.90	100	Horizontal	Pass
3**	10538.365	34.61	13.33	54.0	-19.39	AV	293.90	100	Horizontal	Pass
4	12479.380	49.02	16.89	74.0	-24.98	Peak	119.40	100	Horizontal	Pass
4**	12479.380	39.38	16.89	54.0	-14.62	AV	119.40	100	Horizontal	Pass
5	14192.202	52.57	22.26	74.0	-21.43	Peak	177.80	100	Horizontal	Pass
5**	14192.202	44.42	22.26	54.0	-9.58	AV	177.80	100	Horizontal	Pass
6	17818.545	57.35	24.50	74.0	-16.65	Peak	74.40	100	Horizontal	Pass
6**	17818.545	49.02	24.50	54.0	-4.98	AV	74.40	100	Horizontal	Pass

WIFI2.4G-N-Middle channel-Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_14.50.56

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

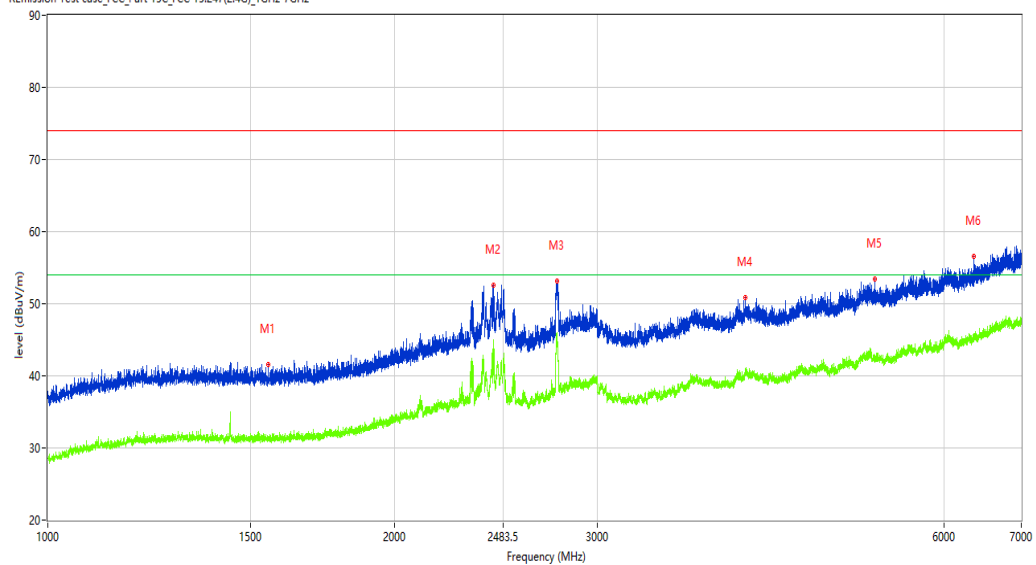

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1553.681	41.57	-13.24	74.0	-32.43	Peak	25.40	100	Vertical	Pass
1**	1553.681	31.61	-13.24	54.0	-22.39	AV	25.40	100	Vertical	Pass
2	2438.070	52.52	-3.58	74.0	-21.48	Peak	209.60	100	Vertical	Pass
2**	2438.070	44.45	-3.58	54.0	-9.55	AV	209.60	100	Vertical	Pass
3	2768.529	53.13	-5.19	74.0	-20.87	Peak	214.00	100	Vertical	Pass
3**	2768.529	45.81	-5.19	54.0	-8.19	AV	214.00	100	Vertical	Pass
4	4029.871	50.91	-1.54	74.0	-23.09	Peak	257.30	100	Vertical	Pass
4**	4029.871	40.02	-1.54	54.0	-13.98	AV	257.30	100	Vertical	Pass
5	5224.722	53.40	-0.22	74.0	-20.60	Peak	151.30	100	Vertical	Pass
5**	5224.722	42.40	-0.22	54.0	-11.60	AV	151.30	100	Vertical	Pass
6	6370.579	56.59	2.23	74.0	-17.41	Peak	312.80	100	Vertical	Pass
6**	6370.579	45.84	2.23	54.0	-8.16	AV	312.80	100	Vertical	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.30.34

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

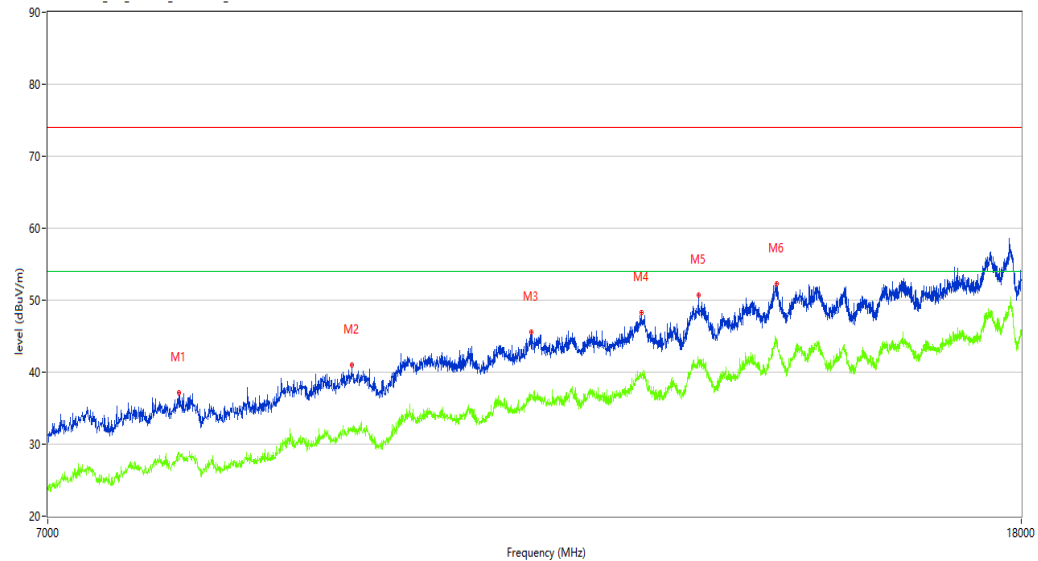

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7951.262	37.20	7.14	74.0	-36.80	Peak	100.60	100	Vertical	Pass
1**	7951.262	28.79	7.14	54.0	-25.21	AV	100.60	100	Vertical	Pass
2	9402.899	41.07	11.52	74.0	-32.93	Peak	360.00	100	Vertical	Pass
2**	9402.899	32.07	11.52	54.0	-21.93	AV	360.00	100	Vertical	Pass
3	11187.203	45.52	14.46	74.0	-28.48	Peak	281.80	100	Vertical	Pass
3**	11187.203	36.65	14.46	54.0	-17.35	AV	281.80	100	Vertical	Pass
4	12449.138	48.22	17.13	74.0	-25.78	Peak	0.00	100	Vertical	Pass
4**	12449.138	39.56	17.13	54.0	-14.44	AV	0.00	100	Vertical	Pass
5	13161.210	50.68	18.53	74.0	-23.32	Peak	272.50	100	Vertical	Pass
5**	13161.210	41.15	18.53	54.0	-12.85	AV	272.50	100	Vertical	Pass
6	14203.199	52.29	22.00	74.0	-21.71	Peak	268.00	100	Vertical	Pass
6**	14203.199	43.50	22.00	54.0	-10.50	AV	268.00	100	Vertical	Pass

WIFI2.4G-N-High channel-Horizontal-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_15.07.21

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

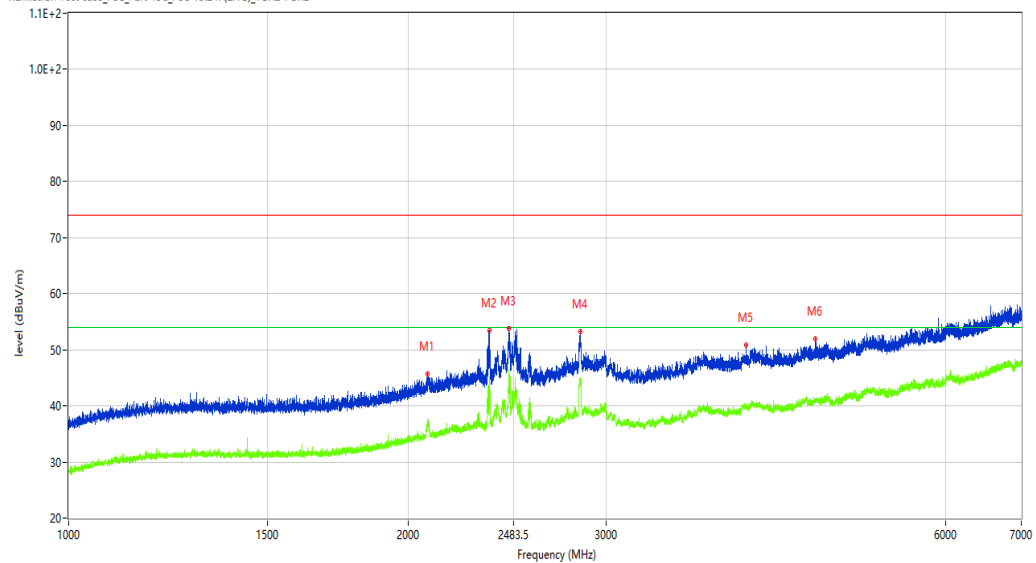

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2082.115	45.75	-9.31	74.0	-28.25	Peak	97.20	100	Horizontal	Pass
1**	2082.115	37.66	-9.31	54.0	-16.34	AV	97.20	100	Horizontal	Pass
2	2361.330	53.35	-8.22	74.0	-20.65	Peak	97.20	100	Horizontal	Pass
2**	2361.330	43.68	-8.22	54.0	-10.32	AV	97.20	100	Horizontal	Pass
3	2459.068	53.83	-3.09	74.0	-20.17	Peak	210.30	100	Horizontal	Pass
3**	2459.068	46.36	-3.09	54.0	-7.64	AV	210.30	100	Horizontal	Pass
4	2844.019	53.17	-4.23	74.0	-20.83	Peak	201.40	100	Horizontal	Pass
4**	2844.019	44.01	-4.23	54.0	-9.99	AV	201.40	100	Horizontal	Pass
5	3991.876	50.94	-1.82	74.0	-23.06	Peak	135.00	100	Horizontal	Pass
5**	3991.876	39.51	-1.82	54.0	-14.49	AV	135.00	100	Horizontal	Pass
6	4598.800	51.87	-1.45	74.0	-22.13	Peak	17.40	100	Horizontal	Pass
6**	4598.800	41.36	-1.45	54.0	-12.64	AV	17.40	100	Horizontal	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.13.43

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

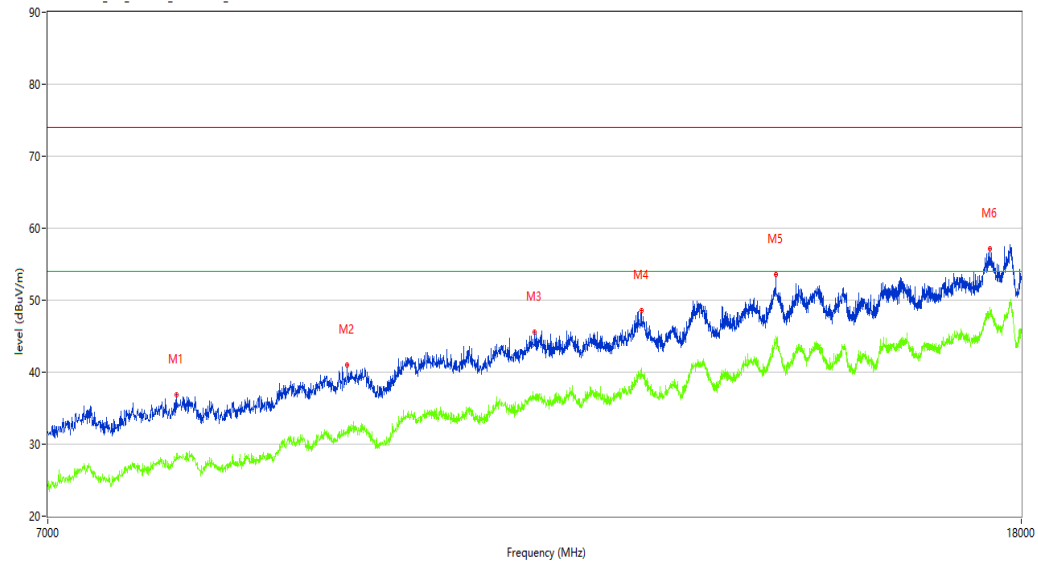

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7929.268	36.81	6.92	74.0	-37.19	Peak	286.90	100	Horizontal	Pass
1**	7929.268	28.66	6.92	54.0	-25.34	AV	286.90	100	Horizontal	Pass
2	9358.910	41.01	11.31	74.0	-32.99	Peak	130.60	100	Horizontal	Pass
2**	9358.910	31.60	11.31	54.0	-22.40	AV	130.60	100	Horizontal	Pass
3	11228.443	45.54	14.93	74.0	-28.46	Peak	175.20	100	Horizontal	Pass
3**	11228.443	36.30	14.93	54.0	-17.70	AV	175.20	100	Horizontal	Pass
4	12449.138	48.60	17.13	74.0	-25.40	Peak	81.50	100	Horizontal	Pass
4**	12449.138	39.28	17.13	54.0	-14.72	AV	81.50	100	Horizontal	Pass
5	14186.703	53.54	22.33	74.0	-20.46	Peak	295.50	100	Horizontal	Pass
5**	14186.703	44.94	22.33	54.0	-9.06	AV	295.50	100	Horizontal	Pass
6	17455.636	57.10	24.89	74.0	-16.90	Peak	308.10	100	Horizontal	Pass
6**	17455.636	48.52	24.89	54.0	-5.48	AV	308.10	100	Horizontal	Pass

WIFI2.4G-N-High channel-Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_15.02.56

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

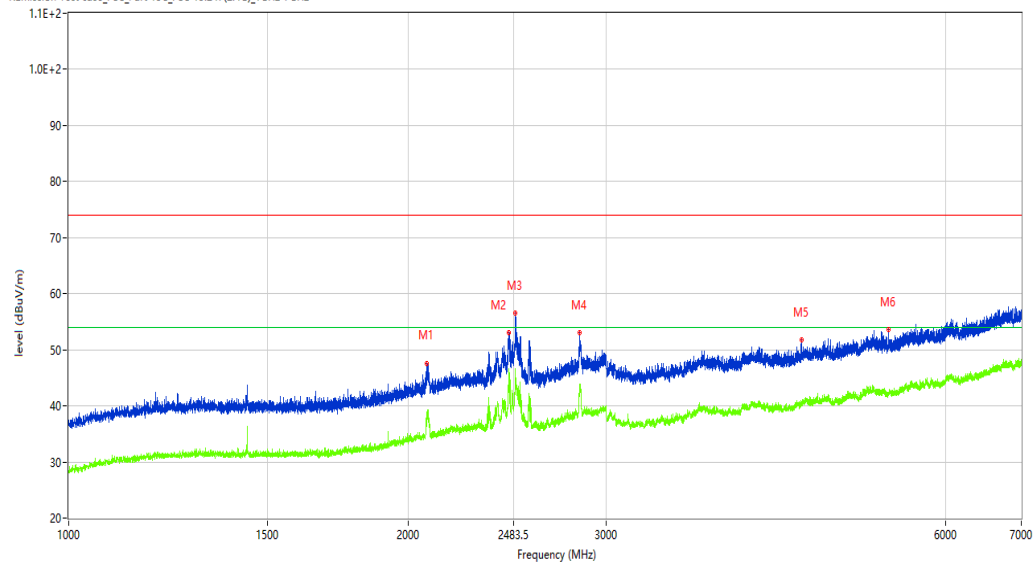

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2076.865	47.61	-9.40	74.0	-26.39	Peak	126.20	100	Vertical	Pass
1**	2076.865	37.36	-9.40	54.0	-16.64	AV	126.20	100	Vertical	Pass
2	2458.818	53.07	-3.09	74.0	-20.93	Peak	121.80	100	Vertical	Pass
2**	2458.818	46.65	-3.09	54.0	-7.35	AV	121.80	100	Vertical	Pass
3	2489.814	56.53	-2.38	74.0	-17.47	Peak	99.10	100	Vertical	Pass
3**	2489.814	45.77	-2.38	54.0	-8.23	AV	99.10	100	Vertical	Pass
4	2840.770	53.11	-4.29	74.0	-20.89	Peak	130.30	100	Vertical	Pass
4**	2840.770	43.06	-4.29	54.0	-10.94	AV	130.30	100	Vertical	Pass
5	4472.316	51.78	-1.53	74.0	-22.22	Peak	0.20	100	Vertical	Pass
5**	4472.316	40.40	-1.53	54.0	-13.60	AV	0.20	100	Vertical	Pass
6	5337.208	53.54	-0.48	74.0	-20.46	Peak	318.10	100	Vertical	Pass
6**	5337.208	42.27	-0.48	54.0	-11.73	AV	318.10	100	Vertical	Pass

Test result

Project Number: E21030014

Test Time: 2021-03-25_11.16.45

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ

Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8044.739	36.90	8.34	74.0	-37.10	Peak	91.30	100	Vertical	Pass
1**	8044.739	28.81	8.34	54.0	-25.19	AV	91.30	100	Vertical	Pass
2	9193.952	40.97	10.48	74.0	-33.03	Peak	96.50	100	Vertical	Pass
2**	9193.952	31.89	10.48	54.0	-22.11	AV	96.50	100	Vertical	Pass
3	10136.966	43.58	13.17	74.0	-30.42	Peak	252.00	100	Vertical	Pass
3**	10136.966	34.72	13.17	54.0	-19.28	AV	252.00	100	Vertical	Pass
4	12435.391	48.66	17.08	74.0	-25.34	Peak	20.50	100	Vertical	Pass
4**	12435.391	39.84	17.08	54.0	-14.16	AV	20.50	100	Vertical	Pass
5	14222.444	52.57	21.56	74.0	-21.43	Peak	282.50	100	Vertical	Pass
5**	14222.444	43.21	21.56	54.0	-10.79	AV	282.50	100	Vertical	Pass
6	15712.572	54.19	17.99	74.0	-19.81	Peak	0.00	100	Vertical	Pass
6**	15712.572	44.24	17.99	54.0	-9.76	AV	0.00	100	Vertical	Pass

WIFI2.4G-Bandedge -B-Low channel- Horizontal –TX

Test result

Project Number: E21030014

Test Time: 2021-03-19_15.28.50

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

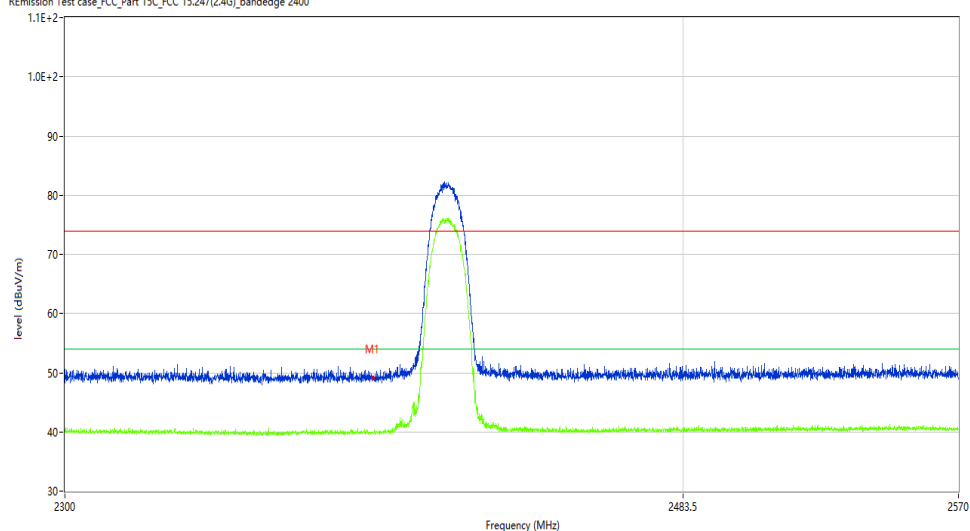

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.05	-10.41	74.0	-24.95	Peak	268.67	100	Horizontal	Pass
1**	2390.000	39.94	-10.41	54.0	-14.06	AV	268.67	100	Horizontal	Pass

WIFI2.4G-Bandedge -B-Low channel- Vertical -TX

Test result

Project Number: E21030014

Test Time: 2021-03-19_15.26.11

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

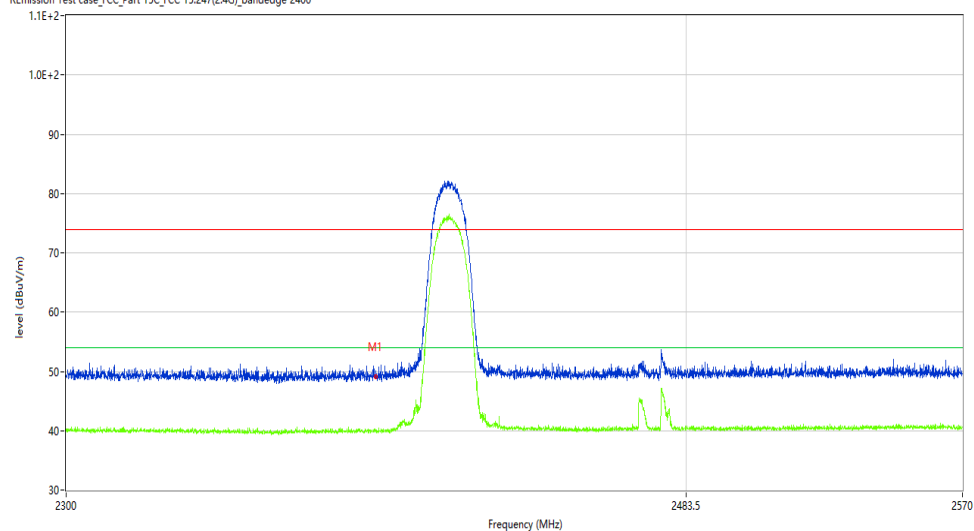

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.29	-10.41	74.0	-24.71	Peak	179.06	100	Vertical	Pass
1**	2390.000	39.85	-10.41	54.0	-14.15	AV	179.06	100	Vertical	Pass

WIFI2.4G-Bandedge -B-High channel- Horizontal -TX

Test result

Project Number: E21030014

Test Time: 2021-03-19_15.50.12

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

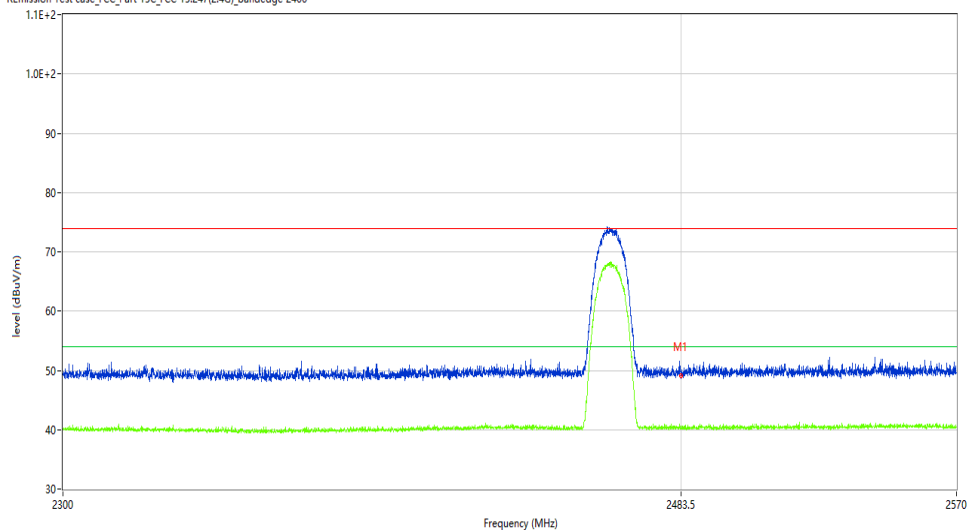

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	49.05	-10.08	74.0	-24.95	Peak	184.47	100	Horizontal	Pass
1**	2483.500	40.14	-10.08	54.0	-13.86	AV	184.47	100	Horizontal	Pass

WIFI2.4G-Bandedge -B-High channel- Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-19_15.47.12

EUT Name: N.A

No. N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

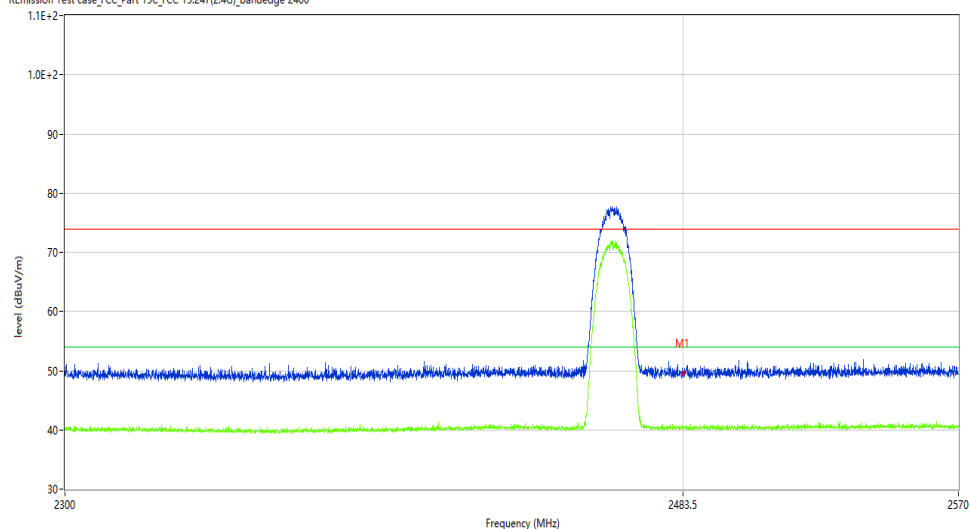

	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	49.59	-10.08	74.0	-24.41	Peak	76.00	100	Vertical	Pass
1**	2483.500	40.51	-10.08	54.0	-13.49	AV	76.00	100	Vertical	Pass

WIFI2.4G-Bandedge -G-Low channel- Horizontal -TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_13.16.46

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ


Test Standard: FCC

Work Addition: normal

Load: full load

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

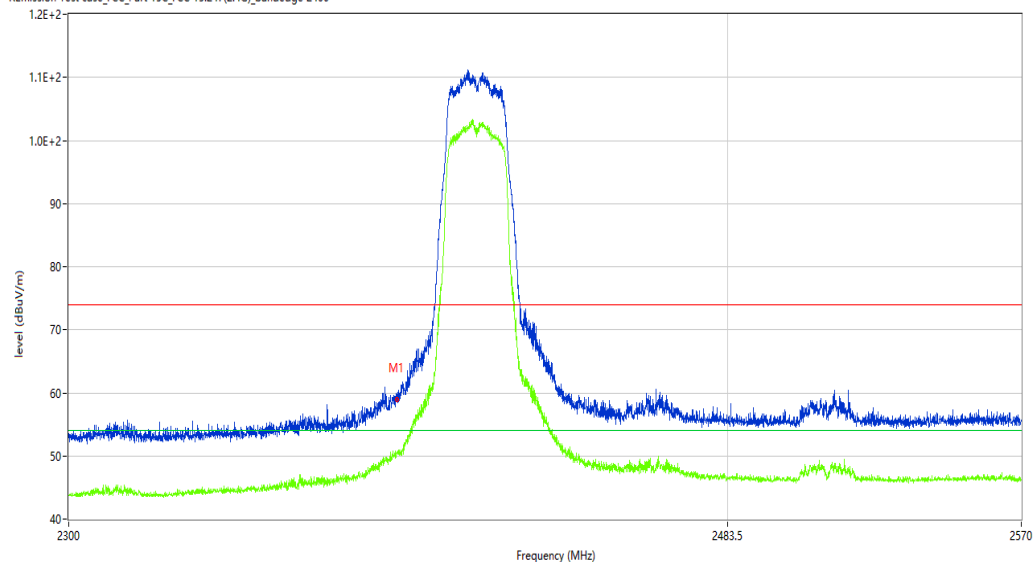

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	59.12	-0.53	74.0	-14.88	Peak	154.86	100	Horizontal	Pass
1**	2390.000	50.79	-0.53	54.0	-3.21	AV	154.86	100	Horizontal	Pass

WIFI2.4G-Bandedge -G-Low channel- Vertical -TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_13.14.50

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ


Test Standard: FCC

Work Addition: normal

Load: full load

Remark: DR-RE01-E21030014-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

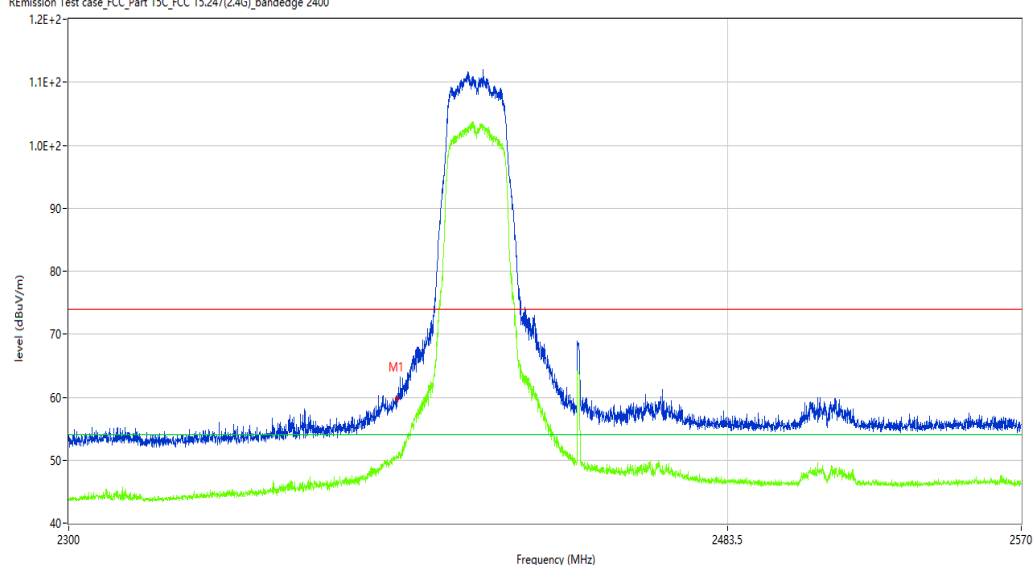

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	59.91	-0.53	74.0	-14.09	Peak	180.11	100	Vertical	Pass
1**	2390.000	50.59	-0.53	54.0	-3.41	AV	180.11	100	Vertical	Pass

WIFI2.4G-Bandedge -G-High channel- Horizontal -TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_13.27.30

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

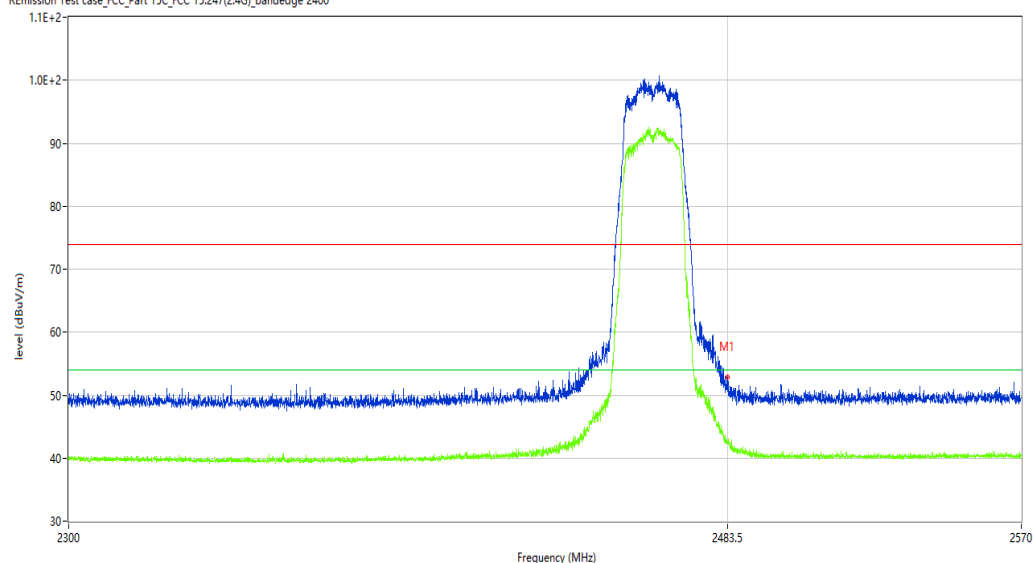

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.81	-10.08	74.0	-21.19	Peak	207.47	100	Horizontal	Pass
1**	2483.500	42.47	-10.08	54.0	-11.53	AV	207.47	100	Horizontal	Pass

WIFI2.4G-Bandedge -G-High channel- Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_13.24.27

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

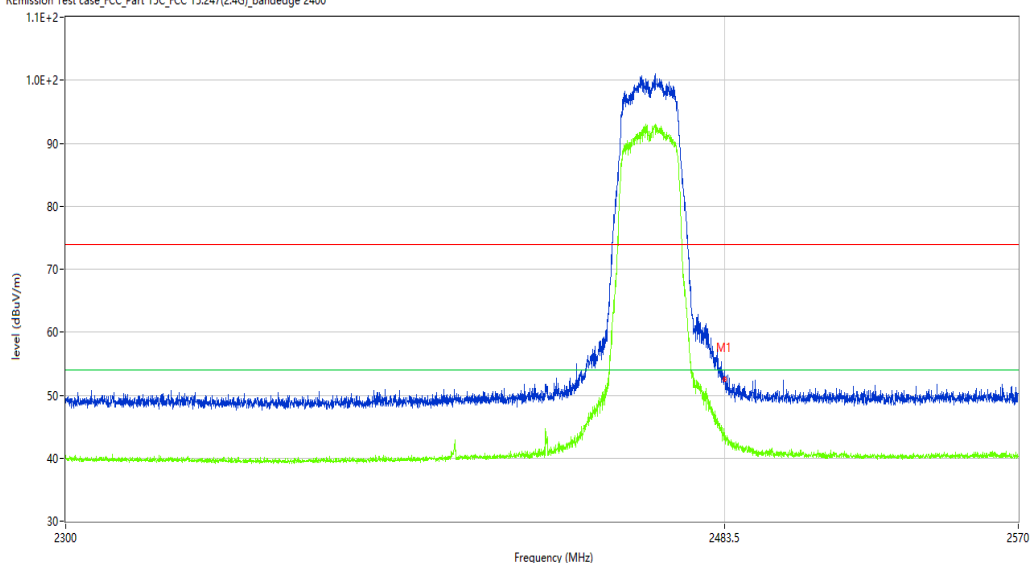

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.70	-10.08	74.0	-21.30	Peak	127.85	100	Vertical	Pass
1**	2483.500	43.58	-10.08	54.0	-10.42	AV	127.85	100	Vertical	Pass

WIFI2.4G-Bandedge -N-Low channel- Horizontal -TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_14.23.44

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

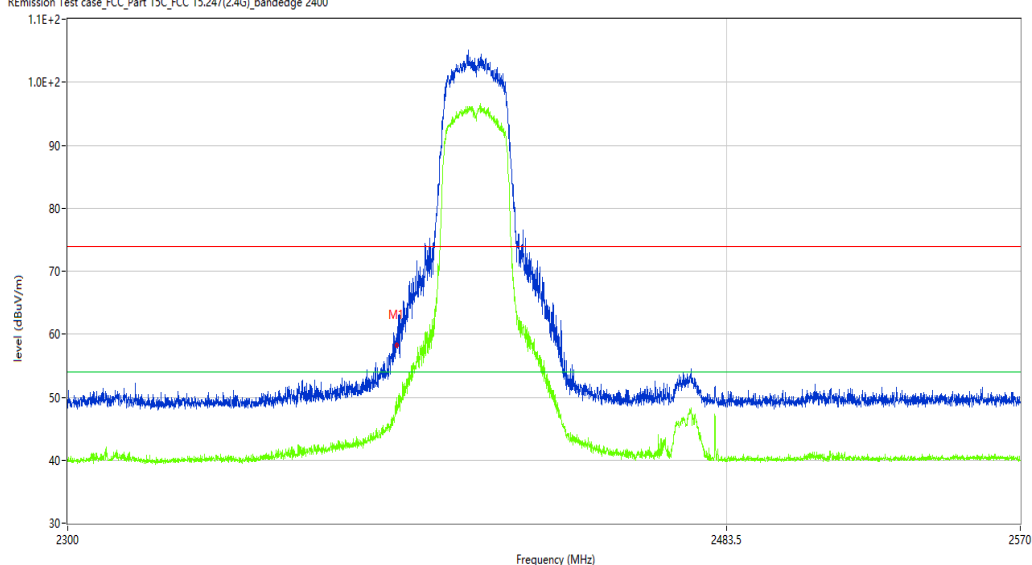

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	58.04	-10.41	74.0	-15.96	Peak	207.86	100	Horizontal	Pass
1**	2390.000	48.06	-10.41	54.0	-5.94	AV	207.86	100	Horizontal	Pass

WIFI2.4G-Bandedge -N-Low channel- Vertical -TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_14.25.32

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

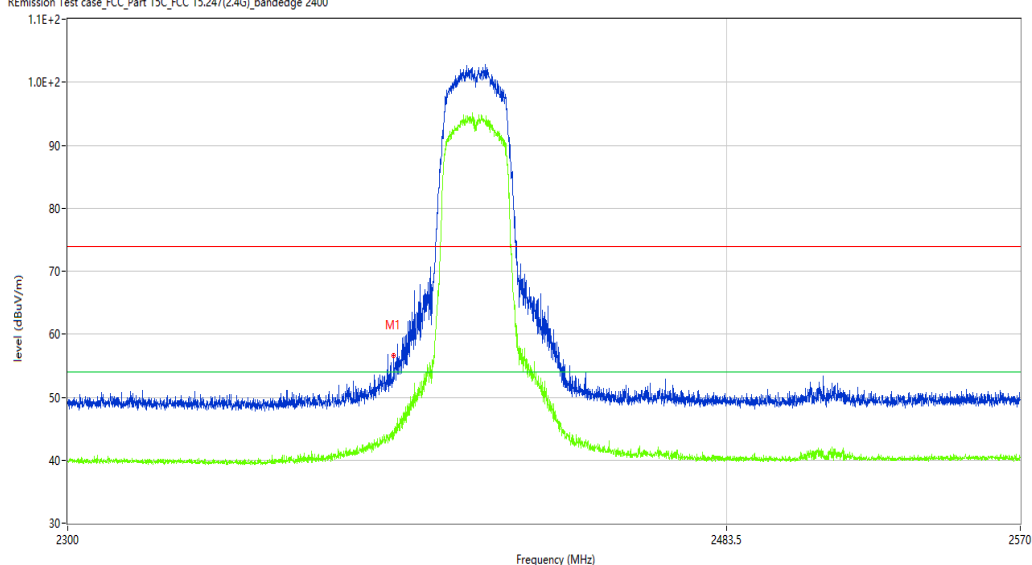

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.06	-10.41	74.0	-16.94	Peak	124.22	100	Vertical	Pass
1**	2390.000	46.18	-10.41	54.0	-7.82	AV	124.22	100	Vertical	Pass

WIFI2.4G-Bandedge -N-High channel- Horizontal -TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_14.54.59

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 22.5

Hum.: 51%

Test Engineer: XCJ


Test Standard: FCC

Work Addition: Normal

Load: N.A

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

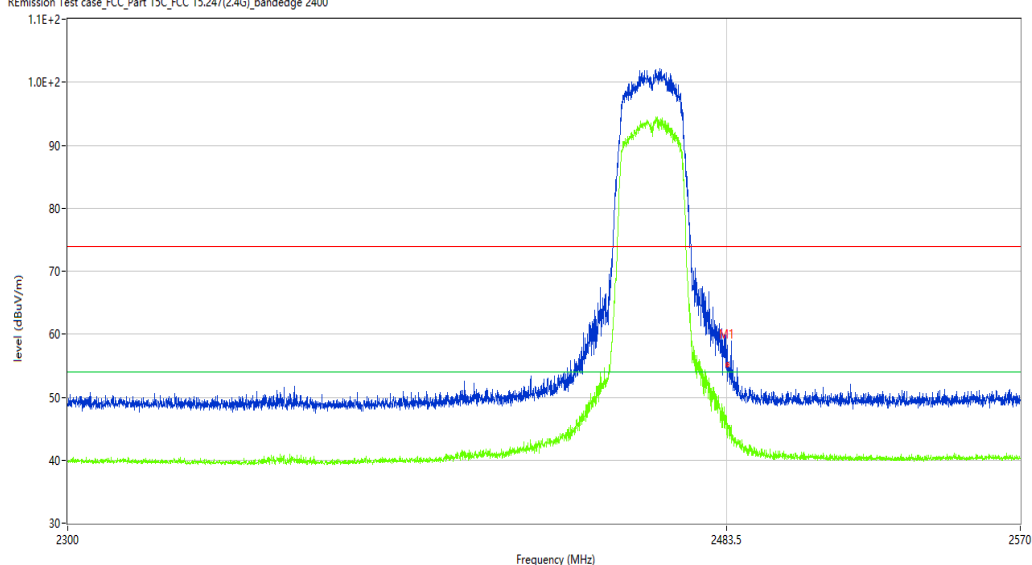

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.90	-10.08	74.0	-19.10	Peak	205.50	100	Horizontal	Pass
1**	2483.500	44.56	-10.08	54.0	-9.44	AV	205.50	100	Horizontal	Pass

WIFI2.4G-Bandedge -N-High channel- Vertical-TX

Test result

Project Number: E21030014

Test Time: 2021-03-25_14.57.54

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: Normal


Temp.(oC): 22.5

Load: N.A

Hum.: 51%

Remark: DR-RE01-E21030014-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

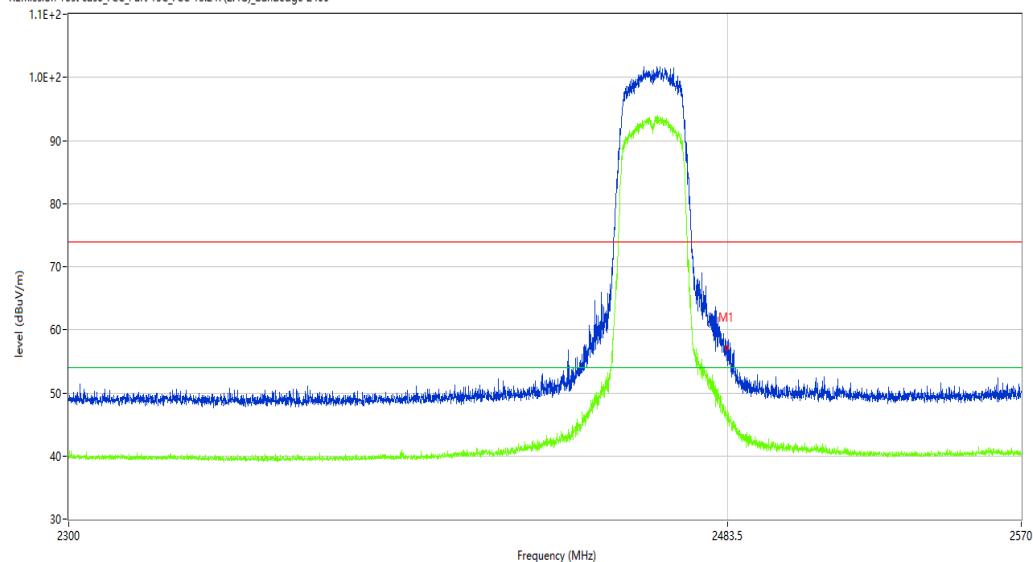

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.05	-10.08	74.0	-16.95	Peak	137.93	100	Vertical	Pass
1**	2483.500	46.23	-10.08	54.0	-7.77	AV	137.93	100	Vertical	Pass