


Product OverviewPower

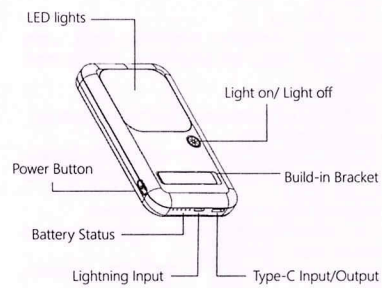

CE FC RoHS

Before using this product please read this guide to ensure using safely and properly
About product's other information, please contact manufacturer

Parameters

Model: S1
Battery Type: Lithium Polymer
Battery Capacity: 5000mAh/ 3.7V 18.5Wh
Input: 5V = 2.4A, 9V = 2A (USB-C)
Output: 5V=3A, 9V=2.22A(USB-C), 12V=1.5A(USB-C)
Multi-output: Total 5V=2A
Wireless Charging Output /: 15W Size: 155x75x15.5mm
Product Weight: 230g
Material: Fireproof PC
Color: Light blue / Orange / White
Product List: Power Bank x 1, 0.2M Type-C to Type-C Data Cable x 1, User Manual x 1

LED Battery Status

Blue LED on: wireless charging stand by
Green LED on: 5W wireless charging mode
Green LED flash: 7.5W/10W/15W wireless fast charging mode
White LED for battery status displaying

Note: The wireless charging function must be powered by an adapter, and the battery only powers the USB.

Light Button

Level 1: 20% Bright / Level 2: 50% Bright / Level 3: 100% Bright

Activation Function Description

- When the product is standby, press the power button and the LED lights will indicate the current battery capacity, one LED light indicates 25% battery capacity. The product will be standby again after 30 seconds.
- When power bank battery is 0%, it will be turned off automatically.
- Press power button once: Turn on the power bank and LED is on to active the wireless charging function.
- Press power button twice: Turn off the charging function.

Charging Function Instructions

- 1/2/ 3/ 4 LED light color is white.
- When charging to the power bank, the LED is flashed to display the incremental battery capacity. Refer to the relationship between LED display and battery capacity.
- When all the 4 LED lights are on, the product is fully charged.
- The charging function is working properly when the charger output is 5V to 12V.

Discharging Function Instructions

- Press the power button to turn on the product to charge the mobile. LED will be on correspondingly to the battery capacity status. When the battery voltage is lower than 3.1V, the last LED light will be flashed to warn.
- When battery voltage is lower than 3.0±0.1V, the output is stopped and LED will be off.
- When unplug to stop charging to mobile, the product will be standby after LED lights keep on 30 seconds.
- Press the power button and LED lights are on, the wireless function is active for wireless charging.
- When foreign objects that interfere with the charging are sensed, the blue light will turn off and stop the power output.

Warning

- Improper using may harm the battery and other parts.
- When charging the power bank first time, the adapter should be 5V=1A/2A.
- Keep the power bank at dry, well-ventilated area.
- Organic comburent is inside the power bank, wrong using will cause burst, leakage or overheating, and damage the power bank permanently. Safety protection devices are inset.
- Don't make the power bank short-circuit.
- Don't use the power bank beside any flame or where the temperature higher than 60°C, which will melt the plastic shell.
- If putting into water, the inside safety devices will be damaged and power bank stops working, or cause over-heating, fire even explosion.
- Don't extrude the power bank with heavy objects.
- Improper adapter may causing over-heating, burn, or explosion.
- Any hidden danger, please stop using immediately.
- Before using, please ensure that there is no metal material between the mobile phone (including the protect case) and the wireless charge area.

VECTORGear

S1 Magnetic Wireless Fast Charging
Power Bank 5000mAh

FCC statement:

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radiation Exposure Statement

This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. During the operation of device a distance of 15 cm surrounding the device and 20 cm above the top surface of the device must be respected.