


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	Ant. B + Ant. C

Horizontal

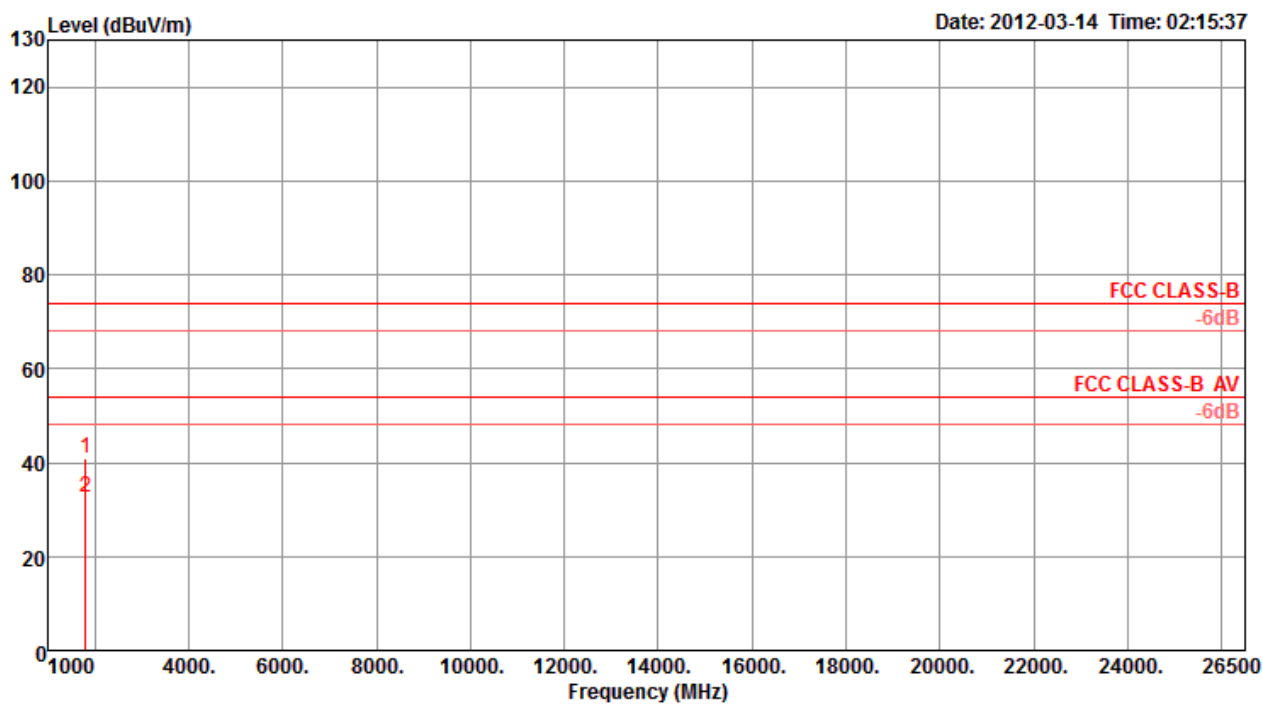

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	1807.69	40.78	74.00	-33.22	46.07	2.46	35.15	27.40	242	100	Peak	HORIZONTAL
2 a	1807.81	32.76	54.00	-21.24	38.05	2.46	35.15	27.40	242	100	Average	HORIZONTAL

Vertical

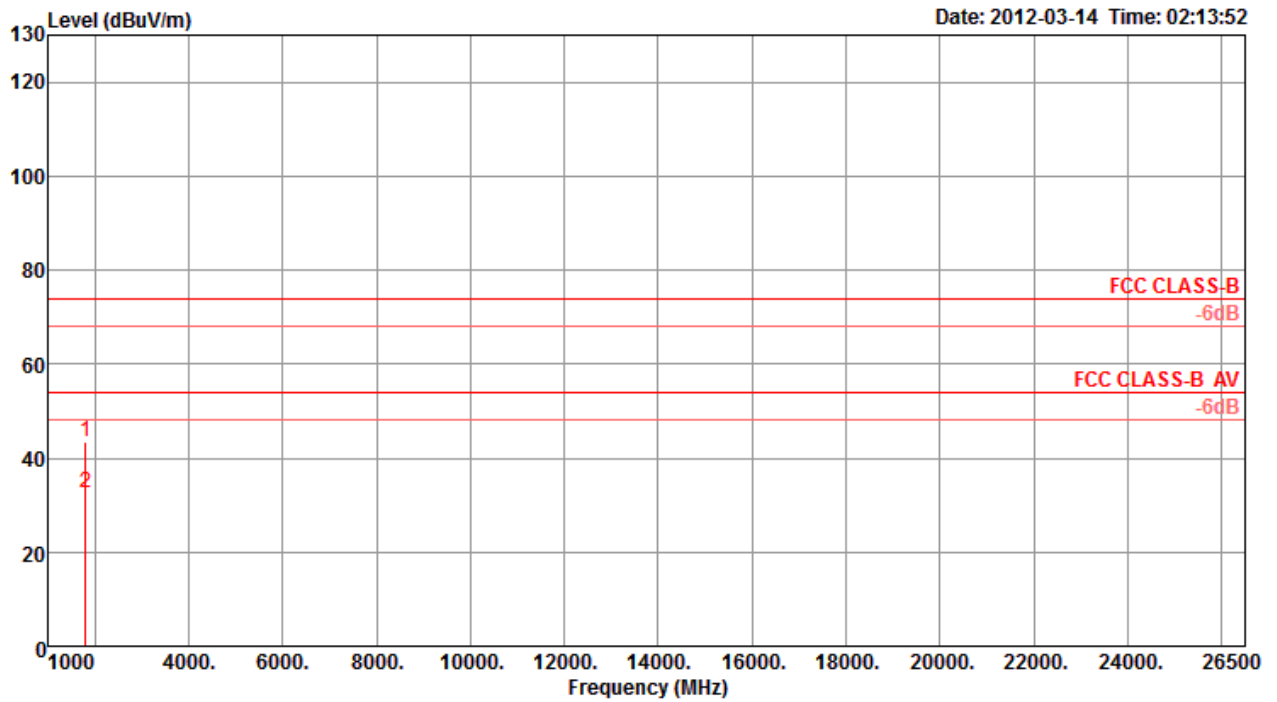

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	1807.95	43.29	74.00	-30.71	48.58	2.46	35.15	27.40	146	100	Peak	VERTICAL
2 a	1808.01	32.53	54.00	-21.47	37.82	2.46	35.15	27.40	146	100	Average	VERTICAL