


Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	52

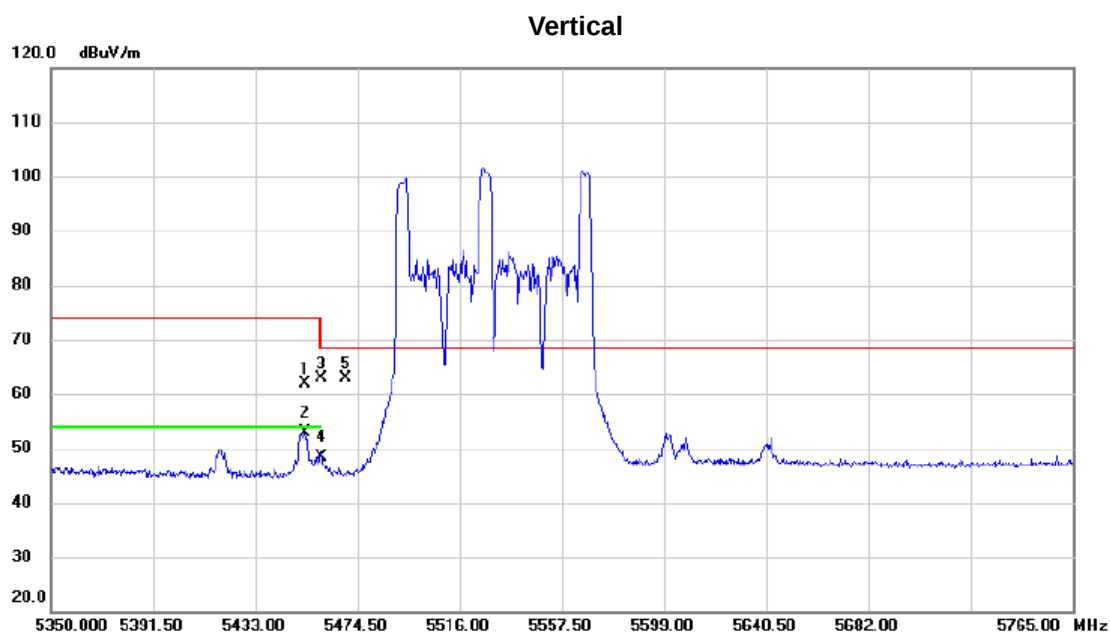


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5453.127	22.52	39.45	61.97	74.00	-12.03	peak	
2	*	5453.127	13.45	39.45	52.90	54.00	-1.10	AVG	
3		5460.000	23.49	39.46	62.95	74.00	-11.05	peak	
4		5460.000	8.93	39.46	48.39	54.00	-5.61	AVG	
5		5470.000	23.40	39.47	62.87	68.30	-5.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	52

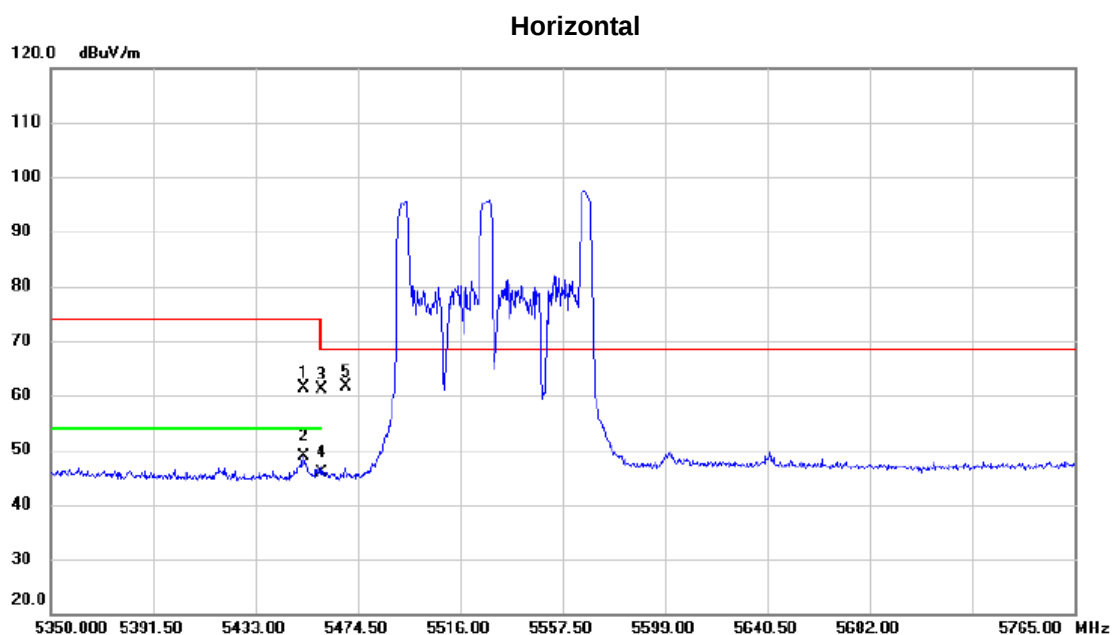


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5452.505	22.00	39.45	61.45	74.00	-12.55	peak	
2	*	5452.505	9.39	39.45	48.84	54.00	-5.16	AVG	
3		5460.000	21.71	39.46	61.17	74.00	-12.83	peak	
4		5460.000	6.31	39.46	45.77	54.00	-8.23	AVG	
5		5470.000	22.19	39.47	61.66	68.30	-6.64	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	106

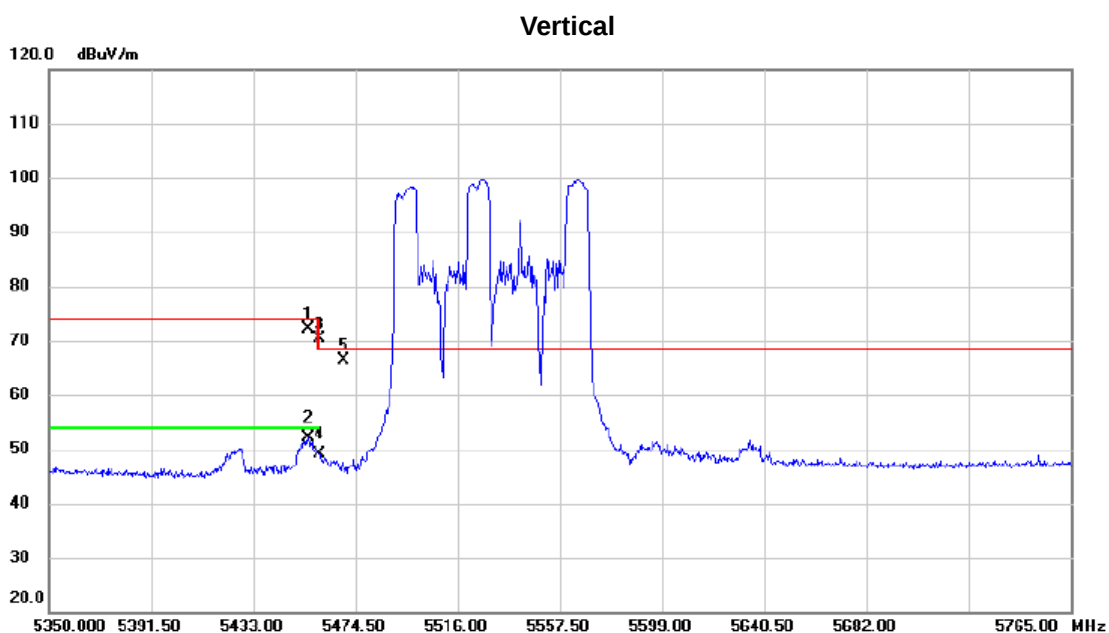


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5455.410	32.65	39.45	72.10	74.00	-1.90	peak	
2	*	5455.410	12.66	39.45	52.11	54.00	-1.89	AVG	
3		5460.000	30.87	39.46	70.33	74.00	-3.67	peak	
4		5460.000	9.59	39.46	49.05	54.00	-4.95	AVG	
5		5470.000	26.92	39.47	66.39	68.30	-1.91	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	106

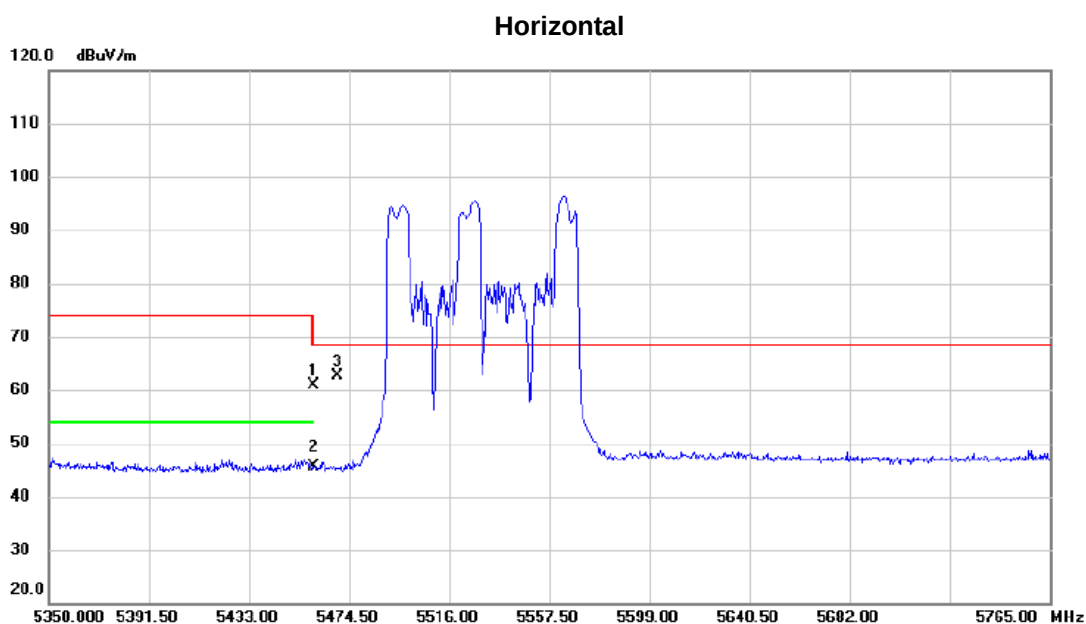

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	21.31	39.46	60.77	74.00	-13.23	peak	
2		5460.000	6.24	39.46	45.70	54.00	-8.30	AVG	
3	*	5470.000	23.07	39.47	62.54	68.30	-5.76	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	242

Vertical

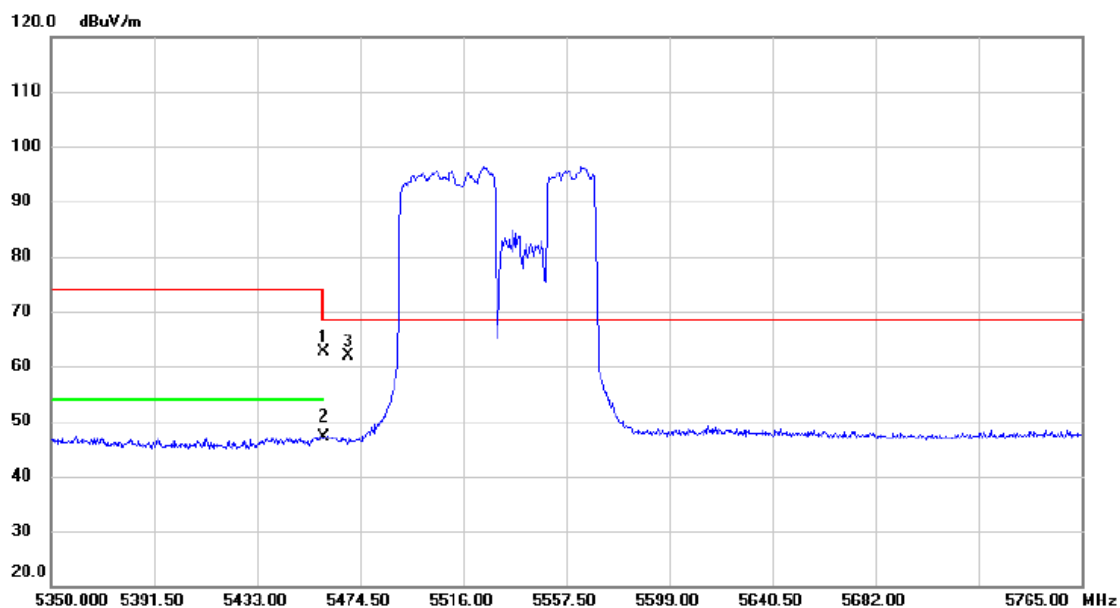


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5460.000	23.18	39.46	62.64	74.00	-11.36	peak	
2		5460.000	7.69	39.46	47.15	54.00	-6.85	AVG	
3	*	5470.000	22.45	39.47	61.92	68.30	-6.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	242

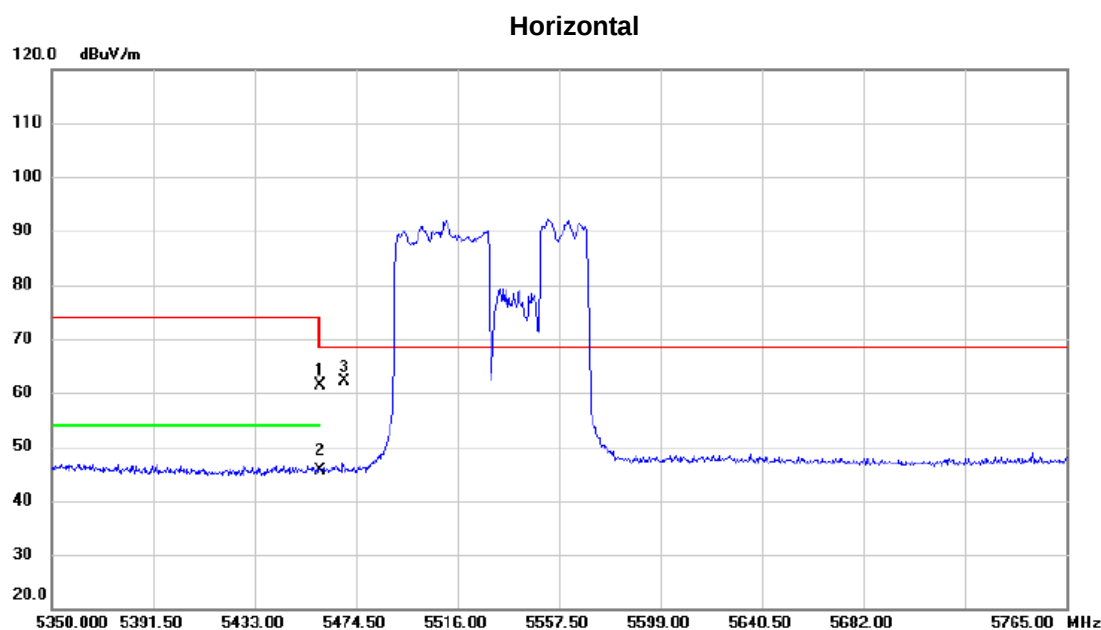


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	21.97	39.46	61.43	74.00	-12.57	peak	
2		5460.000	6.15	39.46	45.61	54.00	-8.39	AVG	
3	*	5470.000	22.73	39.47	62.20	68.30	-6.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	484

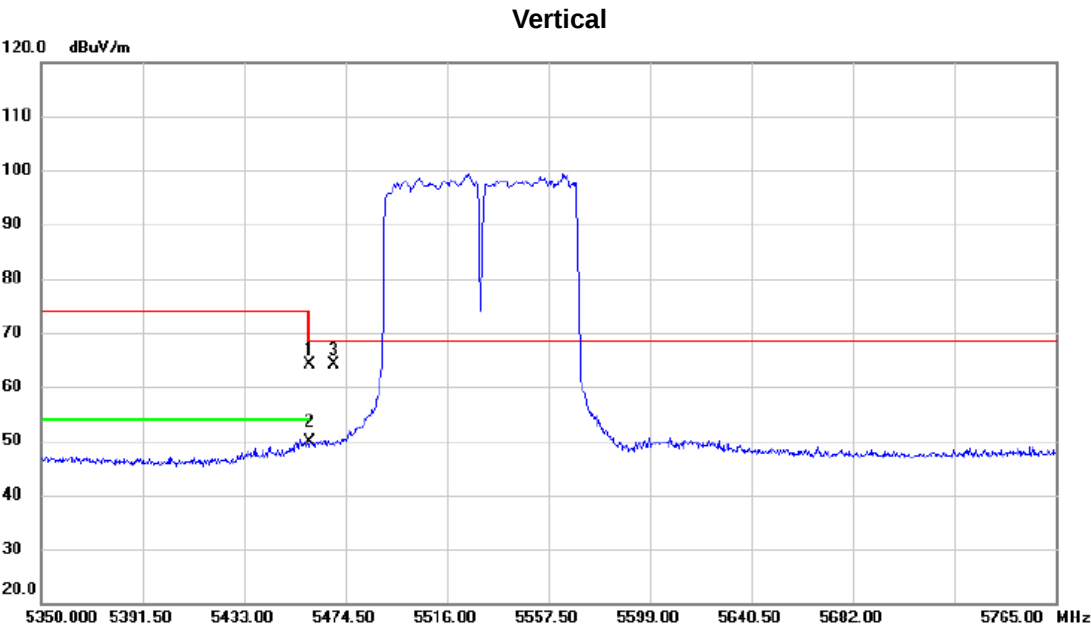


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	24.64	39.46	64.10	74.00	-9.90	peak	
2	*	5460.000	10.34	39.46	49.80	54.00	-4.20	AVG	
3		5470.000	24.60	39.47	64.07	68.30	-4.23	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	484

Horizontal

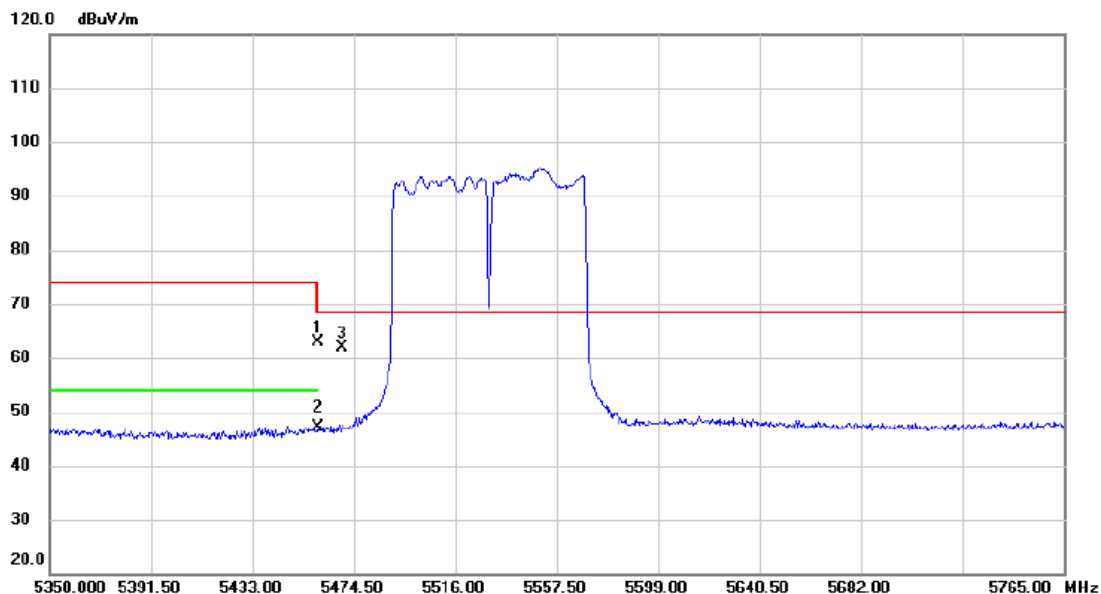


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	23.34	39.46	62.80	74.00	-11.20	peak	
2		5460.000	7.61	39.46	47.07	54.00	-6.93	AVG	
3	*	5470.000	22.44	39.47	61.91	68.30	-6.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	996

Vertical

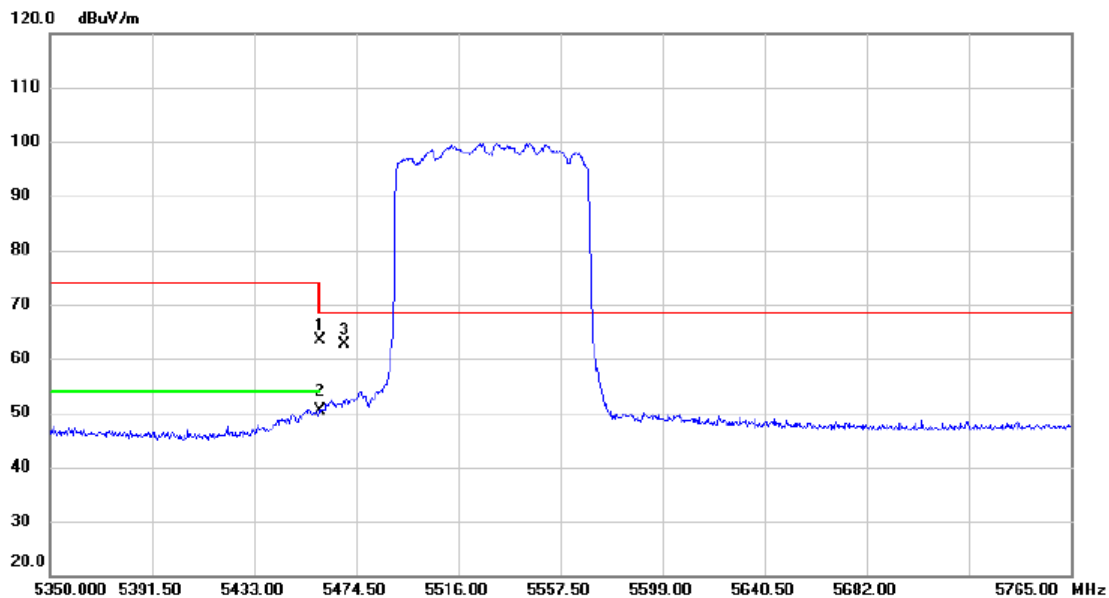


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	24.02	39.46	63.48	74.00	-10.52	peak	
2	*	5460.000	10.80	39.46	50.26	54.00	-3.74	AVG	
3		5470.000	23.28	39.47	62.75	68.30	-5.55	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	996

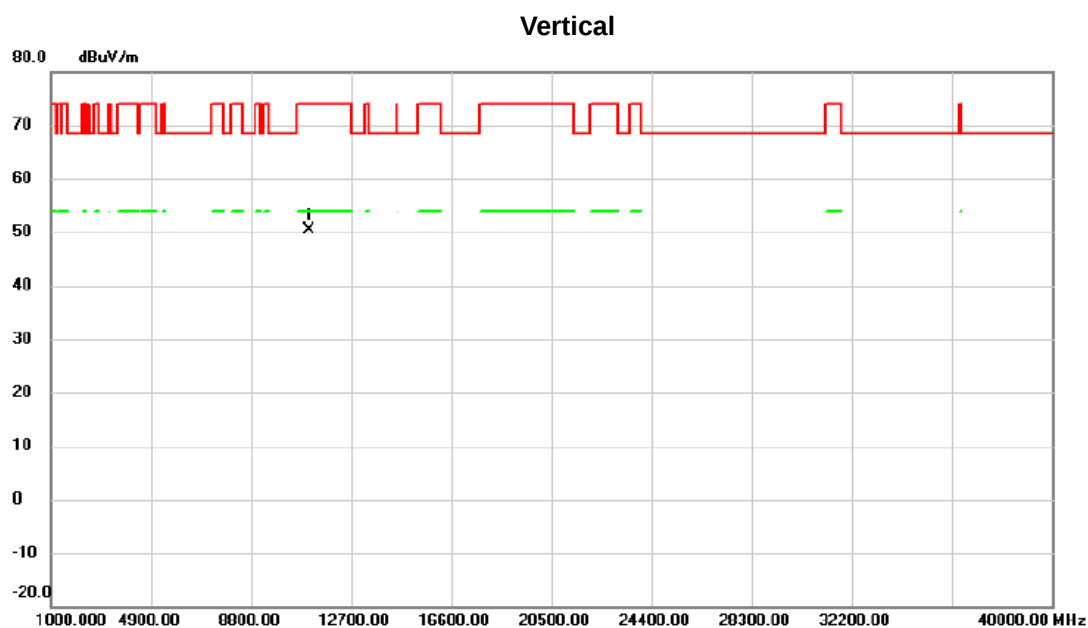


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11059.57	50.24	0.20	50.44	74.00	-23.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	996

Horizontal

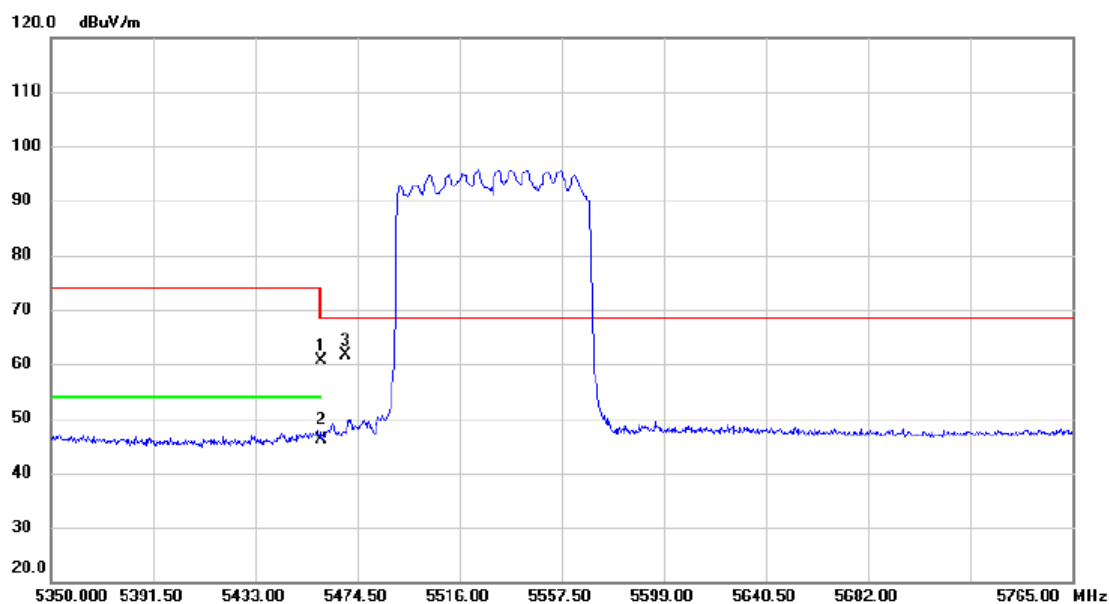


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	21.18	39.46	60.64	74.00	-13.36	peak	
2		5460.000	6.69	39.46	46.15	54.00	-7.85	AVG	
3	*	5470.000	22.28	39.47	61.75	68.30	-6.55	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz	RU configuration	996

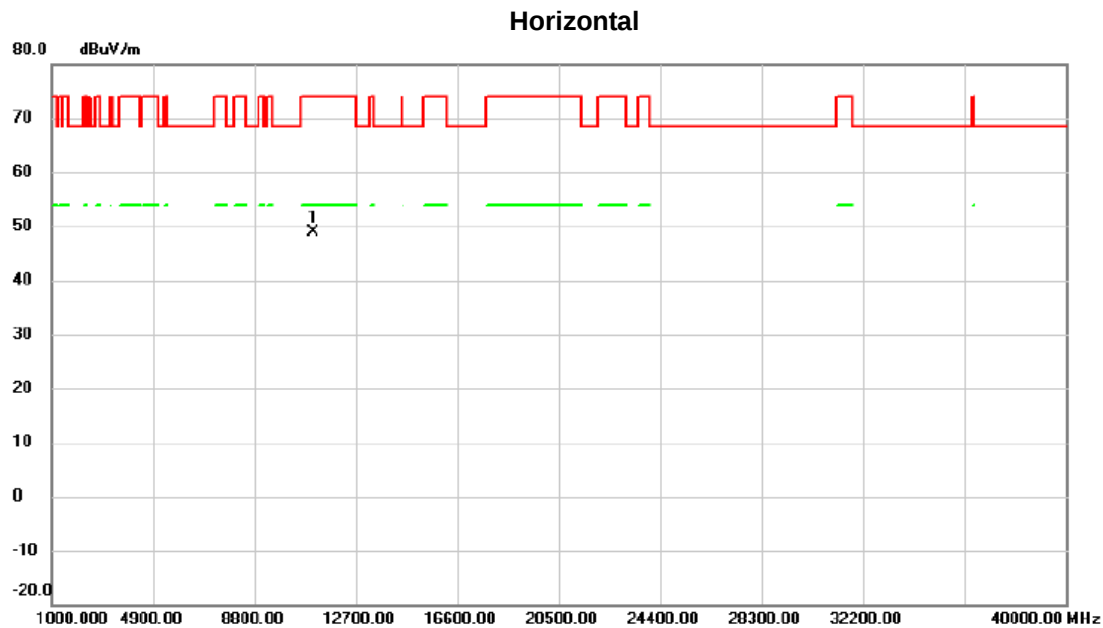


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11061.96	48.64	0.19	48.83	74.00	-25.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	26

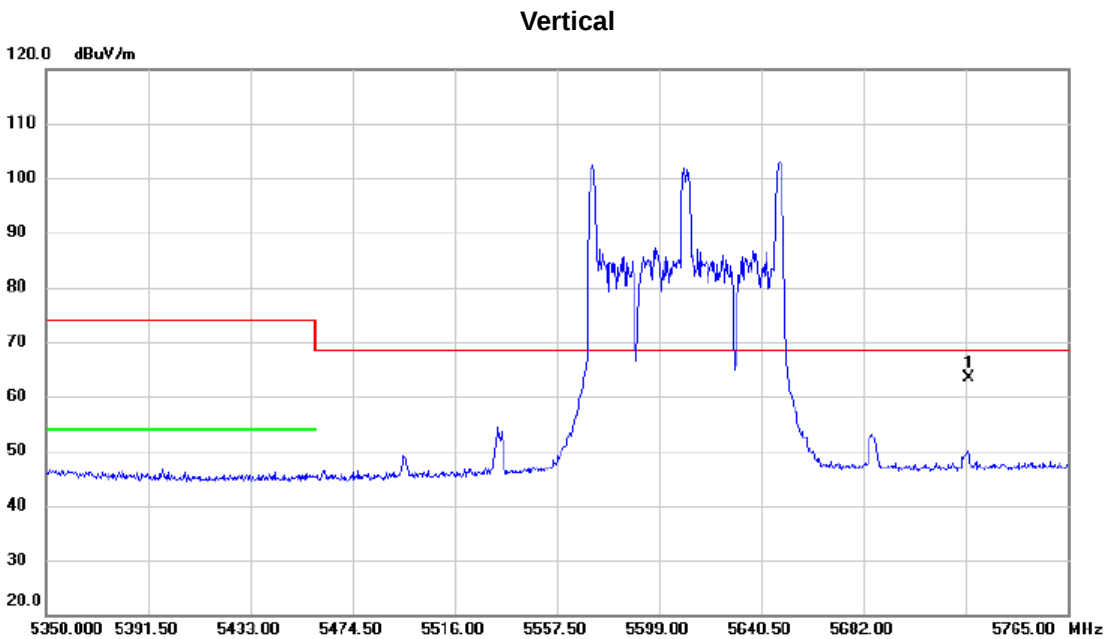


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	23.34	40.05	63.39	68.30	-4.91	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	26

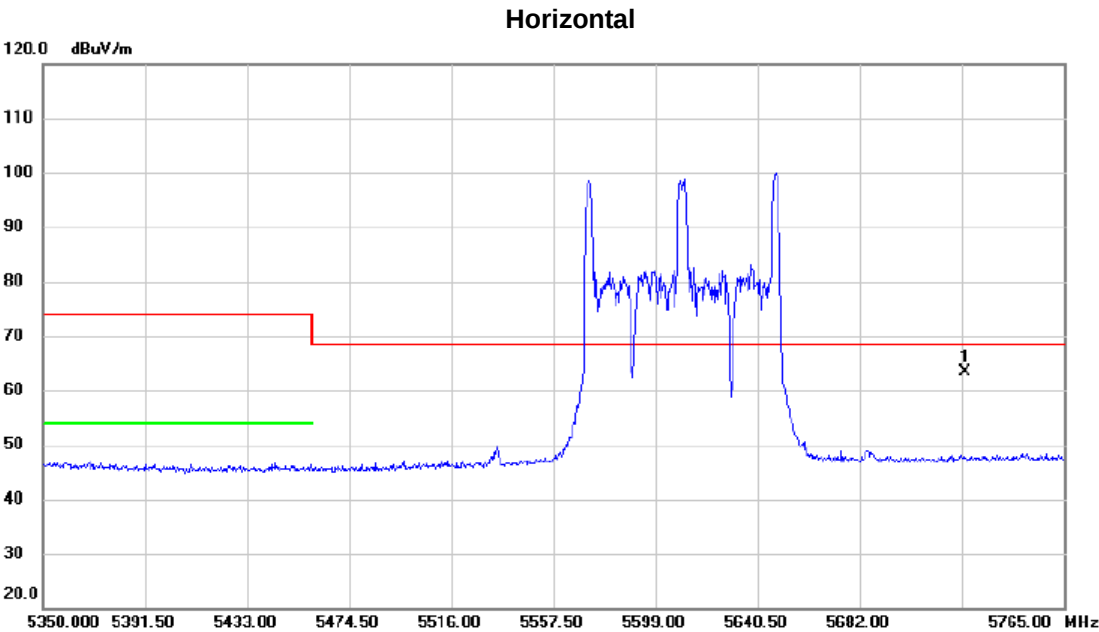


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5725.000	23.31	40.05	63.36	68.30	-4.94	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	52

Vertical

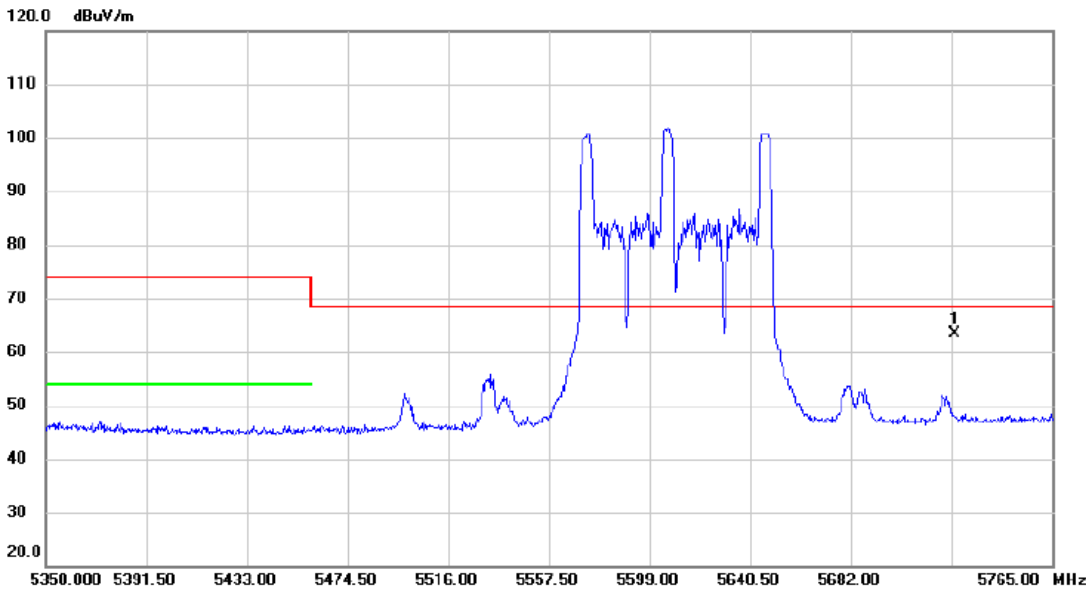


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	23.29	40.05	63.34	68.30	-4.96	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	52

Horizontal

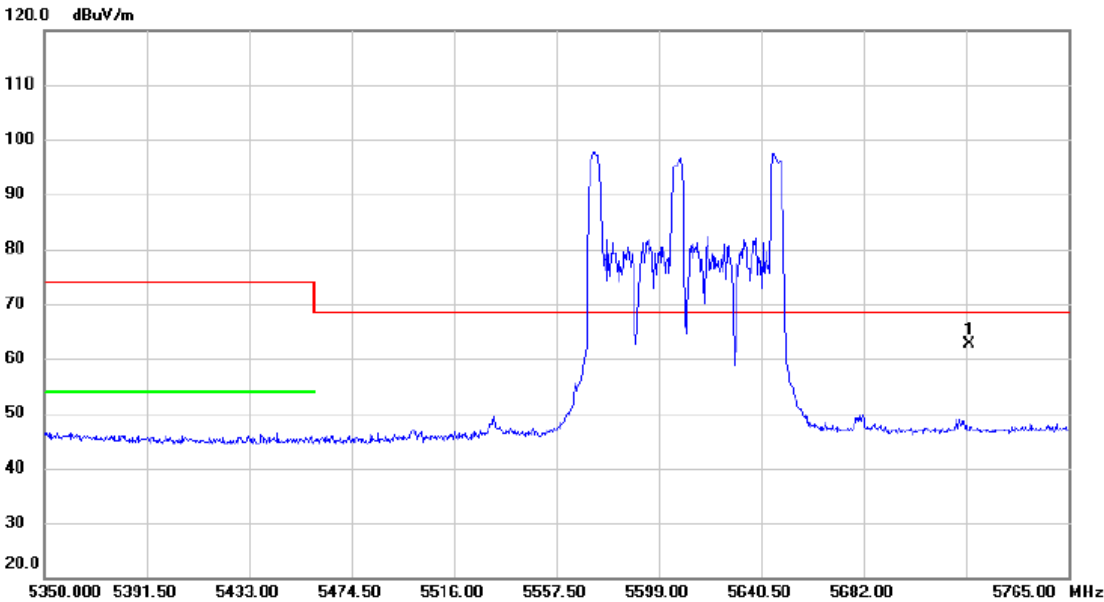


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	22.54	40.05	62.59	68.30	-5.71	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	106

Vertical

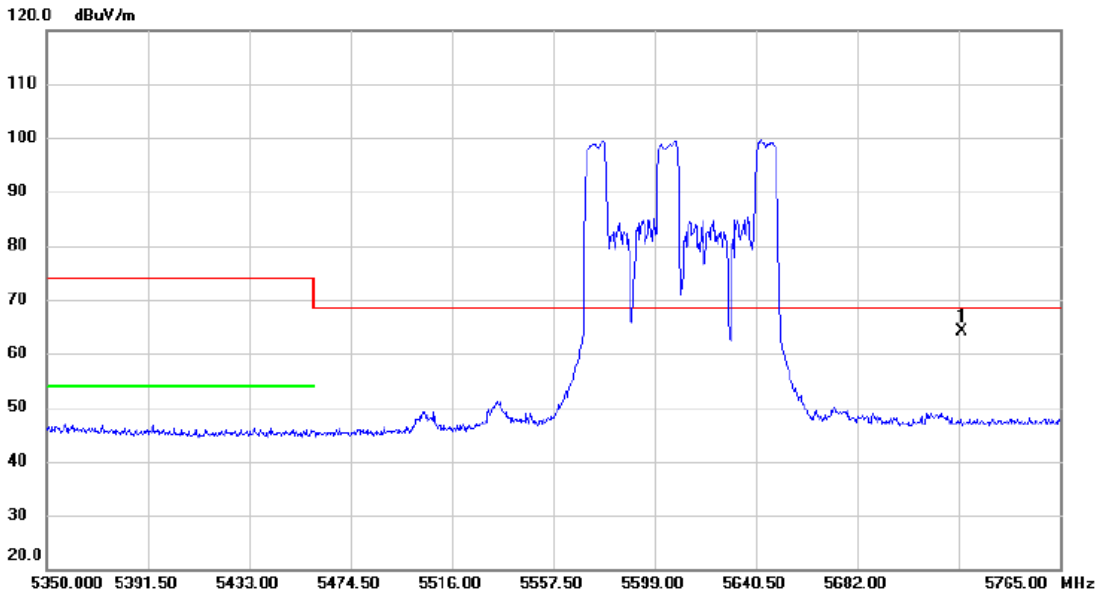


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	23.99	40.05	64.04	68.30	-4.26	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	106


Horizontal

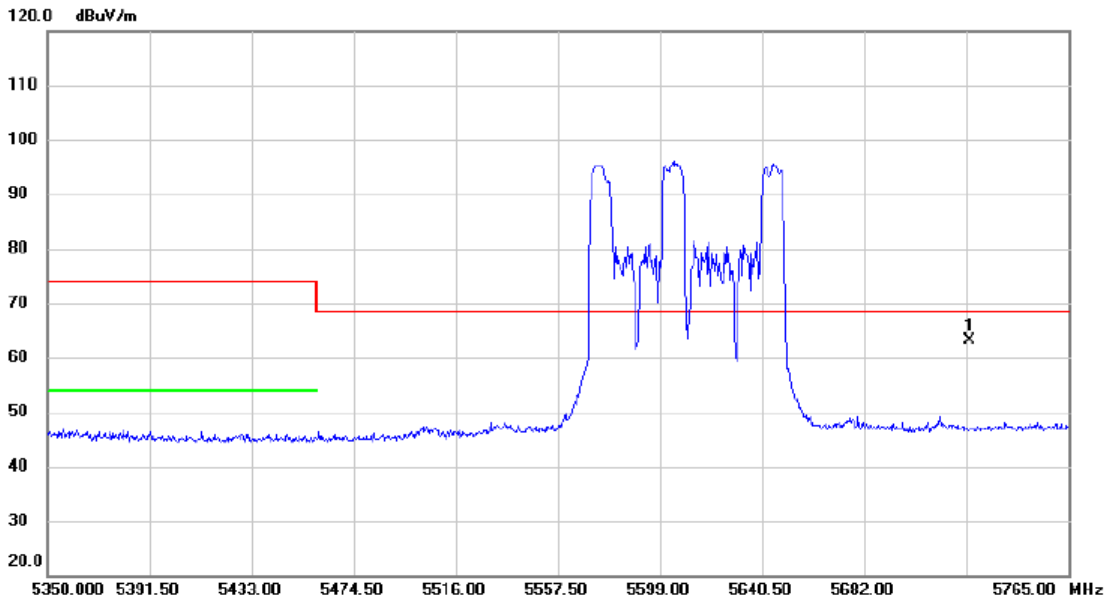

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	22.97	40.05	63.02	68.30	-5.28	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	242

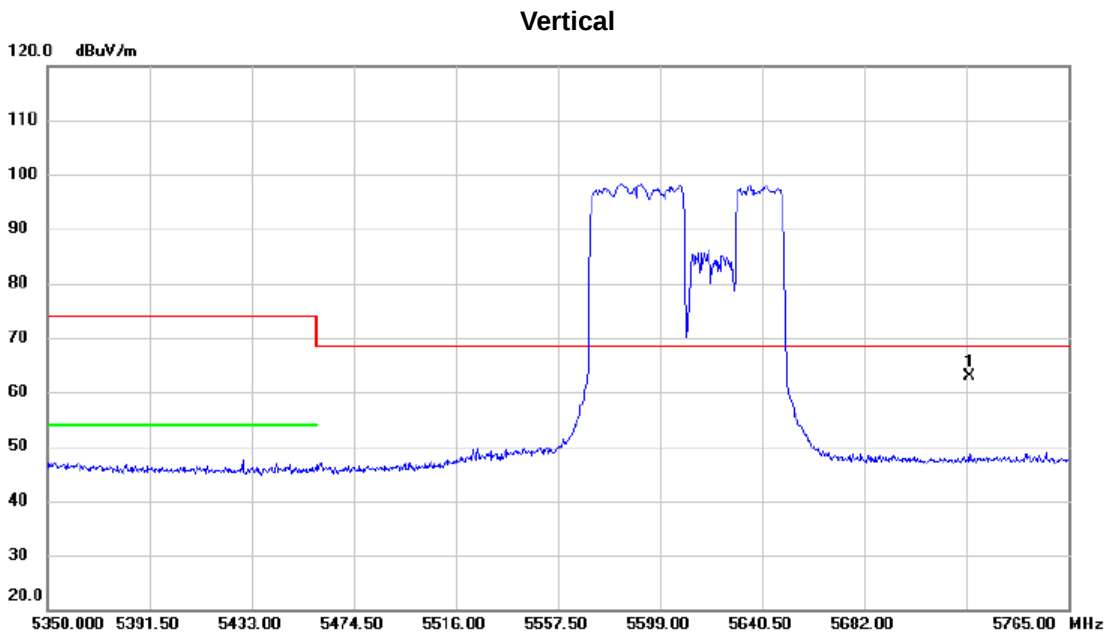


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	22.72	40.05	62.77	68.30	-5.53	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	242

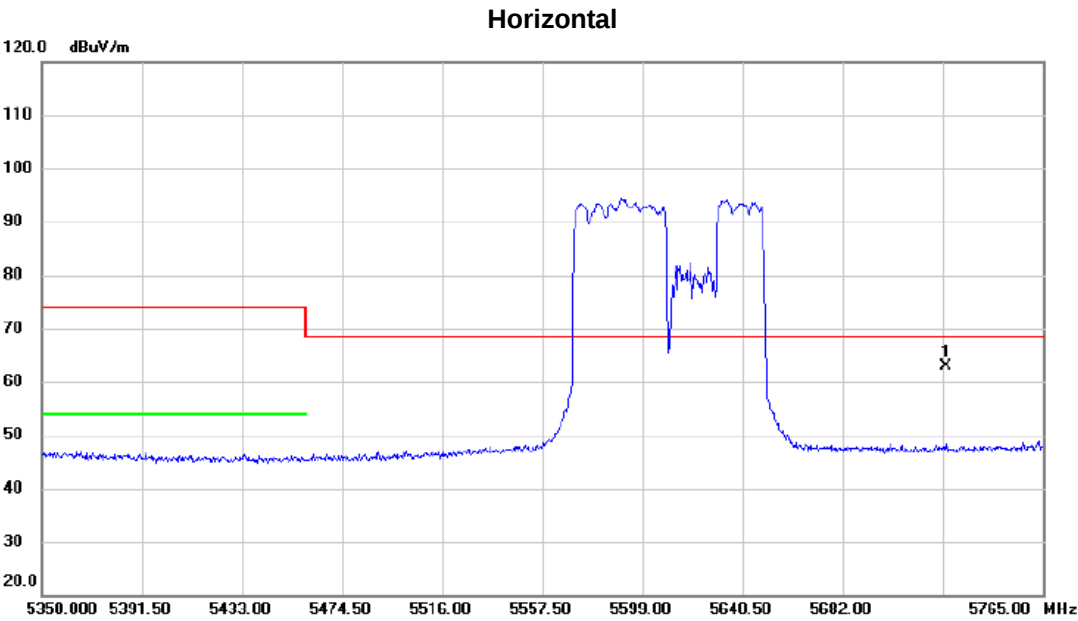


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5725.000	22.75	40.05	62.80	68.30	-5.50	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	484

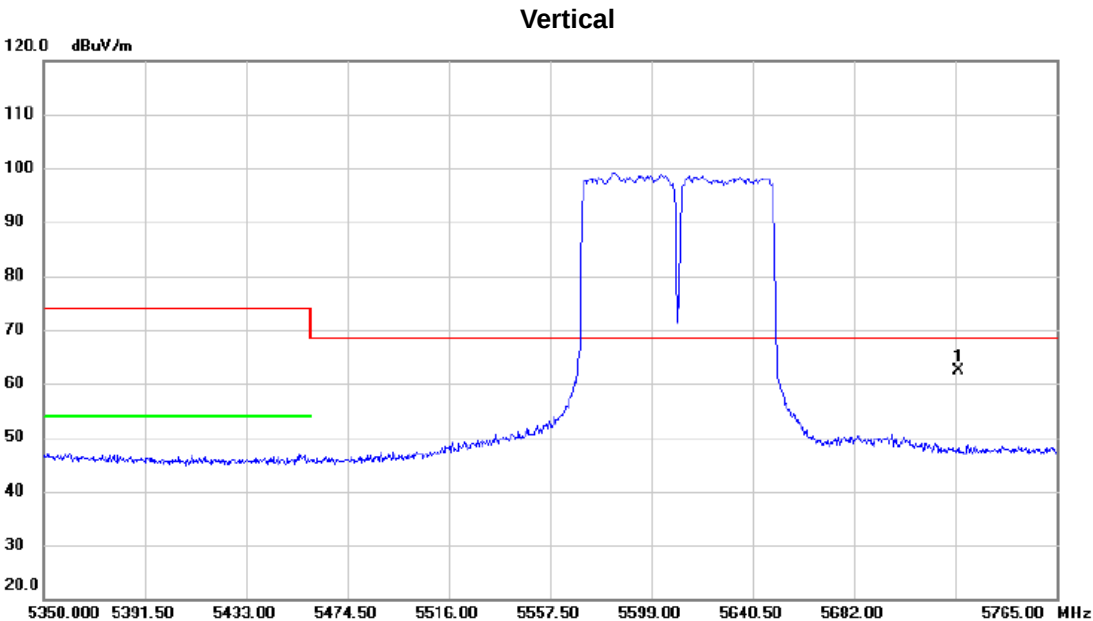

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5725.000	22.38	40.05	62.43	68.30	-5.87	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	484

Horizontal

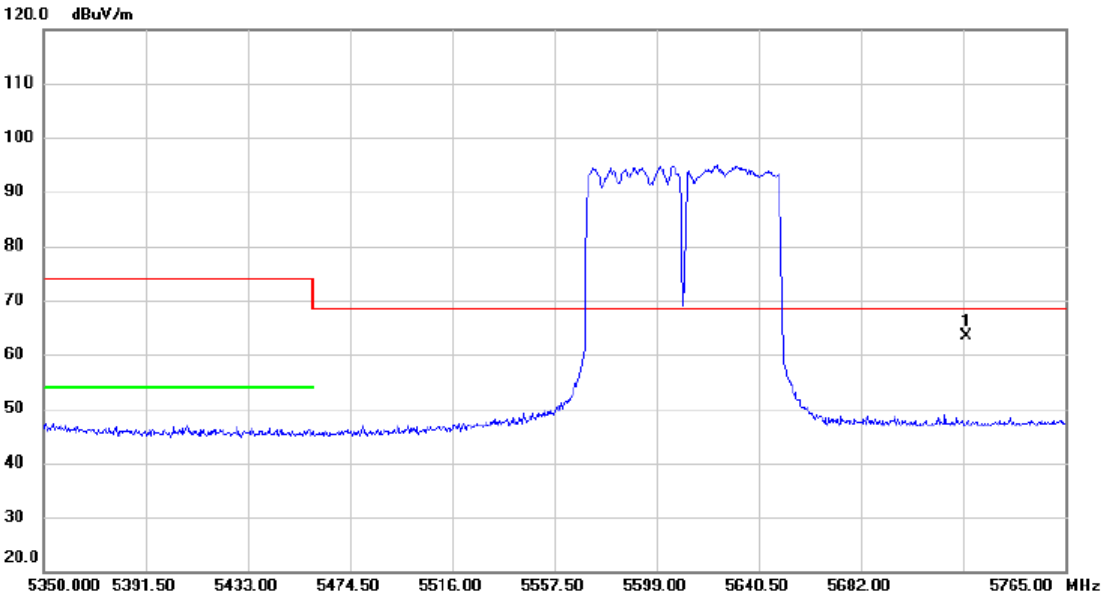


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	23.36	40.05	63.41	68.30	-4.89	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	996

Vertical

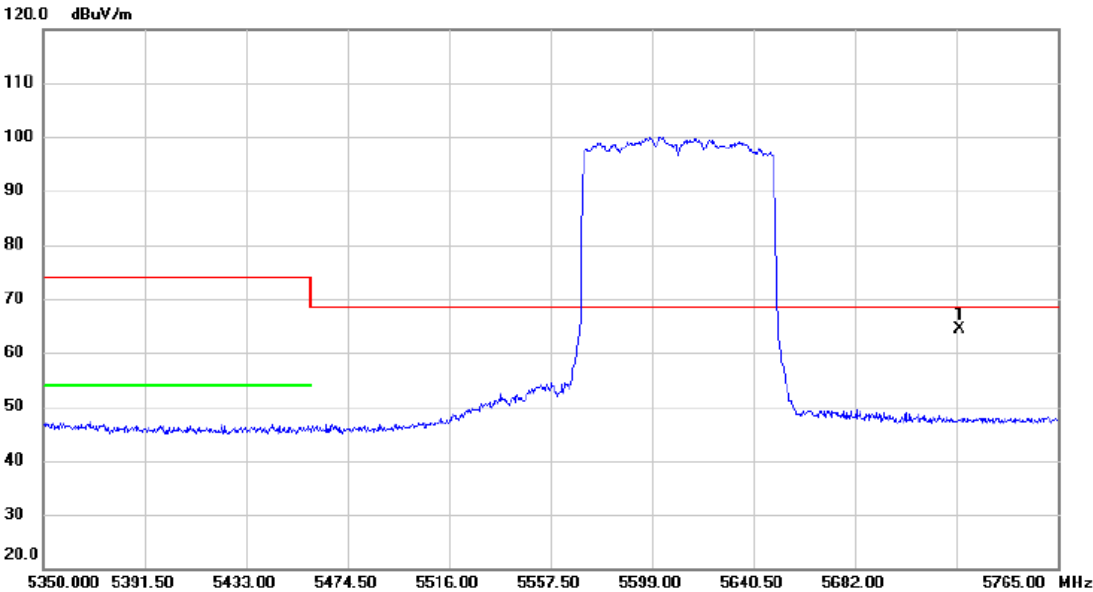

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	24.34	40.05	64.39	68.30	-3.91	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	996

Vertical

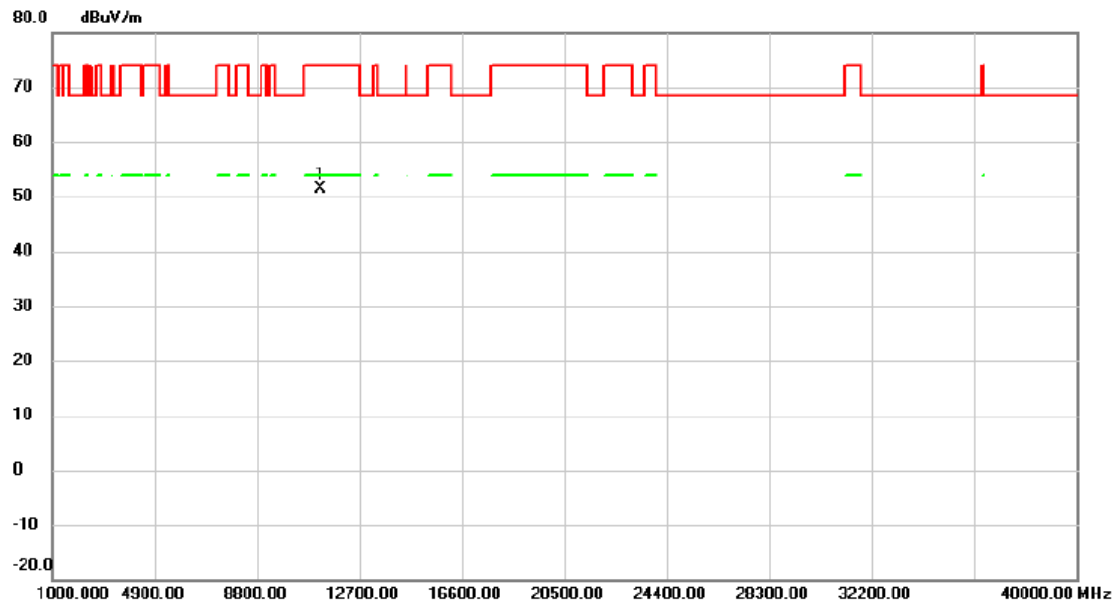


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11219.93	51.39	-0.01	51.38	74.00	-22.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	996

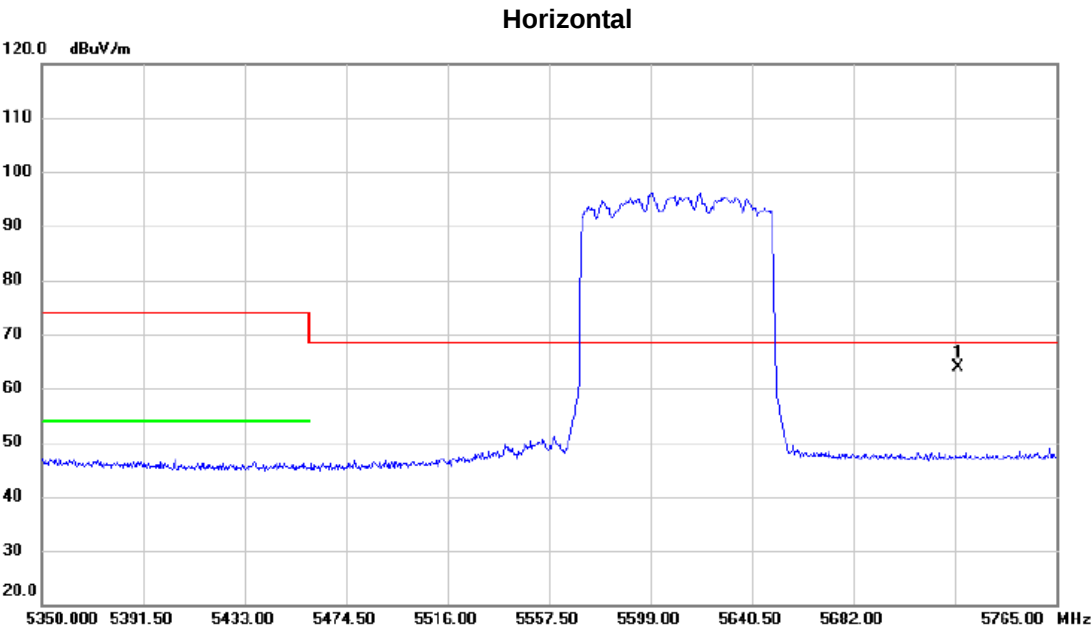


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	23.86	40.05	63.91	68.30	-4.39	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz	RU configuration	996

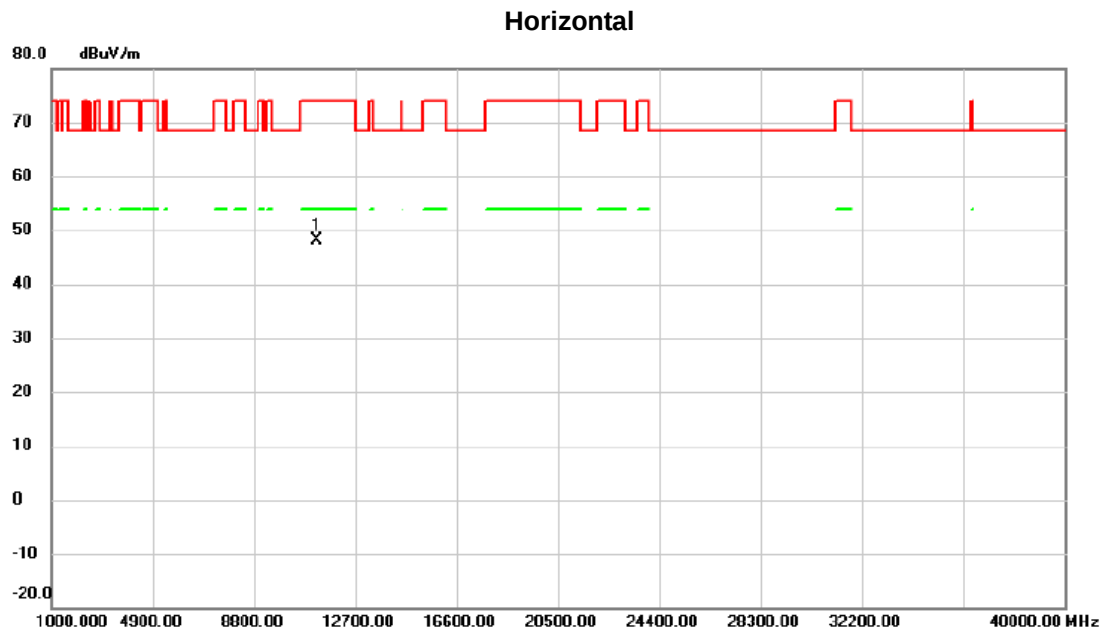


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11219.26	48.25	-0.01	48.24	74.00	-25.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.


Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	26

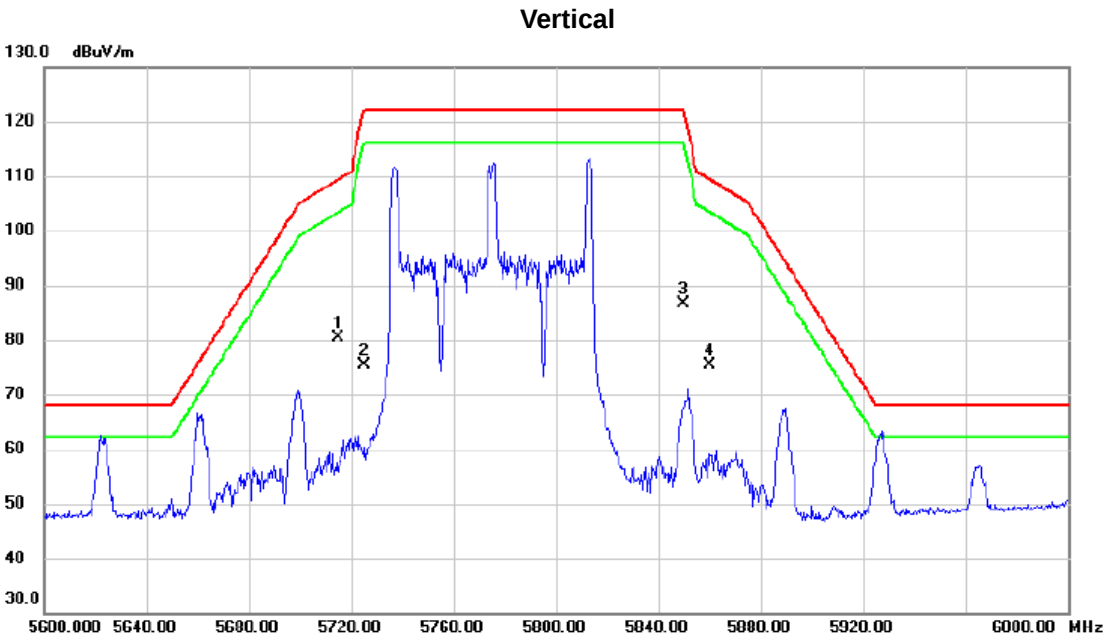

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5715.000	40.38	40.02	80.40	109.40	-29.00	peak	
2		5725.000	35.22	40.05	75.27	122.20	-46.93	peak	
3		5850.000	46.33	40.34	86.67	122.20	-35.53	peak	
4		5860.000	35.09	40.36	75.45	109.40	-33.95	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	26

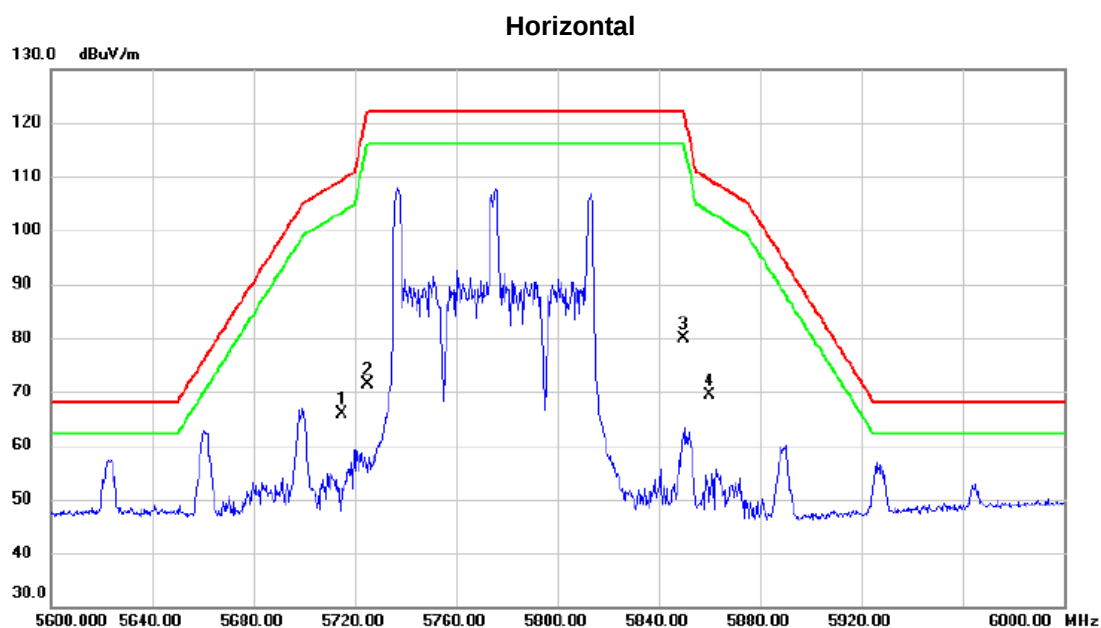


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	25.74	40.02	65.76	109.40	-43.64	peak	
2		5725.000	31.23	40.05	71.28	122.20	-50.92	peak	
3		5850.000	39.53	40.34	79.87	122.20	-42.33	peak	
4	*	5860.000	29.10	40.36	69.46	109.40	-39.94	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	52

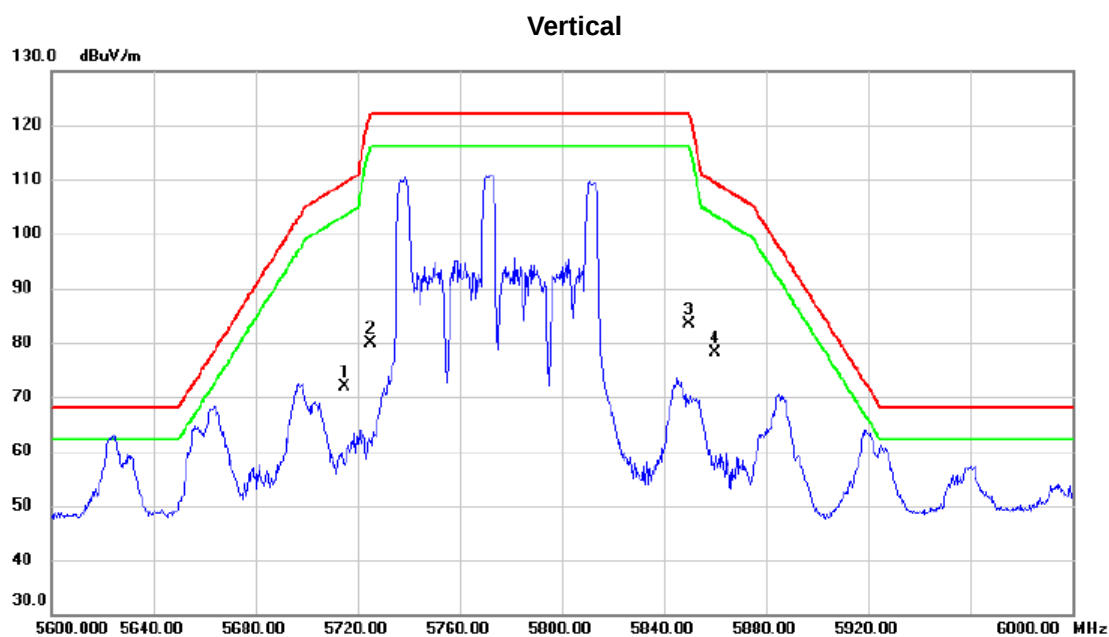


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	31.98	40.02	72.00	109.40	-37.40	peak	
2		5725.000	39.87	40.05	79.92	122.20	-42.28	peak	
3		5850.000	43.01	40.34	83.35	122.20	-38.85	peak	
4	*	5860.000	37.72	40.36	78.08	109.40	-31.32	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	52

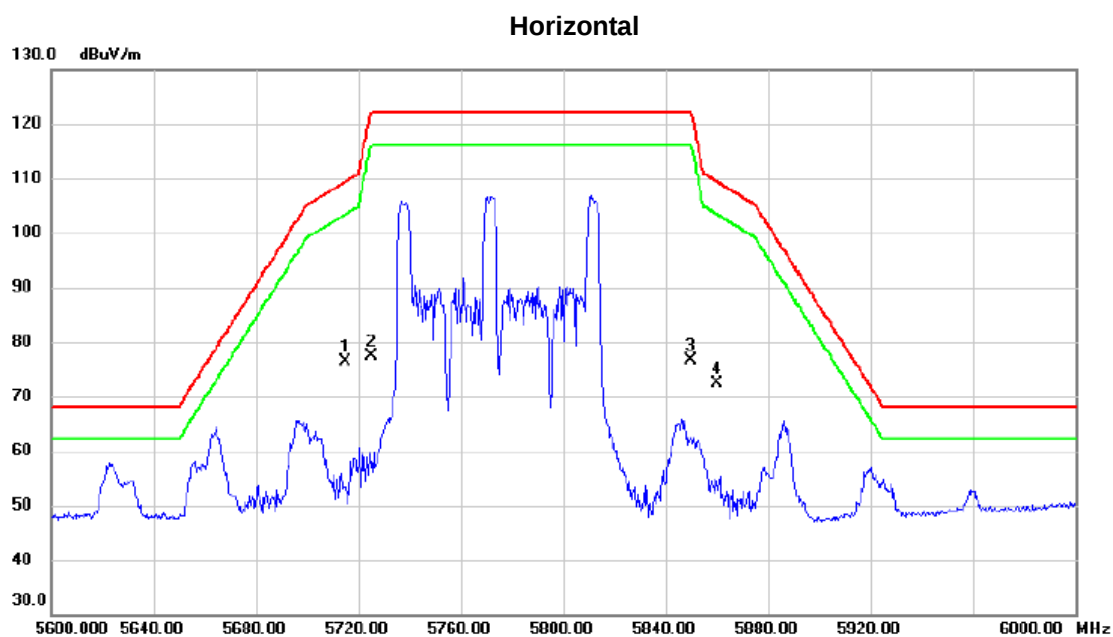


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5715.000	36.48	40.02	76.50	109.40	-32.90	peak	
2		5725.000	37.24	40.05	77.29	122.20	-44.91	peak	
3		5850.000	36.38	40.34	76.72	122.20	-45.48	peak	
4		5860.000	32.03	40.36	72.39	109.40	-37.01	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	106

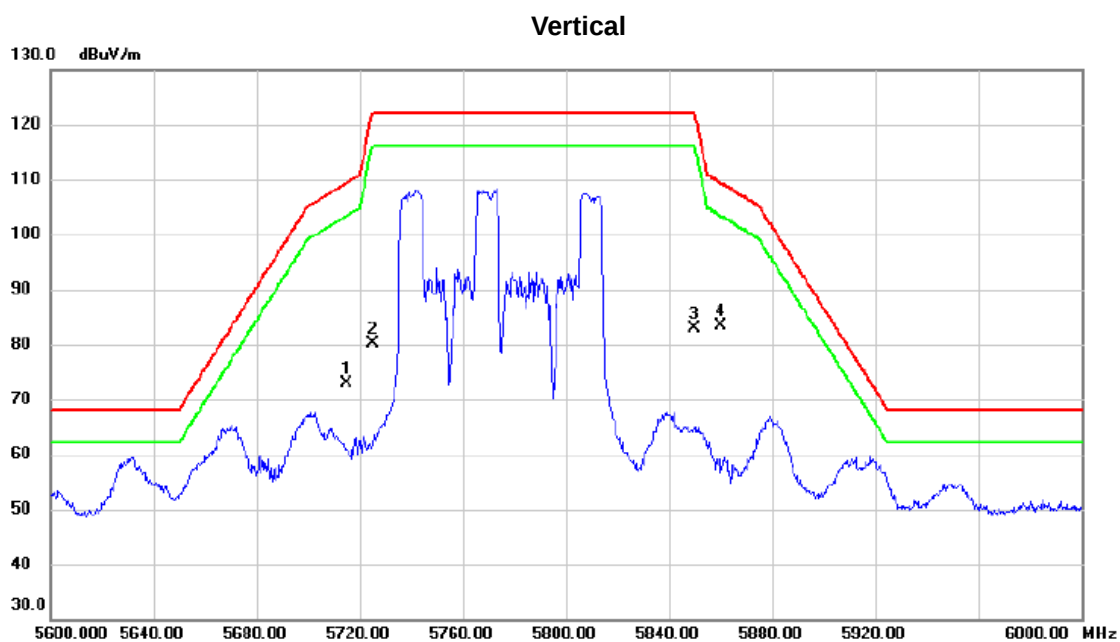


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	32.77	40.02	72.79	109.40	-36.61	peak	
2		5725.000	40.16	40.05	80.21	122.20	-41.99	peak	
3		5850.000	42.51	40.34	82.85	122.20	-39.35	peak	
4	*	5860.000	43.10	40.36	83.46	109.40	-25.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	106

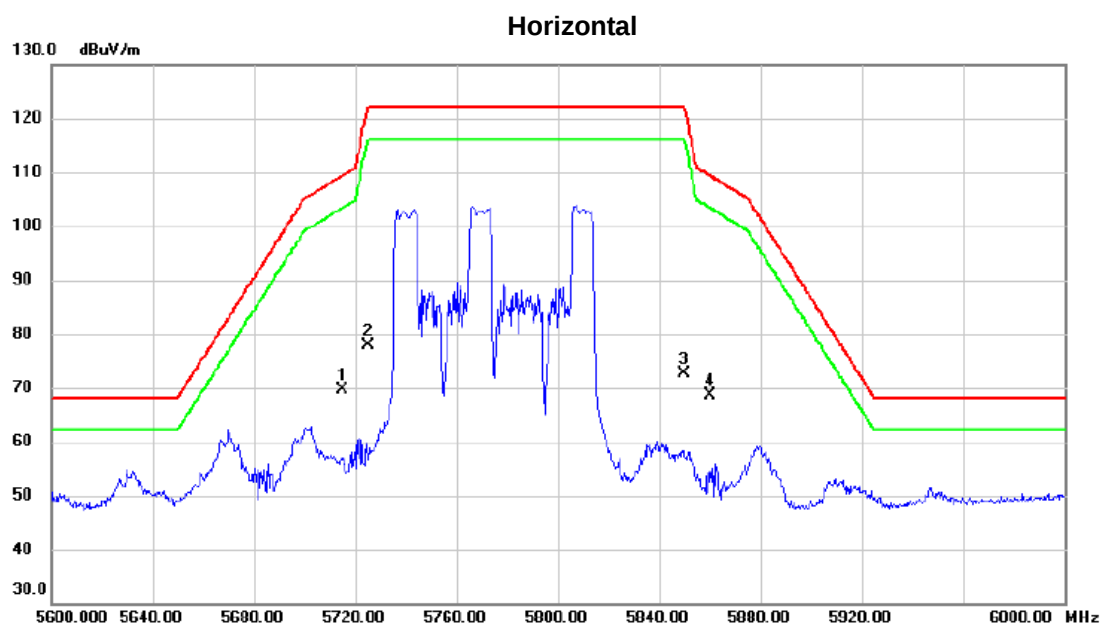

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5715.000	29.49	40.02	69.51	109.40	-39.89	peak	
2		5725.000	37.87	40.05	77.92	122.20	-44.28	peak	
3		5850.000	32.27	40.34	72.61	122.20	-49.59	peak	
4		5860.000	28.25	40.36	68.61	109.40	-40.79	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	242

Vertical

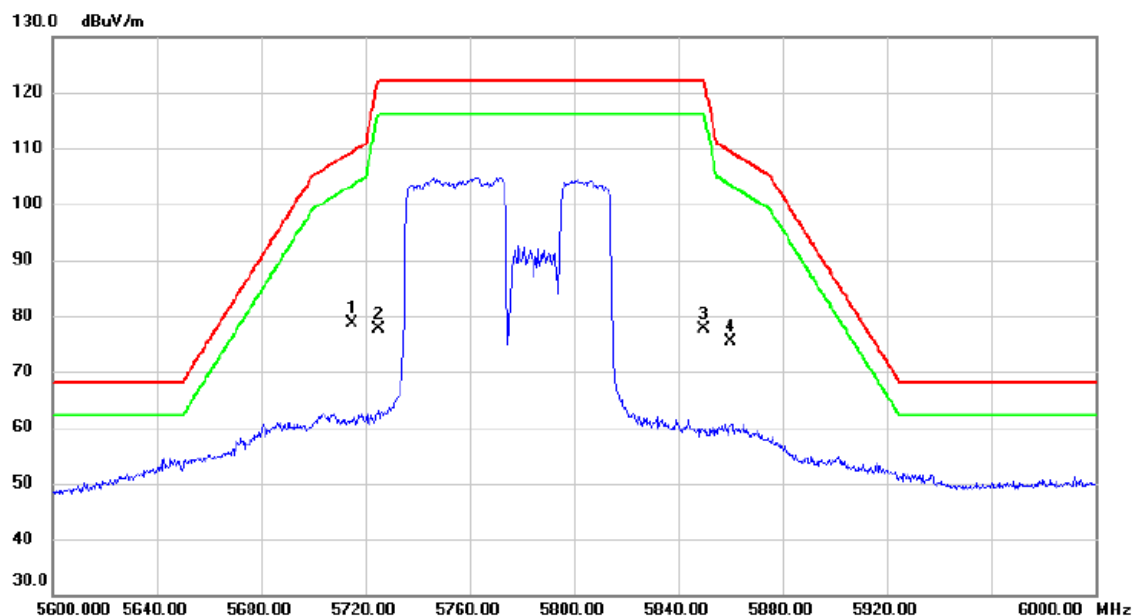

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5715.000	38.63	40.02	78.65	109.40	-30.75	peak	
2		5725.000	37.48	40.05	77.53	122.20	-44.67	peak	
3		5850.000	37.29	40.34	77.63	122.20	-44.57	peak	
4		5860.000	35.14	40.36	75.50	109.40	-33.90	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	242

Horizontal

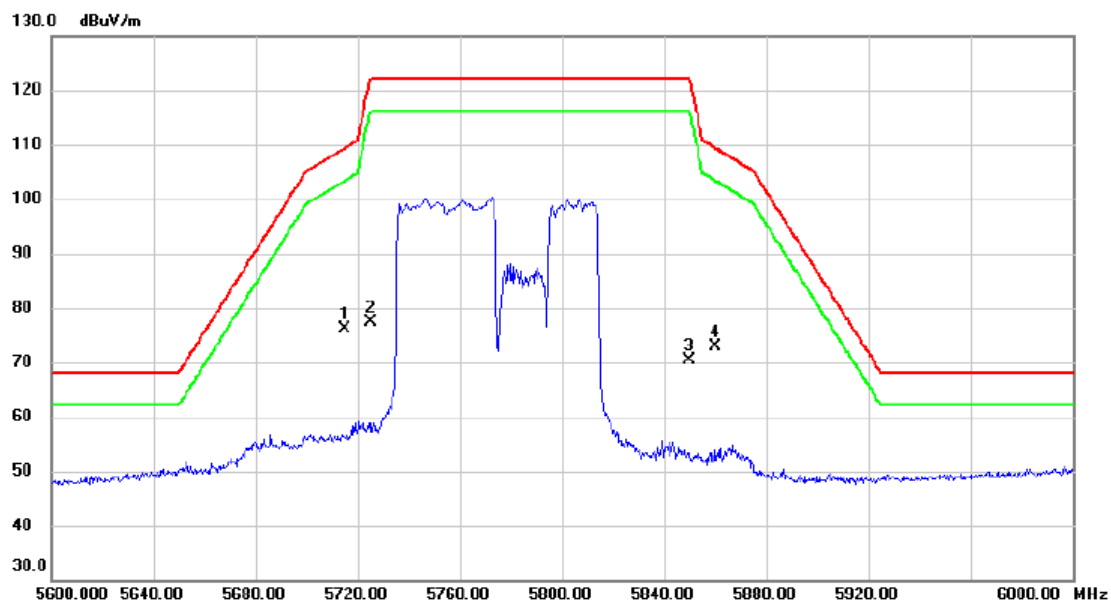


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5715.000	36.01	40.02	76.03	109.40	-33.37	peak	
2		5725.000	37.34	40.05	77.39	122.20	-44.81	peak	
3		5850.000	30.12	40.34	70.46	122.20	-51.74	peak	
4		5860.000	32.50	40.36	72.86	109.40	-36.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	484

Vertical

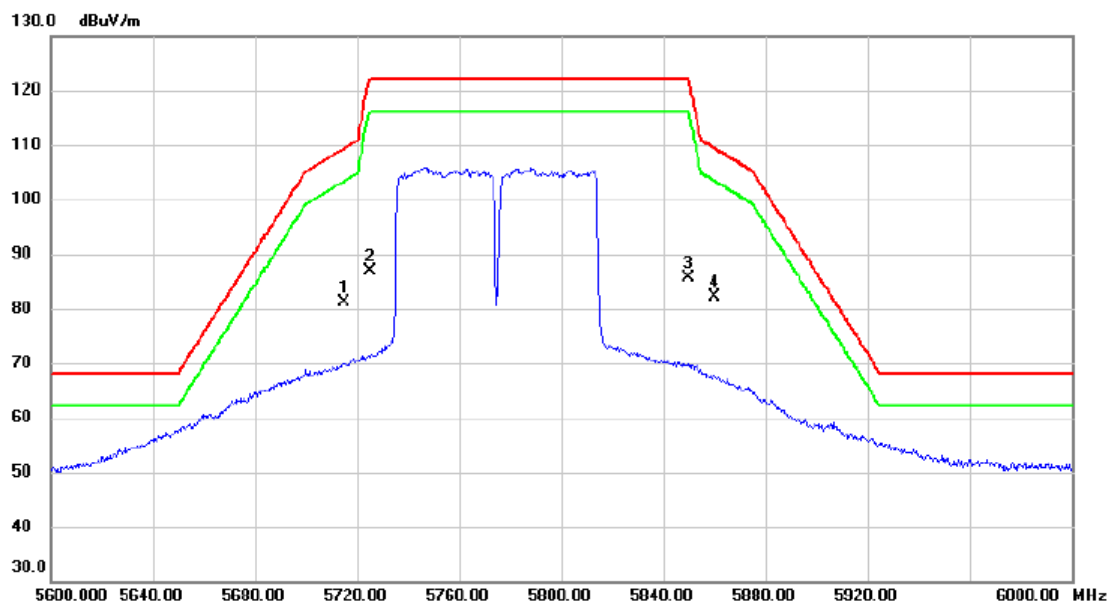


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	41.19	40.02	81.21	109.40	-28.19	peak	
2		5725.000	46.72	40.05	86.77	122.20	-35.43	peak	
3		5850.000	45.41	40.34	85.75	122.20	-36.45	peak	
4	*	5860.000	41.71	40.36	82.07	109.40	-27.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	484

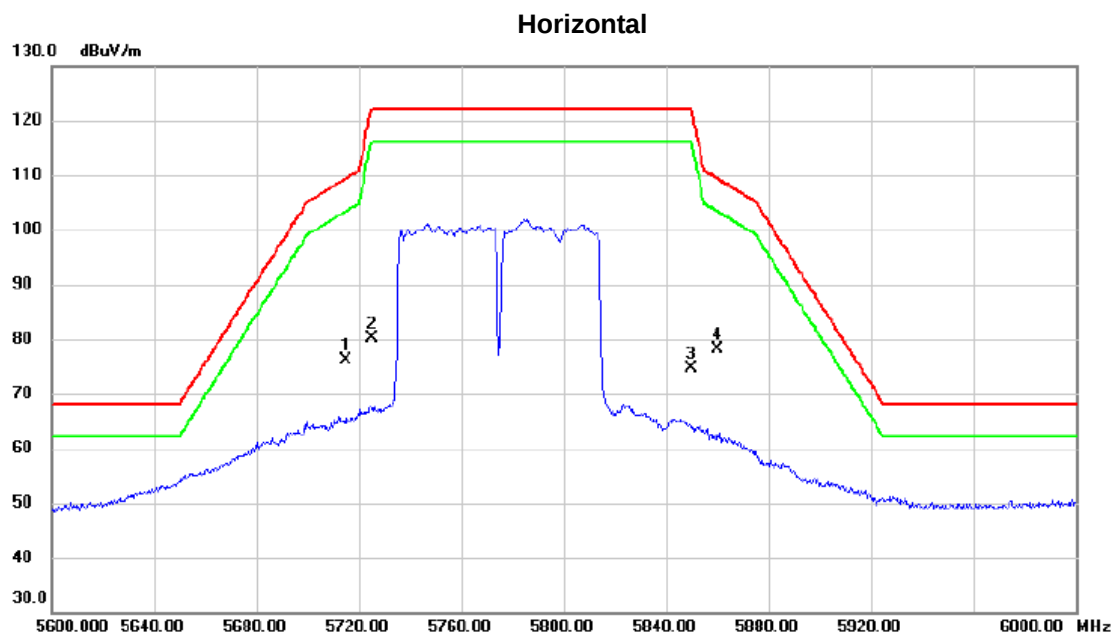

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5715.000	36.08	40.02	76.10	109.40	-33.30	peak	
2		5725.000	40.11	40.05	80.16	122.20	-42.04	peak	
3		5850.000	34.25	40.34	74.59	122.20	-47.61	peak	
4	*	5860.000	37.84	40.36	78.20	109.40	-31.20	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	996

Vertical

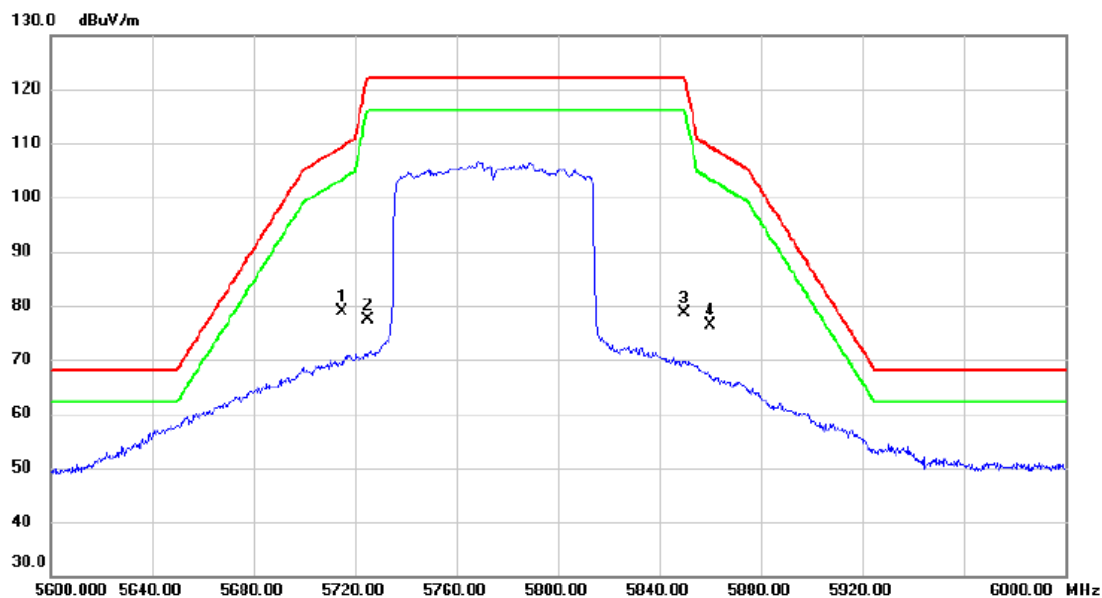


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5715.000	38.85	40.02	78.87	109.40	-30.53	peak	
2		5725.000	37.29	40.05	77.34	122.20	-44.86	peak	
3		5850.000	38.28	40.34	78.62	122.20	-43.58	peak	
4		5860.000	35.97	40.36	76.33	109.40	-33.07	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	996

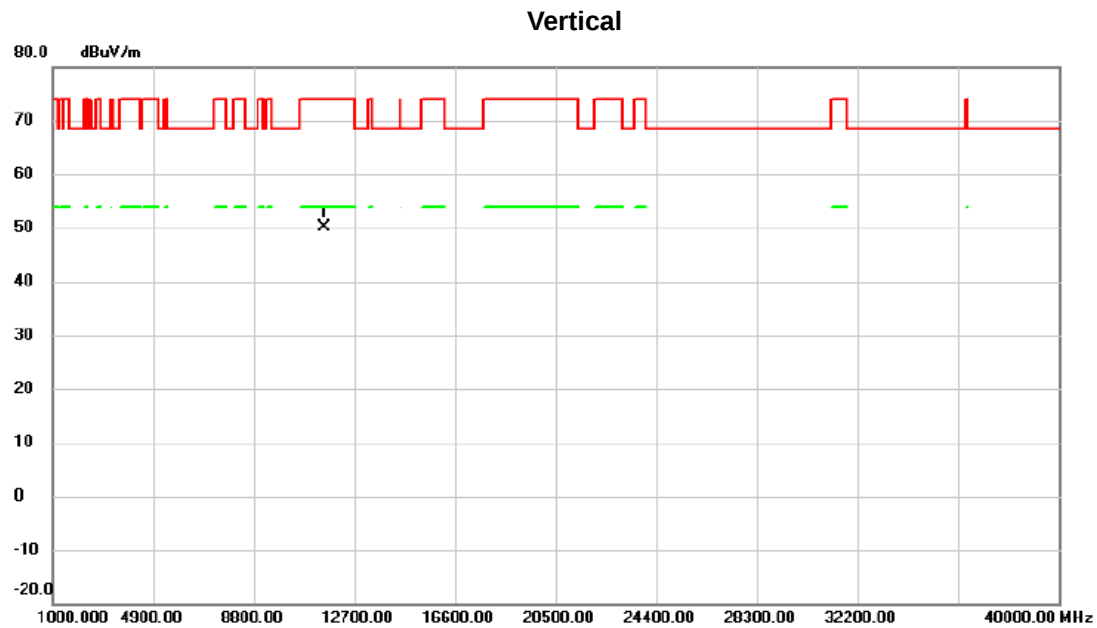


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11550.02	50.49	-0.35	50.14	74.00	-23.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	996

Horizontal

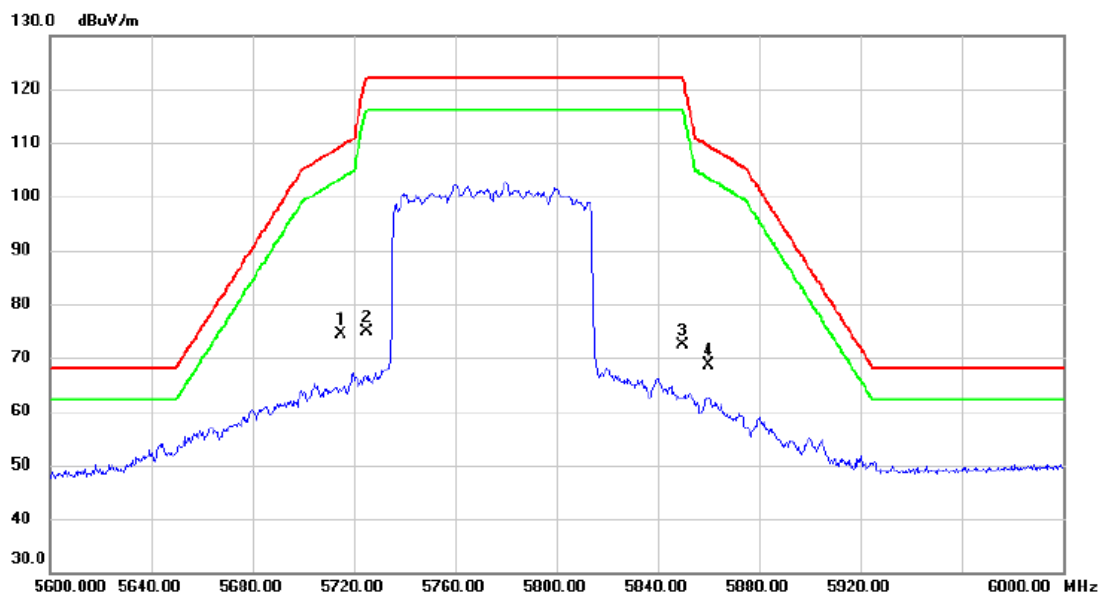


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5715.000	34.28	40.02	74.30	109.40	-35.10	peak	
2		5725.000	34.89	40.05	74.94	122.20	-47.26	peak	
3		5850.000	32.10	40.34	72.44	122.20	-49.76	peak	
4		5860.000	28.28	40.36	68.64	109.40	-40.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	996

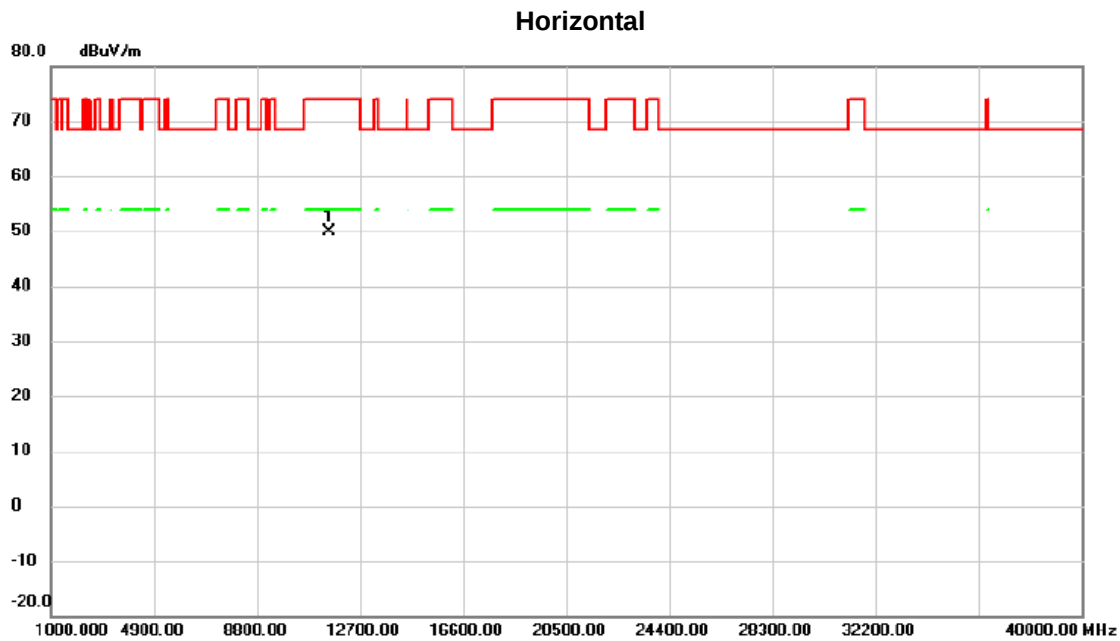

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11549.64	50.21	-0.35	49.86	74.00	-24.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - BANDWIDTH


Test Mode	UNII-1_TX AX (HE20) Mode	RU configuration	26
-----------	--------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	35.50	19.80
40	5200	33.79	19.80
48	5240	23.25	19.60




Test Mode	UNII-2A_TX AX (HE20) Mode	RU configuration	26
-----------	---------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	23.30	19.70
60	5300	23.20	19.50
64	5320	22.91	19.60

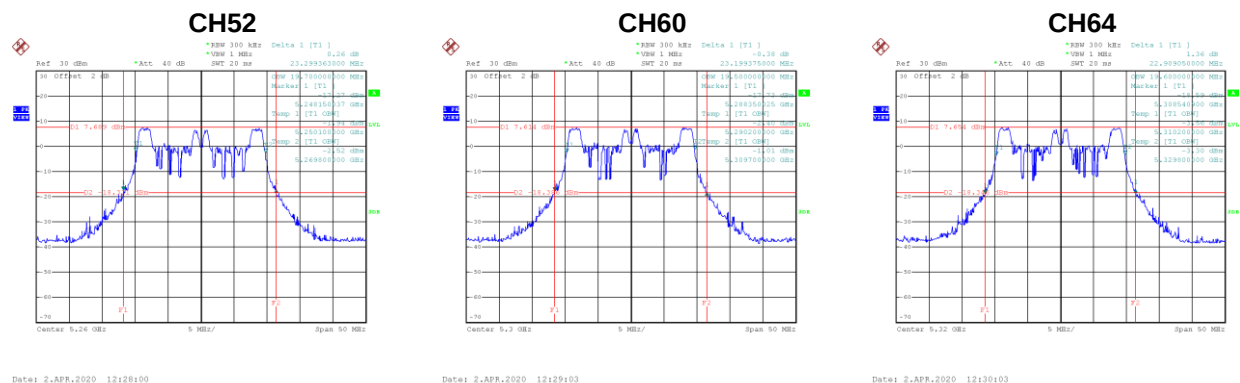


Test Mode	UNII-2C_TX AX (HE20) Mode	RU configuration	26
-----------	---------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	23.75	19.70
116	5580	23.35	19.60
140	5700	23.50	19.70

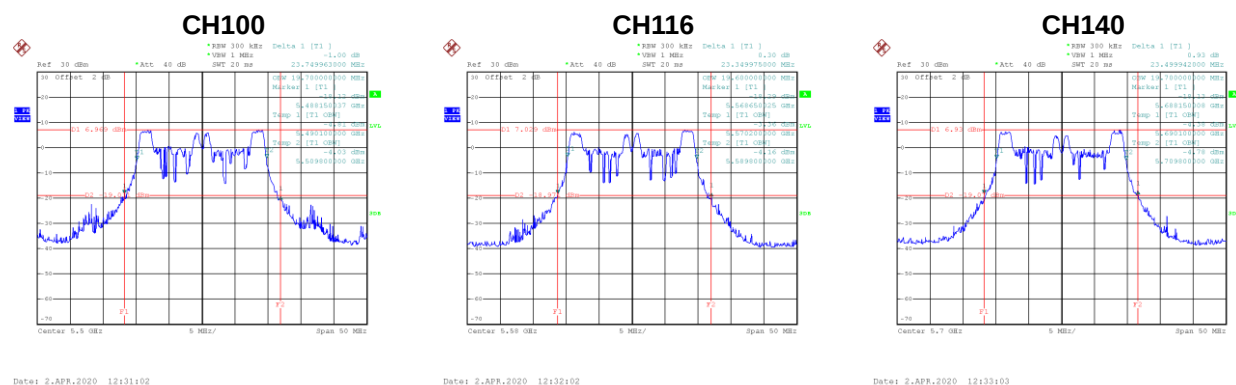


Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	26
-----------	--------------------------	------------------	----

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	19.20	500	Complies
157	5785	19.05	500	Complies
165	5825	19.05	500	Complies

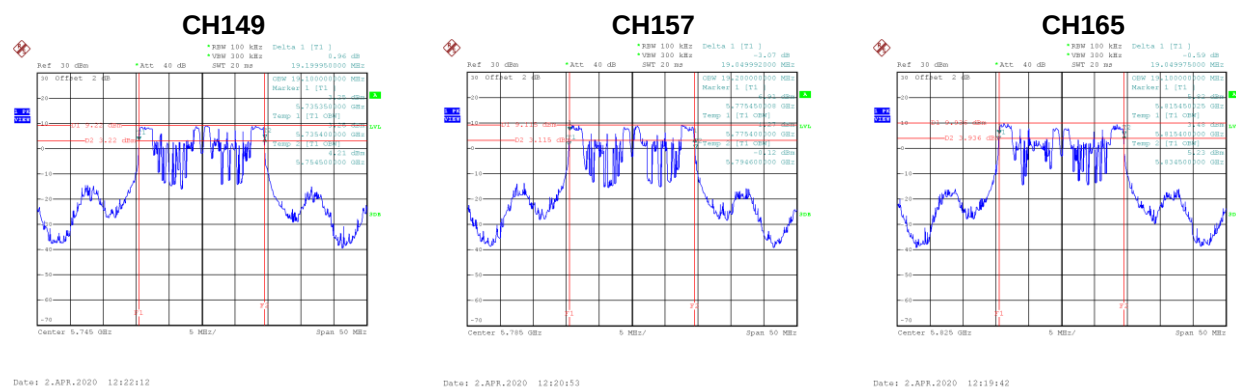


Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	26
-----------	--------------------------	------------------	----


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
149	5745	19.90
157	5785	19.80
165	5825	19.90

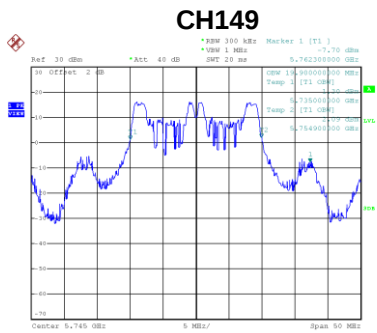

Date: 2.APR.2020 12:21:39

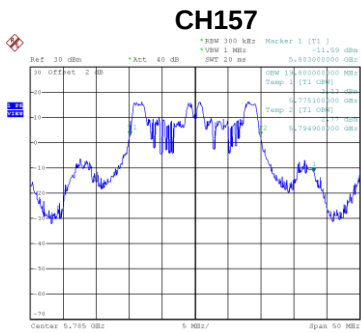


Date: 2.APR.2020 12:20:20

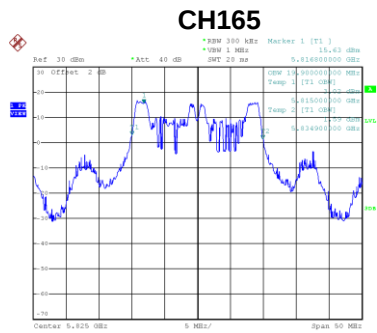

Date: 2.APR.2020 12:19:07


Test Mode	UNII-1_TX AX (HE20) Mode	RU configuration	52
-----------	--------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	34.20	19.70
40	5200	34.50	19.60
48	5240	31.10	19.40

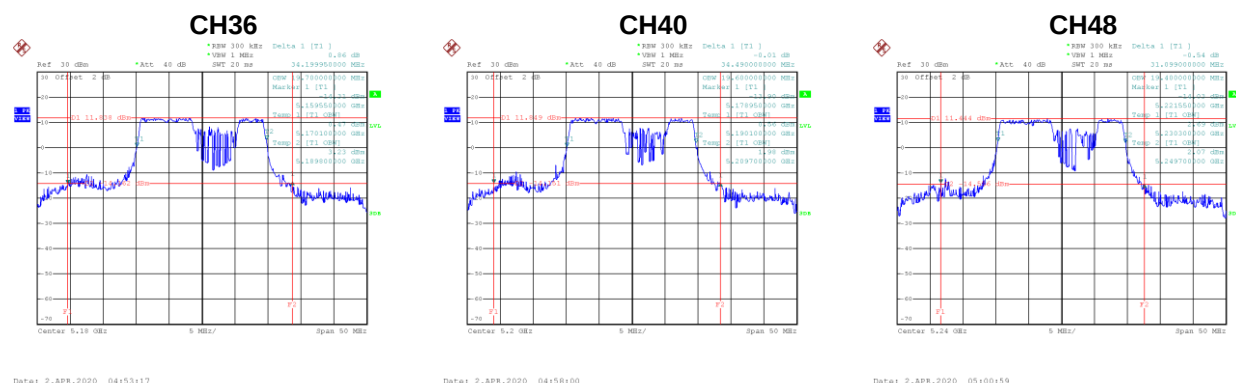


Test Mode	UNII-2A_TX AX (HE20) Mode	RU configuration	52
-----------	---------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	24.05	19.40
60	5300	24.50	19.40
64	5320	24.60	19.50

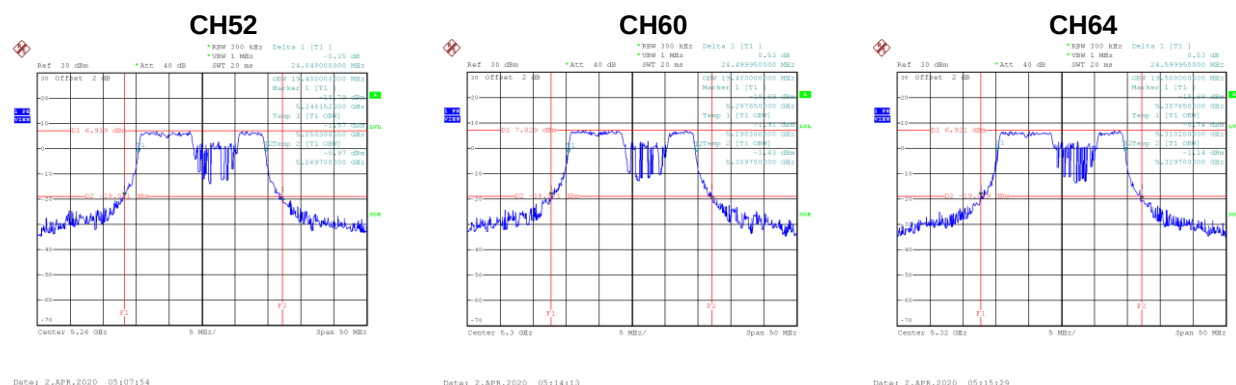


Test Mode	UNII-2C_TX AX (HE20) Mode	RU configuration	52
-----------	---------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	32.10	19.50
116	5580	25.09	19.30
140	5700	24.65	19.40

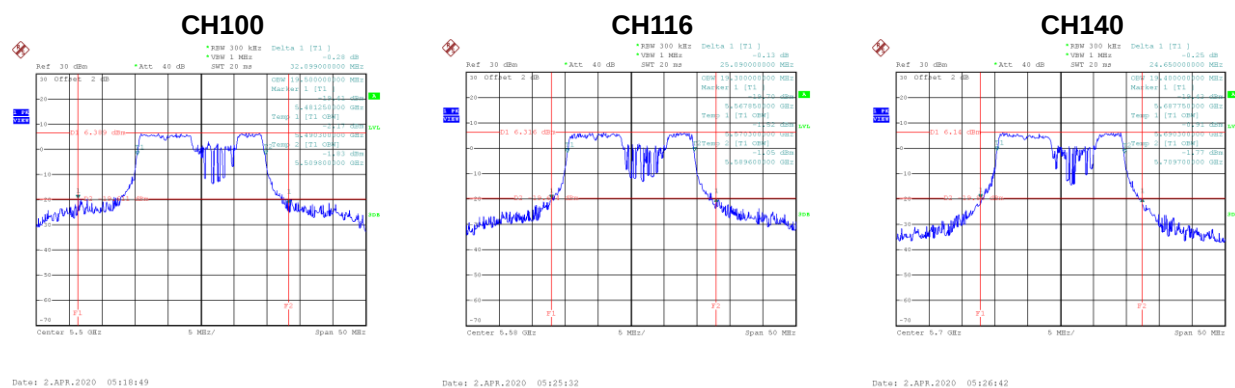


Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	52
-----------	--------------------------	------------------	----

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	19.10	500	Complies
157	5785	19.00	500	Complies
165	5825	19.05	500	Complies

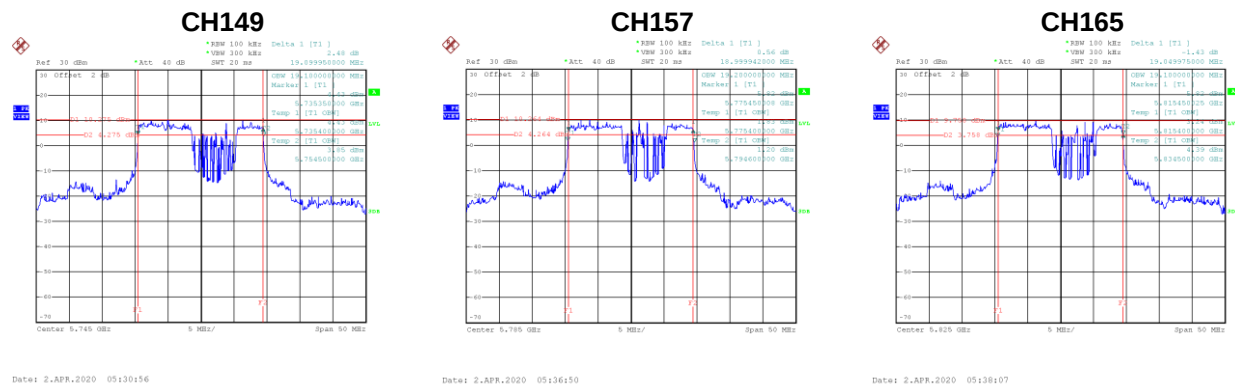

Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	52
-----------	--------------------------	------------------	----

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
149	5745	19.70
157	5785	19.60
165	5825	19.90

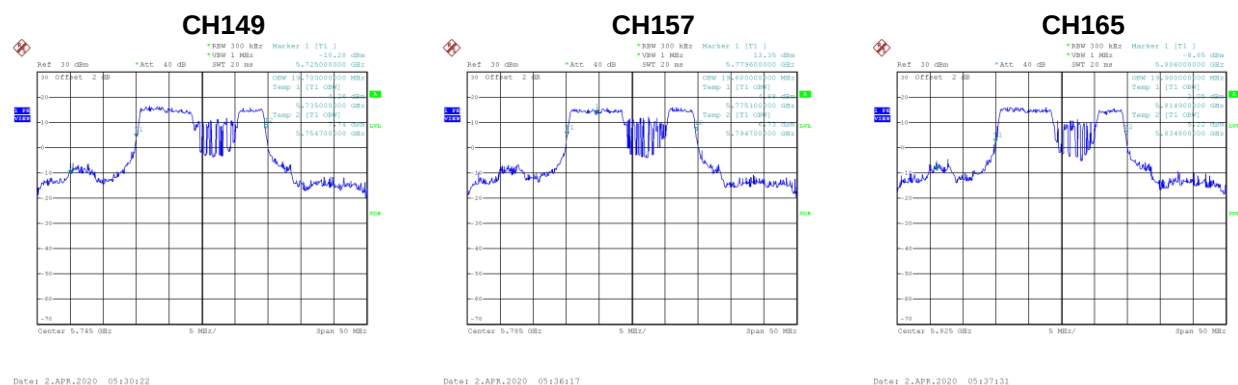


Date: 2.APR.2020 05:13:22

Date: 2.APR.2020 05:13:17

Date: 2.APR.2020 05:13:31


Test Mode	UNII-2C_TX AX (HE20) Mode	RU configuration	106
-----------	---------------------------	------------------	-----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	24.29	19.20
116	5580	23.65	19.40
140	5700	24.85	19.40

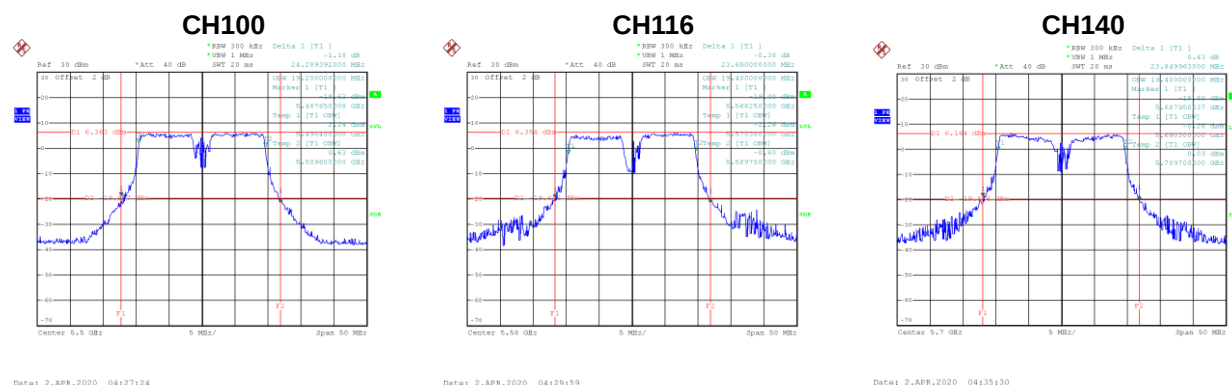

Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	106
-----------	--------------------------	------------------	-----

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	19.20	500	Complies
157	5785	19.19	500	Complies
165	5825	19.20	500	Complies

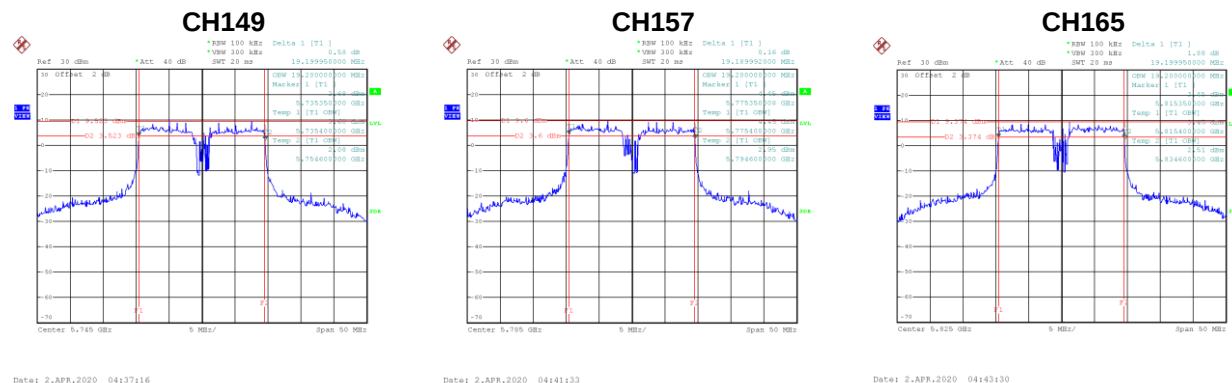


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
149	5745	19.50
157	5785	19.50
165	5825	19.50




Test Mode	UNII-1_TX AX (HE20) Mode	RU configuration	242
-----------	--------------------------	------------------	-----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	24.69	19.10
40	5200	23.85	19.10
48	5240	22.10	19.10

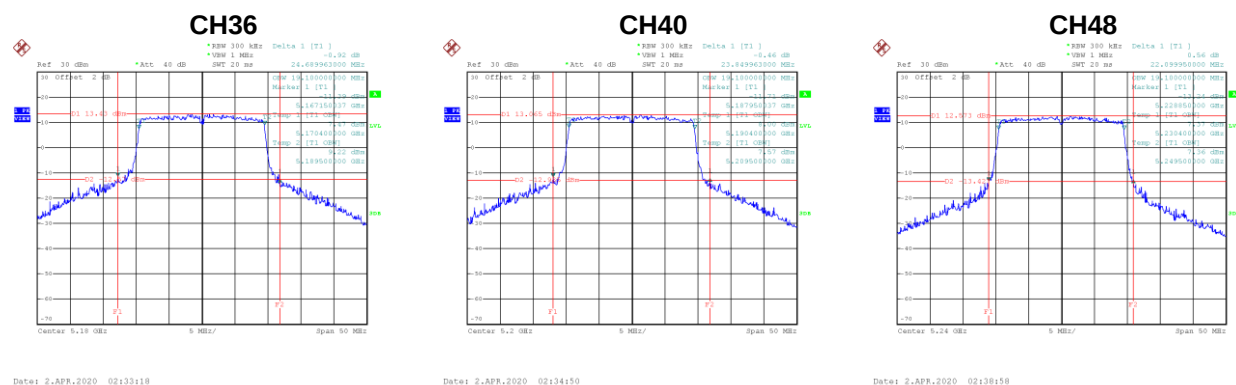


Test Mode	UNII-2A_TX AX (HE20) Mode	RU configuration	242
-----------	---------------------------	------------------	-----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	21.69	19.00
60	5300	21.59	19.00
64	5320	21.79	19.00

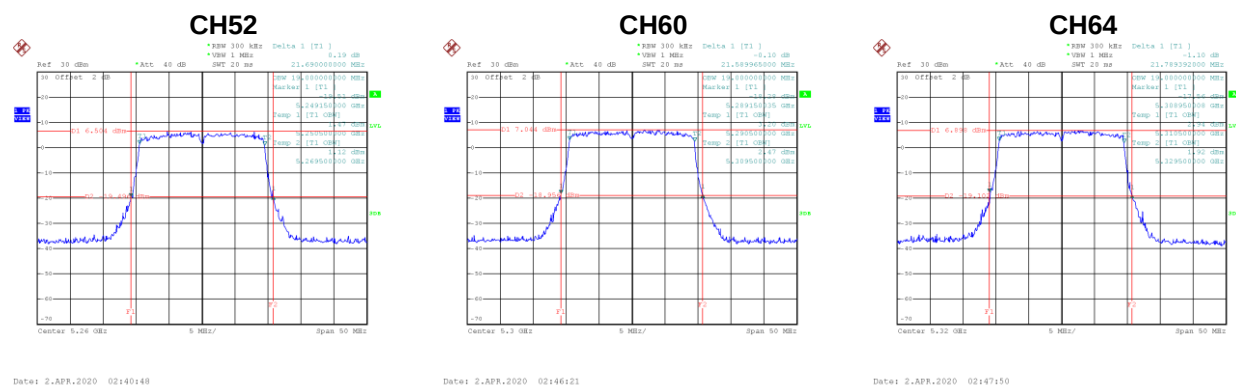


Test Mode	UNII-2C_TX AX (HE20) Mode	RU configuration	242
-----------	---------------------------	------------------	-----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	21.60	19.10
116	5580	21.35	19.00
140	5700	21.85	19.10

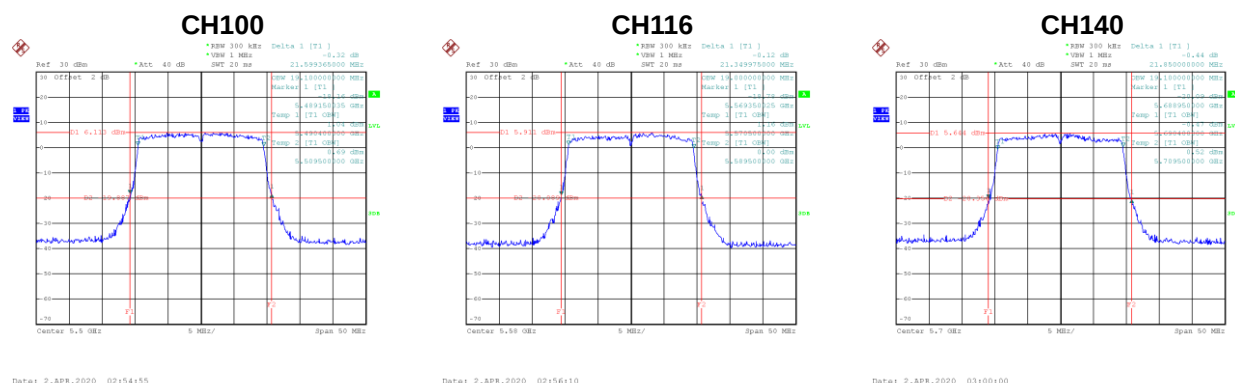


Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	242
-----------	--------------------------	------------------	-----

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	18.99	500	Complies
157	5785	18.81	500	Complies
165	5825	19.00	500	Complies

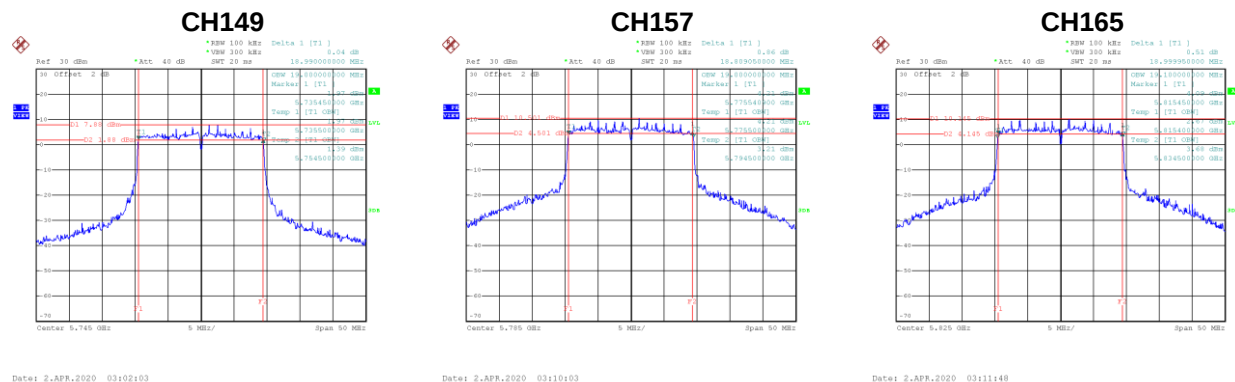


Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	242
-----------	--------------------------	------------------	-----

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
149	5745	19.00
157	5785	19.10
165	5825	19.10

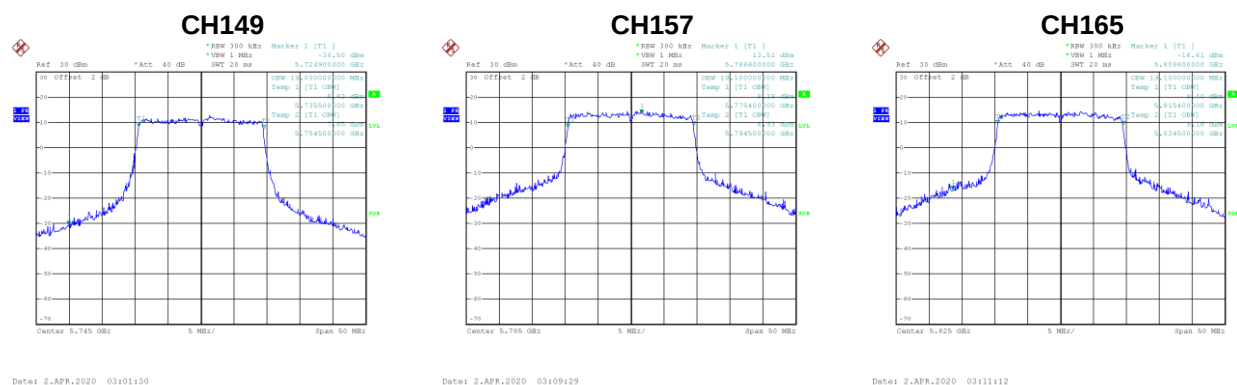

Test Mode	UNII-1_TX AX (HE40) Mode	RU configuration	26
-----------	--------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	59.99	39.00
46	5230	42.20	38.80

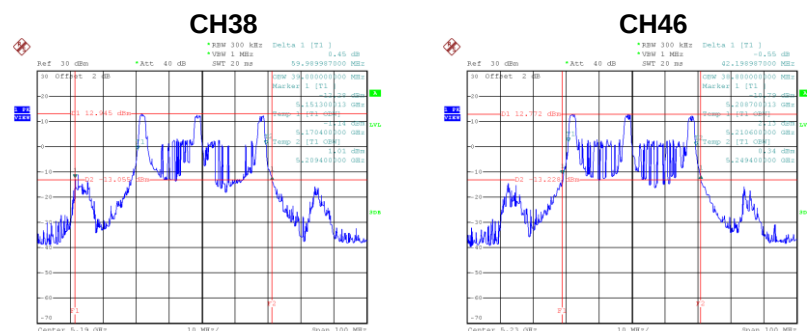


Date: 2.APR.2020 20:14:47

Date: 2.APR.2020 20:16:33

Test Mode	UNII-2A_TX AX (HE40) Mode	RU configuration	26
-----------	---------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
54	5270	42.80	38.80
62	5310	42.70	38.80

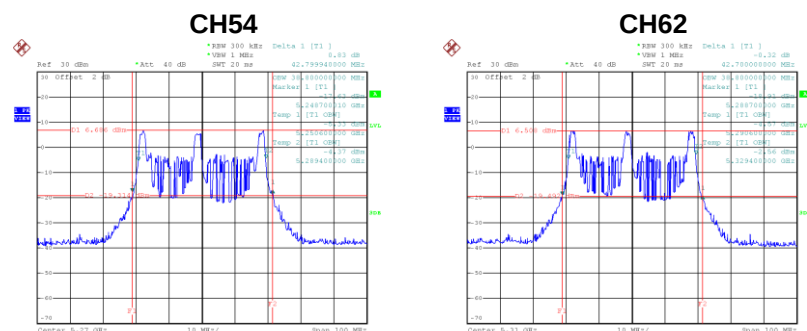


Date: 2.APR.2020 20:18:13

Date: 2.APR.2020 20:20:26

Test Mode	UNII-2C_TX AX (HE40) Mode	RU configuration	26
-----------	---------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
102	5510	42.20	38.80
110	5550	43.10	38.80
134	5670	42.90	38.80

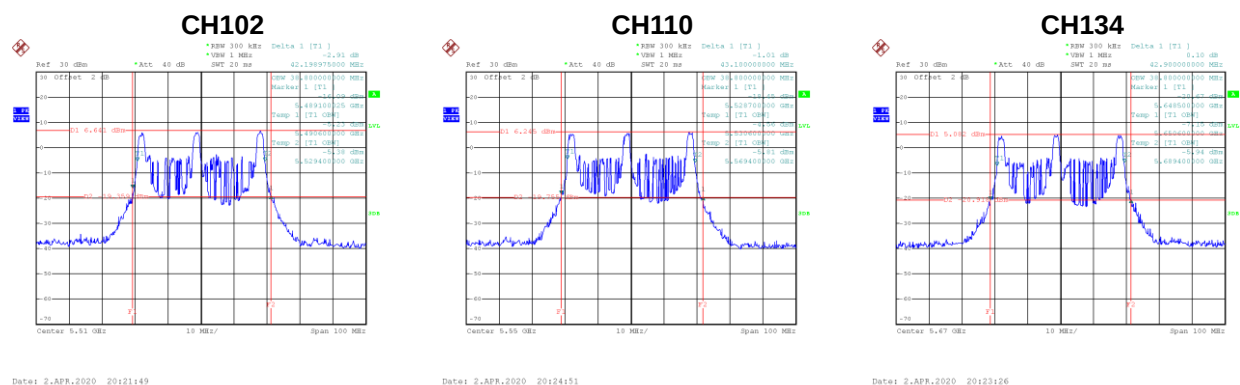


Date: 2.APR.2020 20:21:49

Date: 2.APR.2020 20:24:51

Date: 2.APR.2020 20:23:26

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	26
-----------	--------------------------	------------------	----

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	38.21	500	Complies
159	5795	38.10	500	Complies

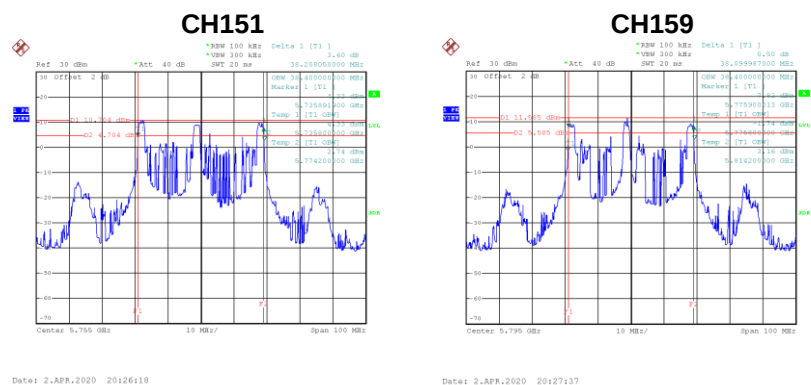


Date: 2.APR.2020 20:26:18


Date: 2.APR.2020 20:27:37

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	26
-----------	--------------------------	------------------	----

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
151	5755	39.60
159	5795	39.80

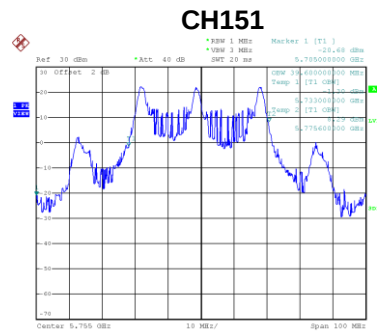


Date: 2.APR.2020 20:25:29

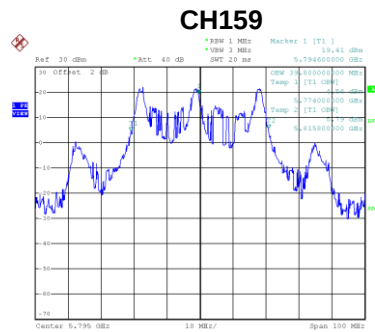

Date: 2.APR.2020 20:26:46


Test Mode	UNII-2C_TX AX (HE40) Mode	RU configuration	52
-----------	---------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
102	5510	43.79	38.40
110	5550	43.70	38.40
134	5670	43.01	38.40

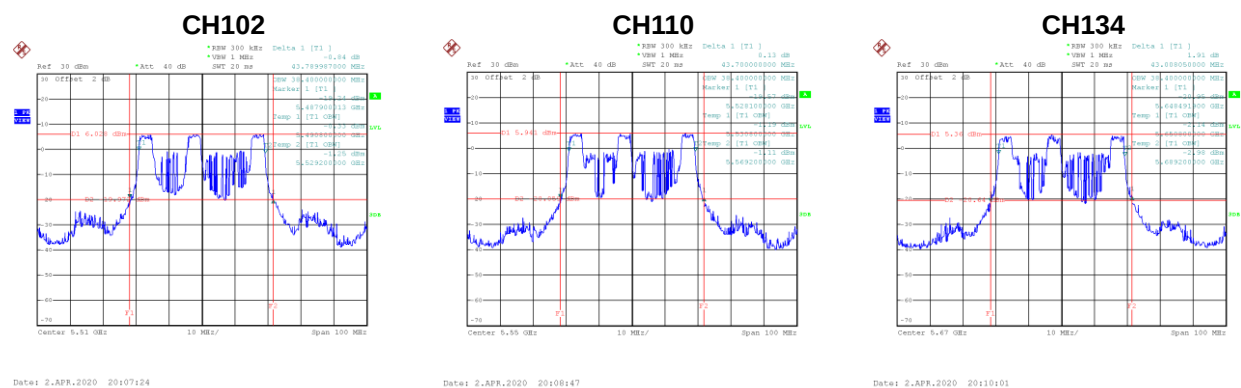

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	52
-----------	--------------------------	------------------	----

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	38.10	500	Complies
159	5795	38.20	500	Complies

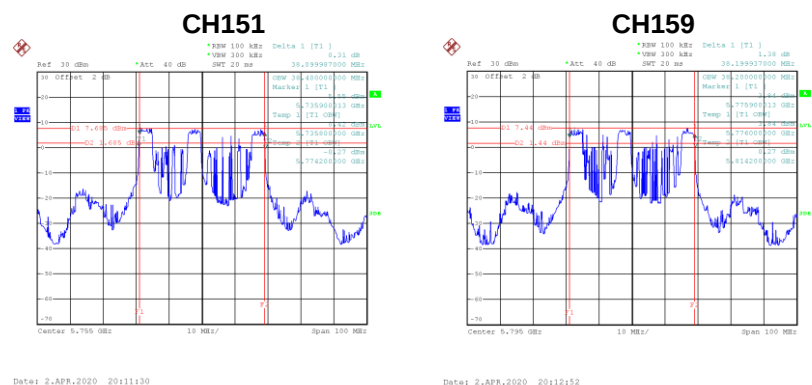

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	58.19	38.20
46	5230	44.30	38.00




Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
54	5270	44.19	38.00
62	5310	43.80	38.00




Test Mode	UNII-2C_TX AX (HE40) Mode	RU configuration	106
-----------	---------------------------	------------------	-----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
102	5510	43.59	38.00
110	5550	43.91	38.00
134	5670	43.60	38.00

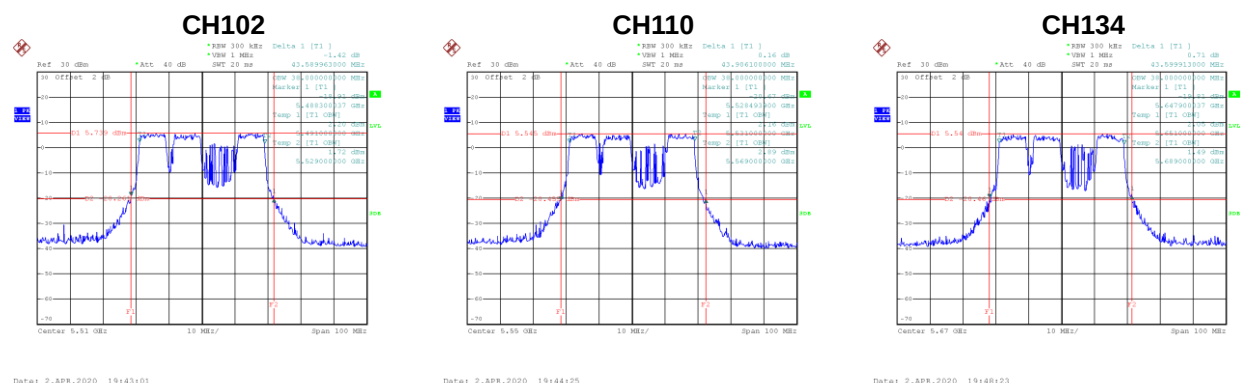


Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	106
-----------	--------------------------	------------------	-----

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	38.20	500	Complies
159	5795	38.10	500	Complies

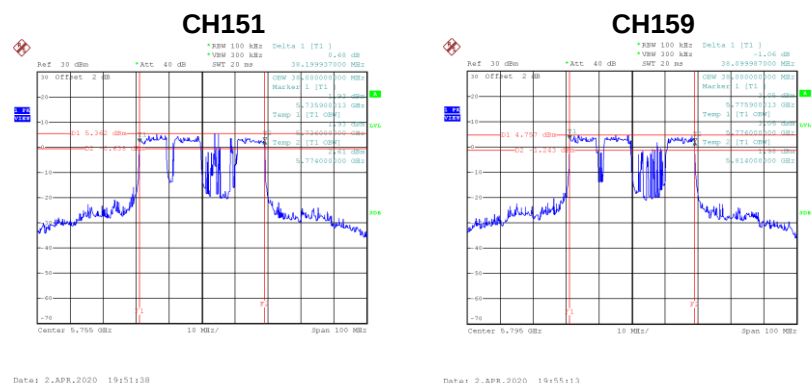


Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	106
-----------	--------------------------	------------------	-----

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
151	5755	39.40
159	5795	39.60

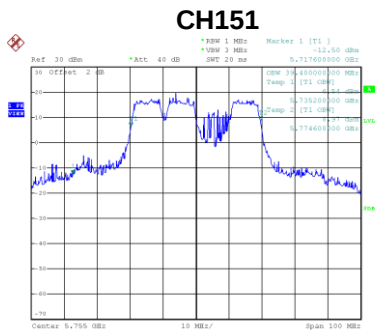

Date: 2.APR.2020 19:50:48

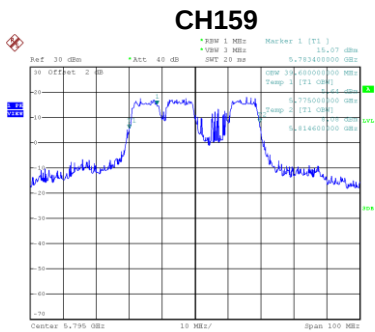


Date: 2.APR.2020 19:54:22

Test Mode	UNII-1_TX AX (HE40) Mode	RU configuration	242
-----------	--------------------------	------------------	-----


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	75.70	38.60
46	5230	69.20	38.20

CH38

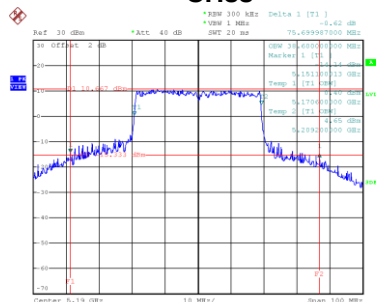

Date: 2.APR.2020 19:16:03

CH46

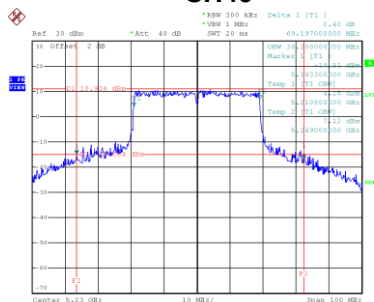


Date: 2.APR.2020 19:17:25

Test Mode	UNII-2A_TX AX (HE40) Mode	RU configuration	242
-----------	---------------------------	------------------	-----


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
54	5270	47.39	38.00
62	5310	47.30	38.00

CH54

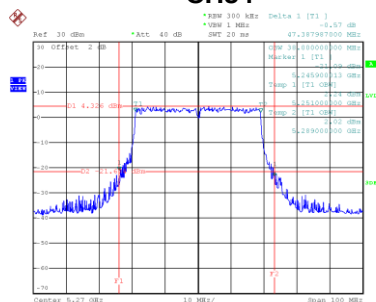

Date: 2.APR.2020 19:19:57


CH62

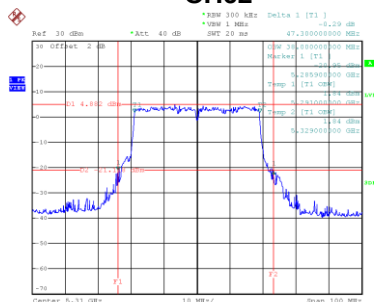

Date: 2.APR.2020 19:21:19


Test Mode	UNII-2C_TX AX (HE40) Mode	RU configuration	242
-----------	---------------------------	------------------	-----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
102	5510	47.70	38.00
110	5550	47.70	38.00
134	5670	46.60	38.00

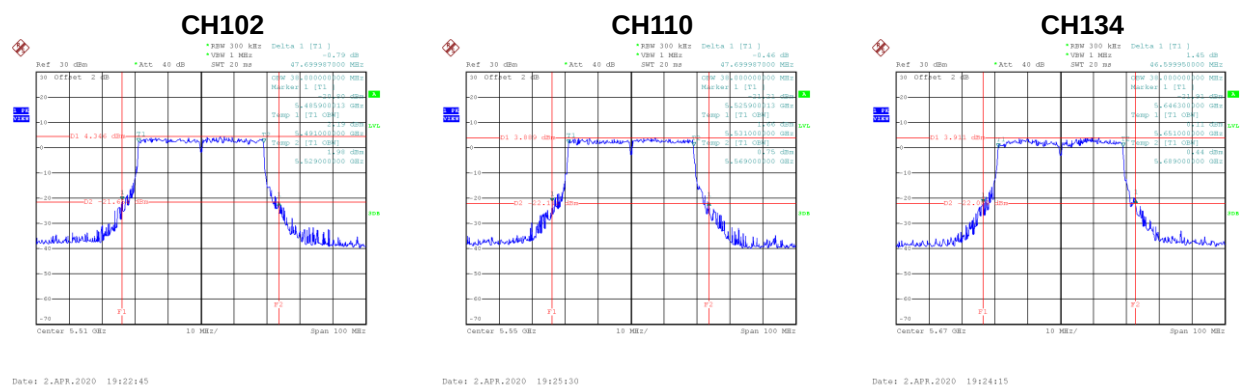


Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	242
-----------	--------------------------	------------------	-----

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	38.30	500	Complies
159	5795	38.20	500	Complies

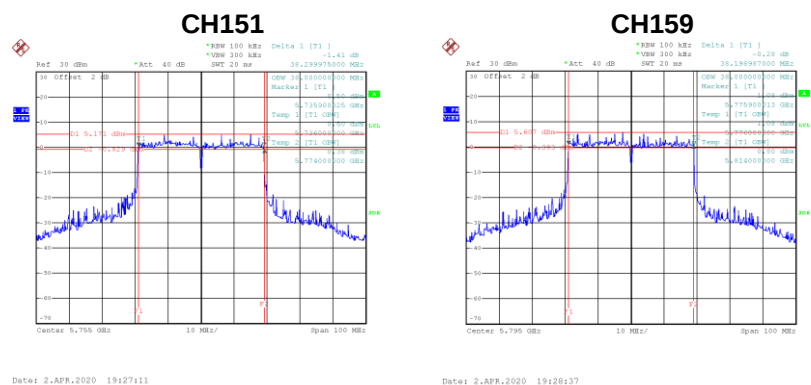


Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	242
-----------	--------------------------	------------------	-----

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
151	5755	39.00
159	5795	39.00

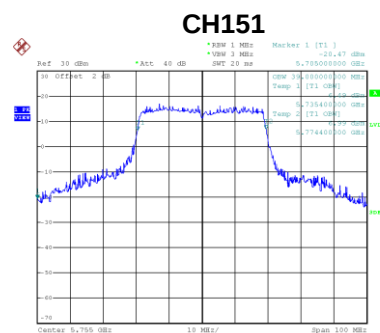

Date: 2.APR.2020 19:26:21

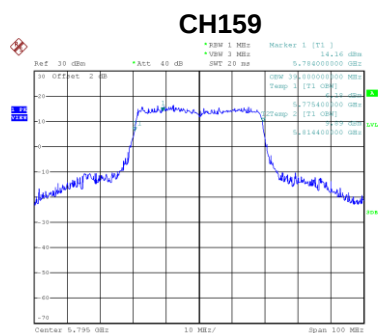

Date: 2.APR.2020 19:27:46

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	43.81	38.00
46	5230	40.80	37.80




Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
54	5270	41.10	37.80
62	5310	40.79	38.00




Test Mode	UNII-2C_TX AX (HE40) Mode	RU configuration	484
-----------	---------------------------	------------------	-----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
102	5510	40.50	38.00
110	5550	40.70	37.60
134	5670	40.99	37.80

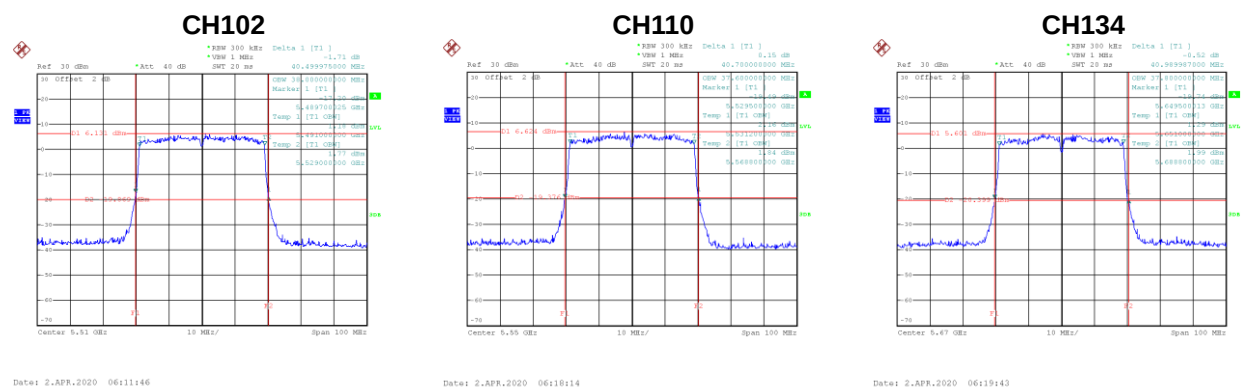


Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	484
-----------	--------------------------	------------------	-----

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	36.99	500	Complies
159	5795	38.10	500	Complies

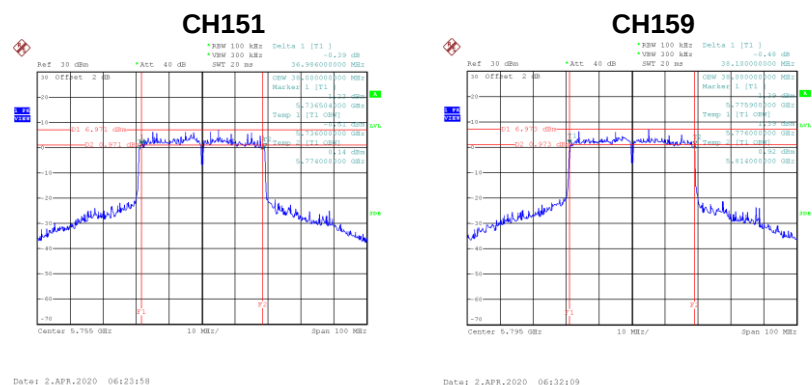

Test Mode	UNII-2C_TX AX (HE80) Mode	RU configuration	26
-----------	---------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
106	5530	87.20	80.80
122	5610	85.59	81.20

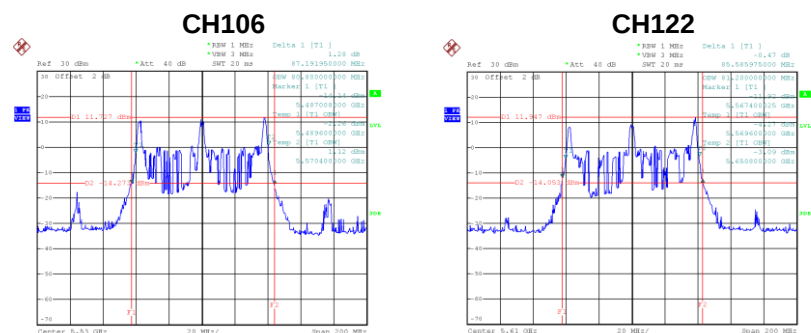


Date: 2.APR.2020 20:54:43

Date: 2.APR.2020 20:55:58

Test Mode	UNII-3_TX AX (HE80) Mode	RU configuration	26
-----------	--------------------------	------------------	----


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	78.60	500	Complies

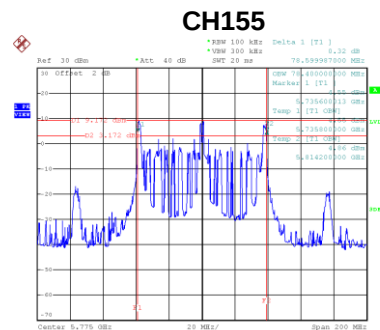

Date: 2.APR.2020 20:57:53

Test Mode	UNII-3_TX AX (HE80) Mode	RU configuration	26
-----------	--------------------------	------------------	----


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
155	5775	82.00

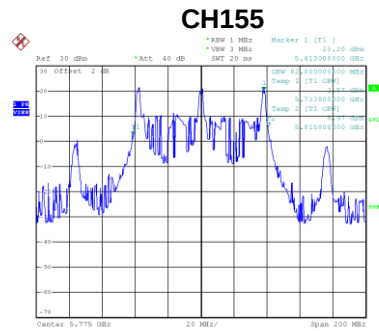

Date: 2.APR.2020 20:57:11

Test Mode	UNII-1_TX AX (HE80) Mode	RU configuration	52
-----------	--------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	151.40	81.20

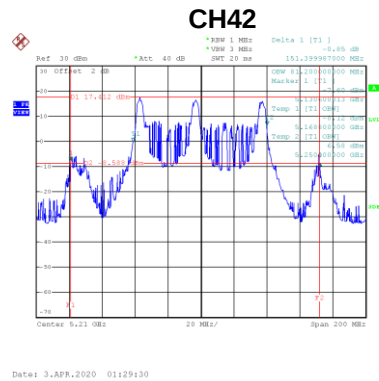

Test Mode	UNII-2A_TX AX (HE80) Mode	RU configuration	52
-----------	---------------------------	------------------	----

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
58	5290	88.79	80.40

