



849 NW State Road 45
Newberry, FL 32669 USA
Phone: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15 B SUBPART B RECEIVER TEST REPORT

Applicant	SUPERWINCH, LLC
Address	359 LAKE ROAD DAYVILLE CT 06241
FCC ID	QUUSWRX01
Model	98-40299
Product Description	RECEIVER
Date Sample Received	12/21/2011
Date Tested	01/03/2012
Tested By	JOE SCOGLIO
Approved By	MARIO R. DE ARANZETA
Report Number	3037AUT11TestReport_Certification.pdf
Test Results	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01

TABLE OF CONTENTS

GENERAL REMARKS.....	3
REPORT SUMMARY	4
TEST ENVIRONMENT.....	4
TEST SETUP SUMMARY.....	4
DUT SPECIFICATION	5
TEST EQUIPMENT LIST.....	6
TEST PROCEDURES	7
RADIATED SPURIOUS EMISSIONS.....	8
POWER LINE CONDUCTED INTERFERENCE.....	9
RADIATED EMISSIONS TEST SETUP PHOTO	10

APPLICANT: SUPERWINCH, LLC
 FCC ID: QUUSWRX01
 REPORT: O:\S\SUPERWINCH\3037AUT11\3037AUT11TestReport_Certification.DOC

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

- ☒ fulfill the general approval requirements as identified in this test report
☐ not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 01/17/2012

APPLICANT: SUPERWINCH, LLC
FCC ID: QUUSWRX01
REPORT: O:\S\SUPERWINCH\3037AUT11\3037AUT11TestReport_Certification.DOC

REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	Pt 15.109, Pt 15.107, ANSI C63.4: 2003

TEST ENVIRONMENT

Test Facility	Timco Engineering, Inc. 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition in the laboratory	Temperature: 26°C Relative humidity: 50%

TEST SETUP SUMMARY

Test Setup Diagram/Description	The DUT was placed on the turntable per setup per ANSI C63.4: 2003. A test set up photo is provided for clarification.
Deviation from the standard/procedure	No deviation
Modification of DUT	No modification

APPLICANT: SUPERWINCH, LLC
 FCC ID: QUUSWRX01
 REPORT: O:\S\SUPERWINCH\3037AUT11\3037AUT11TestReport_Certification.DOC

DUT SPECIFICATION

DUT Description	RECEIVER
FCC ID	QUUSWRX01
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz
	<input type="checkbox"/> DC Power
	<input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input checked="" type="checkbox"/> Portable
Laboratory Test Conditions	Temperature: 26°C Humidity: 55%
Modifications to DUT:	<input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (explanation below)

APPLICANT: SUPERWINCH, LLC
 FCC ID: QUUSWRX01
 REPORT: O:\S\SUPERWINCH\3037AUT11\3037AUT11TestReport_Certification.DOC

TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/10/10	5/10/12
AC Voltmeter	HP	400FL	2213A14499	CAL 6/12/11	6/12/13
Antenna: Active Loop	ETS-Lindgren	6502	00062529	CAL 9/23/10	9/23/12
Frequency Counter	HP	5385A	2730A03025	CAL 8/17/11	8/17/13
Hygro-Thermometer	Extech	445703	0602	CAL 6/15/11	6/15/13
Modulation Analyzer	HP	8901A	3435A06868	CAL 7/18/11	7/18/13
Digital Multimeter	Fluke	FLUKE-77	35053830	CAL 9/9/11	9/9/13
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 10/28/11	10/28/13
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 10/28/11	10/28/13
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 10/28/11	10/28/13
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 10/28/11	10/28/13
Antenna	Electro metrics	LPA-25	1122	5/04/2011	5/04/2013

APPLICANT: SUPERWINCH, LLC
 FCC ID: QUUSWRX01
 REPORT: O:\S\SUPERWINCH\3037AUT11\3037AUT11TestReport_Certification.DOC

TEST PROCEDURES

Power line conducted Emission: The test procedure used was ANSI C63.4-2003. The spectrum was scanned from 0.15 to 30 MHz.

Radiation Interference: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The video bandwidth was always greater than or equal to the RBW.

The frequency was scanned from 30 MHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The DUT was measured in three (3) orthogonal planes when necessary.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dBμV	+ 10.36 dB/m	+0.40 dB	=30.36 dBμV/m @ 3m

ANSI C63.4-2003 Measurement Procedures: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

ANSI STANDARD C63.4-2003 12.1.1.1 SUPERREGENERATIVE RECEIVER: A Signal Generator was set to the unit under test operating frequency. An un-Modulated continuous wave (CW) signal was radiated at the super regenerative receiver operating frequency to cohere the characteristic broadband emissions from the receiver.

APPLICANT: SUPERWINCH, LLC
 FCC ID: QUUSWRX01
 REPORT: O:\S\SUPERWINCH\3037AUT11\3037AUT11TestReport_Certification.DOC

RADIATED SPURIOUS EMISSIONS

Rules Part No.: 15.109

Requirements:

Frequency MHz	Limits
30 – 88	40.0 dB μ V/m measured @ 3 meters
88 – 216	43.5 dB μ V/m measured @ 3 meters
216 – 960	46.0 dB μ V/m measured @ 3 meters
Above 960	54.0 dB μ V/m measured @ 3 meters

Test Data:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m	Margin dB
433.9	444.60	4.7	V	1.24	17.55	23.49	22.51
433.9	444.60	5.0	H	1.24	17.55	23.79	22.21
433.9	889.20	3.5	V	1.94	23.39	28.83	17.17
433.9	889.20	4.9	H	1.94	23.39	30.23	15.77

APPLICANT: SUPERWINCH, LLC
 FCC ID: QUUSWRX01
 REPORT: O:\S\SUPERWINCH\3037AUT11\3037AUT11TestReport_Certification.DOC

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.107


Requirements:

Frequency (MHz)	Quasi Peak Limits (dB μ V)	Average Limits (dB μ V)
0.15 – 0.5	66 – 56 *	56 – 46 *
0.5 – 5.0	56	46
5.0 – 30	60	50
* Decrease with logarithm of frequency		

Test Data: Not applicable. Battery operated device.

APPLICANT: SUPERWINCH, LLC
FCC ID: QUUSWRX01
REPORT: O:\S\SUPERWINCH\3037AUT11\3037AUT11TestReport_Certification.DOC

RADIATED EMISSIONS TEST SETUP PHOTO

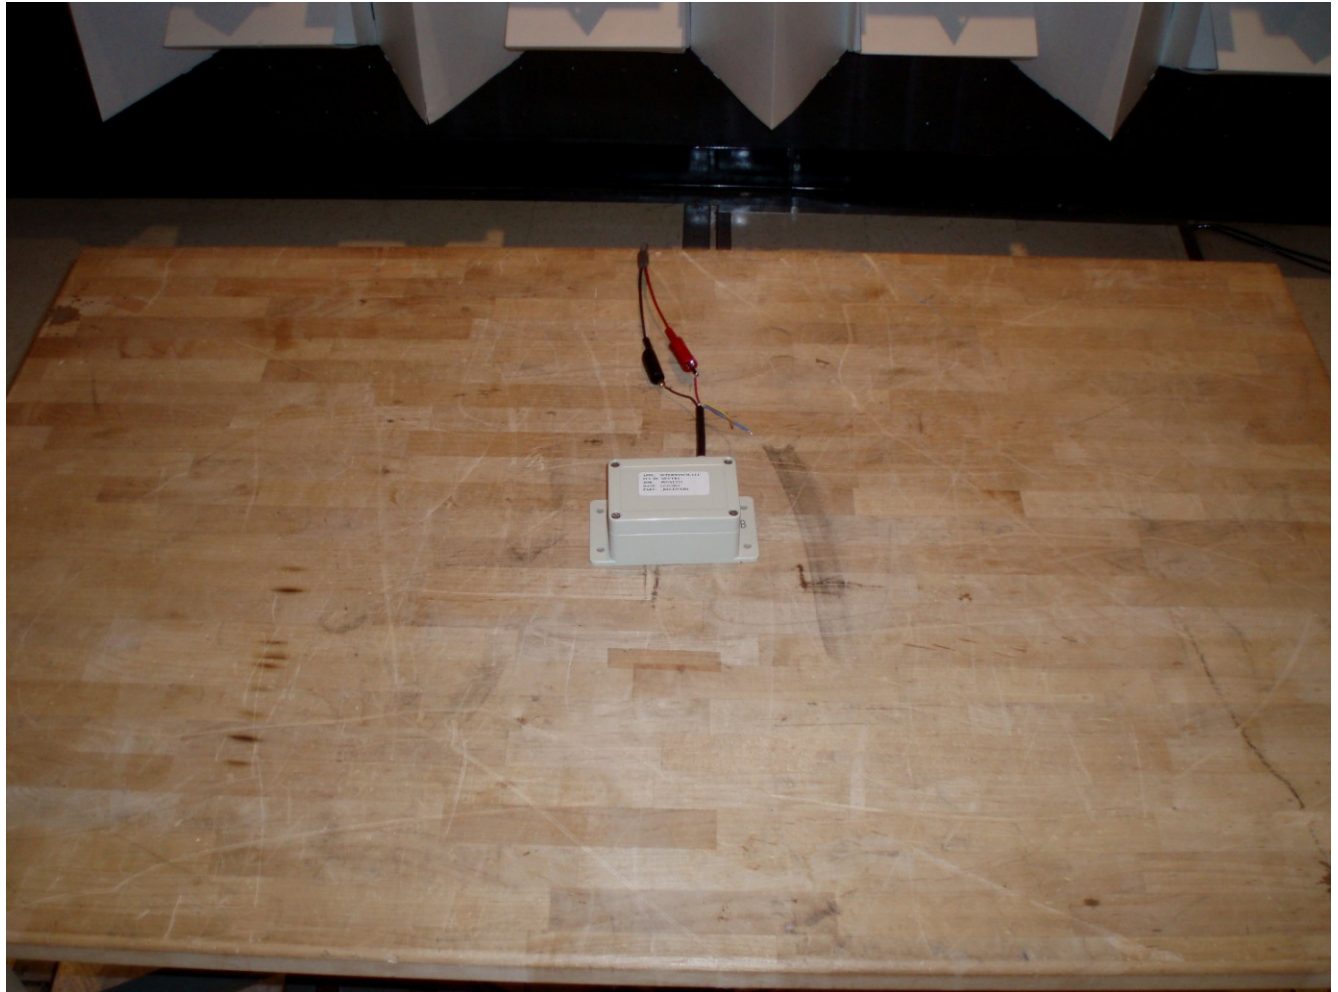

APPLICANT: SUPERWINCH, LLC
FCC ID: QUUSWRX01
REPORT: O:\S\SUPERWINCH\3037AUT11\3037AUT11TestReport_Certification.DOC