

Ericsson AB
Anders Karlsson
BURA DURA RP QRM
Torshamnsgatan 21
164 80 Stockholm**Radio measurements on AIR 5322 B261 with
FCC ID TA8AKRD900100**

Rev1 2022-10-20: Frequency stability added

Product name: AIR 5322 B261

Product number: KRD 901 100/2 and KRD 901 100/5

**RISE Research Institutes of Sweden AB
Vehicles and Automation - EMC-IKT**

Performed by

Examined by

Tomas Lennhager

Daniel Lundgren

RISE Research Institutes of Sweden AB

Postal address

Box 857
SE-501 15 BORÅS
Sweden

Office location

Brinellgatan 4
SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00
+46 33 13 55 02
info@ri.seThis report may not be reproduced other than in full, except
with the prior written approval of the issuing laboratory.Accred. No. 1002
Testing
ISO/IEC 17025

Summary	3
Description of the test object	4
Purpose of test.....	5
Operation modes during measurements	5
Measurements	5
References	6
RISE Measurement equipment	7
EAB Measurement equipment	8
Uncertainties	8
Reservation	8
Delivery of test object	8
Manufacturer's representative.....	8
Test engineers	8
Test participant(-s)	8
Test frequencies used for radiated measurements.....	9
Test setup: radiated measurements.....	10
RF power output measurements according to CFR 47 §30.202	12
Test set-up and procedure	12
Results	14
Limits	17
Occupied bandwidth measurements according to CFR47 §2.1049	18
Test set-up and procedure	18
Results.....	18
Field strength of spurious radiation measurements according to CFR 47 §30.203	22
Rise Measurement equipment.....	25
EAB Measurement equipment	25
Results.....	26
Limits	28
Frequency stability measurements according to 47 CFR §2.1055.....	60
Test set-up and procedure	60
Results.....	61
Remark	61
Photos of test object	62

Summary

Standard Listed part of	Compliant
FCC CFR 47 part 30 Subpart C	
2.1046/ 30.202 RF power output	Yes
2.1049 Occupied bandwidth	Yes
2.1053/ 30.203 Field strength of spurious radiation	Yes
2.1055 Frequency stability	Yes

Description of the test object

Equipment:	Radio equipment:, AIR 5322 B261 Product number: KRD 901 100/2 (DC powered) and KRD 901 100/5 (AC powered) FCC ID: TA8AKRD901100
Hardware revision state:	R1A
Tested configuration:	3GPP NR TDD
Frequency range:	TX/ RX: 27500 – 28350 MHz
No of supported beams:	Config mode 0: 4 beams in 2 orthogonal polarizations each, 8 beams in total. Config mode 1: 2 beams in 2 orthogonal polarizations each, 4 beams in total. Config mode 2: 1 beam in 2 orthogonal polarizations each, 2 beams in total.
Operating bandwidth:	Config mode 0: Four segments of 200MHz Config mode 1: Two segments of 400 MHz Config mode 2: One segment of 400 MHz
Nominal Output power (EIRP):	59 dBm/ beam and polarization config mode 2 53 dBm/ beam and polarization config mode 1 47 dBm/ beam and polarization config mode 0
RF configurations:	TX Diversity, SU and MU MIMO up to 2 layers 1x(2x2), Contiguous Spectrum (CS) and Non-Contiguous spectrum (NCS), Carrier Aggregation (CA) intra-band supported
Antenna beam steering:	Azimuth ± 60 deg, elevation ± 15 deg
Channel bandwidth(s)/ Sub Carrier Spacing:	50 MHz and 100 MHz/ 120 kHz
Modulations:	QPSK, 16QAM and 64QAM
Emission designators:	46M2W7D and 95M2W7D
Emission designators Carrier Aggregation:	Maximum 793MW7D (8x 100 MHz)
RF power Tolerance:	+2.4/ -2.0 dB
CPRI Speed	10.1 Gbps

The information above is supplied by the manufacturer.

Purpose of test

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable parts of FCC CFR 47 Part 30.

Operation modes during measurements

The measurements were performed with the test object transmitting test models as defined in 3GPP TS 38.141-2. Test model NR-FR2 TM 1.1 is used to represent QPSK, test model NR-FR2 TM 3.2 to represent 16QAM, test model NR-FR2 TM 3.1 to represent 64QAM modulation

The settings below were deemed representative for worst case settings, for all traffic scenarios when settings with different modulations and RF configurations was found to represent worst case settings.

MIMO mode, NR-FR2 TM1.1, QPSK with the beams locked in boresight. All measurements were performed with the test object configured for maximum transmit power.

The measurement shall be done during active part of transmission, or if the measurement is performed with constant duty cycle <98%, the result shall be adjusted for the duty cycle according to ANSI C63.26 5.2.4.3.4. The duty cycle was measured to 74% and to compensate for this 1.31 dB was added to the test results.

Measurements

The test object was powered with 120 VAC 60 Hz/ -48 VDC by an external power supply. Additional connections are documented in the setup drawings for radiated measurements. If not otherwise stated all measurements were performed on the DC powered version.

RISE 10 MHz reference was connected to the signal analyser as external reference, during all measurements.

Far field distance for power, OBW and Band edge measurements is 4.9 m, based on the EUT antenna dimensions and the highest transmitter frequency (28.35 GHz).

Far field distances for OOB emissions is based on the measurement antenna dimension and highest frequency in the measure frequency range:

Frequency range [GHz]	Far field distance [m]	Measured distance [m]
18 – 26.5	0.73	5
26.5 – 40	0.49	5
40 – 60	0.34	3
60 – 80	0.18	1
80 – 100	0.16	1

Formula for far field distance calculation:

$$R = 2x D^2 / \lambda$$

References

Measurements were done according to relevant parts of the following documents:

CFR 47 part 30, May 2020

ANSI C63.26-2015

KDB 842590 D01 Upper Microwave Flexible Use Service v01r01

3GPP TS 38.141-2 V15.5.0 (2020-03)

3GPP TR 37.842 V13.3.0 (2020-01)

RISE Measurement equipment

	Calibration Due	RISE number
Anechoic chamber, Hertz	2020-11	BX50194
R&S FSW 43	2021-07	902 073
R&S ESU 40	2021-07	901 385
R&S ZNB 40	2021-07	BX50051
RF Cable VNA-calibration	2021-01	BX50189
RF Cable VNA-calibration	2021-01	BX50190
RF Cable	2021-05	BX50236
RF Cable	2020-10	BX50192
RF Cable	2021-01	BX81431
RF Cable	2021-05	BX81423
RF Cable	2020-10	503 681
RF Cable FSW-B21	2020-10	BX62069
RF Cable FSW-B21	2020-10	BX62073
Bilog antenna Schaffner 6143A	2021-08	504 079
Flann STD Gain Horn Antenna 20240-20	-	BX92412
Flann STD Gain Horn Antenna 22240-20	-	BX92413
Flann STD Gain Horn Antenna 24240-20	-	BX92414
Flann STD Gain Horn Antenna 26240-20	-	BX92416
Flann STD Gain Horn Antenna 27240-20	-	BX92417
Mixer FS-Z60	2023-08	BX90566
Mixer FS-Z90	2021-01	BX90567
Mixer FS-Z110	2021-07	BX81425
Miteq, Low Noise Amplifier	2021-01	503 278
EMCO Horn Antenna 3115	2021-07	502 175
EMCO Horn Antenna 3115	2022-02	902 212
EMCO Horn Antenna 3116	2021-07	503 279
µComp Nordic, Low Noise Amplifier	2021-01	901 544
Temperature and humidity meter, Testo 615	2021-06	503 498

Frequency stability 2022-02

	Calibration Due	RISE number
R&S FSW 43	2023-01	902 073
RF Cable	2022-04	BX50236
EMCO Horn Antenna 3116	2024-06	503 279
Temperature Chamber	-	503 360
Testo 635, temperature and humidity meter	2022-07	504 203
Multimeter Fluke 87	2022-05	502 190

Frequency stability 2022-06

	Calibration Due	RISE number
R&S FSW 43	2023-01	902 073
RF Cable	2023-04	BX50236
EMCO Horn Antenna 3116	2024-06	503 279
Temperature Chamber	-	503 360
Testo 635, temperature and humidity meter	2023-06	504 203
Multimeter Fluke 87	2023-05	502 190

EAB Measurement equipment

Calibrated at RISE before testing.

	Calibration Due	S/N
SWH010 HPF 30-40 GHz	2021-06	ST010619225
SSL036 LPF 26.5 GHz	2021-06	ST012717003

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered: 2020-09-04

Manufacturer's representative

Mikael Jansson, Ericsson AB.

Test engineers

Tomas Lennhager and Ermin Pasalic, RISE

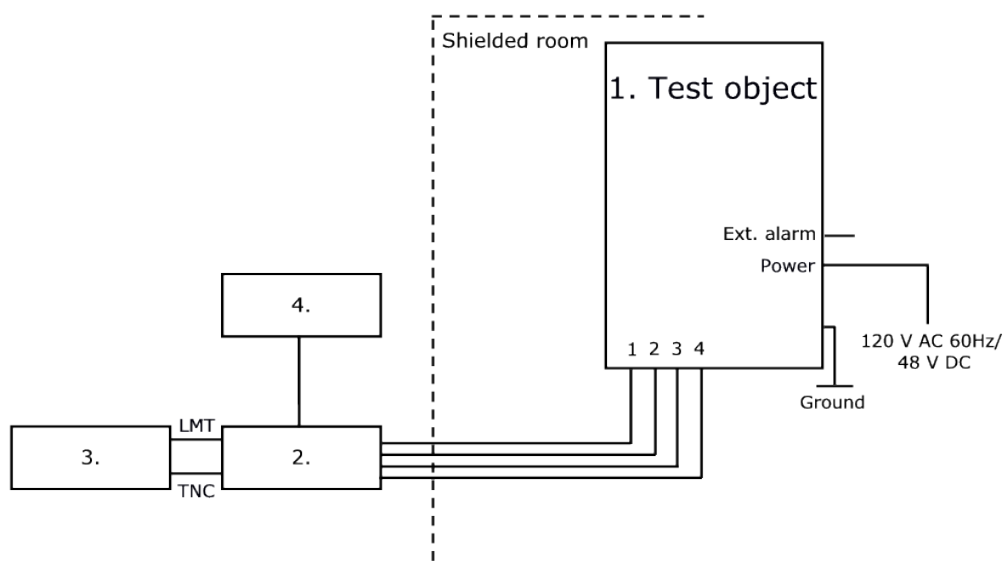
Test participant(-s)

None

Test frequencies used for radiated measurements

nr-arfcn:	Frequency Hor/ Ver [MHz]	Symbolic name	Config mode	Comment
2071249	27525.00	BL ₅₀	2	50 MHz BW, TX bottom Lower block
2077499	27900.00	TL ₅₀	2	50 MHz BW, TX Top Lower block
2078339	27950.04	BH ₅₀	2	50 MHz BW, TX Bottom High block
2084581	28324.92	TH ₅₀	2	50 MHz BW, TX Top High block
2071679	27550.08	BL ₁₀₀	2	100 MHz BW, TX bottom Lower block
2077081	27874.92	TL ₁₀₀	2	100 MHz BW, TX Top Lower block
2078749	27975.00	BH ₁₀₀	2	100 MHz BW, TX Bottom High block
2084165	28299.96	TH ₁₀₀	2	100 MHz BW, TX Top High block
2071667 2073333	27550.08 27650.04	BL ₂₁₀₀	2	100 MHz BW, TX 2 carrier Bottom Lower band
2082499 2084165	28200.00 28299.96	TH ₂₁₀₀	2	100 MHz BW, TX 2 carrier Top High band
2071249 2072083 2077081	27525.00 27575.04 27874.92	BIM ₃₅₀	2	50 MHz BW, TX 3 carrier Bottom Lower block
2078749 2083749 2084581	27975.00 28275.00 28324.92	TIM ₃₅₀	2	50 MHz BW, TX 3 carrier Top High block
2071667 2073333 2074999 2076665	27550.08 27650.04 27750.00 27849.96	BL ₄₁₀₀	2	100 MHz BW, TX 4 carrier Bottom Lower block
2079165 2080831 2082499 2084165	27999.96 28099.92 28200.00 28299.96	TH ₄₁₀₀	2	100 MHz BW, TX 4 carrier Top High block
2071667 2073333 2074999 2076665 2079165 2080831 2082499 2084165	27550.08 27650.04 27750.00 27849.96 27999.96 28099.92 28200.00 28299.96	BT ₈₁₀₀	1	100 MHz BW, TX 8 carrier Bottom and Top block
2072083 2073749 2075415 2077083 2078749 2080415 2082083 2083749	27575.04 27675.00 27774.96 27875.04 27975.00 28074.96 28175.04 28275.00	M ₈₁₀₀	1	100 MHz BW, TX 8 carrier Middle
2071667 2073333 2074999 2076665 2078333 2079999 2082499 2084165	27550.08 27650.04 27775.00 27849.96 27950.04 28050.00 28200.00 28299.96	BMT	0	100 MHz BW, Tx 8 carrier Bottom Middle and Top block

Test setup: radiated measurements



Test object:

- | | |
|----|--|
| 1. | AIR 5322 B261, KRD 901 100/2, rev. R1A, s/n: E23B669845, DC version
AIR 5322 B261, KRD 901 100/5, rev. R1A, s/n: E23B679010, AC version
with FCC ID: TA8AKRD901100
Radio Software: CXP 203 0045/1, rev. R6A343

For Frequency stability test 2022-02
AIR 5322 B261, KRD 901100/2, rev. R1A, s/n: E23B669845, DC version
With Radio Software: CXP 203 0045/1, rev. R11C957

For Frequency stability test 2022-06
AIR 5322 B261, KRD 901 100/5, rev. R1A, s/n: E23B679010, AC version
With Radio Software: CXP 203 0045/1, rev. R11C957 |
|----|--|

Associated equipment:

2.	Testing Equipment: Baseband 6630, KDU 137 848/1, rev. R2F, s/n: E23A226857 with software: CXP9024418/15, rev. R17A80 For Frequency stability test 2022-02 and 2022-06 Baseband 6630, KDU 137 848/1, rev. R3C, s/n: E23B720982 with software: CXP9024418/15, rev. R47A306
----	---

Functional test equipment:

3.	Computer, HP ZBook, BAMS - 1001530471
4.	GPS Active Antenna, KRE 101 2082/1 GPS 02 01, NCD 901 41/1, rev. R1D, s/n: A401804384

Interfaces:

Power input configuration DC (KRD 901 100/2): -48 VDC	Power
Power input configuration AC (KRD 901 100/5): 120 VAC 60Hz	Power
EXT Alarm, shielded multi-wire	Signal
1, Optical Interface Link, single mode opto fibre	Signal
2, Optical Interface Link, single mode opto fibre	Signal
3, Optical Interface Link, single mode opto fibre	Signal
4, Optical Interface Link, single mode opto fibre	Signal
Ground wire	Ground

RF power output measurements according to CFR 47 §30.202

Date	Temperature	Humidity
2020-09-09	24 °C ± 3 °C	45 % ± 5 %
2020-09-10	23 °C ± 3 °C	21 % ± 5 %
2020-10-02	23 °C ± 3 °C	30 % ± 5 %

Test set-up and procedure

The test object was located in a anechoic chamber. The measuring antenna was aligned to the centre of the PAAM. A turn table was used to find the highest output power. A signal analyzer with the channel power function activated was used to measure the output power with the RMS detector activated. The bandwidth setting of the channel power function was set to 100 MHz.

A substitution measurement defined in 3GPP TR 37.842 chapter 10.3.1.1.2 was used to get the actual correction factor (Transducer factor A-D in the figure 1 below) with a Network analyzer (ZNB 40).

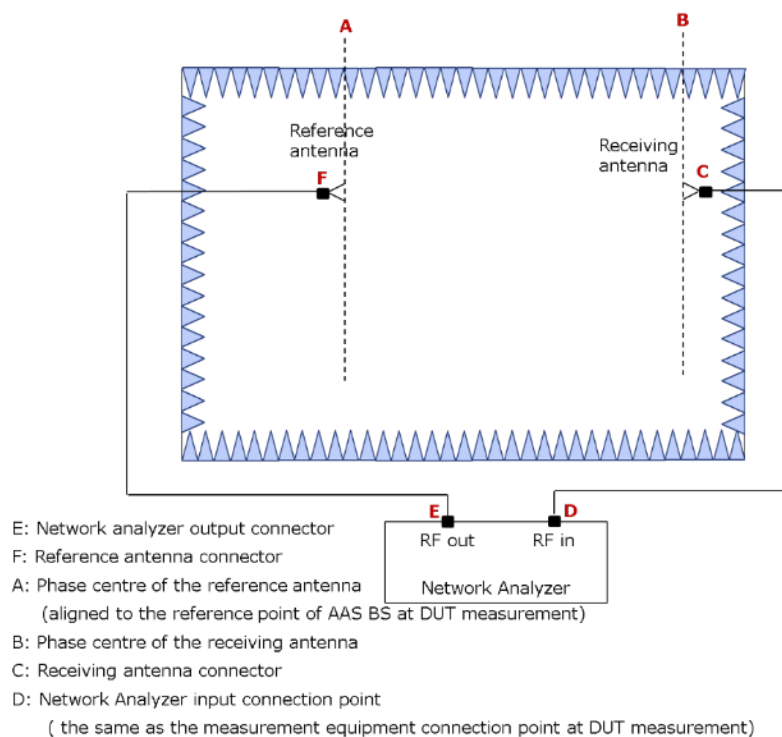


Figure 1: Indoor Anechoic Chamber calibration system setup for EIRP

Stage 1 - Calibration:

- 1) Connect the reference antenna and the receiving antenna to the measurement RF out port and RF in port of the network analyzer, respectively, as shown in figure 1.
- 2) Install the reference antenna with its *beam peak direction* and the height of its phase centre aligned with the receiving antenna.
- 3) Set the centre frequency of the network analyzer to the carrier centre frequency of the tested signal for EIRP measurement of the EUT and measure $LF_{EIRP, E \rightarrow D}$, which is equivalent to $20\log|S_{21}|$ (dB) obtained by the network analyzer:
 $LF_{EIRP, E \rightarrow D}$: Pathloss between E and D in figure 1.

- 4) Measure the cable loss, $LF_{EIRP, E \rightarrow F}$ between the reference antenna connector and the network analyzer connector:
 $LF_{EIRP, E \rightarrow F}$: Cable loss between E and F in figure 1.
- 5) Calculate the calibration value between A and D with the following formula:
 $L_{EIRP_cal, A \rightarrow D} = LF_{EIRP, E \rightarrow D} + G_{REF_ANT_EIRP, A \rightarrow F} - LF_{EIRP, E \rightarrow F}$.
 $L_{EIRP_cal, A \rightarrow D}$: Calibration value between A and D in figure 1. Was implemented in the spectrum analyzer as a transducer.
 $G_{REF_ANT_EIRP, A \rightarrow F}$: Antenna gain of the reference antenna.

Stage 2 - Measurement:

- 6) Uninstall the reference antenna and install the EUT with the manufacturer declared coordinate system reference point in the same place as the phase centre of the reference antenna. The manufacturer declared coordinate system orientation of the EUT is set to be aligned with the testing system.
- 7) Measure the mean power, $P_{R_EUT_EIRP, D}$, D in figure 1.
- 8) Calculate the EIRP with the following formula:

$$EIRP = P_{R_EUT_EIRP, D} + L_{EIRP_cal, A \rightarrow D}$$

Measurement equipment	RISE number
Anechoic chamber, Hertz	BX50194
R&S FSW 43	902 073
R&S ZNB 40	BX50051
EMCO Horn Antenna 3116	503 279
FLANN Std gain 22240-20	BX92413
RF Cable	BX81423
Testo 615, temperature and humidity meter	503 498

Measurement uncertainty: 3.3 dB

Results

Single carrier Config mode 2

Beam index 0 Boresight, Carrier Bandwidth 50 MHz, QPSK

Nominal rated output power (EIRP) per Beam: 59 dBm/ Polarization.

	Output power per 100 MHz, EIRP [RMS dBm] Vertical/ Horizontal
Symbolic name	Carrier A
BL ₅₀	59.58/ 59.35
TL ₅₀	59.24/ 58.96
BH ₅₀	59.42/ 59.05
TH ₅₀	59.42/ 58.85

Beam index 0 Boresight, Carrier Bandwidth 100 MHz, QPSK

Nominal rated output power (EIRP) per Beam: 59 dBm/ Polarization.

	Output power per 100 MHz, EIRP [RMS dBm] Vertical/ Horizontal
Symbolic name	Carrier A
BL ₁₀₀	59.60/ 59.48
TL ₁₀₀	59.00/ 58.77
BH ₁₀₀	59.36/ 58.95
TH ₁₀₀	59.43/ 58.89

2-Carrier Config mode 2

Beam index 0 Boresight, Carrier Bandwidth 100 MHz, QPSK
Nominal rated output power (EIRP) per Beam: 59 dBm/ Polarization.

	Output power per 100 MHz, EIRP [RMS dBm] Vertical/ Horizontal		
Symbolic name	Carrier A	Carrier A	Total (per 200 MHz)
BL2 ₁₀₀	56.59/ 55.88	57.08/ 56.66	59.86/ 59.30
TH2 ₁₀₀	56.49/ 55.61	56.49/ 55.81	59.50/ 58.73

4-Carrier Config mode 2

Beam index 0 Boresight, Bandwidth 100MHz, QPSK
Nominal rated output power (EIRP) per Beam: 59 dBm/ Polarization

	Output power per 100 MHz, EIRP [RMS dBm] Vertical/ Horizontal				
Symbolic name	Carrier A	Carrier B	Carrier C	Carrier D	Total (per 400 MHz)
BL4 ₁₀₀	54.01/ 52.82	53.91/ 53.10	54.11/ 53.57	53.98/ 53.29	60.03/ 59.22
TH4 ₁₀₀	53.91/ 52.57	53.76/ 52.75	53.94/ 53.20	53.68/ 53.00	59.84/ 58.91

8-Carrier Config mode 1

Beam index 0 Boresight, Carrier Bandwidth 50 MHz

Nominal rated output power (EIRP) per Beam: 53.0 dBm/ Polarization.

		Output power per 50 MHz, EIRP [RMS dBm] Vertical/ Horizontal									
		Beam 1					Beam 2				
Modulation	Symbolic name	A	B	C	D	Total Power Beam 1	E	F	G	H	Total power Beam 2
QPSK	M8 ₅₀	47.63/ 47.12	47.47/ 47.16	47.62/ 47.49	48.18/ 47.43	53.75/ 53.32	47.40/ 46.75	47.28/ 47.26	47.49/ 47.06	47.99/ 47.26	53.57/ 53.11

Beam index 0 Boresight, Carrier Bandwidth 100 MHz

Nominal rated output power (EIRP) per Beam: 53.0 dBm/ Polarization.

		Output power per 100 MHz, EIRP [RMS dBm] Vertical/ Horizontal									
		Beam 1					Beam 2				
Modulation	Symbolic name	A	B	C	D	Total Power Beam 1	E	F	G	H	Total power Beam 2
QPSK	BT8 ₁₀₀	48.33/ 47.38	47.85/ 47.76	48.17/ 47.86	48.22/ 47.58	54.17/ 53.67	47.73/ 47.26	47.72/ 47.09	47.89/ 47.31	47.68/ 47.39	53.78/ 53.28
QPSK	M8 ₁₀₀	48.47/ 47.47	47.91/ 47.74	47.94/ 47.70	48.04/ 47.39	54.12/ 53.60	47.61/ 47.26	47.74/ 47.23	47.93/ 47.47	47.78/ 47.56	53.78/ 53.40

8-Carrier Config mode 0

Beam index 0 Boresight, Carrier Bandwidth 100 MHz

Nominal rated output power (EIRP) per Beam: 47.0 dBm/ Polarization.

		Output power per 100 MHz, EIRP [RMS dBm] Vertical/ Horizontal					
		Beam 1			Beam 2		
Modulation	Symbolic name	A	B	Total Power Beam 1	C	D	Total power Beam 2
QPSK	BMT8 ₁₀₀	45.52/ 44.92	45.78/ 45.60	48.66/ 48.28	45.23/ 44.74	45.61/ 44.87	48.43/ 47.82
		Beam 3			Beam 4		
Modulation	Symbolic name	E	F	Total Power Beam 3	G	H	Total power Beam 4
QPSK	BMT8 ₁₀₀	45.28/ 44.69	45.78/ 44.94	48.55/ 47.83	44.95/ 44.69	44.86/ 44.18	47.92/ 47.45

Limits

CFR47 §30.202 Power limits.

- (a) For fixed and base stations operating in connection with mobile systems, the average power of the sum of all antenna elements is limited to an equivalent isotopically radiated power (EIRP) density of +75dBm/100 MHz. For channel bandwidths less than 100 MHz the EIRP must be reduced proportionally and linearly based on the bandwidth relative to 100 MHz.

Complies?	Yes
-----------	-----

Occupied bandwidth measurements according to CFR47 §2.1049

Date	Temperature	Humidity
2020-09-09	24 °C ± 3 °C	45 % ± 5 %
2020-09-10	23 °C ± 3 °C	21 % ± 5 %

Test set-up and procedure

The test object was located in a anechoic chamber. The measuring antenna was aligned to the centre of the of the PAAM. A turn table was used to find the highest output power. A signal analyzer with Peak detector and max hold was used to measure the OBW.

Measurement equipment	RISE number
Anechoic chamber, Hertz	BX50194
R&S FSW 43	902 073
R&S ZNB 40	BX50051
EMCO Horn Antenna 3116	503 279
FLANN Std gain 22240-20	BX92413
RF Cable	BX81423
Testo 615, temperature and humidity meter	503 498

Measurement uncertainty: 3.3 dB

Results

Single carrier, Config mode 2, Bandwidth: 50MHz Modulation: QPSK

Diagram	Symbolic name	Polarization	Occupied BW (99%) [MHz]
1.1	TL ₅₀	Hor	46.120
1.2	TL ₅₀	Ver	46.171

Single carrier, Config mode 2, Bandwidth: 100MHz Modulation: QPSK

Diagram	Symbolic name	Polarization	Occupied BW (99%) [MHz]
1.3	TL ₁₀₀	Hor	95.080
1.4	TL ₁₀₀	Ver	95.158

Carrier Aggregation, Config mode 1, Bandwidth: 8x 100MHz, Modulation: QPSK

Diagram	Symbolic name	Polarization	Occupied BW (99%) [MHz]
1.5	M8 ₁₀₀	Hor	791.521
1.6	M8 ₁₀₀	Ver	793.354

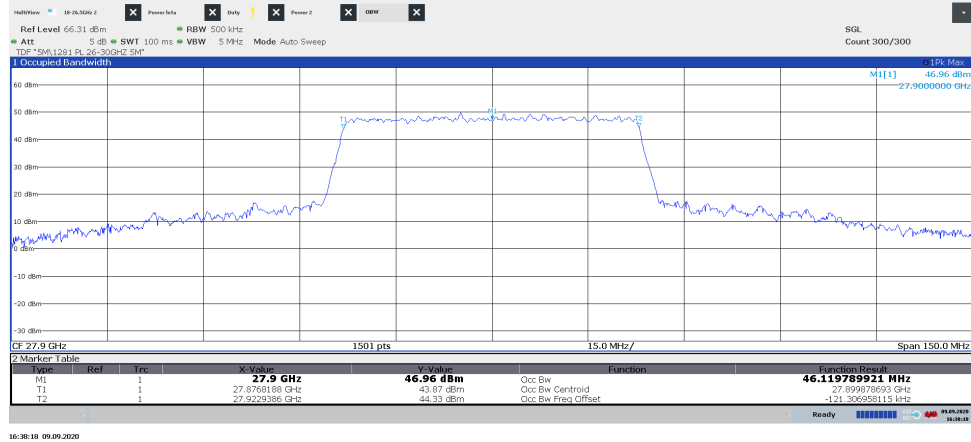
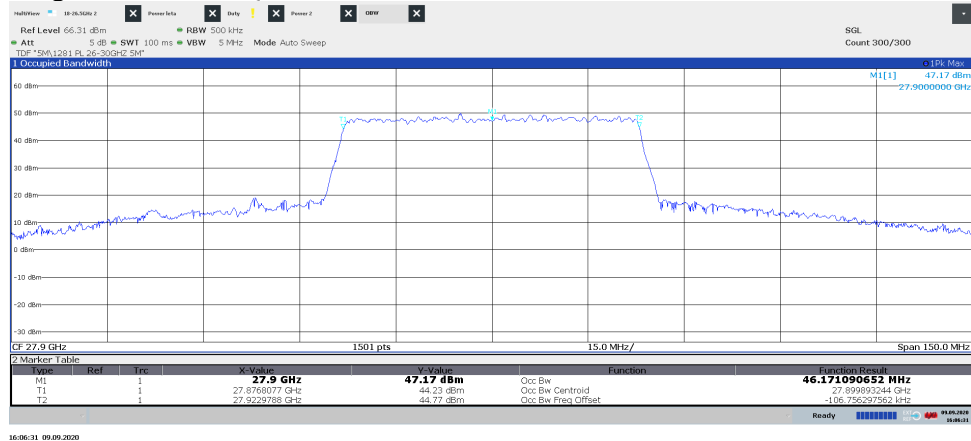
Diagram 1.1, TL₅₀, QPSK, Horizontal:Diagram 1.2, TL₅₀, QPSK, Vertical::

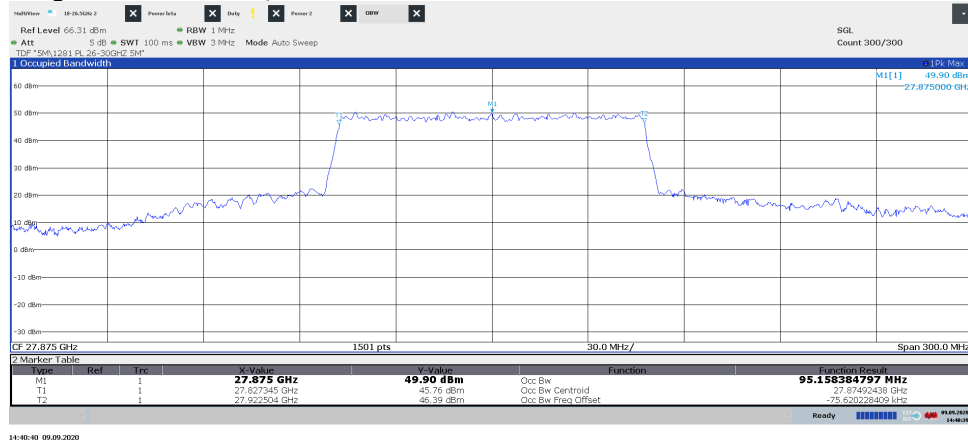
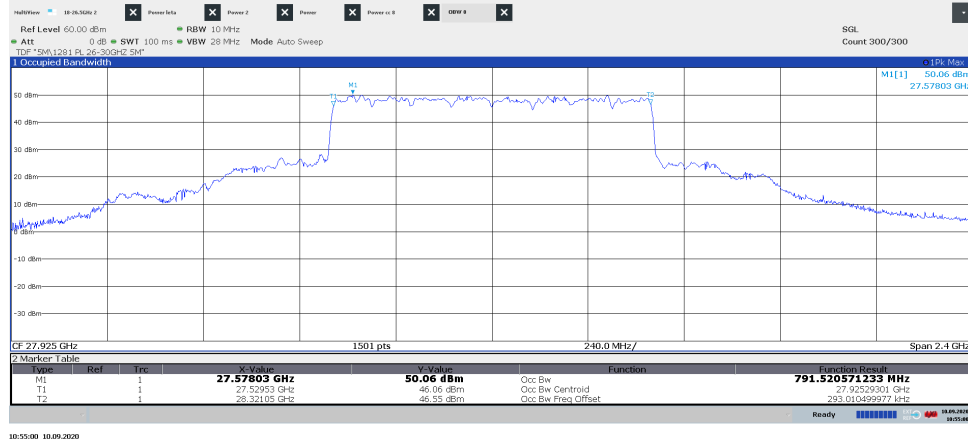
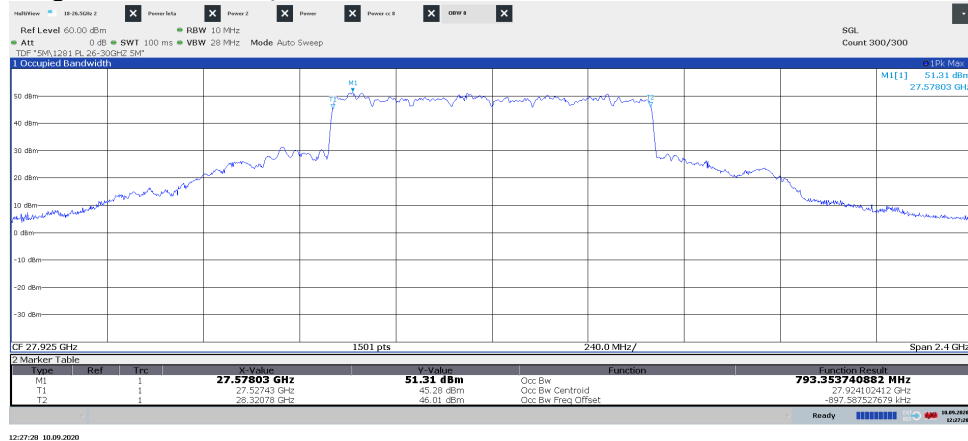
Diagram 1.3, TL₁₀₀, QPSK, Horizontal:Diagram 1.4, TL₁₀₀, QPSK, Vertical::

Diagram 1.5, M8₁₀₀, QPSK, Horizontal:Diagram 1.6, M8₁₀₀, QPSK, Vertical::

Field strength of spurious radiation measurements according to CFR 47 §30.203

Date	Temperature	Humidity
2020-09-11	23 °C ± 3 °C	35 % ± 5 %
2020-09-24	23 °C ± 3 °C	38 % ± 5 %
2020-09-25	23 °C ± 3 °C	40 % ± 5 %
2020-09-28	23 °C ± 3 °C	42 % ± 5 %
2020-09-29	23 °C ± 3 °C	35 % ± 5 %
2020-09-30	23 °C ± 3 °C	42 % ± 5 %
2020-10-01	23 °C ± 3 °C	36 % ± 5 %
2020-10-02	23 °C ± 3 °C	30 % ± 5 %

The measurements were performed with both horizontal and vertical polarization of the antenna. The measurement was performed with a RBW of 1 MHz. The antenna distance and test object height in the different frequency ranges is described below.

In the test range from 40 – 100 GHz

A propagation loss in free space was calculated. The used formula was

$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \quad \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

For 40 – 60 GHz D was 3.0 m and for 60 – 100 GHz D was 1.0 m.

In the test range from 30MHz – 40 GHz a substitution measurement defined in 3GPP TR 37.842 chapter 10.3.1.1.2 was used to get the actual correction factor (Transducer factor A-D in the figure 1 below) with a Network analyzer (ZNB 40).

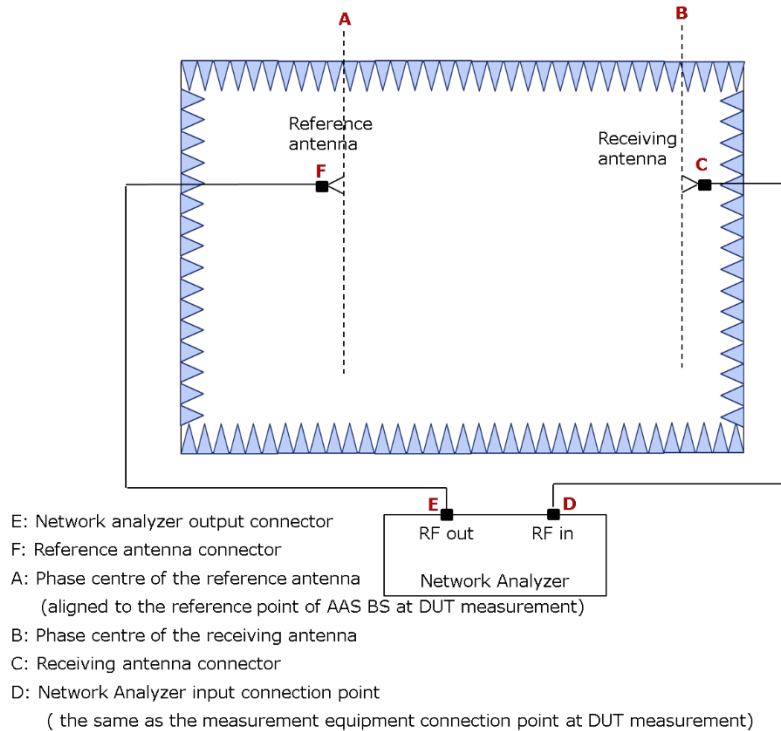


Figure 1: Indoor Anechoic Chamber calibration system setup for EIRP

Stage 1 - Calibration:

- 1) Connect the reference antenna and the receiving antenna to the measurement RF out port and RF in port of the network analyzer, respectively, as shown in figure 1.
- 2) Install the reference antenna with its *beam peak direction* and the height of its phase centre aligned with the receiving antenna.
- 3) Set the centre frequency of the network analyzer to the carrier centre frequency of the tested signal for EIRP measurement of the EUT and measure $LF_{EIRP, E \rightarrow D}$, which is equivalent to $20\log|S_{21}|$ (dB) obtained by the network analyzer:
 $LF_{EIRP, E \rightarrow D}$: Pathloss between E and D in figure 1.
- 4) Measure the cable loss, $LF_{EIRP, E \rightarrow F}$ between the reference antenna connector and the network analyzer connector:
 $LF_{EIRP, E \rightarrow F}$: Cable loss between E and F in figure 1.
- 5) Calculate the calibration value between A and D with the following formula:
 $LEIRP_{cal, A \rightarrow D} = LF_{EIRP, E \rightarrow D} + G_{REF_ANT_EIRP, A \rightarrow F} - LF_{EIRP, E \rightarrow F}$.
 $LEIRP_{cal, A \rightarrow D}$: Calibration value between A and D in figure 1. Was implemented in the spectrum analyzer as a transducer.
 $G_{REF_ANT_EIRP, A \rightarrow F}$: Antenna gain of the reference antenna.

Stage 2 - Measurement:

- 6) Uninstall the reference antenna and install the EUT with the manufacturer declared coordinate system reference point in the same place as the phase centre of the reference antenna. The manufacturer declared coordinate system orientation of the EUT is set to be aligned with the testing system.
- 7) Measure the mean power, $P_{R_EUT_EIRP, D}$, D in figure 1.
- 8) Calculate the EIRP with the following formula:

$$EIRP = P_{R_EUT_EIRP, D} + LEIRP_{cal, A \rightarrow D}$$

The measurement procedure was as the following:

1. An EIRP pre-scan with the measurement antenna in horizontal and vertical polarization is performed with RMS detector and Max Hold on the spectrum analyzer. The turn table was slowly rotating from 0-360 degrees.
2. EIRP spurious radiation on frequencies closer than 10 dB to the TRP limit in the pre-scan a manual search for maximum response was done.
3. If the recorded EIRP value was above the TRP limit, a TRP measurement was done according to KDB 842590 D01 chapter 4.4. Overview of the methods.
 - a. Two Cut method according to KDB 842590 D01 chapter 4.4.2.2
 - i. EUT set in vertical orientation
 - ii. EIRP measurement samples with horizontal and vertical polarization of the measurement antenna. Angular step size based on frequency and dimension of the EUT
 - iii. EUT set in horizontal orientation
 - iv. EIRP measurement samples with horizontal and vertical polarization of the measurement antenna. Angular step size based on frequency and dimension of the EUT.
 - v. $TRP = EIRP_{measurement} - \Delta TRP$.
(ΔTRP = Margin factor based on grid selection).

- b. Two Cut method when pattern multiplication is applicable and used according to KDB 842590 D01 chapter 4.4.2.3
 - i. EUT set in vertical orientation
 - ii. EIRP measurement samples with horizontal and vertical polarization of the measurement antenna. Angular step size based on frequency and dimension of the EUT
 - iii. EUT set in horizontal orientation
 - iv. EIRP measurement samples with horizontal and vertical polarization of the measurement antenna. Angular step size based on frequency and dimension of the EUT.
 - v. TRP is calculated using the formula in Appendix E of KDB 842590 D01
- c. EIRP to Conducted Power Conversion in Band Edge Using Antenna Gain according to KDB 842590 D01 chapter 4.4.2.5
 - i. Convert each radiated measurement to conducted power/BW using the equations:
$$\text{Conducted Power level (dBm) at any frequency/BW} = \text{Measured EIRP level (dBm)/BW} - \text{EUT antenna Gain (dBi)}$$
 - ii. Sum the radiated power Horizontal and Vertical polarisations for total conducted power level/BW.
 - iii. Evaluate the pass/fail decision by comparing total conducted power level/BW against the applicable TRP limit.

Rise Measurement equipment

Measurement equipment	RISE number
Anechoic chamber, Hertz	BX50194
R&S FSW 43	902 073
R&S ESU 40	901 385
R&S ZNB 40	BX50051
EMCO Horn Antenna 3116	503 279
Bilog antenna Schaffner 6143	504 079
Flann STD Gain Horn Antenna 20240-20	BX92412
Flann STD Gain Horn Antenna 22240-20	BX92413
Flann STD Gain Horn Antenna 24240-20	BX92414
Flann STD Gain Horn Antenna 26240-20	BX92415
Flann STD Gain Horn Antenna 27240-20	BX92416
Mixer FS-Z60	BX90566
Mixer FS-Z90	BX90567
Mixer FS-Z110	BX81425
Miteq, Low Noise Amplifier	503 278
EMCO Horn Antenna 3115	502 175
EMCO Horn Antenna 3115	902 212
µComp Nordic, Low Noise Amplifier	901 544
RF Cable	BX81423
RF Cable	503 681
RF Cable FSW-B21	BX62069
RF Cable FSW-B21	BX62073
Temperature and humidity meter, Testo 615	503 498

EAB Measurement equipment

Calibrated at RISE before testing

	S/N
SWH010 HPF 30-40 GHz	ST010619225
SSL036 LPF 26.5 GHz	ST012717003

Results

Test object, KRD 901 100/2 DC version:

The diagrams represents worst case configurations for each frequency range.

Diagram	Symbolic name	Config mode	Pol	Frequency range	Measurement method	“Early exit?”
2.1a	BL ₁₀₀	2	Hor	30-1000 MHz	Pre scan EIRP	Yes
2.1b	BL ₁₀₀	2	Ver	30-1000 MHz	Pre scan EIRP	Yes
2.2a	BL ₁₀₀	2	Hor	1-18 GHz	Pre scan EIRP	Yes
2.2b	BL ₁₀₀	2	Ver	1-18 GHz	Pre scan EIRP	Yes
2.3a	TH ₁₀₀	2	Hor	18-26.5 GHz	Pre scan EIRP	No
2.3b	TH ₁₀₀	2	Ver	18-26.5 GHz	Pre scan EIRP	No
2.3c	TH ₁₀₀	2	Hor/Ver	26.092-26.192 GHz	Two cut TRP	Compliant to TRP limit
2.4a	BL ₅₀	2	Hor	26.5-30 GHz	Pre scan EIRP	No ²
2.4b	BL ₅₀	2	Ver	26.5-30 GHz	Pre scan EIRP	No ²
2.4c	BL ₅₀	2	Hor	27-27.51 GHz	Pre scan EIRP	Yes ¹
2.4d	BL ₅₀	2	Ver	27-27.51 GHz	Pre scan EIRP	Yes ¹
2.5a	TH ₁₀₀	2	Hor	26.5-30 GHz	Pre scan EIRP	No
2.5b	TH ₁₀₀	2	Ver	26.5-30 GHz	Pre scan EIRP	No
2.5c	TH ₁₀₀	2	Ver	28.34-29.5 GHz	Pre scan EIRP	Yes ¹
2.5d	TH ₁₀₀	2	Ver	28.34-29.5 GHz	Pre scan EIRP	Yes ¹
2.5e	TH ₁₀₀	2	Hor/Ver	27.241-27.341 GHz	Two cut TRP	Compliant to TRP limit
2.6a	Bim ₃₅₀	2	Hor	26.5-30 GHz	Pre scan EIRP	No
2.6b	Bim ₃₅₀	2	Ver	26.5-30 GHz	Pre scan EIRP	No
2.6c	Bim ₃₅₀	2	Hor	26.5-27.51 GHz	Pre scan EIRP	No
2.6d	Bim ₃₅₀	2	Ver	26.5-27.51 GHz	Pre scan EIRP	No
2.6e	Bim ₃₅₀	2	Hor/Ver	26.8-27.5 GHz	Pattern multiplication TRP	Compliant to TRP limit
2.7a	TL ₅₀	2	Hor	27.625-28.225 GHz	Pre scan EIRP	Yes ¹
2.7b	TL ₅₀	2	Ver	27.625-28.225 GHz	Pre scan EIRP	Yes ¹
2.8a	BH ₅₀	2	Hor	27.625-28.225 GHz	Pre scan EIRP	Yes ¹
2.8b	BH ₅₀	2	Ver	27.625-28.225 GHz	Pre scan EIRP	Yes ¹
2.9a	TH ₅₀	2	Hor	26.5-30 GHz	Pre scan EIRP	No ²
2.9b	TH ₅₀	2	Ver	26.5-30 GHz	Pre scan EIRP	No ²
2.9c	TH ₅₀	2	Hor	28.34-29.5 GHz	Pre scan EIRP	Yes ¹
2.9d	TH ₅₀	2	Ver	28.34-29.5 GHz	Pre scan EIRP	Yes ¹

¹⁾ Calculated conducted power based on antenna gain below limit

²⁾ Early Exit based on Lower EIRP compared to TH₁₀₀ (Diagram 2.5) for the spurious at 27.29 GHz .

Diagram	Symbolic name	Config mode	Pol	Frequency range	Measurement method	“Early exit?”
2.10a	Tim ₃₅₀	2	Hor	26.5-30 GHz	Pre scan EIRP	No ²
2.10b	Tim ₃₅₀	2	Ver	26.5-30 GHz	Pre scan EIRP	No ²
2.10c	Tim ₃₅₀	2	Hor	28.34-29.5 GHz	Pre scan EIRP	No
2.10d	Tim ₃₅₀	2	Ver	28.34-29.5 GHz	Pre scan EIRP	No
2.10e	Tim ₃₅₀	2	Hor/Ver	28.35-29.1 GHz	Pattern multiplication TRP	Compliant to TRP limit
2.11a	BT ₈₁₀₀	1	Hor	26.5-30 GHz	Pre scan EIRP	No
2.11b	BT ₈₁₀₀	1	Ver	26.5-30 GHz	Pre scan EIRP	No
2.11c	BT ₈₁₀₀	1	Hor	27-27.51 GHz	Pre scan EIRP	Yes ¹
2.11d	BT ₈₁₀₀	1	Ver	27-27.51 GHz	Pre scan EIRP	Yes ¹
2.11e	BT ₈₁₀₀	1	Hor	28.34-29.5 GHz	Pre scan EIRP	Yes ¹
2.11f	BT ₈₁₀₀	1	Ver	28.34-29.5 GHz	Pre scan EIRP	Yes ¹
2.12a	BMT ₈₁₀₀	0	Hor	26.5-30 GHz	Pre scan EIRP	No
2.12b	BMT ₈₁₀₀	0	Ver	26.5-30 GHz	Pre scan EIRP	No
2.12c	BMT ₈₁₀₀	0	Hor	27-27.51 GHz	Pre scan EIRP	Yes ¹
2.12d	BMT ₈₁₀₀	0	Ver	27-27.51 GHz	Pre scan EIRP	Yes ¹
2.12e	BMT ₈₁₀₀	0	Hor	28.34-28.85 GHz	Pre scan EIRP	Yes ¹
2.12f	BMT ₈₁₀₀	0	Ver	28.34-28.85 GHz	Pre scan EIRP	Yes ¹
2.13a	BL ₁₀₀	2	Hor	30-40 GHz	Pre scan EIRP	No
2.13b	BL ₁₀₀	2	Ver	30-40 GHz	Pre scan EIRP	No
2.13c	BL ₁₀₀	2	Hor/Ver	30.571-30.671 GHz	Two cut TRP	Compliant to TRP limit
2.14a	BL ₁₀₀	2	Hor	40-60 GHz	Pre scan EIRP	Yes
2.14b	BL ₁₀₀	2	Ver	40-60 GHz	Pre scan EIRP	Yes
2.15a	BL ₁₀₀	2	Hor	60-80 GHz	Pre scan EIRP	Yes
2.15b	BL ₁₀₀	2	Ver	60-80 GHz	Pre scan EIRP	Yes
2.16a	BL ₁₀₀	2	Hor	80-100 GHz	Pre scan EIRP	Yes
2.16b	BL ₁₀₀	2	Ver	80-100 GHz	Pre scan EIRP	Yes

¹⁾ Calculated conducted power based on antenna gain below limit

²⁾ Early Exit based on Lower EIRP compared to TH₁₀₀ (Diagram 2.5) for the spurious at 27.44GHz .

Test object, KRD 901 100/5 AC version:

Diagram	Symbolic name	Config mode	Pol	Frequency range	Measurement method	“Early exit?”
2.17a	BL ₁₀₀	2	Hor	30-1000 MHz	Pre scan EIRP	Yes
2.17b	BL ₁₀₀	2	Ver	30-1000 MHz	Pre scan EIRP	Yes

Measurement uncertainty: 30 – 1000 MHz 3.1 dB
1 – 18 GHz, 3.0 dB
18 – 40 GHz, 3.1 dB
40 – 60 GHz, 2.27 dB
60 – 75 GHz, 2.70 dB
75 – 100 GHz, 4.24 dB

Limits

CFR 47 §30.203 Emission limits.


(a) The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

(b)(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater.


(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges as the design permits.

(3) The measurements of emission power can be expressed in peak or average values.

Complies?	Yes
-----------	-----

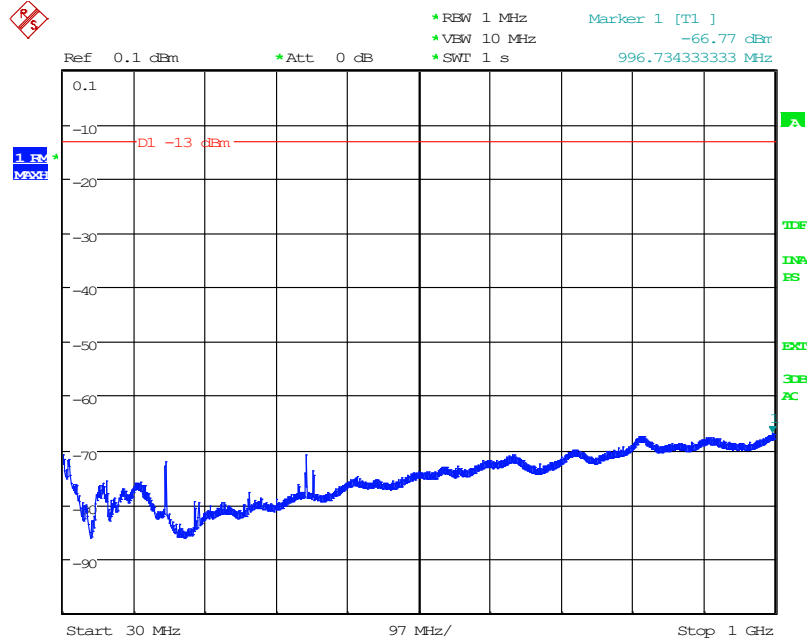Diagram 2.1a: Pre scan 30 – 1000 MHz, Symbolic name: BL₁₀₀, EIRP Horizontal polarization

Date: 24.SEP.2020 16:41:45

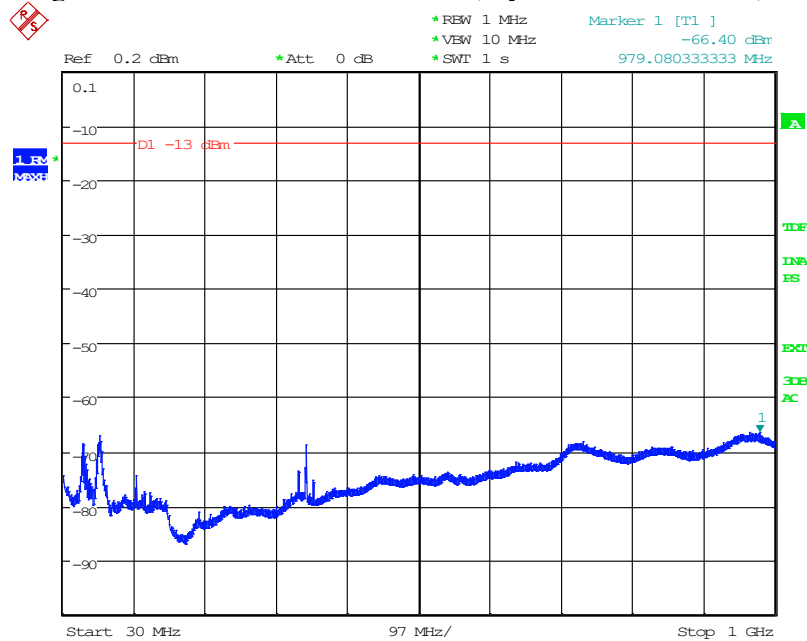Diagram 2.1b: Pre scan 30 – 1000 MHz, Symbolic name: BL₁₀₀, EIRP Vertical polarization

Date: 24.SEP.2020 16:44:13

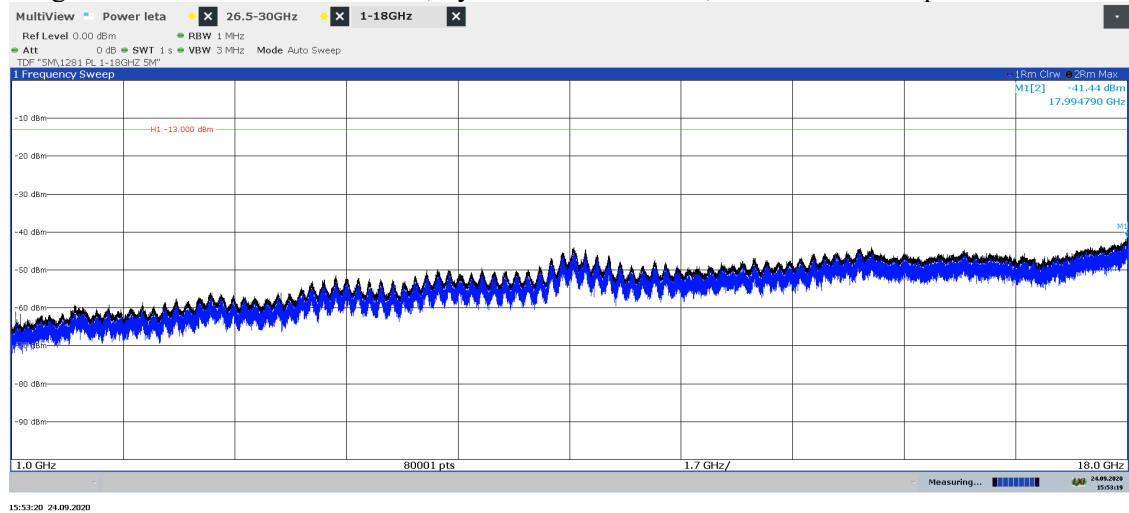
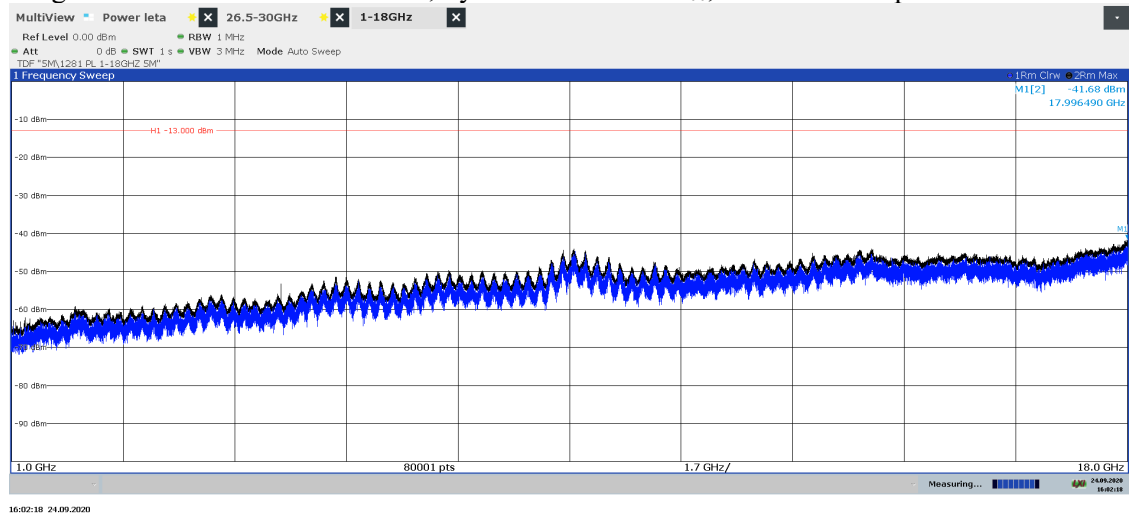
Diagram 2.2a: Pre scan 1 – 18 GHz, Symbolic name: BL₁₀₀, EIRP Horizontal polarizationDiagram 2.2b: Pre scan 1 – 18 GHz, Symbolic name: BL₁₀₀, EIRP Vertical polarization

Diagram 2.3a: Pre scan 18 – 26.5 GHz, Symbolic name: TH₁₀₀, EIRP Horizontal polarization
See diagram 2.3c for TRP result

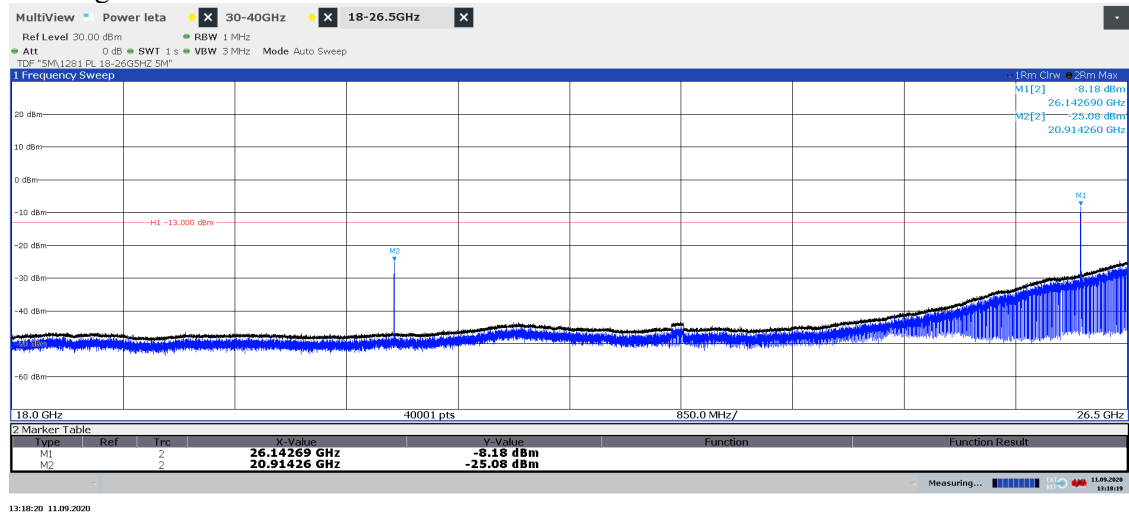


Diagram 2.3b: Pre scan 18 – 26.5 GHz, Symbolic name: TH₁₀₀, EIRP Vertical polarization
See diagram 2.3c for TRP result

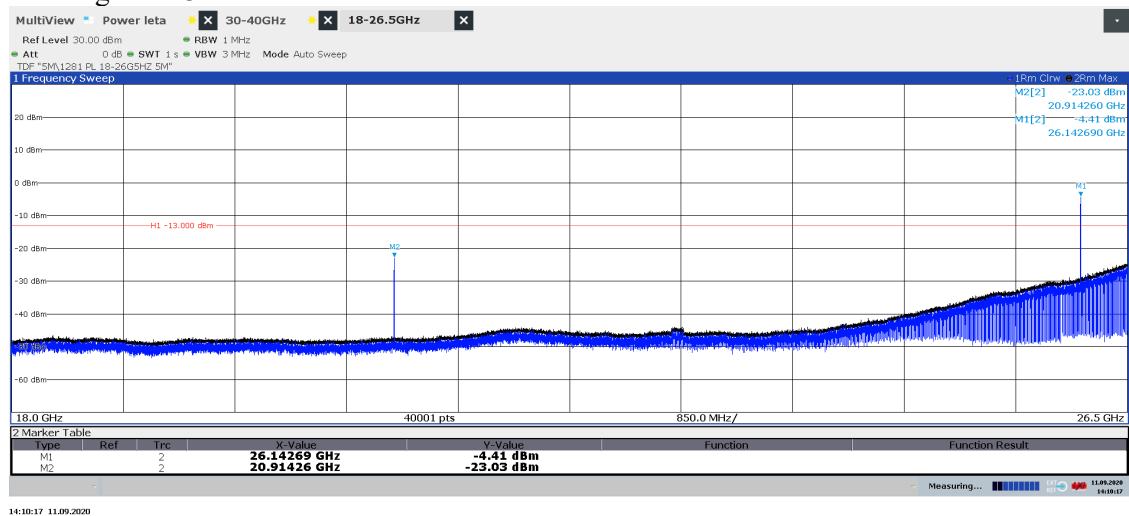


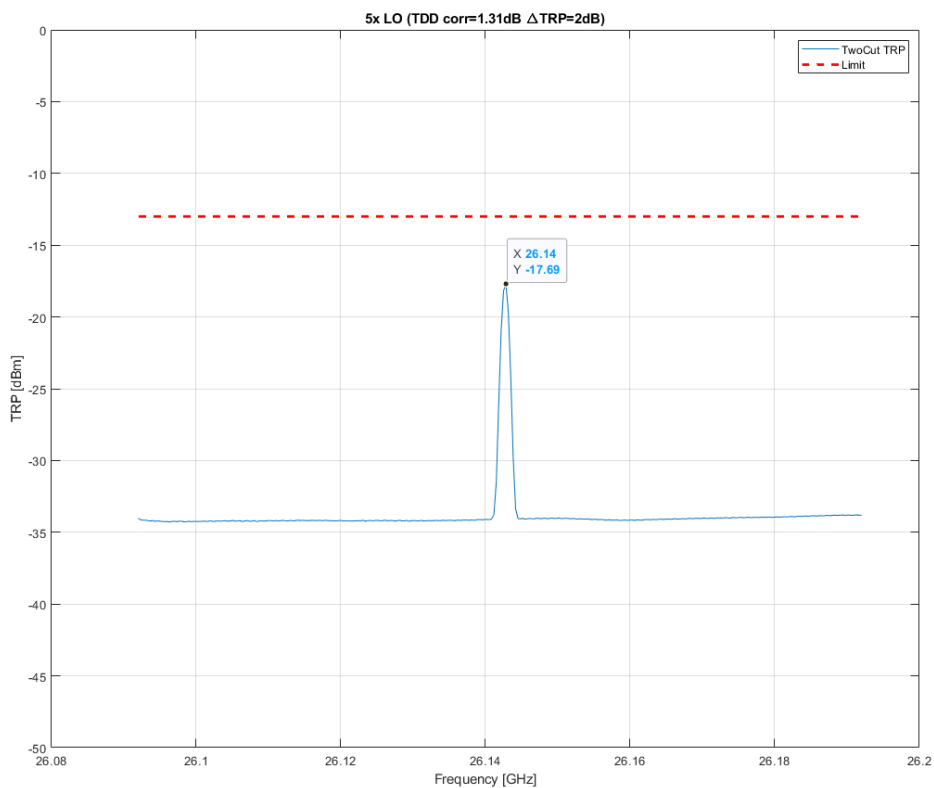
Diagram 2.3c: Two cut TRP 26.092 – 26.192 GHz 5x LO, Symbolic name: TH₁₀₀

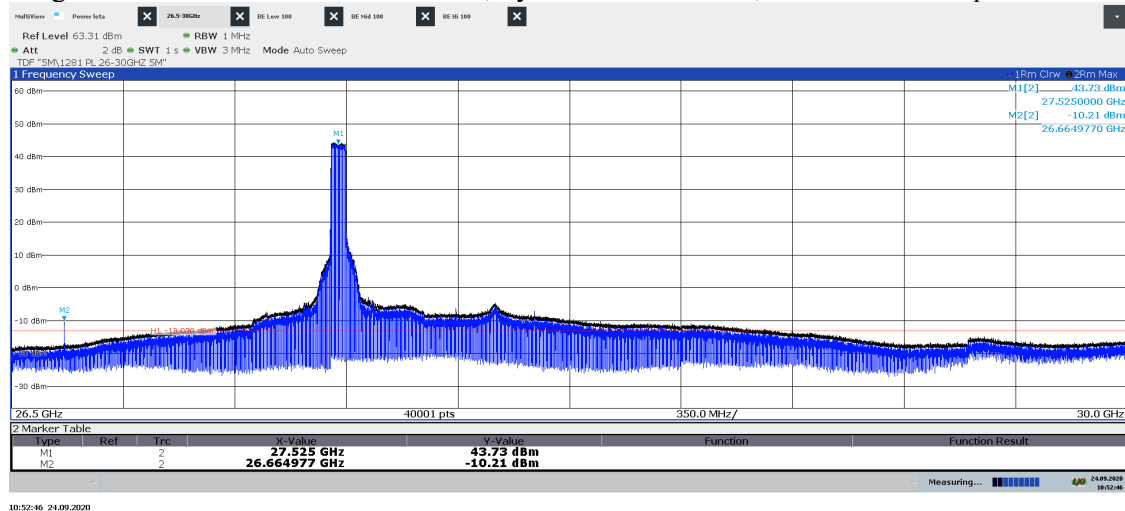
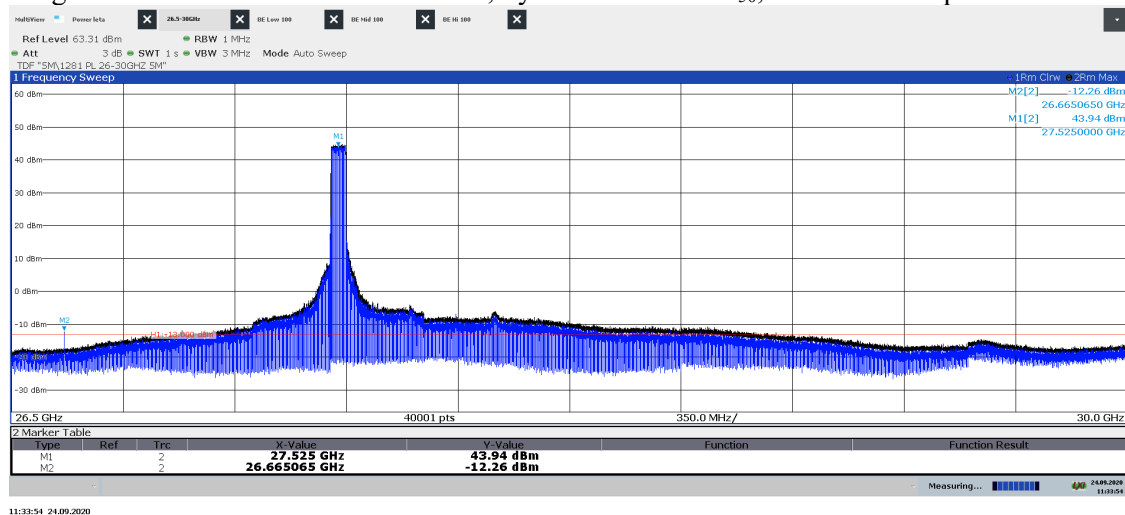
Diagram 2.4a: Pre scan 26.5 – 30.0 GHz, Symbolic name: BL₅₀, EIRP Horizontal polarizationDiagram 2.4b: Pre scan 26.5 – 30.0 GHz, Symbolic name: BL₅₀, EIRP Vertical polarization

Diagram 2.4c: Pre scan 27.00 – 27.51 GHz, Symbolic name: BL₅₀, EIRP Horizontal polarization


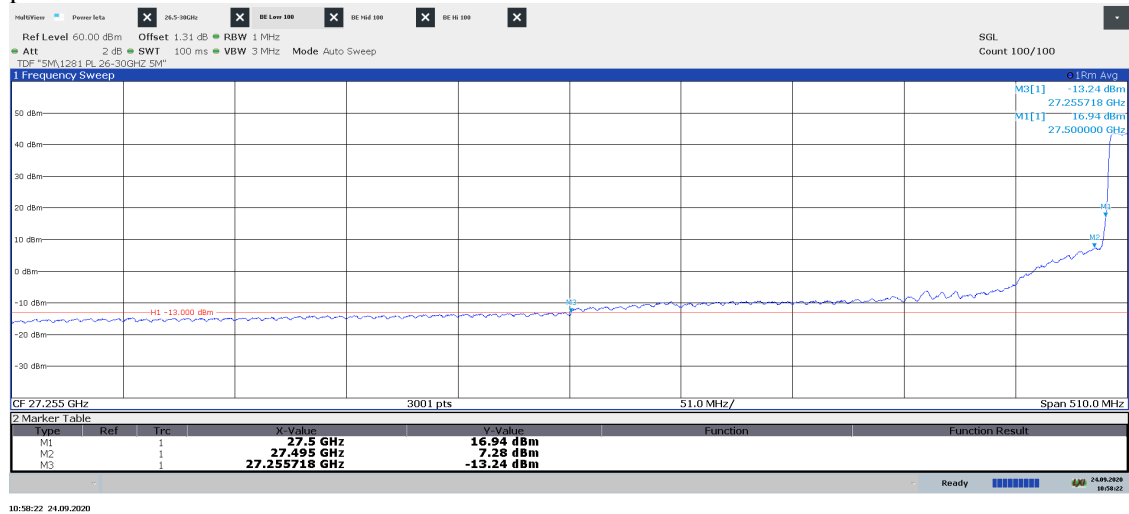


Diagram 2.4d: Pre scan 27.00 – 27.51 GHz, Symbolic name: BL₅₀, EIRP Vertical polarization

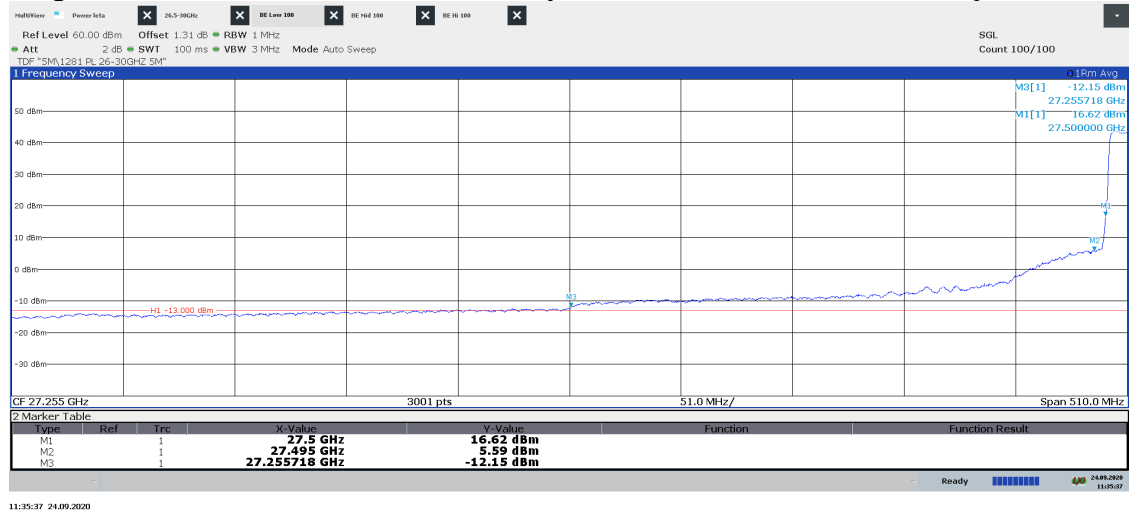

Power EIRP for 27.5GHz Hor/ Ver [dBm]	Power EIRP for 27.495 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 27.5 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 27.495 GHz (Limit -13 dBm) [dBm]/ Verdict
16.94/ 16.62	7.28/ 5.59	31.55/ 31.34	-11.65/ Pass	-21.94/ Pass

Diagram 2.5a: Pre scan 26.5 – 30.0 GHz, Symbolic name: TH₁₀₀, EIRP Horizontal polarization
See diagram 2.5e for TRP result

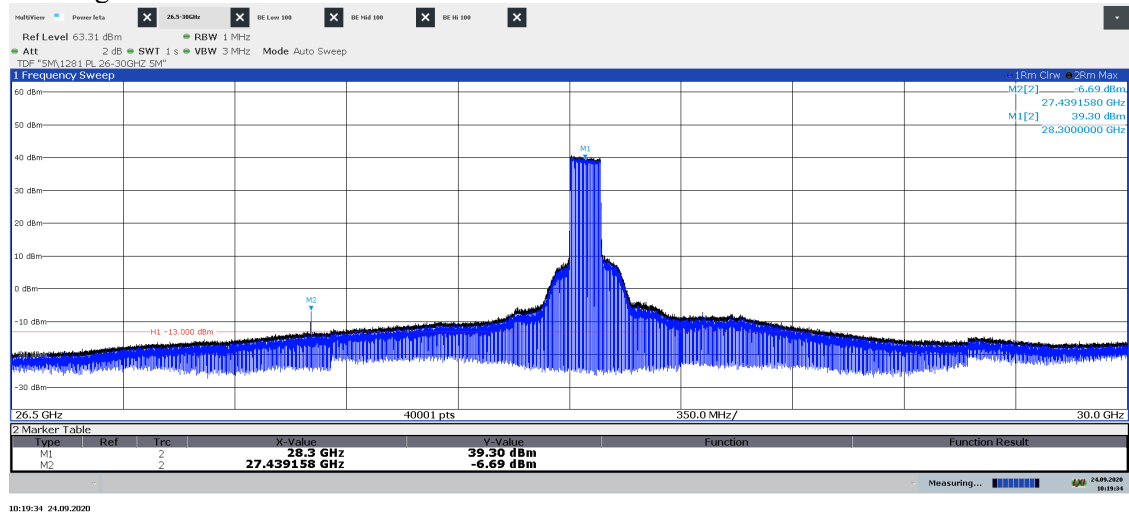


Diagram 2.5b: Pre scan 26.5 – 30.0 GHz, Symbolic name: TH₁₀₀, EIRP Vertical polarization
See diagram 2.5e for TRP result

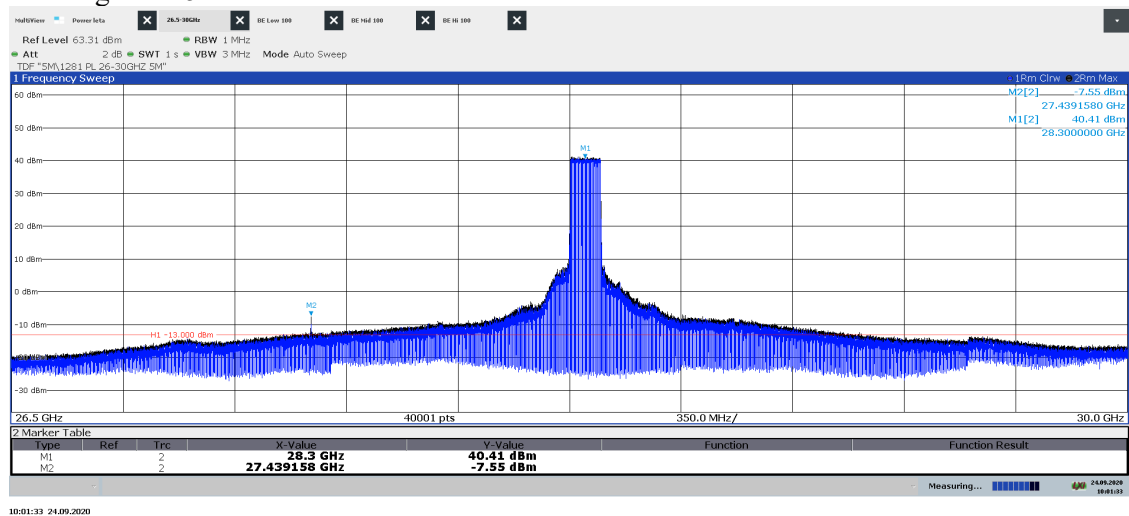
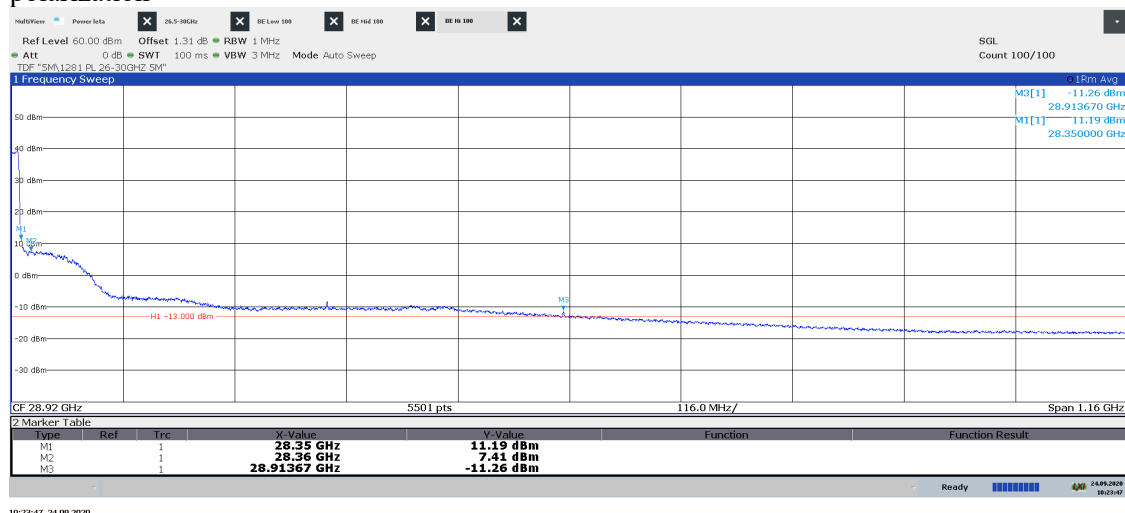
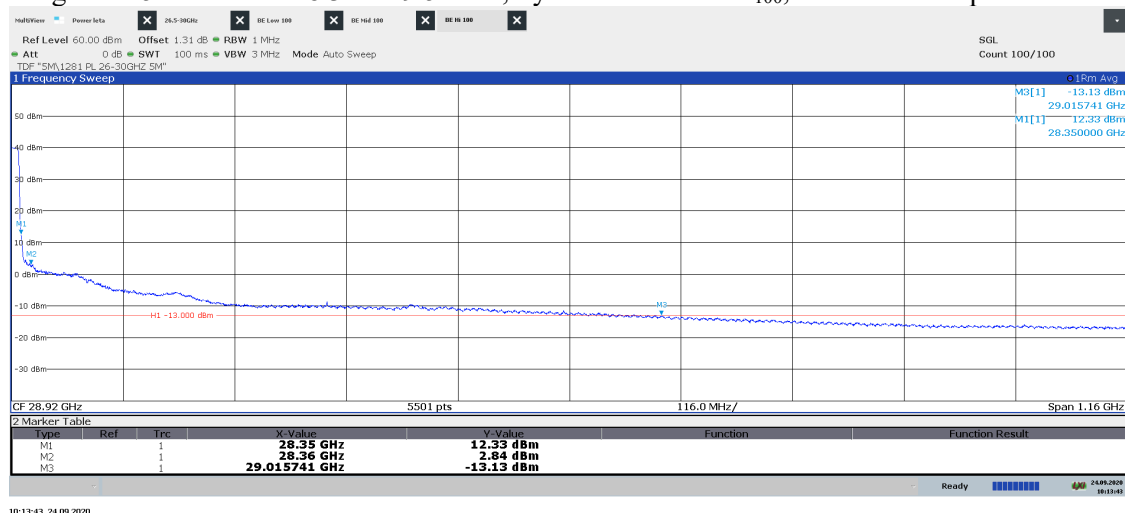


Diagram 2.5c: Pre scan 28.34 – 29.5GHz, Symbolic name: TH₁₀₀, EIRP Horizontal polarizationDiagram 2.5d: Pre scan 28.34 – 29.5 GHz, Symbolic name: TH₁₀₀, EIRP Vertical polarization

Power EIRP for 28.35 GHz Hor/ Ver [dBm]	Power EIRP for 28.36 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 28.35 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 28.36 GHz (Limit -13 dBm) [dBm]/ Verdict
11.19/ 12.33	7.41/ 2.84	32.05/ 31.8	-17.10/ Pass	-23.27/ Pass

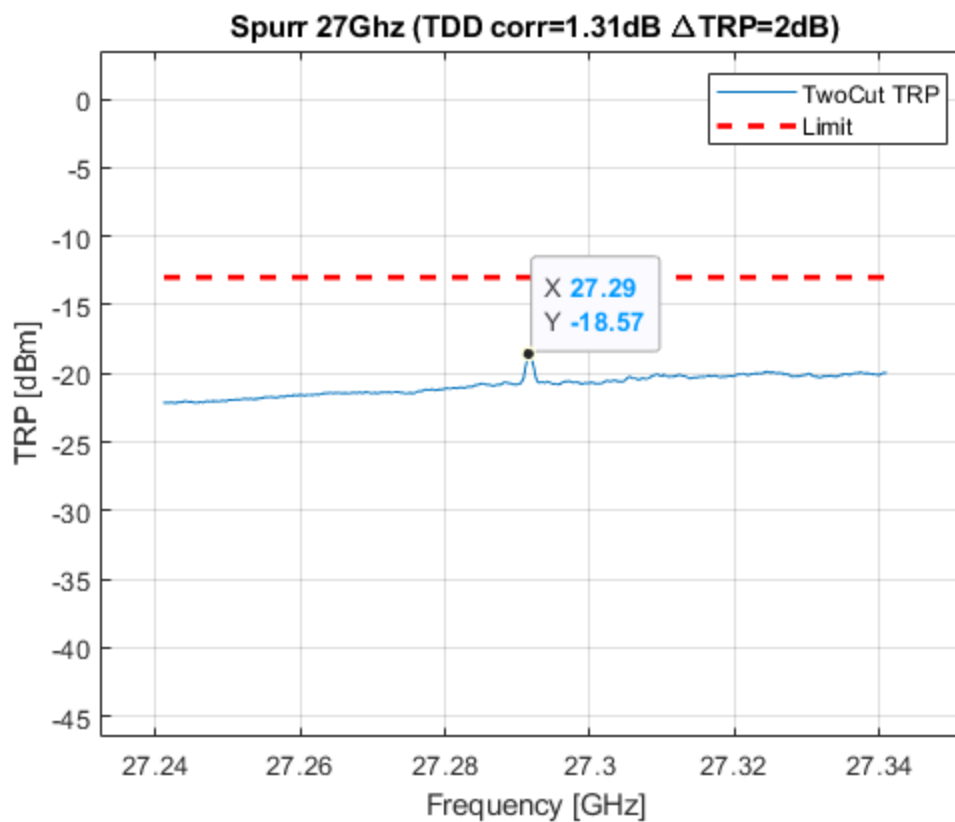
Diagram 2.5e: Two cut TRP 27.241 – 27.341 GHz, Symbolic name: TH₁₀₀

Diagram 2.6a: Pre scan 26.5 – 30.0 GHz, Symbolic name: Bim3₅₀, EIRP Horizontal polarization

See diagram 2.6e for TRP result

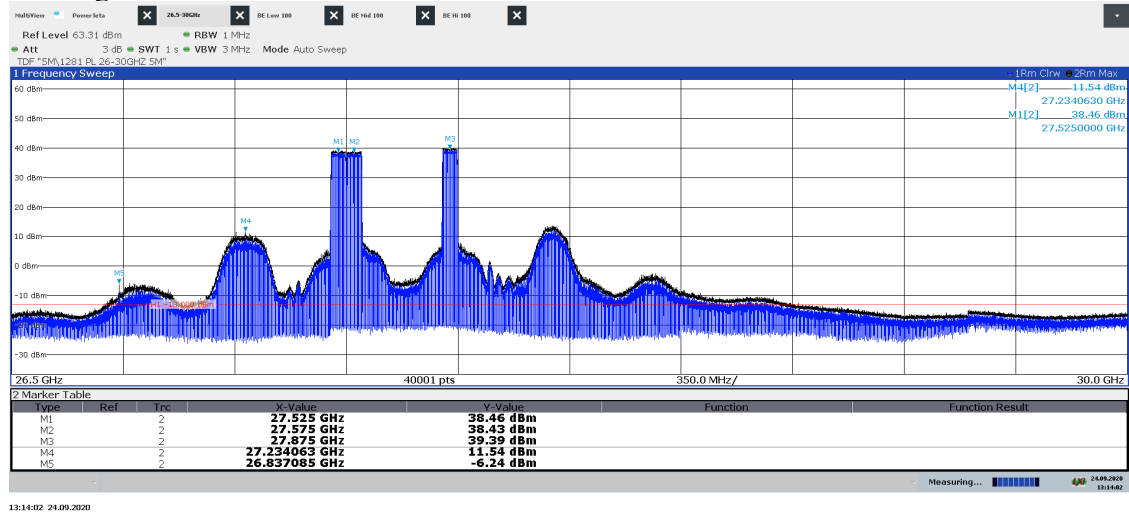


Diagram 2.6b: Pre scan 26.5 – 30.0 GHz, Symbolic name: Bim3₅₀, EIRP Vertical polarization

See diagram 2.6e for TRP result

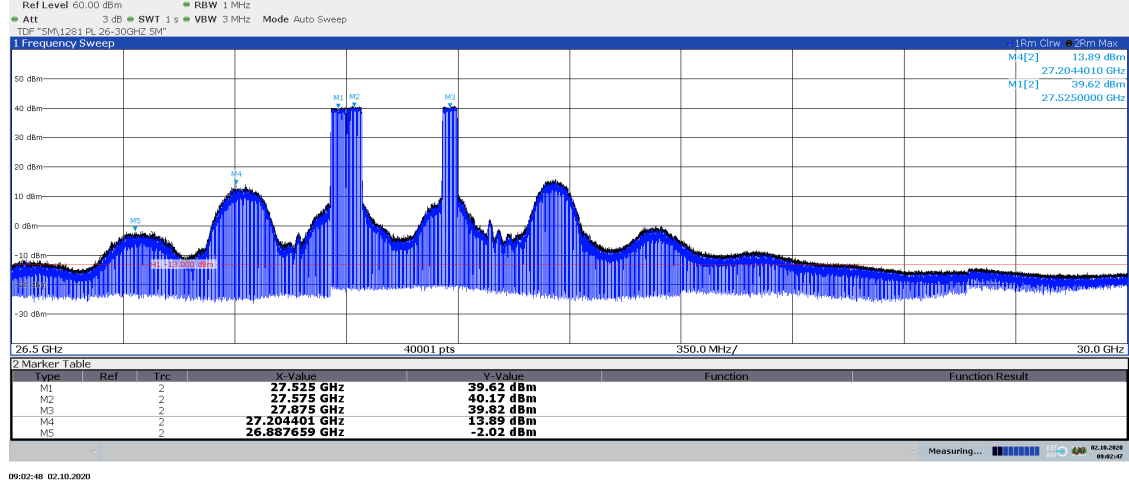


Diagram 2.6c: Pre scan 26.5 – 27.51 GHz, Symbolic name: Bim3₅₀, EIRP Horizontal polarization

See diagram 2.6e for TRP result


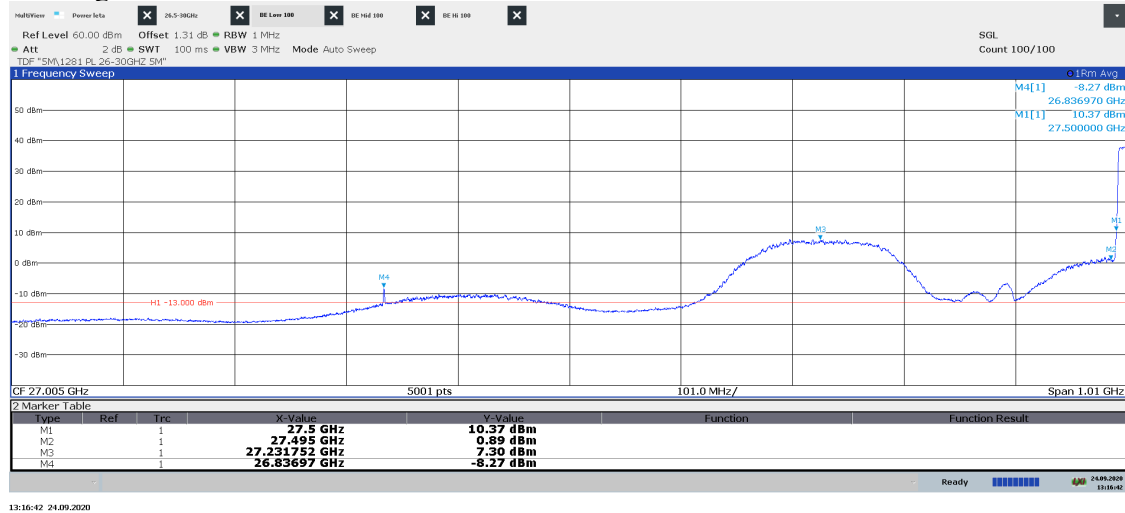


Diagram 2.6d: Pre scan 26.5 – 27.51 GHz, Symbolic name: Bim3₅₀, EIRP Vertical polarization

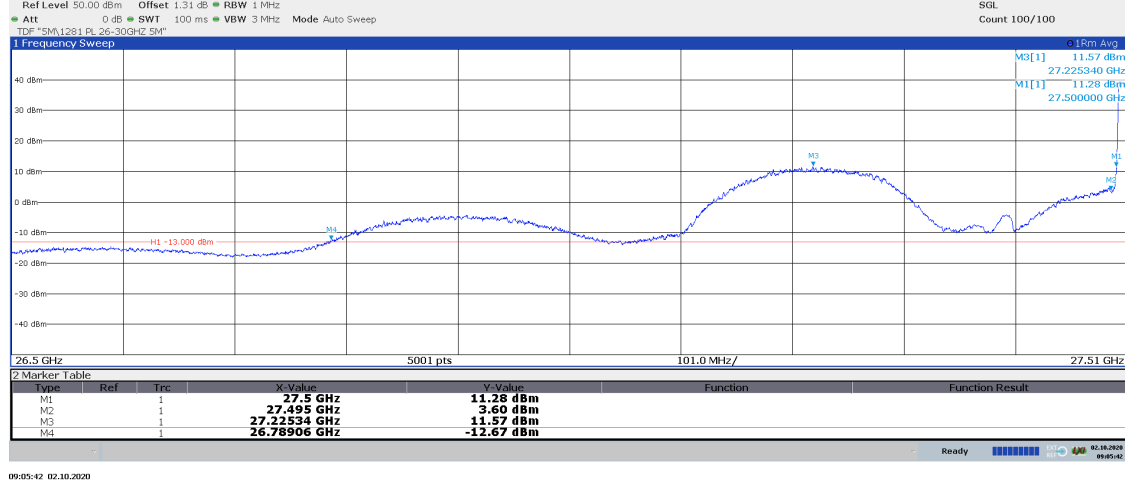See diagram 2.6e for TRP result



Power EIRP for 27.5GHz Hor/ Ver [dBm]	Power EIRP for 27.495 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 27.5 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 27.495 GHz (Limit -13 dBm) [dBm]/ Verdict
10.37/ 11.28	0.89/ 3.60	31.55/ 31.34	-17.57/ Pass	-25.95/ Pass

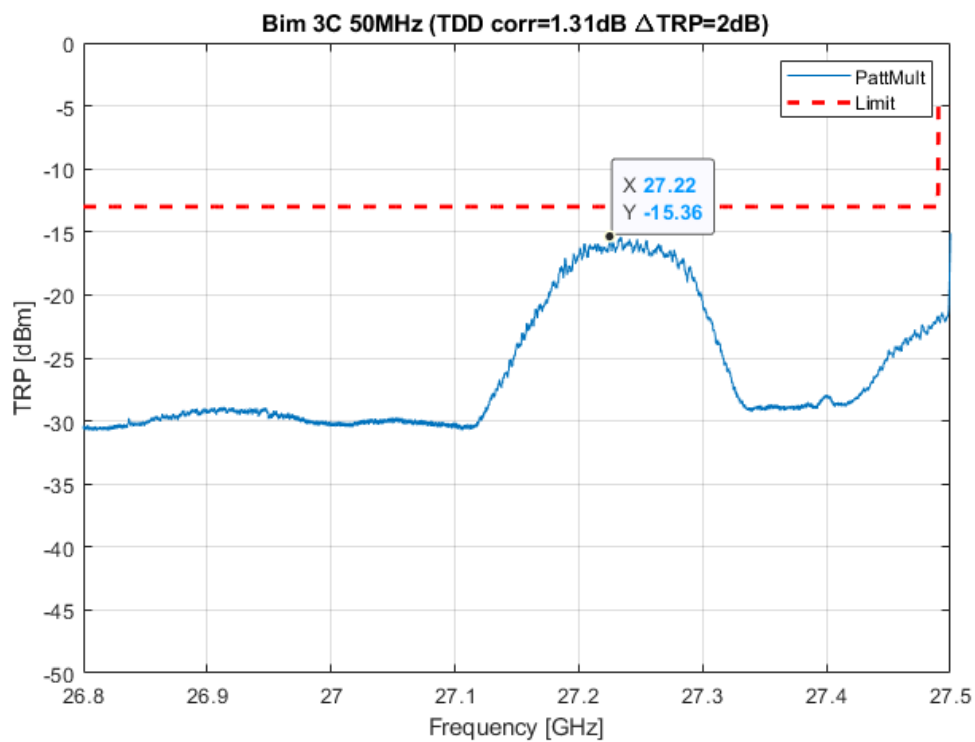
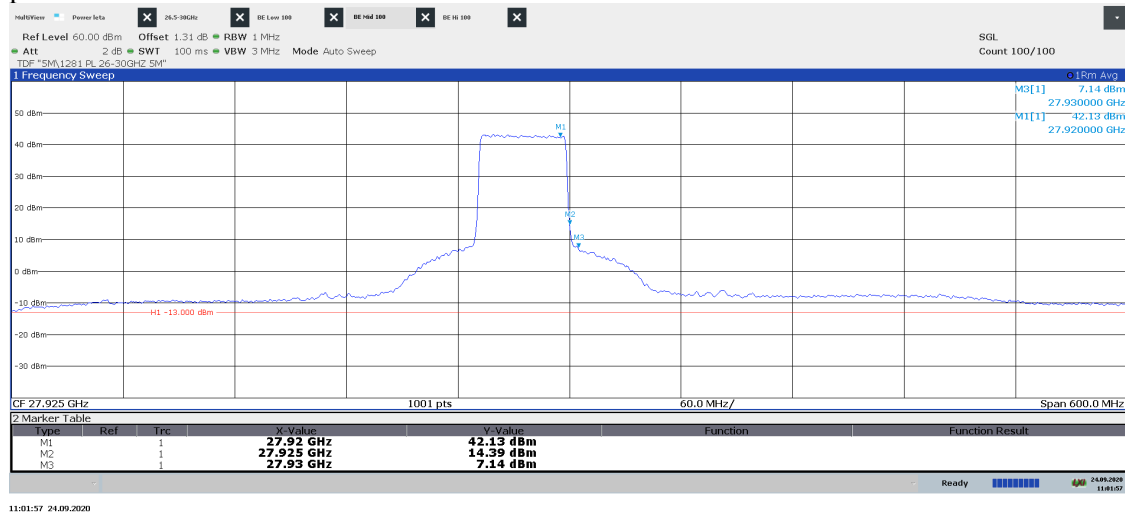
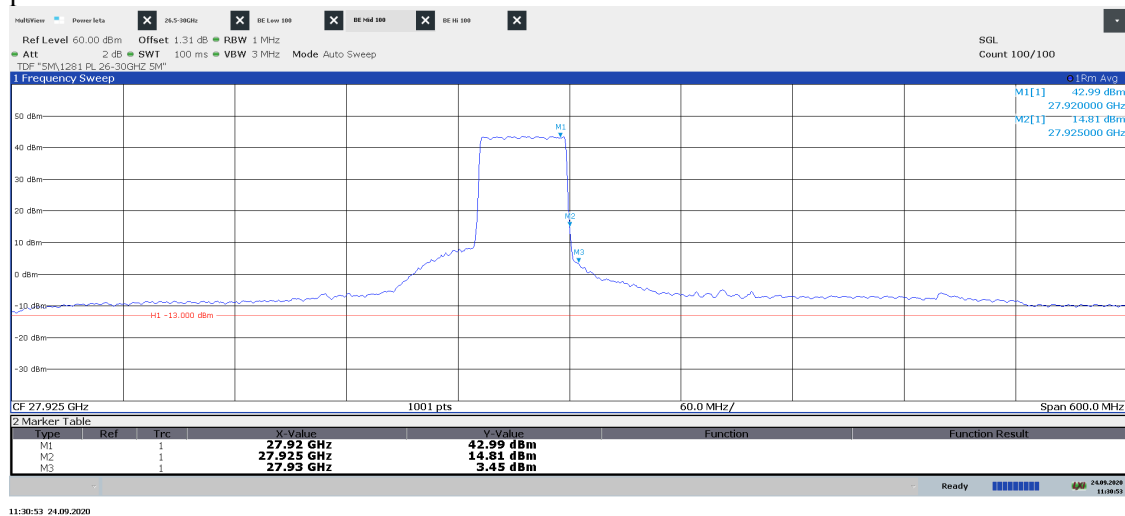
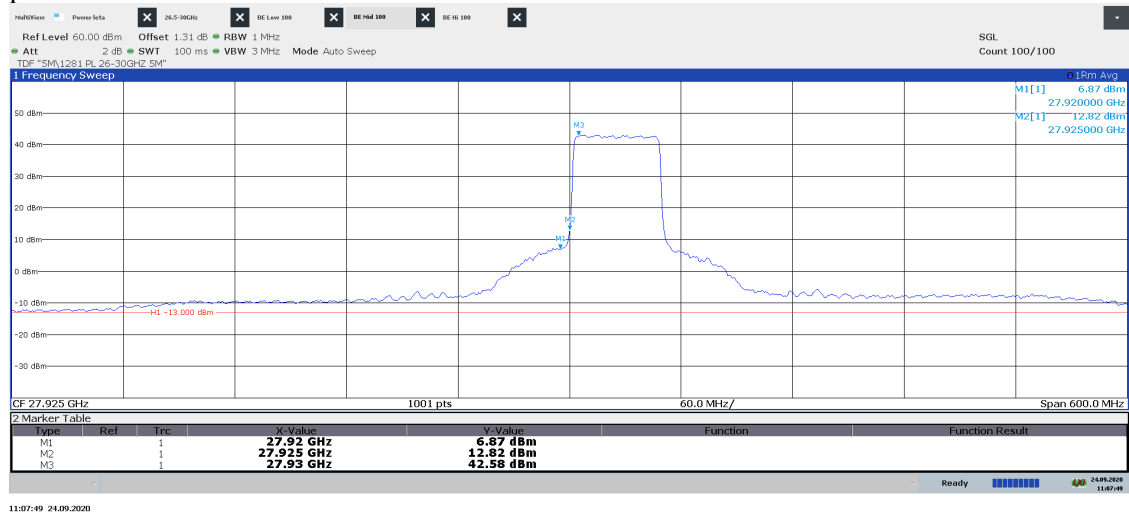
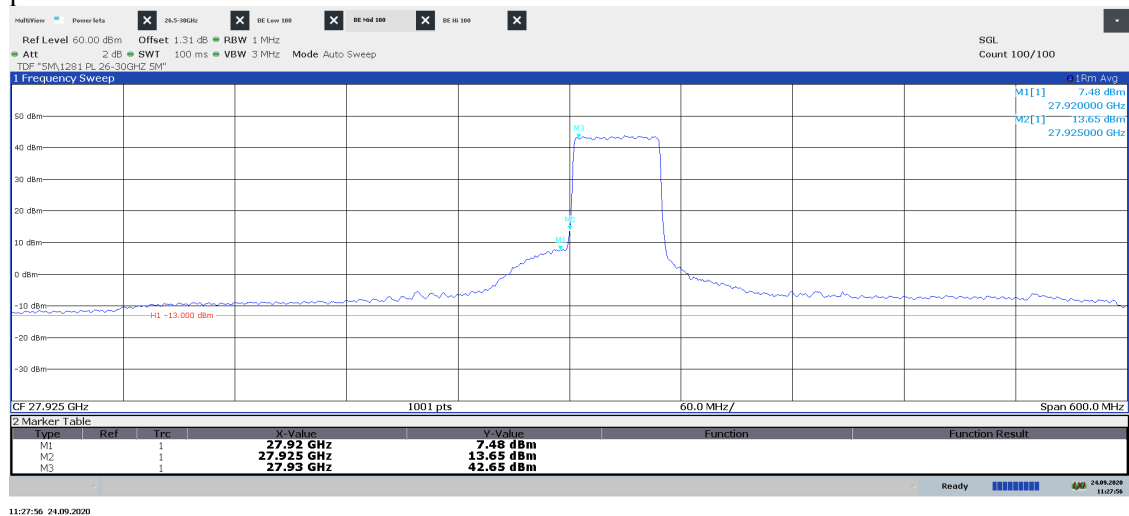
Diagram 2.6e: Pattern multiplication TRP 26.8 – 27.5 GHz, Symbolic name: Bim3₅₀

Diagram 2.7a: Pre scan 27.625 – 28.225 GHz, Symbolic name: TL₅₀, EIRP Horizontal polarizationDiagram 2.7b: Pre scan 27.625 – 28.225 GHz, Symbolic name: TL₅₀, EIRP Vertical polarization

Power EIRP for 27.925 GHz Hor/ Ver [dBm]	Power EIRP for 27.935 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 27.925 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 27.935 GHz (Limit -13 dBm) [dBm]/ Verdict
14.39/ 14.81	7.14/ 3.45	31.81/ 31.67	-14.12/ Pass	-23.08/ Pass

Diagram 2.8a: Pre scan 27.625 – 28.225 GHz, Symbolic name: BH₅₀, EIRP Horizontal polarizationDiagram 2.8b: Pre scan 27.625 – 28.225 GHz, Symbolic name: BH₅₀, EIRP Vertical polarization

Power EIRP for 27.925 GHz Hor/ Ver [dBm]	Power EIRP for 27.92 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 27.925 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 27.92 GHz (Limit -13 dBm) [dBm]/ Verdict
12.82/ 13.65	6.87/ 7.48	31.81/ 31.67	-15.47/ Pass	-21.54/ Pass

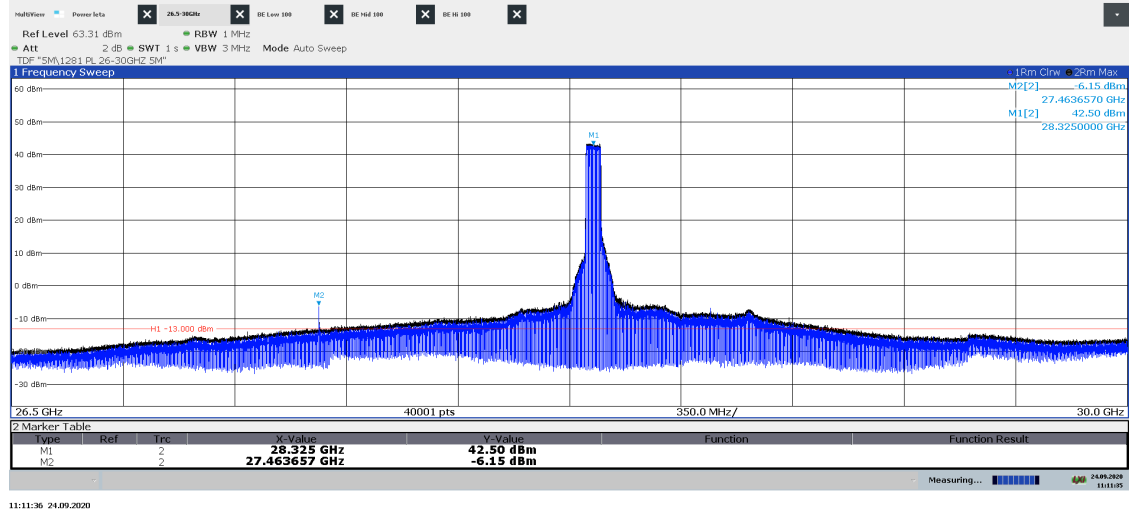
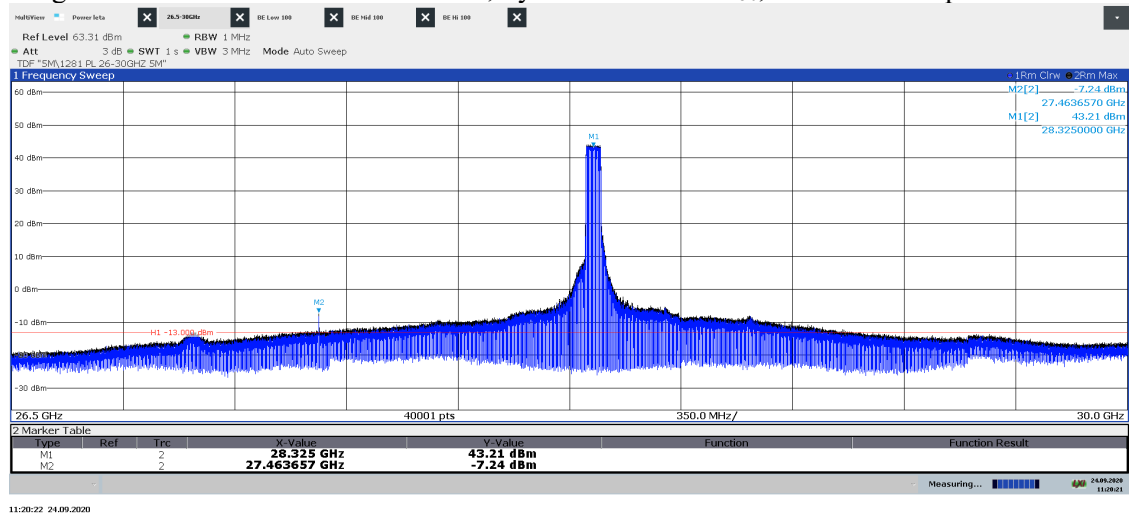
Diagram 2.9a: Pre scan 26.5 – 30.0 GHz, Symbolic name: TH₅₀, EIRP Horizontal polarizationDiagram 2.9b: Pre scan 26.5 – 30.0 GHz, Symbolic name: TH₅₀, EIRP Vertical polarization

Diagram 2.9c: Pre scan 28.34 – 29.5 GHz, Symbolic name: TH₅₀, EIRP Horizontal polarization


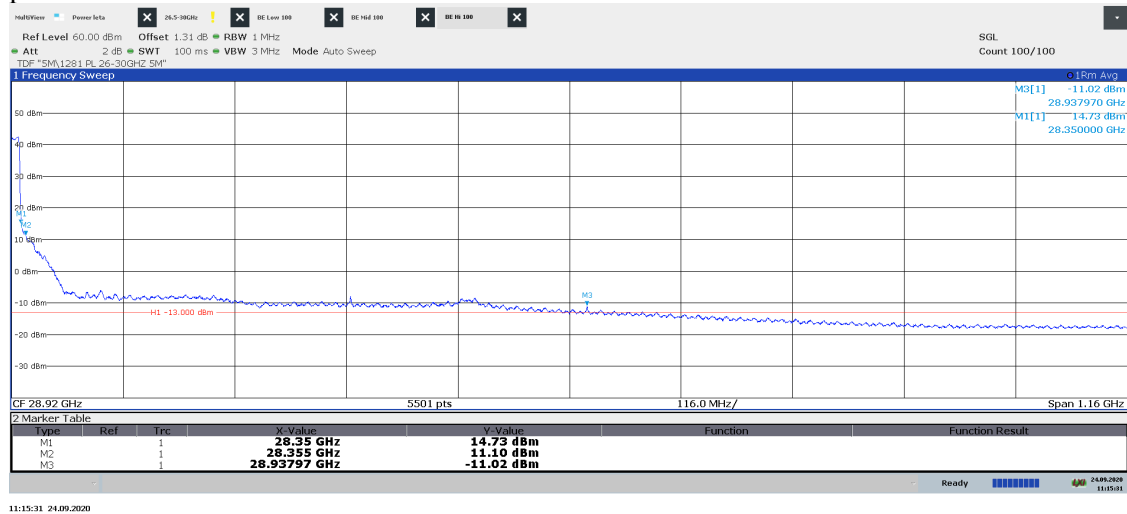


Diagram 2.9d: Pre scan 28.34 – 29.5 GHz, Symbolic name: TH₅₀, EIRP Vertical polarization

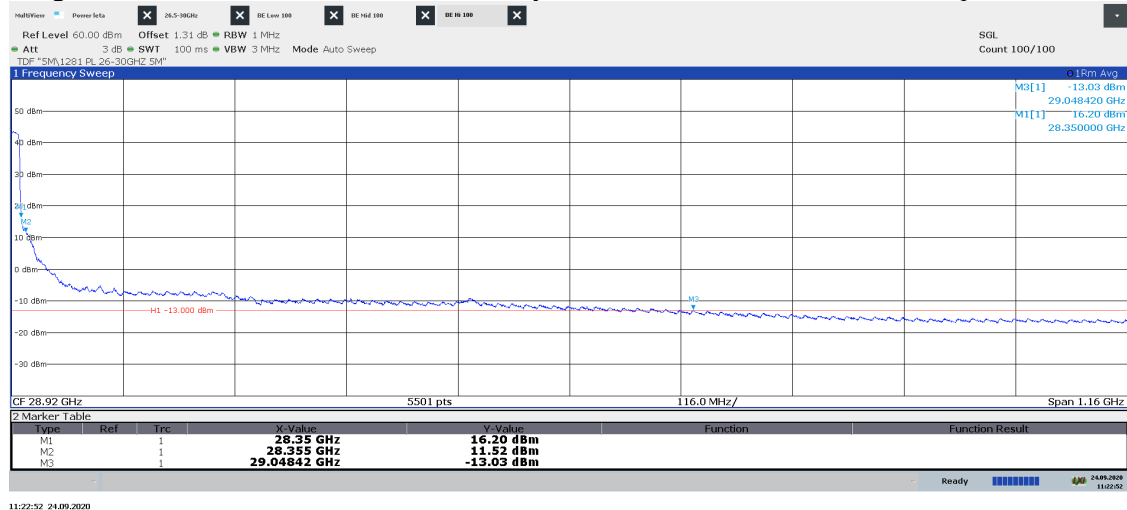

Power EIRP for 28.35 GHz Hor/ Ver [dBm]	Power EIRP for 28.355 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 28.35 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 28.355 GHz (Limit -13 dBm) [dBm]/ Verdict
14.73/ 16.20	11.10/ 11.52	32.05/ 31.8	-13.37/ Pass	-17.59/ Pass

Diagram 2.10a: Pre scan 26.5 – 30 GHz, Symbolic name: Tim3₅₀, EIRP Horizontal polarization

See diagram 2.10e for TRP result

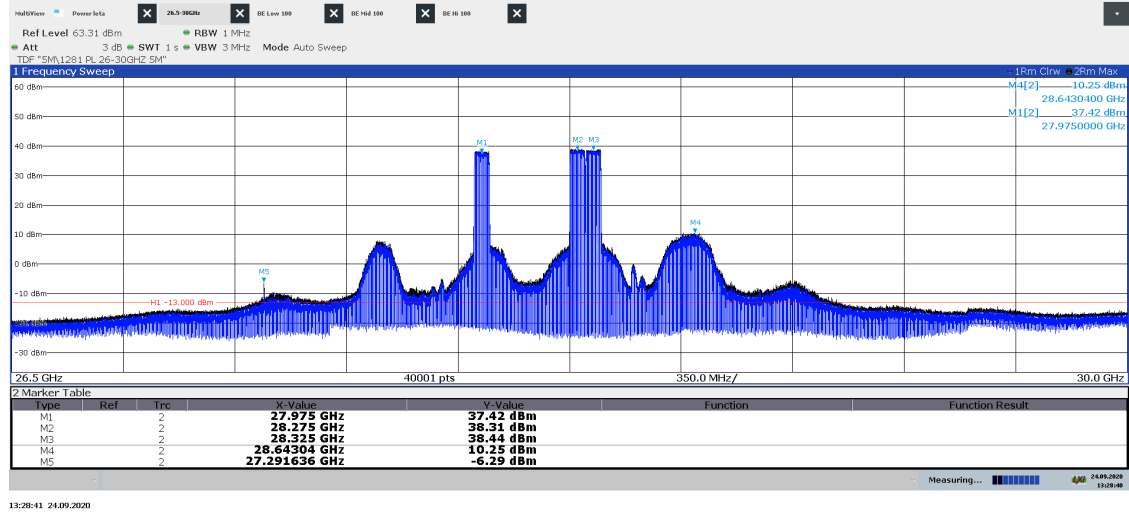


Diagram 2.10b: Pre scan 26.5 – 30 GHz, Symbolic name: Tim3₅₀, EIRP Vertical polarization

See diagram 2.10e for TRP result

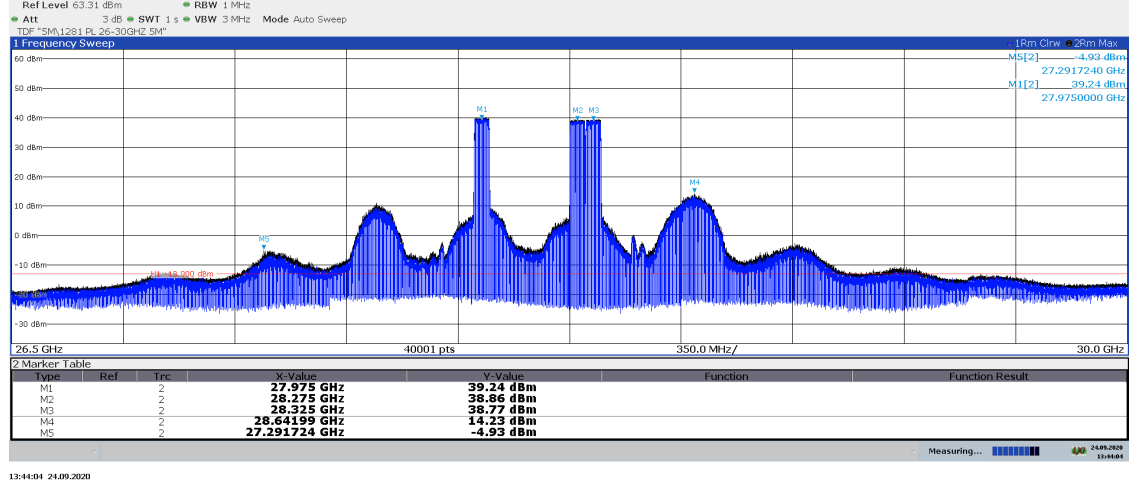


Diagram 2.10c: Pre scan 28.34 – 29.5 GHz, Symbolic name: Tim3₅₀, EIRP Horizontal polarization

See diagram 2.10e for TRP result


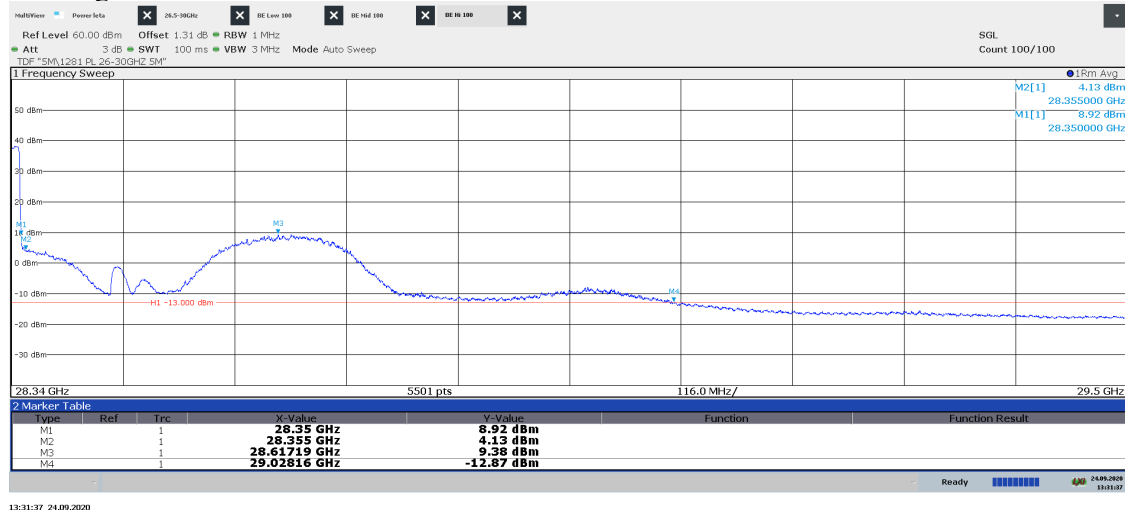


Diagram 2.10d: Pre scan 28.34 – 29.5 GHz, Symbolic name: Tim3₅₀, EIRP Vertical polarization

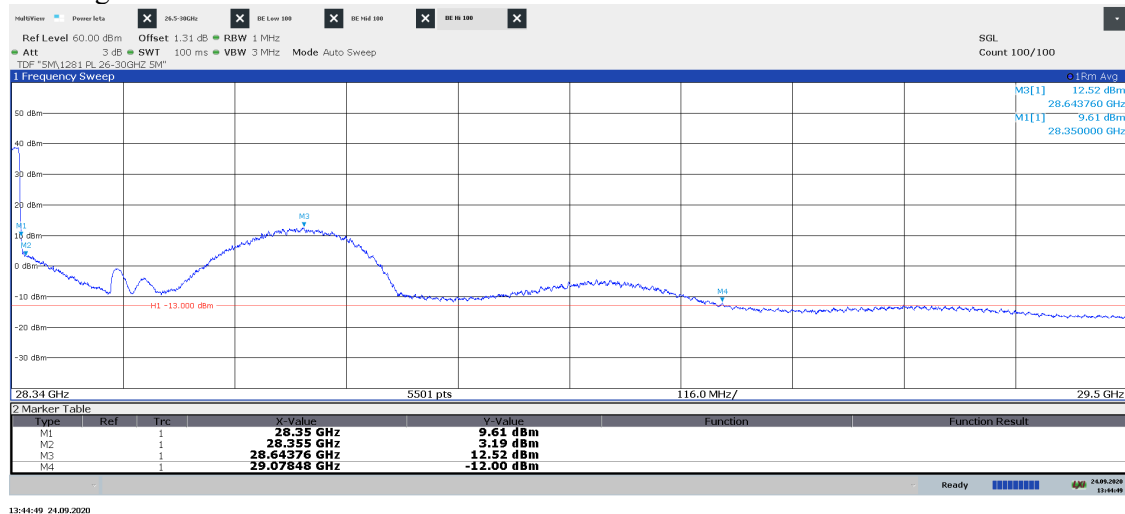See diagram 2.10e for TRP result



Power EIRP for 28.35 GHz Hor/ Ver [dBm]	Power EIRP for 28.355 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 28.35 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 28.355 GHz (Limit -13 dBm) [dBm]/ Verdict
8.92/ 12.52	4.13/ 3.19	32.05/ 31.8	-17.78/ Pass	-25.24/ Pass

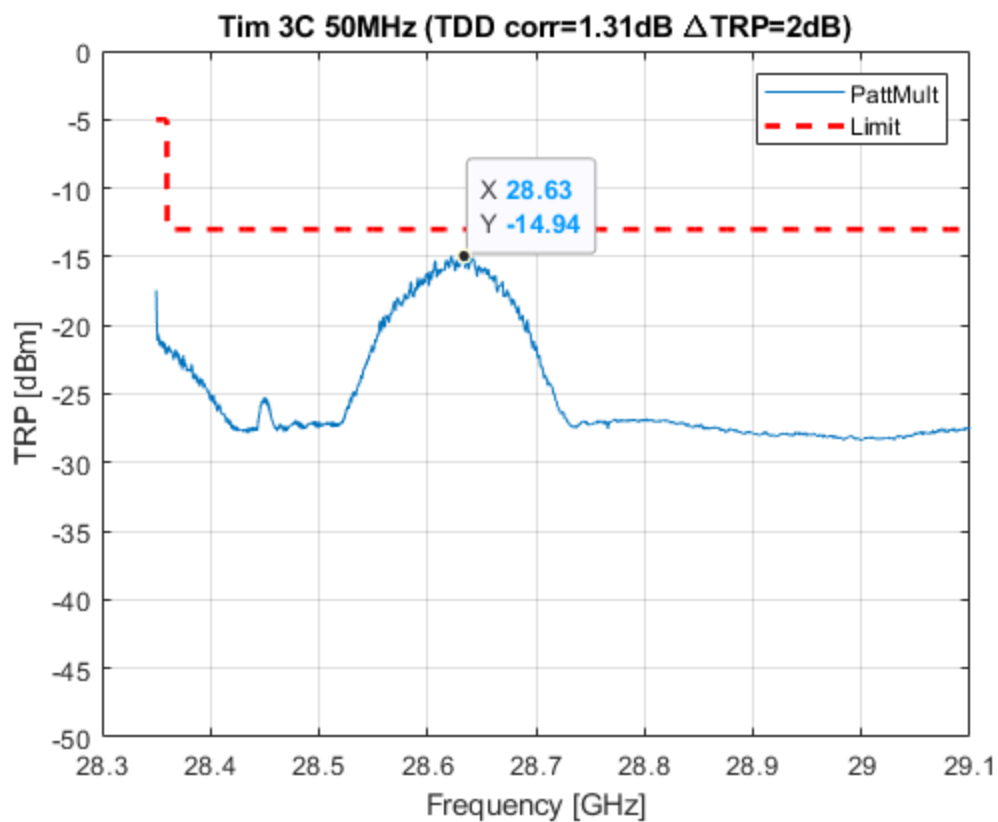
Diagram 2.10e: Pattern multiplication TRP 28.35 – 28.85 GHz, Symbolic name: Tim3₅₀

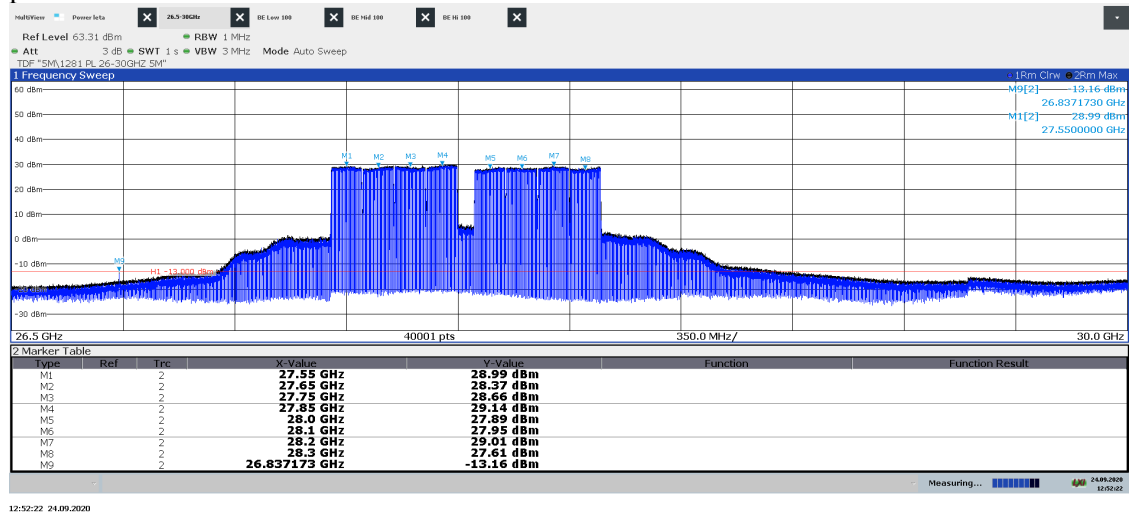
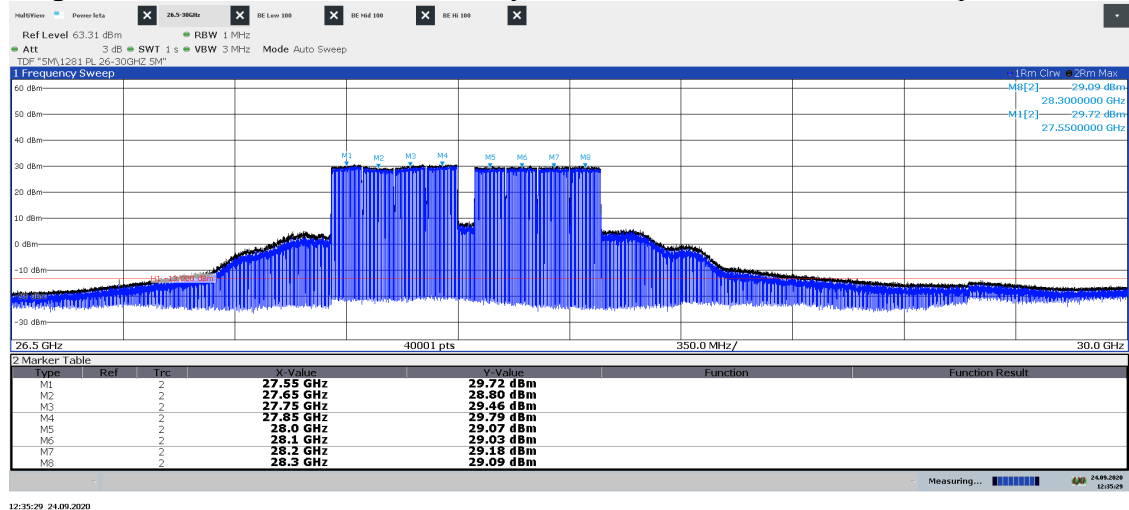
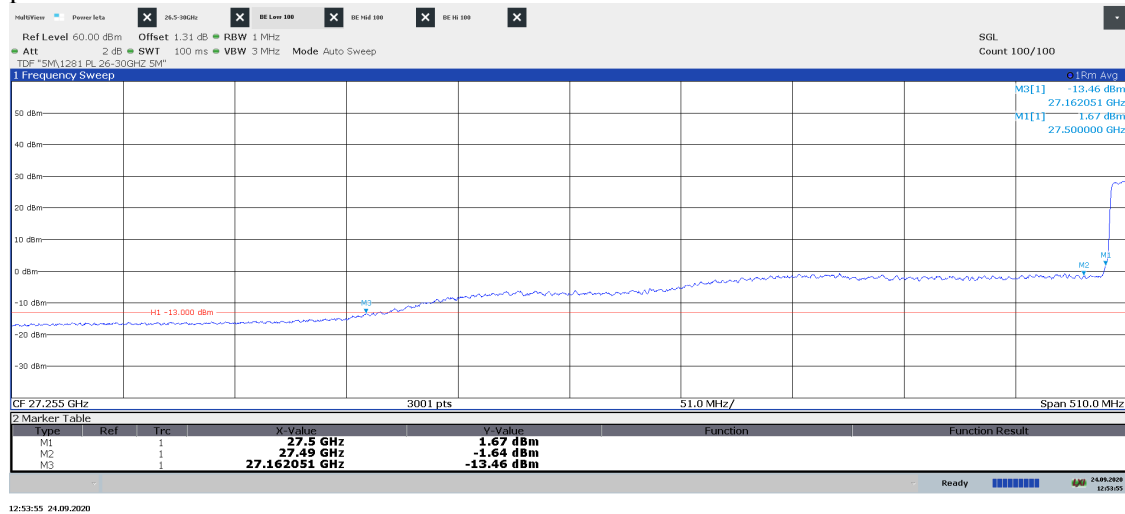
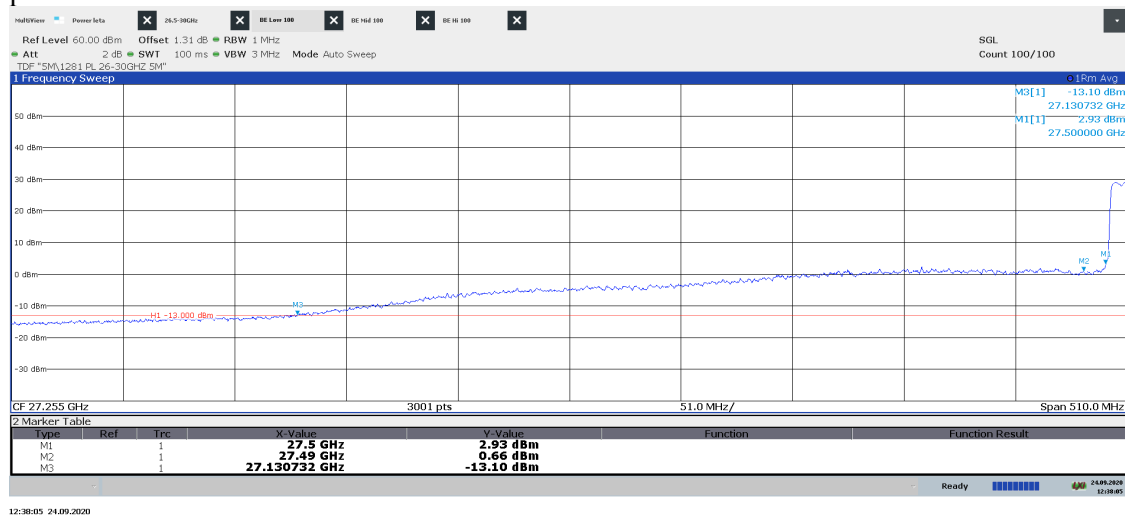
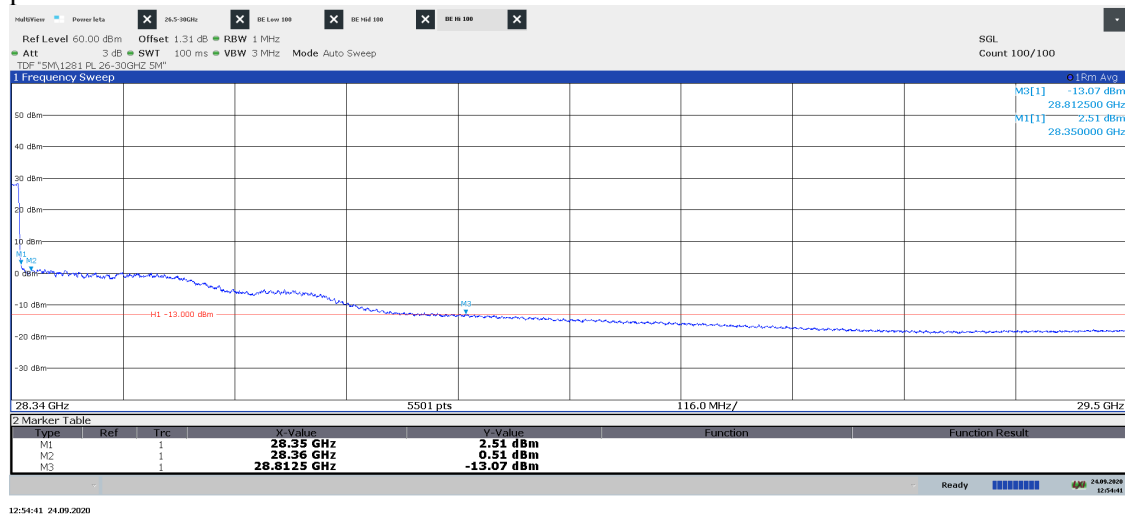
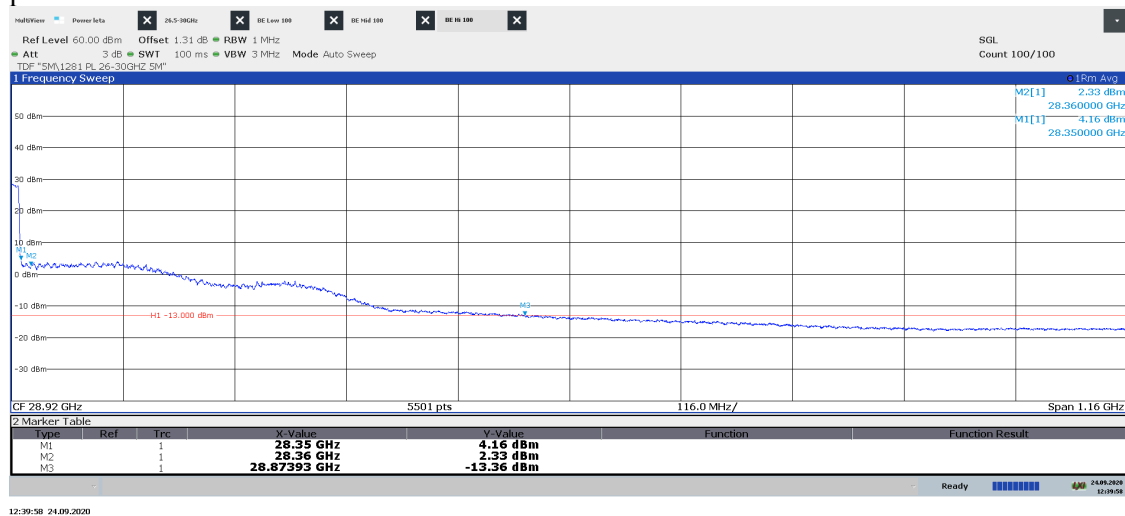
Diagram 2.11a: Pre scan 26.5 – 30 GHz, Symbolic name: BT8₁₀₀, EIRP Horizontal polarizationDiagram 2.11b: Pre scan 26.5 – 30 GHz, Symbolic name: BT8₁₀₀, EIRP Vertical polarization

Diagram 2.11c: Pre scan 27.00 – 27.51 GHz, Symbolic name: BT8₁₀₀, EIRP Horizontal polarizationDiagram 2.11d: Pre scan 27.00 – 27.51 GHz, Symbolic name: BT8₁₀₀, EIRP Vertical polarization

Power EIRP for 27.5GHz Hor/ Ver [dBm]	Power EIRP for 27.49 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 27.5 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 27.49 GHz (Limit -13 dBm) [dBm]/ Verdict
1.67/ 2.93	-1.64/ 0.66	28.97/ 28.62	-23.41/ Pass	-26.08/ Pass

Diagram 2.11e: Pre scan 28.34 – 28.85 GHz, Symbolic name: BT8₁₀₀, EIRP Horizontal polarizationDiagram 2.11f: Pre scan 28.34 – 28.85 GHz, Symbolic name: BT8₁₀₀, EIRP Vertical polarization

Power EIRP for 28.35 GHz Hor/ Ver [dBm]	Power EIRP for 28.36 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 28.35 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 28.36 GHz (Limit -13 dBm) [dBm]/ Verdict
2.51/ 4.16	0.51/ 2.33	28.93/ 28.83	-22.44/ Pass	-24.34/ Pass

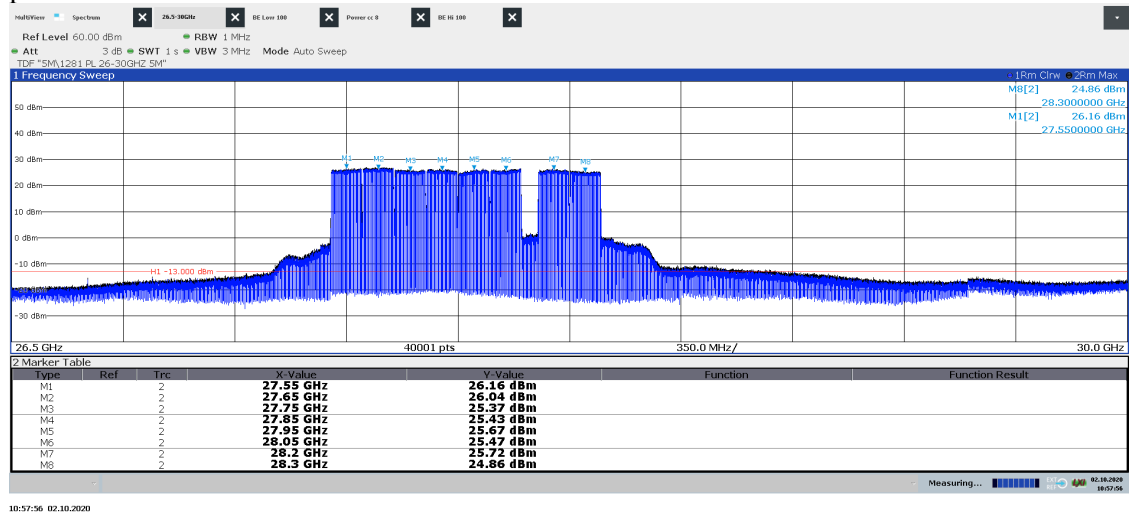
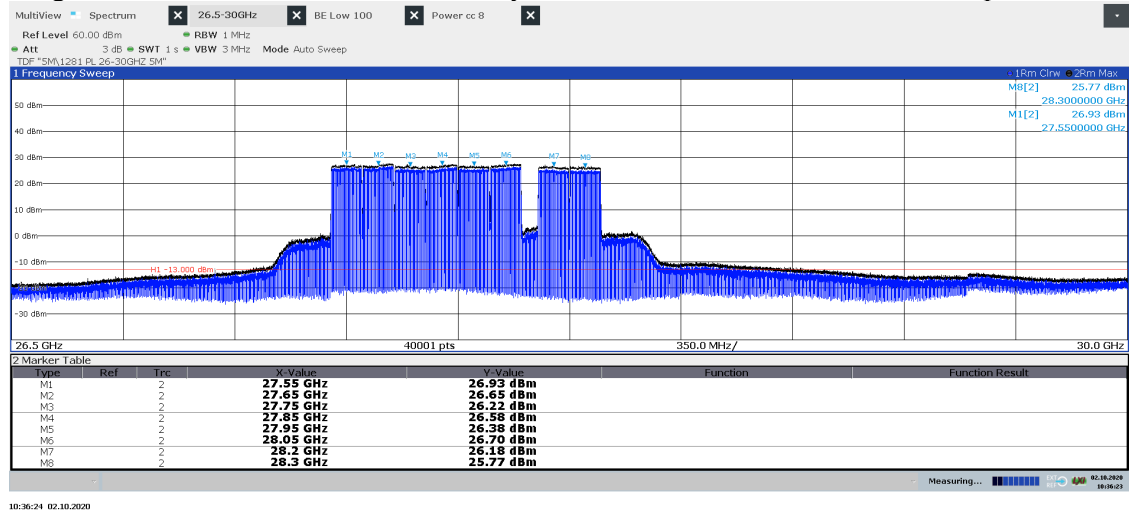
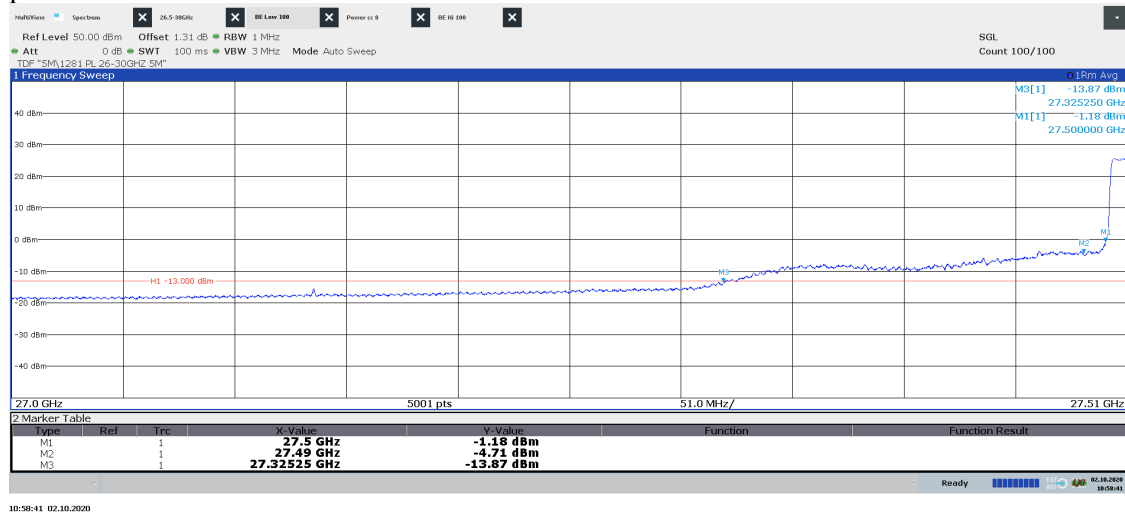
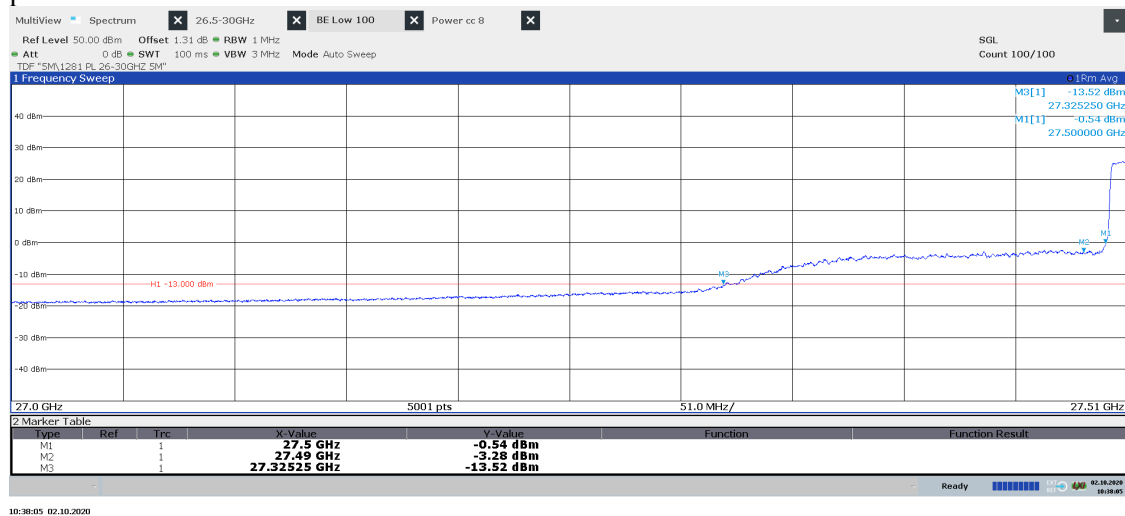
Diagram 2.12a: Pre scan 26.5 – 30 GHz, Symbolic name: BMT8₁₀₀, EIRP Horizontal polarizationDiagram 2.12b: Pre scan 26.5 – 30 GHz, Symbolic name: BMT8₁₀₀, EIRP Vertical polarization

Diagram 2.12c: Pre scan 27.00 – 27.51 GHz, Symbolic name: BMT8₁₀₀, EIRP Horizontal polarizationDiagram 2.12d: Pre scan 27.00 – 27.51 GHz, Symbolic name: BMT8₁₀₀, EIRP Vertical polarization

Power EIRP for 27.5GHz Hor/ Ver [dBm]	Power EIRP for 27.49 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 27.5 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 27.49 GHz (Limit -13 dBm) [dBm]/ Verdict
-1.18/ -0.54	-4.71/ -3.28	25.96/ 25.41	-23.49/ Pass	-26.56/ Pass

Diagram 2.12e: Pre scan 28.34 – 28.85 GHz, Symbolic name: BMT8₁₀₀, EIRP Horizontal polarization


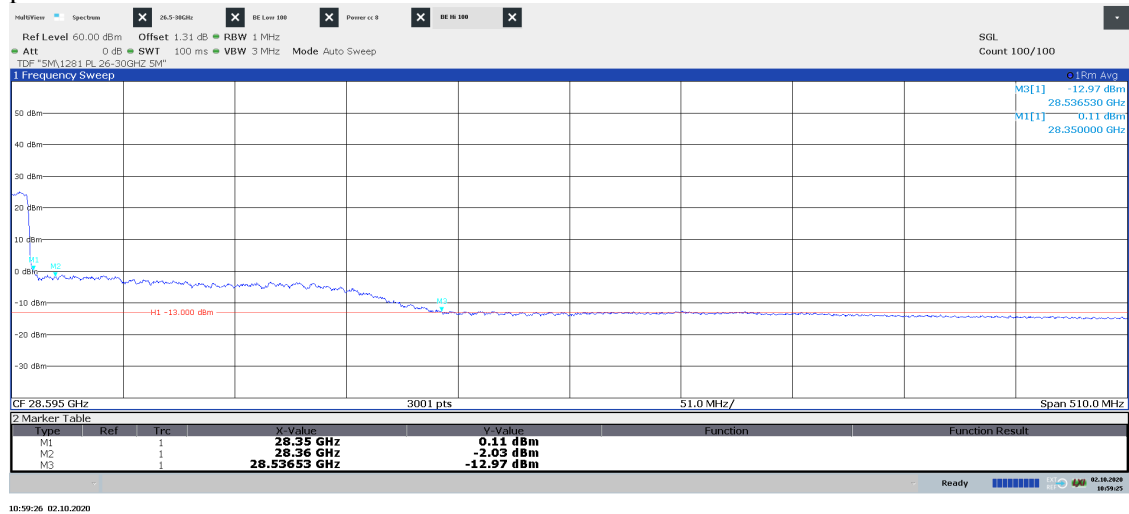


Diagram 2.12f: Pre scan 28.34 – 28.85 GHz, Symbolic name: BMT8₁₀₀, EIRP Vertical polarization

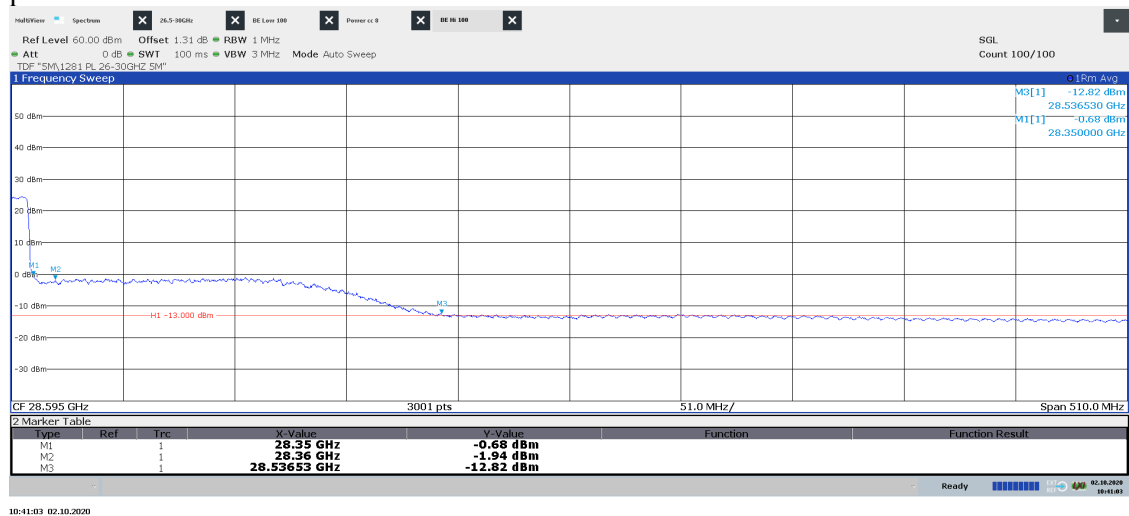

Power EIRP for 28.35 GHz Hor/ Ver [dBm]	Power EIRP for 28.36 GHz Hor/ Ver [dBm]	Antenna Gain Hor/ Ver [dBi]	Total conducted power/BW for 28.35 GHz (Limit -5 dBm) [dBm]/ Verdict	Total conducted power/BW for 28.36 GHz (Limit -13 dBm) [dBm]/ Verdict
0.11/ -0.68	-2.03/ -1.94	25.92/ 25.60	-23.03/ Pass	-24.73/ Pass

Diagram 2.13a: Pre scan 30 – 40 GHz, Symbolic name: BL₁₀₀, EIRP Horizontal polarization
See diagram 2.13c for TRP result

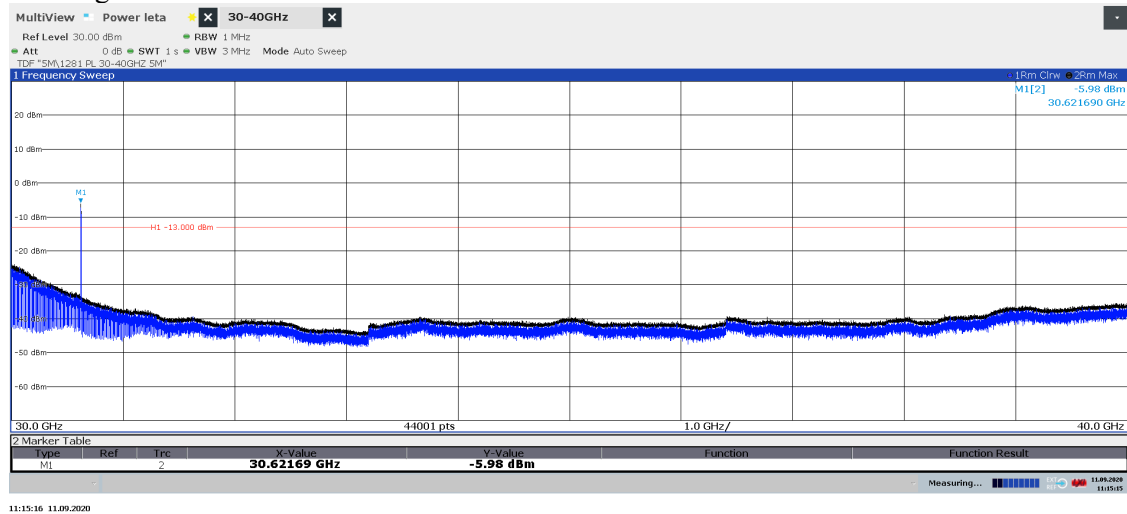


Diagram 2.13b: Pre scan 30 – 40 GHz, Symbolic name: BL₁₀₀, EIRP Vertical polarization
See diagram 2.13c for TRP result

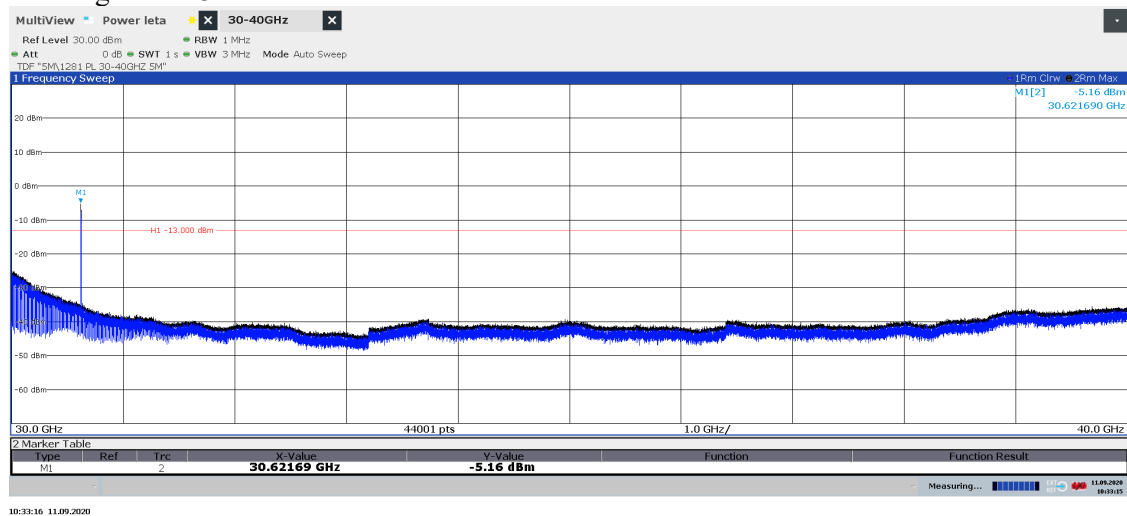


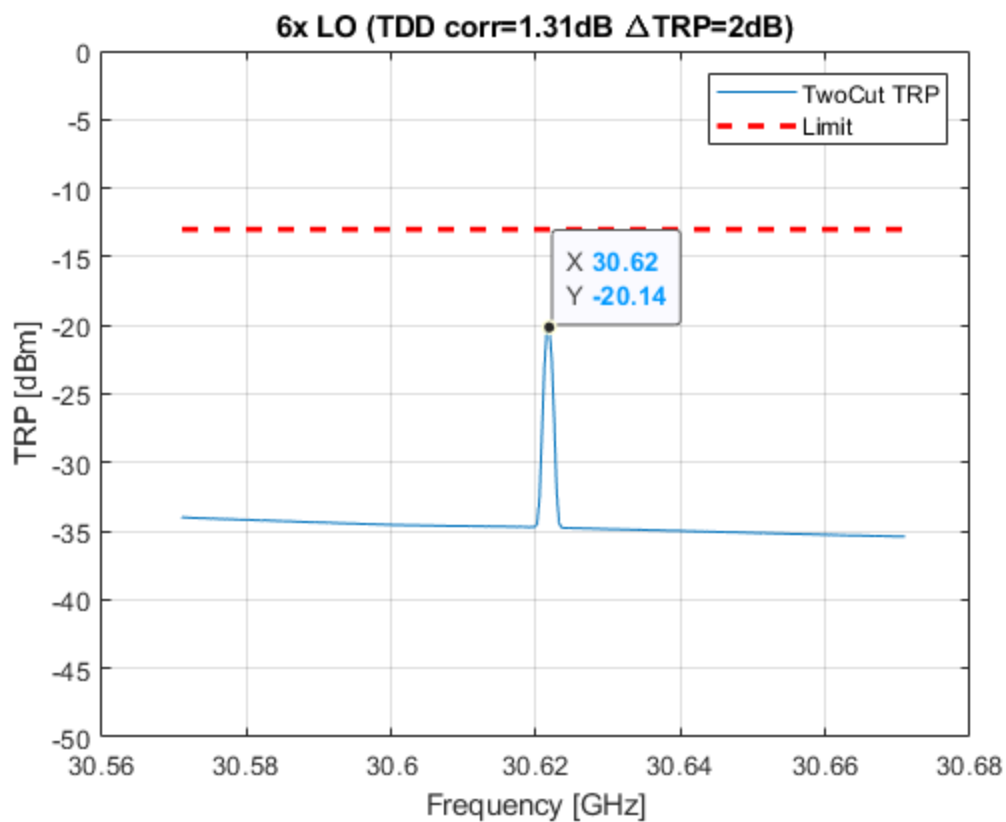
Diagram 2.13c: Two cut TRP 30.571 – 30.671 GHz 6x LO, Symbolic name: BL₁₀₀

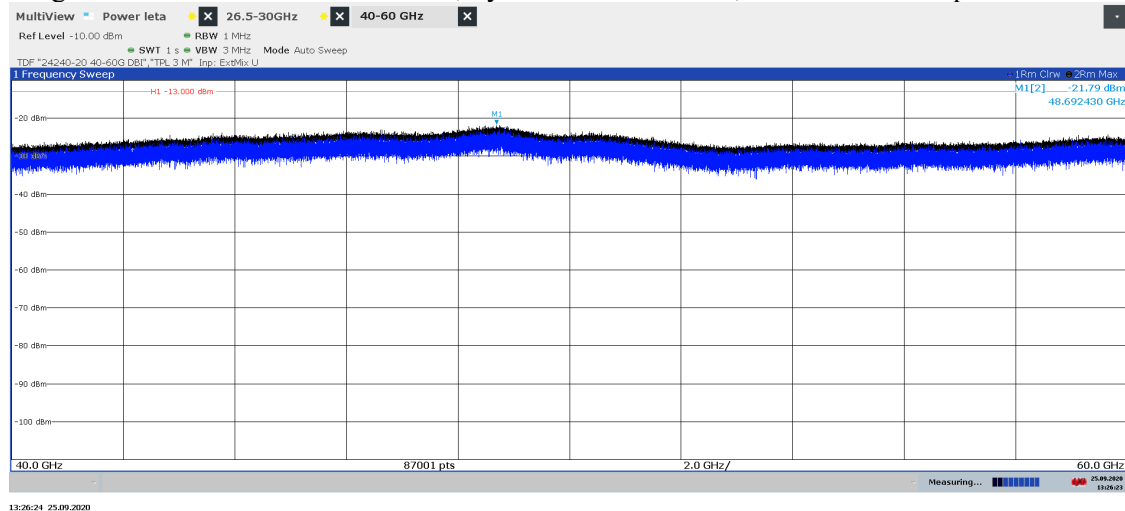
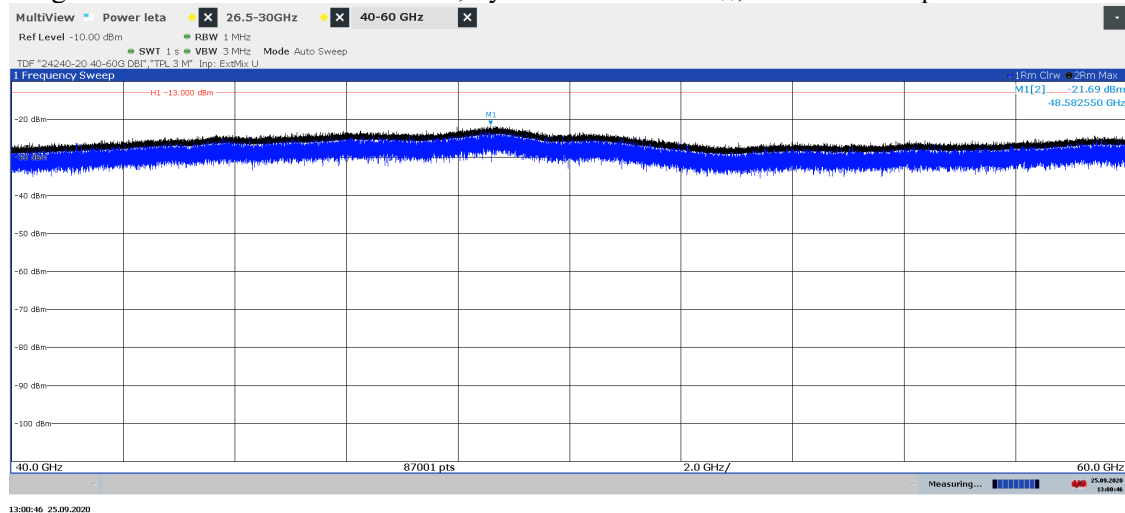
Diagram 2.14a: Pre scan 40 – 60 GHz, Symbolic name: BL₁₀₀, EIRP Horizontal polarizationDiagram 2.14b: Pre scan 40 – 60 GHz, Symbolic name: BL₁₀₀, EIRP Vertical polarization


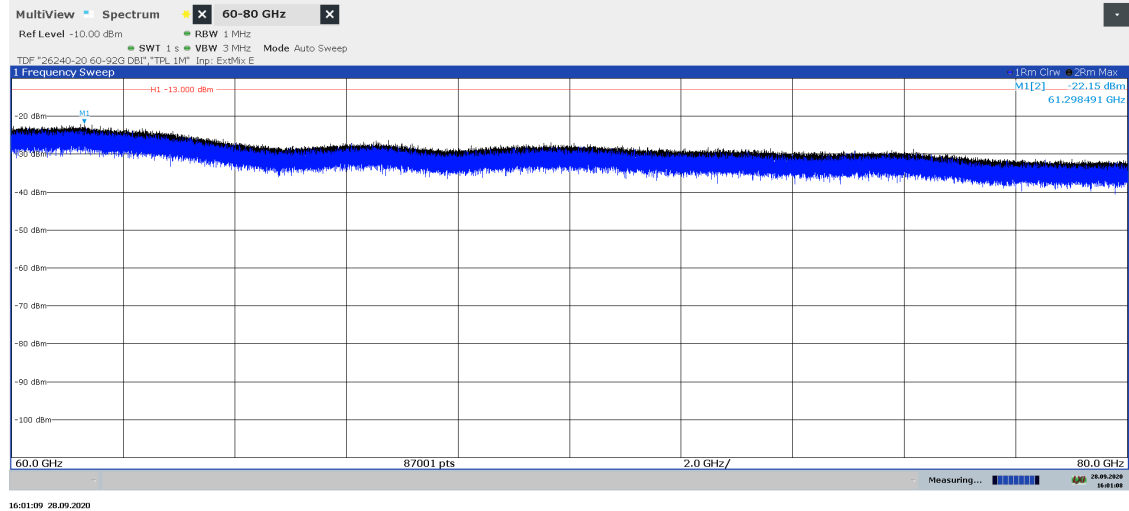
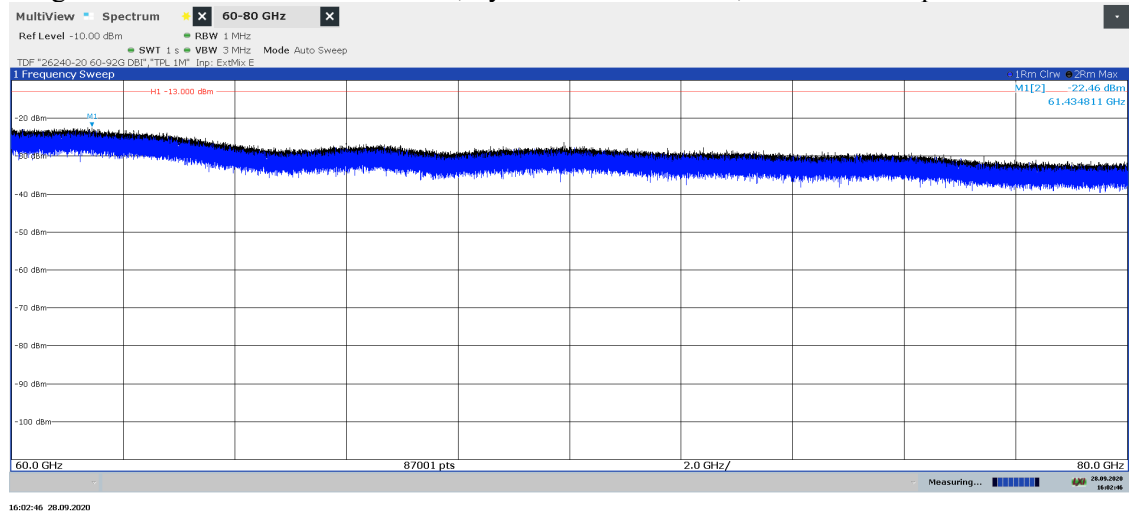
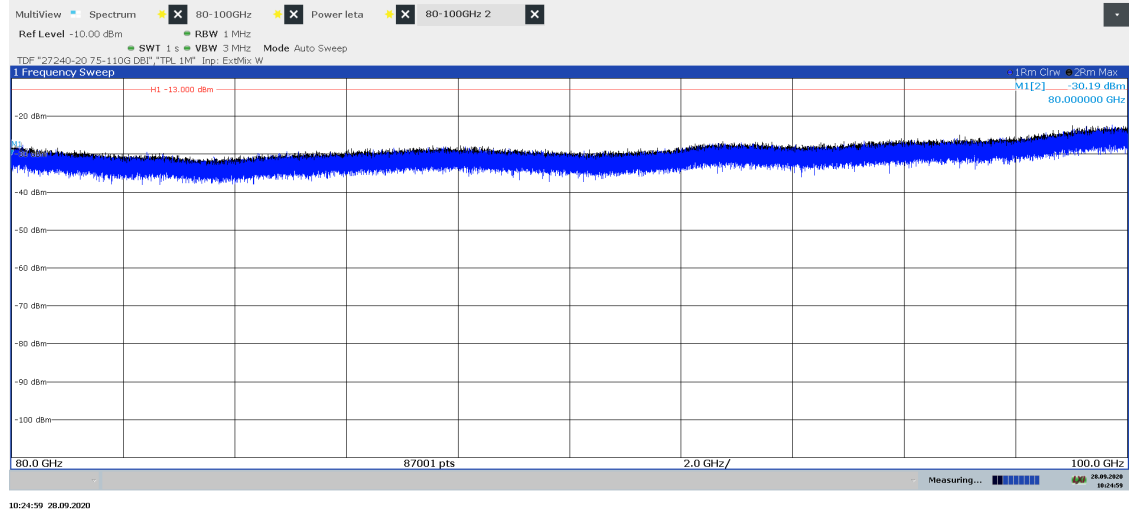
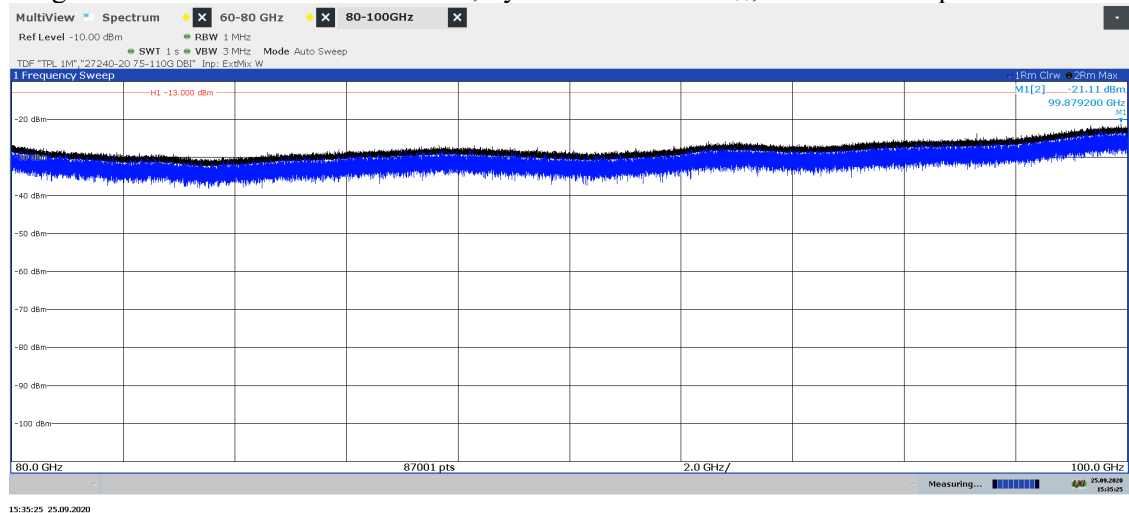
Diagram 2.15a: Pre scan 60 – 80 GHz, Symbolic name: BL₁₀₀, EIRP Horizontal polarizationDiagram 2.15b: Pre scan 60 – 80 GHz, Symbolic name: BL₁₀₀, EIRP Vertical polarization

Diagram 2.16a: Pre scan 80 – 100 GHz, Symbolic name: BL₁₀₀, EIRP Horizontal polarizationDiagram 2.16b: Pre scan 80 – 100 GHz, Symbolic name: BL₁₀₀, EIRP Vertical polarization


KRD 901 100/5 AC version:

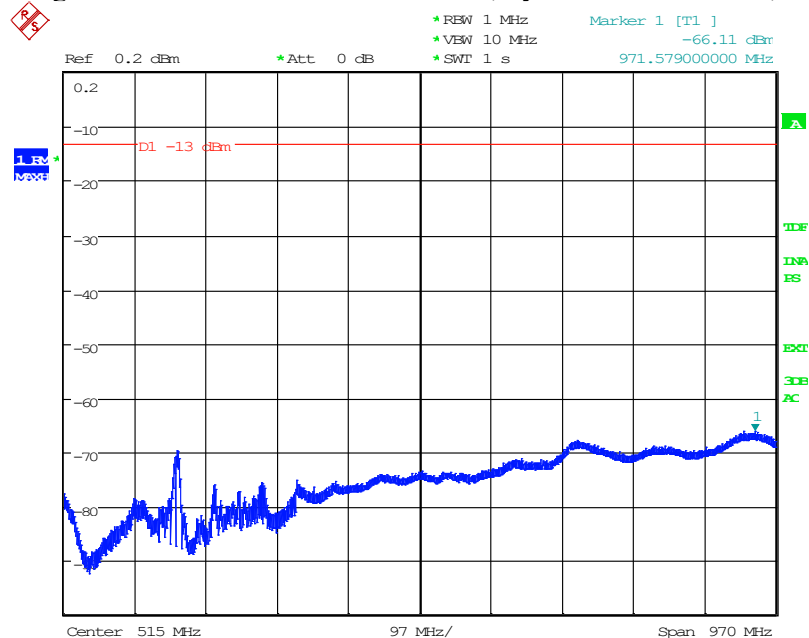Diagram 2.17a: Pre scan 30 – 1000 MHz, Symbolic name: BL₁₀₀, EIRP Horizontal polarization



Date: 2.OCT.2020 14:25:37

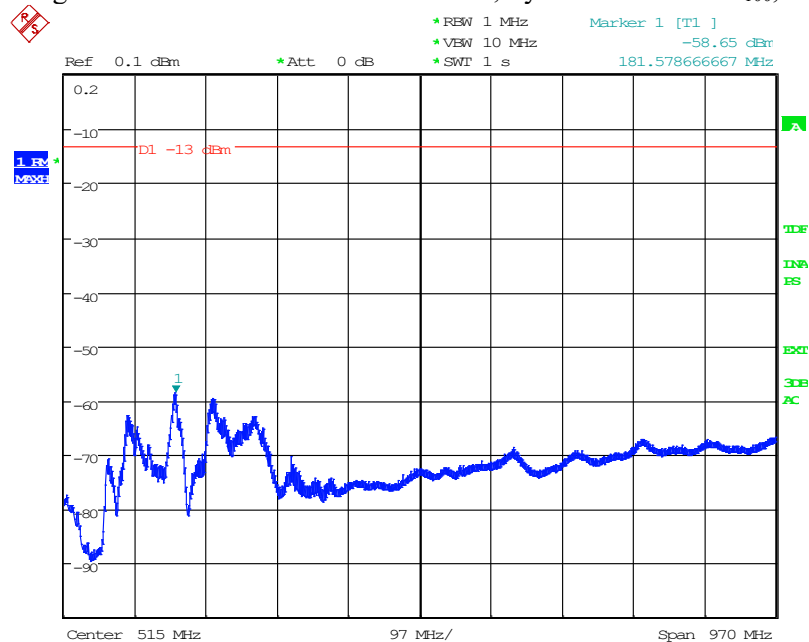Diagram 2.17b: Pre scan 30 – 1000 MHz, Symbolic name: BL₁₀₀, EIRP Vertical polarization



Date: 2.OCT.2020 14:29:36

Frequency stability measurements according to 47 CFR §2.1055

Date	Temperature (test equipment)	Humidity (test equipment)
2022-02-03	23 °C ± 3 °C	20 % ± 5 %
2022-02-04	23 °C ± 3 °C	20 % ± 5 %
2022-02-07	23 °C ± 3 °C	20 % ± 5 %
2022-06-30	23 °C ± 3 °C	50 % ± 5 %

Test set-up and procedure

The measurements were made per definition in ANSI C63.26, 5.6.

A temperature chamber with a RF transparent door was used and a measurement antenna was aligned outside the temperature chamber. The option NR 5G downlink measurements K144 in the spectrum analyser was used to demodulate the signal and report the frequency error.

Measurement equipment	RISE number
R&S FSW 43	902 073
RF Cable	BX50236
EMCO Horn Antenna 3116	503 279
Temperature Chamber	503 360
Testo 635, temperature and humidity meter	504 203
Multimeter Fluke 87	502 190

Results

Nominal transmitter frequency was 27900 MHz (TL₅₀) with a bandwidth of 50 MHz.

2022-02, KRD 901 100/2 DC version

Test conditions		Frequency error (Hz)
Supply voltage DC (V)	Temp. (°C)	
40.8	+20	-56
55.2	+20	-61
48.0	+20	-53
48.0	+30	-53
48.0	+40	-63
48.0	+50	-56
48.0	+10	-60
48.0	0	-54
48.0	-10	-60
48.0	-20	-54
48.0	-30	-80
Maximum freq. error (Hz)		80
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

2022-06, KRD 901 100/5 AC version

Test conditions		Frequency error (Hz)
Supply voltage AC (V)	Temp. (°C)	
102	+20	-67
138	+20	-65
120	+20	-64
Maximum freq. error (Hz)		67
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Remark


The frequency stability performance is sufficient to ensure that the fundamental emission stays within the authorized frequency band.

Photos of test object

Front side



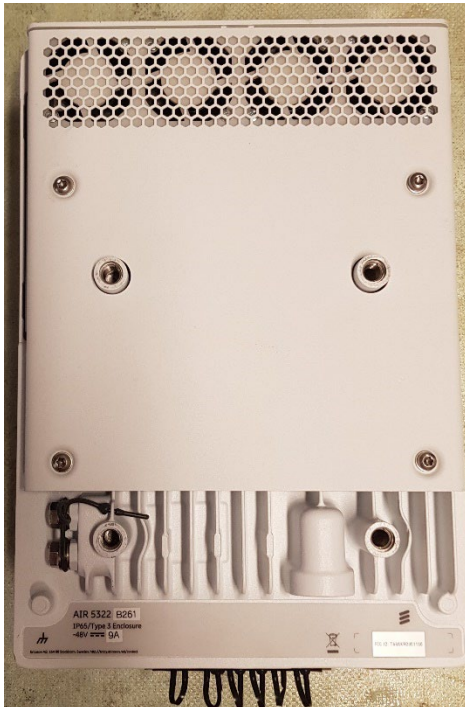
Rear side DC



Test object label DC: KRD 901 100/2



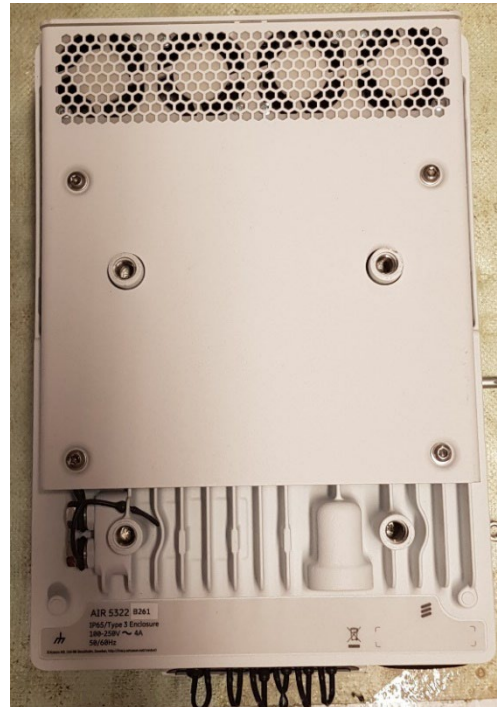Rear side AC




Test object label AC: KRD 901 100/5:



Bottom side:



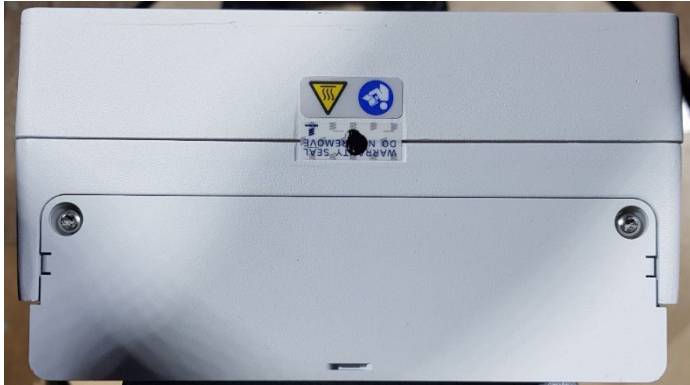Top side



Left side



Right side



End of report.