

TEST REPORT

Report No.: BCTC2104032613-2E

Applicant: NetSolution.Shop, LLC

Product Name: WiFiX NEXR5GO WiFi Router

Model/Type
reference: NEXR5GO

Tested Date: 2021-06-03 to 2021-06-18

Issued Date: 2021-06-21

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2A2F5NEXR5GO

Product Name: Wi-Fi X NEXR5GO Wi-Fi Router
Trademark: Wi-Fi X NEXR5GO
Model/Type Ref.: NEXR5GO
Prepared For: NetSolution.Shop, LLC
Address: 226 East Gay St #460, Lebanon, TN 37087, United States of America
Manufacturer: SHX-TECH LIMITED
Address: Face A., Floor4, Building 2, Jinjun Industrial Park, Yangwu Industrial Zone, Dalingshan Town, Dongguan City, Guangdong Province, China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2021-06-03
Sample tested Date: 2021-06-03 to 2021-06-18
Issue Date: 2021-06-21/2021-07-08
Report No.: BCTC2104032613-2E
FCC Part15 15.407
ANSI C63.10-2013
Test Standards KDB 662911 D01 v02r01
KDB 789033 D02 v02r01
Test Results PASS

Tested by:



Eric Yang/Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	5
2. TEST SUMMARY	6
3. MEASUREMENT UNCERTAINTY	7
4. PRODUCT INFORMATION AND TEST SETUP	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	11
4.6 table of parameters of text software setting	11
5. TEST FACILITY AND TEST INSTRUMENT USED	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. CONDUCTED EMISSIONS	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 EUT operating Conditions	14
6.5 Test Result	15
7. RADIATED EMISSIONS	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test procedure	19
7.4 EUT operating Conditions	20
7.5 Test Result	21
8. POWER SPECTRAL DENSITY TEST	30
8.1 Block Diagram Of Test Setup	30
8.2 Limit	30
8.3 Test procedure	31
8.4 EUT operating Conditions	31
8.5 Test Result	32
9. 26DB & 6DB & 99% EMISSION BANDWIDTH	38
9.1 Block Diagram Of Test Setup	38
9.2 Limit	38
9.3 Test procedure	38
9.4 EUT operating Conditions	39
9.5 Test Result	39
10. MAXIMUM CONDUCTED OUTPUT POWER	53
10.1 Block Diagram Of Test Setup	53

10.2	Limit	53
10.3	Test procedure	53
10.4	EUT operating Conditions.....	54
10.5	Test Result	55
11.	OUT OF BAND EMISSIONS	57
11.1	Block Diagram Of Test Setup.....	57
11.2	Limit	57
11.3	Test procedure	57
11.4	EUT operating Conditions.....	57
11.5	Test Result	58
12.	SPURIOUS RF CONDUCTED EMISSIONS	64
12.1	Block Diagram Of Test Setup.....	64
12.2	Limit	64
12.3	Test procedure	64
12.4	Test Result	65
13.	FREQUENCY STABILITY MEASUREMENT	74
14.	ANTENNA REQUIREMENT	81
14.1	Limit	81
14.2	EUT ANTENNA	81
15.	EUT PHOTOGRAPHS	82
16.	EUT TEST SETUP PHOTOGRAPHS.....	83

(Note: N/A means not applicable)

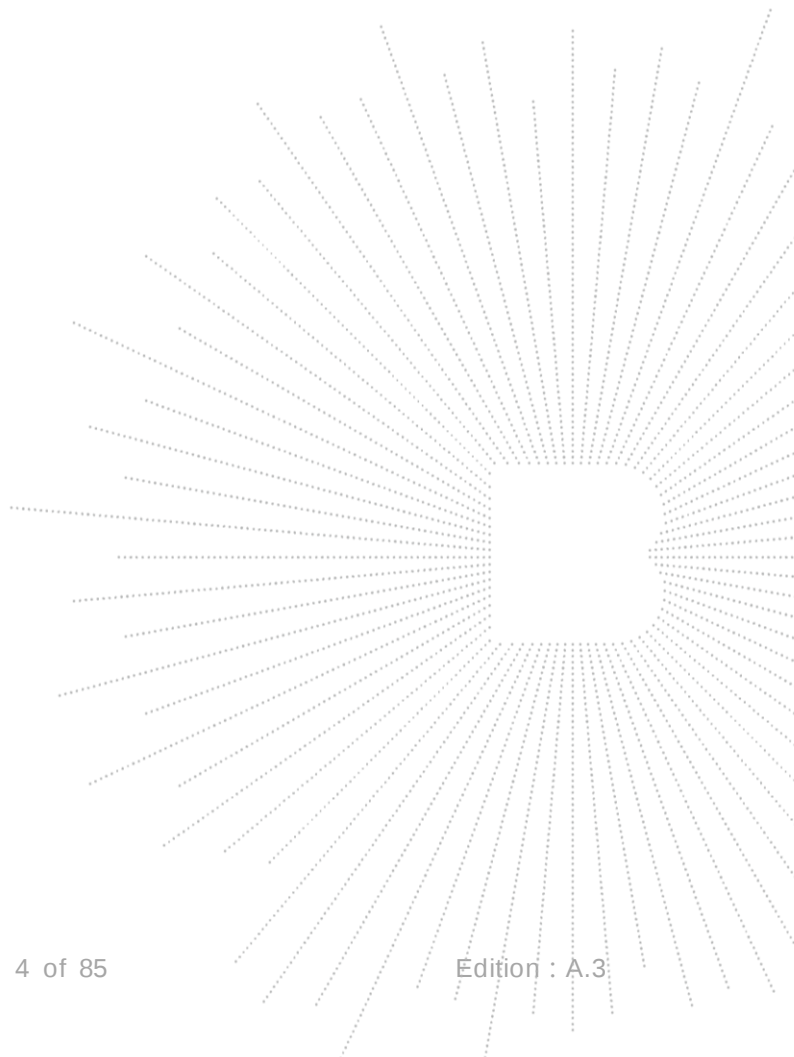

1. VERSION

Report No.	Issue Date	Description	Approved
BCTC2104032613-2E	2021-06-21	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	PASS
2	Conducted Emission	15.207	PASS
3	26 dB and 99% Emission Bandwidth	15.407 (a)(12) 15.1049	PASS
4	Minimum 6 dB bandwidth	15.407(e)	PASS
5	Maximum Conducted Output Power	15.407 (a)(1) 15.407 (a)(3)	PASS
6	Band Edge	2.1051, 15.407(b)(1) 15.407(b)(4)	PASS
7	Power Spectral Density	15.407 (a)(1) 15.407 (a)(3)	PASS
8	Spurious Emissions at Antenna Terminals	2.1051, 15.407(b)	PASS
9	Frequency Stability Measurement	15.407(g)	PASS
10	Antenna Requirement	15.203	PASS

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59°C

4. PRODUCT INFORMATION AND TEST SETUP


4.1 Product Information

Model/Type Ref.:	NEXR5GO
Model differences:	N/A
IEEE 802.11 WLAN Mode Supported	802.11a/n (20MHz channel bandwidth) 802.11n (40MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n(HT20); 5190-5230MHz for 802.11n(HT40); 5745-5825 MHz for 802.11a/n(HT20); 5755-5795 MHz for 802.11n(HT40);
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40): MCS0-MCS15;
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n;
Number Of Channel	4 channels for 802.11a/n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ; 5 channels for 802.11a/n20 in the 5745-5825MHz band ; 2 channels for 802.11 n40 in the 5755-5795MHz band ;
Antenna installation:	External antenna
Antenna Gain:	2dBi
Ratings:	DC 12V From adapter
Adapter:	Model No.: RKP-UL2402000DP-4 Input: AC 100-240V 50/60Hz Output: DC 15V 2000mA


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-2	Adapter	N/A	RKP-UL2402 000DP-4	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.0M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

802.11a/n (20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11n (40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

Frequency and Channel list for 802.11a/n (20 MHz) band IV (5745-5825MHz):

802.11a/n (20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a / n 20 CH36/ CH40/ CH 48 802.11a /n 20 CH149/ CH157/ CH 165
Mode 2	802.11n40 CH38/ CH 46 802.11n40 CH 151 / CH 159
Mode 3	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 3	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n 20 CH36/ CH40/ CH 48 802.11a /n 20 CH149/ CH157/ CH 165
Mode 2	802.11n40 CH38/ CH 46 802.11n40 CH 151 / CH 159

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

4.6 table of parameters of text software setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	argui.exe		
Parameters	DEF	DEF	DEF

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583


5.2 Test Instrument Used

Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
LISN	R&S	ENV216	101375	May 28, 2021	May 27, 2022
ISN	HPX	ISN T800	S1509001	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

Measuring equipment					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
Receiver	R&S	ESRP	101154	May 28, 2021	May 27, 2022
Amplifier	SKET	LAPA_01G 18G-45dB	\	May 28, 2021	May 27, 2022
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 28, 2021	May 27, 2022
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163- 942	Jun. 01, 2021	May 31, 2022
Horn Antenna	SCHWARZBE CK	BBHA9120 D	1201	Jun. 02, 2021	Jun. 01, 2022
Horn Antenna (18GHz-40GHz)	SCHWARZBE CK	BBHA9170	822	May 28, 2021	May 27, 2022
Amplifier (18GHz-40GHz)	MITEQ	TTA1840-3 5-HG	2034381	May 28, 2021	May 27, 2022
Loop Antenna (9kHz-30MHz)	SCHWARZBE CK	FMZB1519 B	014	Jun. 02, 2021	Jun. 01, 2022
RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30M Hz	B1702988- 0008	May 28, 2021	May 27, 2022
RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1G Hz	1486150	May 28, 2021	May 27, 2022
RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40G Hz	1607106	May 28, 2021	May 27, 2022
Power Metter	Keysight	E4419B	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9 300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY491000 60	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	Agilent	FSP40	100363	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. CONDUCTED EMISSIONS

6.1 Block Diagram Of Test Setup

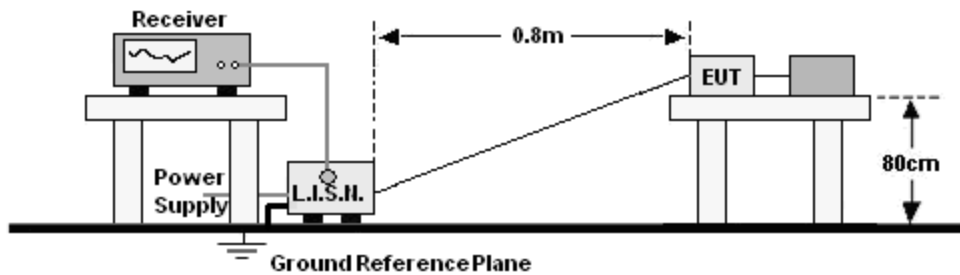

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00
Notes:		
1. *Decreasing linearly with logarithm of frequency.		
2. The lower limit shall apply at the transition frequencies.		

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

a. The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N.).

b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.


c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 TestResult

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 3

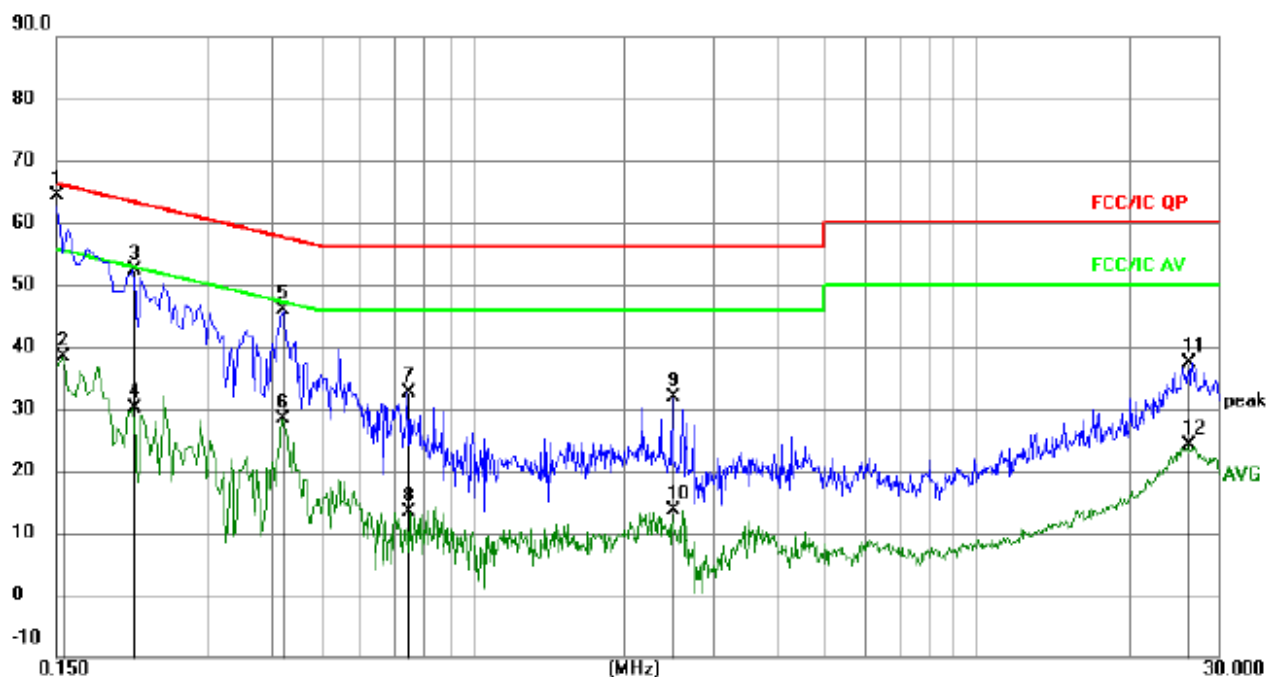


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	54.87	9.52	64.39	66.00	-1.61	QP
2		0.1545	28.77	9.51	38.28	55.75	-17.47	AVG
3		0.2130	43.02	9.48	52.50	63.09	-10.59	QP
4		0.2130	20.54	9.48	30.02	53.09	-23.07	AVG
5		0.4200	36.32	9.52	45.84	57.45	-11.61	QP
6		0.4200	18.78	9.52	28.30	47.45	-19.15	AVG
7		0.7440	22.94	9.64	32.58	56.00	-23.42	QP
8		0.7440	3.85	9.64	13.49	46.00	-32.51	AVG
9		2.4900	22.14	9.62	31.76	56.00	-24.24	QP
10		2.4900	4.11	9.62	13.73	46.00	-32.27	AVG
11		26.2680	27.57	9.73	37.30	60.00	-22.70	QP
12		26.2680	14.44	9.73	24.17	50.00	-25.83	AVG

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 3

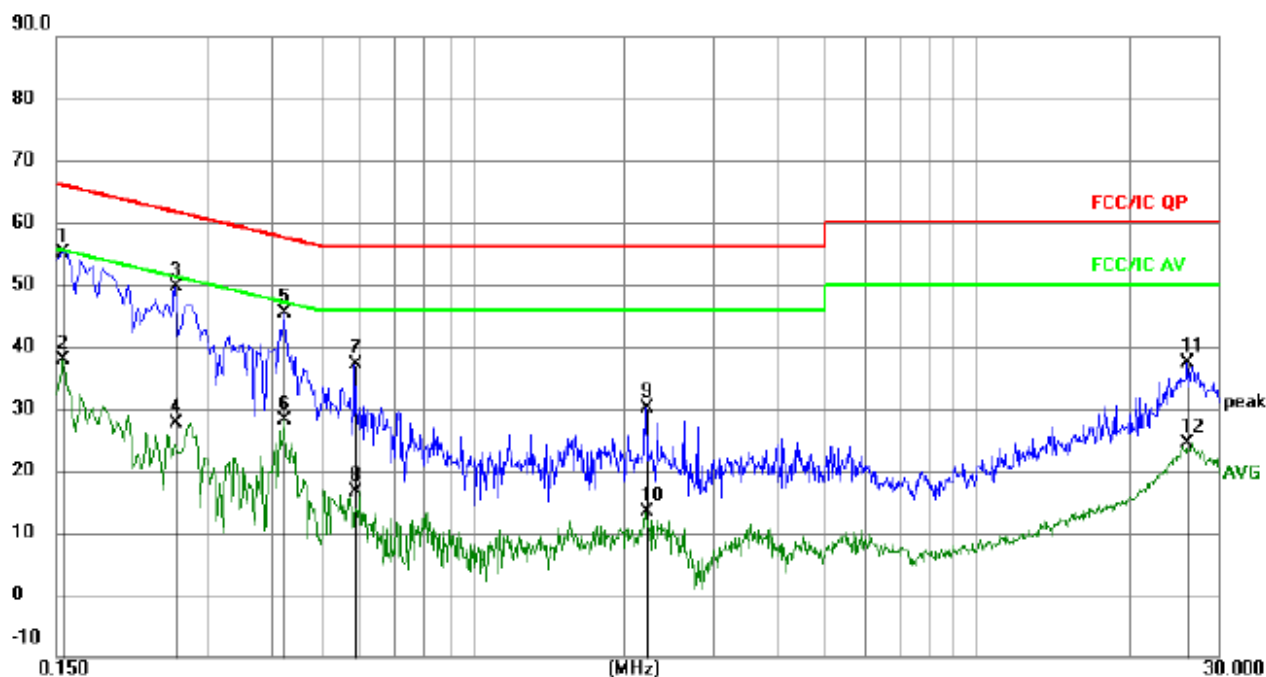

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
				dB	dBuV	dBuV	dB	
1	*	0.1544	45.60	9.51	55.11	65.76	-10.65	QP
2		0.1544	28.42	9.51	37.93	55.76	-17.83	AVG
3		0.2580	40.10	9.53	49.63	61.50	-11.87	QP
4		0.2580	18.22	9.53	27.75	51.50	-23.75	AVG
5		0.4245	35.78	9.52	45.30	57.36	-12.06	QP
6		0.4245	18.59	9.52	28.11	47.36	-19.25	AVG
7		0.5864	27.10	9.94	37.04	56.00	-18.96	QP
8		0.5864	6.64	9.94	16.58	46.00	-29.42	AVG
9		2.2064	20.58	9.60	30.18	56.00	-25.82	QP
10		2.2064	3.77	9.60	13.37	46.00	-32.63	AVG
11		26.1195	27.67	9.73	37.40	60.00	-22.60	QP
12		26.1195	14.70	9.73	24.43	50.00	-25.57	AVG


7. RADIATED EMISSIONS

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

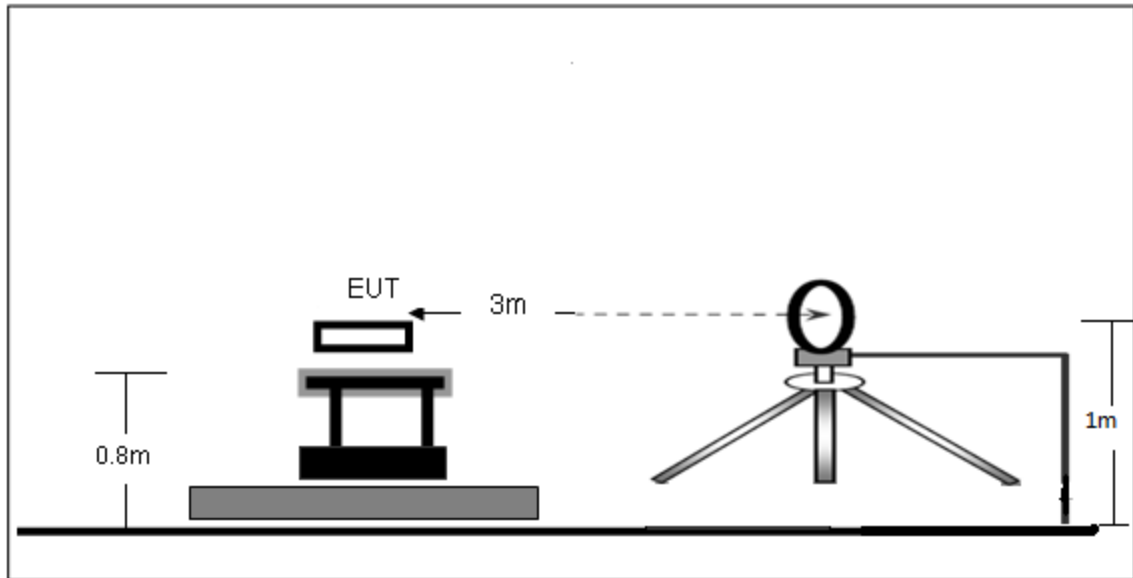

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

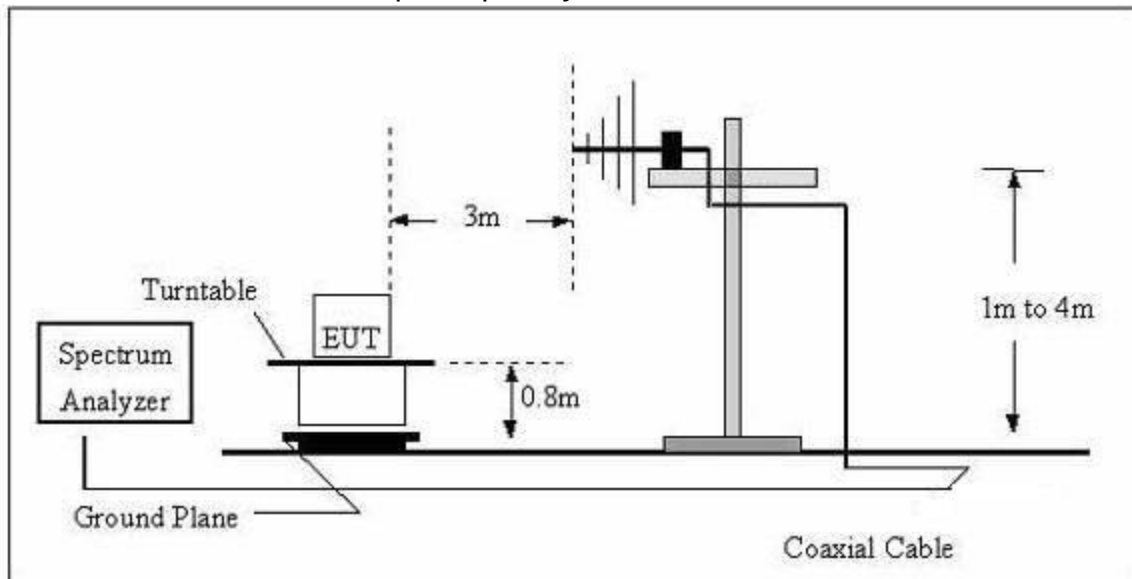

(C) Radiated Emission Test-Up Frequency Above 1GHz

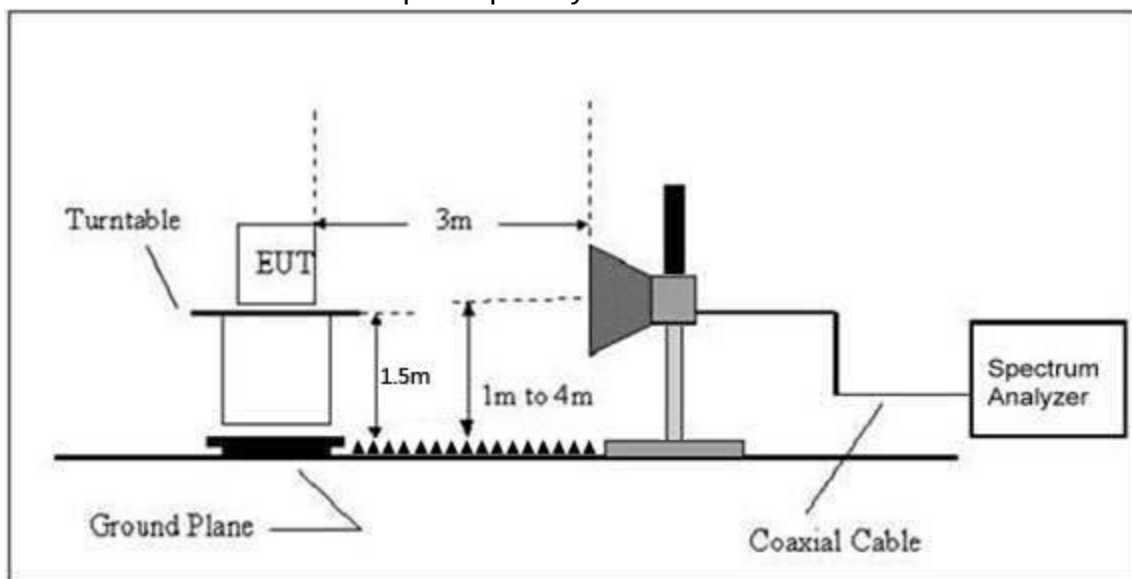

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Distance	Field Strength Limit at 3m Distance	
(MHz)	uV/m	(m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.

It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 3M Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490MHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490KHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

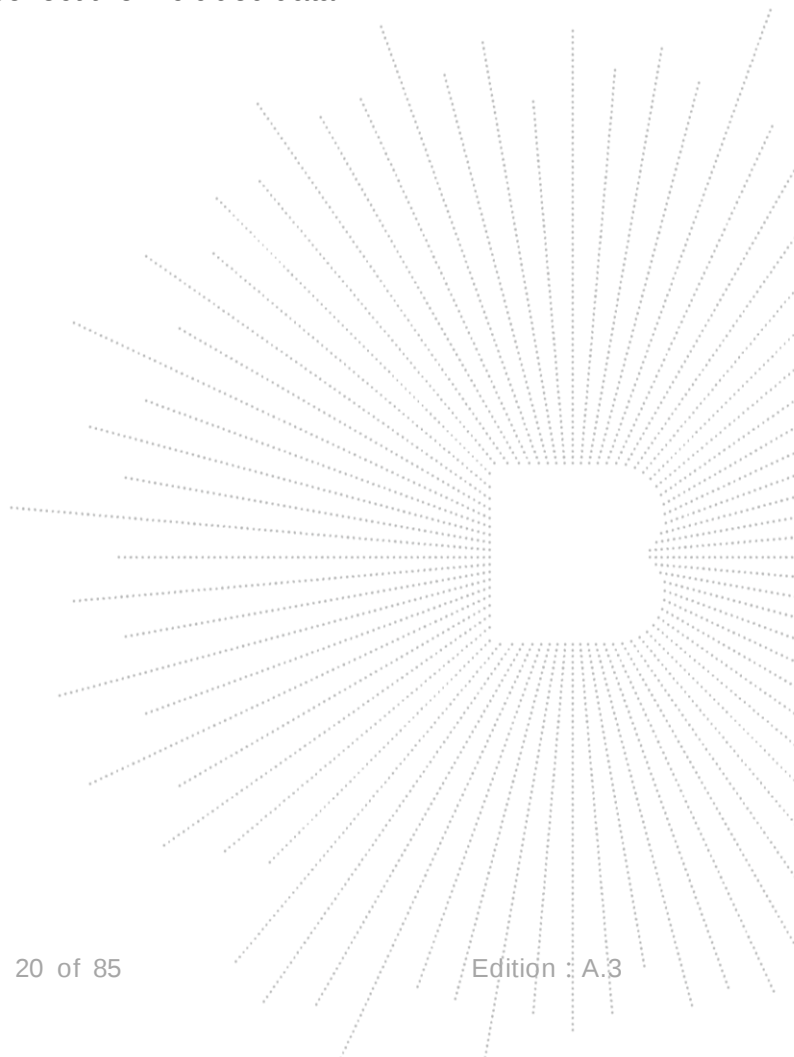

7.5 TestResult

Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage :	AC120V/60Hz
Test Mode :	Mode 3	Polarization :	--


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

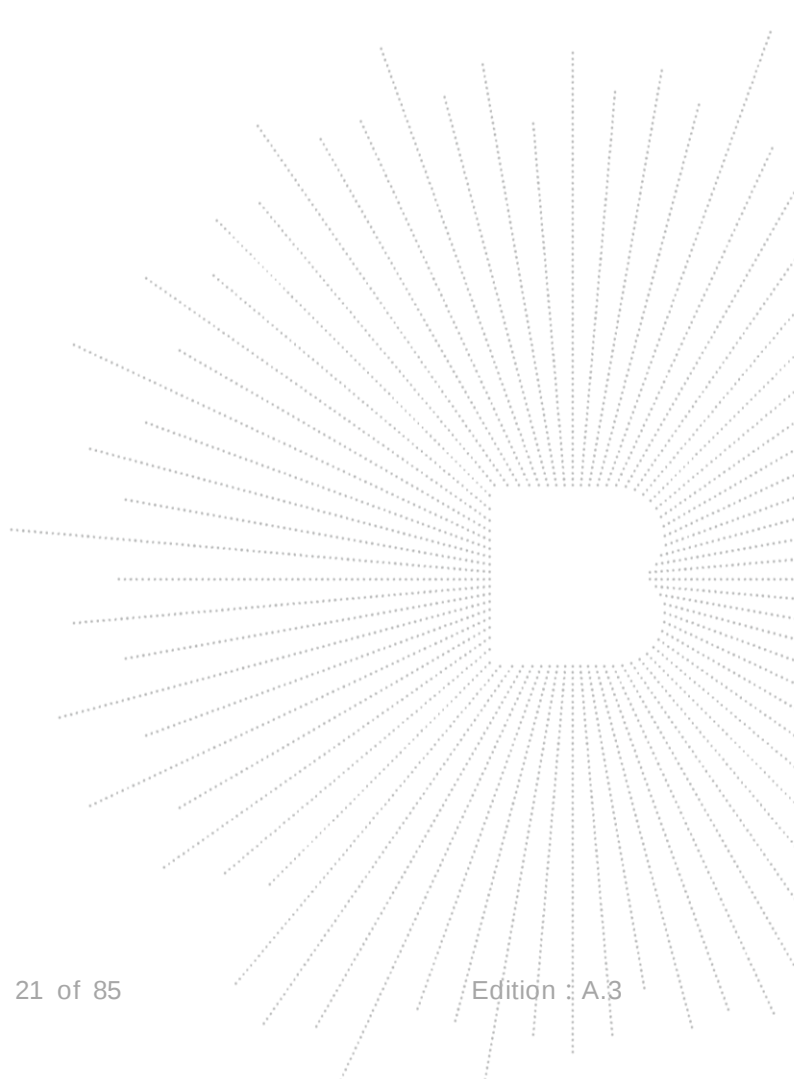

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	AC120V/60Hz
Test Mode :	Mode 3	Polarization :	Horizontal

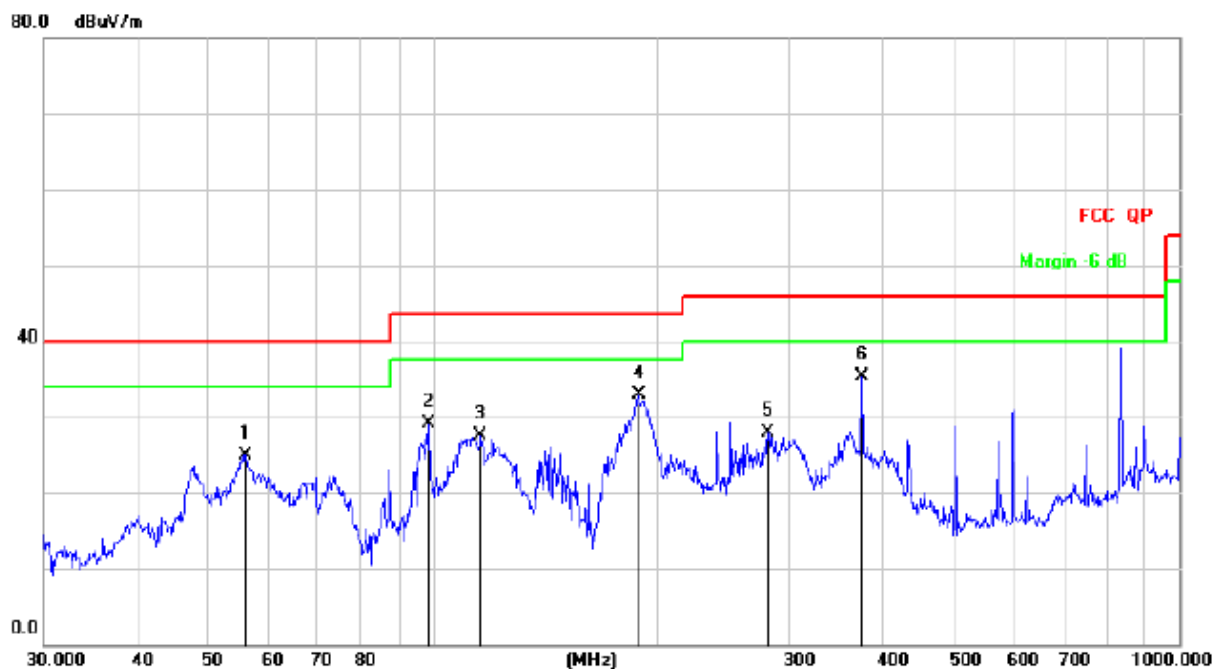


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		56.0007	40.47	-15.49	24.98	40.00	-15.02	QP
2		98.4866	45.59	-16.56	29.03	43.50	-14.47	QP
3		115.7256	44.74	-17.29	27.45	43.50	-16.05	QP
4	*	188.4125	49.86	-17.04	32.82	43.50	-10.68	QP
5		281.0075	42.14	-14.19	27.95	46.00	-18.05	QP
6		375.9385	46.88	-11.64	35.24	46.00	-10.76	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	AC120V/60Hz
Test Mode :	Mode 3	Polarization :	Vertical

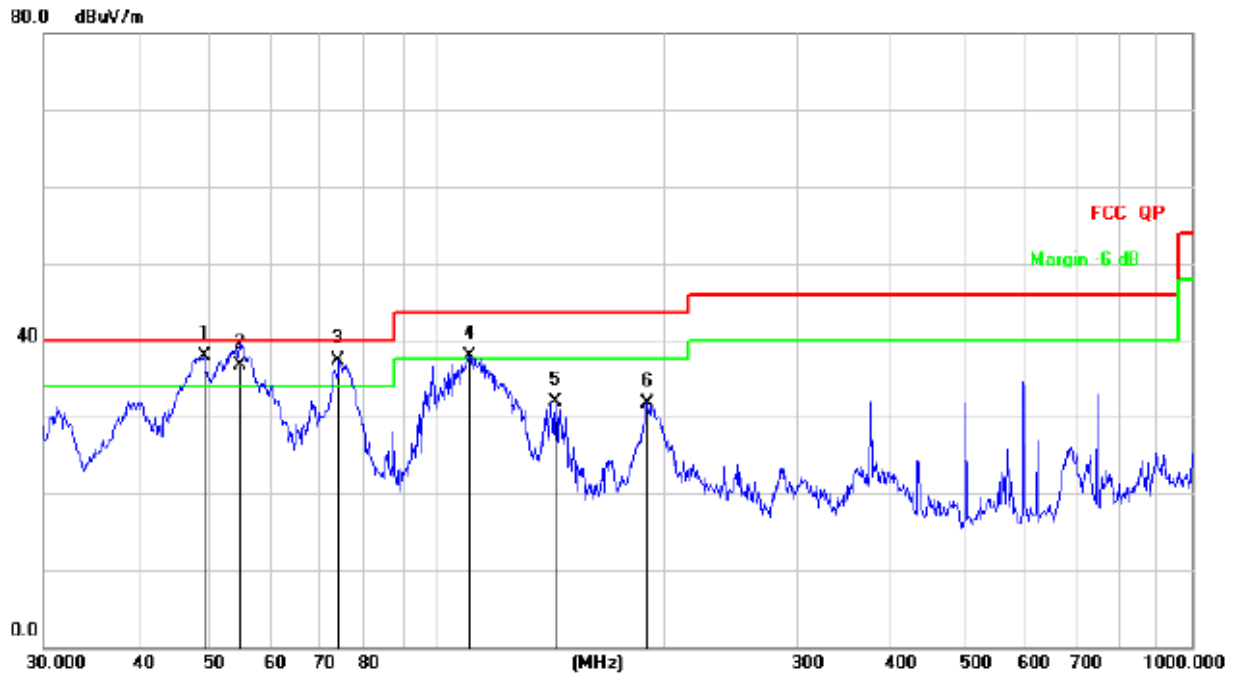

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	49.0144	52.81	-14.91	37.90	40.00	-2.10	QP
2	!	54.7829	52.05	-15.36	36.69	40.00	-3.31	QP
3	!	73.8756	56.38	-19.05	37.33	40.00	-2.67	QP
4	!	110.1816	54.93	-16.94	37.99	43.50	-5.51	QP
5		143.3260	50.97	-19.07	31.90	43.50	-11.60	QP
6		189.7384	48.70	-16.96	31.74	43.50	-11.76	QP

Between 1GHz – 40GHz

Test Mode :	TX(5.1G) - 802.11a
-------------	--------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.154	63.62	5.94	35.40	44.00	60.96	68.20	-7.24	PK
V	4434.154	43.31	5.94	35.40	44.00	40.65	54.00	-13.35	AV
V	10360.100	61.56	8.46	39.75	44.50	65.27	74.00	-8.73	PK
V	10360.100	43.52	8.46	39.75	44.50	47.23	54.00	-6.77	AV
V	15540.090	61.19	10.12	38.80	44.10	66.01	74.00	-7.99	PK
V	15540.090	43.54	10.12	38.80	42.70	49.76	54.00	-4.24	AV
H	4434.145	62.55	5.94	35.18	44.00	59.67	68.20	-8.53	PK
H	4434.145	43.21	5.94	35.18	44.00	40.33	54.00	-13.67	AV
H	10360.114	50.13	8.46	38.71	44.50	52.80	74.00	-21.20	PK
H	10360.114	43.73	8.46	38.71	44.50	46.40	54.00	-7.60	AV
H	15540.194	51.37	10.12	38.38	44.10	55.77	74.00	-18.23	PK
H	15540.194	41.12	10.12	38.38	44.10	45.52	54.00	-8.48	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.051	64.37	6.48	36.35	44.05	63.15	74.00	-10.85	PK
V	4592.051	43.84	6.48	36.35	44.05	42.62	54.00	-11.38	AV
V	10400.073	64.84	8.47	37.88	44.51	66.68	68.20	-1.52	PK
V	10400.073	43.94	8.47	37.88	44.51	45.78	54.00	-8.22	AV
V	15600.170	60.36	10.12	38.80	44.10	65.18	74.00	-8.82	PK
V	15600.170	43.27	10.12	38.80	42.70	49.49	54.00	-4.51	AV
H	4592.063	64.62	6.48	36.37	44.05	63.42	74.00	-10.58	PK
H	4592.063	43.47	6.48	36.37	44.05	42.27	54.00	-11.73	AV
H	10400.073	50.13	8.47	38.64	44.50	52.74	68.20	-15.46	PK
H	10400.073	42.87	8.47	38.64	44.50	45.48	54.00	-8.52	AV
H	15600.163	50.45	10.12	38.38	44.10	54.85	74.00	-19.15	PK
H	15600.163	41.71	10.12	38.38	44.10	46.11	54.00	-7.89	AV
High Channel (5240 MHz)-Above 1G									
V	4739.174	63.88	7.10	37.24	43.50	64.72	74.00	-9.28	PK
V	4739.174	43.11	7.10	37.24	43.50	43.95	54.00	-10.05	AV
V	10480.073	64.13	8.46	37.68	44.50	65.77	68.20	-2.43	PK
V	10480.073	43.96	8.46	37.68	44.50	45.60	54.00	-8.40	AV
V	15720.055	61.76	10.12	38.80	44.10	66.58	74.00	-7.42	PK
V	15720.055	43.26	10.12	38.80	42.70	49.48	54.00	-4.52	AV
H	4739.089	61.63	7.10	37.24	43.50	62.47	74.00	-11.53	PK
H	4739.089	43.25	7.10	37.24	43.50	44.09	54.00	-9.91	AV
H	10480.011	53.09	8.46	38.57	44.50	55.62	68.20	-12.58	PK
H	10480.011	40.26	8.46	38.57	44.50	42.79	54.00	-11.21	AV
H	15720.058	50.11	10.12	38.38	44.10	54.51	74.00	-19.49	PK
H	15720.058	41.75	10.12	38.38	44.10	46.15	54.00	-7.85	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(5.1G) - 802.11n-HT20
-------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenn a Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.162	61.55	5.94	35.40	44.00	58.89	68.20	-9.31	PK
V	4434.162	43.29	5.94	35.40	44.00	40.63	54.00	-13.37	AV
V	10360.029	62.63	8.46	39.75	44.50	66.34	68.20	-1.86	PK
V	10360.029	43.35	8.46	39.75	44.50	47.06	54.00	-6.94	AV
V	15540.134	64.25	10.12	38.80	44.10	69.07	74.00	-4.93	PK
V	15540.134	43.02	10.12	38.80	42.70	49.24	54.00	-4.76	AV
H	4434.195	60.53	5.94	35.18	44.00	57.65	68.20	-10.55	PK
H	4434.195	43.34	5.94	35.18	44.00	40.46	54.00	-13.54	AV
H	10360.154	53.77	8.46	38.71	44.50	56.44	68.20	-11.76	PK
H	10360.154	40.14	8.46	38.71	44.50	42.81	54.00	-11.19	AV
H	15540.003	50.56	10.12	38.38	44.10	54.96	74.00	-19.04	PK
H	15540.003	42.24	10.12	38.38	44.10	46.64	54.00	-7.36	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.017	61.88	6.48	36.35	44.05	60.66	74.00	-13.34	PK
V	4592.017	43.56	6.48	36.35	44.05	42.34	54.00	-11.66	AV
V	10400.127	60.62	8.47	37.88	44.51	62.46	68.20	-5.74	PK
V	10400.127	43.60	8.47	37.88	44.51	45.44	54.00	-8.56	AV
V	15600.183	63.28	10.12	38.80	44.10	68.10	74.00	-5.90	PK
V	15600.183	43.25	10.12	38.80	42.70	49.47	54.00	-4.53	AV
H	4592.199	60.88	6.48	36.37	44.05	59.68	74.00	-14.32	PK
H	4592.199	43.29	6.48	36.37	44.05	42.09	54.00	-11.91	AV
H	10400.173	50.60	8.47	38.64	44.50	53.21	68.20	-14.99	PK
H	10400.173	40.48	8.47	38.64	44.50	43.09	54.00	-10.91	AV
H	15600.134	50.29	10.12	38.38	44.10	54.69	74.00	-19.31	PK
H	15600.134	44.40	10.12	38.38	44.10	48.80	54.00	-5.20	AV
High Channel (5240 MHz)-Above 1G									
V	4739.182	62.18	7.10	37.24	43.50	63.02	74.00	-10.98	PK
V	4739.182	43.58	7.10	37.24	43.50	44.42	54.00	-9.58	AV
V	10480.017	63.59	8.46	37.68	44.50	65.23	68.20	-2.97	PK
V	10480.017	43.18	8.46	37.68	44.50	44.82	54.00	-9.18	AV
V	15720.137	62.53	10.12	38.80	44.10	67.35	74.00	-6.65	PK
V	15720.137	43.66	10.12	38.80	42.70	49.88	54.00	-4.12	AV
H	4739.098	64.44	7.10	37.24	43.50	65.28	74.00	-8.72	PK
H	4739.098	43.20	7.10	37.24	43.50	44.04	54.00	-9.96	AV
H	10480.185	52.20	8.46	38.57	44.50	54.73	68.20	-13.47	PK
H	10480.185	42.35	8.46	38.57	44.50	44.88	54.00	-9.12	AV
H	15720.173	53.38	10.12	38.38	44.10	57.78	74.00	-16.22	PK
H	15720.173	40.71	10.12	38.38	44.10	45.11	54.00	-8.89	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(5.1G) - 802.11n-HT40
-------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G									
V	4434.024	62.63	5.94	35.40	44.00	59.97	74.00	-14.03	PK
V	4434.024	43.32	5.94	35.40	44.00	40.66	54.00	-13.34	AV
V	10380.135	63.37	8.46	39.75	44.50	67.08	68.20	-1.12	PK
V	10380.135	43.99	8.46	39.75	44.50	47.70	54.00	-6.30	AV
V	15570.124	63.70	10.12	38.80	44.10	68.52	74.00	-5.48	PK
V	15570.124	43.78	10.12	38.80	42.70	50.00	54.00	-4.00	AV
H	4434.169	63.68	5.94	35.18	44.00	60.80	74.00	-13.20	PK
H	4434.169	43.20	5.94	35.18	44.00	40.32	54.00	-13.68	AV
H	10380.141	50.56	8.46	38.71	44.50	53.23	68.20	-14.97	PK
H	10380.141	44.56	8.46	38.71	44.50	47.23	54.00	-6.77	AV
H	15570.111	52.86	10.12	38.38	44.10	57.26	74.00	-16.74	PK
H	15570.111	43.69	10.12	38.38	44.10	48.09	54.00	-5.91	AV
middle Channel (5230 MHz)-Above 1G									
V	4739.175	64.01	6.48	36.35	44.05	62.79	74.00	-11.21	PK
V	4739.175	43.18	6.48	36.35	44.05	41.96	54.00	-12.04	AV
V	10460.137	64.13	8.47	37.88	44.51	65.97	68.20	-2.23	PK
V	10460.137	43.15	8.47	37.88	44.51	44.99	54.00	-9.01	AV
V	15690.139	60.91	10.12	38.80	44.10	65.73	74.00	-8.27	PK
V	15690.139	43.66	10.12	38.80	42.70	49.88	54.00	-4.12	AV
H	4739.183	61.06	6.48	36.37	44.05	59.86	74.00	-14.14	PK
H	4739.183	43.89	6.48	36.37	44.05	42.69	54.00	-11.31	AV
H	10460.186	53.15	8.47	38.64	44.50	55.76	68.20	-12.44	PK
H	10460.186	44.39	8.47	38.64	44.50	47.00	54.00	-7.00	AV
H	15690.149	50.17	10.12	38.38	44.10	54.57	74.00	-19.43	PK
H	15690.149	40.14	10.12	38.38	44.10	44.54	54.00	-9.46	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11a
-------------	----------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.163	62.97	5.94	35.40	44.00	60.31	74.00	-13.69	PK
V	4679.163	43.43	5.94	35.40	44.00	40.77	54.00	-13.23	AV
V	11490.020	61.70	8.46	39.75	44.50	65.41	68.20	-2.79	PK
V	11490.020	43.36	8.46	39.75	44.50	47.07	54.00	-6.93	AV
V	17235.034	61.50	10.12	38.80	44.10	66.32	74.00	-7.68	PK
V	17235.034	43.43	10.12	38.80	42.70	49.65	54.00	-4.35	AV
H	4679.155	61.76	5.94	35.18	44.00	58.88	74.00	-15.12	PK
H	4679.155	43.61	5.94	35.18	44.00	40.73	54.00	-13.27	AV
H	11490.000	50.42	8.46	38.71	44.50	53.09	68.20	-15.11	PK
H	11490.000	42.62	8.46	38.71	44.50	45.29	54.00	-8.71	AV
H	17235.036	52.57	10.12	38.38	44.10	56.97	74.00	-17.03	PK
H	17235.036	44.68	10.12	38.38	44.10	49.08	54.00	-4.92	AV
middle Channel (5785 MHz)-Above 1G									
V	4592.056	63.66	6.48	36.35	44.05	62.44	74.00	-11.56	PK
V	4592.056	43.22	6.48	36.35	44.05	42.00	54.00	-12.00	AV
V	11570.002	64.28	8.47	37.88	44.51	66.12	68.20	-2.08	PK
V	11570.002	43.23	8.47	37.88	44.51	45.07	54.00	-8.93	AV
V	17355.171	64.27	10.12	38.80	44.10	69.09	74.00	-4.91	PK
V	17355.171	43.85	10.12	38.80	42.70	50.07	54.00	-3.93	AV
H	4592.149	62.90	6.48	36.37	44.05	61.70	74.00	-12.30	PK
H	4592.149	43.81	6.48	36.37	44.05	42.61	54.00	-11.39	AV
H	11570.169	53.23	8.47	38.64	44.50	55.84	68.20	-12.36	PK
H	11570.169	43.32	8.47	38.64	44.50	45.93	54.00	-8.07	AV
H	17355.134	51.64	10.12	38.38	44.10	56.04	74.00	-17.96	PK
H	17355.134	44.06	10.12	38.38	44.10	48.46	54.00	-5.54	AV
High Channel (5825 MHz)-Above 1G									
V	6039.157	64.80	7.10	37.24	43.50	65.64	68.20	-2.56	PK
V	6039.157	43.68	7.10	37.24	43.50	44.52	54.00	-9.48	AV
V	11650.036	60.21	8.46	37.68	44.50	61.85	74.00	-12.15	PK
V	11650.036	43.38	8.46	37.68	44.50	45.02	54.00	-8.98	AV
V	17475.014	61.77	10.12	38.80	44.10	66.59	68.20	-1.61	PK
V	17475.014	43.74	10.12	38.80	42.70	49.96	54.00	-4.04	AV
H	6039.128	61.75	7.10	37.24	43.50	62.59	68.20	-5.61	PK
H	6039.128	43.35	7.10	37.24	43.50	44.19	54.00	-9.81	AV
H	11650.105	50.62	8.46	38.57	44.50	53.15	74.00	-20.85	PK
H	11650.105	41.70	8.46	38.57	44.50	44.23	54.00	-9.77	AV
H	17475.135	51.36	10.12	38.38	44.10	55.76	68.20	-12.44	PK
H	17475.135	44.34	10.12	38.38	44.10	48.74	54.00	-5.26	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) --802.11n-HT20
-------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenn a Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.089	58.39	5.94	35.40	44.00	55.73	74.00	-18.27	PK
V	4679.089	43.43	5.94	35.40	44.00	40.77	54.00	-13.23	AV
V	11490.134	54.68	8.46	39.75	44.50	58.39	68.20	-9.81	PK
V	11490.134	43.84	8.46	39.75	44.50	47.55	54.00	-6.45	AV
V	17235.185	56.53	10.12	38.80	44.10	61.35	74.00	-12.65	PK
V	17235.185	43.95	10.12	38.80	42.70	50.17	54.00	-3.83	AV
H	4679.149	57.43	5.94	35.18	44.00	54.55	74.00	-19.45	PK
H	4679.149	43.06	5.94	35.18	44.00	40.18	54.00	-13.82	AV
H	11490.182	51.21	8.46	38.71	44.50	53.88	68.20	-14.32	PK
H	11490.182	42.31	8.46	38.71	44.50	44.98	54.00	-9.02	AV
H	17235.184	52.74	10.12	38.38	44.10	57.14	74.00	-16.86	PK
H	17235.184	44.89	10.12	38.38	44.10	49.29	54.00	-4.71	AV
middle Channel (5785 MHz)-Above 1G									
V	4592.054	58.32	6.48	36.35	44.05	57.10	74.00	-16.90	PK
V	4592.054	43.53	6.48	36.35	44.05	42.31	54.00	-11.69	AV
V	11570.082	59.76	8.47	37.88	44.51	61.60	68.20	-6.60	PK
V	11570.082	43.51	8.47	37.88	44.51	45.35	54.00	-8.65	AV
V	17355.115	57.52	10.12	38.80	44.10	62.34	74.00	-11.66	PK
V	17355.115	39.57	10.12	38.80	42.70	45.79	54.00	-8.21	AV
H	4592.171	56.87	6.48	36.37	44.05	55.67	74.00	-18.33	PK
H	4592.171	43.38	6.48	36.37	44.05	42.18	54.00	-11.82	AV
H	11570.060	50.98	8.47	38.64	44.50	53.59	68.20	-14.61	PK
H	11570.060	44.73	8.47	38.64	44.50	47.34	54.00	-6.66	AV
H	17355.024	50.44	10.12	38.38	44.10	54.84	74.00	-19.16	PK
H	17355.024	44.47	10.12	38.38	44.10	48.87	54.00	-5.13	AV
High Channel (5825 MHz)-Above 1G									
V	6039.189	60.52	7.10	37.24	43.50	61.36	68.20	-6.84	PK
V	6039.189	43.08	7.10	37.24	43.50	43.92	54.00	-10.08	AV
V	11650.036	60.36	8.46	37.68	44.50	62.00	74.00	-12.00	PK
V	11650.036	43.16	8.46	37.68	44.50	44.80	54.00	-9.20	AV
V	17475.025	55.50	10.12	38.80	44.10	60.32	68.20	-7.88	PK
V	17475.025	43.20	10.12	38.80	42.70	49.42	54.00	-4.58	AV
H	6039.026	58.19	7.10	37.24	43.50	59.03	68.20	-9.17	PK
H	6039.026	43.05	7.10	37.24	43.50	43.89	54.00	-10.11	AV
H	11650.131	51.18	8.46	38.57	44.50	53.71	74.00	-20.29	PK
H	11650.131	44.47	8.46	38.57	44.50	47.00	54.00	-7.00	AV
H	17475.059	51.62	10.12	38.38	44.10	56.02	68.20	-12.18	PK
H	17475.059	41.26	10.12	38.38	44.10	45.66	54.00	-8.34	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11n-HT40
-------------	---------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenn a Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G									
V	4679.014	61.89	5.94	35.40	44.00	59.23	74.00	-14.77	PK
V	4679.014	43.53	5.94	35.40	44.00	40.87	54.00	-13.13	AV
V	11510.173	60.70	8.46	39.75	44.50	64.41	68.20	-3.79	PK
V	11510.173	43.59	8.46	39.75	44.50	47.30	54.00	-6.70	AV
V	17265.092	60.48	10.12	38.80	44.10	65.30	74.00	-8.70	PK
V	17265.092	43.85	10.12	38.80	42.70	50.07	54.00	-3.93	AV
H	4679.157	61.52	5.94	35.18	44.00	58.64	74.00	-15.36	PK
H	4679.157	43.22	5.94	35.18	44.00	40.34	54.00	-13.66	AV
H	11510.171	51.14	8.46	38.71	44.50	53.81	68.20	-14.39	PK
H	11510.171	40.65	8.46	38.71	44.50	43.32	54.00	-10.68	AV
H	17265.084	50.27	10.12	38.38	44.10	54.67	74.00	-19.33	PK
H	17265.084	41.89	10.12	38.38	44.10	46.29	54.00	-7.71	AV
middle Channel (5795 MHz)-Above 1G									
V	6039.173	61.87	6.48	36.35	44.05	60.65	68.20	-7.55	PK
V	6039.173	43.85	6.48	36.35	44.05	42.63	54.00	-11.37	AV
V	11590.004	64.70	8.47	37.88	44.51	66.54	74.00	-7.46	PK
V	11590.004	43.30	8.47	37.88	44.51	45.14	54.00	-8.86	AV
V	17385.119	60.68	10.12	38.80	44.10	65.50	68.20	-2.70	PK
V	17385.119	43.19	10.12	38.80	42.70	49.41	54.00	-4.59	AV
H	6039.068	64.93	6.48	36.37	44.05	63.73	68.20	-4.47	PK
H	6039.068	43.89	6.48	36.37	44.05	42.69	54.00	-11.31	AV
H	11590.160	54.84	8.47	38.64	44.50	57.45	74.00	-16.55	PK
H	11590.160	44.31	8.47	38.64	44.50	46.92	54.00	-7.08	AV
H	17385.024	53.31	10.12	38.38	44.10	57.71	68.20	-10.49	PK
H	17385.024	43.42	10.12	38.38	44.10	47.82	54.00	-6.18	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

8. POWER SPECTRAL DENSITY TEST

8.1 Block Diagram Of Test Setup



8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional

gain greater than 6 dBi are used, both the maximum conducted output power and the maximum

power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional

gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each

1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional

gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

8.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 TestResult

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		

Mode	Frequency	Measured Power Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11 a	5180 MHz	11.479	17	PASS
	5200 MHz	11.445	17	PASS
	5240 MHz	11.464	17	PASS
802.11 n20	5180 MHz	10.059	17	PASS
	5200 MHz	10.273	17	PASS
	5240 MHz	10.233	17	PASS
802.11 n40	5190 MHz	7.662	17	PASS
	5230 MHz	7.492	17	PASS

(802.11a) PSD plot on channel 36



(802.11n20) PSD plot on channel 36



(802.11a) PSD plot on channel 40




(802.11n20) PSD plot on channel 40



(802.11a) PSD plot on channel 48




(802.11n20) PSD plot on channel 48

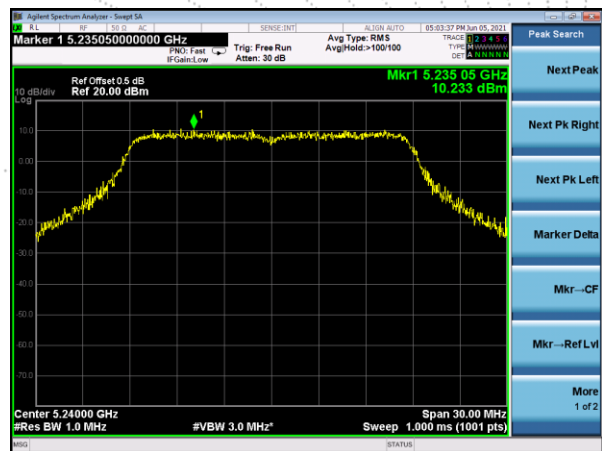

(802.11n40) PSD plot on channel 38




(802.11n40) PSD plot on channel 46

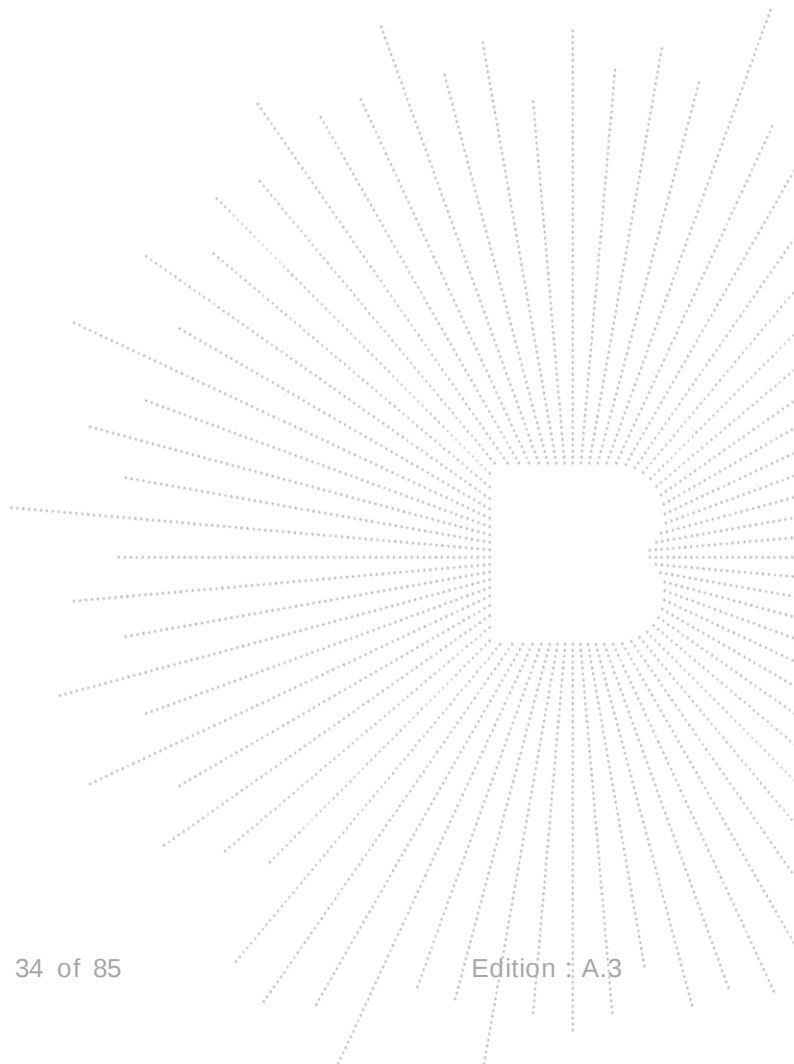


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-3 (5745-5825MHz)		

Mode	Frequency	Measured Power Density (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11 a	5745 MHz	8.052	30	PASS
	5785 MHz	8.069	30	PASS
	5825 MHz	7.715	30	PASS
802.11 n20	5745 MHz	6.502	30	PASS
	5785 MHz	5.665	30	PASS
	5825 MHz	5.615	30	PASS
802.11 n40	5755 MHz	5.944	30	PASS
	5795 MHz	4.937	30	PASS


(802.11a) PSD plot on channel 149

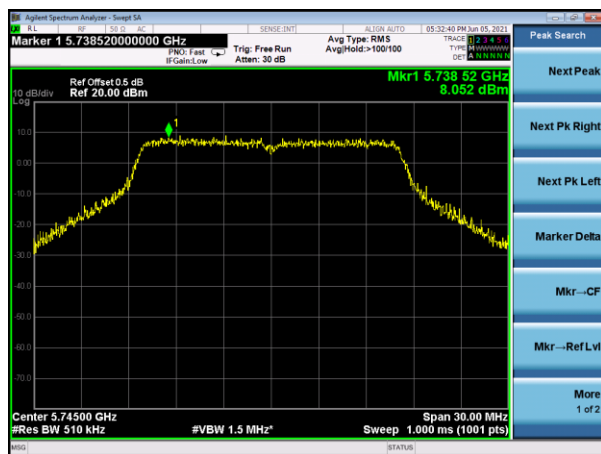


(802.11n20) PSD plot on channel 149

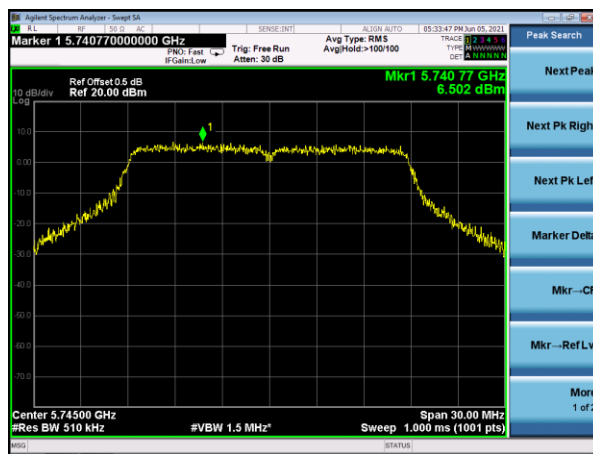


(802.11a) PSD plot on channel 157

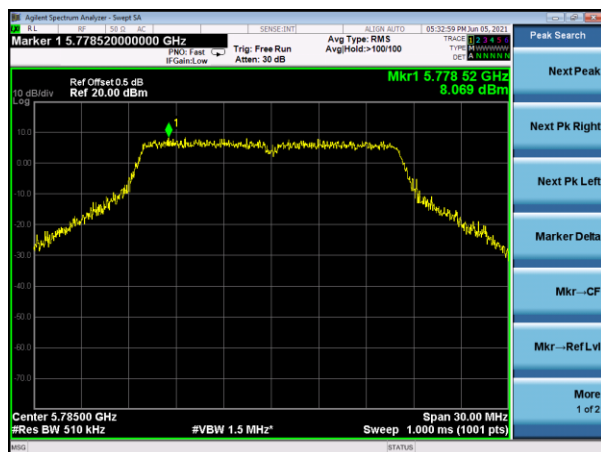


(802.11n20) PSD plot on channel 157

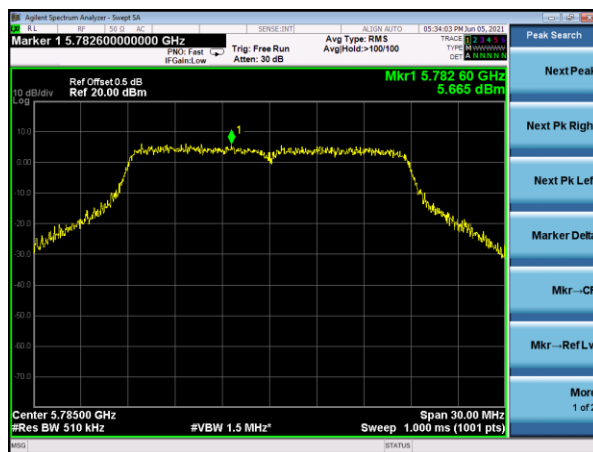

(802.11a) PSD plot on channel 165

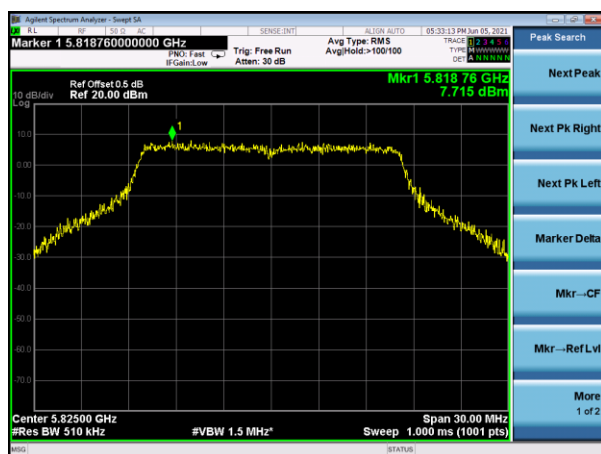


(802.11n20) PSD plot on channel 165

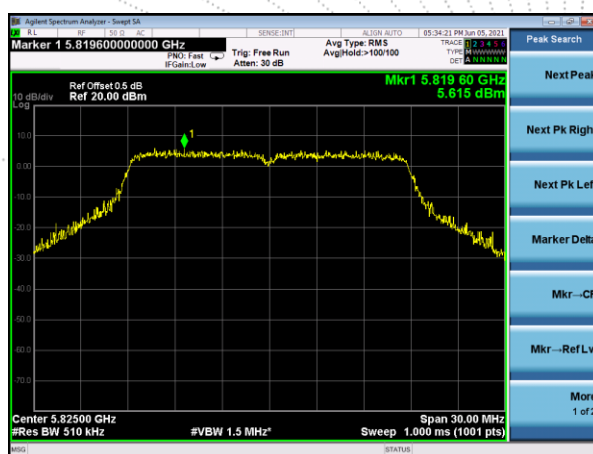

(802.11n40) PSD plot on channel 151




(802.11n40) PSD plot on channel 159

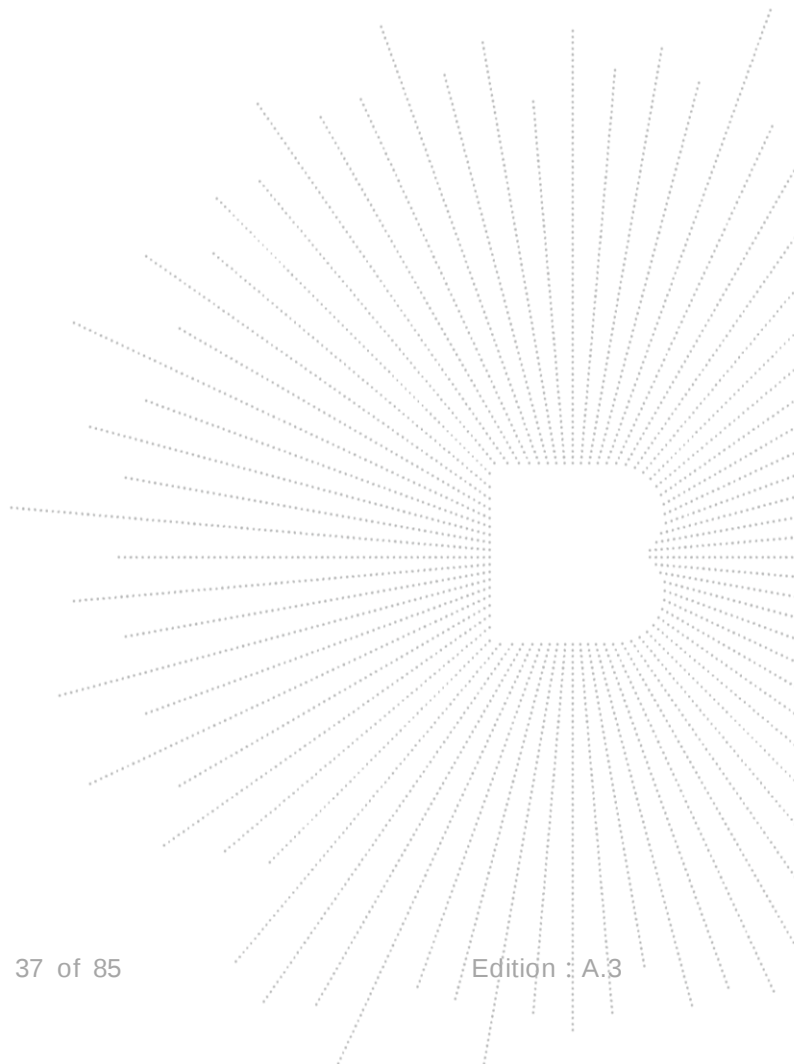

9. 26DB & 6DB & 99% EMISSION BANDWIDTH

9.1 Block Diagram Of Test Setup

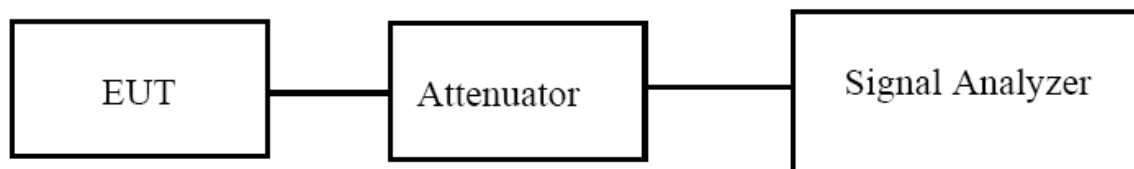

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.3 Test procedure

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

9.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


9.5 TestResult

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		


Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	26dB bandwidth (MHz)	Result
802.11a	CH36	5180	16.950	24.97	Pass
	CH40	5200	16.974	24.11	Pass
	CH48	5240	17.030	24.11	Pass
802.11 n20	CH36	5180	18.132	25.44	Pass
	CH40	5200	18.082	25.11	Pass
	CH48	5240	18.106	25.42	Pass
802.11 n40	CH 38	5190	37.161	50.05	Pass
	CH 46	5230	37.438	52.94	Pass

Test plot


(802.11a) 26dB&99%Bandwidth plot on channel 36

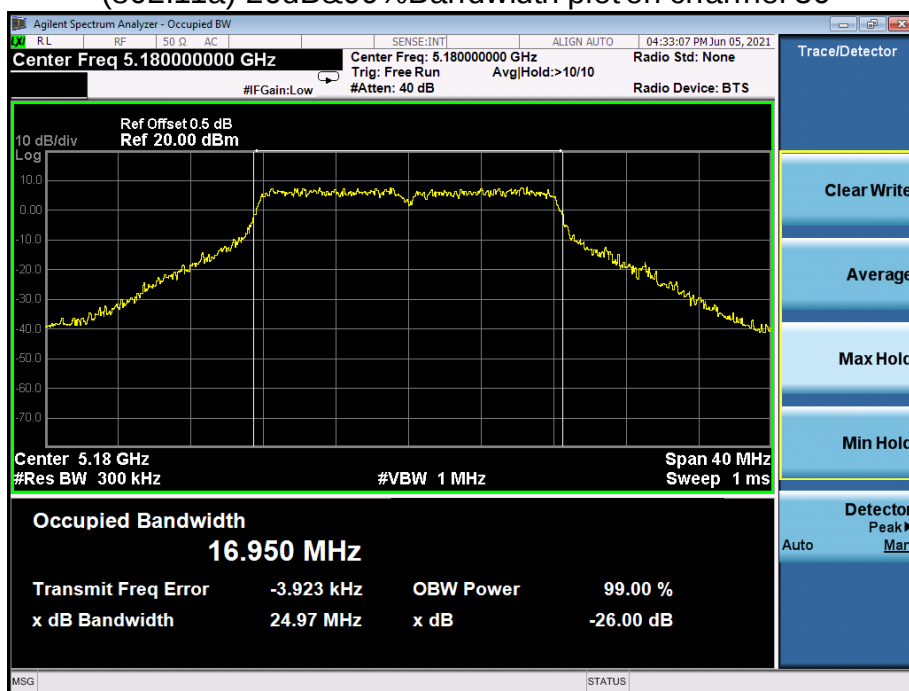


(802.11a) 26dB&99%Bandwidth plot on channel 40

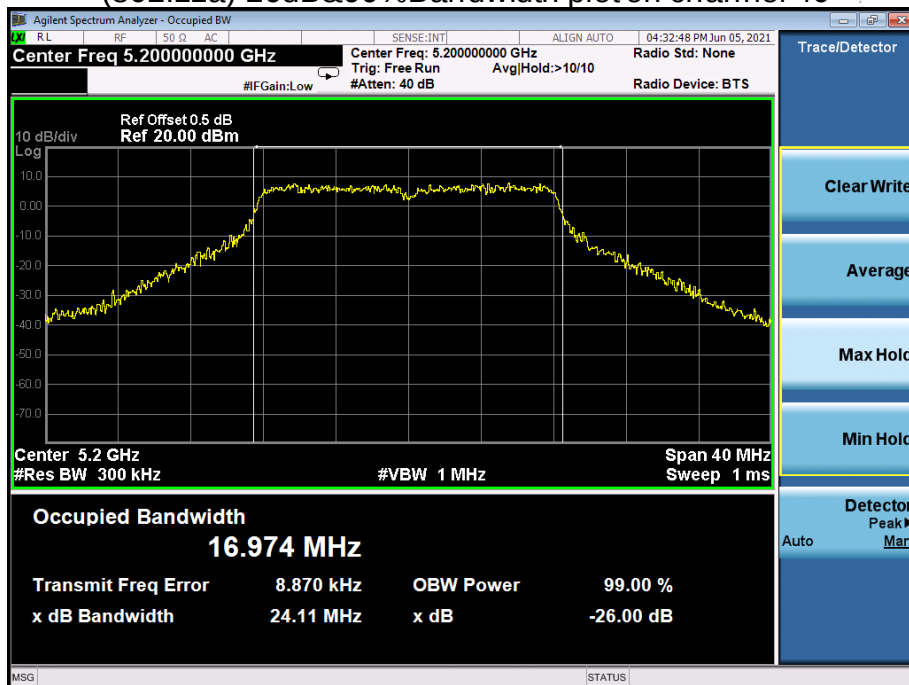


(802.11a) 26dB&99%Bandwidth plot on channel 48

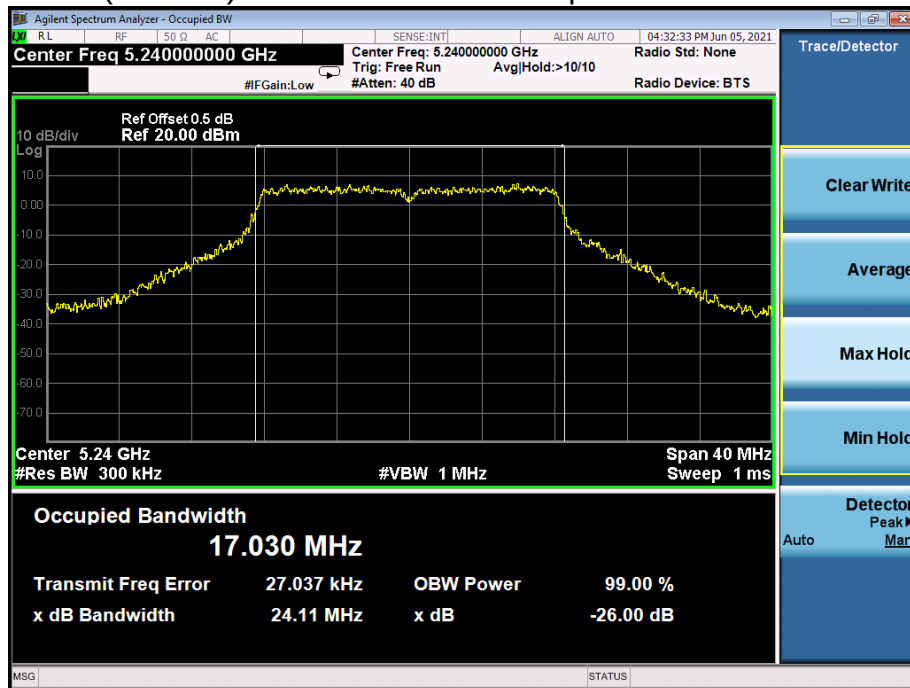


(802.11n20) 26dB&99%Bandwidth plot on channel 36

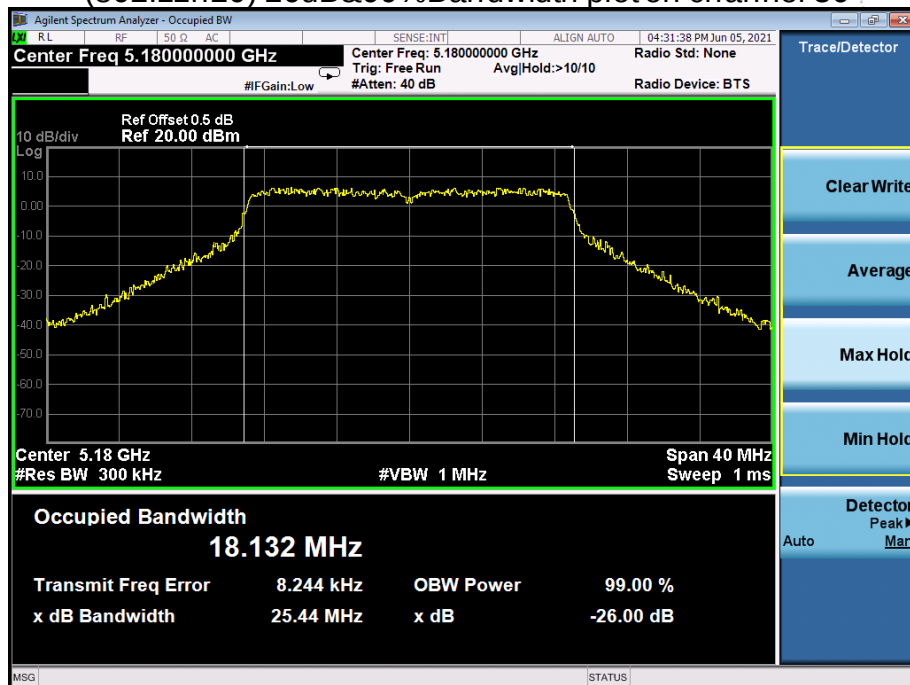


(802.11n20) 26dB&99%Bandwidth plot on channel 40

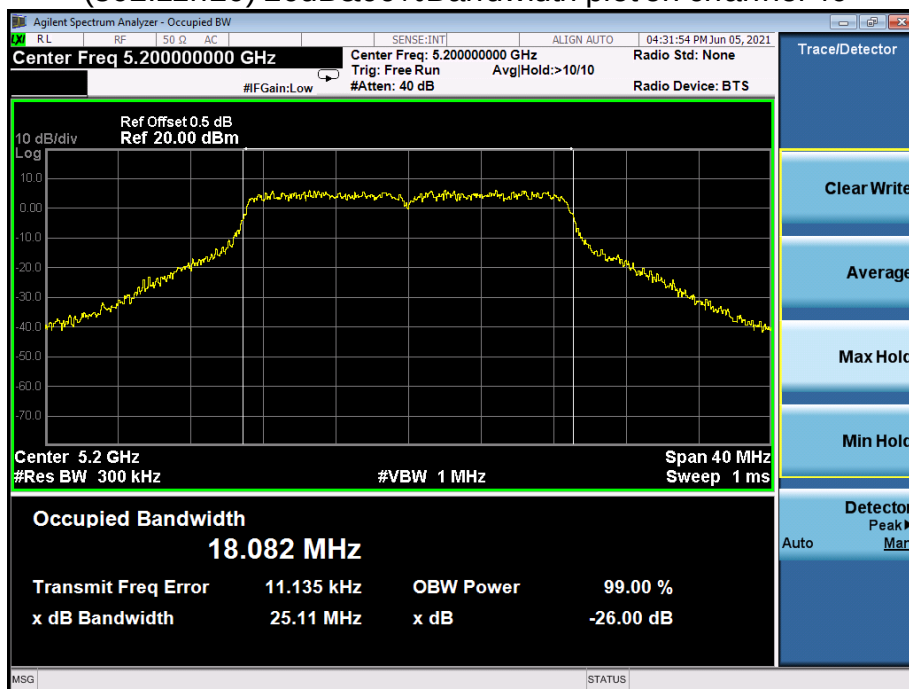


(802.11n20) 26dB&99%Bandwidth plot on channel 48

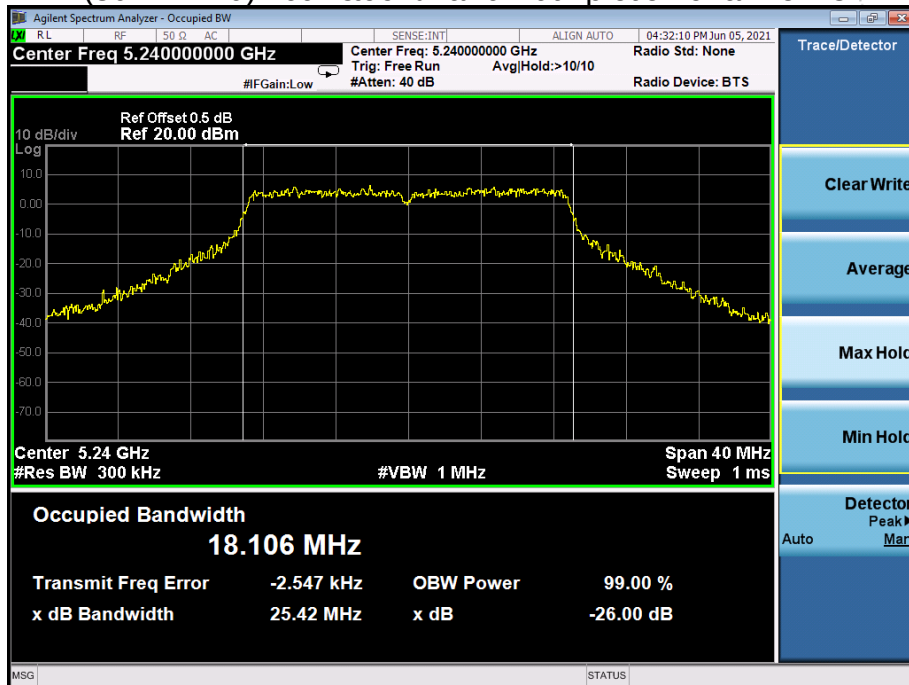

(802.11n40) 26dB&99%Bandwidth plot on channel 38

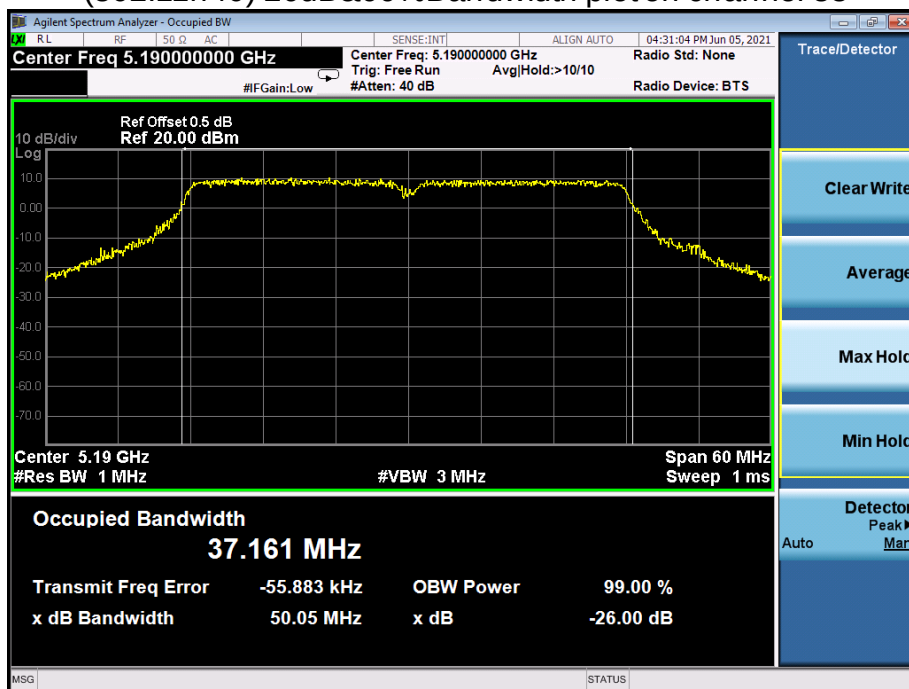


(802.11n40) 26dB&99%Bandwidth plot on channel 46

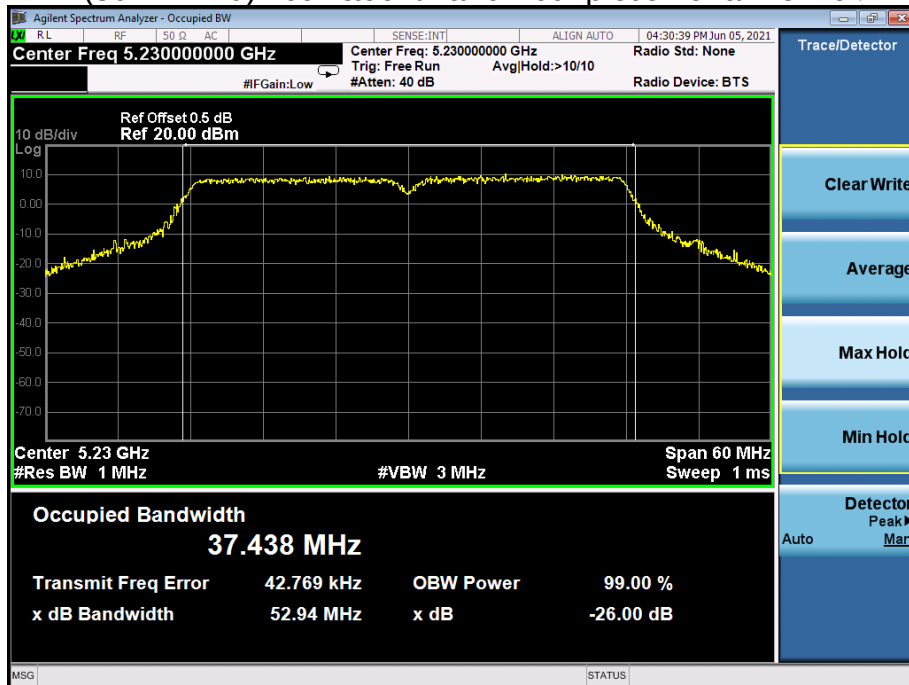


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		

Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	6dB bandwidth (MHz)	Result
802.11a	CH149	5745	16.979	16.06	Pass
	CH157	5785	16.914	16.34	Pass
	CH165	5825	16.944	16.09	Pass
802.11 n20	CH149	5745	18.057	16.73	Pass
	CH157	5785	18.034	17.15	Pass
	CH165	5825	17.998	17.21	Pass
802.11 n40	CH151	5755	37.038	35.77	Pass
	CH159	5795	37.108	35.95	Pass


802.11a 5745MHz 99% bandwidth

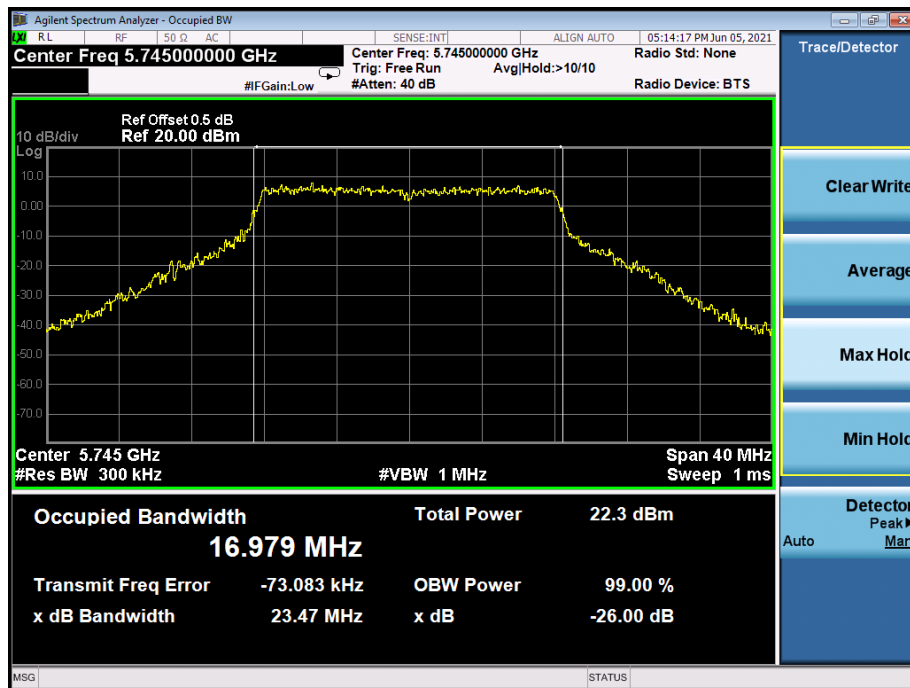


802.11a 5785MHz 99% bandwidth

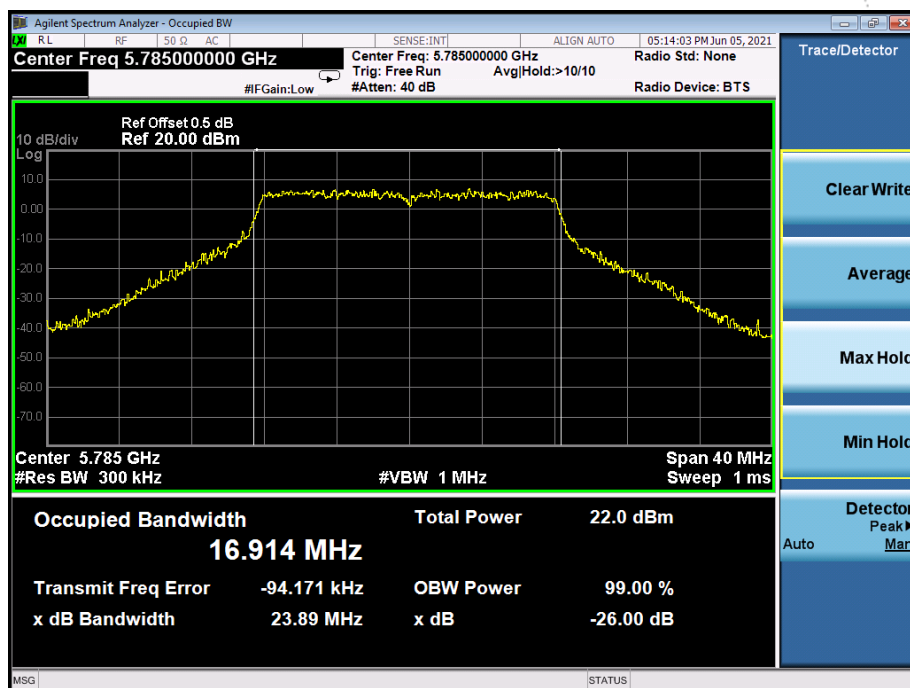


802.11a 5825MHz 99% bandwidth

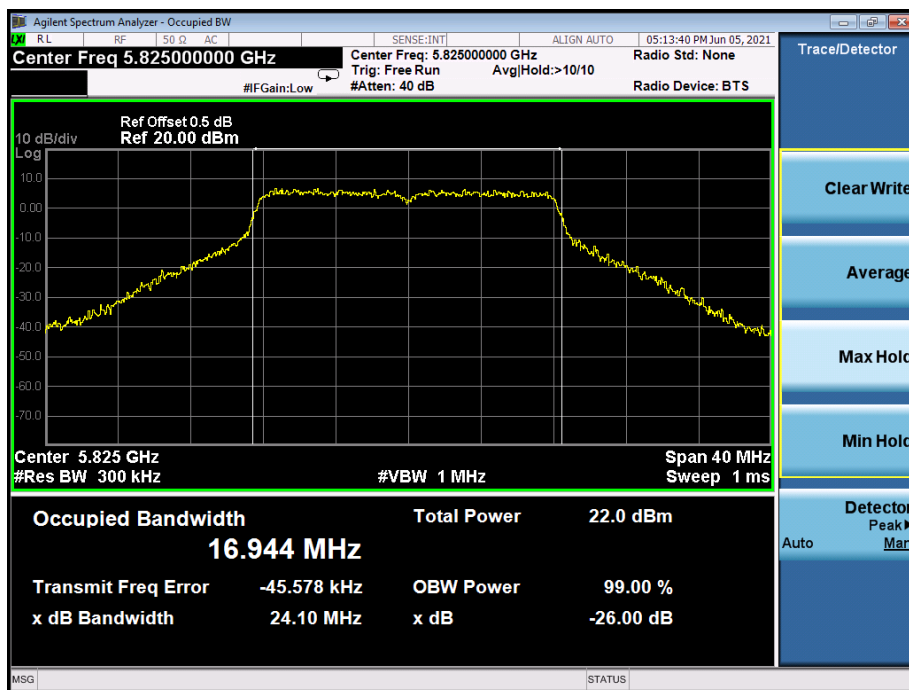


802.11n20 5745MHz 99% bandwidth

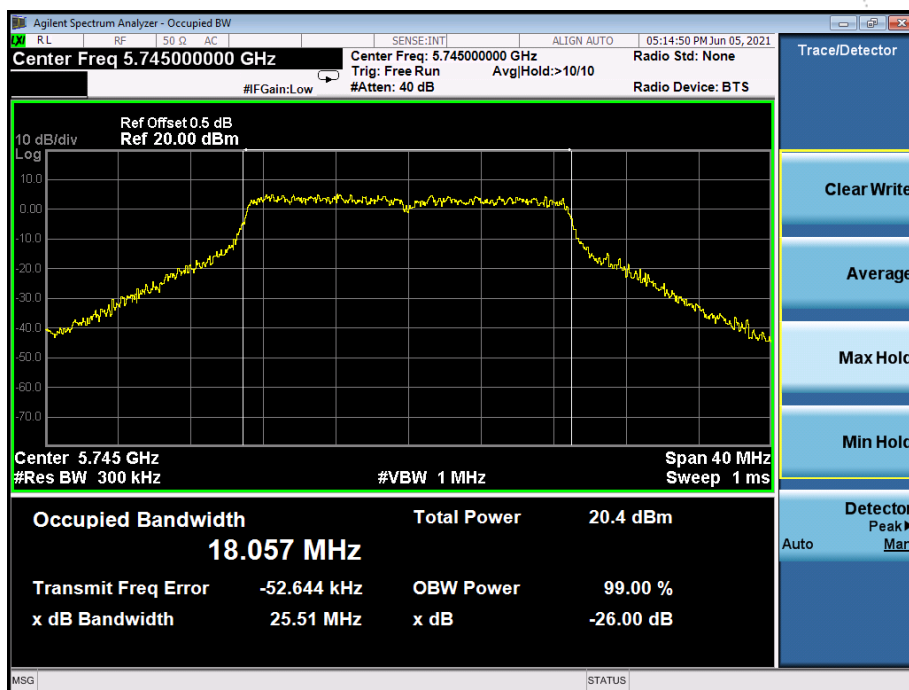


802.11n20 5785MHz 99% bandwidth

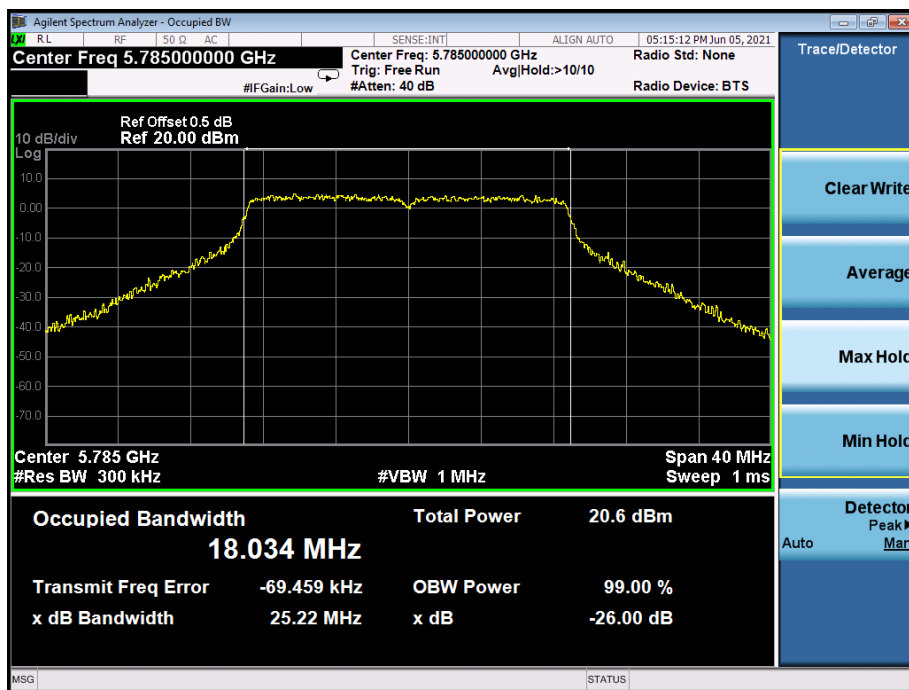


802.11n20 5825MHz 99% bandwidth

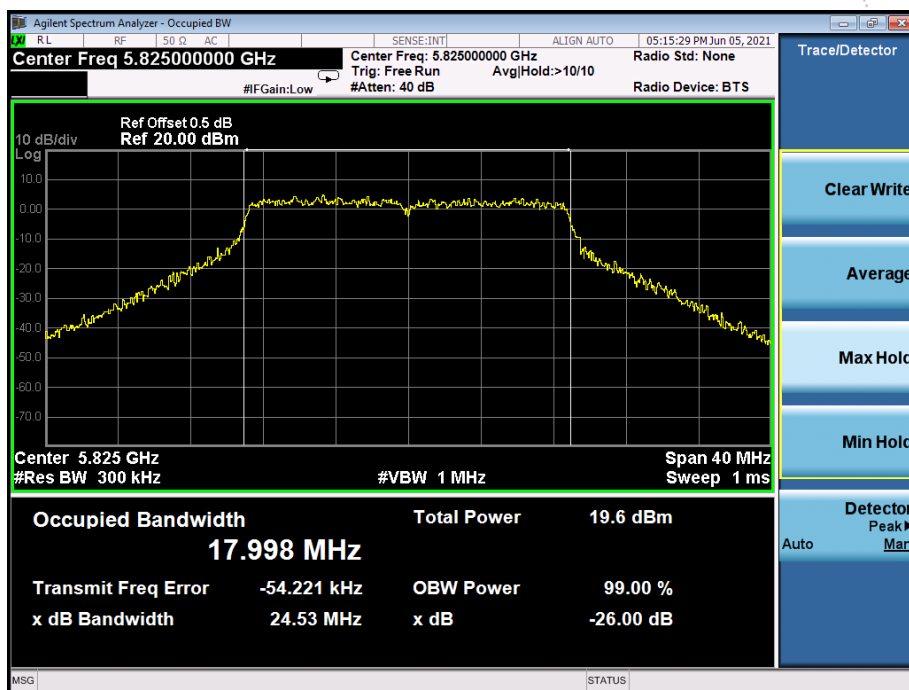


802.11 n40 5755MHz 99% bandwidth

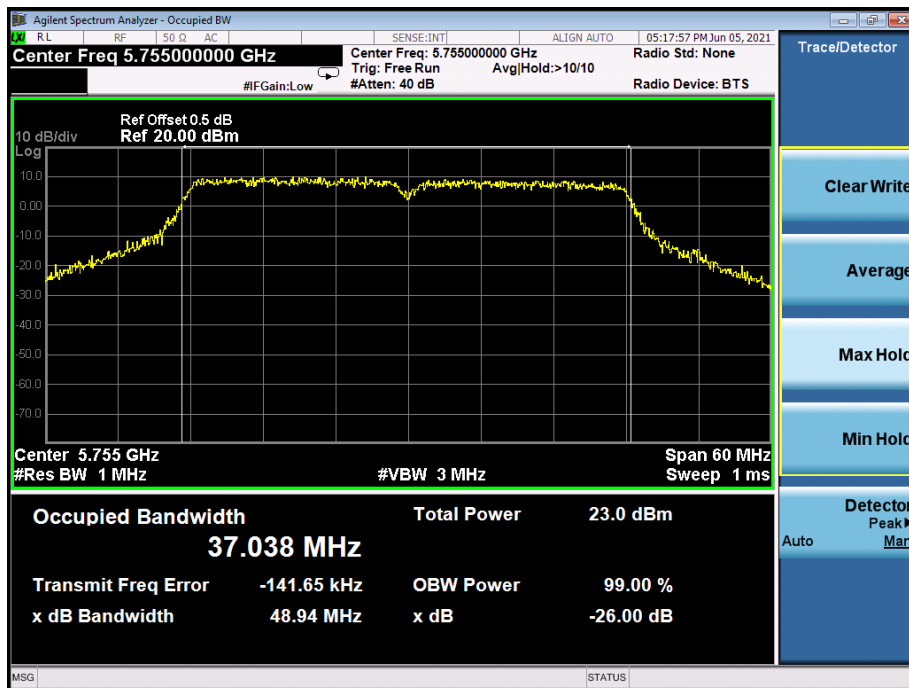


802.11 n40 5795MHz 99% bandwidth

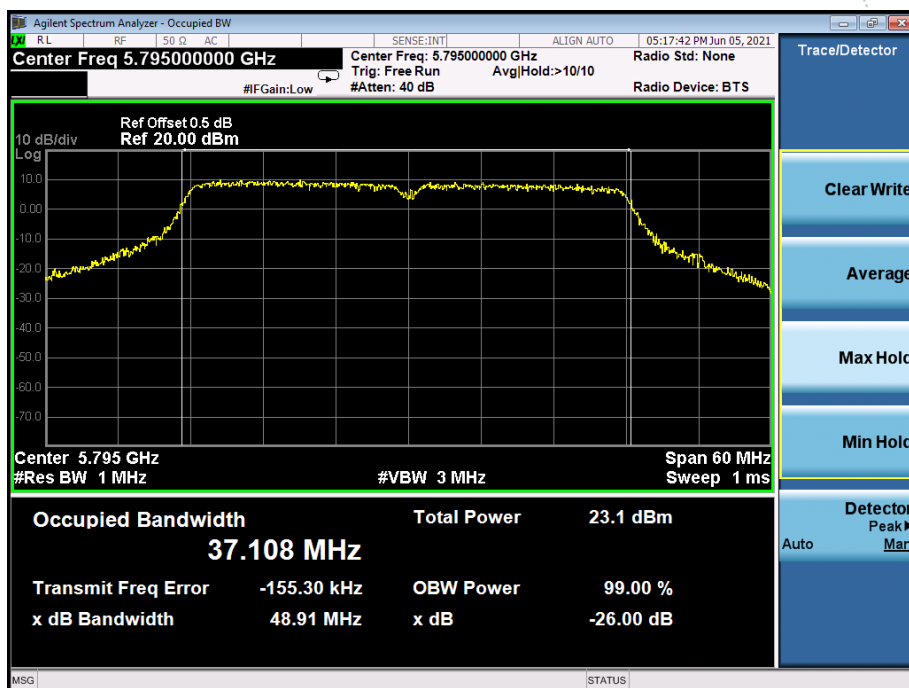


802.11a 5745MHz 6dB bandwidth

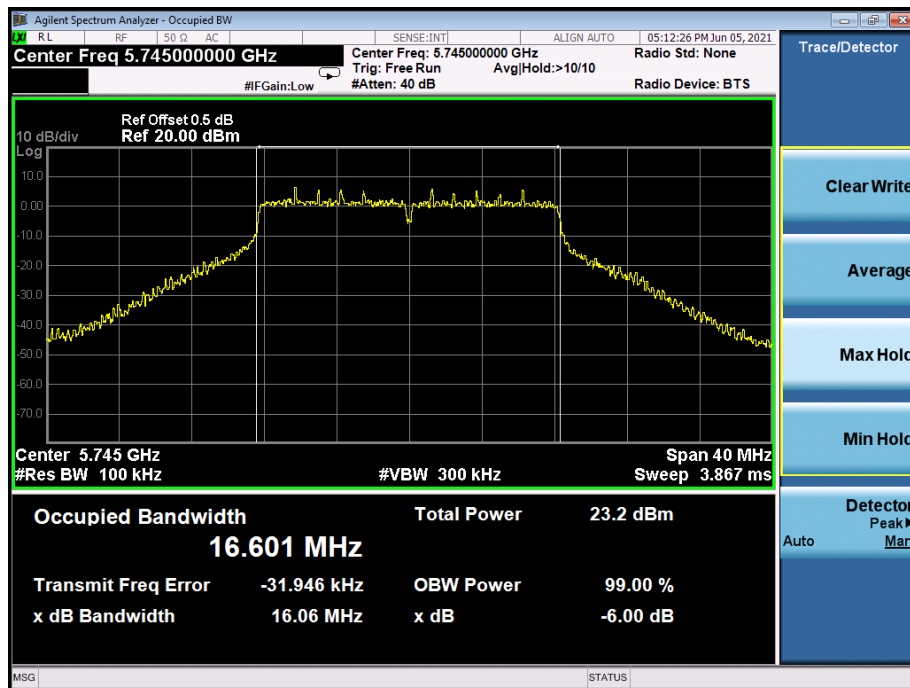


802.11a 5785MHz 6dB bandwidth

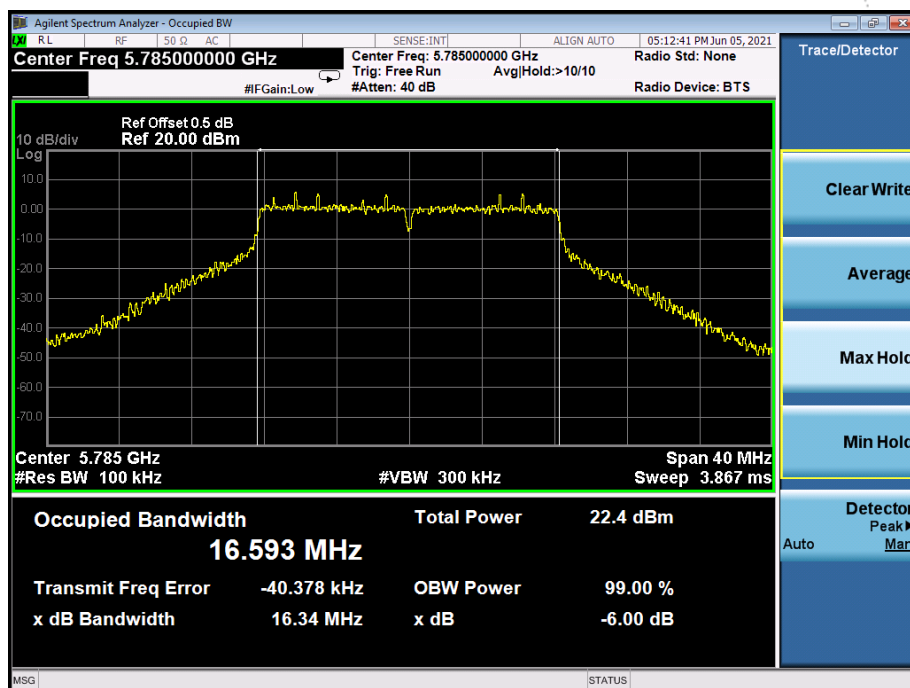


802.11a 5825MHz 6dB bandwidth

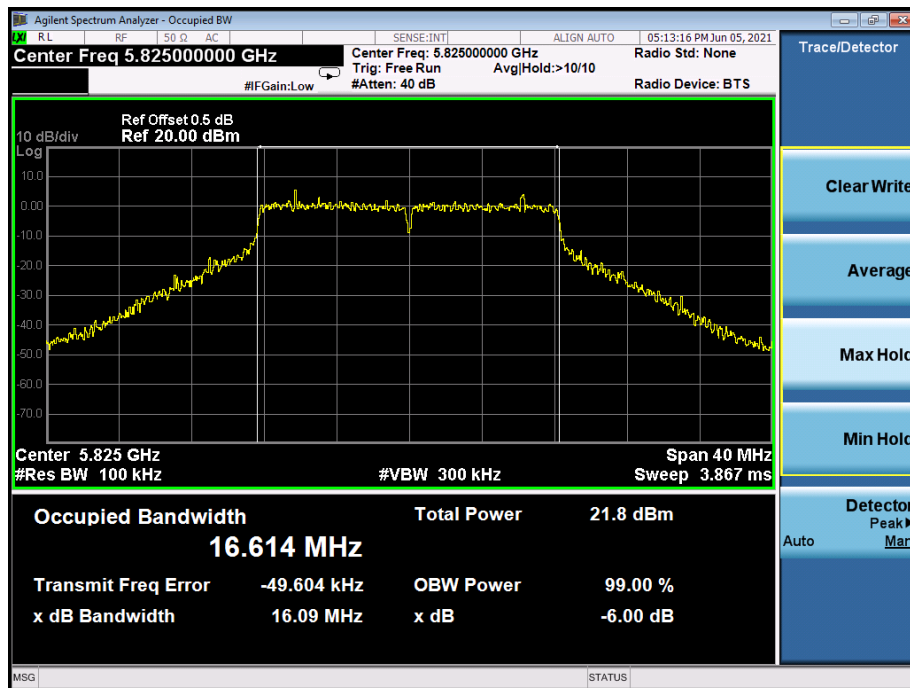


802.11n20 5745MHz 6dB bandwidth

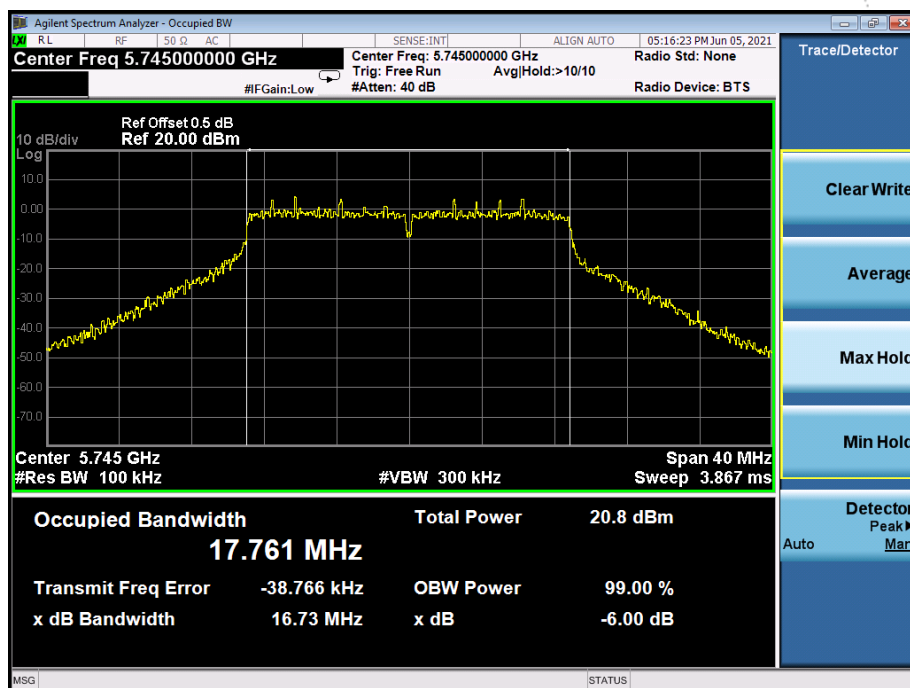


802.11n20 5785MHz 6dB bandwidth

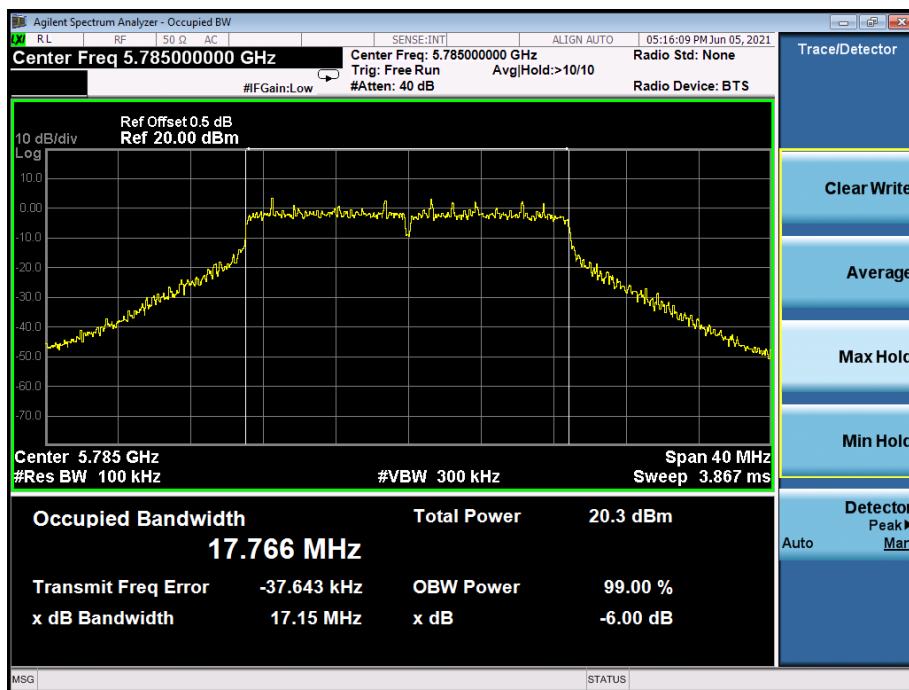


802.11n20 5825MHz 6dB bandwidth

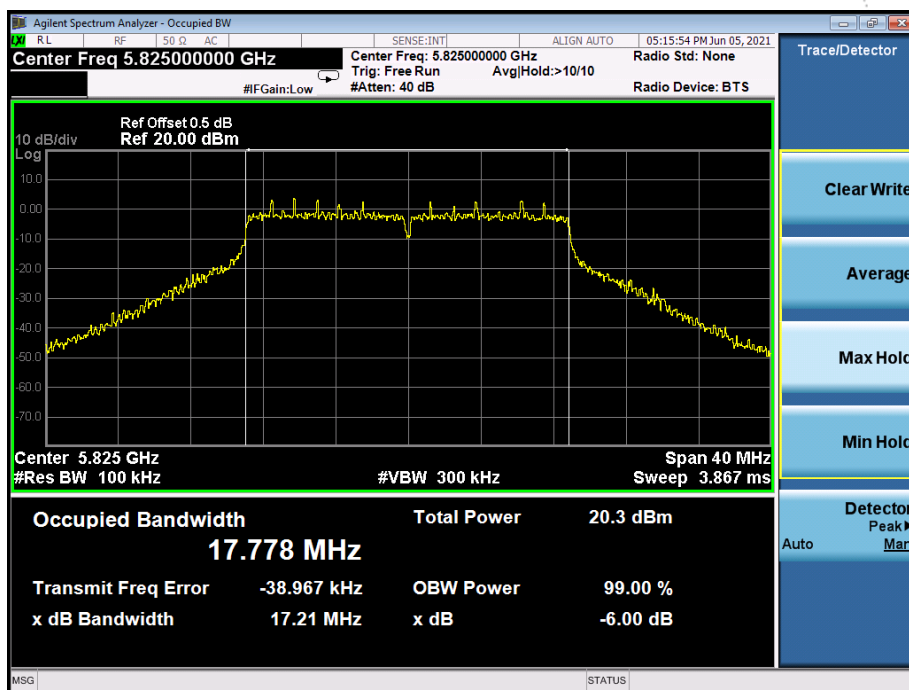

802.11 n40 5755MHz 6dB bandwidth

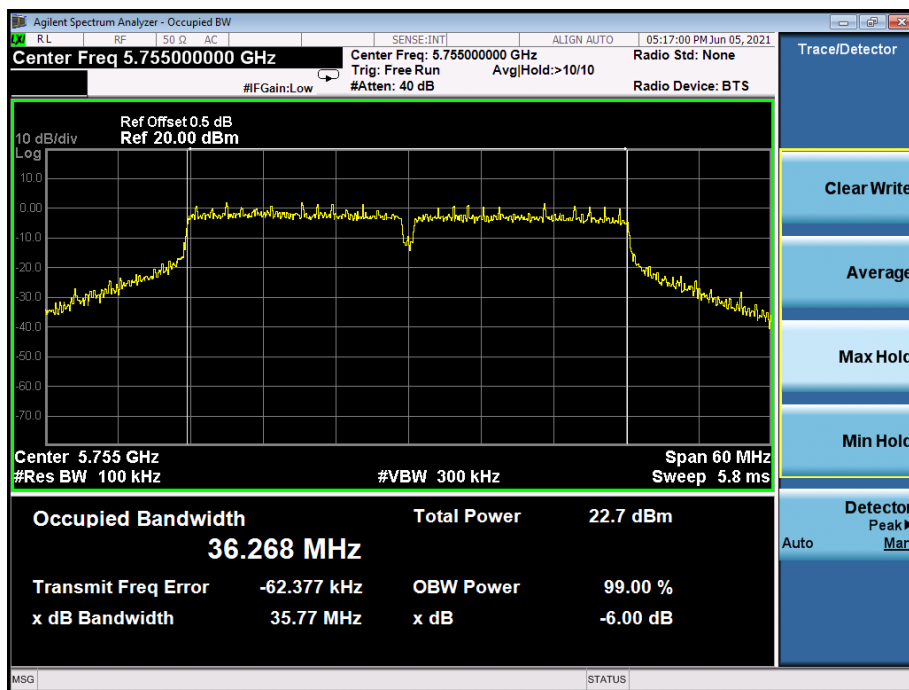

802.11 n40 5795MHz 6dB bandwidth

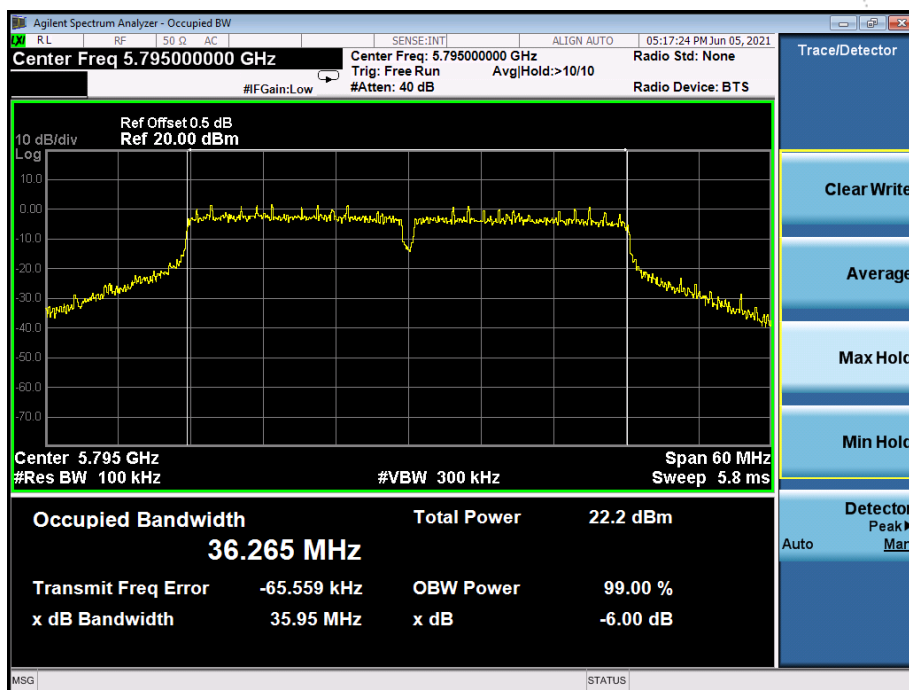

10. MAXIMUM CONDUCTED OUTPUT POWER

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

10.3 Test procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle $\geq$ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at

the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

10.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)	LIMIT	Result
	(MHz)	(dBm)	dBm	
TX 802.11a Mode				
CH36	5180	18.91	30	Pass
CH40	5200	18.69	30	Pass
CH48	5240	18.39	30	Pass
TX 802.11 n20M Mode				
CH36	5180	17.97	30	Pass
CH40	5200	17.43	30	Pass
CH48	5240	17.32	30	Pass
TX 802.11 n40M Mode				
CH38	5190	16.72	30	Pass
CH46	5230	16.06	30	Pass

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)	LIMIT	Result
	(MHz)	(dBm)	dBm	
TX 802.11a Mode				
CH 149	5745	18.38	30	Pass
CH 157	5785	17.81	30	Pass
CH 165	5825	17.50	30	Pass
TX 802.11 n20M Mode				
CH 149	5745	17.58	30	Pass
CH 157	5785	16.59	30	Pass
CH 165	5825	16.08	30	Pass
TX 802.11 n40M Mode				
CH 151	5755	16.19	30	Pass
CH 159	5795	15.35	30	Pass

11. OUT OF BAND EMISSIONS

11.1 Block Diagram Of Test Setup



11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

11.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data