
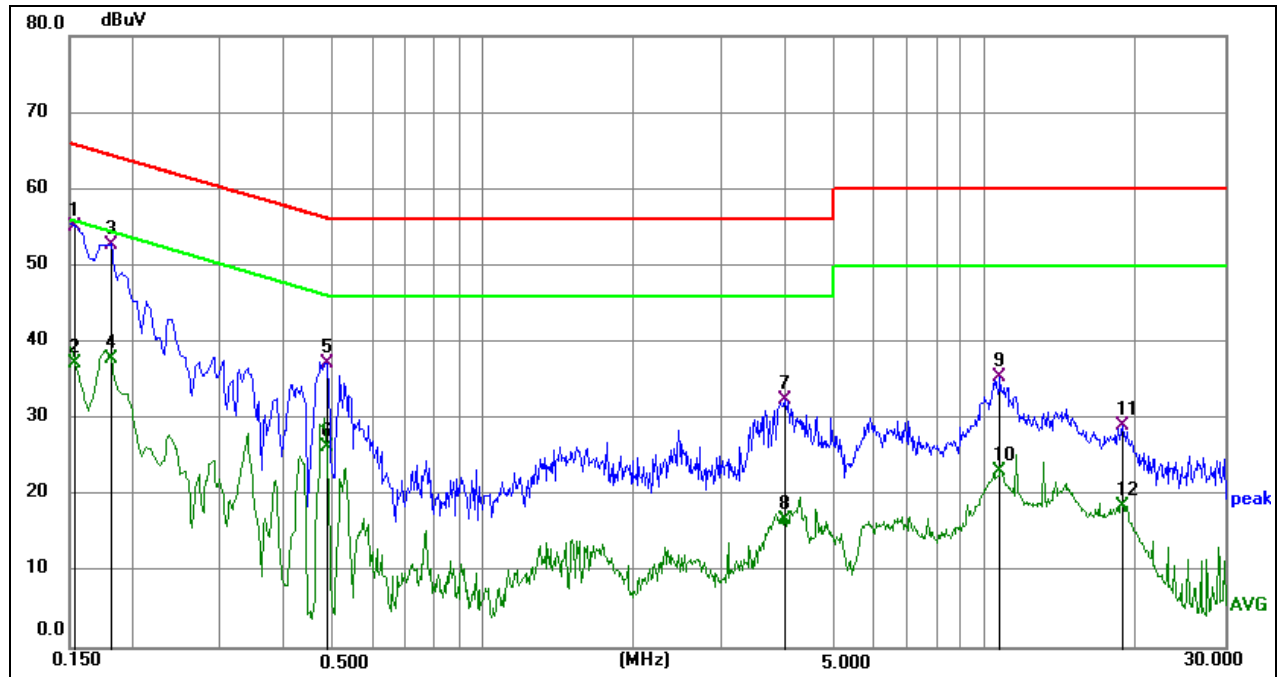


DC IN:

Phase: L1

Mode: 11A 5825MHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	45.30	9.77	55.07	65.79	-10.72	QP
2	0.1539	27.42	9.77	37.19	55.79	-18.60	AVG
3	0.1814	43.03	9.77	52.80	64.42	-11.62	QP
4	0.1814	28.03	9.77	37.80	54.42	-16.62	AVG
5	0.4874	27.51	9.79	37.30	56.21	-18.91	QP
6	0.4874	16.57	9.79	26.36	46.21	-19.85	AVG
7	3.9930	22.67	9.85	32.52	56.00	-23.48	QP
8	3.9930	6.95	9.85	16.80	46.00	-29.20	AVG
9	10.7204	25.35	10.09	35.44	60.00	-24.56	QP
10	10.7204	13.08	10.09	23.17	50.00	-26.83	AVG
11	18.8024	19.01	10.13	29.14	60.00	-30.86	QP
12	18.8024	8.51	10.13	18.64	50.00	-31.36	AVG

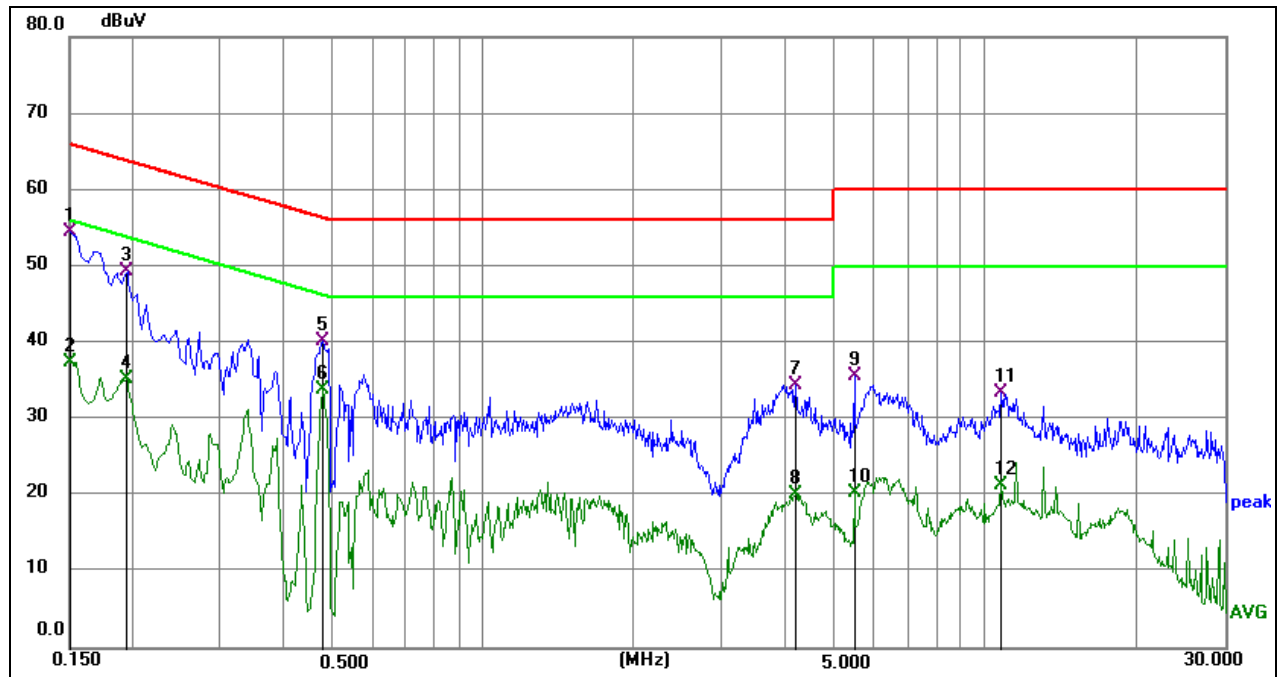

Phase: N

Mode: 11A 5825MHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	44.91	9.67	54.58	66.00	-11.42	QP
2	0.1500	27.79	9.67	37.46	56.00	-18.54	AVG
3	0.1949	39.58	9.68	49.26	63.83	-14.57	QP
4	0.1949	25.51	9.68	35.19	53.83	-18.64	AVG
5	0.4784	30.60	9.69	40.29	56.37	-16.08	QP
6	0.4784	24.08	9.69	33.77	46.37	-12.60	AVG
7	4.1820	24.73	9.77	34.50	56.00	-21.50	QP
8	4.1820	10.31	9.77	20.08	46.00	-25.92	AVG
9	5.4780	25.82	9.84	35.66	60.00	-24.34	QP
10	5.4780	10.42	9.84	20.26	50.00	-29.74	AVG
11	10.7610	23.42	10.09	33.51	60.00	-26.49	QP
12	10.7610	11.17	10.09	21.26	50.00	-28.74	AVG

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.407(a)(1)(2)(3)

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


DESCRIPTION

Pass

11. TEST DATA - Appendix A

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	80.17	0.96	0.49
NVNT	a	5180	Ant2	80.17	0.96	0.49
NVNT	a	5200	Ant1	80.21	0.96	0.49
NVNT	a	5200	Ant2	80.17	0.96	0.49
NVNT	a	5240	Ant1	80.17	0.96	0.49
NVNT	a	5240	Ant2	80.21	0.96	0.49
NVNT	a	5745	Ant1	80.17	0.96	0.49
NVNT	a	5745	Ant2	80.17	0.96	0.49
NVNT	a	5785	Ant1	80.17	0.96	0.49
NVNT	a	5785	Ant2	80.17	0.96	0.49
NVNT	a	5825	Ant1	80.17	0.96	0.49
NVNT	a	5825	Ant2	80.17	0.96	0.49
NVNT	n20	5180	Ant1	79.05	1.02	0.53
NVNT	n20	5180	Ant2	79.05	1.02	0.53
NVNT	n20	5200	Ant1	79.02	1.02	0.53
NVNT	n20	5200	Ant2	79.08	1.02	0.53
NVNT	n20	5240	Ant1	79.02	1.02	0.53
NVNT	n20	5240	Ant2	79.04	1.02	0.53
NVNT	n20	5745	Ant1	79.04	1.02	0.53
NVNT	n20	5745	Ant2	79.04	1.02	0.53
NVNT	n20	5785	Ant1	79.04	1.02	0.53
NVNT	n20	5785	Ant2	79.04	1.02	0.53
NVNT	n20	5825	Ant1	79.04	1.02	0.53
NVNT	n20	5825	Ant2	79.04	1.02	0.53
NVNT	n40	5190	Ant1	64.99	1.87	1.08
NVNT	n40	5190	Ant2	64.99	1.87	1.08
NVNT	n40	5230	Ant1	64.99	1.87	1.08
NVNT	n40	5230	Ant2	64.99	1.87	1.08
NVNT	n40	5755	Ant1	64.97	1.87	1.08
NVNT	n40	5755	Ant2	64.97	1.87	1.08
NVNT	n40	5795	Ant1	64.97	1.87	1.08
NVNT	n40	5795	Ant2	64.97	1.87	1.08
NVNT	ac20	5180	Ant1	79.07	1.02	0.53
NVNT	ac20	5180	Ant2	79.07	1.02	0.53
NVNT	ac20	5200	Ant1	79.07	1.02	0.53
NVNT	ac20	5200	Ant2	79.08	1.02	0.53
NVNT	ac20	5240	Ant1	79.07	1.02	0.53
NVNT	ac20	5240	Ant2	79.07	1.02	0.53
NVNT	ac20	5745	Ant1	79.07	1.02	0.53
NVNT	ac20	5745	Ant2	79.08	1.02	0.53
NVNT	ac20	5785	Ant1	79.07	1.02	0.53
NVNT	ac20	5785	Ant2	79.08	1.02	0.53
NVNT	ac20	5825	Ant1	79.08	1.02	0.53
NVNT	ac20	5825	Ant2	79.08	1.02	0.53
NVNT	ac40	5190	Ant1	65.06	1.87	1.07
NVNT	ac40	5190	Ant2	65.06	1.87	1.07
NVNT	ac40	5230	Ant1	65.06	1.87	1.07
NVNT	ac40	5230	Ant2	65.06	1.87	1.07
NVNT	ac40	5755	Ant1	65.06	1.87	1.07
NVNT	ac40	5755	Ant2	65.06	1.87	1.07
NVNT	ac40	5795	Ant1	65.09	1.86	1.07
NVNT	ac40	5795	Ant2	65.06	1.87	1.07

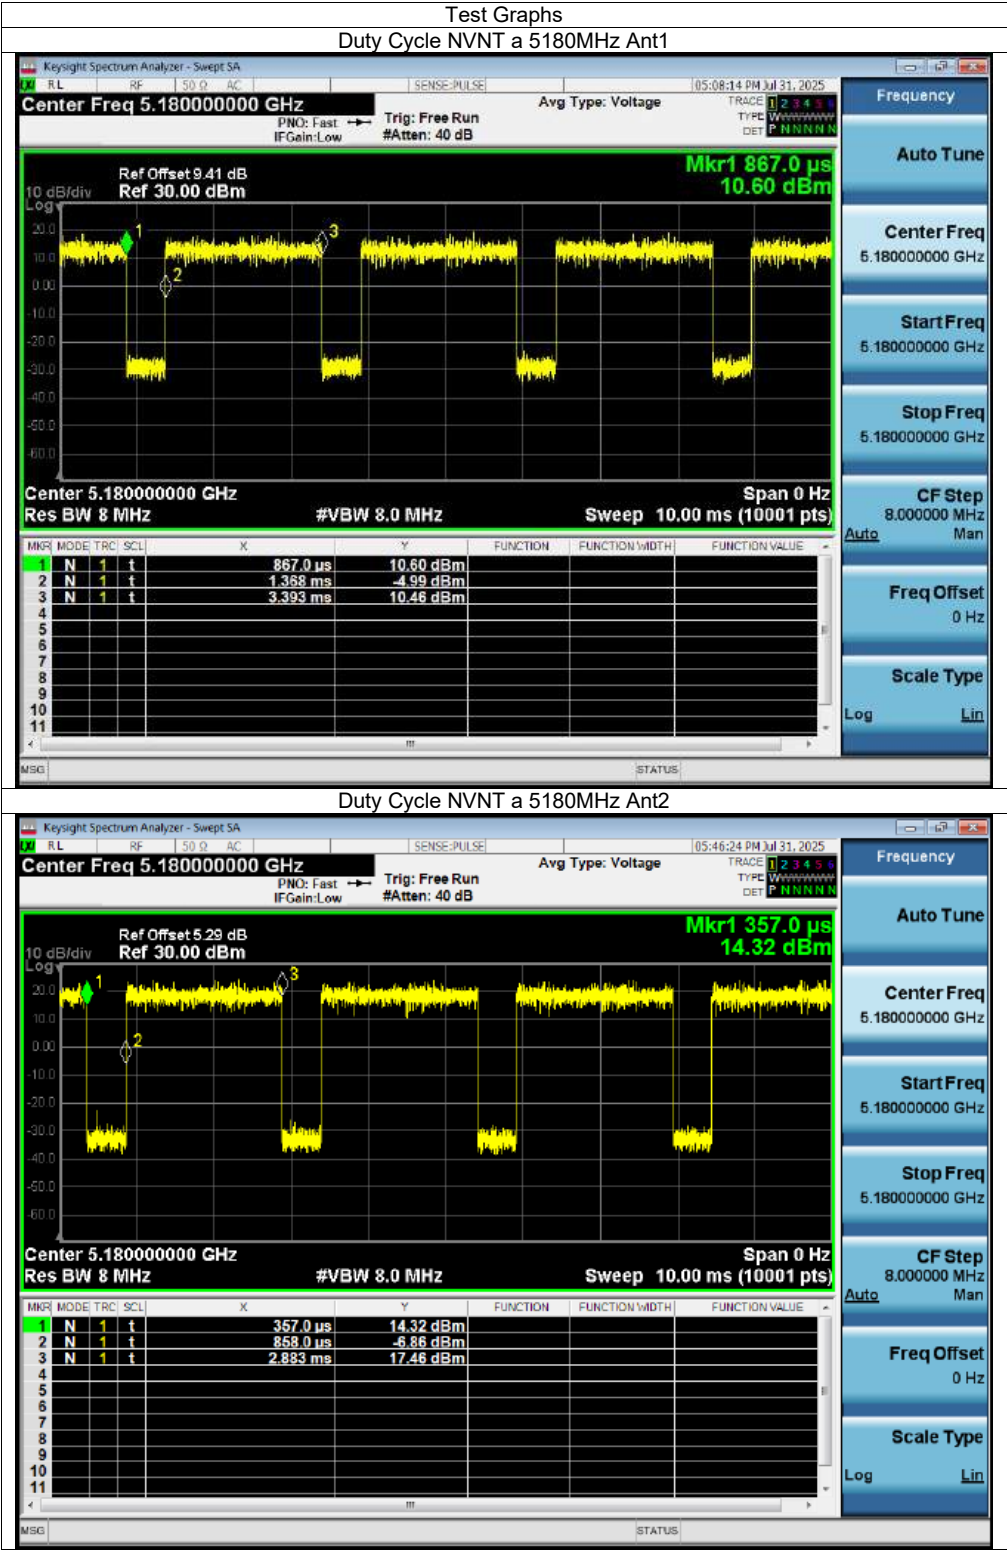

Duty Cycle NVNT a 5180MHz Ant2

Keysight Spectrum Analyzer - Swept SA

RLRF500ACSENSE-PULSE

05:46:24 PM Jul 31, 2025

Center Freq 5.180000000 GHz

Trig: Free Run

Avg Type: Voltage

Trig: PNO: Fast

IF Gain: Low

#Atten: 40 dB

Ref Offset 5.29 dB

Ref 30.00 dBm

Mkr1 357.0 μ s

14.32 dBm

10 dB/div

Log

Center 5.180000000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 10.00 ms (10001 pts)

Span 0 Hz

MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	t	357.0 μ s	14.32 dBm			
2	N	1	t	858.0 μ s	-6.86 dBm			
3	N	1	t	2.883 ms	17.46 dBm			
4								
5								
6								
7								
8								
9								
10								
11								

MSG

STATUS

Frequency

Auto Tune

Center Freq 5.180000000 GHz

Start Freq 5.180000000 GHz



Stop Freq 5.180000000 GHz



CF Step 8.000000 MHz


AutoMan



Freq Offset 0 Hz



Scale Type LogLin

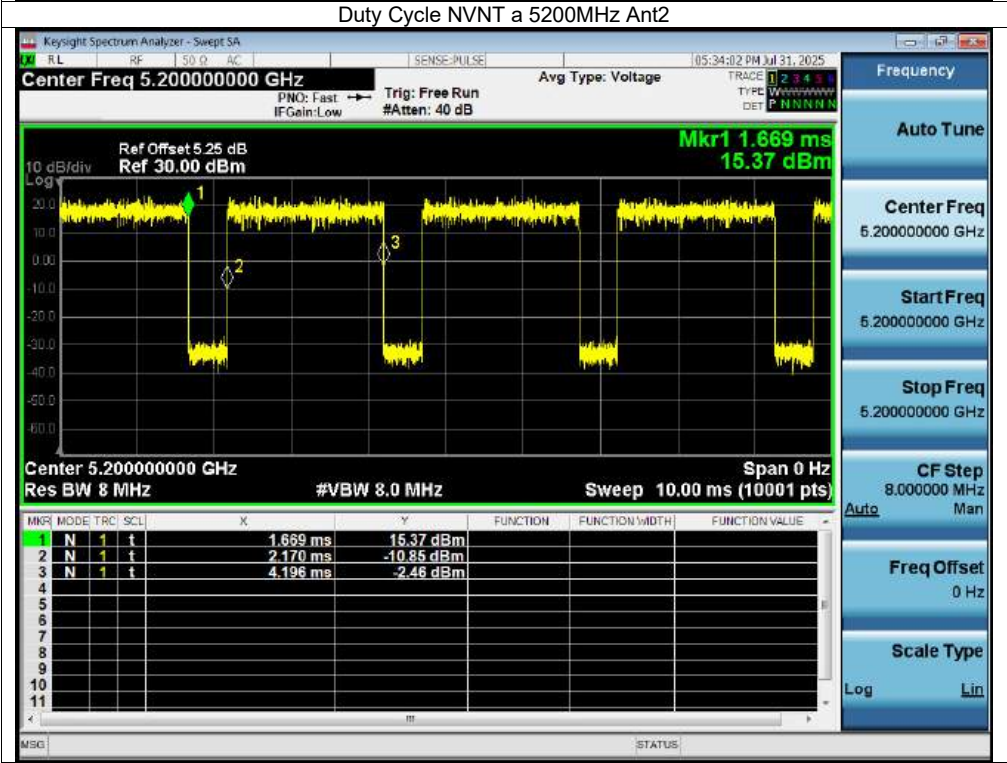
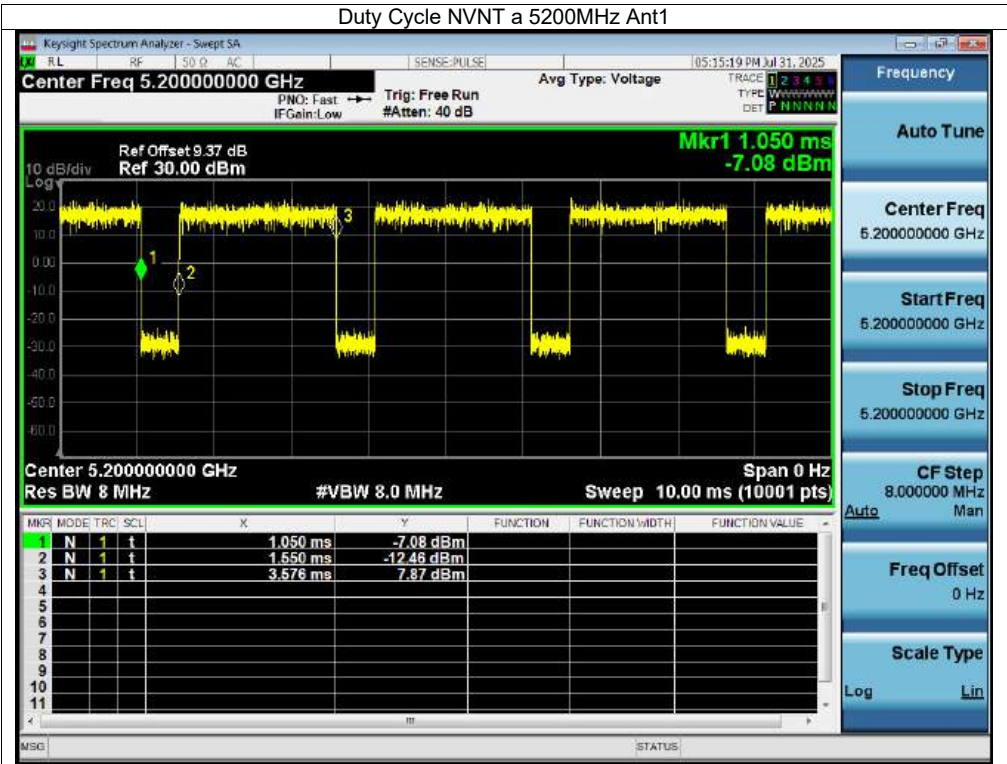


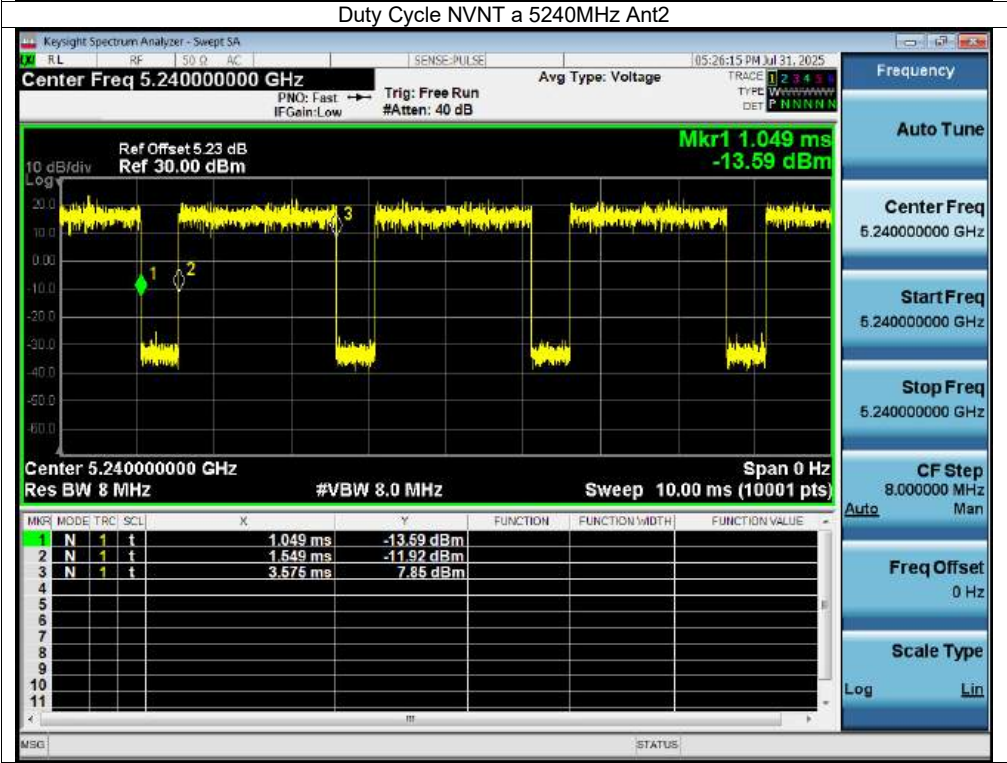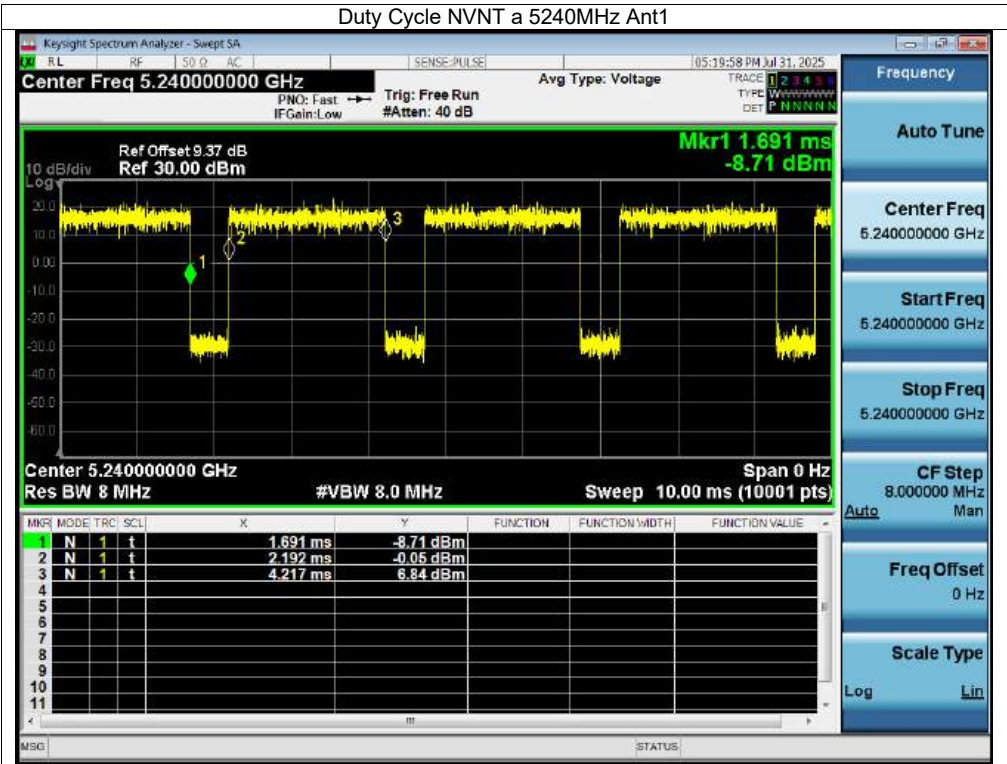


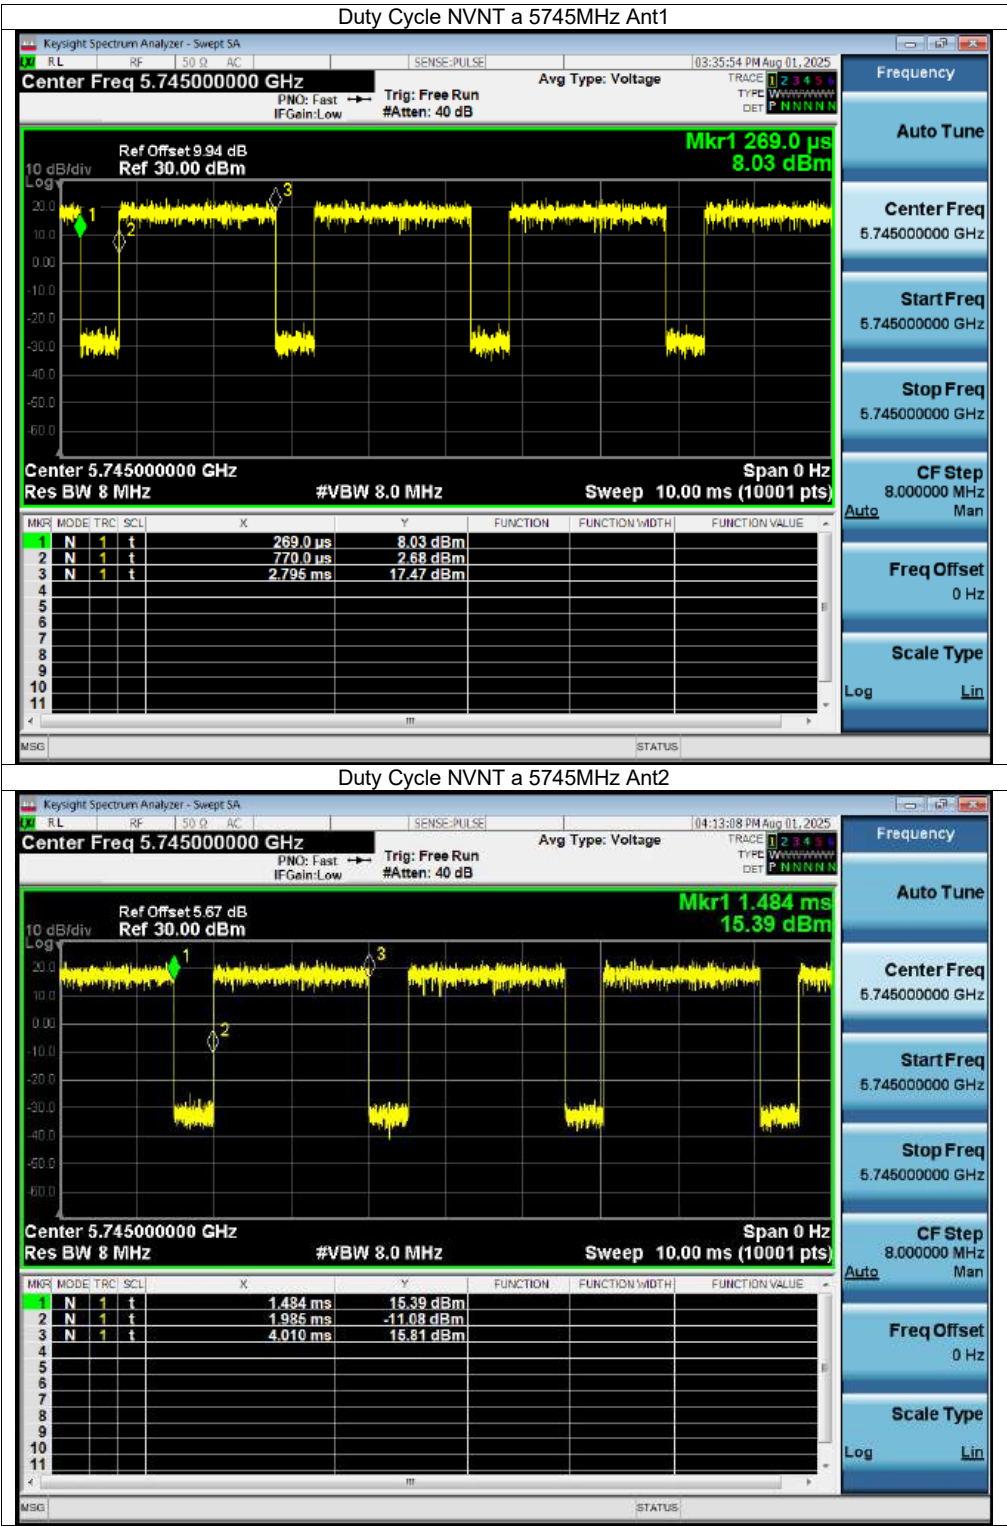


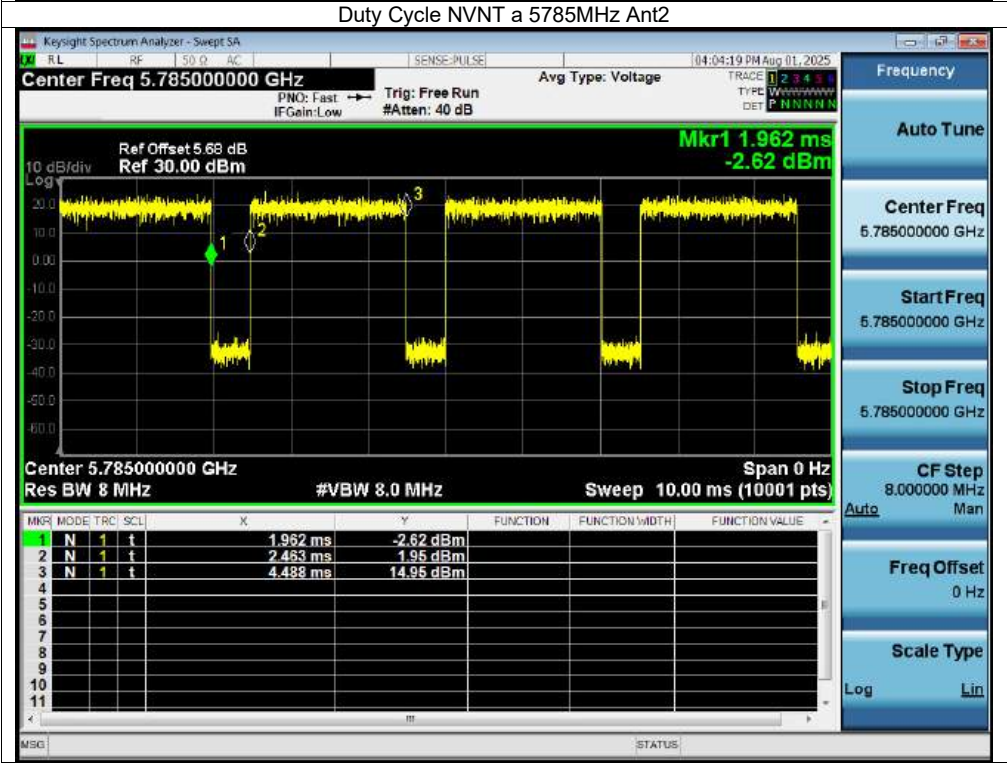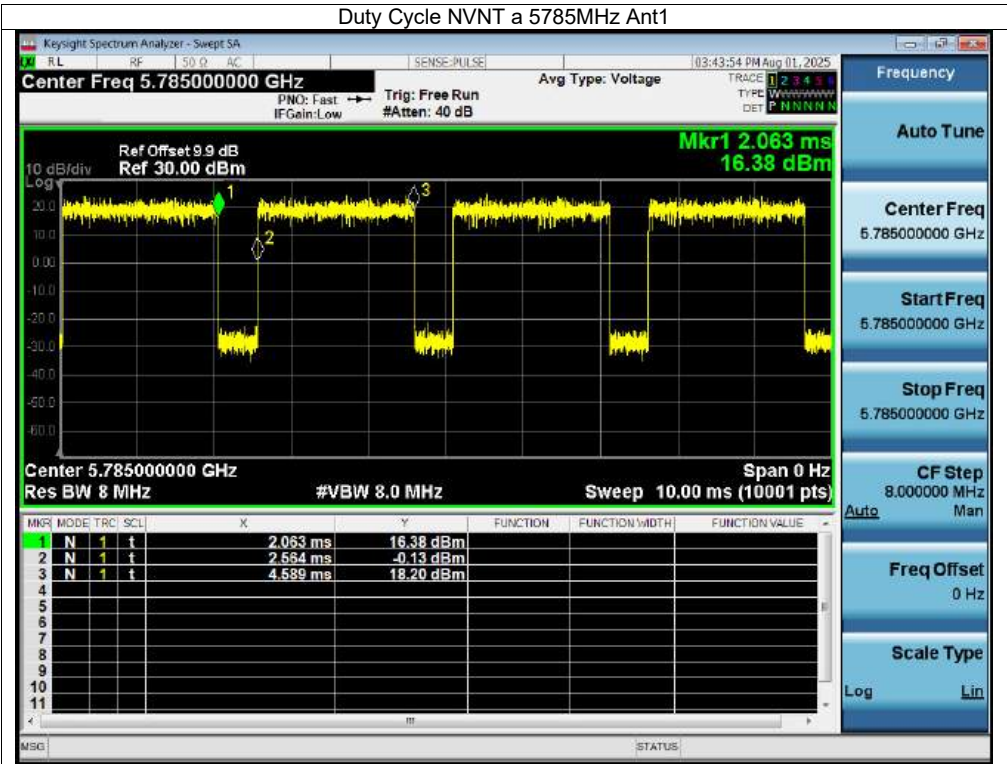


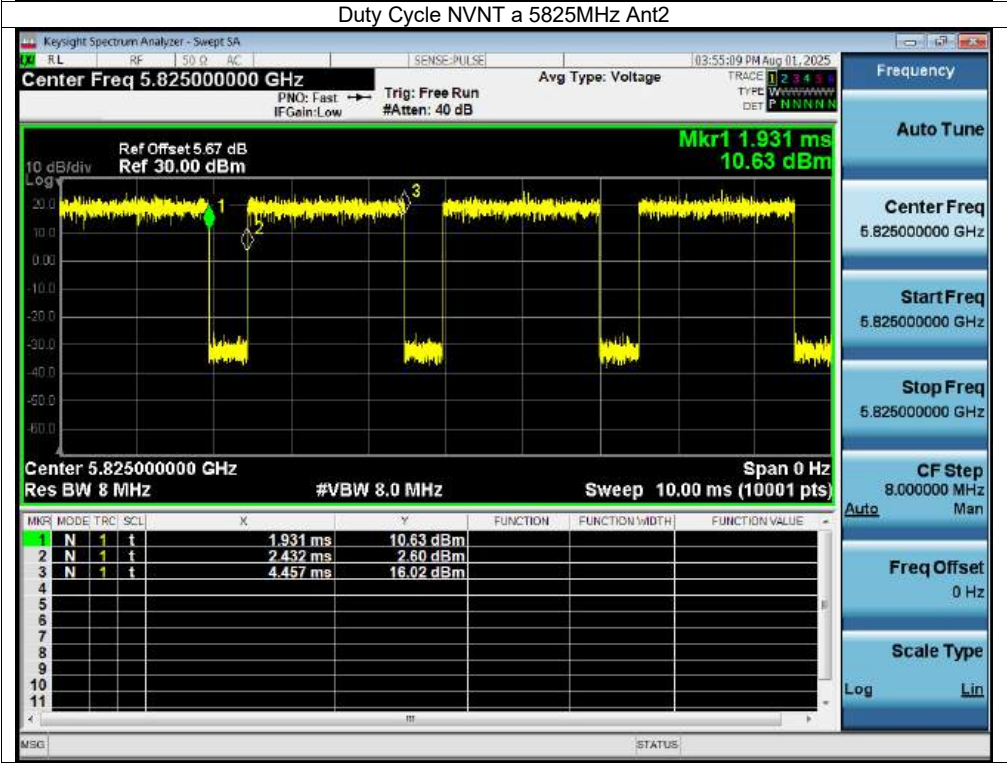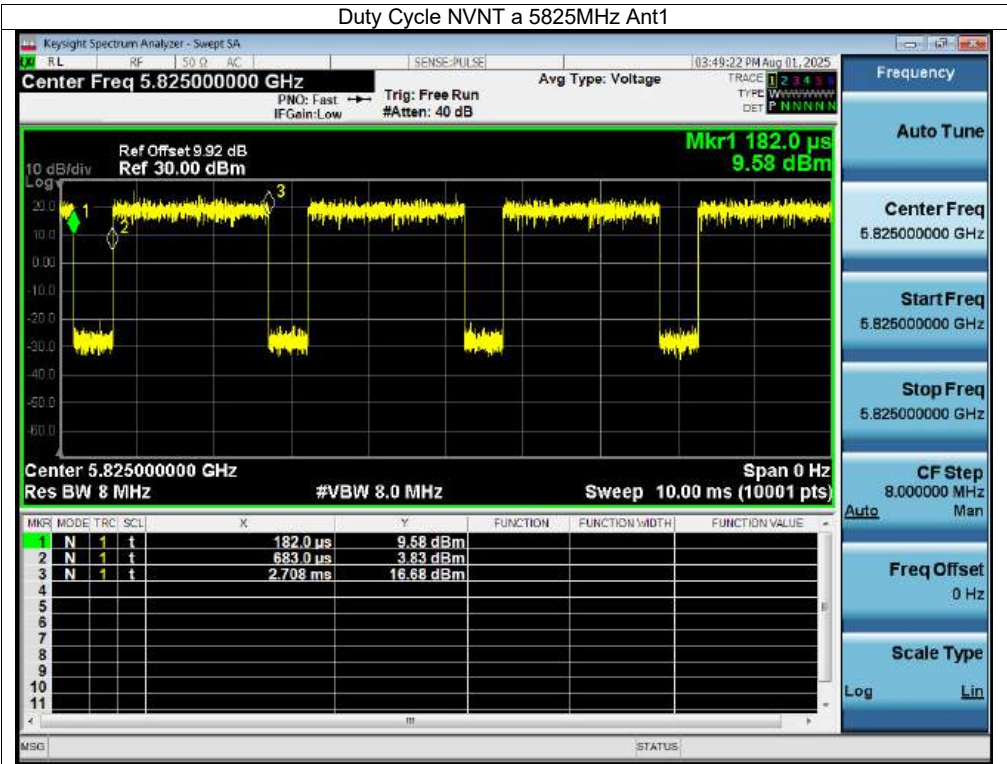


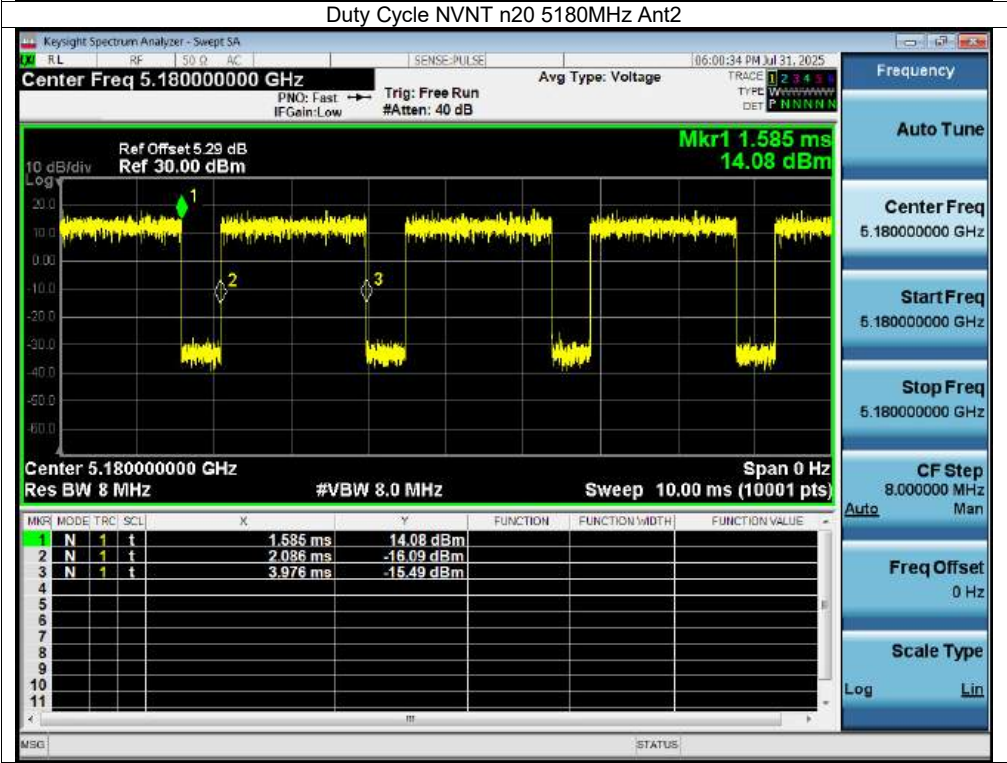
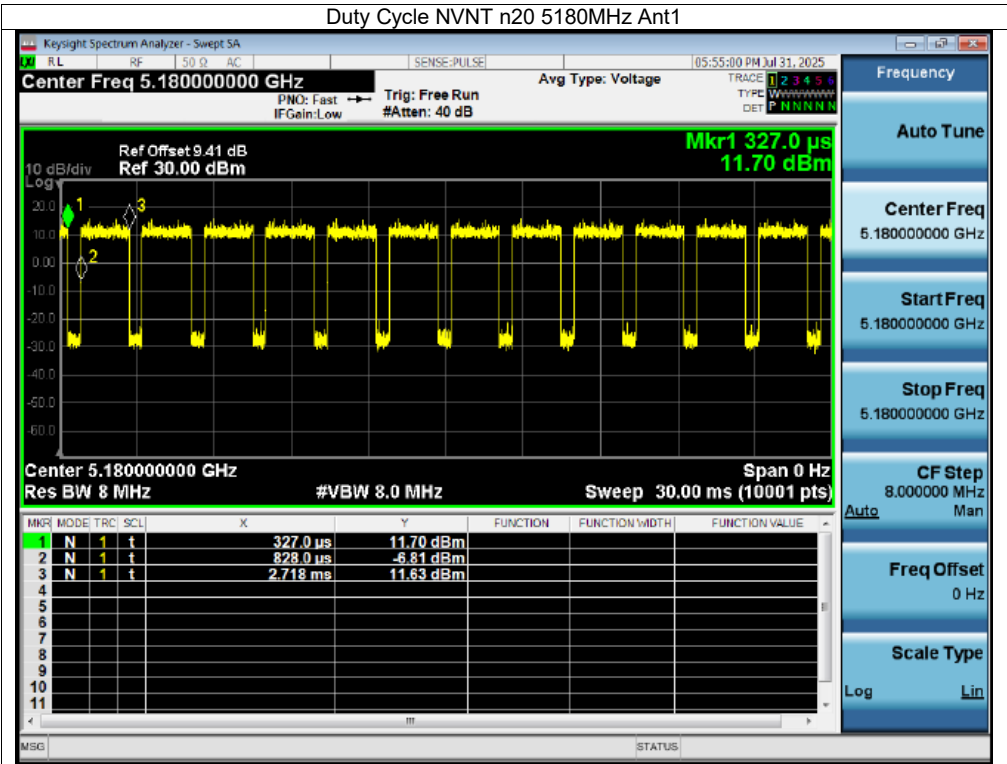


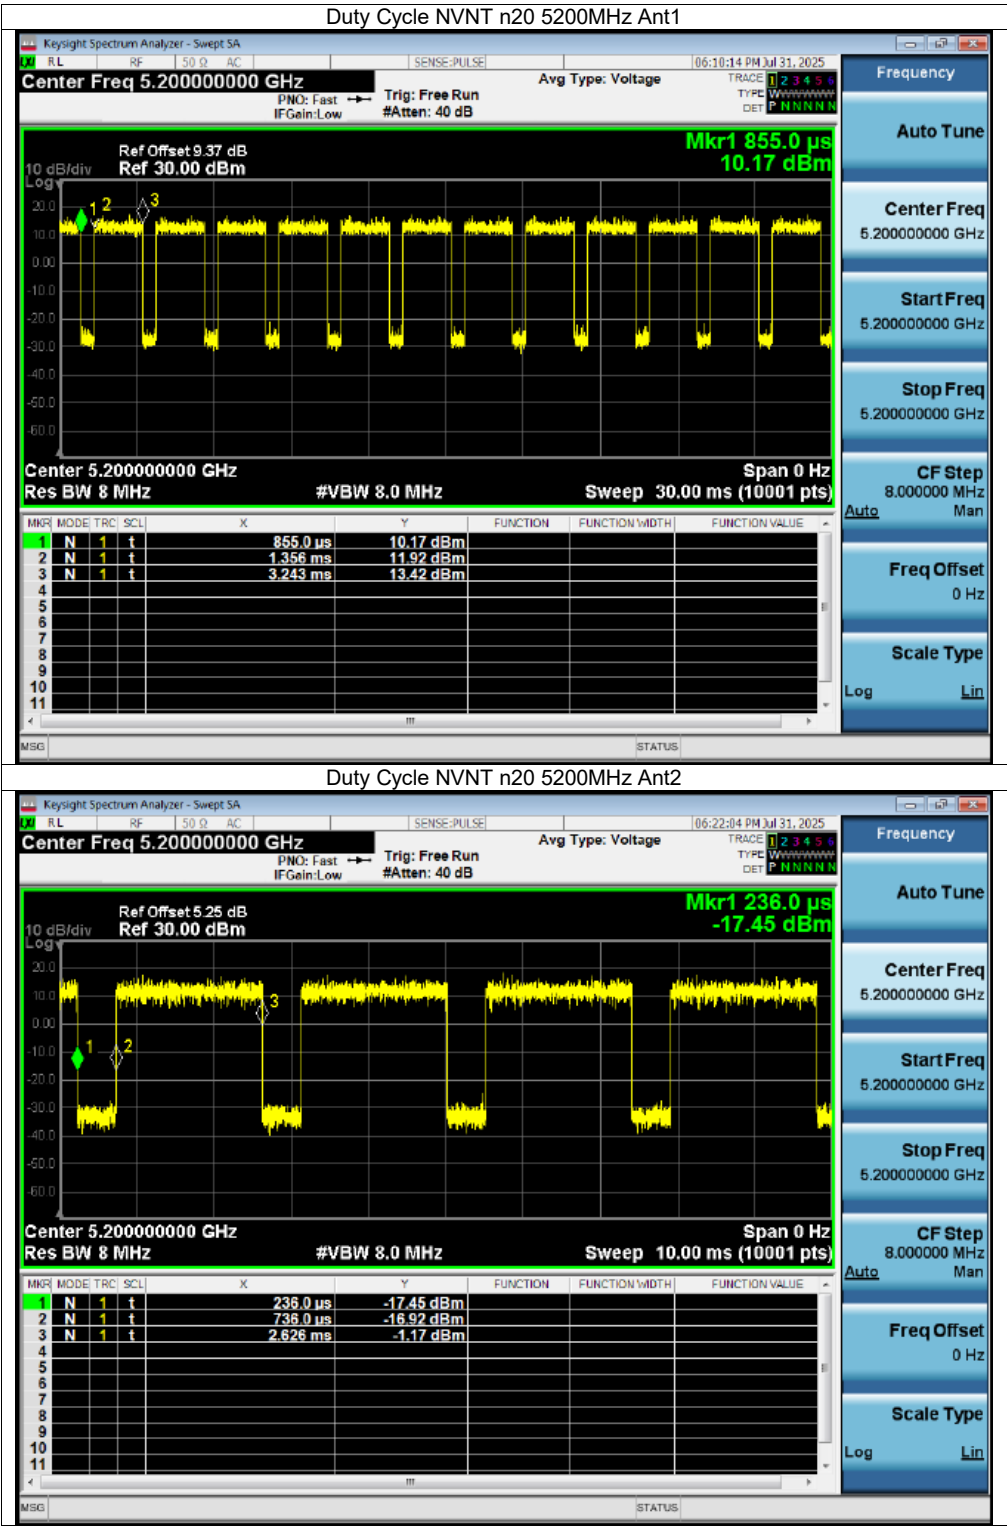


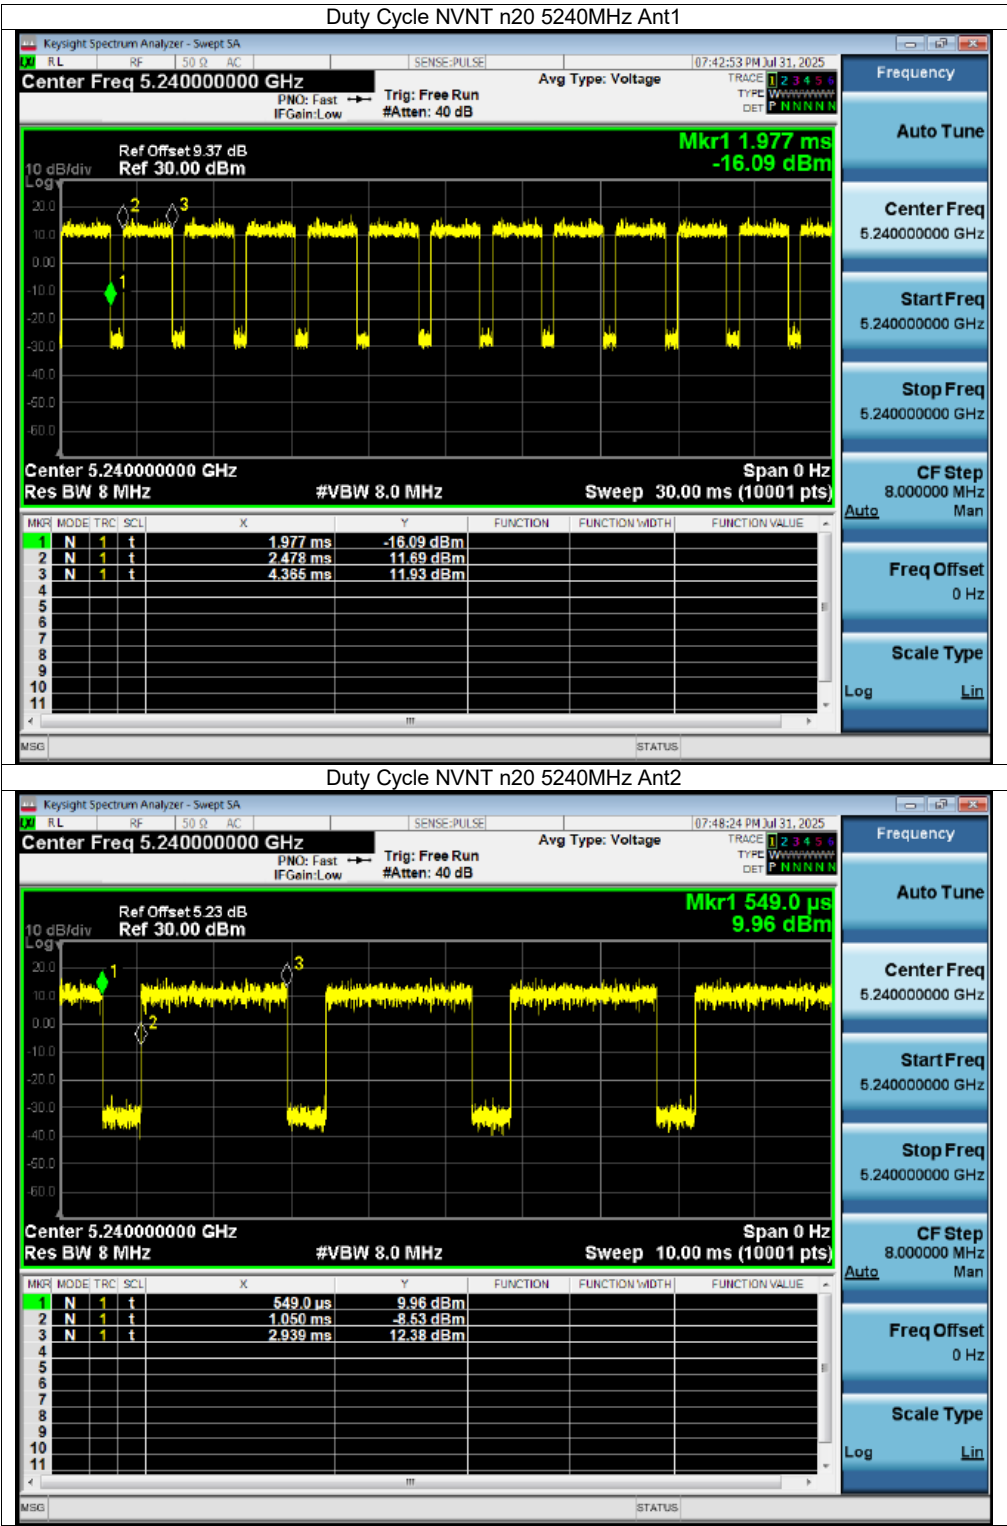

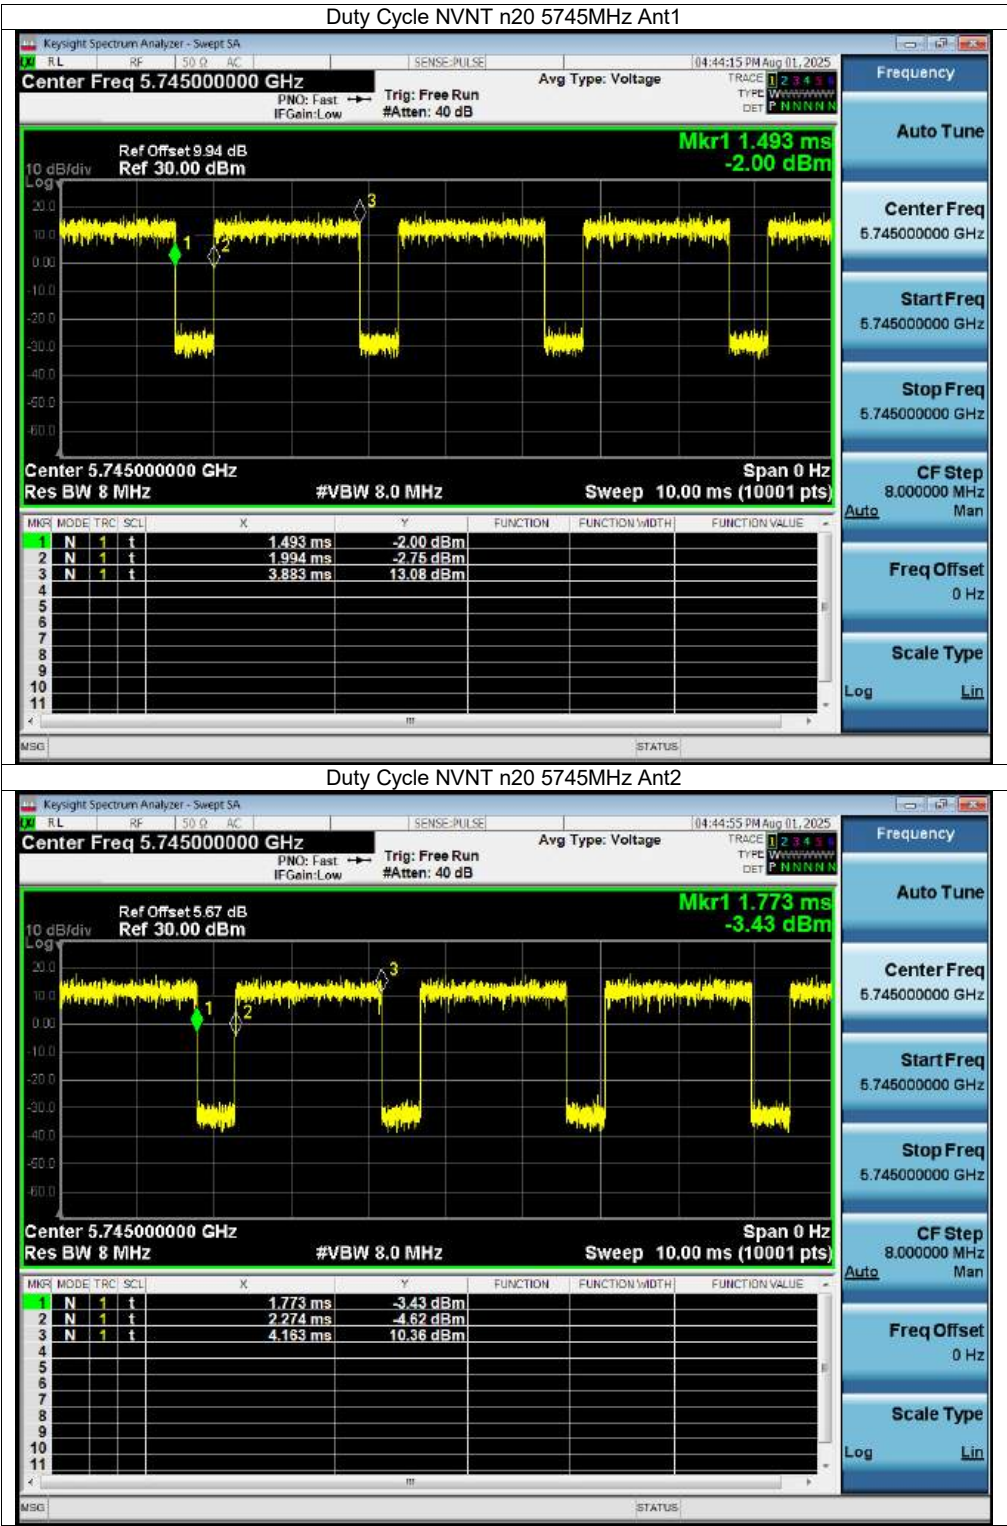

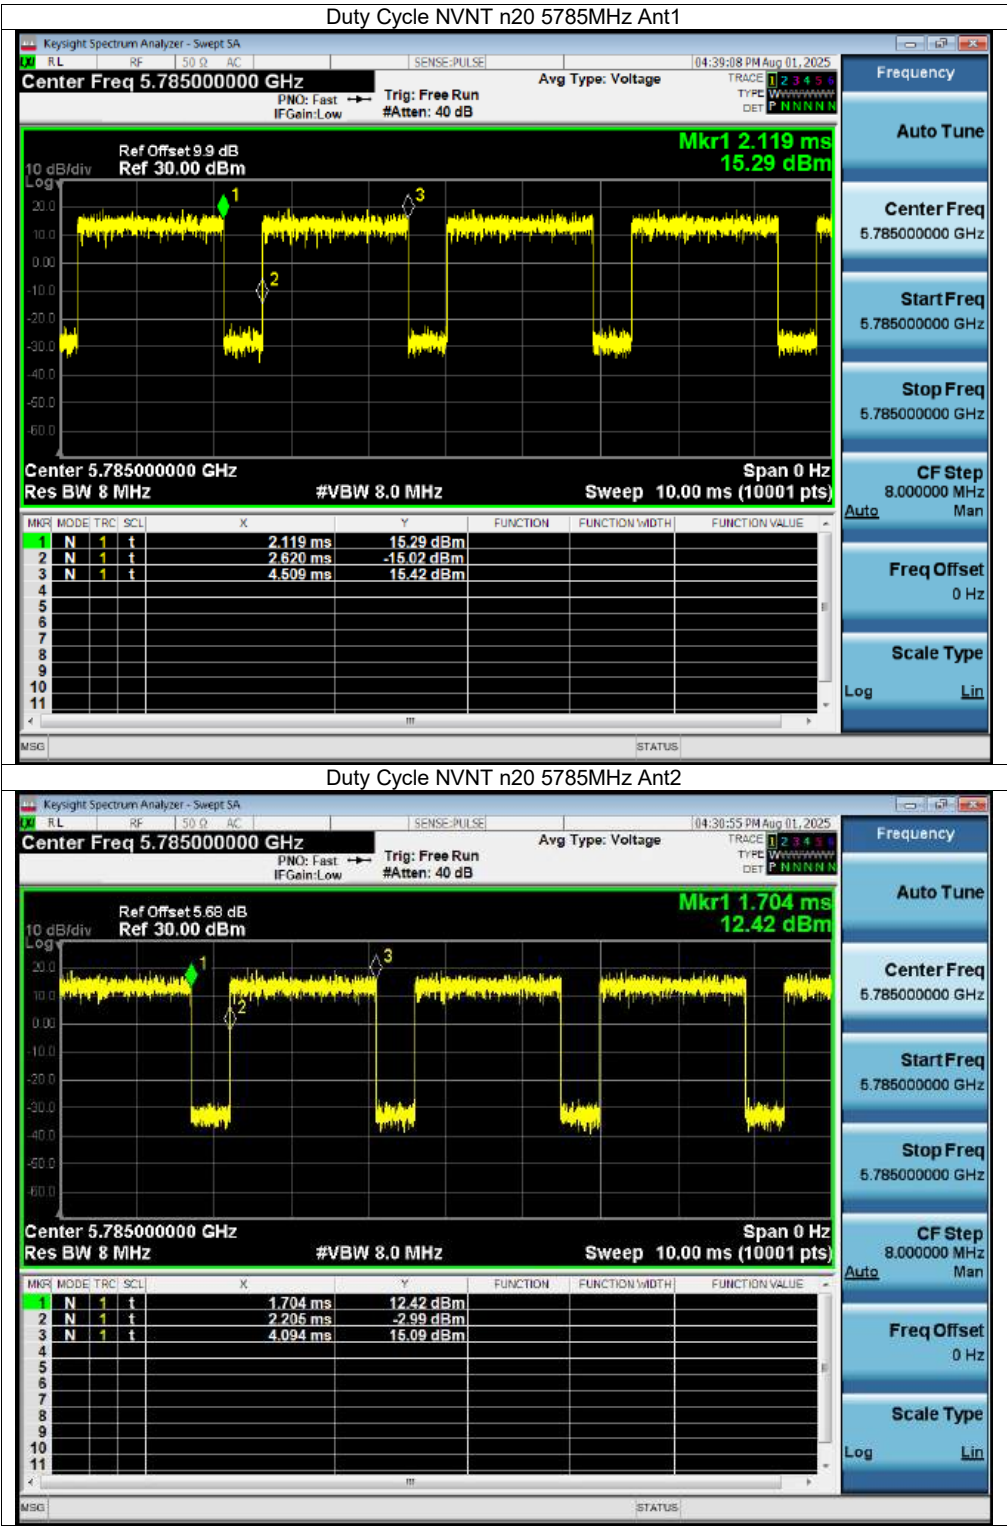

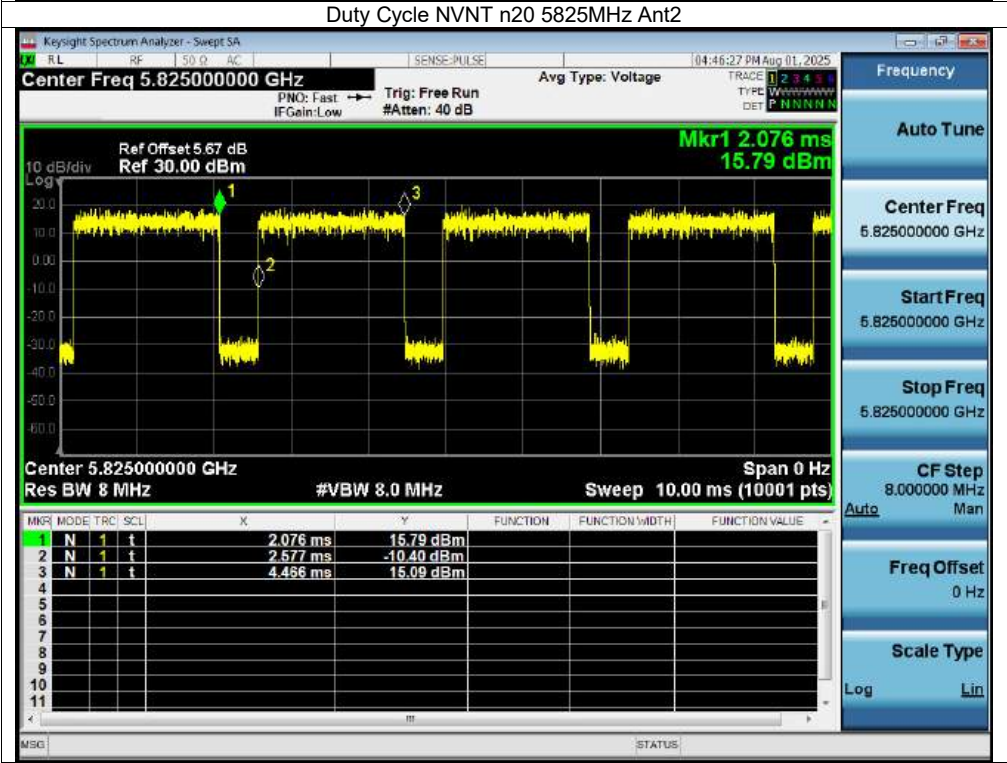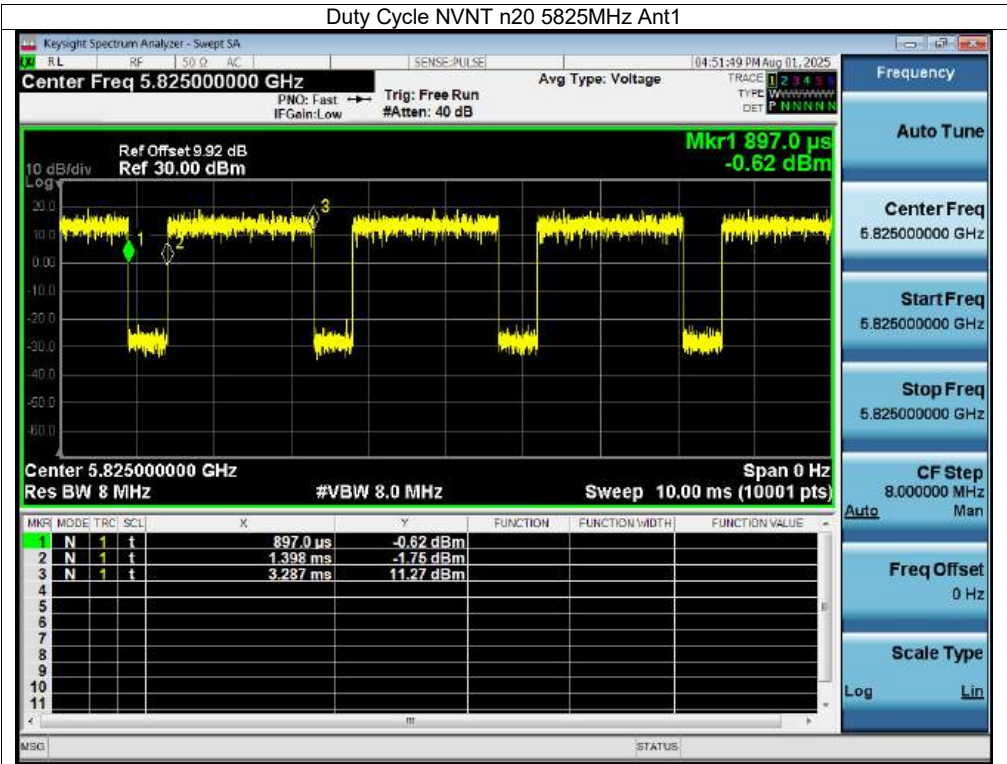

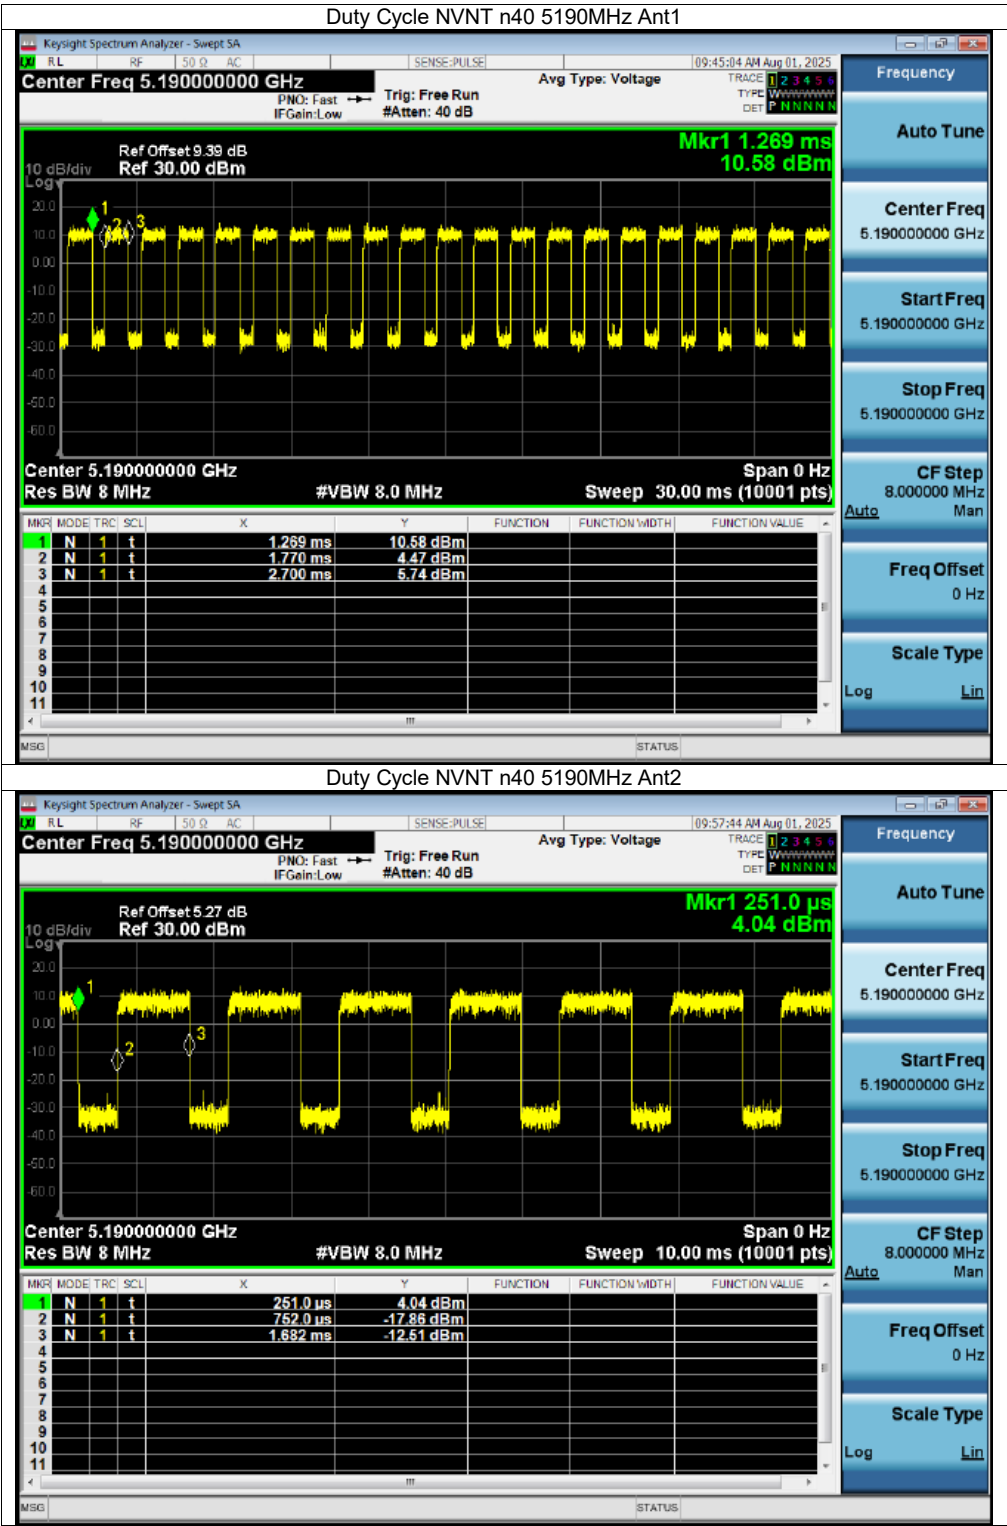

Duty Cycle NVNT n40 5190MHz Ant2

Keysight Spectrum Analyzer - Swept SA

RLRF50 OACSENSE-PULSE

09:57:44 AM Aug 01, 2025

Center Freq 5.190000000 GHz

Trig: Free Run

Avg Type: Voltage

TRACED 1 2 3 4 5 6

TYPE W W W W W W

DET P N N N N N

Ref Offset 5.27 dB

Ref 30.00 dBm

Mkr1 251.0 μs

4.04 dBm

Center 5.190000000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 10.00 ms (10001 pts)

Span 0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	t	251.0 μs	4.04 dBm			
2	N	1	t	752.0 μs	-17.86 dBm			
3	N	1	t	1.682 ms	-12.51 dBm			
4								
5								
6								
7								
8								
9								
10								
11								

MSG

STATUS

Frequency

Auto Tune

Center Freq 5.190000000 GHz

Start Freq 5.190000000 GHz

Stop Freq 5.190000000 GHz


CF Step 8.000000 MHz



Auto Man


Freq Offset 0 Hz

Scale Type

Log Lin

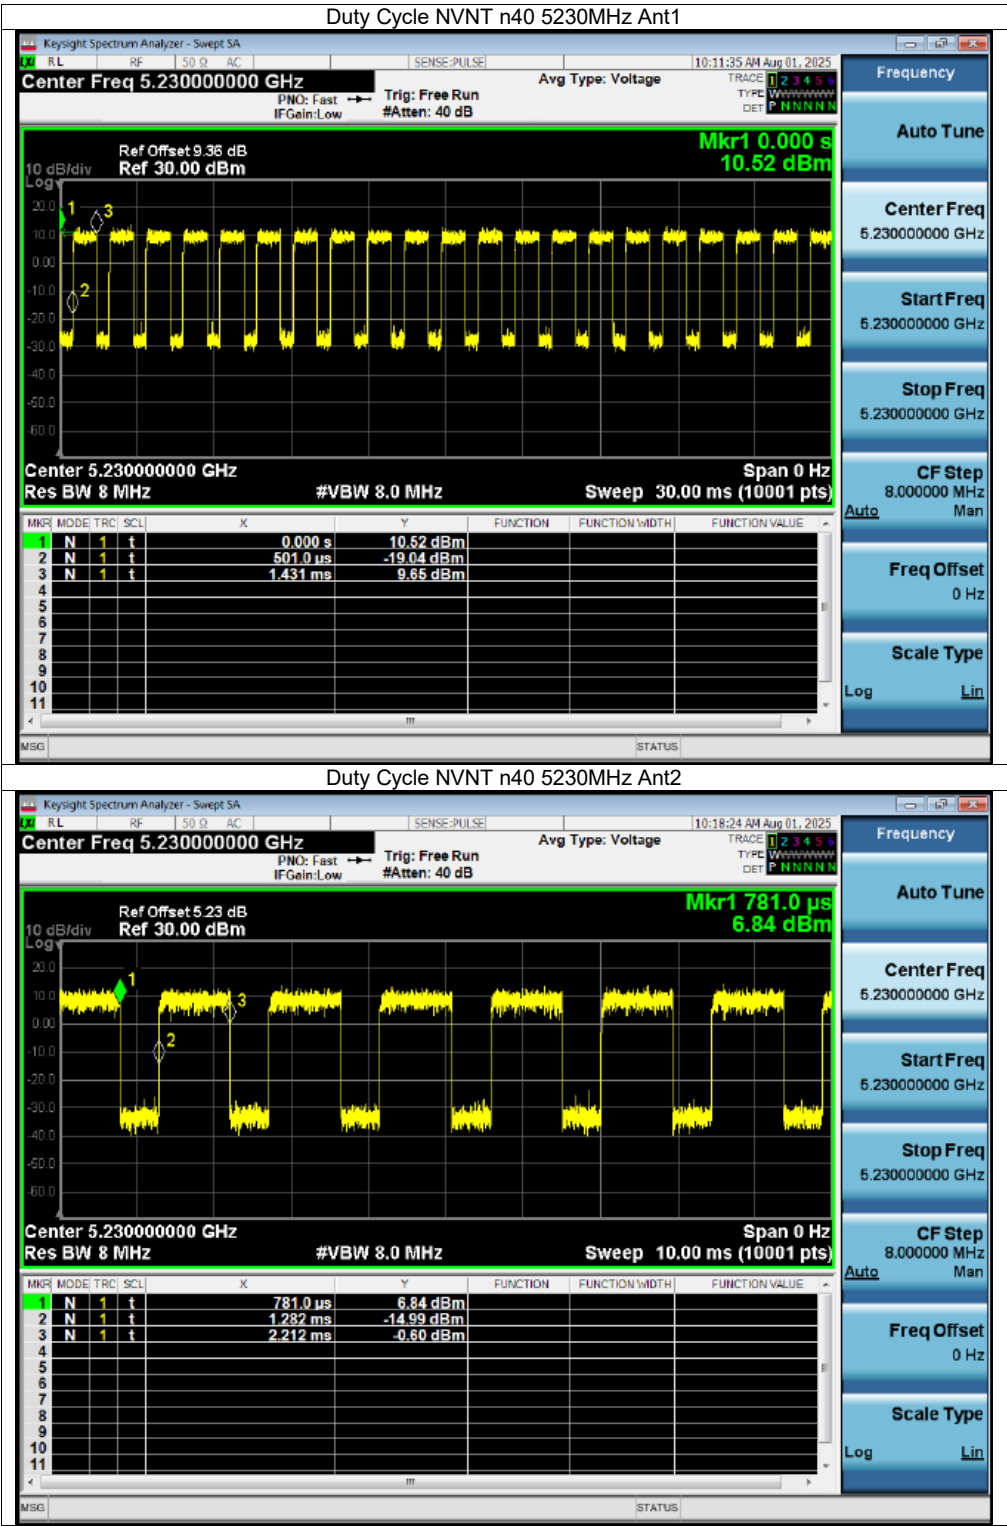

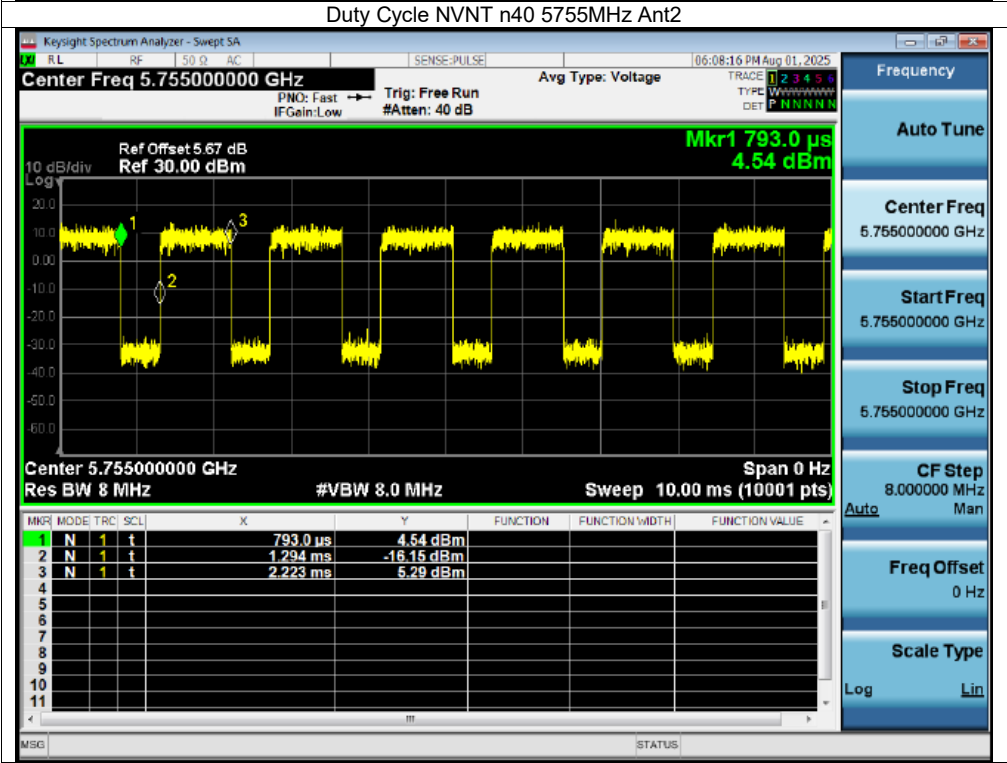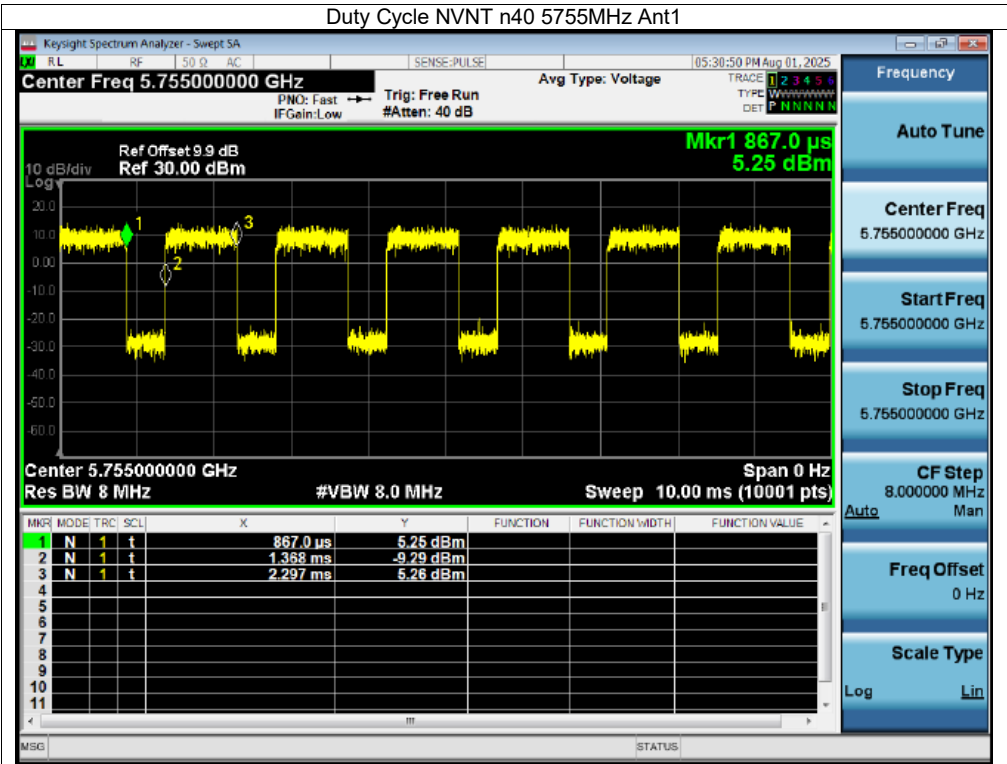

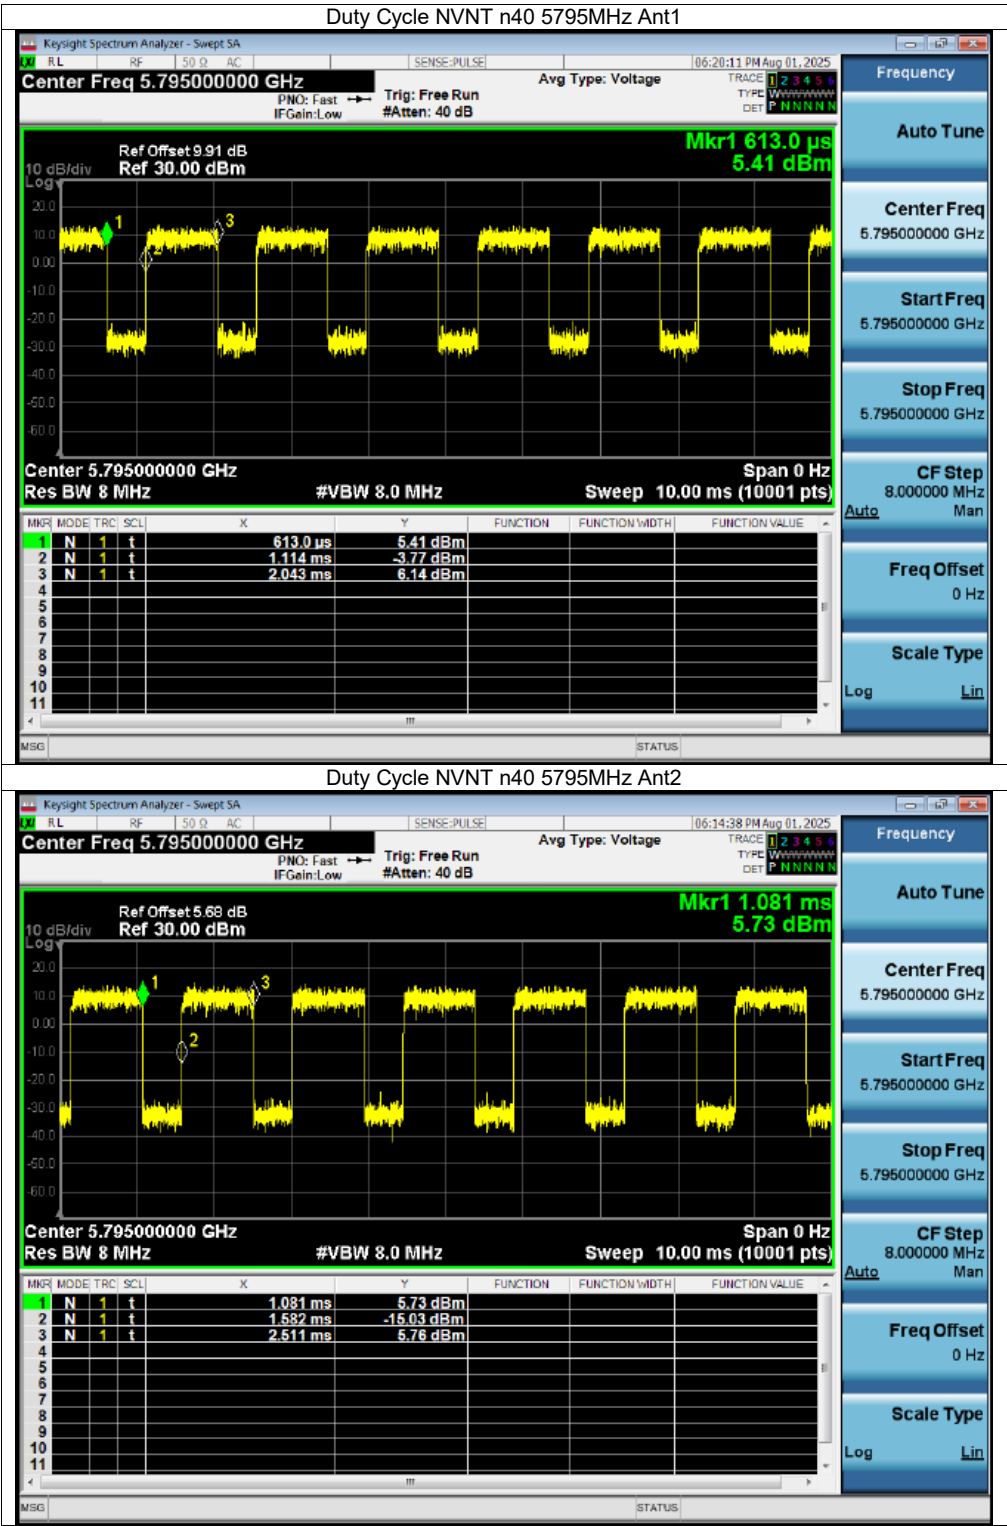

Duty Cycle NVNT n40 5795MHz Ant2

Keysight Spectrum Analyzer - Swept SA

RLRF500ACSENSE-PULSE

06:14:38 PM Aug 01, 2025

Center Freq 5.795000000 GHz

Trig: Free Run


Avg Type: Voltage

Ref Offset 5.69 dB

Ref 30.00 dBm

Mkr1 1.081 ms

5.73 dBm

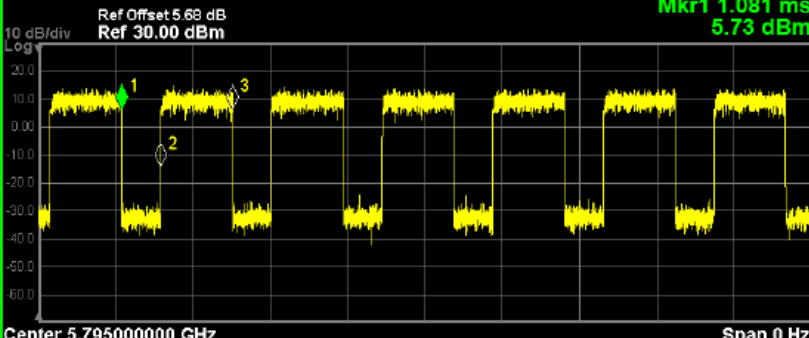

Center 5.795000000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 10.00 ms (10001 pts)

Span 0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	t	1.081 ms	5.73 dBm			
2	N	1	t	1.582 ms	-15.03 dBm			
3	N	1	t	2.511 ms	5.76 dBm			

MSG

STATUS

Frequency

Auto Tune

Center Freq 5.795000000 GHz

Start Freq 5.795000000 GHz

Stop Freq 5.795000000 GHz



CF Step 8.000000 MHz



Auto Man



Freq Offset 0 Hz



Scale Type


Log Lin

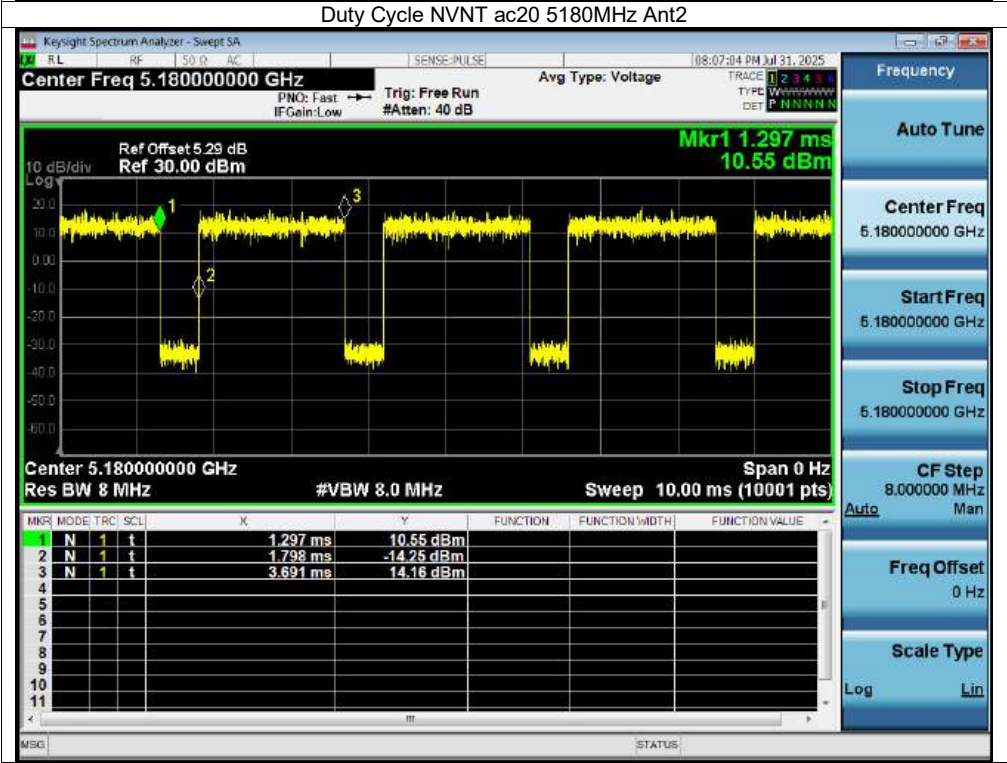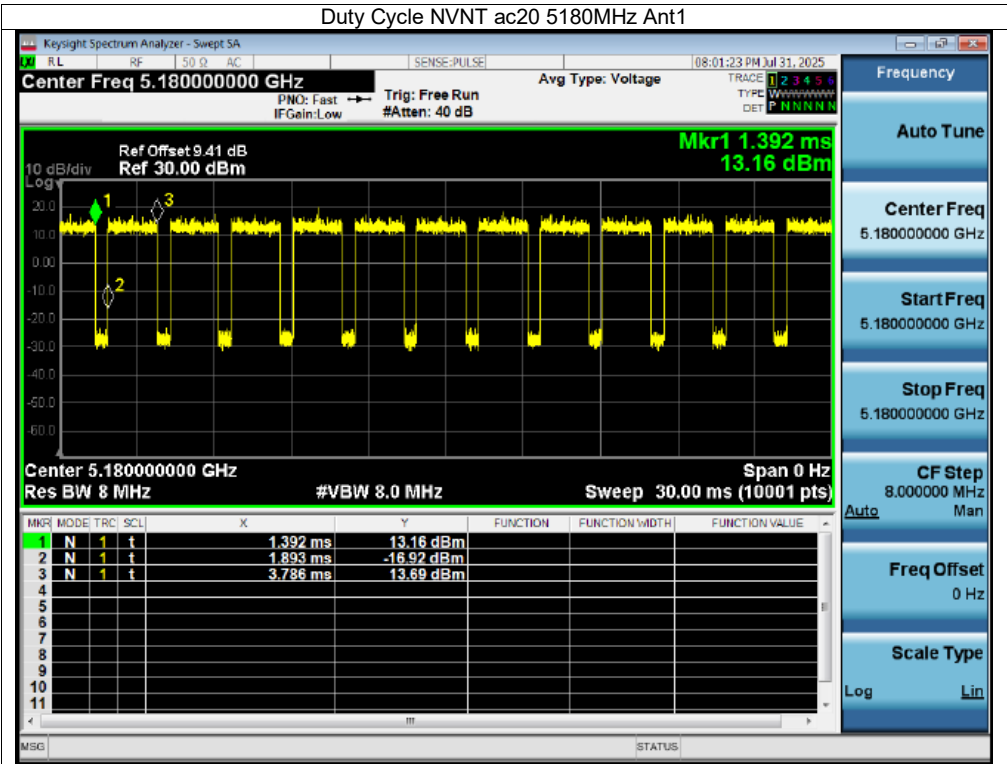


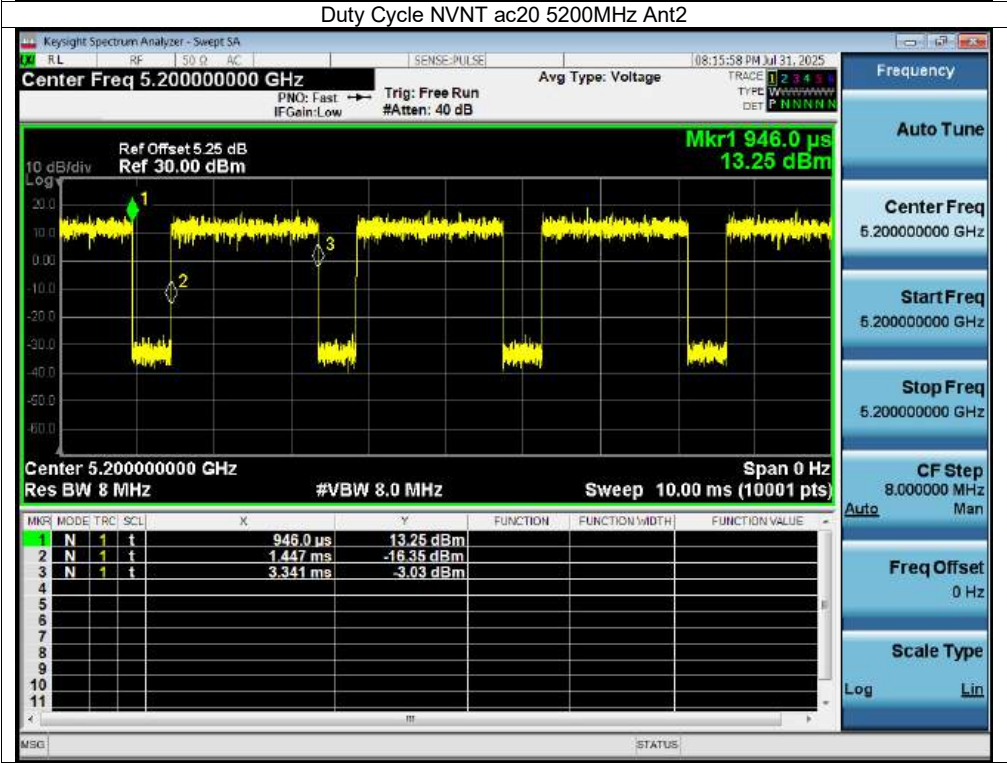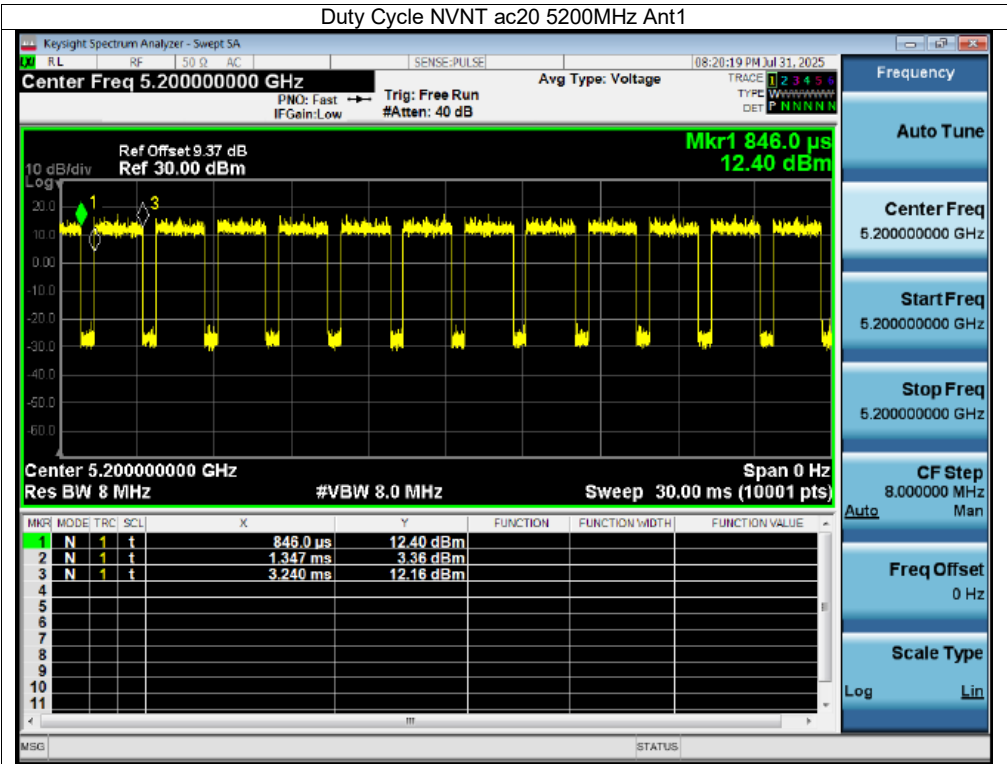

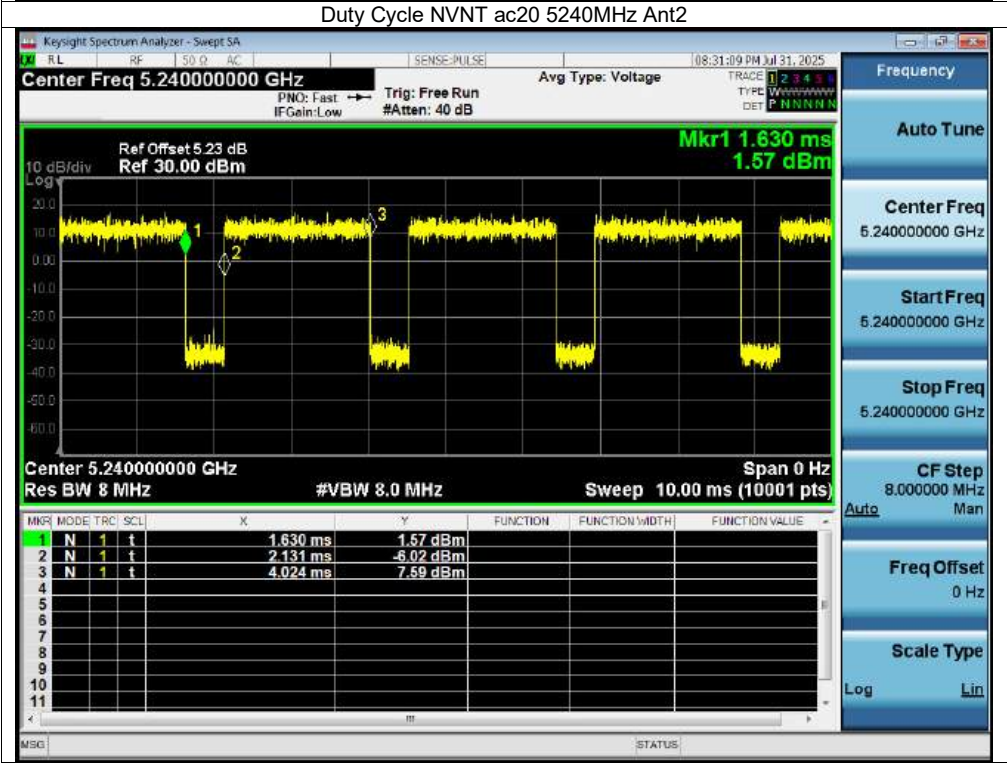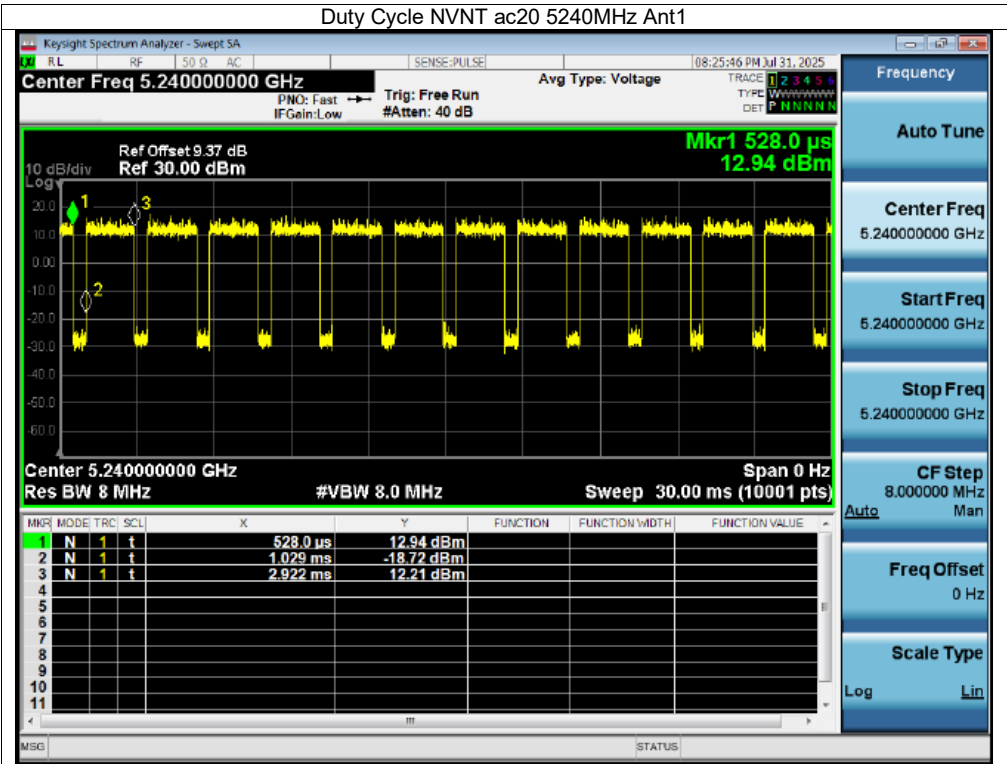

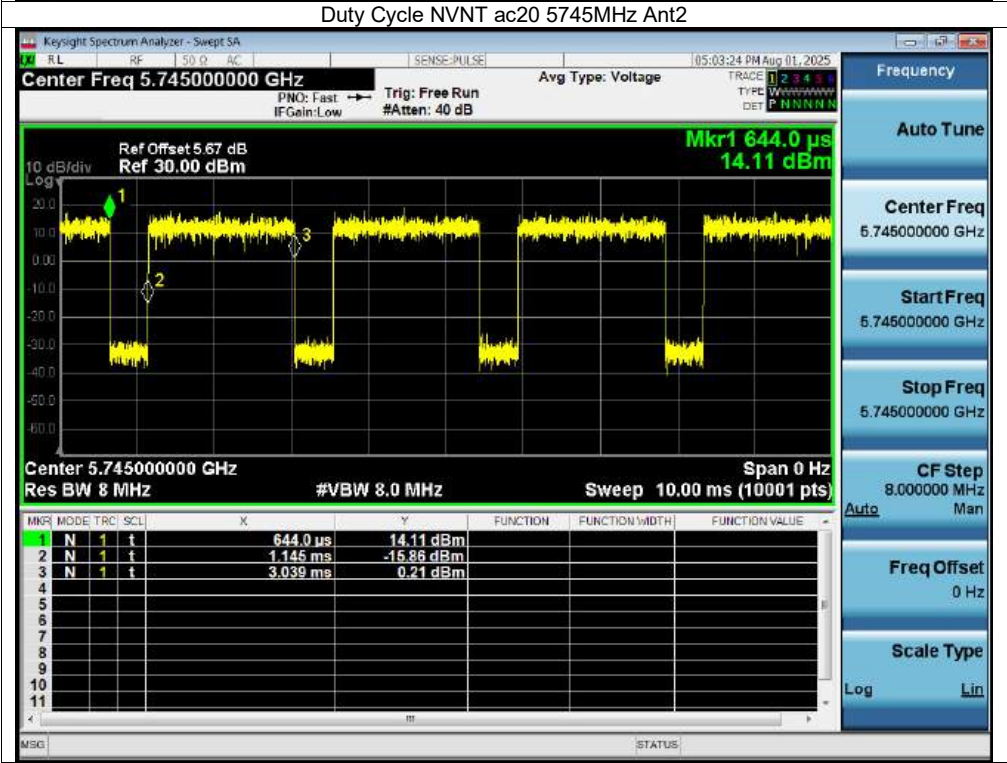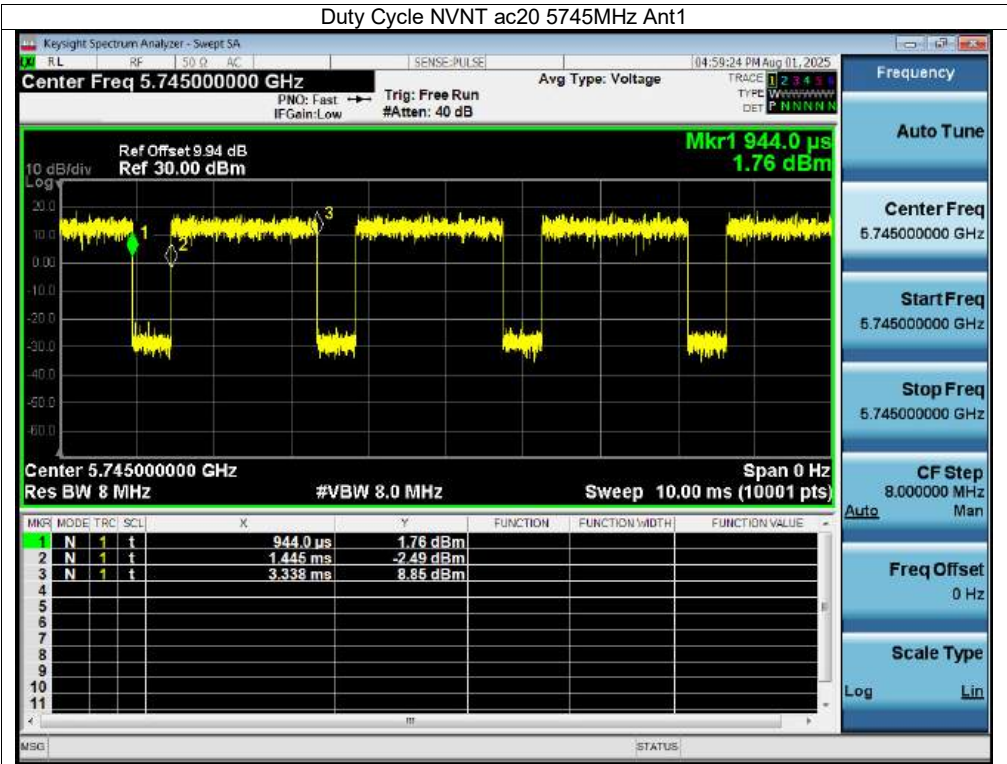

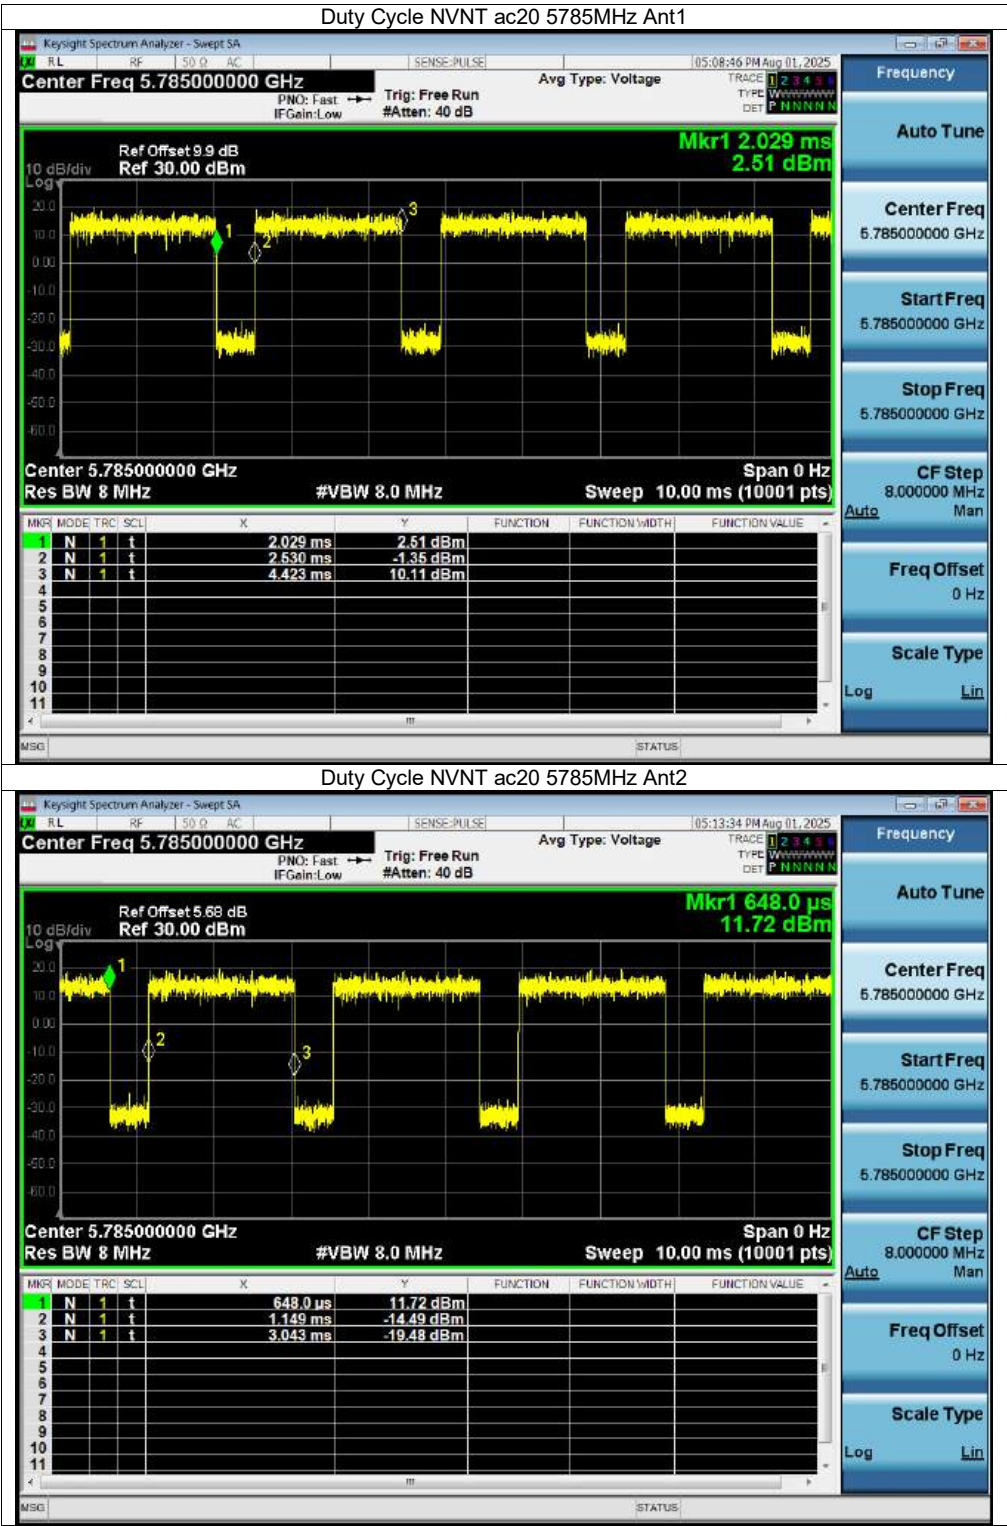

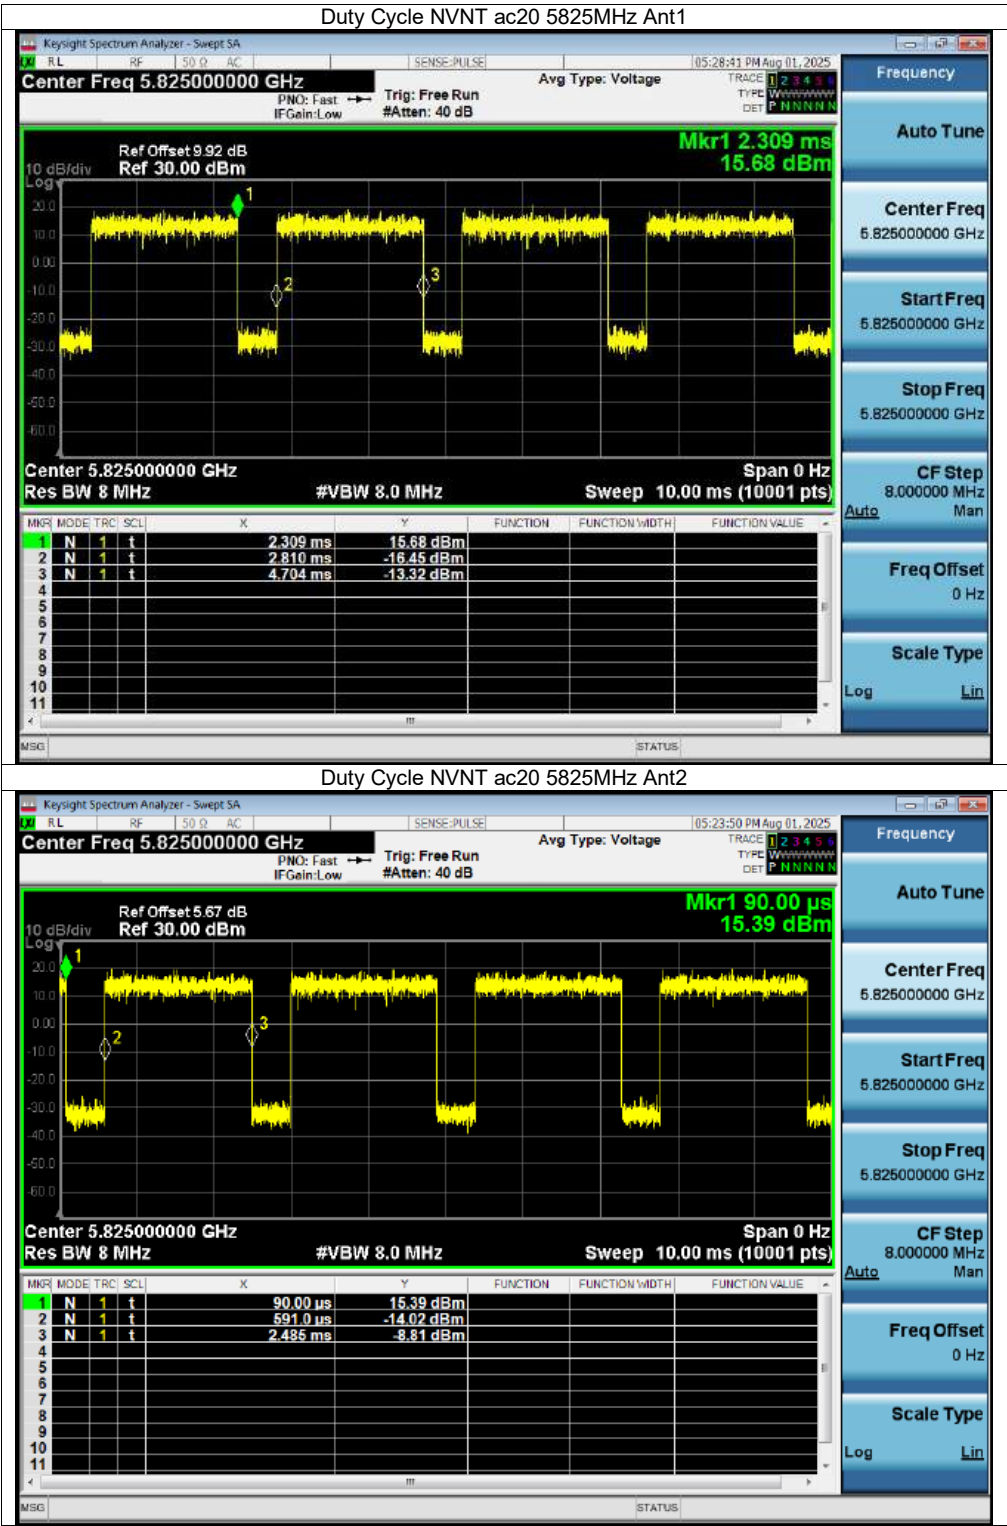

Duty Cycle NVNT ac20 5825MHz Ant2

Keysight Spectrum Analyzer - Sweep SA

RLRF500ACSENSE-PULSE

05:23:50 PM Aug 01, 2025

Center Freq 5.825000000 GHz

Trig: Free Run

Avg Type: Voltage

Ref Offset 5.67 dB

Ref 30.00 dBm

Mkr1 90.00 μ s

15.39 dBm

10 dB/div

Log

Center 5.825000000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 10.00 ms (10001 pts)

Span 0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	t	90.00 μ s	15.39 dBm			
2	N	1	t	591.0 μ s	-14.02 dBm			
3	N	1	t	2.486 ms	-8.81 dBm			
4								
5								
6								
7								
8								
9								
10								
11								

MSGSTATUS

Frequency

Auto Tune

Center Freq5.825000000 GHz

Start Freq5.825000000 GHz

Stop Freq5.825000000 GHz


CF Step8.000000 MHz


AutoMan

Freq Offset0 Hz

Scale Type

LogLin

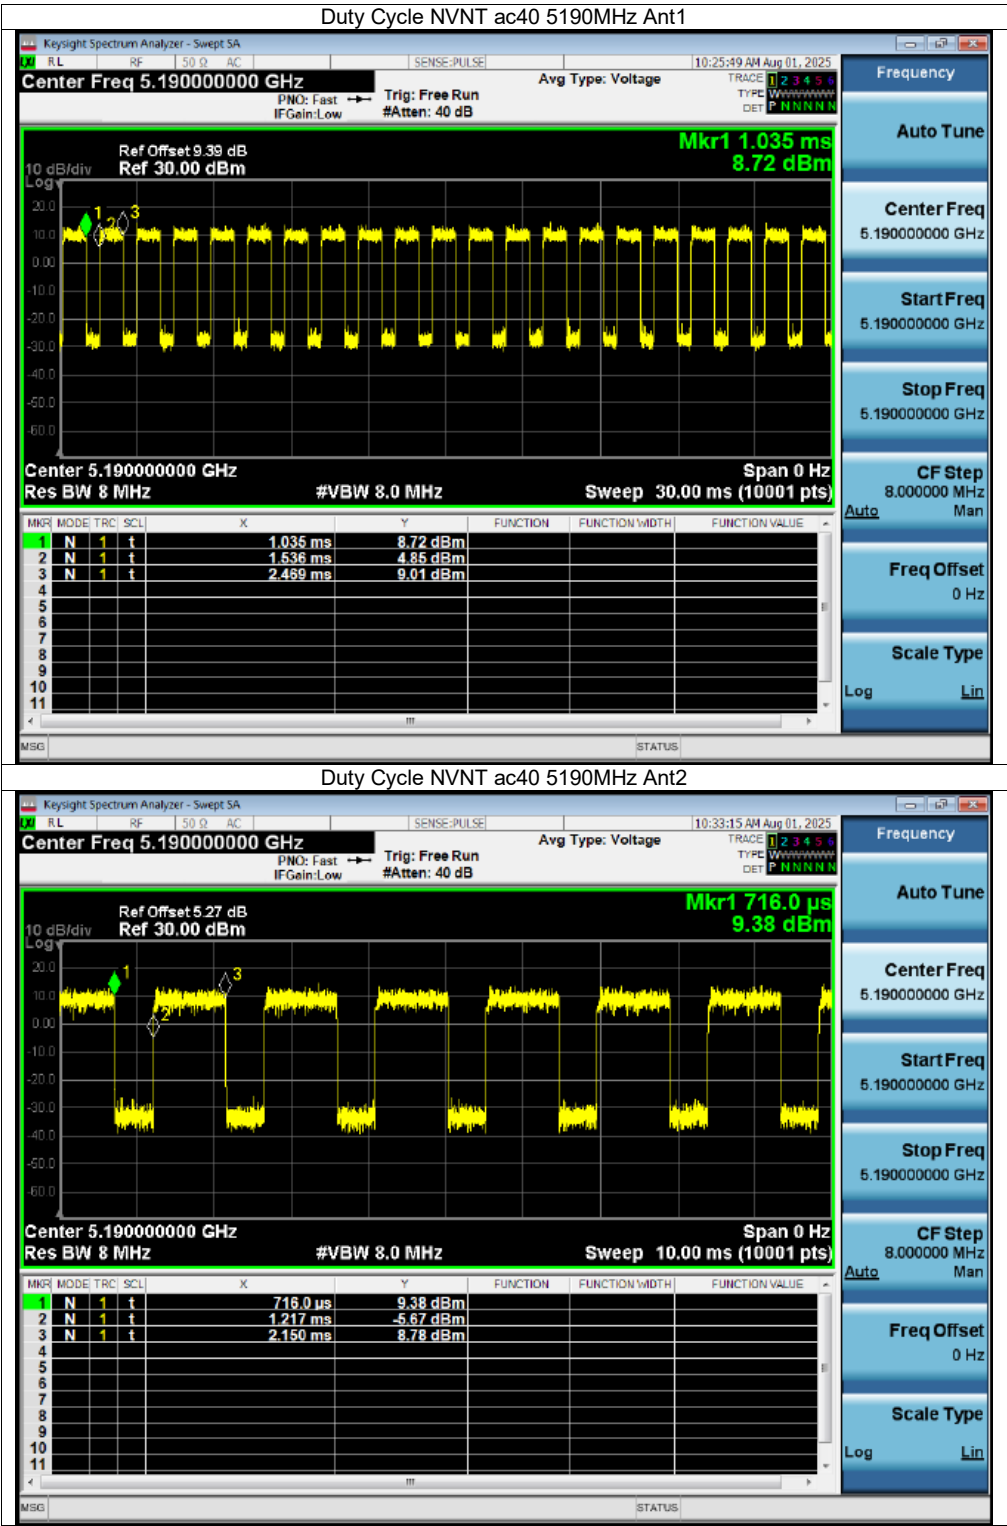

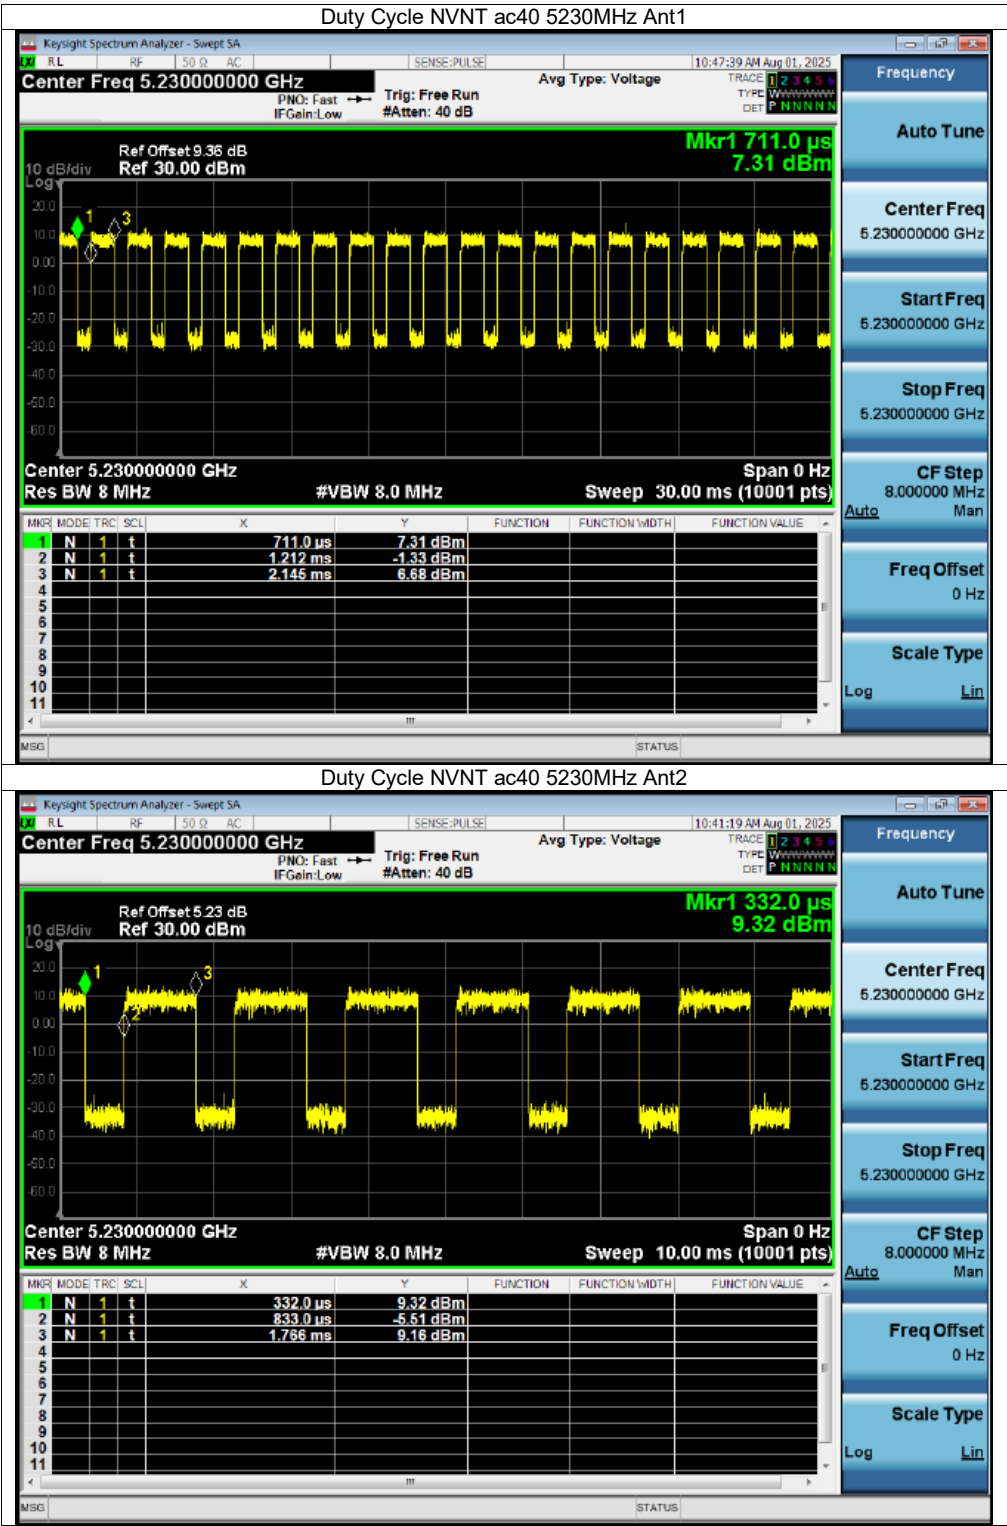

Duty Cycle NVNT ac40 5230MHz Ant2

Keysight Spectrum Analyzer - Swept SA

RLRF500ACSENSE-PULSE

10:41:19 AM Aug 01, 2025

Center Freq 5.230000000 GHz

Trig: Free Run

Avg Type: Voltage

TRACE 1 2 3 4 5 6

TYPE W W W W W W

DET P N N N N N

Ref Offset 5.23 dB

Ref 30.00 dBm

Mkr1 332.0 μ s

9.32 dBm

Center 5.230000000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 10.00 ms (10001 pts)

Span 0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	t	332.0 μ s	9.32 dBm			
2	N	1	t	833.0 μ s	-5.61 dBm			
3	N	1	t	1.766 ms	9.16 dBm			
4								
5								
6								
7								
8								
9								
10								
11								

MSG

STATUS

Frequency

Auto Tune

Center Freq 5.230000000 GHz

Start Freq 5.230000000 GHz

Stop Freq 5.230000000 GHz


CF Step 8.000000 MHz

Auto Man

Freq Offset 0 Hz

Scale Type

Log Lin

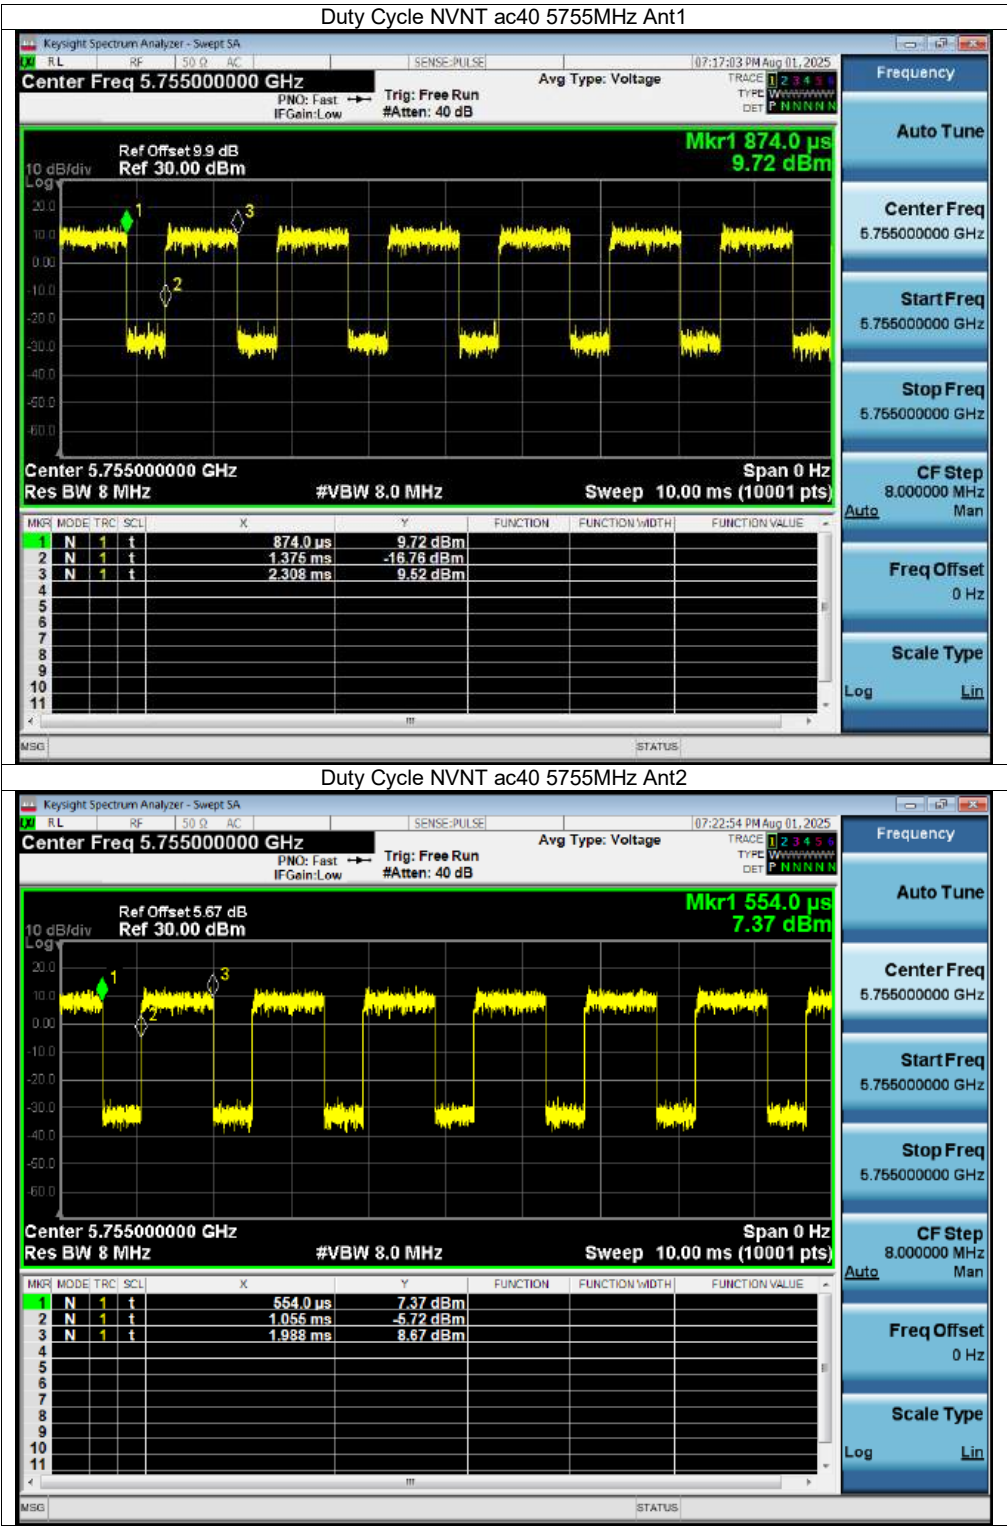

Duty Cycle NVNT ac40 5755MHz Ant2

Keysight Spectrum Analyzer - Swept SA

RLRF500ACSENSE-PULSE

07:22:54 PM Aug 01, 2025

Center Freq 5.755000000 GHz

Trig: Free Run


Avg Type: Voltage

Ref Offset 5.67 dB

Ref 30.00 dBm

Mkr1 554.0 μ s

7.37 dBm

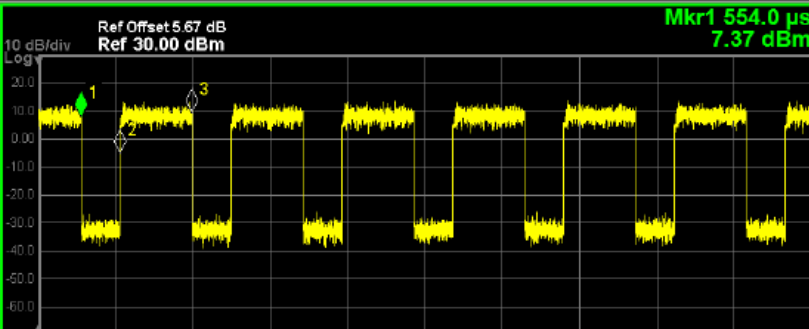

Center 5.755000000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 10.00 ms (10001 pts)

Span 0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	t	554.0 μ s	7.37 dBm			
2	N	1	t	1.056 ms	-5.72 dBm			
3	N	1	t	1.988 ms	8.67 dBm			
4								
5								
6								
7								
8								
9								
10								
11								

MSGSTATUS

Frequency

Auto Tune

Center Freq 5.755000000 GHz

Start Freq 5.755000000 GHz



Stop Freq 5.755000000 GHz

CF Step 8.000000 MHz

Auto Man

Freq Offset 0 Hz

Scale Type Log Lin

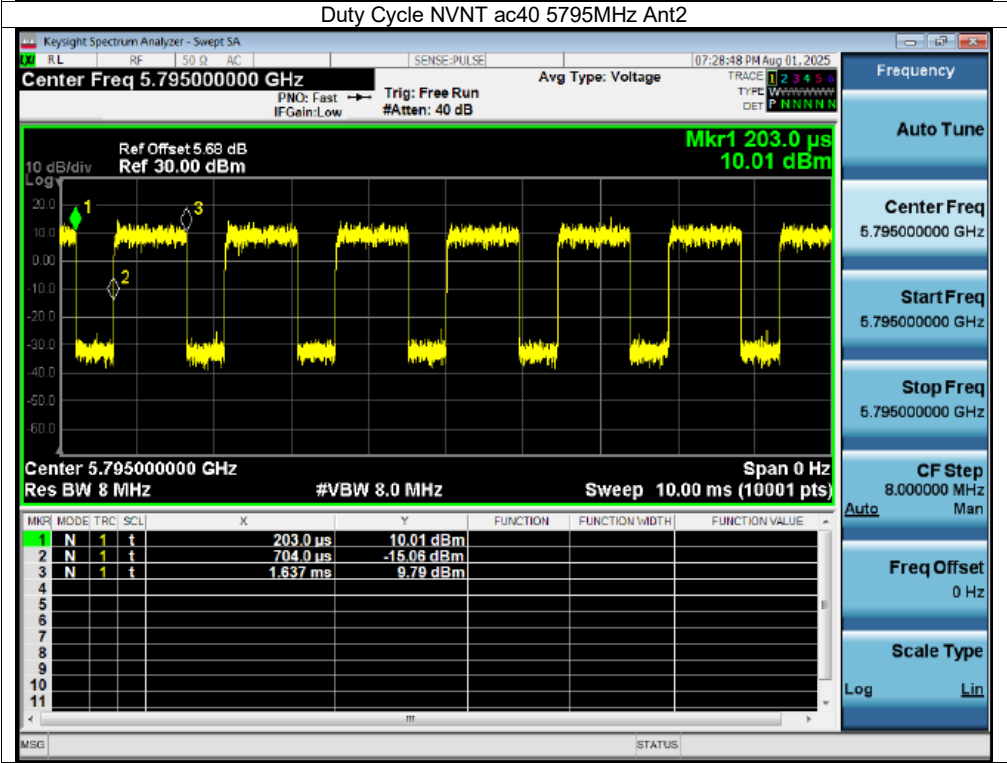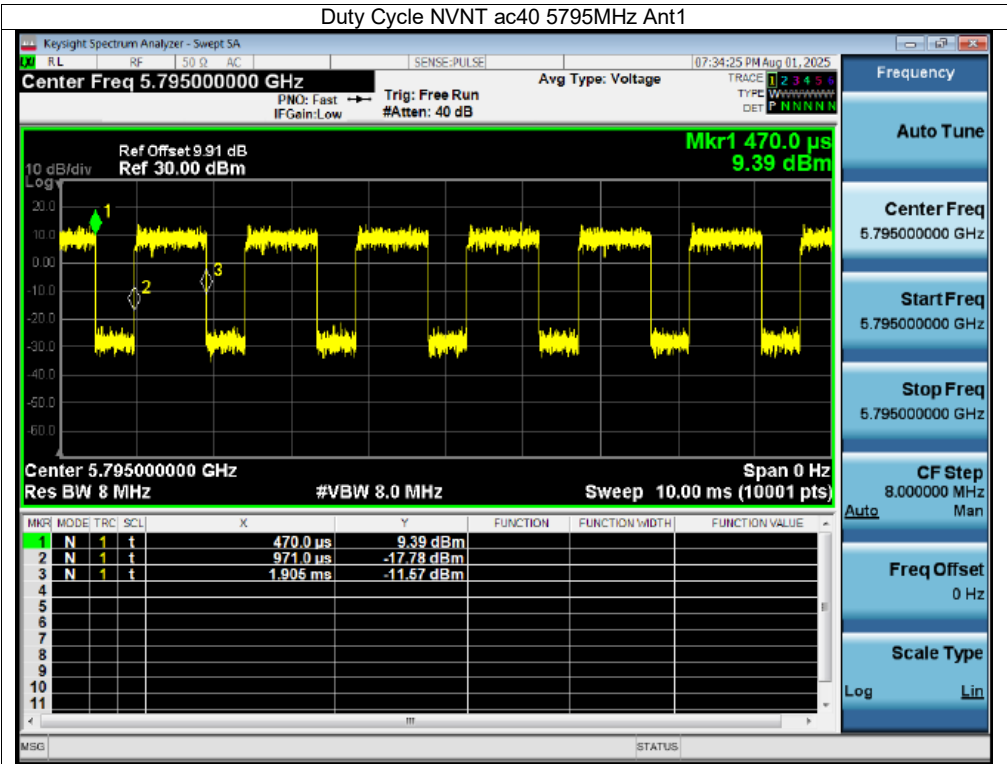


Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	15.13	0.96	16.09	22.55	Pass
NVNT	a	5180	Ant2	15.55	0.96	16.51	22.55	Pass
NVNT	a	5200	Ant1	15.26	0.96	16.22	22.55	Pass
NVNT	a	5200	Ant2	15.54	0.96	16.5	22.55	Pass
NVNT	a	5240	Ant1	14.25	0.96	15.21	22.55	Pass
NVNT	a	5240	Ant2	14.52	0.96	15.48	22.55	Pass
NVNT	a	5745	Ant1	15.39	0.96	16.35	30	Pass
NVNT	a	5745	Ant2	15.31	0.96	16.27	30	Pass
NVNT	a	5785	Ant1	16.35	0.96	17.31	30	Pass
NVNT	a	5785	Ant2	16.02	0.96	16.98	30	Pass
NVNT	a	5825	Ant1	16.56	0.96	17.52	30	Pass
NVNT	a	5825	Ant2	16.3	0.96	17.26	30	Pass
NVNT	n20	5180	Ant1	9.43	1.02	10.45	22.55	Pass
NVNT	n20	5180	Ant2	9.83	1.02	10.85	22.55	Pass
NVNT	n20	5180	Sum	12.64	-	13.66	22.55	Pass
NVNT	n20	5200	Ant1	9.57	1.02	10.59	22.55	Pass
NVNT	n20	5200	Ant2	9.9	1.02	10.92	22.55	Pass
NVNT	n20	5200	Sum	12.75	-	13.77	22.55	Pass
NVNT	n20	5240	Ant1	8.68	1.02	9.7	22.55	Pass
NVNT	n20	5240	Ant2	8.65	1.02	9.67	22.55	Pass
NVNT	n20	5240	Sum	11.68	-	12.7	22.55	Pass
NVNT	n20	5745	Ant1	9.93	1.02	10.95	30	Pass
NVNT	n20	5745	Ant2	10.1	1.02	11.12	30	Pass
NVNT	n20	5745	Sum	13.03	-	14.05	30	Pass
NVNT	n20	5785	Ant1	10.96	1.02	11.98	30	Pass
NVNT	n20	5785	Ant2	10.99	1.02	12.01	30	Pass
NVNT	n20	5785	Sum	13.99	-	15.01	30	Pass
NVNT	n20	5825	Ant1	11.4	1.02	12.42	30	Pass
NVNT	n20	5825	Ant2	11.35	1.02	12.37	30	Pass
NVNT	n20	5825	Sum	14.39	-	15.41	30	Pass
NVNT	n40	5190	Ant1	8.19	1.87	10.06	22.55	Pass
NVNT	n40	5190	Ant2	7.97	1.87	9.84	22.55	Pass
NVNT	n40	5190	Sum	11.09	-	12.96	22.55	Pass
NVNT	n40	5230	Ant1	7.86	1.87	9.73	22.55	Pass
NVNT	n40	5230	Ant2	8.42	1.87	10.29	22.55	Pass
NVNT	n40	5230	Sum	11.16	-	13.03	22.55	Pass
NVNT	n40	5755	Ant1	8.32	1.87	10.19	30	Pass
NVNT	n40	5755	Ant2	8.48	1.87	10.35	30	Pass
NVNT	n40	5755	Sum	11.41	-	13.28	30	Pass
NVNT	n40	5795	Ant1	9.05	1.87	10.92	30	Pass
NVNT	n40	5795	Ant2	8.97	1.87	10.84	30	Pass
NVNT	n40	5795	Sum	12.02	-	13.89	30	Pass
NVNT	ac20	5180	Ant1	9.75	1.02	10.77	22.55	Pass
NVNT	ac20	5180	Ant2	9.96	1.02	10.98	22.55	Pass
NVNT	ac20	5180	Sum	12.87	-	13.89	22.55	Pass
NVNT	ac20	5200	Ant1	9.18	1.02	10.2	22.55	Pass
NVNT	ac20	5200	Ant2	9.89	1.02	10.91	22.55	Pass
NVNT	ac20	5200	Sum	12.56	-	13.58	22.55	Pass
NVNT	ac20	5240	Ant1	8.65	1.02	9.67	22.55	Pass
NVNT	ac20	5240	Ant2	9.18	1.02	10.2	22.55	Pass
NVNT	ac20	5240	Sum	11.93	-	12.95	22.55	Pass
NVNT	ac20	5745	Ant1	10.25	1.02	11.27	30	Pass
NVNT	ac20	5745	Ant2	10.13	1.02	11.15	30	Pass
NVNT	ac20	5745	Sum	13.2	-	14.22	30	Pass
NVNT	ac20	5785	Ant1	11.12	1.02	12.14	30	Pass
NVNT	ac20	5785	Ant2	10.99	1.02	12.01	30	Pass
NVNT	ac20	5785	Sum	14.07	-	15.09	30	Pass
NVNT	ac20	5825	Ant1	12.35	0	12.35	30	Pass
NVNT	ac20	5825	Ant2	11.31	1.02	12.33	30	Pass
NVNT	ac20	5825	Sum	14.87	-	15.35	30	Pass
NVNT	ac40	5190	Ant1	7.82	1.87	9.69	22.55	Pass
NVNT	ac40	5190	Ant2	8.7	1.87	10.57	22.55	Pass
NVNT	ac40	5190	Sum	11.29	-	13.16	22.55	Pass
NVNT	ac40	5230	Ant1	7.25	1.87	9.12	22.55	Pass
NVNT	ac40	5230	Ant2	8.59	1.87	10.46	22.55	Pass
NVNT	ac40	5230	Sum	10.98	-	12.85	22.55	Pass
NVNT	ac40	5755	Ant1	8.37	1.87	10.24	30	Pass
NVNT	ac40	5755	Ant2	8.52	1.87	10.39	30	Pass
NVNT	ac40	5755	Sum	11.46	-	13.33	30	Pass


NVNT	ac40	5795	Ant1	9.14	1.86	11	30	Pass
NVNT	ac40	5795	Ant2	9	1.87	10.87	30	Pass
NVNT	ac40	5795	Sum	12.08	-	13.95	30	Pass


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	18.55	N/A	N/A
NVNT	a	5180	Ant2	18.49	N/A	N/A
NVNT	a	5200	Ant1	18.44	N/A	N/A
NVNT	a	5200	Ant2	18.54	N/A	N/A
NVNT	a	5240	Ant1	18.71	N/A	N/A
NVNT	a	5240	Ant2	18.61	N/A	N/A
NVNT	n20	5180	Ant1	19.53	N/A	N/A
NVNT	n20	5180	Ant2	19.47	N/A	N/A
NVNT	n20	5200	Ant1	19.35	N/A	N/A
NVNT	n20	5200	Ant2	19.59	N/A	N/A
NVNT	n20	5240	Ant1	19.53	N/A	N/A
NVNT	n20	5240	Ant2	19.71	N/A	N/A
NVNT	n40	5190	Ant1	39.9	N/A	N/A
NVNT	n40	5190	Ant2	40.89	N/A	N/A
NVNT	n40	5230	Ant1	39.71	N/A	N/A
NVNT	n40	5230	Ant2	40.53	N/A	N/A
NVNT	ac20	5180	Ant1	19.57	N/A	N/A
NVNT	ac20	5180	Ant2	19.37	N/A	N/A
NVNT	ac20	5200	Ant1	19.48	N/A	N/A
NVNT	ac20	5200	Ant2	19.38	N/A	N/A
NVNT	ac20	5240	Ant1	19.65	N/A	N/A
NVNT	ac20	5240	Ant2	19.47	N/A	N/A
NVNT	ac40	5190	Ant1	39.49	N/A	N/A
NVNT	ac40	5190	Ant2	40.16	N/A	N/A
NVNT	ac40	5230	Ant1	40.29	N/A	N/A
NVNT	ac40	5230	Ant2	40.16	N/A	N/A

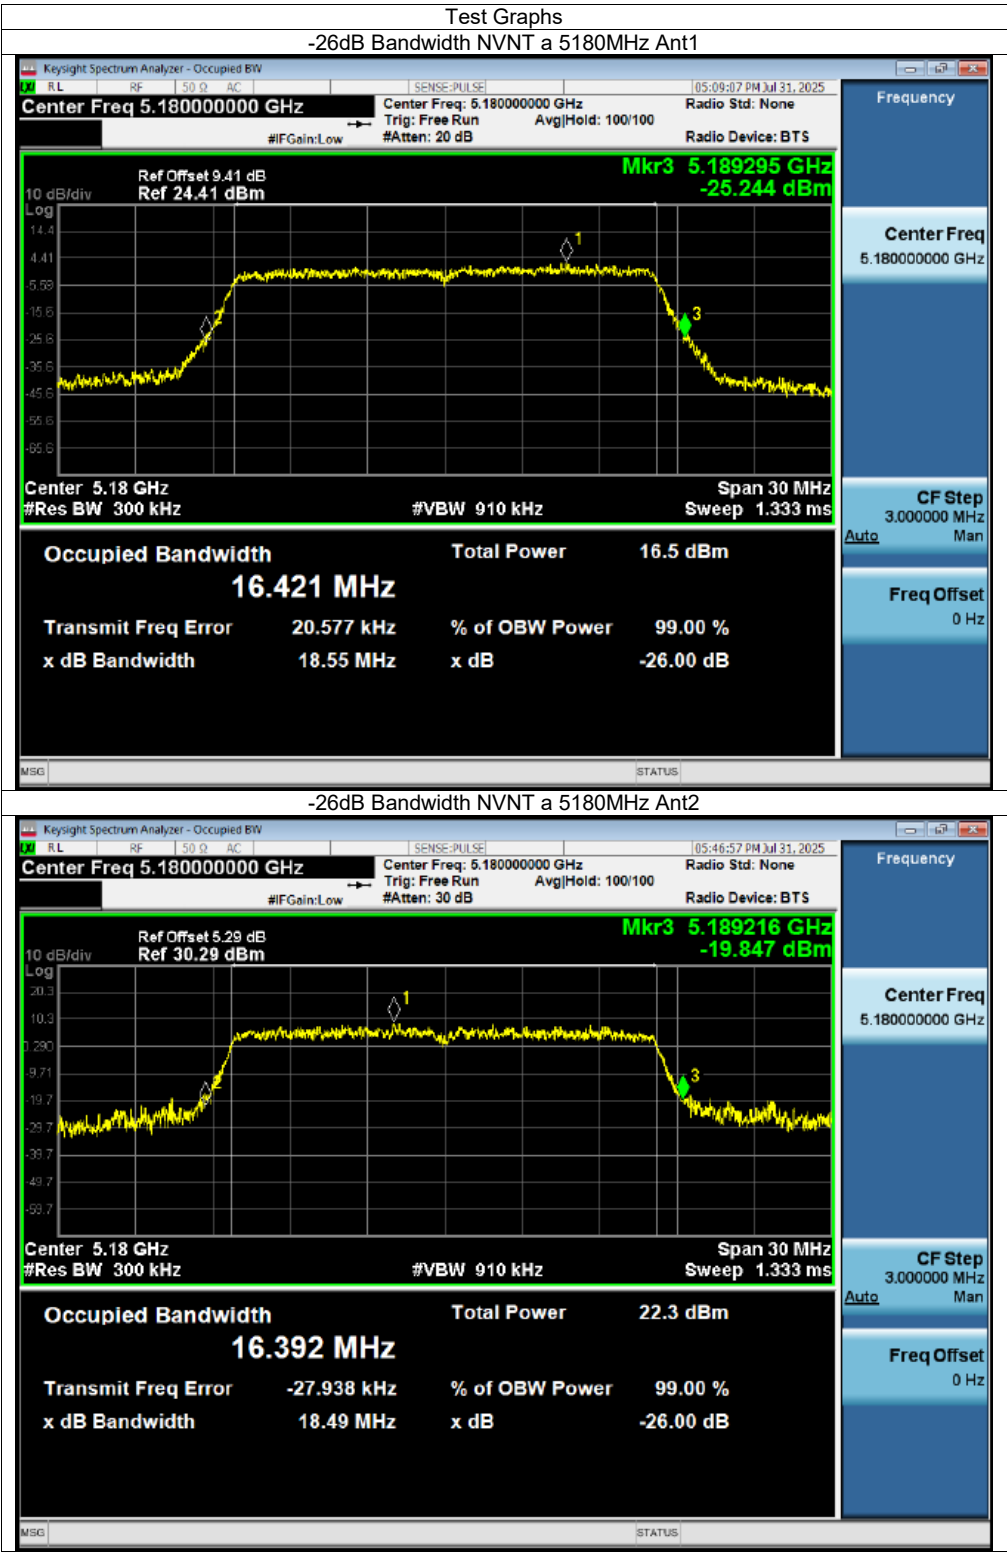


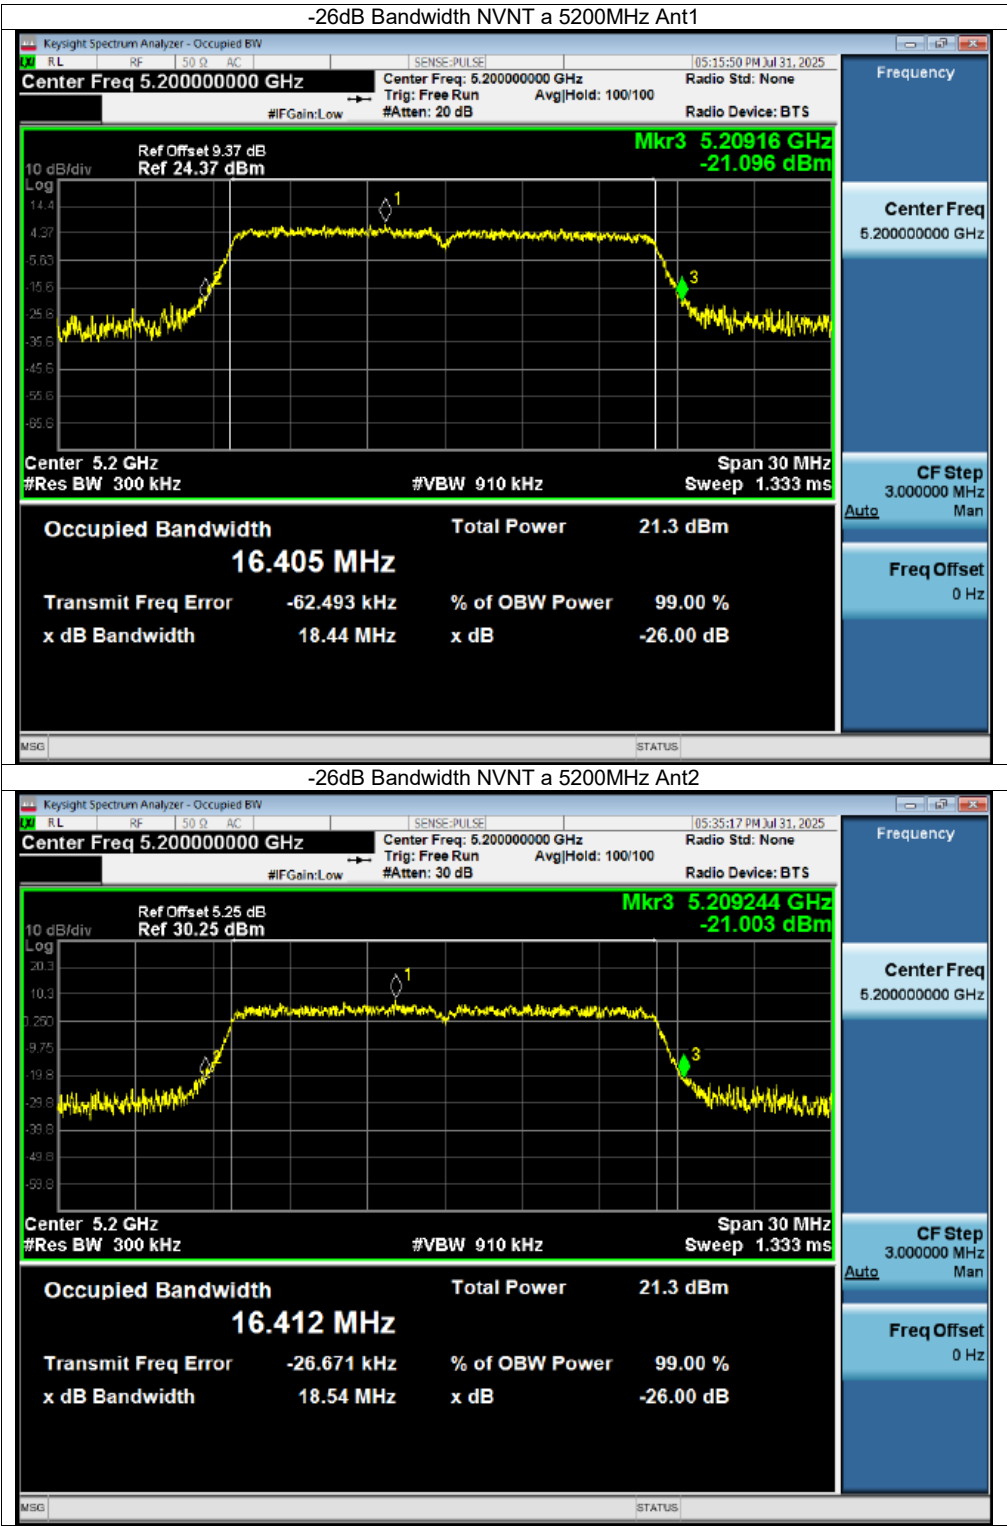


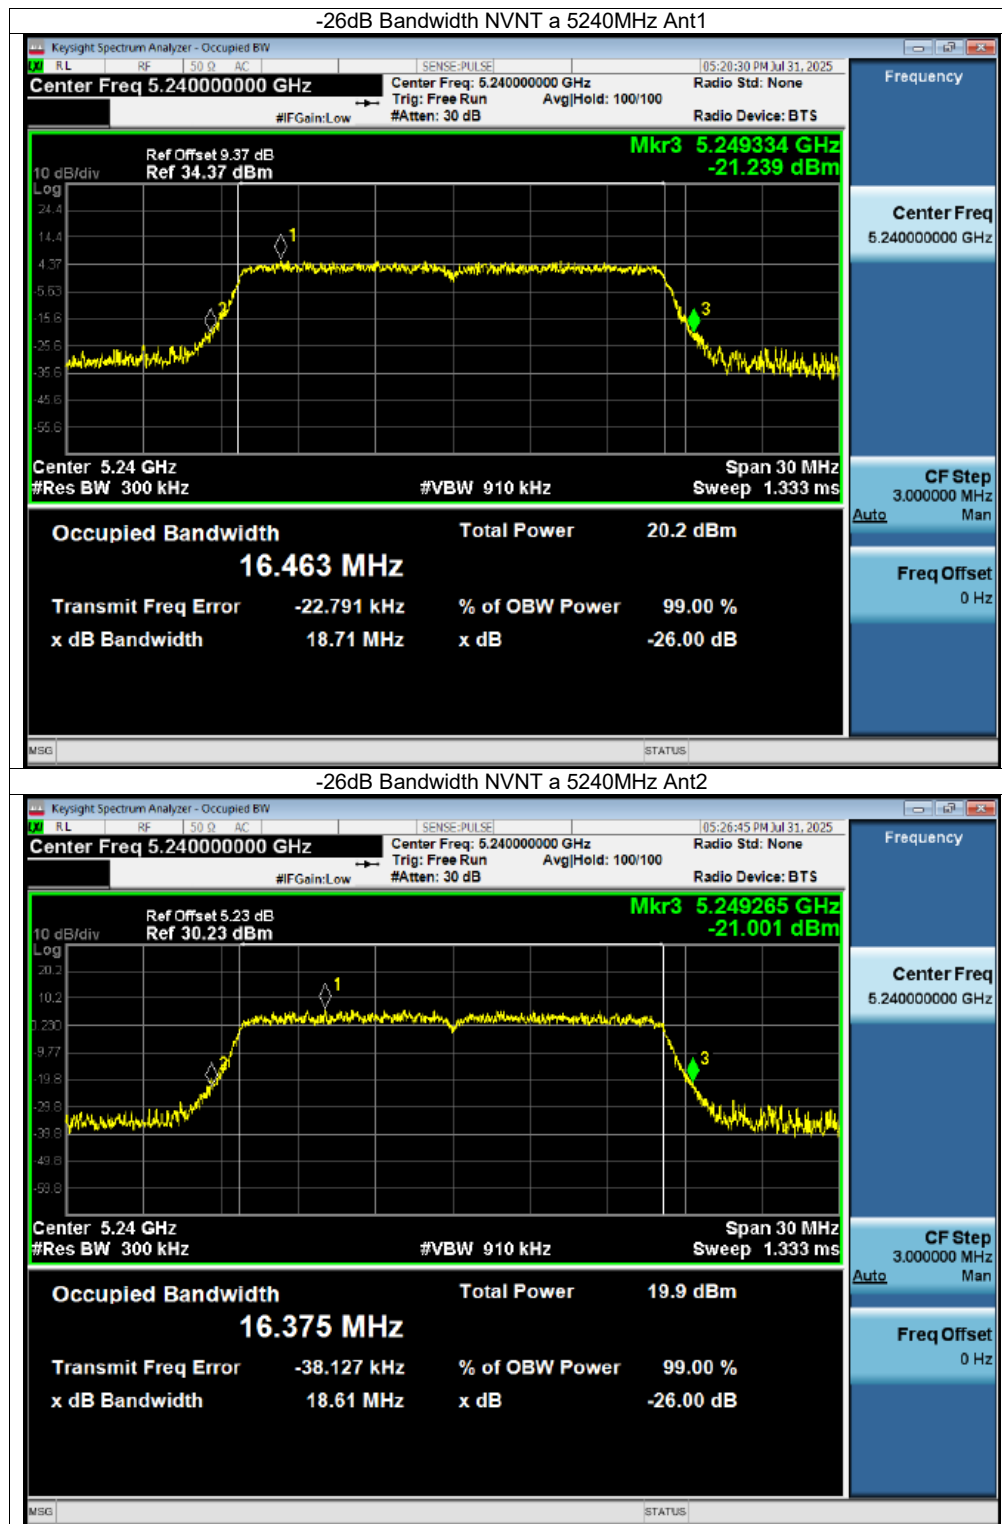


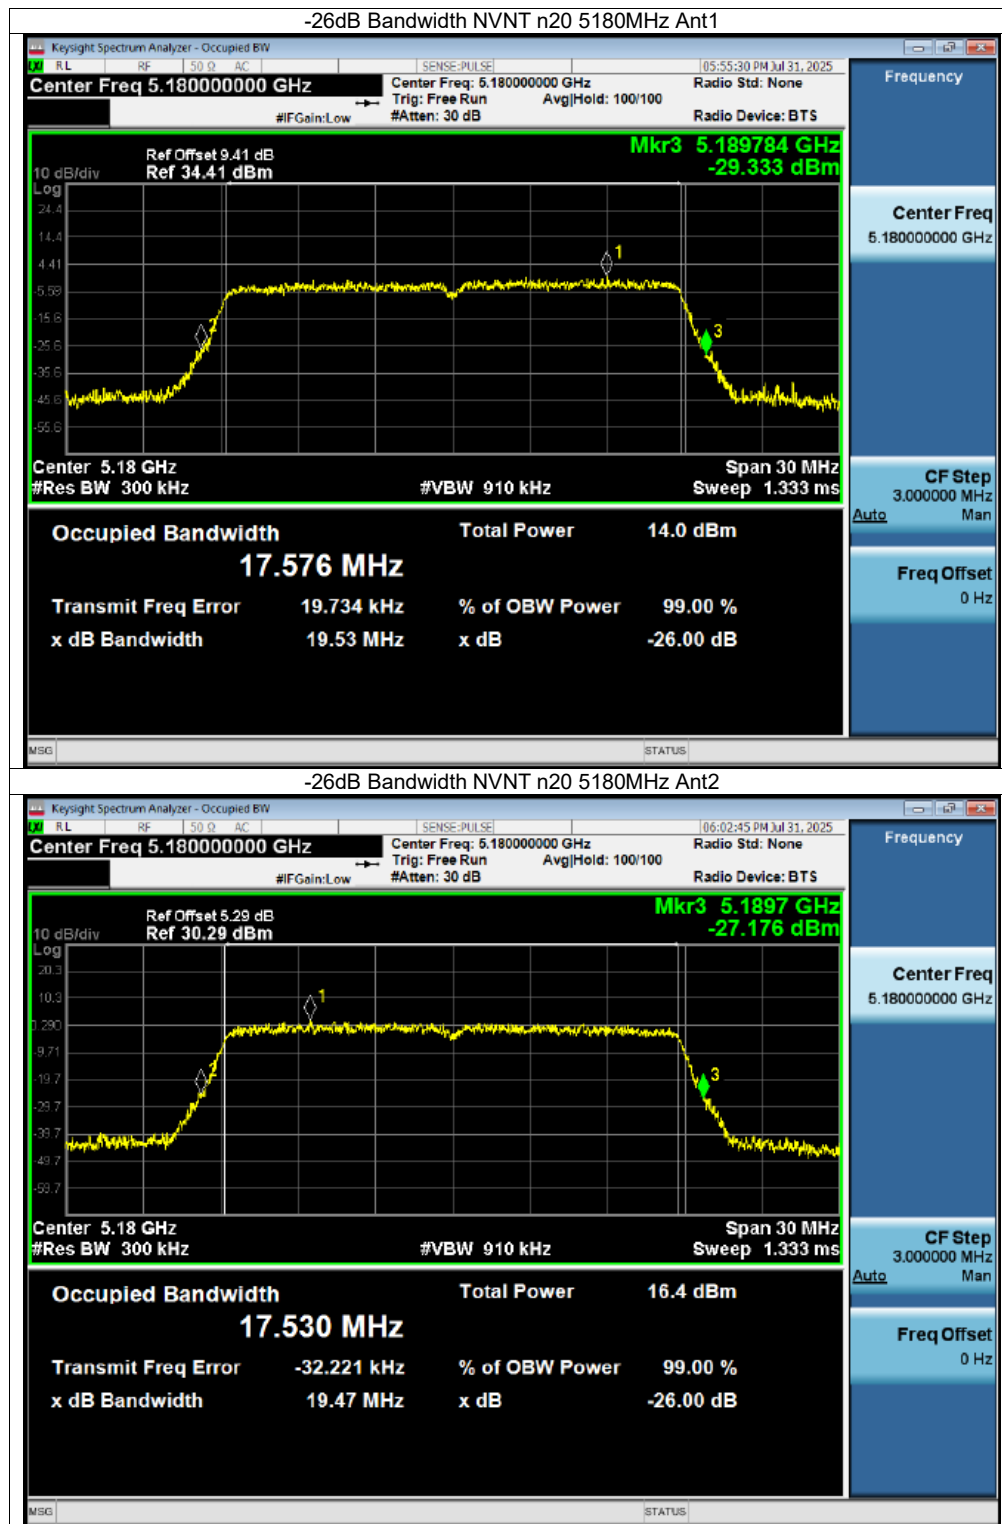


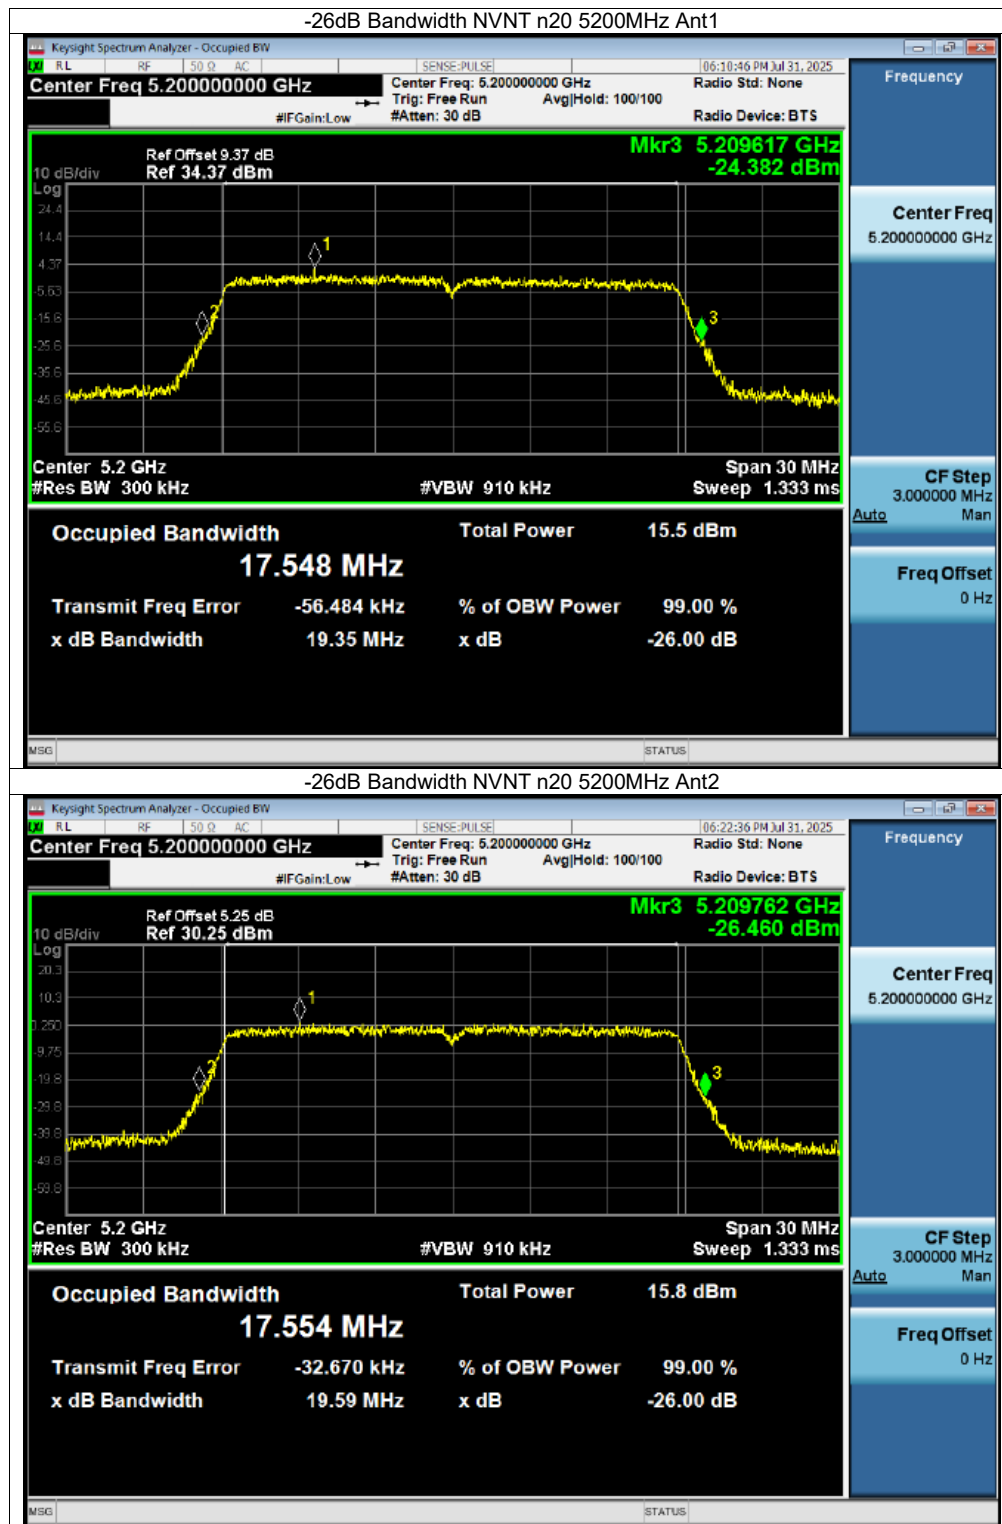


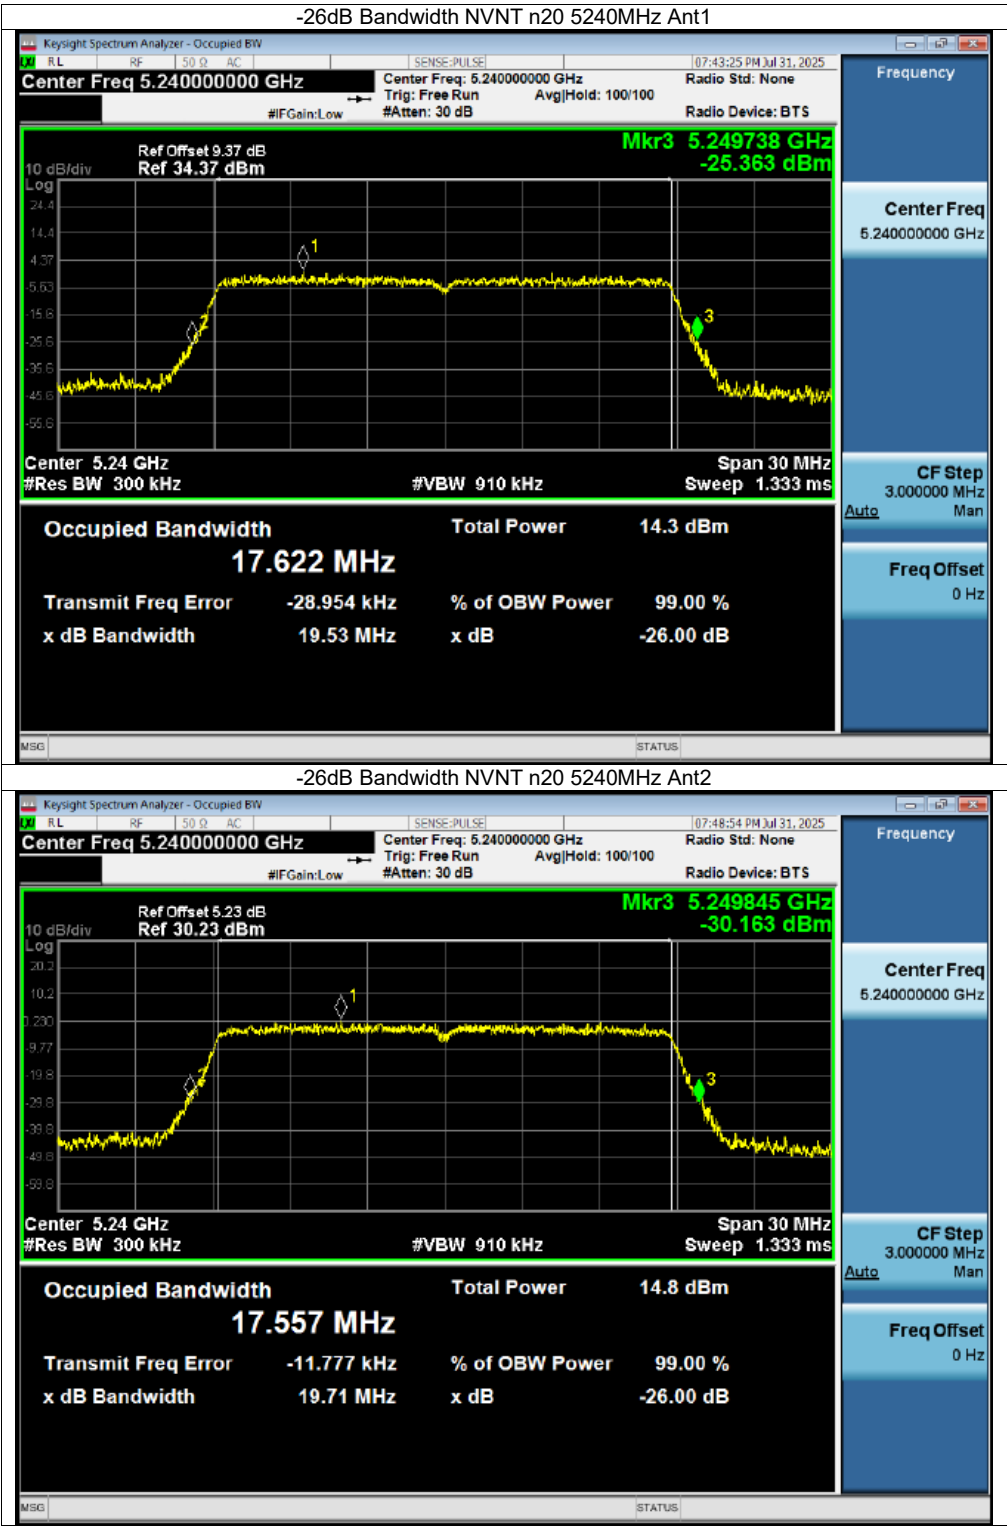


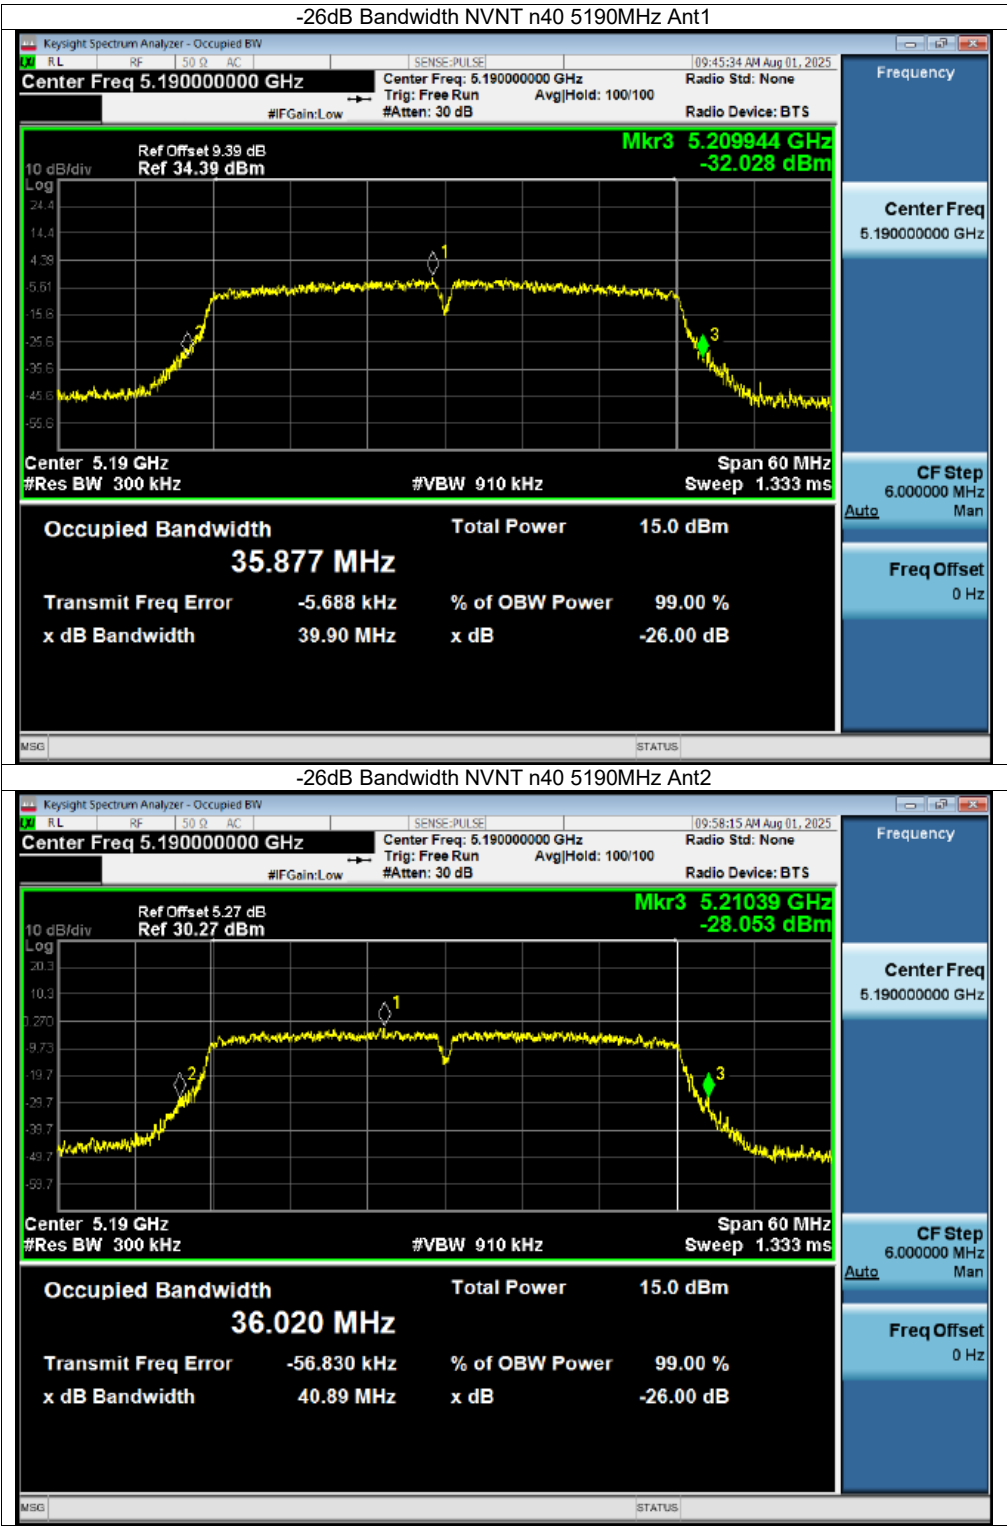


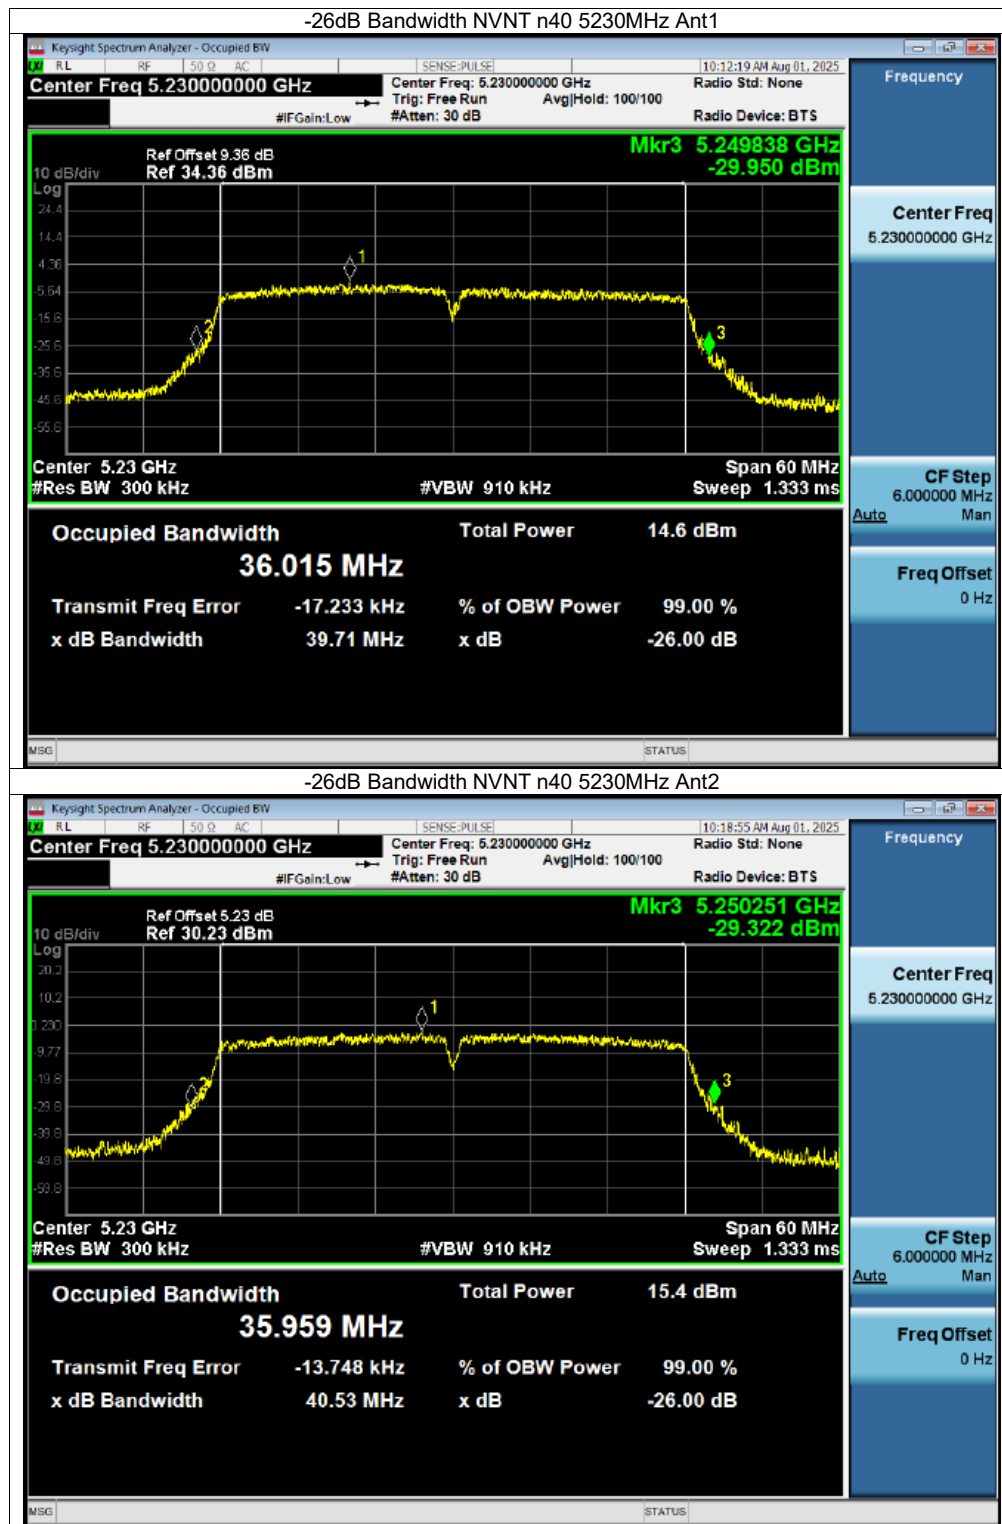


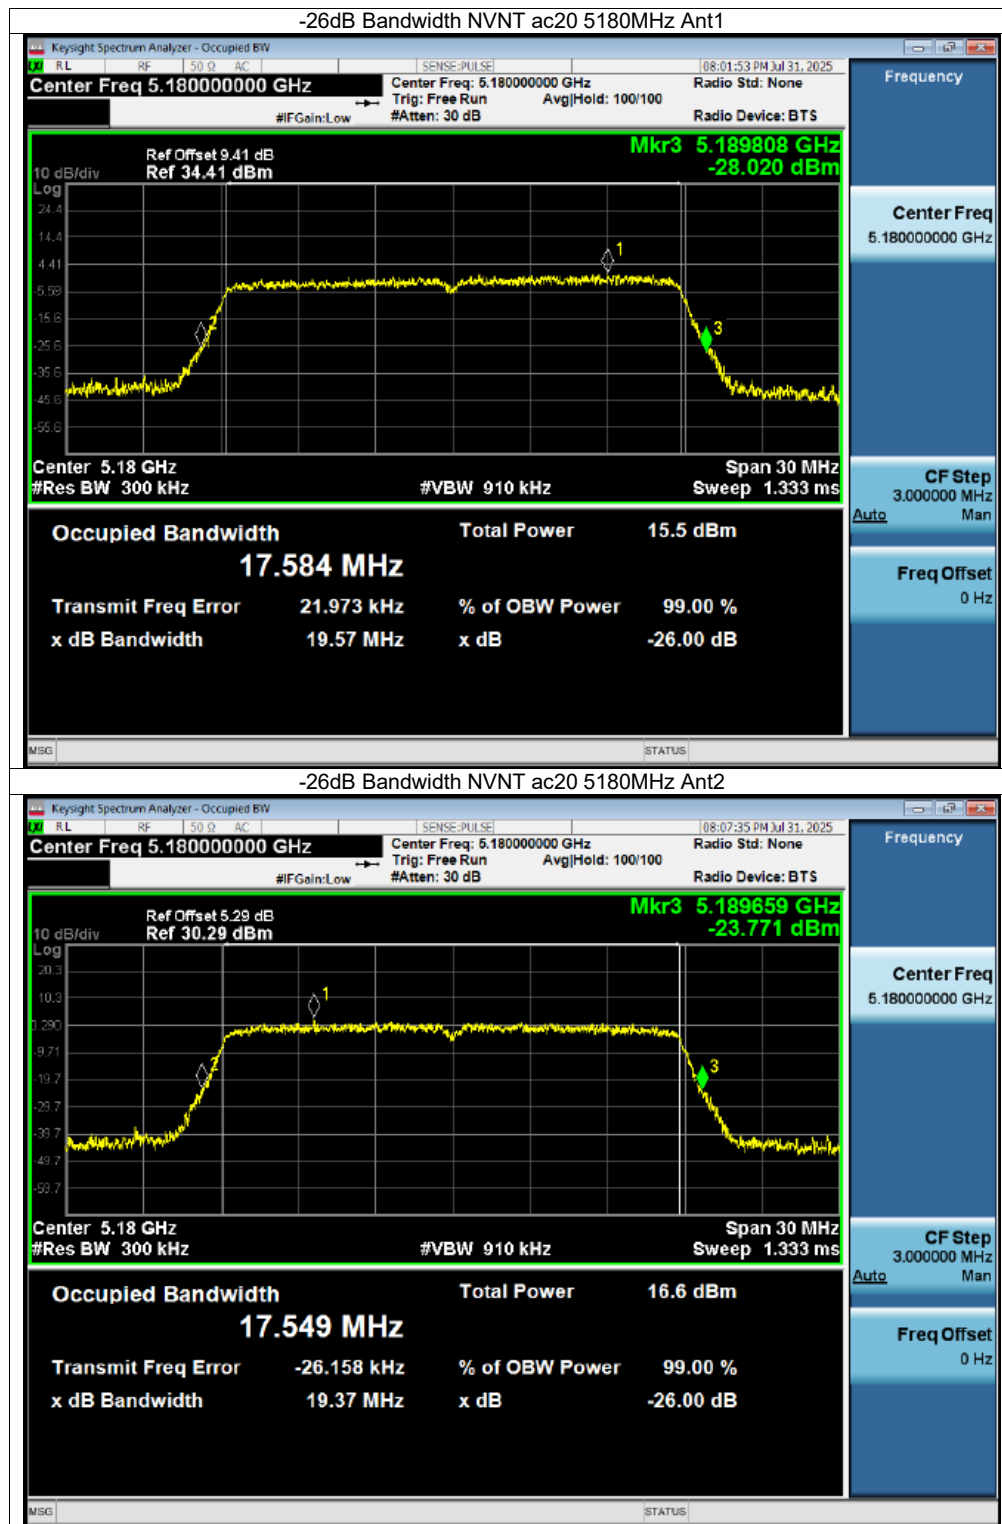

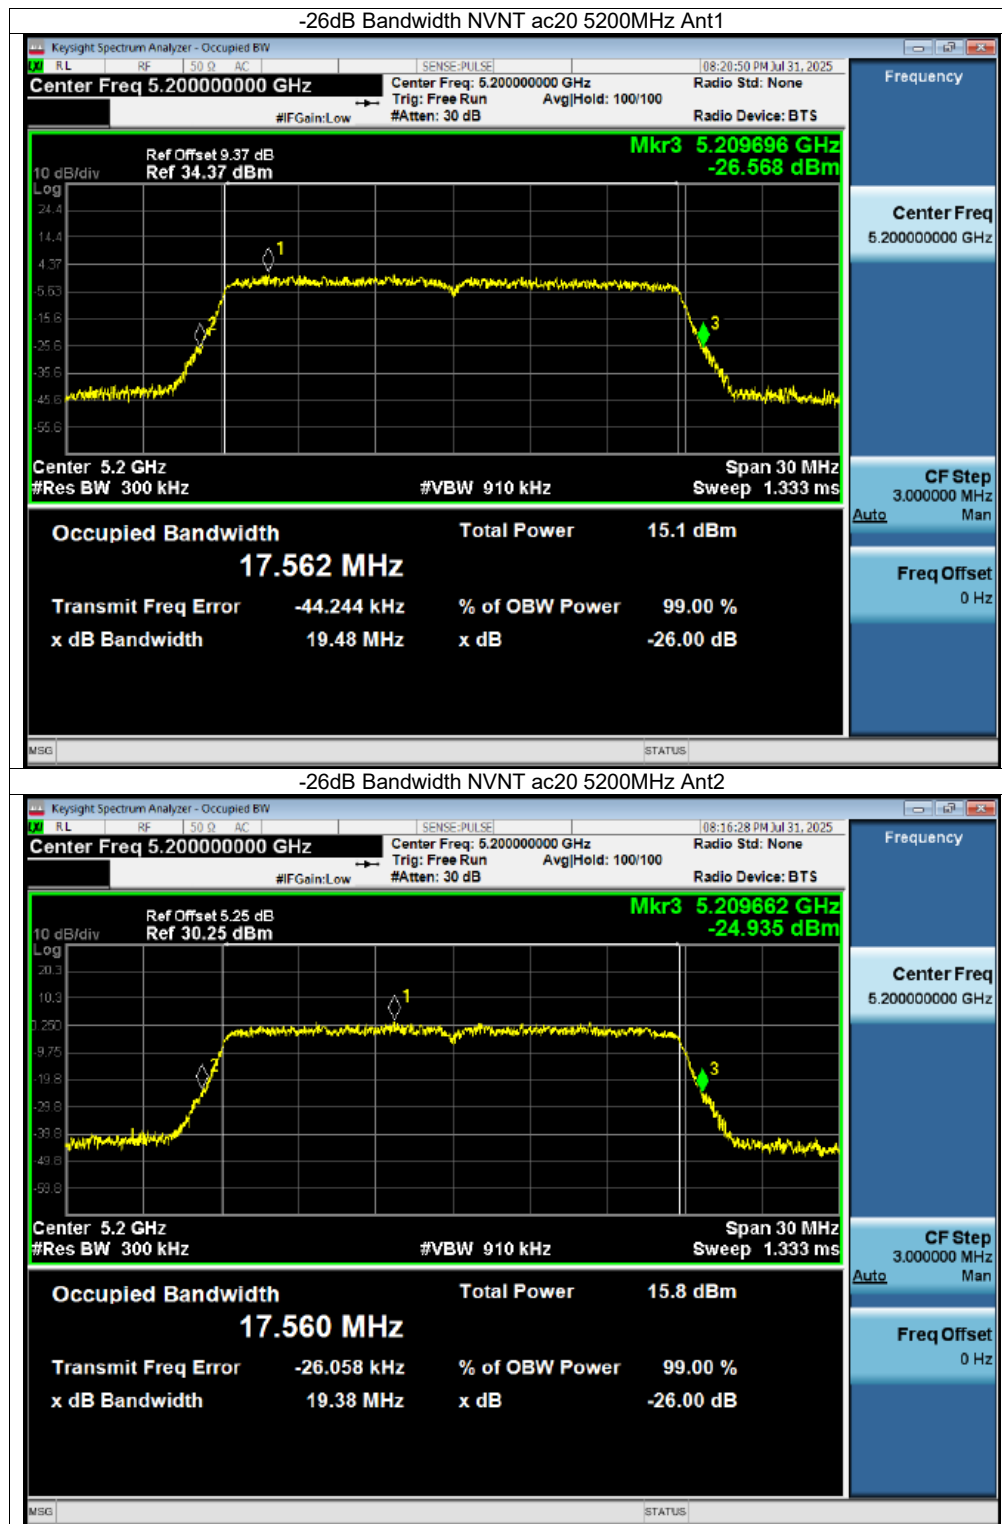

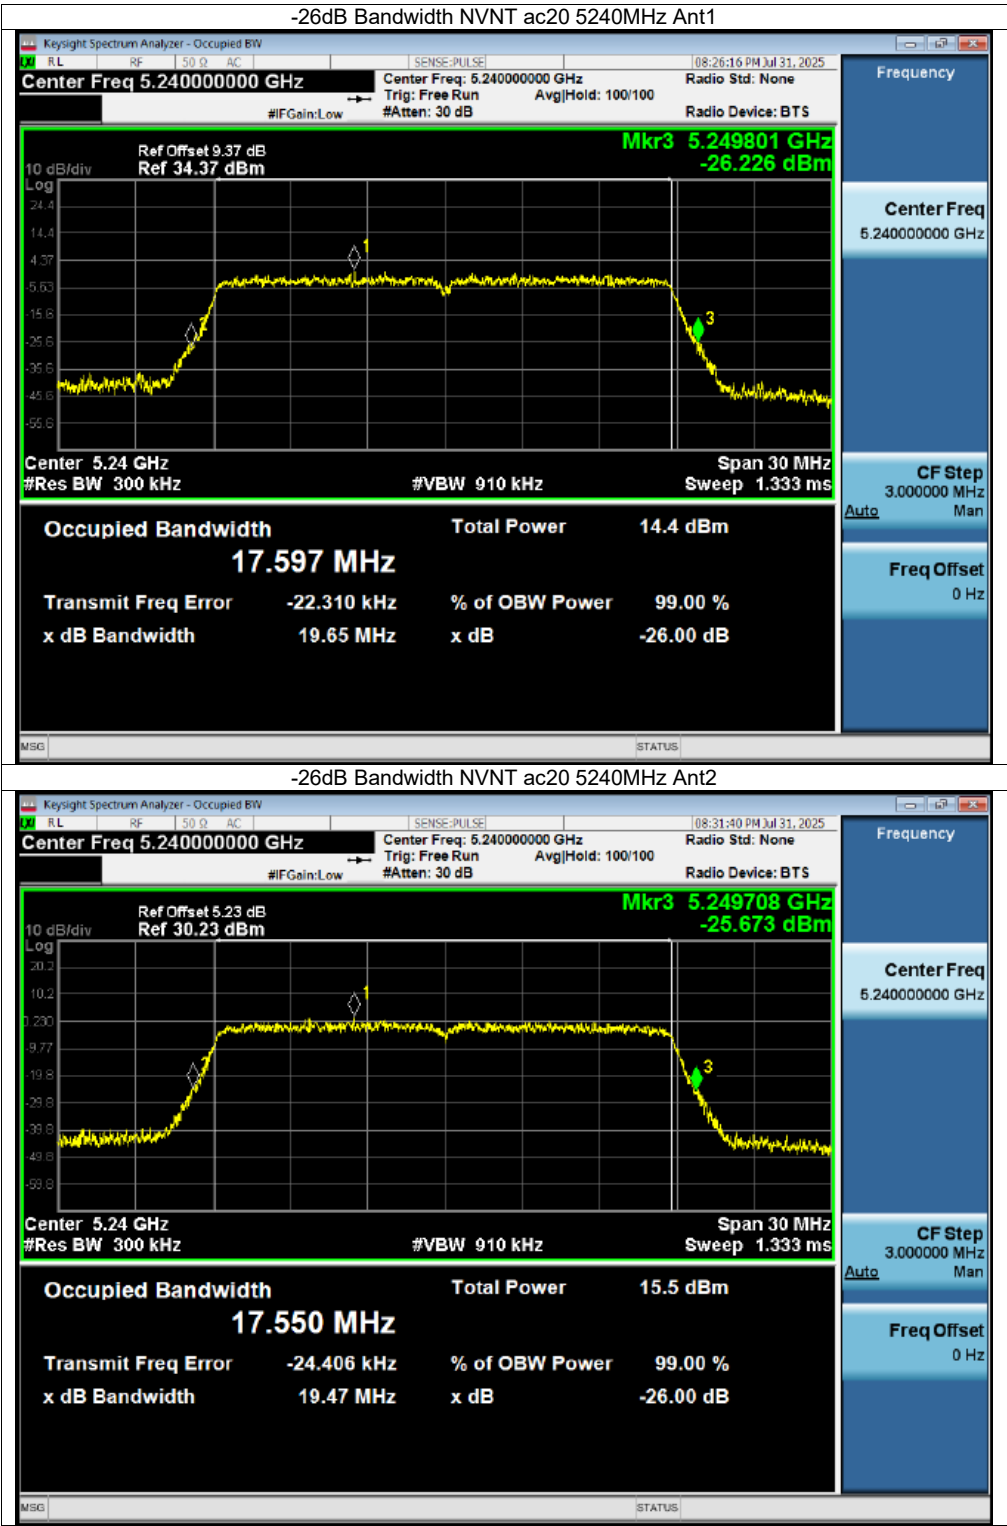

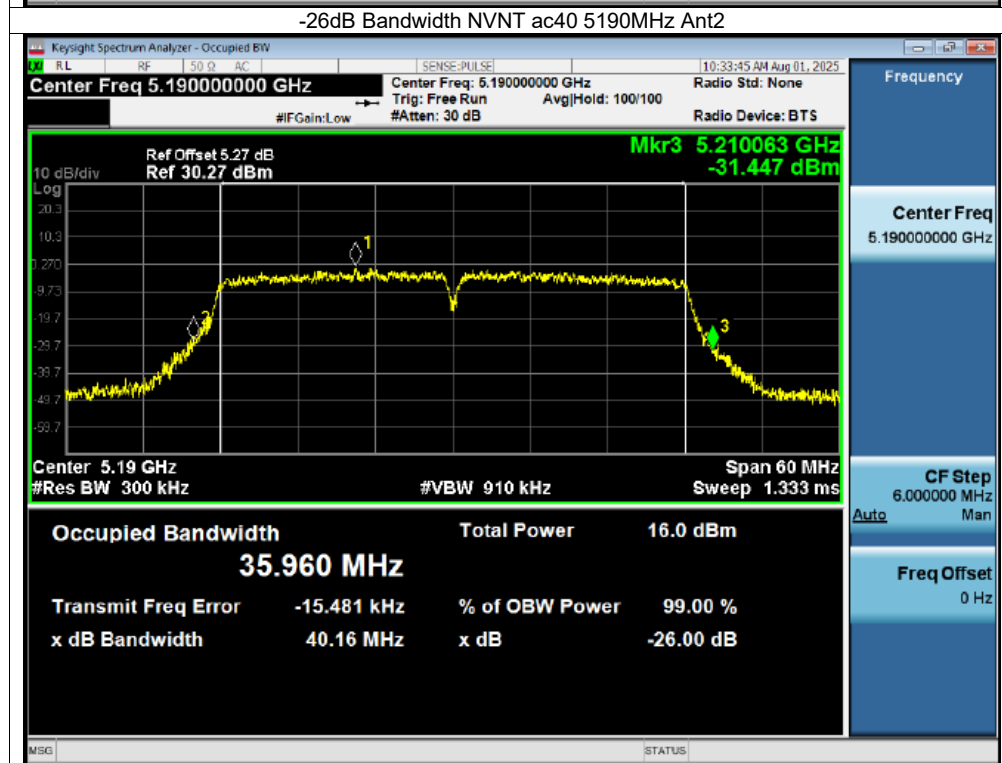

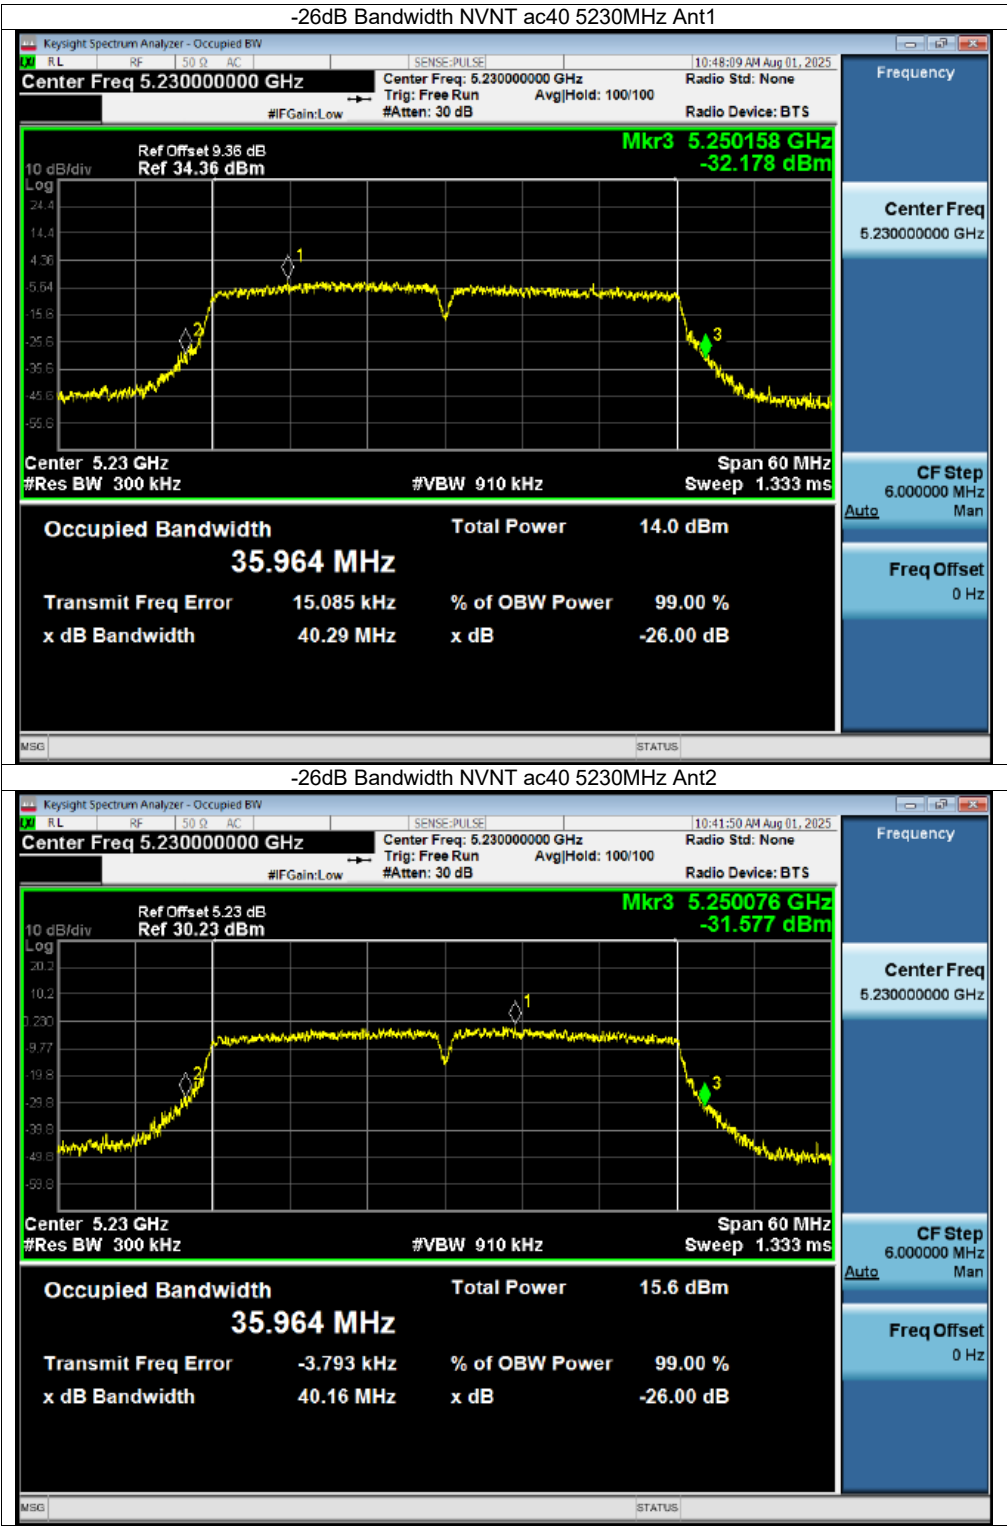

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.376
NVNT	a	5180	Ant2	16.35
NVNT	a	5200	Ant1	16.352
NVNT	a	5200	Ant2	16.375
NVNT	a	5240	Ant1	16.385
NVNT	a	5240	Ant2	16.339
NVNT	a	5745	Ant1	18.15
NVNT	a	5745	Ant2	17.39
NVNT	a	5785	Ant1	16.754
NVNT	a	5785	Ant2	17.562
NVNT	a	5825	Ant1	17.022
NVNT	a	5825	Ant2	19.701
NVNT	n20	5180	Ant1	17.538
NVNT	n20	5180	Ant2	17.521
NVNT	n20	5200	Ant1	17.527
NVNT	n20	5200	Ant2	17.521
NVNT	n20	5240	Ant1	17.563
NVNT	n20	5240	Ant2	17.516
NVNT	n20	5745	Ant1	17.499
NVNT	n20	5745	Ant2	17.526
NVNT	n20	5785	Ant1	17.479
NVNT	n20	5785	Ant2	17.531
NVNT	n20	5825	Ant1	17.53
NVNT	n20	5825	Ant2	17.547
NVNT	n40	5190	Ant1	35.937
NVNT	n40	5190	Ant2	36.064
NVNT	n40	5230	Ant1	36.055
NVNT	n40	5230	Ant2	36.064
NVNT	n40	5755	Ant1	35.929
NVNT	n40	5755	Ant2	36.087
NVNT	n40	5795	Ant1	36.129
NVNT	n40	5795	Ant2	36.112
NVNT	ac20	5180	Ant1	17.55
NVNT	ac20	5180	Ant2	17.508
NVNT	ac20	5200	Ant1	17.547
NVNT	ac20	5200	Ant2	17.545
NVNT	ac20	5240	Ant1	17.567
NVNT	ac20	5240	Ant2	17.514
NVNT	ac20	5745	Ant1	17.509
NVNT	ac20	5745	Ant2	17.537
NVNT	ac20	5785	Ant1	17.484
NVNT	ac20	5785	Ant2	17.542
NVNT	ac20	5825	Ant1	17.543
NVNT	ac20	5825	Ant2	17.55
NVNT	ac40	5190	Ant1	35.869
NVNT	ac40	5190	Ant2	36.046
NVNT	ac40	5230	Ant1	36.027
NVNT	ac40	5230	Ant2	36.048
NVNT	ac40	5755	Ant1	35.884
NVNT	ac40	5755	Ant2	36.135
NVNT	ac40	5795	Ant1	36.019
NVNT	ac40	5795	Ant2	36.016

