

## Appendix B

### RF Test Data for BT V4.1(BT LE) (Conducted Measurement)

Product Name: 4G SMARTPHONE


Test Model: X7

#### Environmental Conditions

Temperature:	23.9 °C
Relative Humidity:	54.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Diamond Lu
Supervised by:	Wang Chuang


#### B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

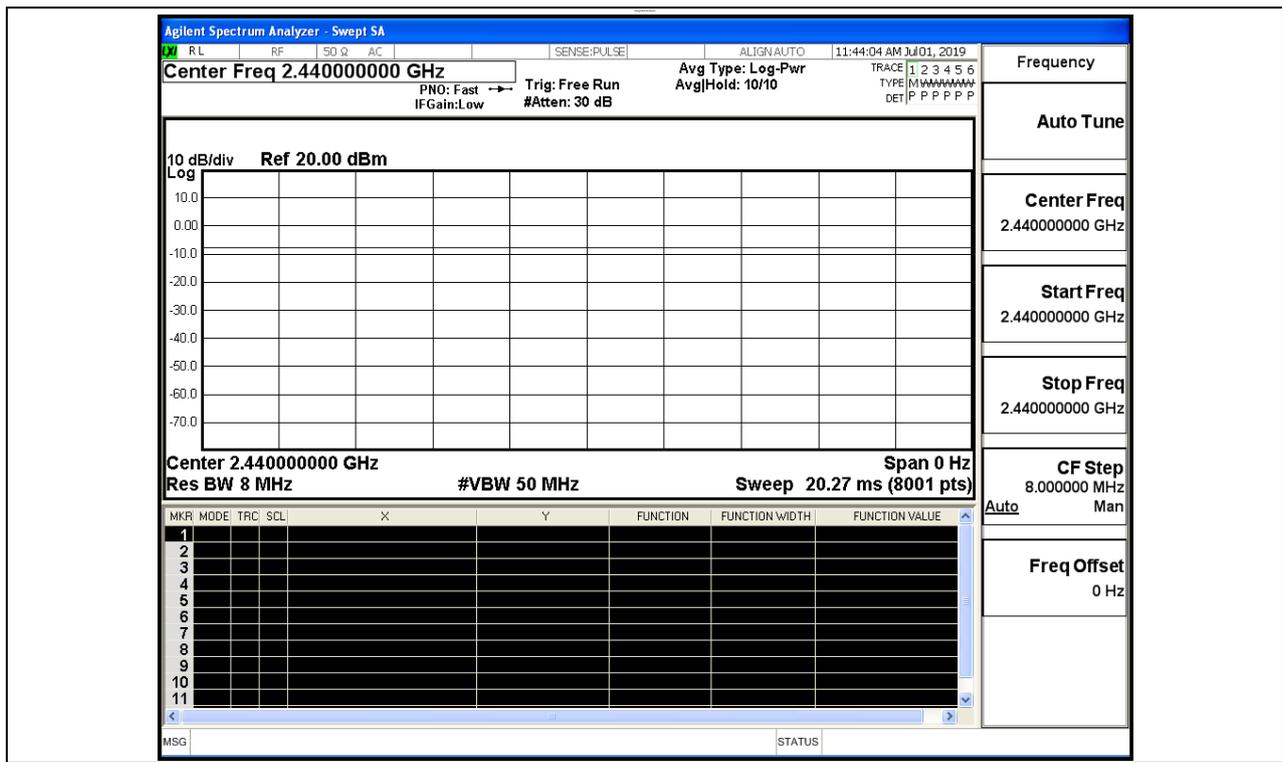


### B.2 Maximum Conducted Peak Output Power


Mode	Channel	Conduct Peak Power[dBm]	Conduct Average Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	0.629	0.446	30	PASS
BT LE	MCH	0.301	0.088	30	PASS
BT LE	HCH	-0.385	-0.529	30	PASS

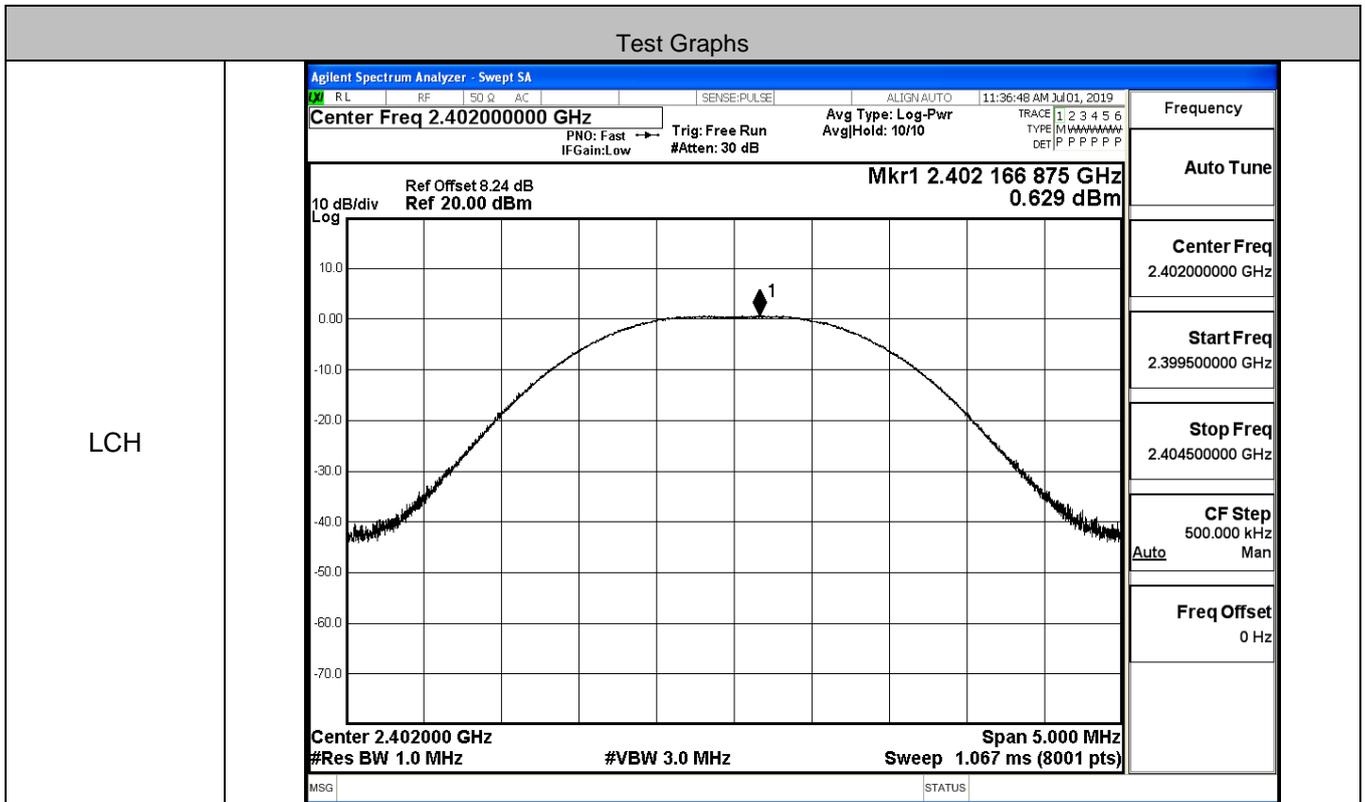

MCH

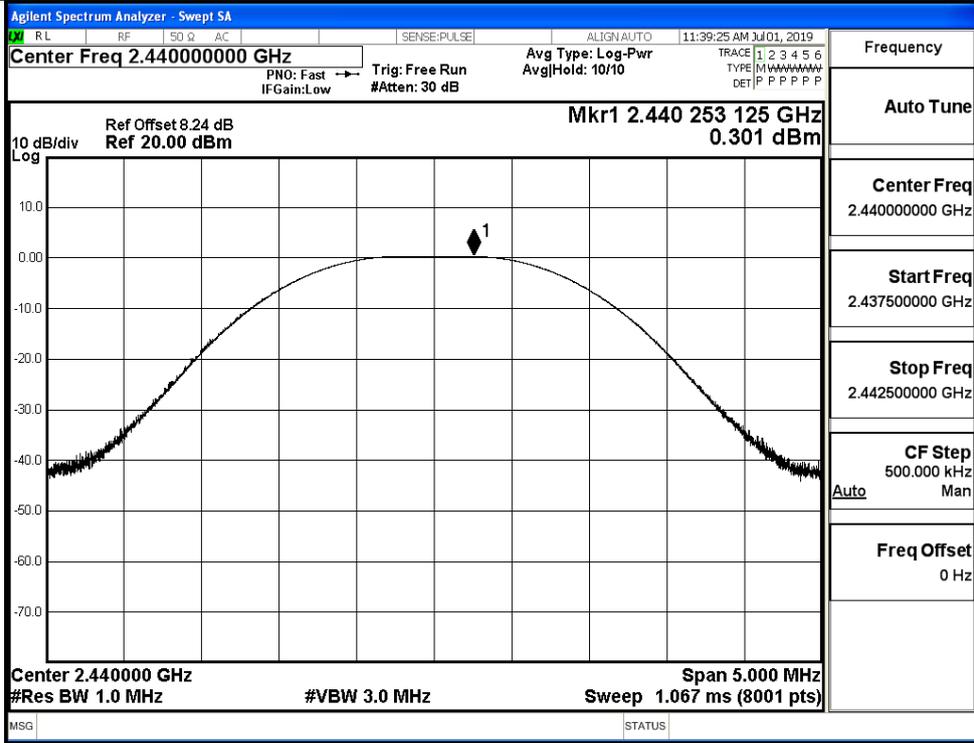



HCH

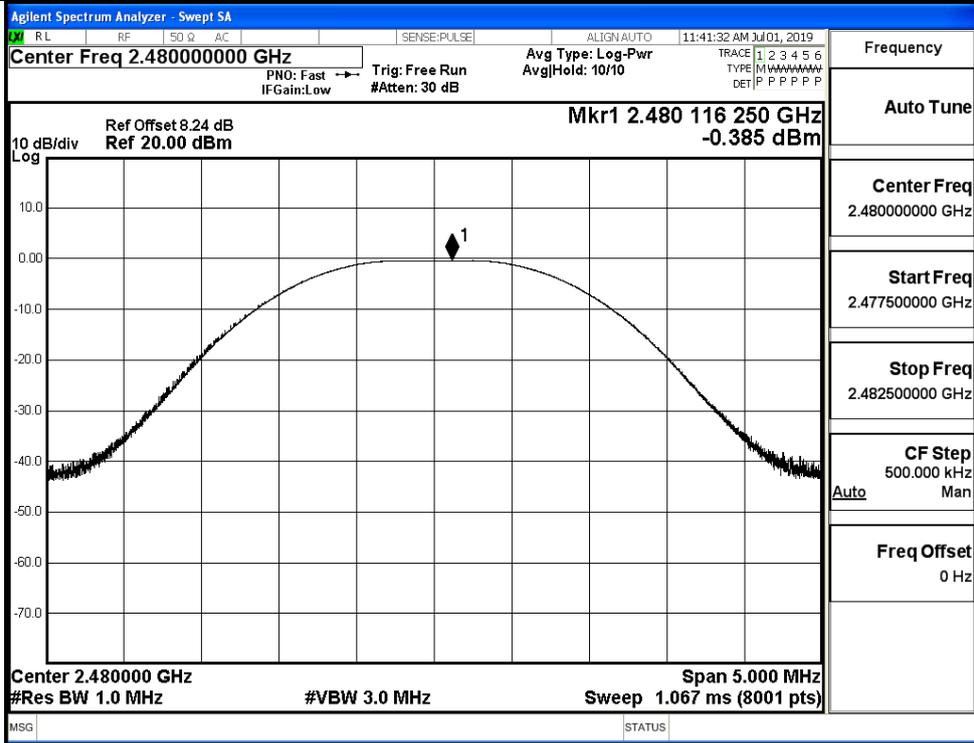

### B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-16.025	8	PASS
BT LE	MCH	-15.039	8	PASS
BT LE	HCH	-15.271	8	PASS

#### Test Graphs

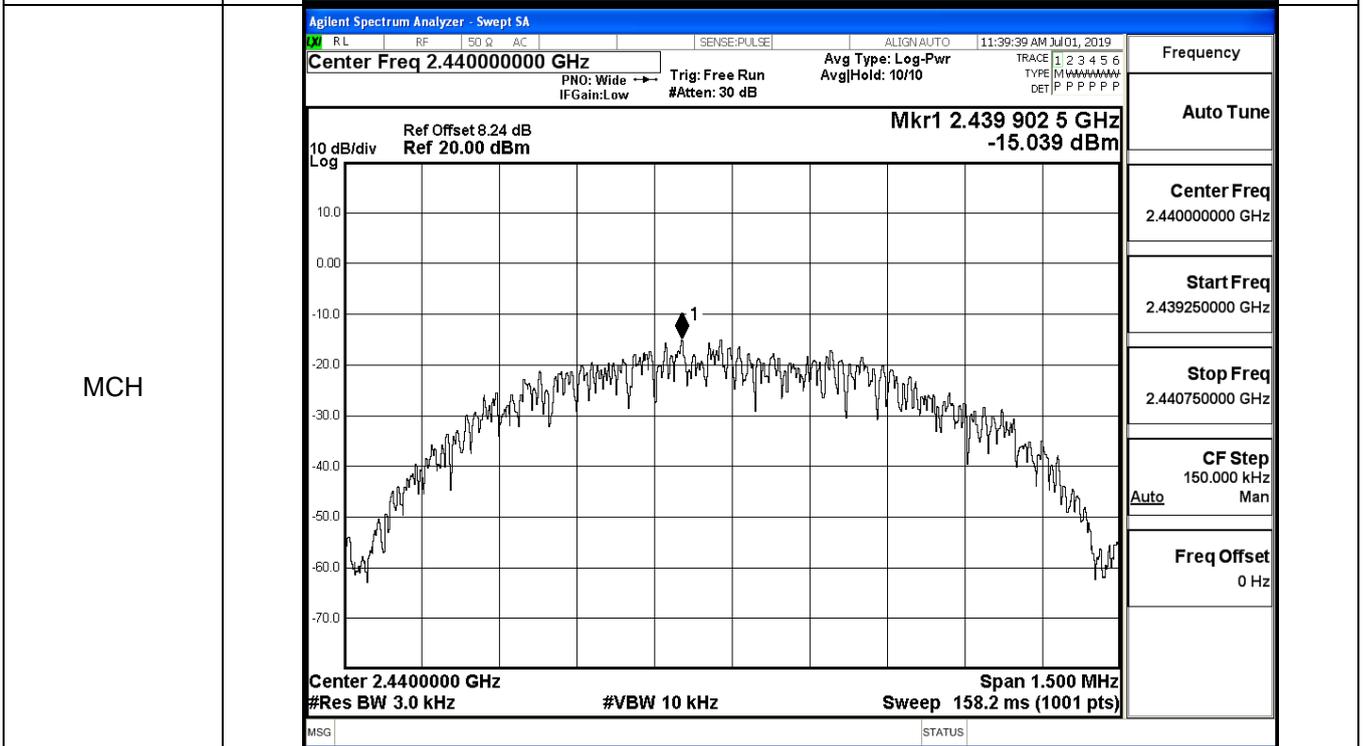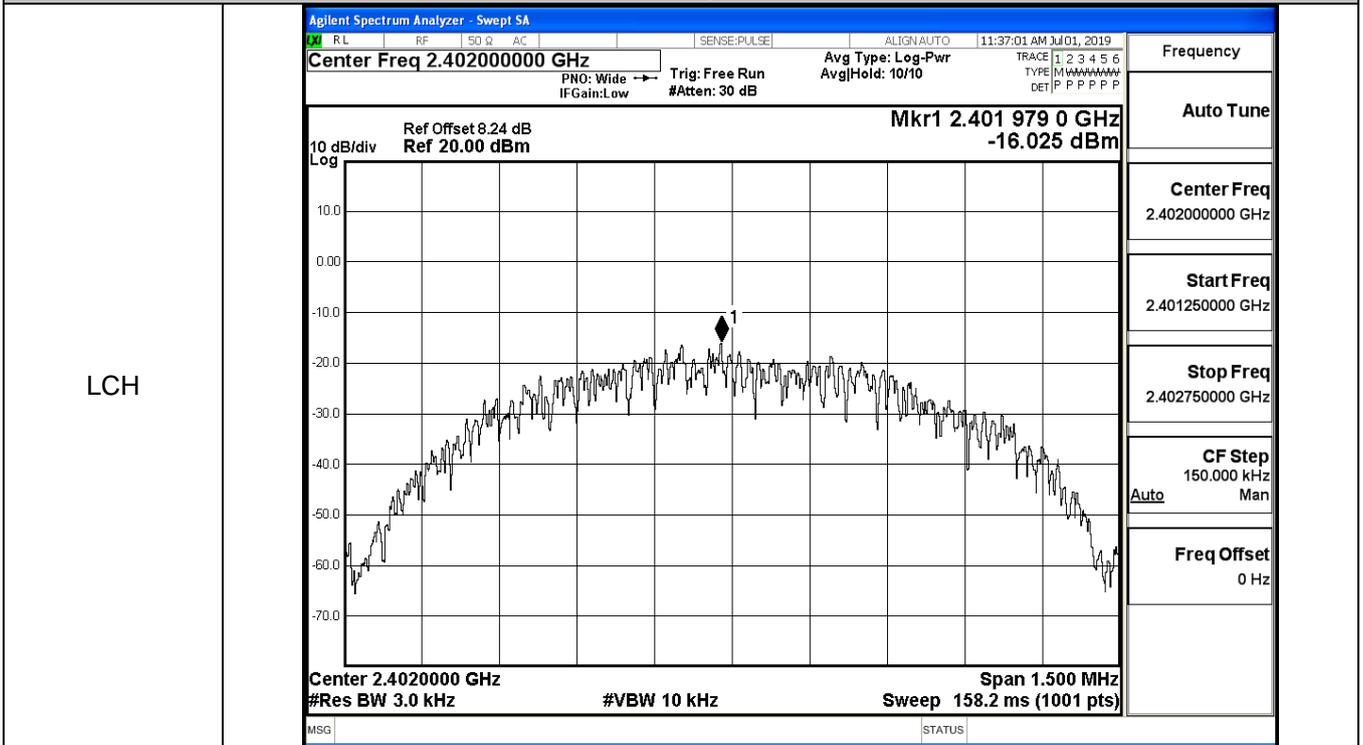



**B.4 6dB Bandwidth**

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6865	≥0.5	PASS
BT LE	MCH	0.6903	≥0.5	PASS
BT LE	HCH	0.6738	≥0.5	PASS

Test Graphs													
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 11:36:36 AM Jul 01, 2019</p> <p style="margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None                      Trig: Free Run AvgHold: &gt;1/1                      #IFGain: Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;">                         10 dB/div                          Log                          Ref Offset 8.24 dB                          Ref 20.00 dBm                     </div> <div style="text-align: right;">                         Mkr1 2.4019955 GHz                          -2.7067 dBm                     </div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div>Center 2.402 GHz #Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Span 3 MHz Sweep 1.067 ms</div> </div> <table style="width: 100%; font-size: x-small; margin-top: 5px;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.33 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>1.0499 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>7.274 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>686.5 kHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	4.33 dBm	<b>1.0499 MHz</b>			Transmit Freq Error	7.274 kHz	OBW Power 99.00 %	x dB Bandwidth	686.5 kHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	4.33 dBm											
<b>1.0499 MHz</b>													
Transmit Freq Error	7.274 kHz	OBW Power 99.00 %											
x dB Bandwidth	686.5 kHz	x dB -6.00 dB											
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:PULSE ALIGN:AUTO 11:39:14 AM Jul 01, 2019</p> <p style="margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None                      Trig: Free Run AvgHold: 1/1                      #IFGain: Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;">                         10 dB/div                          Log                          Ref Offset 8.24 dB                          Ref 20.00 dBm                     </div> <div style="text-align: right;">                         Mkr1 2.4399929 GHz                          -0.53499 dBm                     </div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div>Center 2.44 GHz #Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Span 3 MHz Sweep 1.067 ms</div> </div> <table style="width: 100%; font-size: x-small; margin-top: 5px;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.57 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>1.0453 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>5.419 kHz</td> <td>OBW Power 99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>690.3 kHz</td> <td>x dB -6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	6.57 dBm	<b>1.0453 MHz</b>			Transmit Freq Error	5.419 kHz	OBW Power 99.00 %	x dB Bandwidth	690.3 kHz	x dB -6.00 dB
Occupied Bandwidth	Total Power	6.57 dBm											
<b>1.0453 MHz</b>													
Transmit Freq Error	5.419 kHz	OBW Power 99.00 %											
x dB Bandwidth	690.3 kHz	x dB -6.00 dB											

HCH	Agilent Spectrum Analyzer - Occupied BW		Frequency	
	RL	RF	50 Ω	AC
	Center Freq 2.48000000 GHz		Center Freq: 2.48000000 GHz	Radio Std: None
	#IFGain:Low		Trig: Free Run	AvgHold>1/1
	Ref Offset 8.24 dB		Mkr1 2.479993 GHz	Radio Device: BTS
Ref 20.00 dBm		-1.2876 dBm		
				Center Freq 2.48000000 GHz
Center 2.48 GHz		#Res BW 100 kHz	#VBW 300 kHz	Span 3 MHz
Occupied Bandwidth		Total Power		5.73 dBm
<b>1.0440 MHz</b>				
Transmit Freq Error	6.027 kHz	OBW Power	99.00 %	
x dB Bandwidth	673.8 kHz	x dB	-6.00 dB	
MSG		STATUS		CF Step 300.000 kHz Auto Man
				Freq Offset 0 Hz

### B.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-1.891	-40.122	-21.891	PASS
BT LE	MCH	-0.5	-41.975	-20.500	PASS
BT LE	HCH	-1.319	-43.867	-21.319	PASS

BT LE\_LCH\_Graphs


Pref/BT LE/LCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.40200000 GHz          Ref Offset 8.24 dB          Ref 20.00 dBm          Mkr1 2.401 997 0 GHz          -1.891 dBm          #Avg Type: RMS          AvgHold: 10/10          #Res BW 100 kHz          #VBW 300 kHz          Span 4.000 MHz          Sweep 1.067 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.400000000 GHz</p> <p>Stop Freq 2.404000000 GHz</p> <p>CF Step 400.000 kHz Man</p> <p>Freq Offset 0 Hz</p>
Puw/BT LE/LCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 12.51500000 GHz          Ref Offset 8.24 dB          Ref 20.00 dBm          Mkr2 2.527 GHz          -40.122 dBm          #Avg Type: RMS          AvgHold: 8/10          #Res BW 100 kHz          #VBW 300 kHz          Start 30 MHz          Stop 25.00 GHz          Sweep 2.387 s (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 12.515000000 GHz</p> <p>Start Freq 30.000000000 MHz</p> <p>Stop Freq 25.000000000 GHz</p> <p>CF Step 2.497000000 GHz Man</p> <p>Freq Offset 0 Hz</p>

BT LE\_MCH\_Graphs

Pref/BT LE/MCH

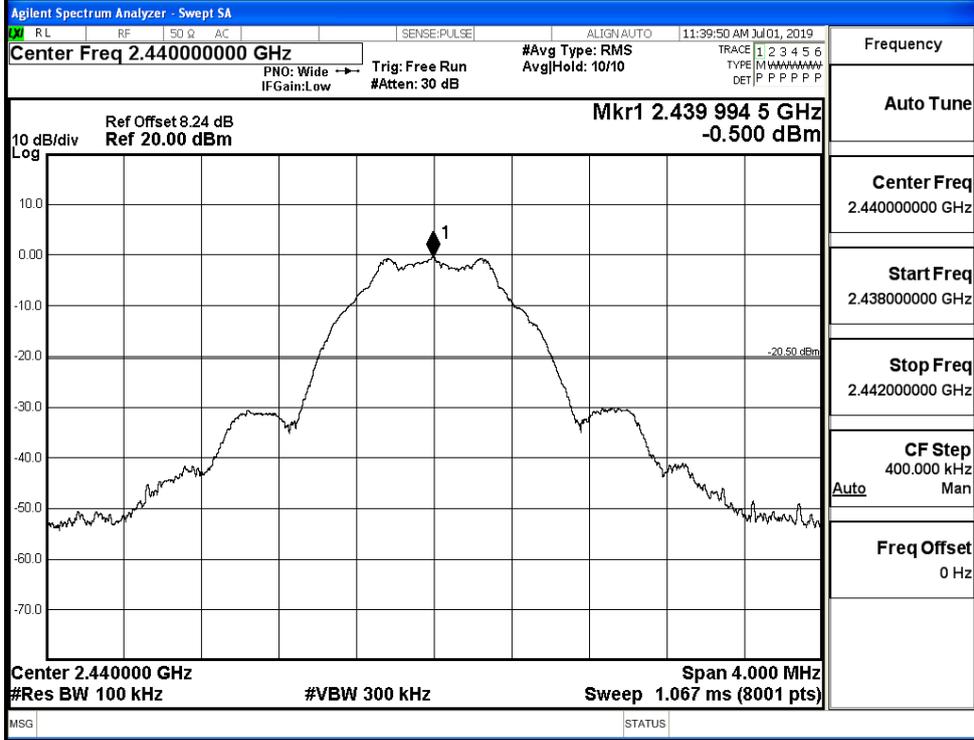


Puw/BT LE/MCH

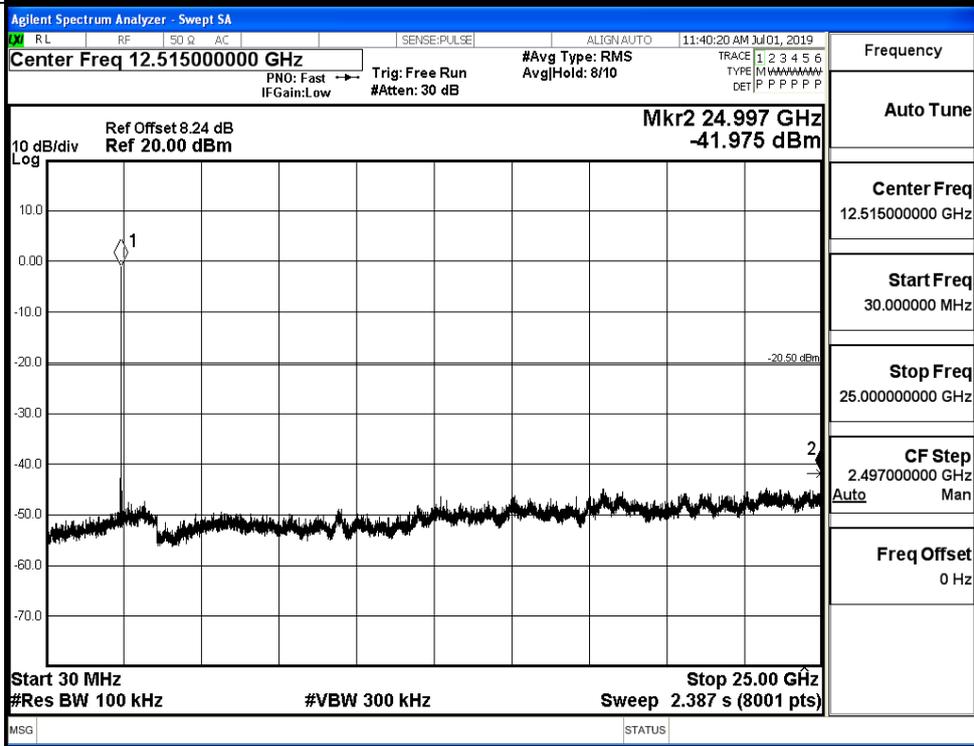


BT LE\_HCH\_Graphs

Pref/BT LE/HCH

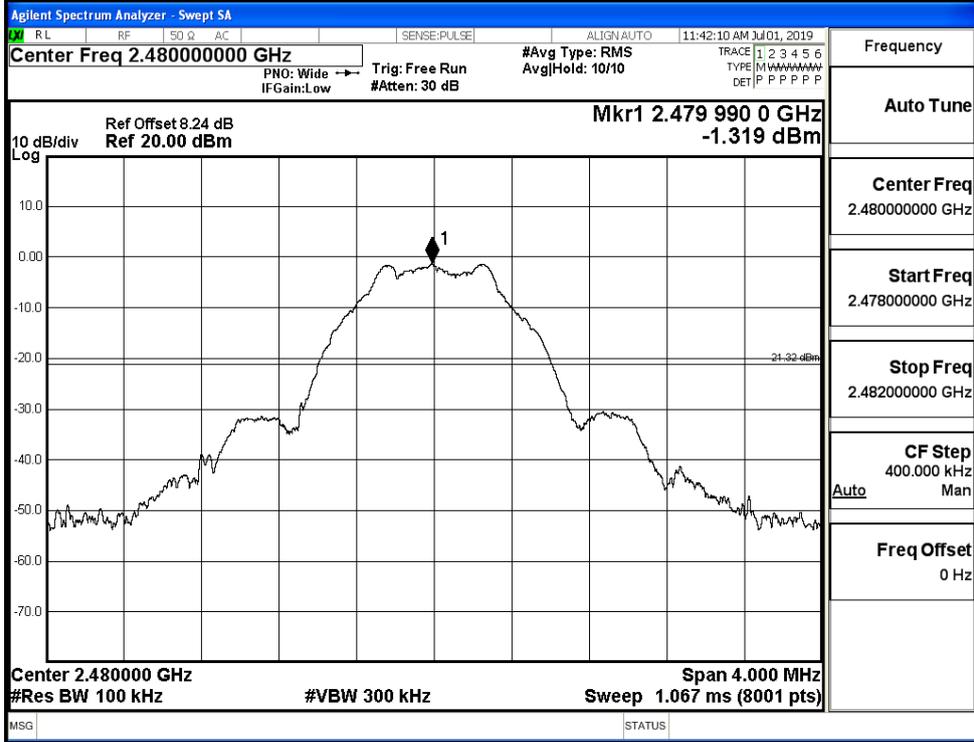

Puw/BT LE/HCH

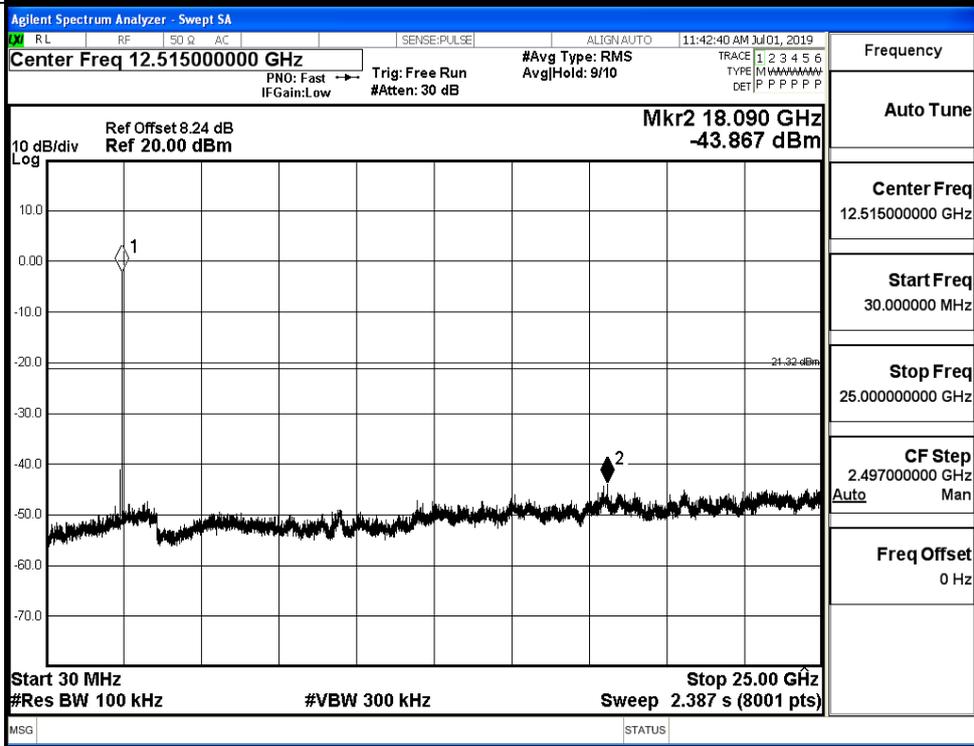

### B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-1.726	-49.511	-21.73	PASS
BT LE	HCH	-1.009	-48.920	-21.01	PASS


Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.35700000 GHz                  Ref Offset 8.24 dB, Ref 20.00 dBm                  Mkr4 2.387 750 GHz -49.511 dBm                  Start 2.31000 GHz, Stop 2.40400 GHz                  #Res BW 100 kHz, #VBW 300 kHz, Sweep 9.067 ms (8001 pts)</p> <table border="1" style="width: 100%; font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.402 249 GHz</td><td>-1.726 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400 000 GHz</td><td>-54.634 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390 000 GHz</td><td>-52.111 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.387 750 GHz</td><td>-49.511 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.402 249 GHz	-1.726 dBm				2	N	f		2.400 000 GHz	-54.634 dBm				3	N	f		2.390 000 GHz	-52.111 dBm				4	N	f		2.387 750 GHz	-49.511 dBm				Frequency Auto Tune Center Freq 2.35700000 GHz Start Freq 2.310000000 GHz Stop Freq 2.404000000 GHz CF Step 9.400000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.402 249 GHz	-1.726 dBm																																										
2	N	f		2.400 000 GHz	-54.634 dBm																																										
3	N	f		2.390 000 GHz	-52.111 dBm																																										
4	N	f		2.387 750 GHz	-49.511 dBm																																										
HCH	<p>Agilent Spectrum Analyzer - Swept SA                  Center Freq 2.48900000 GHz                  Ref Offset 8.24 dB, Ref 20.00 dBm                  Mkr4 2.479 269 25 GHz -48.920 dBm                  Start 2.47800 GHz, Stop 2.50000 GHz                  #Res BW 100 kHz, #VBW 300 kHz, Sweep 2.133 ms (8001 pts)</p> <table border="1" style="width: 100%; font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.479 996 50 GHz</td><td>-1.009 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.483 500 00 GHz</td><td>-53.097 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td>-52.577 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.497 269 25 GHz</td><td>-48.920 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.479 996 50 GHz	-1.009 dBm				2	N	f		2.483 500 00 GHz	-53.097 dBm				3	N	f		2.500 000 00 GHz	-52.577 dBm				4	N	f		2.497 269 25 GHz	-48.920 dBm				Frequency Auto Tune Center Freq 2.48900000 GHz Start Freq 2.478000000 GHz Stop Freq 2.500000000 GHz CF Step 2.200000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.479 996 50 GHz	-1.009 dBm																																										
2	N	f		2.483 500 00 GHz	-53.097 dBm																																										
3	N	f		2.500 000 00 GHz	-52.577 dBm																																										
4	N	f		2.497 269 25 GHz	-48.920 dBm																																										

**B.7 Restrict-band band-edge measurements**

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
BT LE	2402	Ant1	2310.0	-43.09	2.0	0	52.17	PEAK	74	PASS
		Ant1	2310.0	-53.00	2.0	0	42.25	AV	54	PASS
		Ant1	2390.0	-42.72	2.0	0	52.54	PEAK	74	PASS
		Ant1	2390.0	-52.75	2.0	0	42.51	AV	54	PASS
	2480	Ant1	2483.5	-40.47	2.0	0	54.79	PEAK	74	PASS
		Ant1	2483.5	-52.58	2.0	0	42.67	AV	54	PASS
		Ant1	2500.0	-41.33	2.0	0	53.93	PEAK	74	PASS
		Ant1	2500.0	-52.36	2.0	0	42.90	AV	54	PASS

Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_PEAK

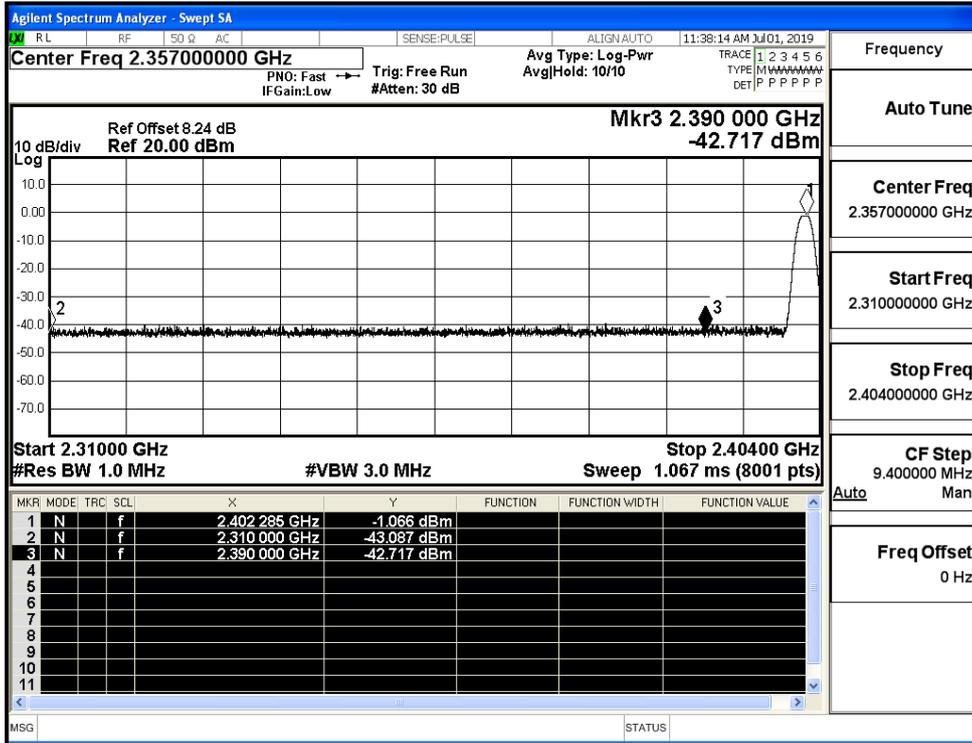

Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_AV

