

• dot ::

Kiosk 8-cell module (KM3-08A)

User Manuals

Dot Inc.

Table of Contents

1. Introduction	3
2. description of appearance and how to use it.....	3
2.1. Top	3
2.1.1. 8 Braille cells	3
2.1.2. Go to previous braille line button.....	3
2.1.3. Go to next braille line button	3
2.2. Top Side	3
2.2.1. USB-C Type Power Supply Port.....	4
2.2.2. USB-C Type Data Transfer Port.....	4
3. specification.....	4
3.1 General Specifications.....	4
3.2 Power Specifications.....	5
4. product dimensions	6
5. handling and safety precautions	7
6. authentication.....	9

1. Introduction

This product is a product that connects to a device with an operating system, such as a PC, and reads information sent from the PC in Braille. The purpose of the product is to be mounted on a kiosk so that blind people who know Braille can use the keypad to read the information they are currently browsing in Braille as they use the kiosk, and the product has eight Braille cells.

2. description of appearance and how to use it

2.1. Top

The top of the product has eight braille cells in the centre of the top face, with one button to the left of the braille cells, one button to the right of the braille cells, and one button on each side of the braille cells.

2.1.1. 8 Braille cells

The eight Braille cells are where information sent from the PC is printed in Braille.

2.1.2. Go to previous braille line button

The button to the left of the braille cell is the Go to previous braille line button. If you want to reread the previous braille content, pressing this button will move the braille line to the previous one and print it out.

2.1.3. Go to next braille line button

The button to the right of the braille cell is the Go to Next Braille Line button. If you have finished reading the current braille line and want to read the next line, pressing this button will jump to the next braille line and print it.

2.2. Top Side

There are two USB-C type ports on the top side of the product, one on the left and one on the right.

2.2.1. USB-C Type Power Supply Port

The USB-C type port on the left is the power port. Connect one end of the USB-C type cable to the product's power supply port and the other end to the DC 15V/3A USB-C adapter, then plug the adapter into an outlet to instantly power the product.

2.2.2. USB-C Type Data Transfer Port

The USB-C type port on the right is a data transfer port. You can connect to a device with an operating system, such as a PC, to send and receive data. The separately provided software must be installed on the PC to operate the product. Here's how to connect your product to your PC

- ✓ Connect one end of the USB-C type cable to the product's data transfer port and the other end to your PC.
- ✓ On your PC, launch Device Manager by pressing the Windows key and searching for 'Device Manager'.
- ✓ Open the ports (COM & LPT) from the Device Manager list.
- ✓ Check the product's port number under Ports (COM & LPT). (If you already have multiple ports connected and are unsure which one is the product's port number, remove the data transfer cable and reconnect it to see which one is generated).
- ✓ Run the software you installed on your PC.
- ✓ Set it to the port number that you verified in Device Manager, and the product can connect.

3. specification

3.1 General Specifications


Classification	Item	Specifications
Basic information	Model Name	KM3-08A
	Product name	Kiosk 8-cell module
	Braille cells	Dot D3 Braille Cell
	Number of cells	8 cells

	Dimensions (size)	150 mm x 42 mm x 16 mm (WXDXH)
	Weight	75g±10
	Processor	ARM Cortex-M4/32Bit Single-Core
	Memory	FLASH 128KB
	RAM	64K X 8
	EEPROM	2Kbit
	button	Forward 1ea / Reverse 1ea
Power	Input power	DV15V / 3A
External ports	Power input port	usb-c / 45w pd/dv15v/3a
	Ports for data communication	USB-C
Behaviour and archiving Temperature, humidity	Operating temperature	0°C to +50
	Operating humidity	20 to 75% R.H.
	Storage temperature	-20°C to +70
	Storage humidity	10 to 80% R.H.

3.2 Power Specifications

Separation	Description	Min.	Typ.	Max.	Unit
Power	Input Supply Voltage (Adapter DC15V)	-0.5	15	15.4	V
Communication classification	Serial Communication	-0.5	5	5.4	V
Grounding	Ground	-.	-.	-.	-.

4. product dimensions

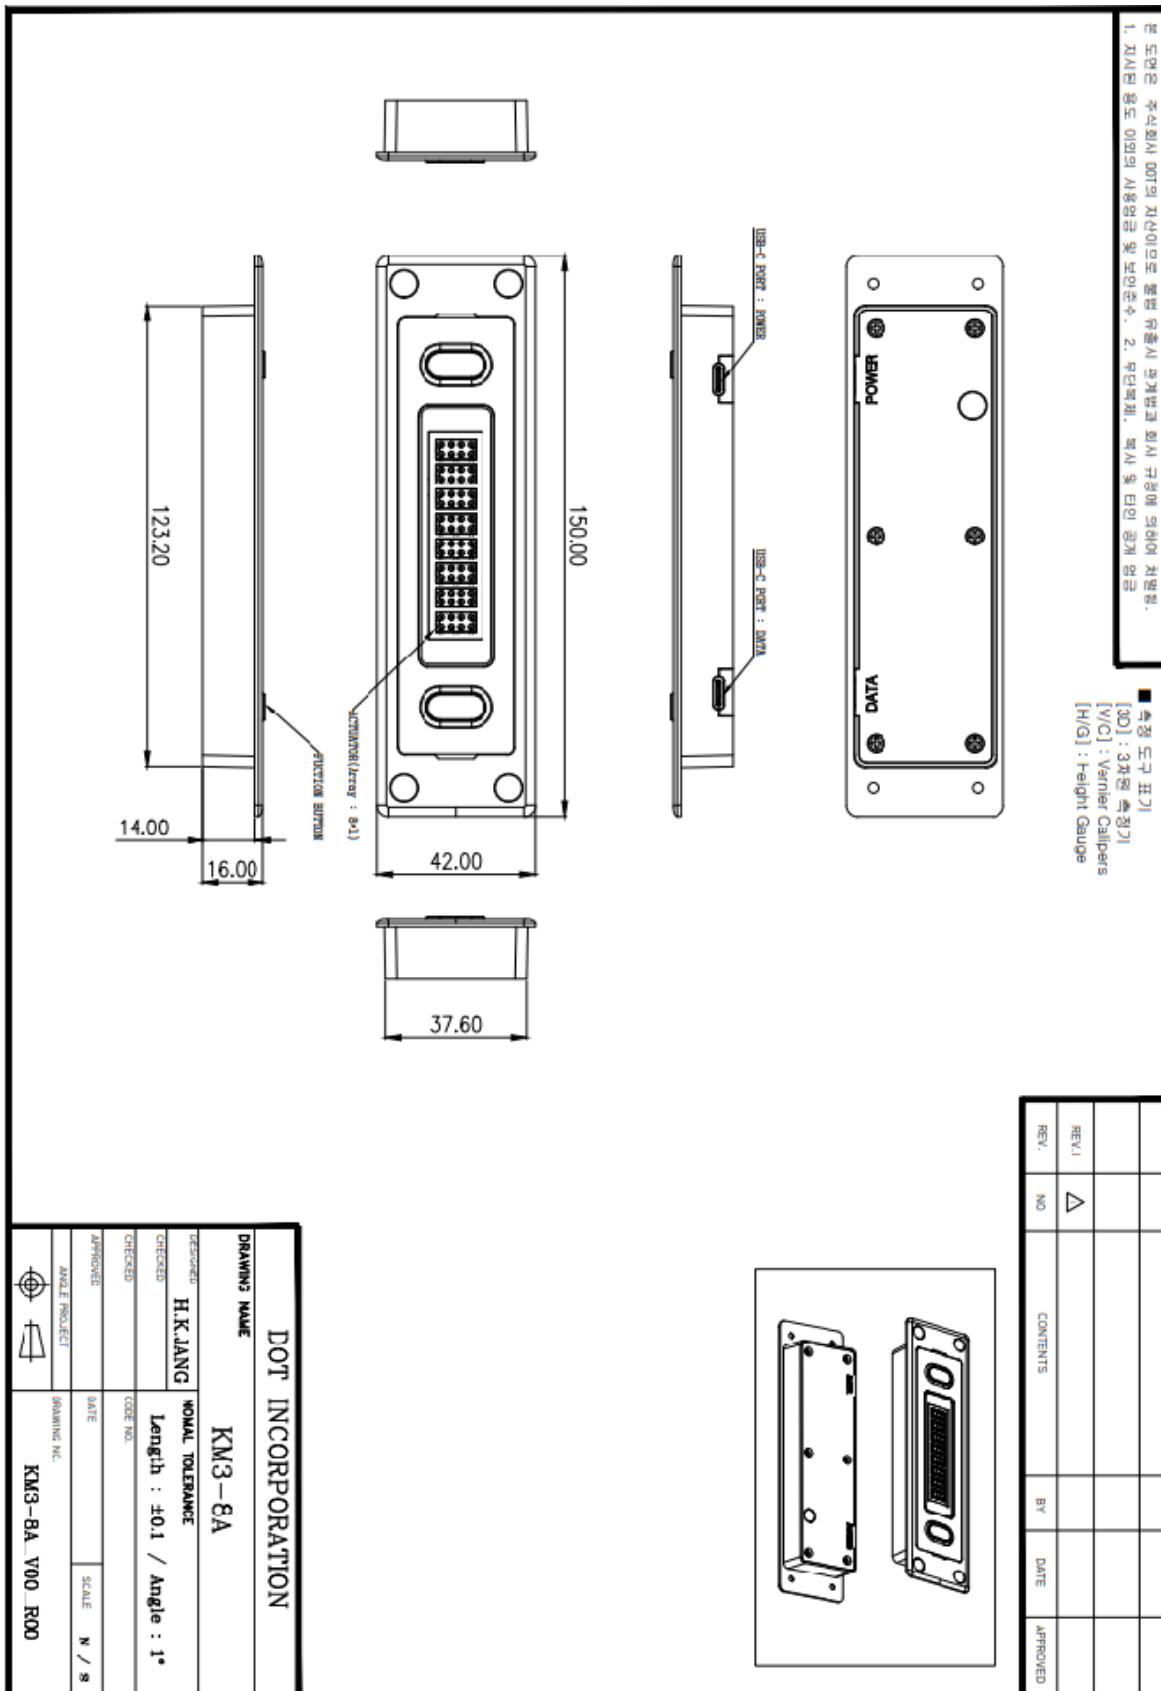

5. handling and safety precautions

The contents of this manual may differ from the actual product depending on the firmware version, model, and specifications of the product. Do not use the product for any purpose other than its intended use. Be careful not to subject the product to shock, as this may cause damage.

- Keep the product dry - it may not function properly if used in damp areas or if it gets wet.
- Your product contains built-in magnets. Keep it away from other magnetic products or metal objects. There is a risk of damage to the product.
- If used in dusty areas, debris can get inside and interfere with operation.
- Use accessories provided by Dot Inc. Using non-original products may cause the product to malfunction and may not be covered by the warranty provided by Dot.
- If you apply pressure from the outside while the braille cell is in motion, the product may not function properly. If this happens, it is not a malfunction and you should release it and try again.
- If the product is used upside down, it may not represent the correct braille.
- To better serve you, some product specifications are subject to change without notice.
- If you arbitrarily change the firmware, etc. provided by Dot, Inc. or apply it to the product through unofficial channels, it may cause damage to the product or cause errors. In this case, the warranty service is not applicable.

Use it with safety in the following situations

1. [Lightning and Lightning Beware].

Do not use the product during severe lightning or thunderstorms, and disconnect the power source. Personal injury or fire may result.

2. [Beware of Forbidden Zones]

Avoid use in areas where product use is prohibited, such as airplanes and hospitals. Electronic and communication products may be affected by electromagnetic waves.

3. [Disassembly Caution].

Do not attempt to disassemble or shock the product. There is a risk of electric shock, electric leakage, or fire. Warranty service will not be honoured if the product is disassembled. Do not use the product in a damaged or malfunctioning condition. This may cause fire, burns, or electric shock. In this case, contact customer service.

4. [Power Attention]

Make sure the USB cable is securely connected to the device and not wobbly before using it. Do not bend, pull, heat, cut, or use the cable loose. This can cause a fire or electric shock. When disconnecting the adapter, grasp the adapter by the appropriate adapter area. If you remove the adapter by pulling on the wires, the wires may break and cause the power adapter to fail.

5. [Caution for high temperature and humidity].

Do not use the product in high temperature and humidity. If water gets into the product, turn it off and dry it thoroughly before using it. Do not place it near a car window in direct sunlight, on a futon, electrical board, carpet for a long time, or in a high temperature and humidity environment. It may deform its appearance, malfunction, or explode. If the product temperature rises rapidly, stop using the product and contact a service centre.

6. [Chemical Caution]

Never use chemicals such as alcohol or benzene to clean the product. They can cause a fire. If there is any foreign matter on the product, wipe it with a soft cloth.

7. [Beware of metals and magnets]

Keep away from metals such as necklaces, keys, coins, nails, watches, etc. If a metal object short-circuits the terminals, there is a risk of explosion.

8. [Be careful with children/pets]

Keep the product, parts, etc. out of the reach of children and pets. Putting them in the mouth or impacting them can cause hazards such as electric shock or electromagnetic exposure. Take care in storage to prevent children or pets from swallowing the product, parts, etc. There is a risk of suffocation, explosion, or fire.

9. [Beware of Dangerous Areas]

Do not use the product in hazardous areas. It may affect high-frequency devices. Do not place in an unsecured location, such as a shaky or inclined area, as it may fall and cause injury.

10. [Fire Caution]

Do not cover or wrap it in a blanket while in use or charging. Do not dispose of with regular garbage. It may cause fire, explosion, or environmental damage.

11. [Avoid skin damage].

Prolonged use of the product may cause the surface of the product to reach a temperature above

the appropriate level, and prolonged contact with the skin in this condition may result in cold burns, including spots and pigmentation, so stop using the product for a while. If the exterior paint peels off or you experience an allergic reaction depending on the product material, stop using the product immediately and consult a doctor.

12. [Archive Caution].

When storing the product's power adapter, make sure that the USB cable is not severely folded or kinked. Storing or using the USB cable with a severely folded or kinked USB cable may cause the USB cable sheath to strip or break, resulting in a malfunction or accident.

13. [shock alert].

The product may be subject to shock if you apply strong force to it or place heavy objects on it. When not in use, store the product in a safe place to avoid shock.

6. authentication

Asia Pacific



Authentication number

The National Integrated Certification Mark indicates that a product meets South Korea's product safety requirements for electrical and electronic equipment.



Authentication number

This mark indicates compliance with the technical and design requirements for telecommunications terminal devices in Japan.

Europe and North America



Products marked with this symbol comply with all Community regulations applicable to the European Economic Area.



Authentication number

This FCC mark certifies that the device's electromagnetic interference is below the limits approved by the U.S. Federal Communications Commission.

[South Korea - KC]



- Due to the possibility of radio interference during operation, this wireless facility cannot provide services related to life safety.

[FCC]



FCC class A

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC class B

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet in a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution

The manufacturer is not responsible for any radio or TV interference caused by unauthorized changes or modifications to this equipment. Such changes or modifications could void the user authority to operate the equipment.

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

All rights reserved. This manual may not be reproduced in any form. Even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher. This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks patents are recognised.

FCC (§15.19(a)(3)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

[CE]



"CE" mark indicates that this product complies with the European requirements for safety, health, environment and customer protection. "CE" mark devices are intended for sales in Europe. "CE" mark devices are intended for sales in Europe.



This symbol [crossed-out wheeled bin WEEE Annex IV] indicates separate collection of waste electrical and electronic equipment in the EU countries.

Please do not throw the equipment into the domestic refuse.



Please use the return and collection systems available in your country for the

disposal of this product.

Disclaimer

No warranty or representation, either expressed or implied, is made with respect to the contents of this documentation, its quality, performance, merchantability, or fitness for a particular purpose. Information presented in this documentation has been carefully checked for reliability; however, no responsibility is assumed for inaccuracies. The information contained in this documentation is subject to change without notice.

In no event will DOT INC. be liable for direct indirect, special, incidental, or consequential damages arising out of the use or inability to use this product or documentation, even if advised of the possibility of such damages.

[FCC and CE compliance Statement]

These limits are designed to provide reasonable protection against frequency interference in residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed or used in accordance with the instructions, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in television reception, which can be determined by turning the equipment off and on.

The user is encouraged to try and correct interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected to.