



Wireless Keyboard For iOS/Android/Windows BTX5050, BK281B

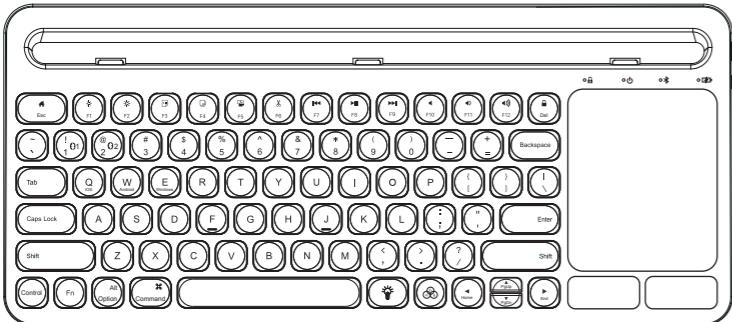

Note:
1. This keyboard is perfect for smartphone, laptop, desktop, compatible with iOS, Android and Windows operation system.
2. Please charge the keyboard about 2 hours before using.
3. Please read the user manual carefully before you start using this product.
4. Function keys feature may have variations depending on the operation system version and devices.

Indicator Analysis

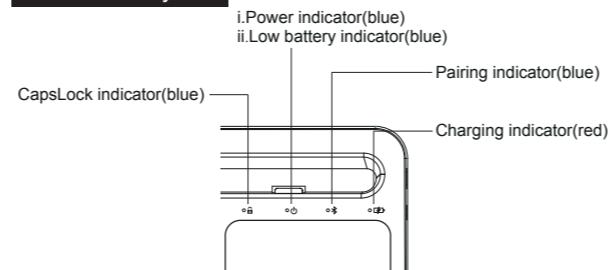

Pairing Multi-Pairing Bluetooth Keyboard

- Slide the power switch to "ON", the blue indicator will be on, long press "Fn + ⌘" key 3 seconds, the bluetooth keyboard will enter pairing condition while the blue indicator keep flashing at 0.25 second frequency.
- Power on the device and select the setting icon on the screen, click it to enter the system preferences list.
- Click the Bluetooth icon to enter the bluetooth device searching condition.
- In the bluetooth device searching list, you can find the "Bluetooth Keyboard", click it to connect.
- After the device connect the bluetooth keyboard successfully, you can start to use the keyboard for typing freely.
- Long press "Fn + ⌘" key 3 seconds, the bluetooth keyboard will enter pairing condition while the blue indicator keep flashing at 0.25 second frequency.
- Follow steps 2-4 to pair additional Bluetooth devices.

Switching Between Devices

Wireless Keyboard can pair up to 2 different Bluetooth devices. You will be able to switch between your paired devices by selecting the appropriate assigned Bluetooth key ("Fn + ⌘" or "Fn + ⌘").

Note: The time between switching devices will take approximately 2-4 seconds.

Low battery reminder

In connected condition, if the blue indicator keep flashing at 0.5 second frequency, please use the charging cable to charge the keyboard till the red indicator off.

Power Management

If the keyboard is not in use, the keyboard will go into sleep mode after 20 minutes. Simply press any key to wake up the keyboard, it will take 3-5 seconds to reconnect to the device selected.

Technical Specifications

Keyboard size : 368x162x(9-20)mm
Working distance : ~10m
Working voltage : 3.2~4.2V
Operation current : <2mA (no backlight)

Standby current : <0.5mA (no backlight)
Sleep current : <50uA
Sleep time : 20 minutes
Awaken way : click any key to awaken

Functional Key

Key	Fn + on iOS	on iOS	fn+on Android	on Android	fn + on Windows	on Windows
Home	Esc	Home	Esc	Browser	Esc	Esc
Brightness down	F1	Brightness down	F1	Brightness down	F1	F1
Brightness up	F2	Brightness up	F2	Brightness up	F2	F2
Select all	F3	Select all	F3	Select all	F3	F3
Copy	F4	Copy	F4	Copy	F4	F4
Paste	F5	Paste	F5	Paste	F5	F5
Cutting	F6	Cutting	F6	Cutting	F6	F6
Previous track	F7	Previous track	F7	Previous track	F7	F7
Play/pause	F8	Play/pause	F8	Play/pause	F8	F8
Next track	F9	Next track	F9	Next track	F9	F9
Mute	F10	Mute	F10	Mute	F10	F10
Volume down	F11	Volume down	F11	Volume down	F11	F11
Volume up	F12	Volume up	F12	Volume up	F12	F12
Screen lock	Del	Screen lock	Del	Screen lock	Del	Del

Note:
Press Fn and Q (iOS), W (Android) or E (Windows) keys together to shift between iOS, Android or Windows systems after connected successfully with a corresponding device. Otherwise the keyboard's function key will only be partial valid.

Touchpad Analysis

1. When using Windows systems

Touchpad function	Finger action picture	Finger action
Move cursor		One finger Slide
Click once or Click twice		One/Two finger(s) click once or click twice
Scroll on parallel or vertical		Two fingers slide
Zoom in		Slide to two sides from center
Zoom out		Slide to center from two sides
Open the cortana		Three finger click
Open background window		Three finger slid up
Show Desktop		Three fingers slide down
Backward		Three fingers slide to left
Forward		Three fingers slide to right

2. When using Android system

Touchpad function	Mouse function	Finger action picture	Finger action
Move	Move the cursor		Finger slide
click touchpad once	click touchpad once		One finger click
Click right key once	Click right key once		Two fingers click

Backlight Control

1. Turn on the backlight:

After the keyboard is connected, press "Fn" key to turn on the backlight.

2. Backlight brightness control:

Press "Fn" key once to turn on the first level of backlight by default, press second time to turn on the second level of backlight, press the third time to turn on the third level of backlight, and press the fourth time to turn off the backlight, so as to cycle.

3. Switch the backlight color

After turning on the backlight, press "Fn" key to switch the backlight color, Available in 7 backlight colors.

Keyboard Maintenance

1. Please keep the keyboard away from liquid or humid environment, saunas swimming pool, steam room and don't let the keyboard get wet in the rain.

2. Please don't expose the keyboard at too high or too low temperature condition.

3. Please don't put keyboard under sun for a long time.

4. Please don't put keyboard close to the flame, such as cooking stoves, candles or fireplace.

5. Avoid sharp objects scratching products.

Troubleshooting

Please contact the after-sales service.

Copyright

It is forbidden to reproduce any part of this quick start guide without the permission of seller.

Safety instructions

Do not open or repair this device, do not use the device in a damp environment. Clean the device with a dry cloth.

Warranty

The device is provided with one-year limited hardware warranty from the purchase day.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction

112*160mm
105克铜版纸单色印刷