

System Check_H2450

DUT: Dipole 2450 MHz; Type:D2450V2; SN:927

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2450\text{ MHz}$; $\sigma = 1.77\text{ S/m}$; $\epsilon_r = 40.12$; $\rho = 1000\text{ kg/m}^3$

Ambient Temperature : $22.1\text{ }^\circ\text{C}$; Liquid Temperature : $21.9\text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2023/5/17;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (41x51x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$ Maximum value of SAR (interpolated) = 25.4 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 116.8 V/m ; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 13.1 W/kg ; SAR(10 g) = 6.07 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

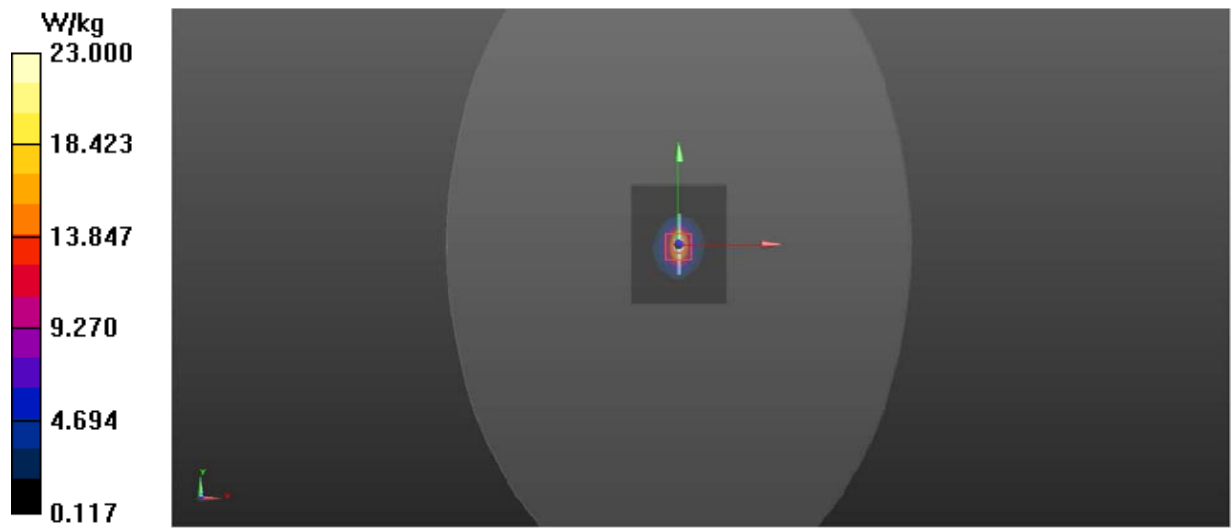

System Check_H2450

DUT: Dipole 2450 MHz; Type:D2450V2; SN:927

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2450\text{ MHz}$; $\sigma = 1.79\text{ S/m}$; $\epsilon_r = 40.105$; $\rho = 1000\text{ kg/m}^3$

Ambient Temperature : $21.7\text{ }^\circ\text{C}$; Liquid Temperature : $21.5\text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970;Calibrated: 2022/4/18;
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (41x51x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$

Maximum value of SAR (interpolated) = 25.4 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{ mm}$, $dy=5\text{ mm}$, $dz=5\text{ mm}$

Reference Value = 114.7 V/m ; Power Drift = 0.10 dB Peak

SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 13.01 W/kg ; SAR(10 g) = 6.09 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

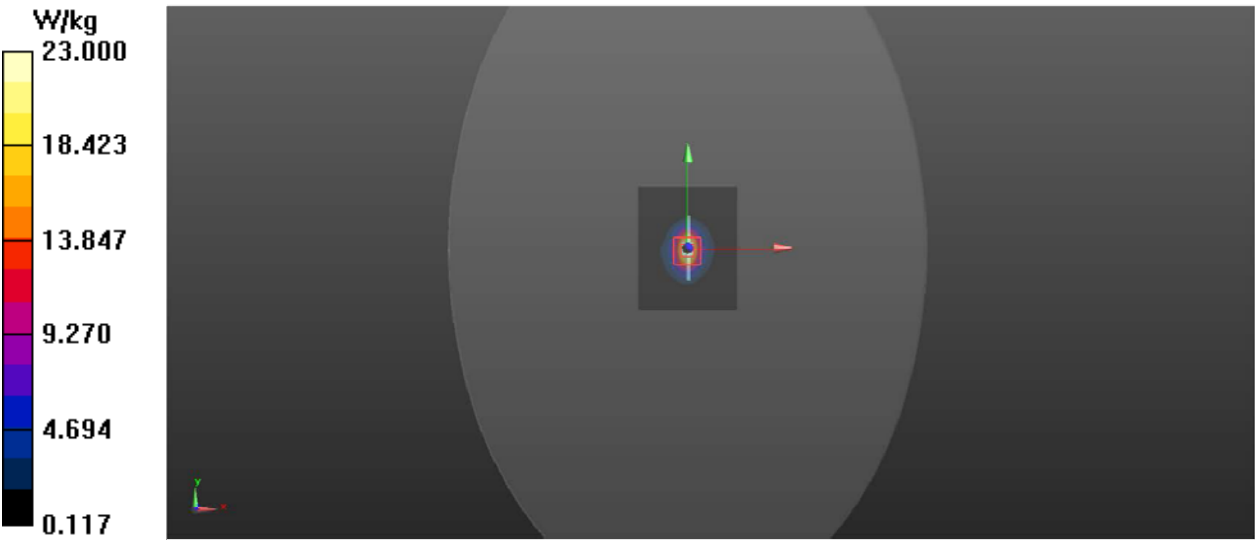

System Check_H5250

DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5250 MHz;Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5250\text{ MHz}$; $\sigma = 4.74\text{ S/m}$; $\epsilon_r = 36.82$; $\rho = 1000\text{ kg/m}^3$

Ambient Temperature : $22.1\text{ }^\circ\text{C}$; Liquid Temperature : $21.9\text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; Calibrated: 2023/5/17;
- Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (7x9x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$

Maximum value of SAR (interpolated) = 33.0 W/kg


Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=4\text{ mm}$, $dy=4\text{ mm}$, $dz=2\text{ mm}$

Reference Value = 58.461 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 36.1 W/kg

SAR(1 g) = 7.62 W/kg ; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 33.4 W/kg

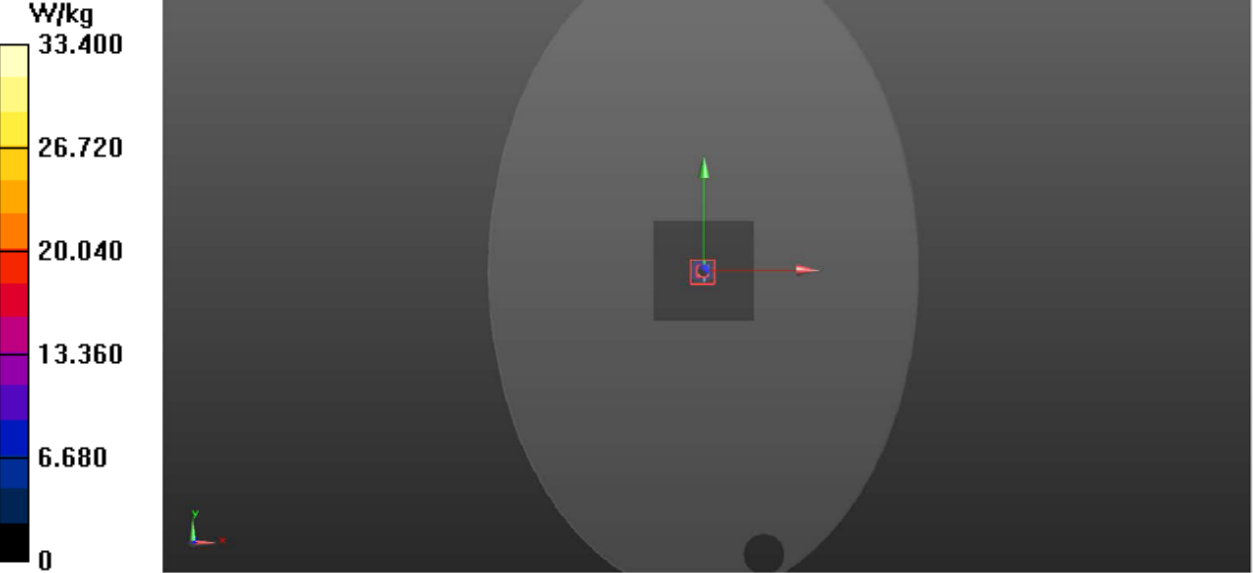

System Check_H5600


DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5600 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5600\text{ MHz}$; $\sigma = 5.21\text{ S/m}$; $\epsilon_r = 36.14$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.1\text{ }^\circ\text{C}$; Liquid Temperature : $21.9\text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2023/5/17;
- Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (7x9x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$
Maximum value of SAR (interpolated) = 24.2 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 64.812 V/m ; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 42.1 W/kg
SAR(1 g) = 7.80 W/kg ; SAR(10 g) = 2.13 W/kg
Maximum value of SAR (measured) = 29.6 W/kg

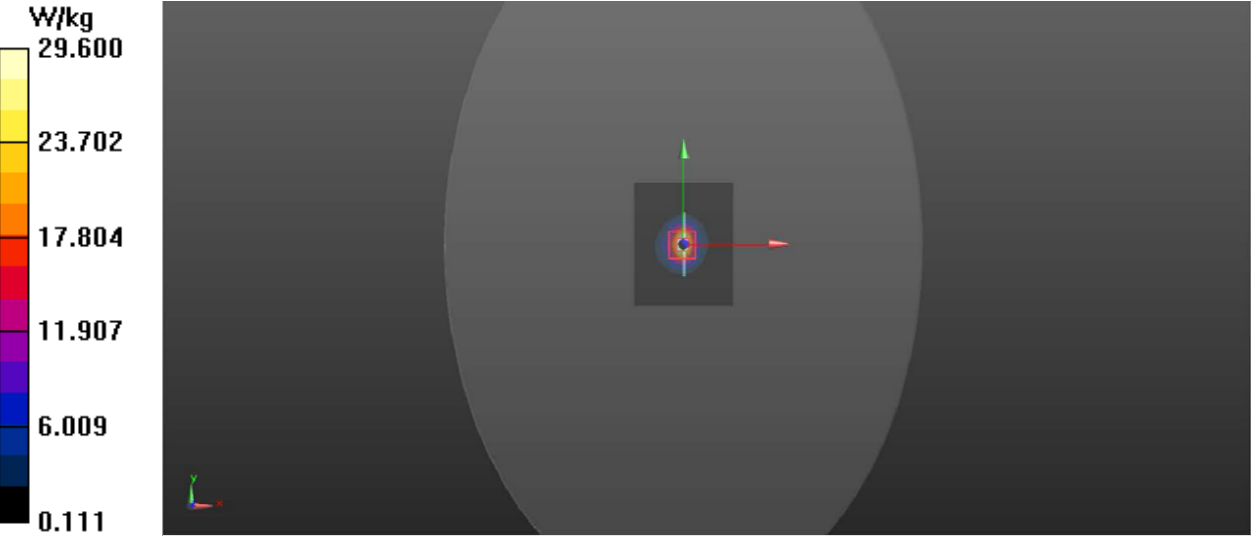

System Check_H5750

DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5750 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5750\text{ MHz}$; $\sigma = 5.42\text{ S/m}$; $\epsilon_r = 35.85$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.4\text{ }^\circ\text{C}$; Liquid Temperature : $22.2\text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2023/5/17;
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (7x9x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$
Maximum value of SAR (interpolated) = 21.4 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=4\text{ mm}$, $dy=4\text{ mm}$, $dz=2\text{ mm}$
Reference Value = 49.111 V/m ; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 36.8 W/kg
SAR(1 g) = 7.53 W/kg ; SAR(10 g) = 2.12 W/kg
Maximum value of SAR (measured) = 23.42 W/kg

