

TEST REPORT

Product Name: Wireless wheel speed sensor
FCC ID: 2BMJB-RLWSENSOR
Trademark: Racelogic
Model Number: RLWSENSOR
Prepared For: Guangzhou Zeer Testing Technology Co.,Ltd.
Address: Room 1611, TOP PLAZA EAST TOWER, 222# Xingmin Road, Zhujiang NewTown, TianHe District, GuangZhou, China P.C:510635
Manufacturer: Guangzhou Zeer Testing Technology Co.,Ltd.
Address: Room 1611, TOP PLAZA EAST TOWER, 222# Xingmin Road, Zhujiang NewTown, TianHe District, GuangZhou, China P.C:510635
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Oct. 08, 2024
Sample tested Date: Oct. 08, 2024 to Nov. 19, 2024
Issue Date: Nov. 19, 2024
Report No.: CTB241024004RFX
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	6
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	10
6.1 Block Diagram Of Test Setup.....	10
6.2 Limit.....	10
6.3 Test procedure	10
6.4 Test Result	12
7. RADIATED SPURIOUS EMISSION	13
7.1 Block Diagram Of Test Setup.....	13
7.2 Limit.....	13
7.3 Test procedure	14
7.4 Test Result	15
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	37
8.1 Block Diagram Of Test Setup.....	37
8.2 Limit.....	37
8.3 Test procedure	37
8.4 Test Result	38
9. CONDUCTED OUTPUT POWER	70
9.1 Block Diagram Of Test Setup.....	70
9.2 Limit.....	70
9.3 Test procedure	70
9.4 Test Result	71
10. 6DB OCCUPIED BANDWIDTH	72
10.1 Block Diagram Of Test Setup.....	72
10.2 Limit.....	72
10.3 Test procedure	72
10.4 Test Result	73
11. POWER SPECTRAL DENSITY	91
11.1 Block Diagram Of Test Setup.....	91
11.2 Limit.....	91
11.3 Test procedure	91
11.4 Test Result	92
12. ANTENNA REQUIREMENT	109
13. EUT TEST SETUP PHOTOGRAPHS.....	110

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB241024004RFX	Nov. 19, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	RLWSENSOR
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 14.049dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM
Antenna installation:	WiFi (2.4G): External antenna
Antenna Gain:	WiFi (2.4G): -3.71dBi
Ratings:	DC 12V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	ADAPTER	高梵德	GFDA3-1261000C	N/A	EUT

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2, ANT 3, ANT 4

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinxhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

Radiated emission(No.1 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/6/28
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

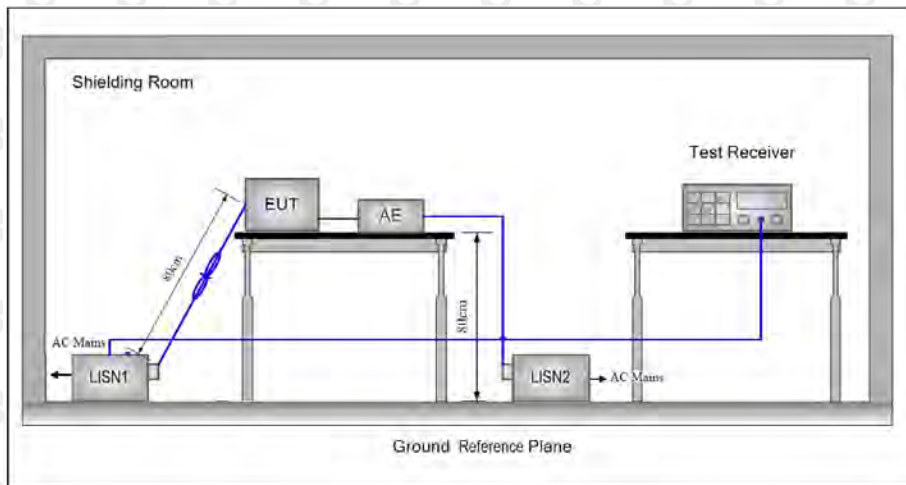

6.2 Limit

Table 4 - AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

6.4 Test Result

N/A

NOTE: This EUT is powered by DC power only, this test item is not applicable.

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

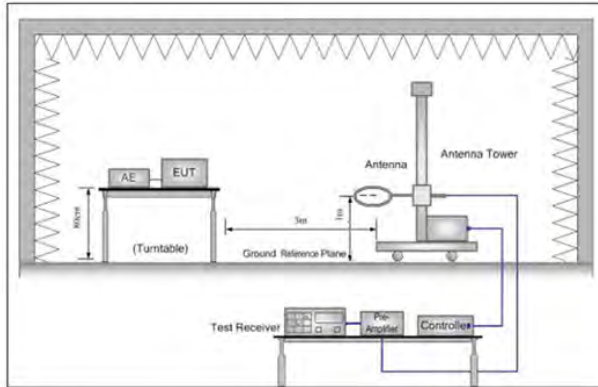


Figure 1. Below 30MHz

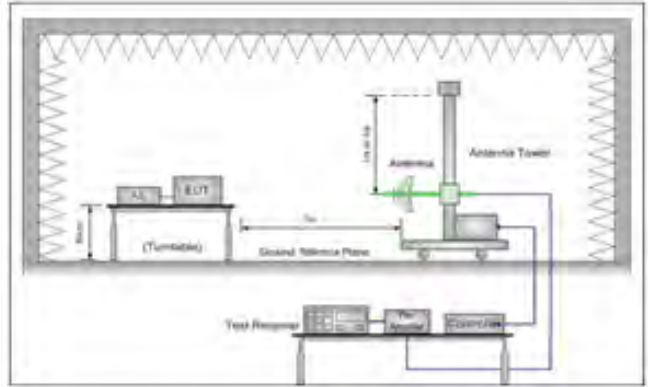


Figure 2. 30MHz to 1GHz

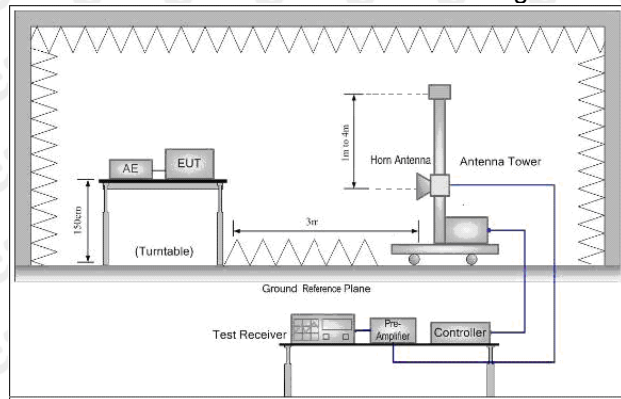


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		58.9217	38.60	-7.25	31.35	40.00	-8.65	QP
2	!	112.7218	45.39	-6.67	38.72	43.50	-4.78	QP
3	!	153.2002	42.36	-2.21	40.15	43.50	-3.35	QP
4	*	211.8976	44.86	-4.58	40.28	43.50	-3.22	QP
5		308.9125	36.31	-2.71	33.60	46.00	-12.40	QP
6		869.1301	28.05	7.99	36.04	46.00	-9.96	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		56.8913	38.13	-7.11	31.02	40.00	-8.98	QP
2	!	112.7218	45.28	-6.67	38.61	43.50	-4.89	QP
3	!	153.2001	41.45	-2.21	39.24	43.50	-4.26	QP
4	*	210.0481	44.43	-4.62	39.81	43.50	-3.69	QP
5		306.2162	36.10	-2.76	33.34	46.00	-12.66	QP
6		948.7608	27.70	8.60	36.30	46.00	-9.70	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.04	-3.64	62.40	74	-11.60	peak
4824	50.65	-3.64	47.01	54	-6.99	AVG
7236	58.72	-0.95	57.77	74	-16.23	peak
7236	44.14	-0.95	43.19	54	-10.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.06	-3.64	61.42	74	-12.58	peak
4824	48.56	-3.64	44.92	54	-9.08	AVG
7236	57.65	-0.95	56.70	74	-17.30	peak
7236	45.17	-0.95	44.22	54	-9.78	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.39	-3.51	61.88	74	-12.12	peak
4874	50.16	-3.51	46.65	54	-7.35	AVG
7311	59.74	-0.82	58.92	74	-15.08	peak
7311	44.01	-0.82	43.19	54	-10.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.40	-3.51	60.89	74	-13.11	peak
4874	47.70	-3.51	44.19	54	-9.81	AVG
7311	58.41	-0.82	57.59	74	-16.41	peak
7311	43.10	-0.82	42.28	54	-11.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	63.30	-3.43	59.87	74	-14.13	peak
4924	48.13	-3.43	44.70	54	-9.30	AVG
7386	59.97	-0.75	59.22	74	-14.78	peak
7386	42.92	-0.75	42.17	54	-11.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	63.80	-3.43	60.37	74	-13.63	peak
4924	47.82	-3.43	44.39	54	-9.61	AVG
7386	56.56	-0.75	55.81	74	-18.19	peak
7386	41.55	-0.75	40.80	54	-13.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.60	-3.64	60.96	74	-13.04	peak
4824	47.91	-3.64	44.27	54	-9.73	AVG
7236	58.47	-0.95	57.52	74	-16.48	peak
7236	45.54	-0.95	44.59	54	-9.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.54	-3.64	59.90	74	-14.10	peak
4824	49.13	-3.64	45.49	54	-8.51	AVG
7236	58.67	-0.95	57.72	74	-16.28	peak
7236	43.49	-0.95	42.54	54	-11.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.17	-3.51	61.66	74	-12.34	peak
4874	46.80	-3.51	43.29	54	-10.71	AVG
7311	59.60	-0.82	58.78	74	-15.22	peak
7311	45.03	-0.82	44.21	54	-9.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.11	-3.51	59.60	74	-14.40	peak
4874	47.79	-3.51	44.28	54	-9.72	AVG
7311	56.75	-0.82	55.93	74	-18.07	peak
7311	42.15	-0.82	41.33	54	-12.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	64.90	-3.43	61.47	74	-12.53	peak
4924	49.76	-3.43	46.33	54	-7.67	AVG
7386	56.80	-0.75	56.05	74	-17.95	peak
7386	42.31	-0.75	41.56	54	-12.44	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	62.11	-3.43	58.68	74	-15.32	peak
4924	47.14	-3.43	43.71	54	-10.29	AVG
7386	56.06	-0.75	55.31	74	-18.69	peak
7386	43.11	-0.75	42.36	54	-11.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2+ANT3+ANT4 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.20	-3.64	61.56	74	-12.44	peak
4824	48.75	-3.64	45.11	54	-8.89	AVG
7236	58.27	-0.95	57.32	74	-16.68	peak
7236	45.35	-0.95	44.40	54	-9.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.58	-3.64	61.94	74	-12.06	peak
4824	48.59	-3.64	44.95	54	-9.05	AVG
7236	56.63	-0.95	55.68	74	-18.32	peak
7236	44.21	-0.95	43.26	54	-10.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	65.00	-3.51	61.49	74.00	-12.51	peak
4874.00	47.11	-3.51	43.60	54.00	-10.40	AVG
7311.00	56.57	-0.82	55.75	74.00	-18.25	peak
7311.00	45.55	-0.82	44.73	54.00	-9.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	62.47	-3.51	58.96	74.00	-15.04	peak
4874.00	45.74	-3.51	42.23	54.00	-11.77	AVG
7311.00	59.21	-0.82	58.39	74.00	-15.61	peak
7311.00	43.49	-0.82	42.67	54.00	-11.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.08	-3.43	59.65	74	-14.35	peak
4924	46.26	-3.43	42.83	54	-11.17	AVG
7386	58.91	-0.75	58.16	74	-15.84	peak
7386	41.14	-0.75	40.39	54	-13.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.19	-3.43	59.76	74	-14.24	peak
4924	44.90	-3.43	41.47	54	-12.53	AVG
7386	55.75	-0.75	55.00	74	-19.00	peak
7386	43.53	-0.75	42.78	54	-11.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2+ANT3+ANT4:

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.93	-3.63	61.30	74	-12.70	peak
4844	48.35	-3.63	44.72	54	-9.28	AVG
7266	60.30	-0.94	59.36	74	-14.64	peak
7266	46.92	-0.94	45.98	54	-8.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.79	-3.63	61.16	74	-12.84	peak
4844	48.25	-3.63	44.62	54	-9.38	AVG
7266	58.13	-0.94	57.19	74	-16.81	peak
7266	44.04	-0.94	43.10	54	-10.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.05	-3.51	61.54	74	-12.46	peak
4874	47.93	-3.51	44.42	54	-9.58	AVG
7311	58.55	-0.82	57.73	74	-16.27	peak
7311	43.85	-0.82	43.03	54	-10.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.30	-3.51	58.79	74	-15.21	peak
4874	46.49	-3.51	42.98	54	-11.02	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.25	-3.43	60.82	74	-13.18	peak
4904	48.23	-3.43	44.80	54	-9.20	AVG
7356	55.93	-0.75	55.18	74	-18.82	peak
7356	41.49	-0.75	40.74	54	-13.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	63.91	-3.43	60.48	74	-13.52	peak
4904	46.94	-3.43	43.51	54	-10.49	AVG
7356	58.63	-0.75	57.88	74	-16.12	peak
7356	42.03	-0.75	41.28	54	-12.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT1: 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	57.73	-5.81	51.92	74	-22.08	peak
2390	/	-5.81	/	54	/	AVG
2399	65.03	-5.84	59.19	74	-14.81	peak
2399	49.84	-5.84	44.00	54	-10.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	56.35	-5.81	50.54	74	-23.46	peak
2390	/	-5.81	/	54	/	AVG
2399	63.35	-5.84	57.51	74	-16.49	peak
2399	47.60	-5.84	41.76	54	-12.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

ANT1: Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.82	-5.65	51.17	74	-22.83	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.46	-5.65	49.81	74	-24.19	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

ANT1: Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	57.83	-5.81	52.02	74	-21.98	peak
2390	/	-5.81	/	54	/	AVG
2399	62.57	-5.84	56.73	74	-17.27	peak
2399	46.28	-5.84	40.44	54	-13.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	57.60	-5.81	51.79	74	-22.21	peak
2390	/	-5.81	/	54	/	AVG
2399	62.11	-5.84	56.27	74	-17.73	peak
2399	46.35	-5.84	40.51	54	-13.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

ANT1: Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.64	-5.65	51.99	74	-22.01	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.19	-5.65	52.54	74	-21.46	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1+ANT2+ANT3+ANT4: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.46	-5.81	50.65	74	-23.35	peak
2390	/	-5.81	/	54	/	AVG
2399	62.51	-5.84	56.67	74	-17.33	peak
2399	48.02	-5.84	42.18	54	-11.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.91	-5.81	51.10	74	-22.90	peak
2390	/	-5.81	/	54	/	AVG
2399	61.54	-5.84	55.70	74	-18.30	peak
2399	47.88	-5.84	42.04	54	-11.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1+ANT2+ANT3+ANT4: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.58	-5.65	50.93	74	-23.07	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.21	-5.65	50.56	74	-23.44	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1+ANT2+ANT3+ANT4: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.80	-5.81	51.99	74	-22.01	peak
2390	/	-5.81	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.36	-5.81	52.55	74	-21.45	peak
2390	/	-5.81	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1+ANT2+ANT3+ANT4: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.72	-5.65	52.07	74	-21.93	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.68	-5.65	52.03	74	-21.97	peak
2483.5	/	-5.65	/	54	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

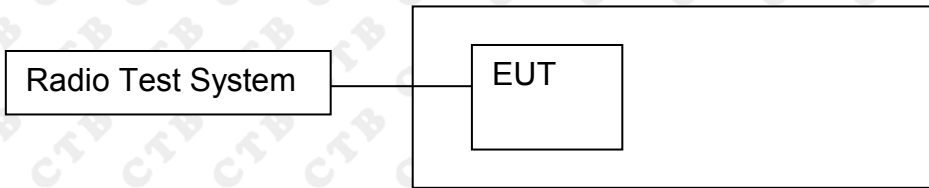

8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:

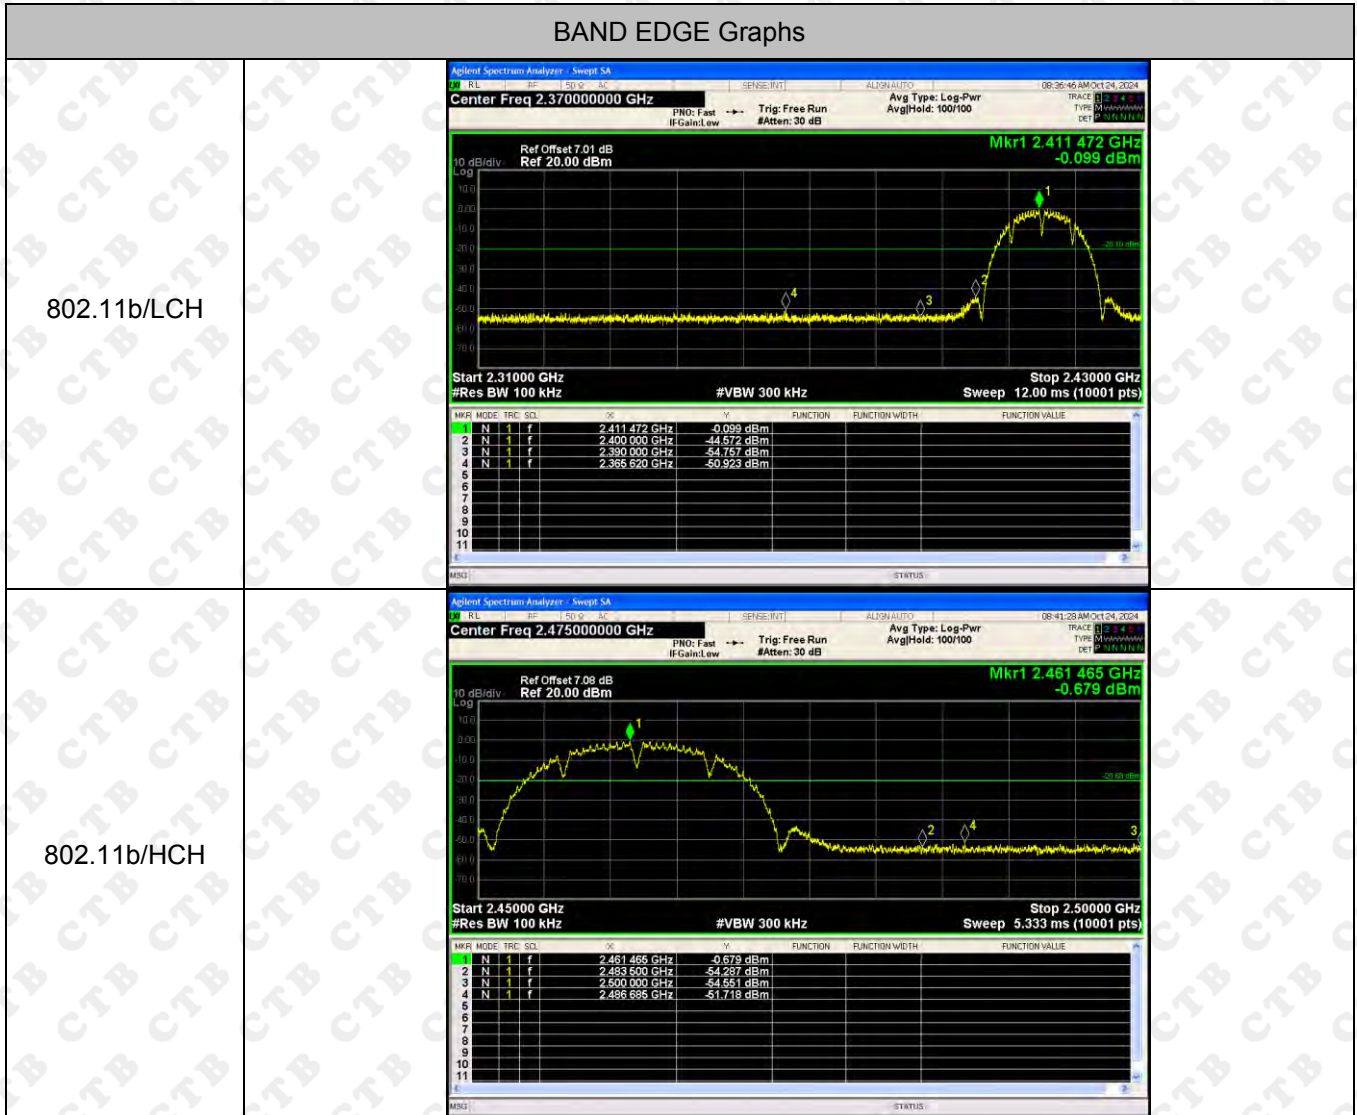



BAND EDGE Graphs

802.11g/LCH

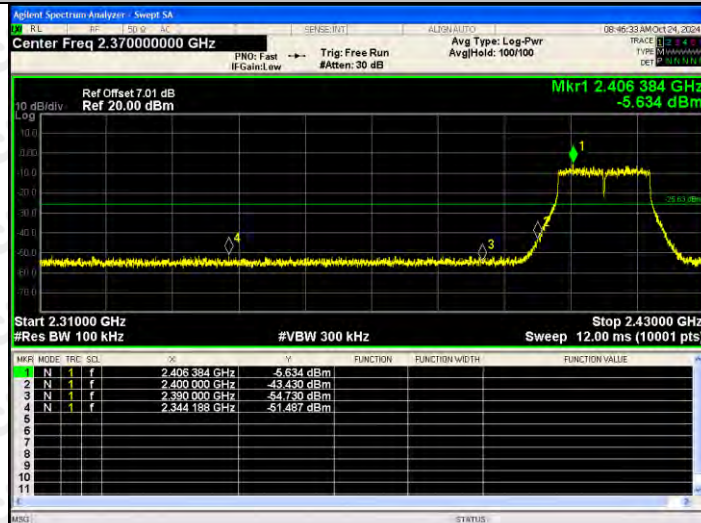

802.11g/HCH

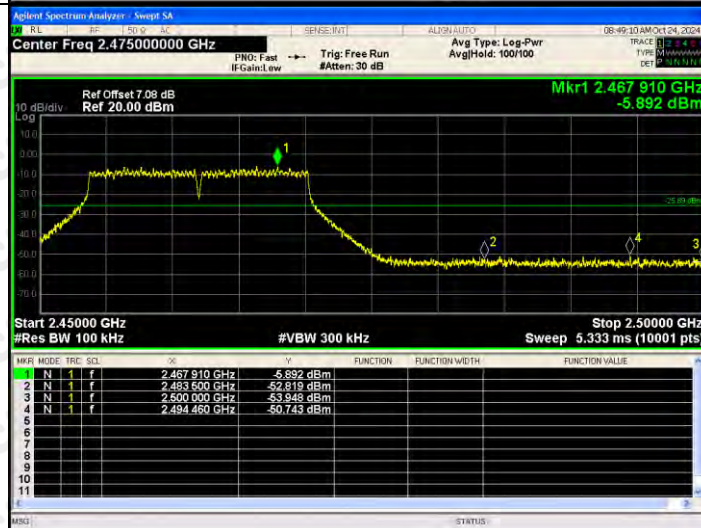

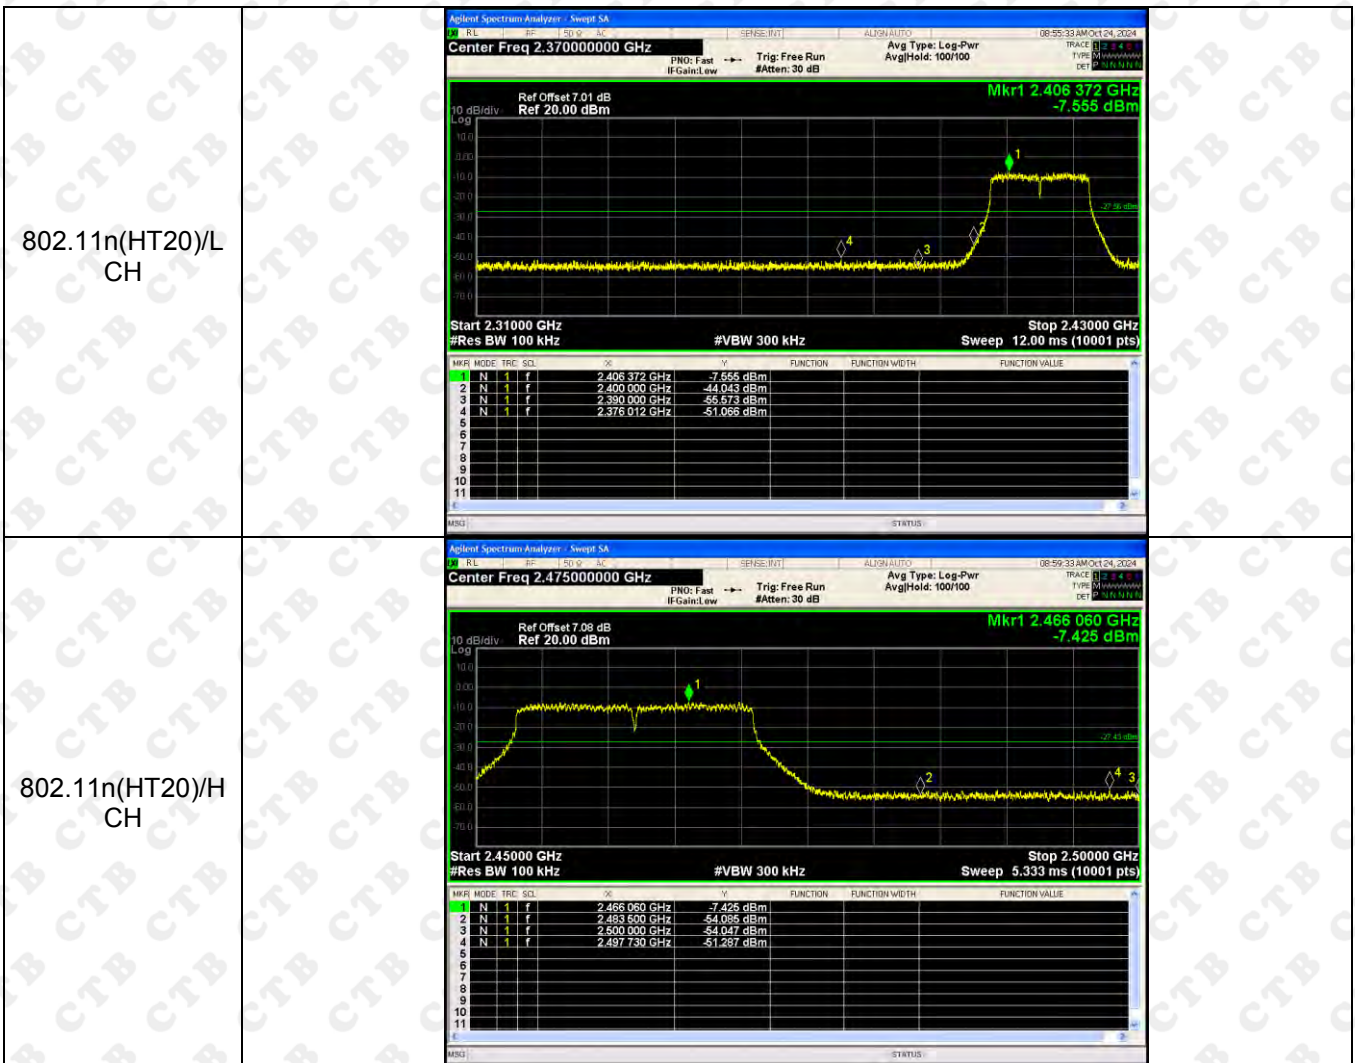




RF Conducted Spurious Emissions Graphs


<p>802.11b/LCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>F</th> <th>dBm</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.413 2 GHz</td> <td>-0.410 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.188 0 GHz</td> <td>-40.891 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.792 0 GHz</td> <td>-53.219 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.348 1 GHz</td> <td>-52.603 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.594 2 GHz</td> <td>-52.674 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SOL	F	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.413 2 GHz	-0.410 dBm					2	N	1	f	26.188 0 GHz	-40.891 dBm					3	N	1	f	4.792 0 GHz	-53.219 dBm					4	N	1	f	7.348 1 GHz	-52.603 dBm					5	N	1	f	9.594 2 GHz	-52.674 dBm				
MFR	MODE	TRC	SOL	F	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																				
1	N	1	f	2.413 2 GHz	-0.410 dBm																																																								
2	N	1	f	26.188 0 GHz	-40.891 dBm																																																								
3	N	1	f	4.792 0 GHz	-53.219 dBm																																																								
4	N	1	f	7.348 1 GHz	-52.603 dBm																																																								
5	N	1	f	9.594 2 GHz	-52.674 dBm																																																								
<p>802.11b/MCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>F</th> <th>dBm</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.436 1 GHz</td> <td>-0.603 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.638 3 GHz</td> <td>-41.045 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.886 4 GHz</td> <td>-53.526 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.462 8 GHz</td> <td>-52.500 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.561 9 GHz</td> <td>-53.674 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SOL	F	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.436 1 GHz	-0.603 dBm					2	N	1	f	24.638 3 GHz	-41.045 dBm					3	N	1	f	4.886 4 GHz	-53.526 dBm					4	N	1	f	7.462 8 GHz	-52.500 dBm					5	N	1	f	9.561 9 GHz	-53.674 dBm				
MFR	MODE	TRC	SOL	F	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																				
1	N	1	f	2.436 1 GHz	-0.603 dBm																																																								
2	N	1	f	24.638 3 GHz	-41.045 dBm																																																								
3	N	1	f	4.886 4 GHz	-53.526 dBm																																																								
4	N	1	f	7.462 8 GHz	-52.500 dBm																																																								
5	N	1	f	9.561 9 GHz	-53.674 dBm																																																								
<p>802.11b/HCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>F</th> <th>dBm</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.461 7 GHz</td> <td>-0.339 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.664 7 GHz</td> <td>-40.932 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>6.031 9 GHz</td> <td>-53.986 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.499 9 GHz</td> <td>-52.660 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.731 3 GHz</td> <td>-54.297 dBm</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SOL	F	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.461 7 GHz	-0.339 dBm					2	N	1	f	24.664 7 GHz	-40.932 dBm					3	N	1	f	6.031 9 GHz	-53.986 dBm					4	N	1	f	7.499 9 GHz	-52.660 dBm					5	N	1	f	9.731 3 GHz	-54.297 dBm				
MFR	MODE	TRC	SOL	F	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																				
1	N	1	f	2.461 7 GHz	-0.339 dBm																																																								
2	N	1	f	24.664 7 GHz	-40.932 dBm																																																								
3	N	1	f	6.031 9 GHz	-53.986 dBm																																																								
4	N	1	f	7.499 9 GHz	-52.660 dBm																																																								
5	N	1	f	9.731 3 GHz	-54.297 dBm																																																								

RF Conducted Spurious Emissions Graphs


802.11g/LCH

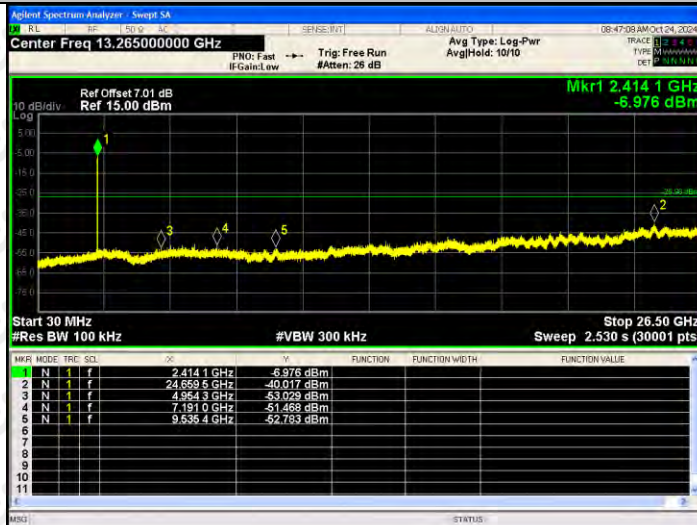

802.11g/MCH

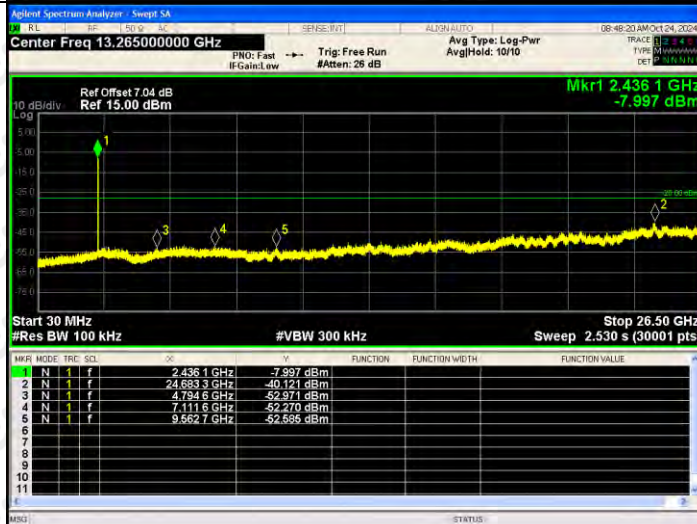


802.11g/HCH

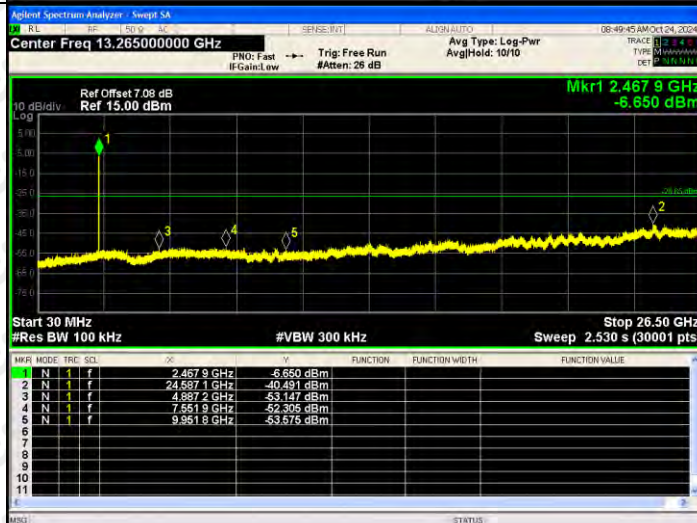


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

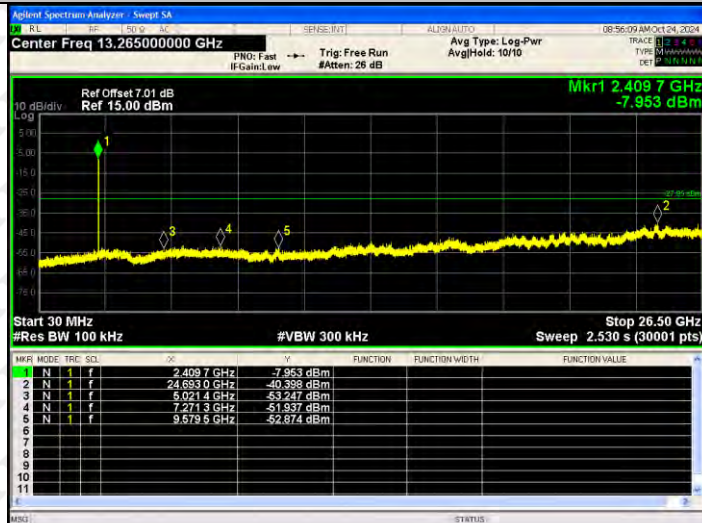

802.11 n(HT20)/MCH

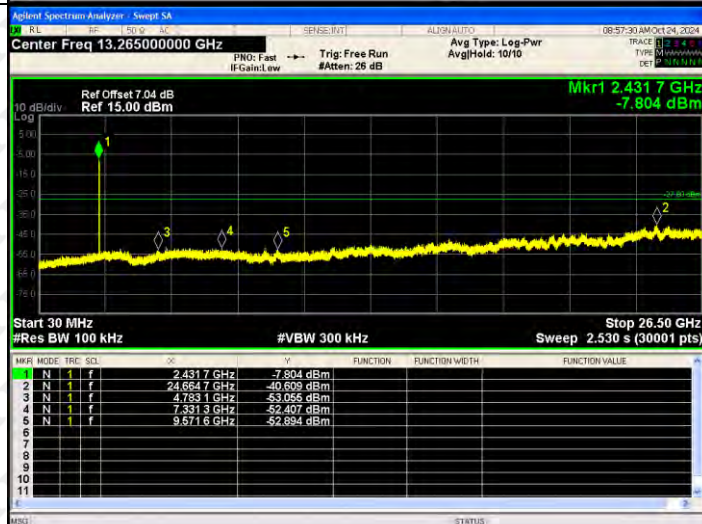

802.11 n(HT20)/HCH

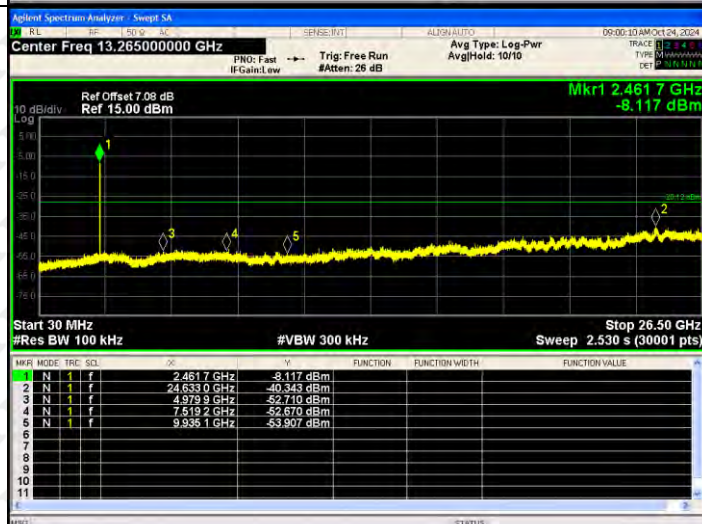


<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 7 dB Ref 15.00 dBm Mkr1 2.424 7 GHz -9.903 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRF</th> <th>SCD</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.424 7 GHz</td><td>-9.903 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.651 5 GHz</td><td>-40.046 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.956 7 GHz</td><td>-53.824 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.438 1 GHz</td><td>-51.571 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.616 1 GHz</td><td>-52.712 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRF	SCD	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.424 7 GHz	-9.903 dBm				2	N	1	f	24.651 5 GHz	-40.046 dBm				3	N	1	f	4.956 7 GHz	-53.824 dBm				4	N	1	f	7.438 1 GHz	-51.571 dBm				5	N	1	f	9.616 1 GHz	-52.712 dBm			
MKR	MODE	TRF	SCD	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.424 7 GHz	-9.903 dBm																																																		
2	N	1	f	24.651 5 GHz	-40.046 dBm																																																		
3	N	1	f	4.956 7 GHz	-53.824 dBm																																																		
4	N	1	f	7.438 1 GHz	-51.571 dBm																																																		
5	N	1	f	9.616 1 GHz	-52.712 dBm																																																		
<p>802.11 n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.431 7 GHz -10.608 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRF</th> <th>SCD</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.431 7 GHz</td><td>-10.608 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.039 7 GHz</td><td>-40.746 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.986 1 GHz</td><td>-52.922 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.139 3 GHz</td><td>-52.224 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.576 0 GHz</td><td>-53.116 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRF	SCD	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.431 7 GHz	-10.608 dBm				2	N	1	f	25.039 7 GHz	-40.746 dBm				3	N	1	f	4.986 1 GHz	-52.922 dBm				4	N	1	f	7.139 3 GHz	-52.224 dBm				5	N	1	f	9.576 0 GHz	-53.116 dBm			
MKR	MODE	TRF	SCD	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.431 7 GHz	-10.608 dBm																																																		
2	N	1	f	25.039 7 GHz	-40.746 dBm																																																		
3	N	1	f	4.986 1 GHz	-52.922 dBm																																																		
4	N	1	f	7.139 3 GHz	-52.224 dBm																																																		
5	N	1	f	9.576 0 GHz	-53.116 dBm																																																		
<p>802.11 n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.465 2 GHz -11.607 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRF</th> <th>SCD</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.465 2 GHz</td><td>-11.607 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.667 7 GHz</td><td>-40.281 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.796 4 GHz</td><td>-52.620 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.241 3 GHz</td><td>-52.324 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.979 2 GHz</td><td>-54.310 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRF	SCD	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.465 2 GHz	-11.607 dBm				2	N	1	f	24.667 7 GHz	-40.281 dBm				3	N	1	f	4.796 4 GHz	-52.620 dBm				4	N	1	f	7.241 3 GHz	-52.324 dBm				5	N	1	f	9.979 2 GHz	-54.310 dBm			
MKR	MODE	TRF	SCD	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.465 2 GHz	-11.607 dBm																																																		
2	N	1	f	24.667 7 GHz	-40.281 dBm																																																		
3	N	1	f	4.796 4 GHz	-52.620 dBm																																																		
4	N	1	f	7.241 3 GHz	-52.324 dBm																																																		
5	N	1	f	9.979 2 GHz	-54.310 dBm																																																		


ANT2:

BAND EDGE Graphs

802.11b/LCH

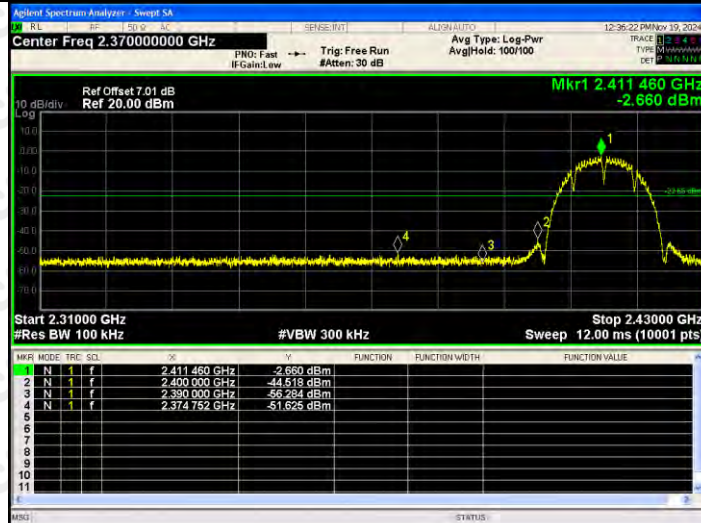


802.11b/HCH

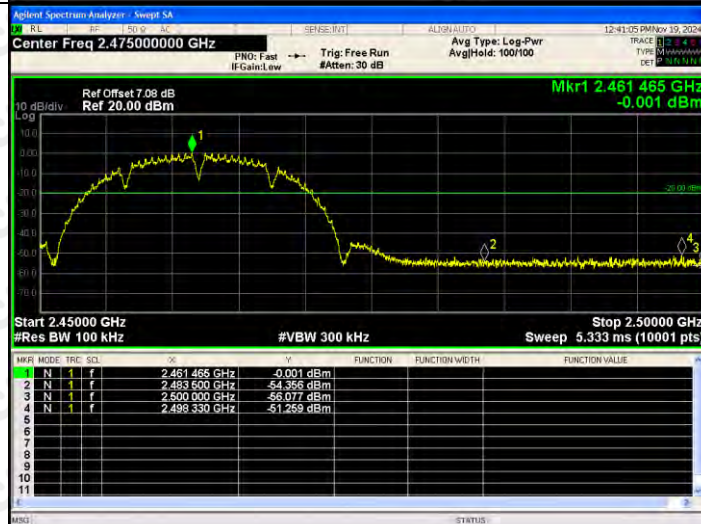


BAND EDGE Graphs


802.11g/LCH

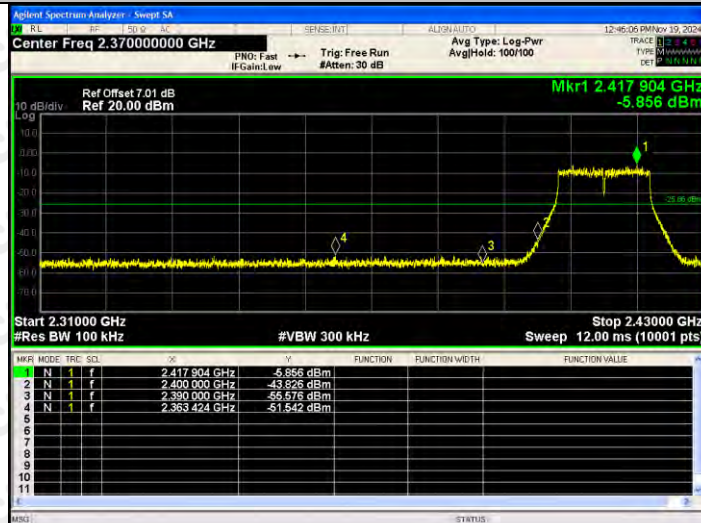

802.11g/HCH

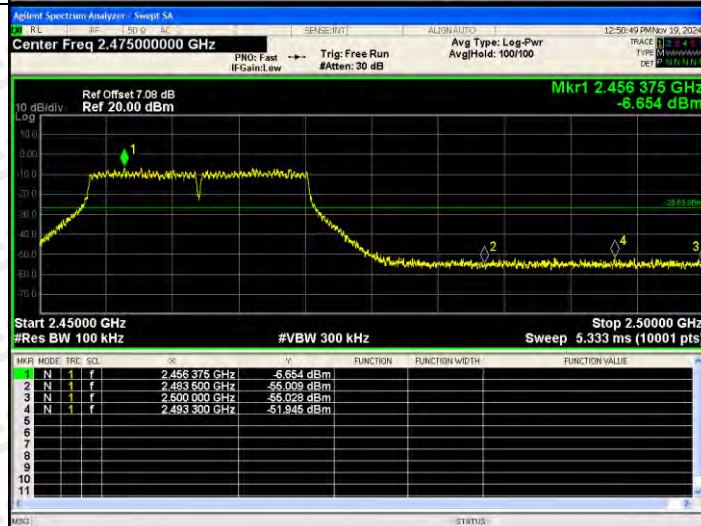




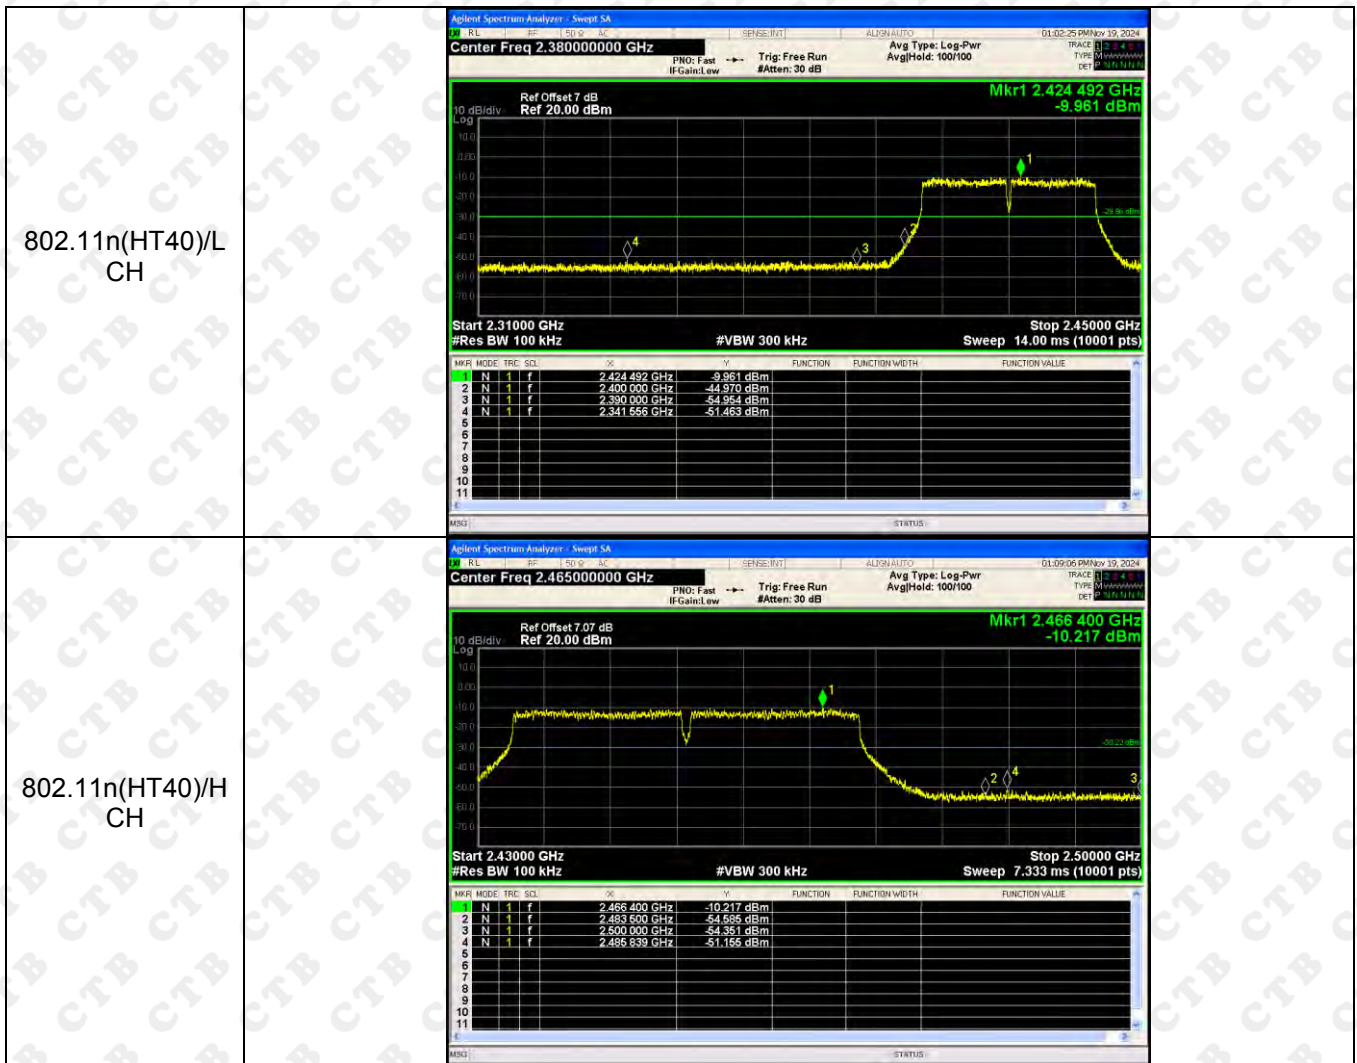


RF Conducted Spurious Emissions Graphs


802.11b/LCH

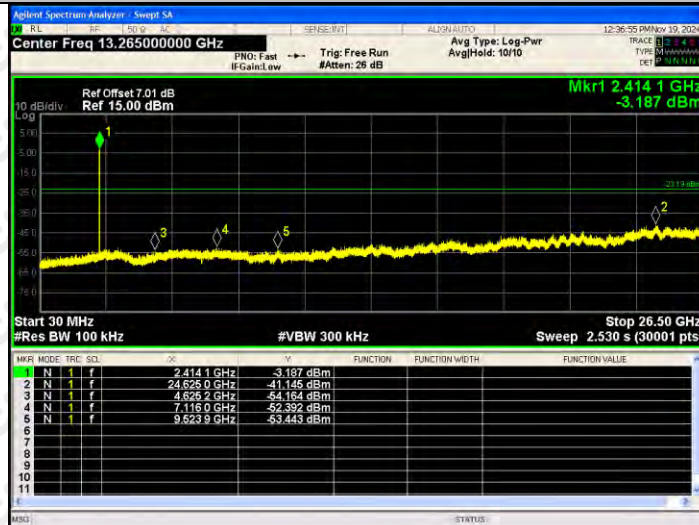

802.11b/MCH

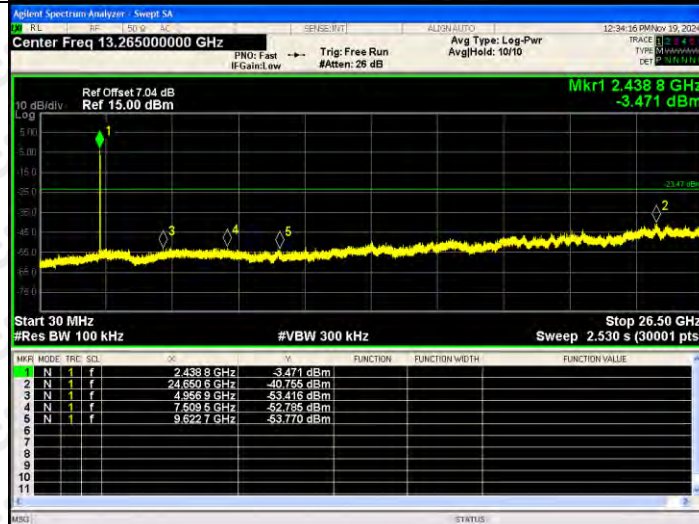

802.11b/HCH

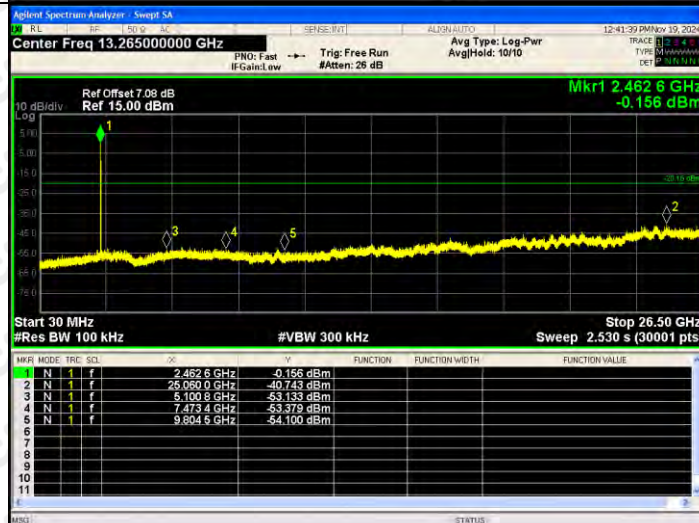


RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

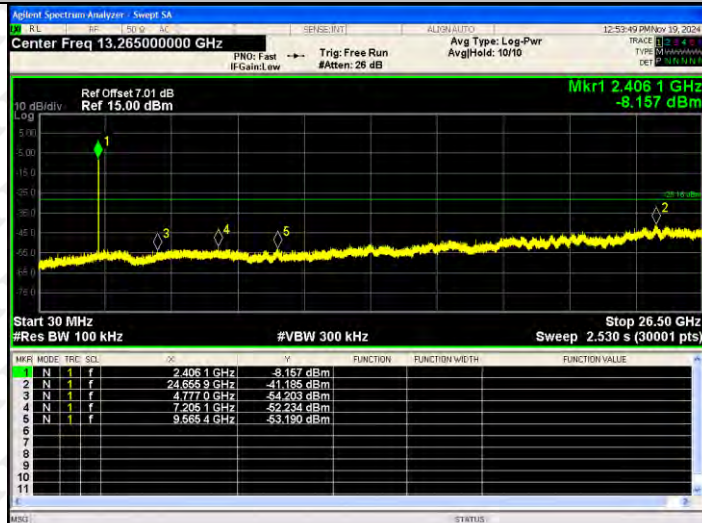

802.11 n(HT20)/MCH

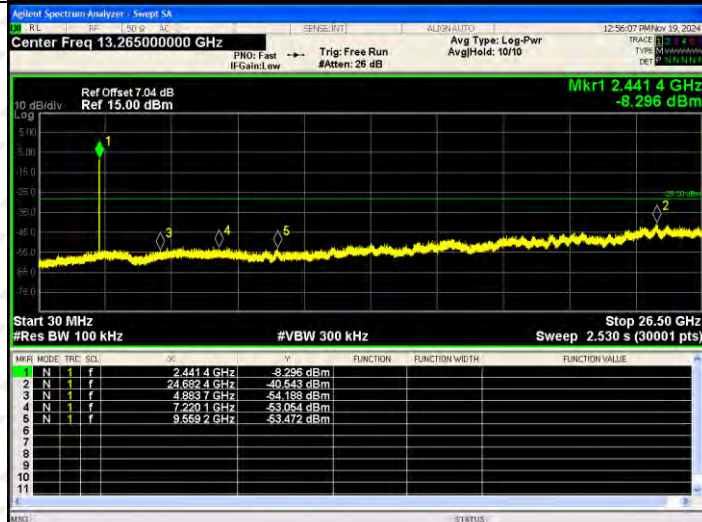

802.11 n(HT20)/HCH

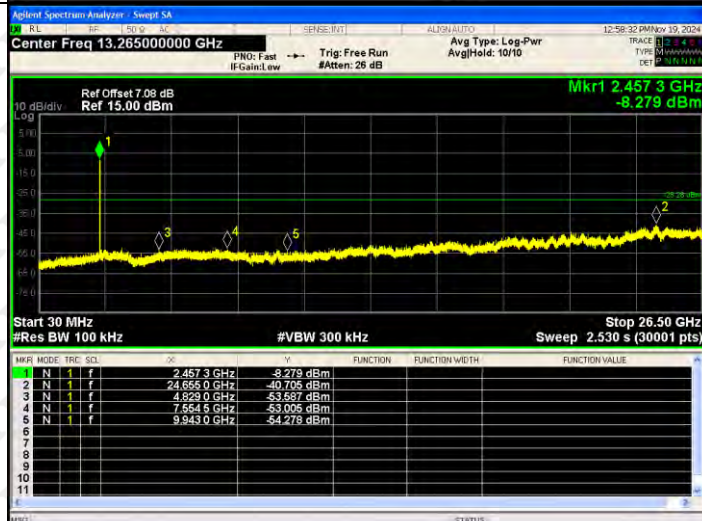


<p>802.11n(HT40)/LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SCD</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>2.4247 GHz</td><td>f</td><td>-10.192 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>24.6524 GHz</td><td>f</td><td>-41.002 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>4.9024 GHz</td><td>f</td><td>-53.833 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>7.1583 GHz</td><td>f</td><td>-52.585 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>9.5567 GHz</td><td>f</td><td>-52.510 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4247 GHz	f	-10.192 dBm				2	N	24.6524 GHz	f	-41.002 dBm				3	N	4.9024 GHz	f	-53.833 dBm				4	N	7.1583 GHz	f	-52.585 dBm				5	N	9.5567 GHz	f	-52.510 dBm			
MNR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	2.4247 GHz	f	-10.192 dBm																																													
2	N	24.6524 GHz	f	-41.002 dBm																																													
3	N	4.9024 GHz	f	-53.833 dBm																																													
4	N	7.1583 GHz	f	-52.585 dBm																																													
5	N	9.5567 GHz	f	-52.510 dBm																																													
<p>802.11 n(HT40)/MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SCD</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>2.4352 GHz</td><td>f</td><td>-11.039 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>25.0724 GHz</td><td>f</td><td>-40.493 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>5.0214 GHz</td><td>f</td><td>-53.608 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>7.4572 GHz</td><td>f</td><td>-53.385 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>9.5530 GHz</td><td>f</td><td>-53.191 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4352 GHz	f	-11.039 dBm				2	N	25.0724 GHz	f	-40.493 dBm				3	N	5.0214 GHz	f	-53.608 dBm				4	N	7.4572 GHz	f	-53.385 dBm				5	N	9.5530 GHz	f	-53.191 dBm			
MNR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	2.4352 GHz	f	-11.039 dBm																																													
2	N	25.0724 GHz	f	-40.493 dBm																																													
3	N	5.0214 GHz	f	-53.608 dBm																																													
4	N	7.4572 GHz	f	-53.385 dBm																																													
5	N	9.5530 GHz	f	-53.191 dBm																																													
<p>802.11 n(HT40)/HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SCD</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>2.4423 GHz</td><td>f</td><td>-11.152 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>25.0812 GHz</td><td>f</td><td>-40.627 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>4.7725 GHz</td><td>f</td><td>-53.686 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>7.3084 GHz</td><td>f</td><td>-52.535 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>9.9042 GHz</td><td>f</td><td>-54.506 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4423 GHz	f	-11.152 dBm				2	N	25.0812 GHz	f	-40.627 dBm				3	N	4.7725 GHz	f	-53.686 dBm				4	N	7.3084 GHz	f	-52.535 dBm				5	N	9.9042 GHz	f	-54.506 dBm			
MNR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	2.4423 GHz	f	-11.152 dBm																																													
2	N	25.0812 GHz	f	-40.627 dBm																																													
3	N	4.7725 GHz	f	-53.686 dBm																																													
4	N	7.3084 GHz	f	-52.535 dBm																																													
5	N	9.9042 GHz	f	-54.506 dBm																																													

ANT3:

BAND EDGE Graphs

802.11b/LCH

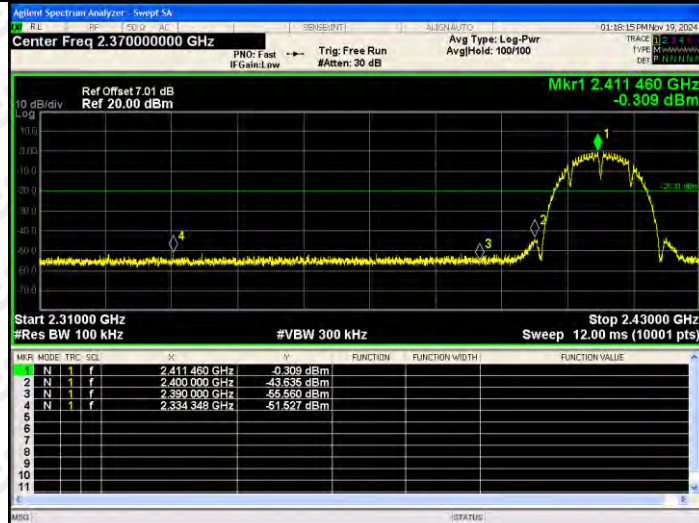


802.11b/HCH





BAND EDGE Graphs

802.11g/LCH

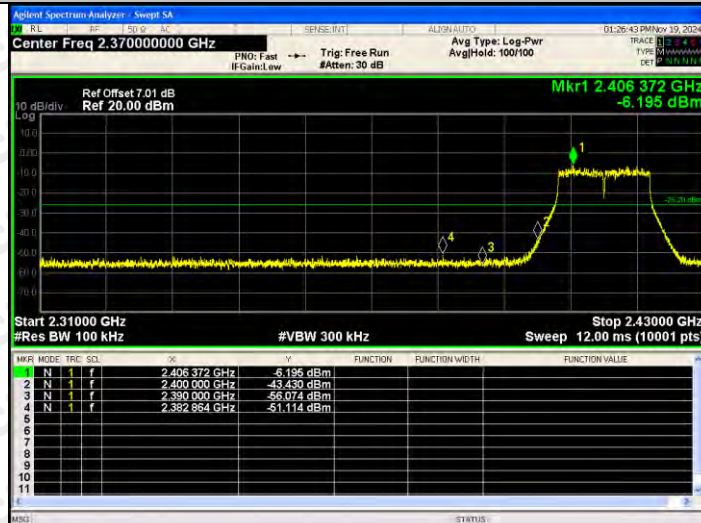


802.11g/HCH

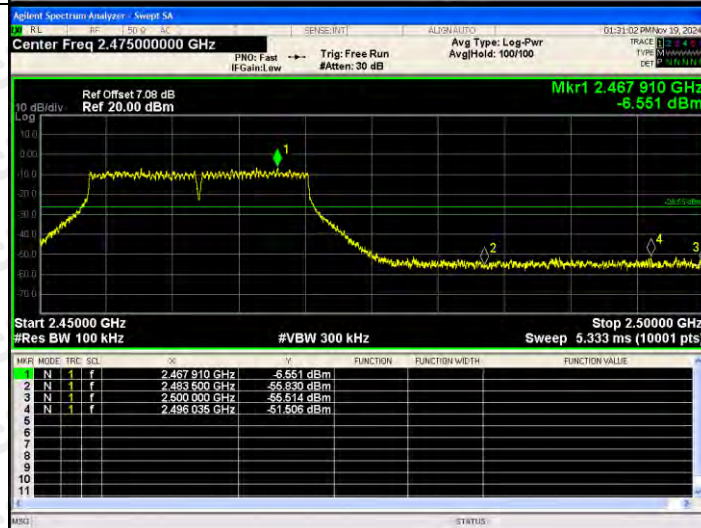

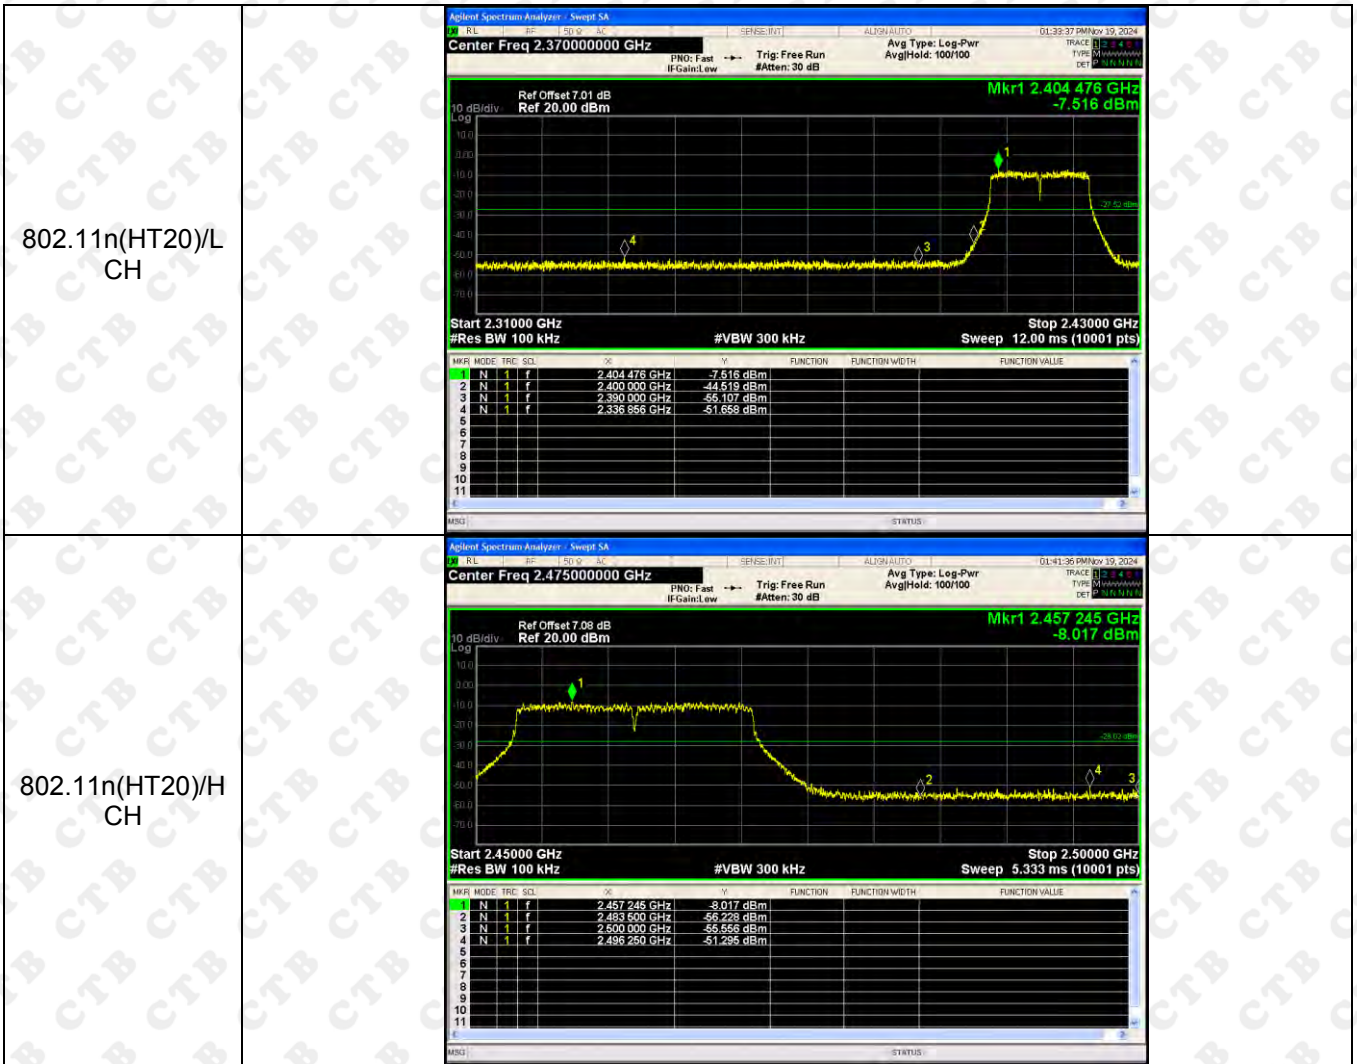




RF Conducted Spurious Emissions Graphs

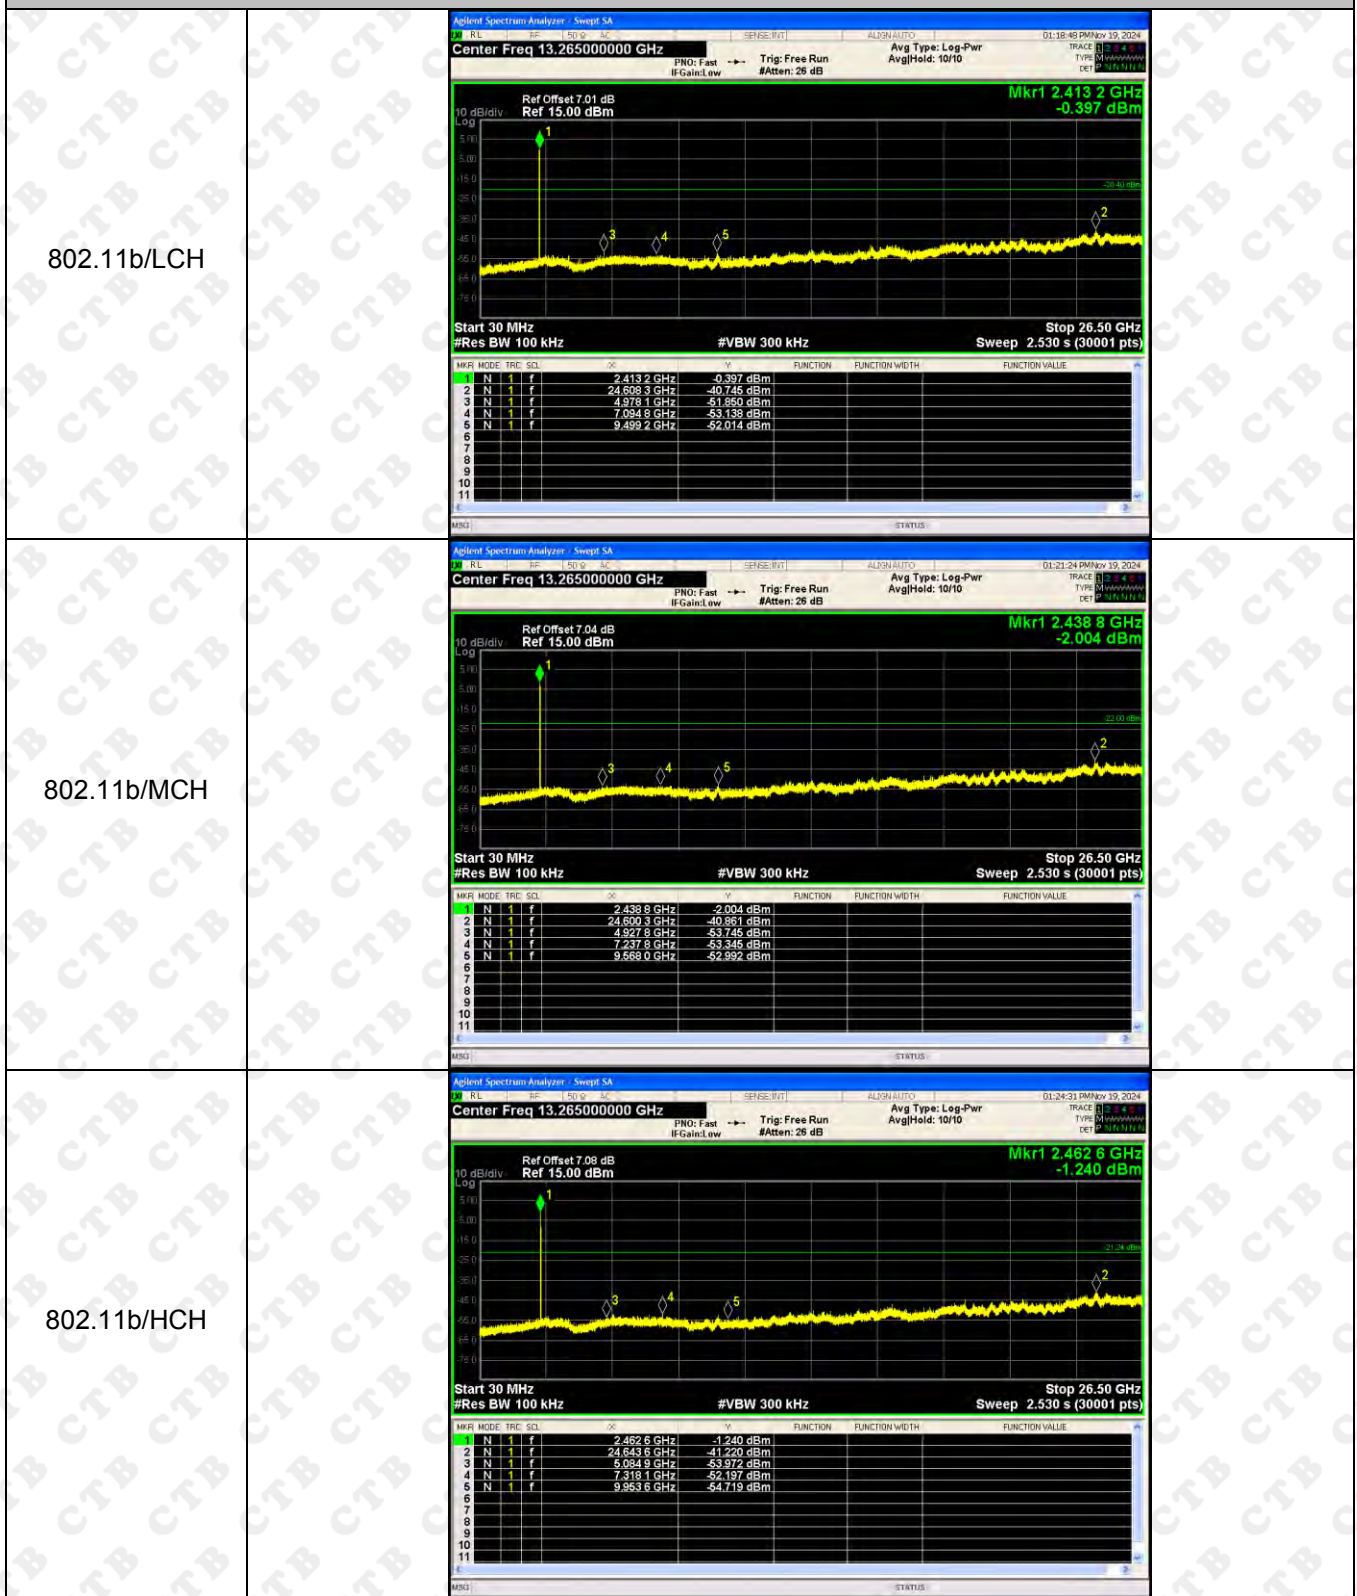


RF Conducted Spurious Emissions Graphs


802.11g/LCH

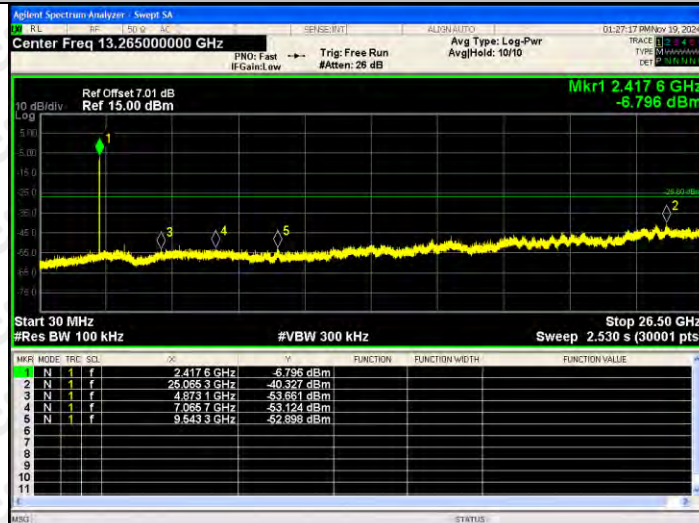

802.11g/MCH

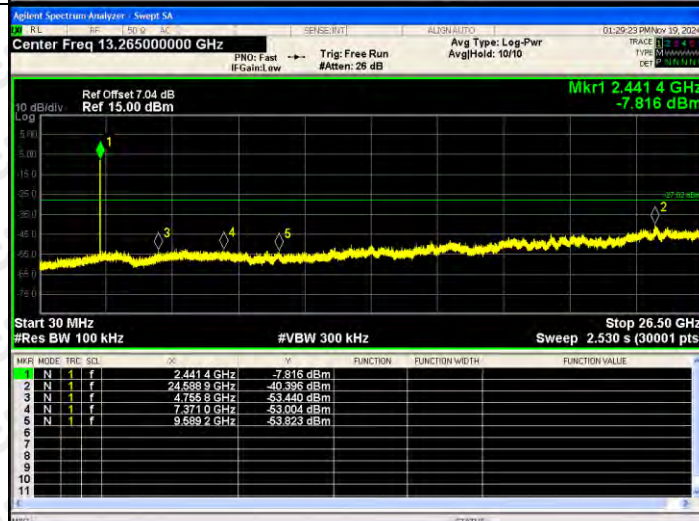


802.11g/HCH

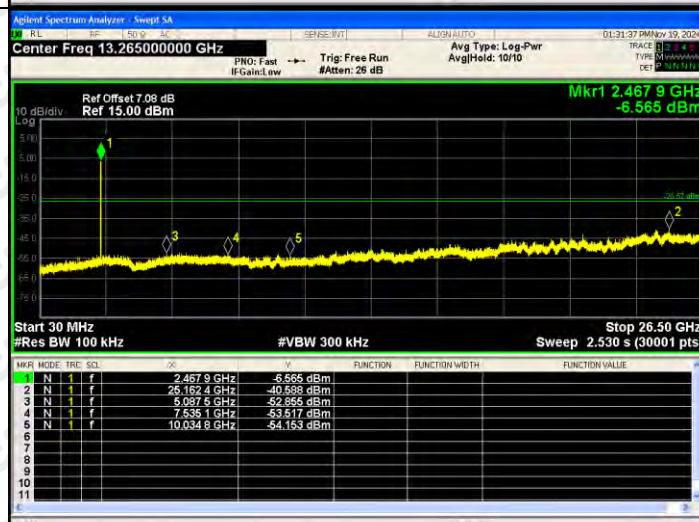


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH



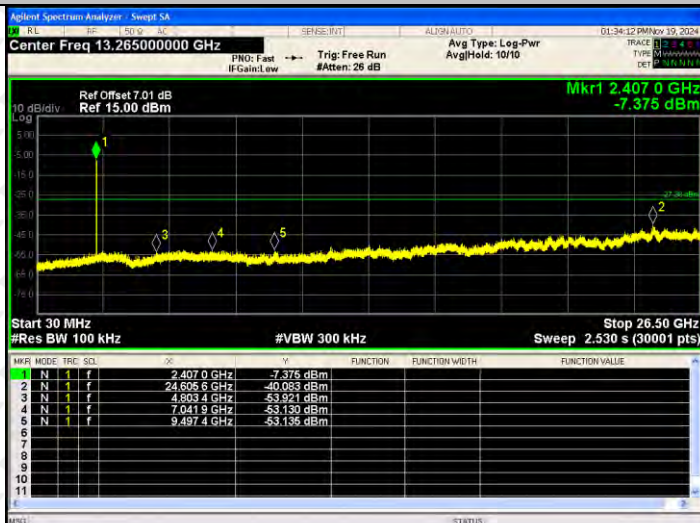


802.11 n(HT20)/MCH

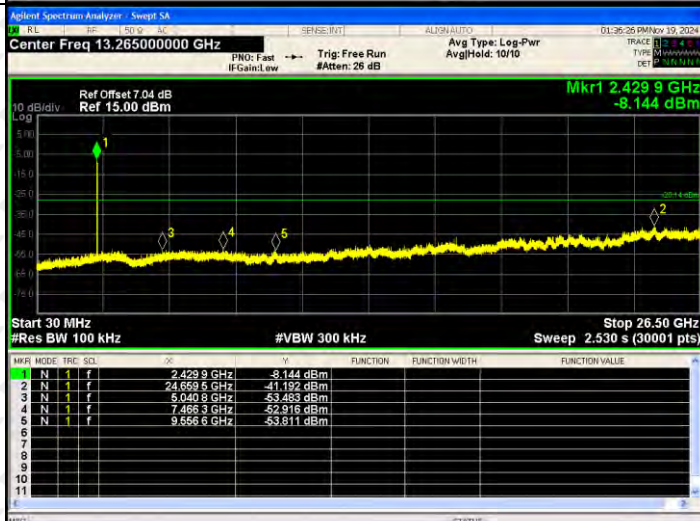

802.11 n(HT20)/HCH

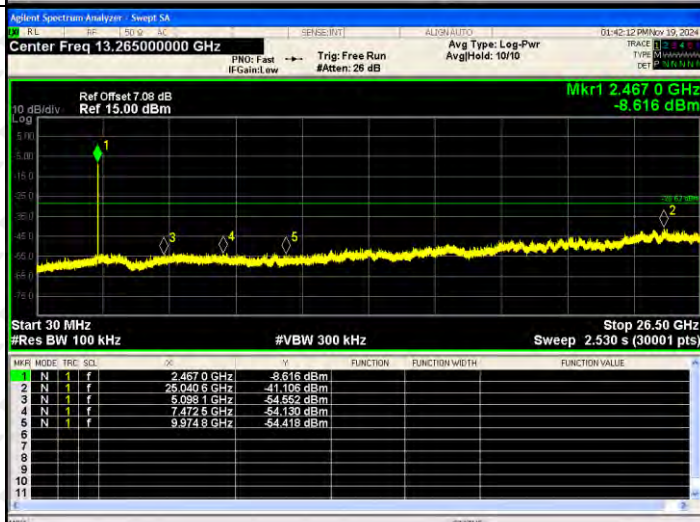

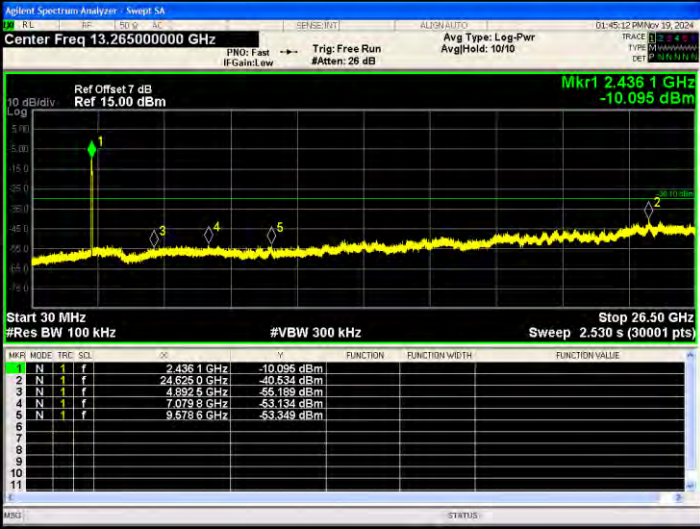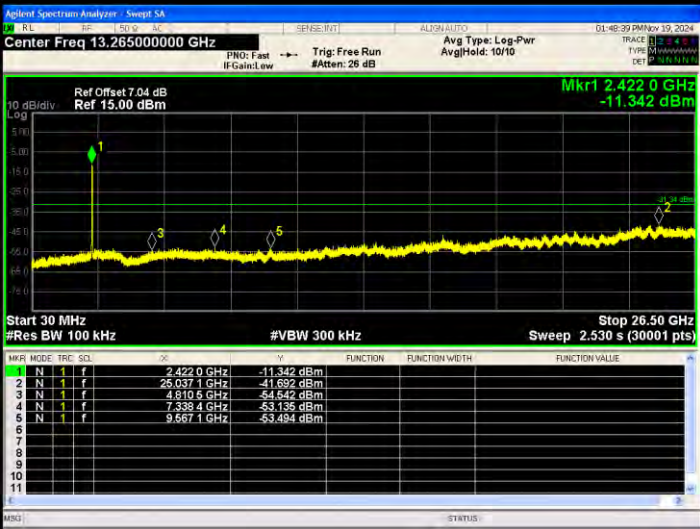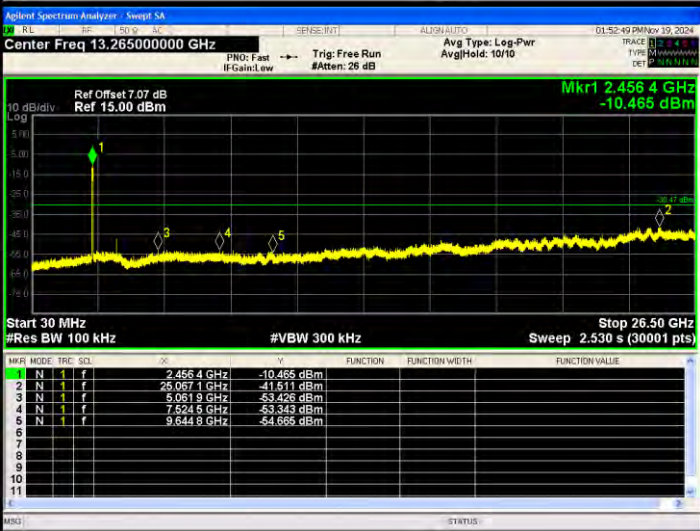
<p>802.11n(HT40)/LCH</p>	 <table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>FREQ</th> <th>SCD</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.4361 GHz</td> <td>f</td> <td></td> <td>-10.095 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.6250 GHz</td> <td>f</td> <td></td> <td>-40.534 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.8925 GHz</td> <td>f</td> <td></td> <td>-53.169 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.0798 GHz</td> <td>f</td> <td></td> <td>-53.134 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.5786 GHz</td> <td>f</td> <td></td> <td>-53.349 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	FREQ	SCD	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4361 GHz	f		-10.095 dBm				2	N	24.6250 GHz	f		-40.534 dBm				3	N	4.8925 GHz	f		-53.169 dBm				4	N	7.0798 GHz	f		-53.134 dBm				5	N	9.5786 GHz	f		-53.349 dBm			
MkR	MODE	FREQ	SCD	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	2.4361 GHz	f		-10.095 dBm																																																		
2	N	24.6250 GHz	f		-40.534 dBm																																																		
3	N	4.8925 GHz	f		-53.169 dBm																																																		
4	N	7.0798 GHz	f		-53.134 dBm																																																		
5	N	9.5786 GHz	f		-53.349 dBm																																																		
<p>802.11 n(HT40)/MCH</p>	 <table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>FREQ</th> <th>SCD</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.4220 GHz</td> <td>f</td> <td></td> <td>-11.342 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>25.0371 GHz</td> <td>f</td> <td></td> <td>-41.692 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.8110 GHz</td> <td>f</td> <td></td> <td>-54.642 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.3334 GHz</td> <td>f</td> <td></td> <td>-53.136 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.5571 GHz</td> <td>f</td> <td></td> <td>-53.494 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	FREQ	SCD	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4220 GHz	f		-11.342 dBm				2	N	25.0371 GHz	f		-41.692 dBm				3	N	4.8110 GHz	f		-54.642 dBm				4	N	7.3334 GHz	f		-53.136 dBm				5	N	9.5571 GHz	f		-53.494 dBm			
MkR	MODE	FREQ	SCD	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	2.4220 GHz	f		-11.342 dBm																																																		
2	N	25.0371 GHz	f		-41.692 dBm																																																		
3	N	4.8110 GHz	f		-54.642 dBm																																																		
4	N	7.3334 GHz	f		-53.136 dBm																																																		
5	N	9.5571 GHz	f		-53.494 dBm																																																		
<p>802.11 n(HT40)/HCH</p>	 <table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>FREQ</th> <th>SCD</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.4564 GHz</td> <td>f</td> <td></td> <td>-10.465 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>25.0671 GHz</td> <td>f</td> <td></td> <td>-41.511 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>5.0519 GHz</td> <td>f</td> <td></td> <td>-53.426 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.5245 GHz</td> <td>f</td> <td></td> <td>-53.343 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.6448 GHz</td> <td>f</td> <td></td> <td>-54.665 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	FREQ	SCD	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4564 GHz	f		-10.465 dBm				2	N	25.0671 GHz	f		-41.511 dBm				3	N	5.0519 GHz	f		-53.426 dBm				4	N	7.5245 GHz	f		-53.343 dBm				5	N	9.6448 GHz	f		-54.665 dBm			
MkR	MODE	FREQ	SCD	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	2.4564 GHz	f		-10.465 dBm																																																		
2	N	25.0671 GHz	f		-41.511 dBm																																																		
3	N	5.0519 GHz	f		-53.426 dBm																																																		
4	N	7.5245 GHz	f		-53.343 dBm																																																		
5	N	9.6448 GHz	f		-54.665 dBm																																																		


ANT4:

BAND EDGE Graphs

802.11b/LCH

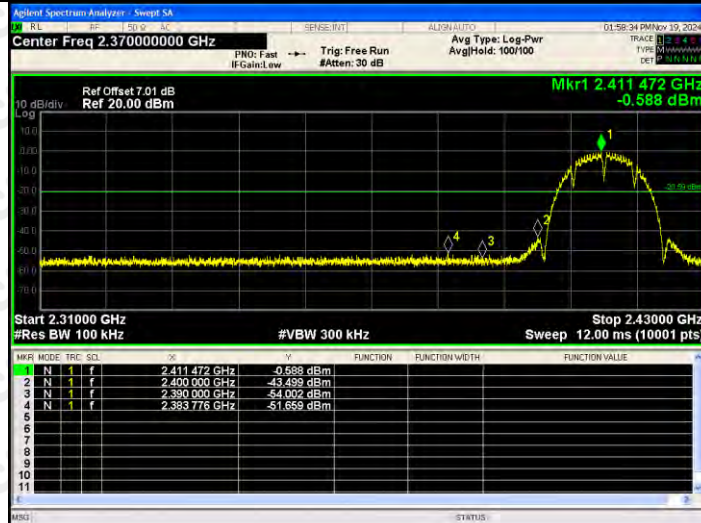


802.11b/HCH

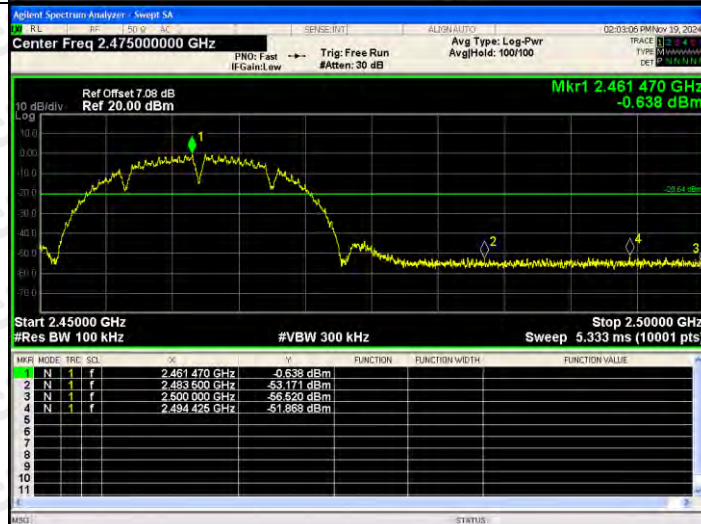



BAND EDGE Graphs

802.11g/LCH

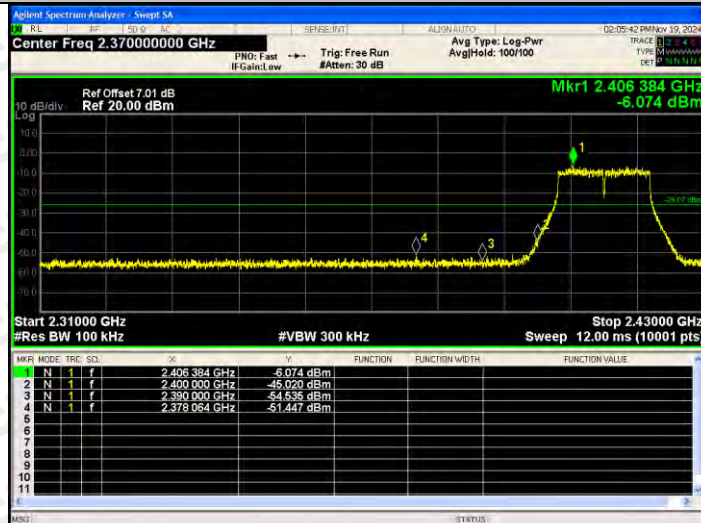

802.11g/HCH

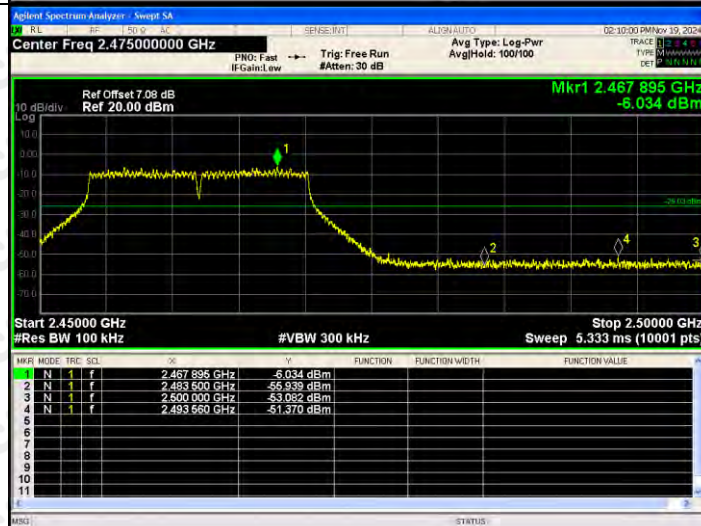


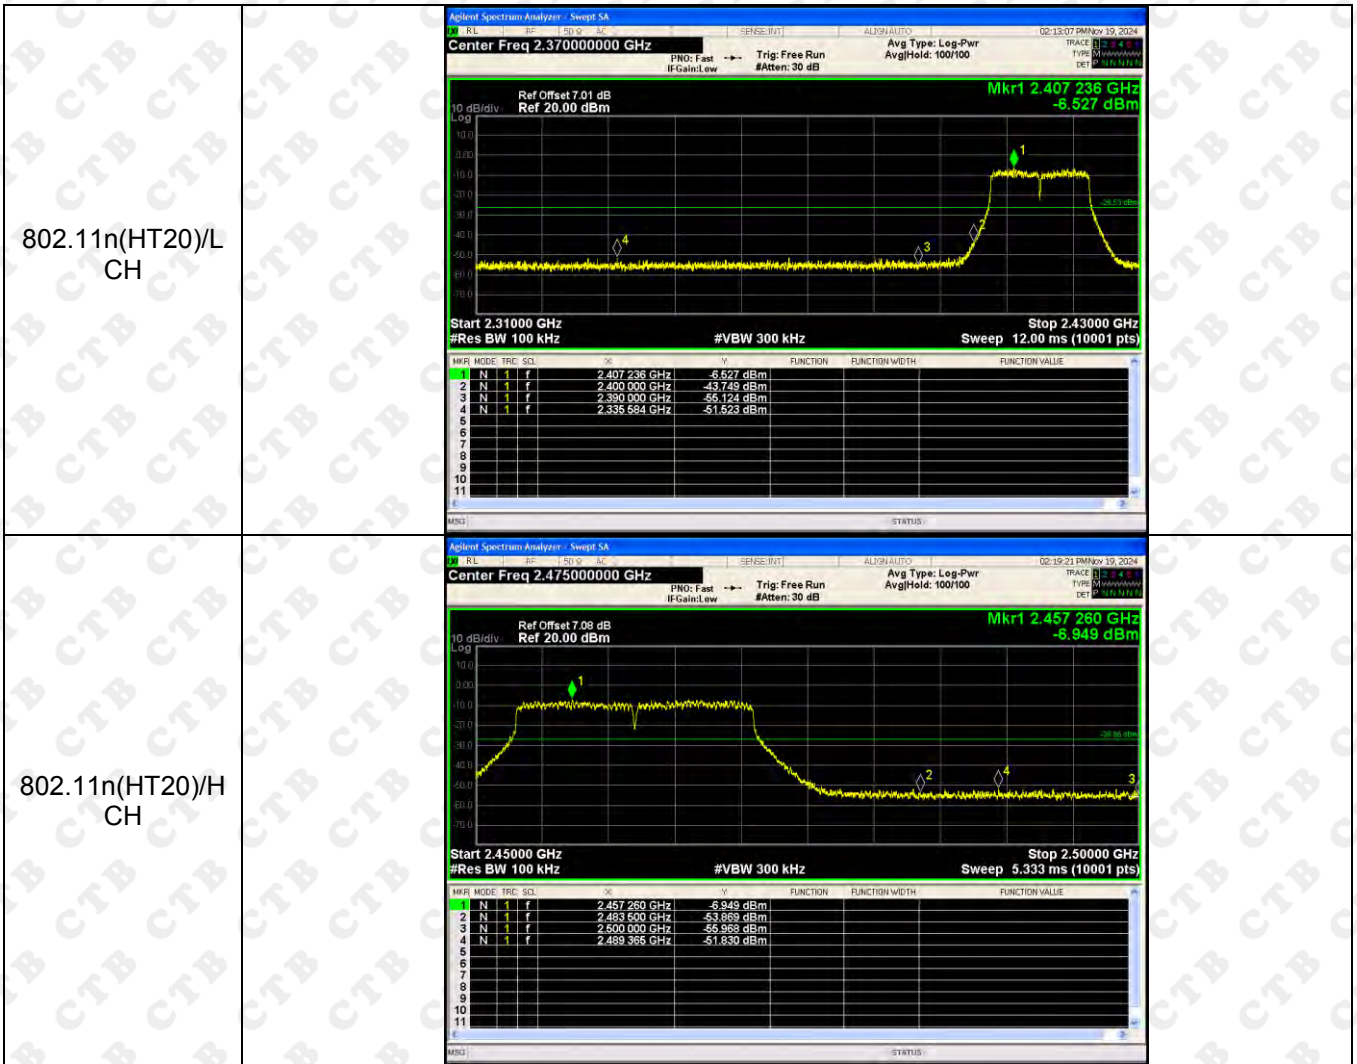




RF Conducted Spurious Emissions Graphs


802.11b/LCH

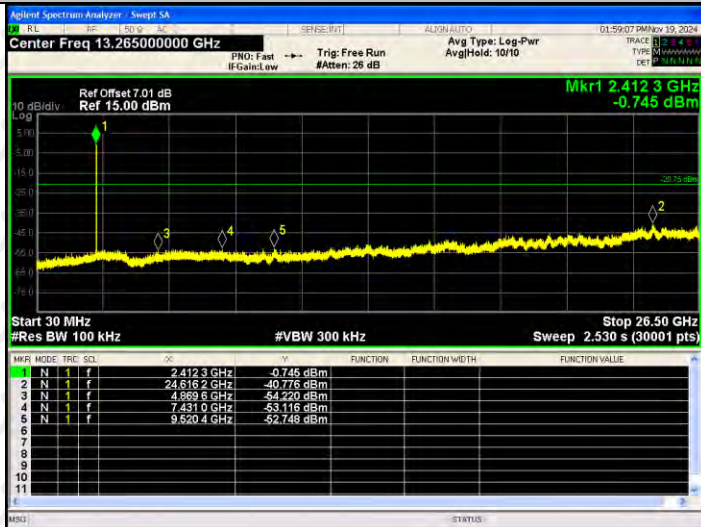

802.11b/MCH

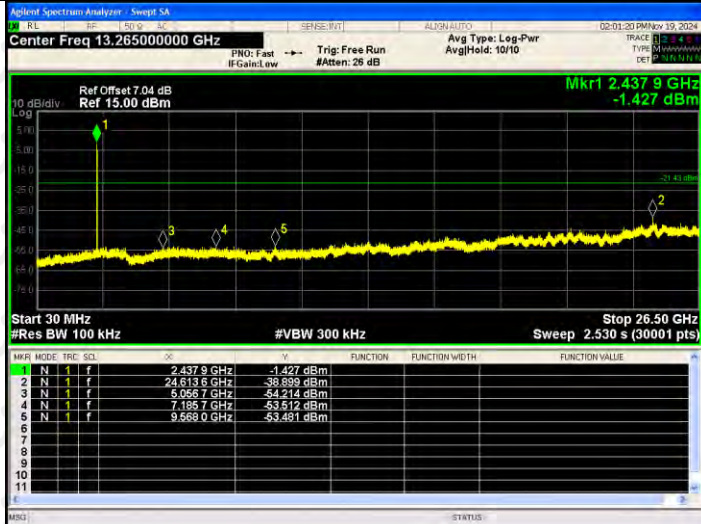


802.11b/HCH

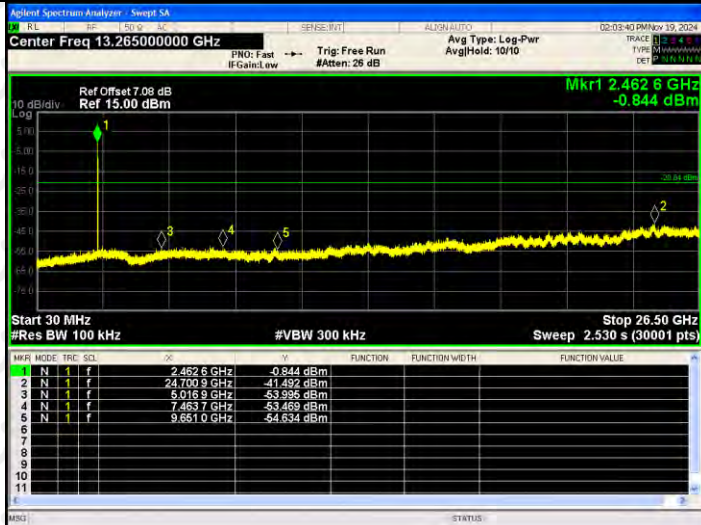


RF Conducted Spurious Emissions Graphs


802.11g/LCH

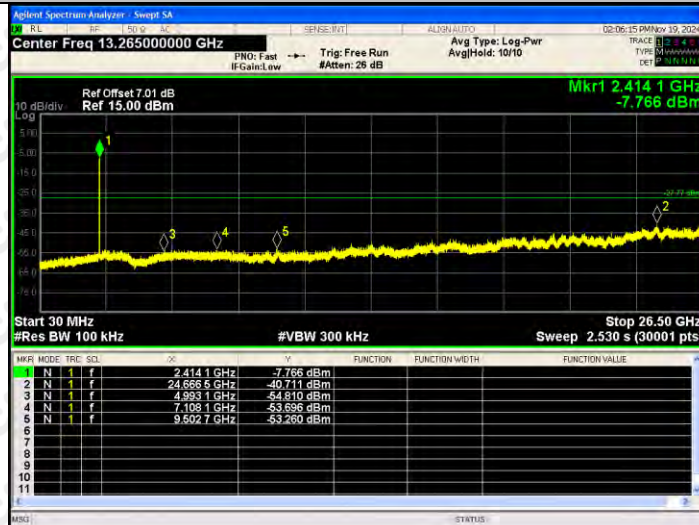

802.11g/MCH

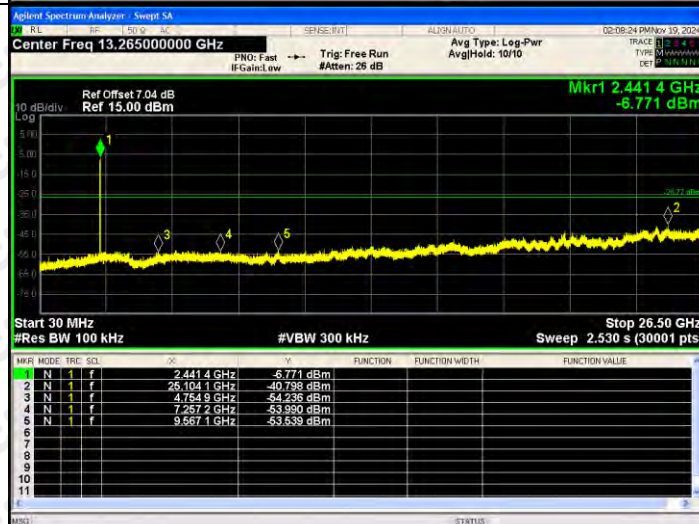


802.11g/HCH

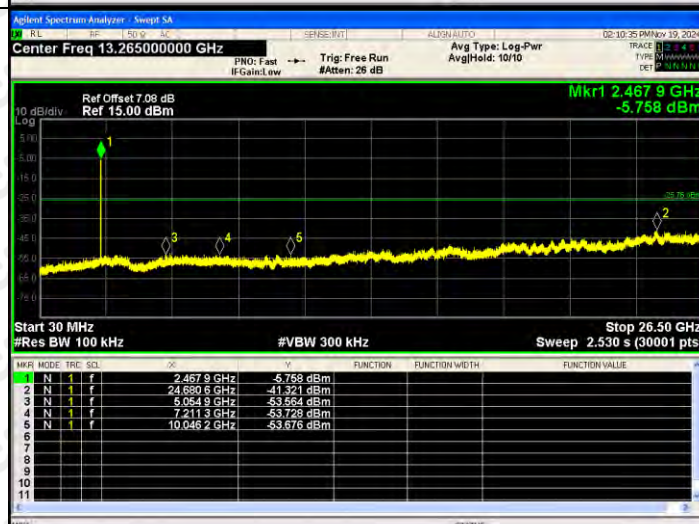


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

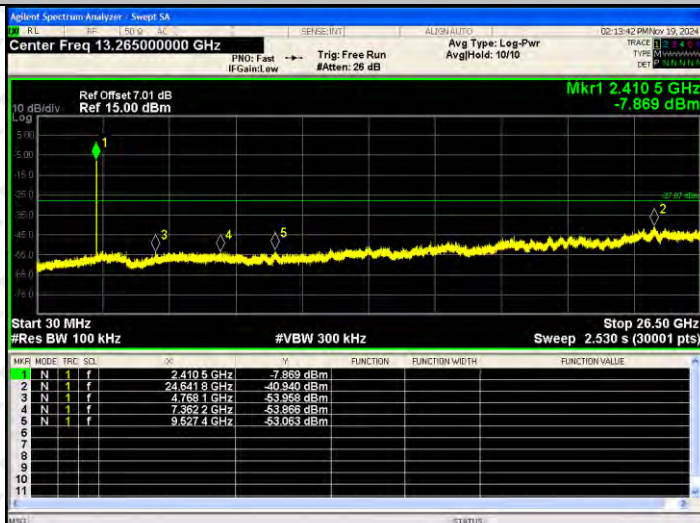

802.11 n(HT20)/MCH

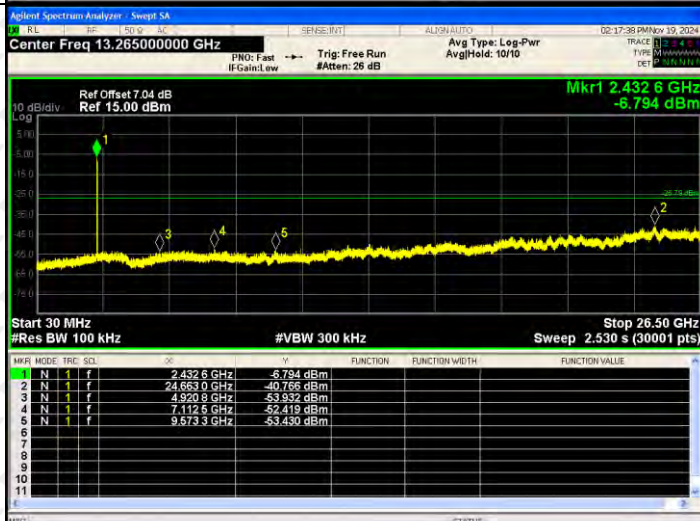

802.11 n(HT20)/HCH

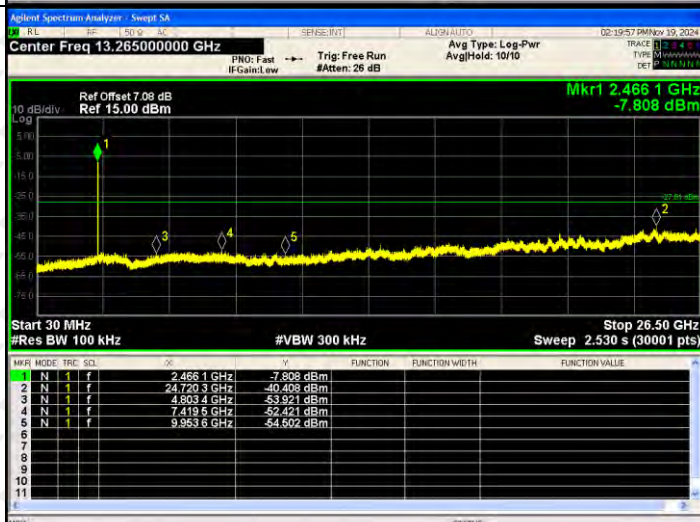

<p>802.11n(HT40)/LCH</p>	<table border="1"> <thead> <tr> <th>MWR</th> <th>MODE</th> <th>FREQ</th> <th>SCD</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>2.424 7 GHz</td><td></td><td>-10.117 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>24.633 9 GHz</td><td></td><td>-41.019 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>4.730 2 GHz</td><td></td><td>-53.459 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>7.116 9 GHz</td><td></td><td>-52.281 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>9.568 3 GHz</td><td></td><td>-52.771 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MWR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.424 7 GHz		-10.117 dBm				2	N	24.633 9 GHz		-41.019 dBm				3	N	4.730 2 GHz		-53.459 dBm				4	N	7.116 9 GHz		-52.281 dBm				5	N	9.568 3 GHz		-52.771 dBm			
MWR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	2.424 7 GHz		-10.117 dBm																																													
2	N	24.633 9 GHz		-41.019 dBm																																													
3	N	4.730 2 GHz		-53.459 dBm																																													
4	N	7.116 9 GHz		-52.281 dBm																																													
5	N	9.568 3 GHz		-52.771 dBm																																													
<p>802.11 n(HT40)/MCH</p>	<table border="1"> <thead> <tr> <th>MWR</th> <th>MODE</th> <th>FREQ</th> <th>SCD</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>2.439 7 GHz</td><td></td><td>-10.468 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>24.656 9 GHz</td><td></td><td>-41.215 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>4.984 3 GHz</td><td></td><td>-54.036 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>7.157 2 GHz</td><td></td><td>-51.286 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>9.629 8 GHz</td><td></td><td>-53.421 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MWR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.439 7 GHz		-10.468 dBm				2	N	24.656 9 GHz		-41.215 dBm				3	N	4.984 3 GHz		-54.036 dBm				4	N	7.157 2 GHz		-51.286 dBm				5	N	9.629 8 GHz		-53.421 dBm			
MWR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	2.439 7 GHz		-10.468 dBm																																													
2	N	24.656 9 GHz		-41.215 dBm																																													
3	N	4.984 3 GHz		-54.036 dBm																																													
4	N	7.157 2 GHz		-51.286 dBm																																													
5	N	9.629 8 GHz		-53.421 dBm																																													
<p>802.11 n(HT40)/HCH</p>	<table border="1"> <thead> <tr> <th>MWR</th> <th>MODE</th> <th>FREQ</th> <th>SCD</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>2.467 0 GHz</td><td></td><td>-10.650 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>24.663 9 GHz</td><td></td><td>-40.738 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>5.081 4 GHz</td><td></td><td>-53.094 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>7.447 3 GHz</td><td></td><td>-52.684 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>9.626 3 GHz</td><td></td><td>-54.490 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MWR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.467 0 GHz		-10.650 dBm				2	N	24.663 9 GHz		-40.738 dBm				3	N	5.081 4 GHz		-53.094 dBm				4	N	7.447 3 GHz		-52.684 dBm				5	N	9.626 3 GHz		-54.490 dBm			
MWR	MODE	FREQ	SCD	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	2.467 0 GHz		-10.650 dBm																																													
2	N	24.663 9 GHz		-40.738 dBm																																													
3	N	5.081 4 GHz		-53.094 dBm																																													
4	N	7.447 3 GHz		-52.684 dBm																																													
5	N	9.626 3 GHz		-54.490 dBm																																													

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ANT1	Maximum Peak Power [dBm] ANT2	Maximum Peak Power [dBm] ANT3	Maximum Peak Power [dBm] ANT4	Limit[dBm]
802.11b	LCH	13.187	13.466	12.980	12.708	30
	MCH	13.319	12.851	12.486	12.405	30
	HCH	12.983	13.422	12.408	12.738	30
802.11g	LCH	13.849	13.747	13.467	13.599	30
	MCH	13.655	13.405	13.241	13.606	30
	HCH	14.049	13.475	13.360	13.615	30
802.11n(HT20)	LCH	13.226	13.608	13.446	13.696	30
	MCH	12.767	13.138	13.035	13.359	30
	HCH	13.464	13.060	12.549	13.570	30
802.11n(HT40)	LCH	13.638	13.847	13.588	13.846	30
	MCH	13.705	13.385	12.928	13.630	30
	HCH	13.388	13.264	13.415	13.577	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

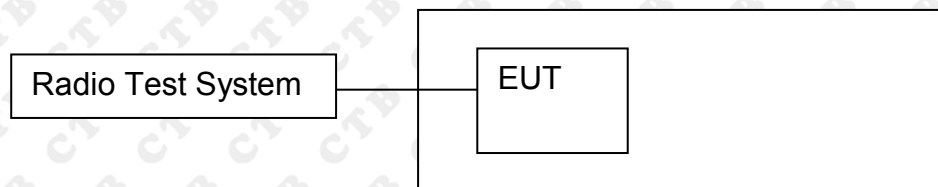

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.102	500	PASS
	MCH	10.104	500	PASS
	HCH	10.125	500	PASS
802.11g	LCH	16.480	500	PASS
	MCH	16.509	500	PASS
	HCH	16.500	500	PASS
802.11n(HT20)	LCH	17.775	500	PASS
	MCH	17.733	500	PASS
	HCH	17.778	500	PASS
802.11n(HT40)	LCH	36.470	500	PASS
	MCH	36.478	500	PASS
	HCH	36.474	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.106	500	PASS
	MCH	10.129	500	PASS
	HCH	10.124	500	PASS
802.11g	LCH	16.536	500	PASS
	MCH	16.538	500	PASS
	HCH	16.507	500	PASS
802.11n(HT20)	LCH	17.783	500	PASS
	MCH	17.760	500	PASS
	HCH	17.780	500	PASS
802.11n(HT40)	LCH	36.486	500	PASS
	MCH	36.509	500	PASS
	HCH	36.488	500	PASS

ANT3:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.132	500	PASS
	MCH	10.114	500	PASS
	HCH	10.120	500	PASS
802.11g	LCH	16.492	500	PASS
	MCH	16.523	500	PASS
	HCH	16.517	500	PASS
802.11n(HT20)	LCH	17.762	500	PASS
	MCH	17.748	500	PASS
	HCH	17.783	500	PASS
802.11n(HT40)	LCH	36.494	500	PASS
	MCH	36.511	500	PASS
	HCH	36.467	500	PASS

ANT4:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.111	500	PASS
	MCH	10.127	500	PASS
	HCH	10.136	500	PASS
802.11g	LCH	16.527	500	PASS
	MCH	16.552	500	PASS
	HCH	16.519	500	PASS
802.11n(HT20)	LCH	17.795	500	PASS
	MCH	17.770	500	PASS
	HCH	17.772	500	PASS
802.11n(HT40)	LCH	36.483	500	PASS
	MCH	36.446	500	PASS
	HCH	36.472	500	PASS

ANT1:
Test Graph:



<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.01 dB</p> <p>Ref: 27.01 dBm</p> <p>Mkr3 2.42021 GHz</p> <p>-10.958 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.0 dBm</td> </tr> <tr> <td colspan="3">16.443 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	13.0 dBm	16.443 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	13.0 dBm											
16.443 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.04 dB</p> <p>Ref: 27.04 dBm</p> <p>Mkr3 2.445205 GHz</p> <p>-12.589 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">16.457 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.5 dBm	16.457 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.5 dBm											
16.457 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.08 dB</p> <p>Ref: 27.08 dBm</p> <p>Mkr3 2.470227 GHz</p> <p>-10.436 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.0 dBm</td> </tr> <tr> <td colspan="3">16.442 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	13.0 dBm	16.442 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	13.0 dBm											
16.442 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											