



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 90 AND IC RSS-119, RSS-GEN TEST REPORT

APPLICANT	MOTOROLA SOLUTIONS, INC.
	1301 EAST ALGONQUIN RD. SCHAUMBURG IL 60196 USA
FCC ID	ABZ99FT3085
IC CERTIFICATION	109AB-99FT3085
MODEL NUMBER	AAH56JDN9KA1AN
PRODUCT DESCRIPTION	VHF PORTABLE RADIO
DATE SAMPLE RECEIVED	7/28/2011
DATE TESTED	8/1/2011
TESTED BY	Nam Nguyen
APPROVED BY	Mario de Aranzeta
TIMCO REPORT NO.	1690CT11TestReport.doc
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



TABLE OF CONTENTS

GENERAL REMARKS	3
GENERAL INFORMATION	4
TEST PROCEDURES	5
RF POWER OUTPUT	6
MODULATION CHARACTERISTICS	7
AUDIO FREQUENCY RESPONSE	8
AUDIO LOW PASS FILTER	9
AUDIO INPUT VERSUS MODULATION	10
OCCUPIED BANDWIDTH	11
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)	17
FIELD STRENGTH OF SPURIOUS EMISSIONS	20
RECEIVER RADIATED SPURIOUS EMISSIONS	23
FREQUENCY STABILITY	24
TRANSIENT FREQUENCY BEHAVIOR	25
EMC EQUIPMENT LIST	29

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 2 of 29

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: August 25, 2011

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
Page 3 of 29

GENERAL INFORMATION
DUT Specification

DUT Description	VHF PORTABLE RADIO
FCC ID	ABZ99FT3085
IC Certification	109AB-99FT3085
Model Number	AAH56JDN9KA1AN
Serial Number	N/A
Operating Frequency	(136.00 – 174.00) MHz
Test Frequencies	(138.125, 150.925, 156.525, and 173.9875) MHz
Type of Emission	11K0F3E , 16K0F3E, 7K60F1D 7K60F1E, 7K60F1W, 7K60FXD, 7K60FXE
Modulation	FM
DUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz <input type="checkbox"/> DC Power 12V <input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed <input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable
Test Conditions	The temperature was 26°C with a relative humidity of 50%.
Modification to the DUT	None
Test Exercise	The DUT was placed in continuous transmit mode.
Applicable Standards	ANSI/TIA 603-C:2004, FCC CFR 47 Part 90, IC RSS-119, RSS-GEN
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA.

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

 Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 4 of 29

TEST PROCEDURES

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-C: 2004 using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-C: 2004 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a micro volt at the output of the antenna.

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
Page 5 of 29


RF POWER OUTPUT

Rule Part No.: FCC Part 2.1046(a), IC RSS-119 4.1 and 5.4, RSS-GEN 4.8

Test Requirements:

Method of Measurement: RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

Test Setup Diagram:



Test Data:

OUTPUT POWER:

Tuned Freq (MHz)	Power (W)	
	Hi	Low
138.125	5.1	1.0
150.925	5.2	1.1
156.525	5.0	1.1
173.875	5.1	1.0

Part 2.1033 (C)(8) DC Input into the final amplifier

FOR LOW POWER SETTING INPUT POWER: $(7.4V)(0.72A) = 5.33$ Watts

FOR HIGH POWER SETTING INPUT POWER: $(7.4V)(1.65A) = 12.21$ Watts

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 6 of 29

MODULATION CHARACTERISTICS

Part 2.1033(c)

Part 2.1033(c) (4)

FCC Part 90.209, IC RSS-119 5.5

FCC Part 90.207

Type of Emission: 11K0F3E

$$Bn = 2M + 2DK$$

$$M = 3000$$

$$D = 2500$$

$$K=1$$

$$Bn = 2(3000)+2(2500) = 11.0k$$

Type of Emission: 16K0F3E

$$Bn = 2M + 2DK$$

$$M = 3000$$

$$D = 5000$$

$$K=1$$

$$Bn = 2(3000)+2(5000) = 16.0k$$

The transceiver is also capable of transmitting APCO 25 (P25) Phase 1 C4FM with the following emission designators: 7K60F1D, 7K60F1E, 7K60FXD, 7K60FXE, and 7K60F1W

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
Page 7 of 29

AUDIO FREQUENCY RESPONSE

Rule Part No.: FCC Part 2.1047(a)(b), IC RSS-119 5.2


Test Requirements:

Method of Measurement:


The audio frequency response was measured in accordance with ANSI/TIA 603-C:2004. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

AUDIO FREQUENCY RESPONSE PLOT

Narrow channel BW:

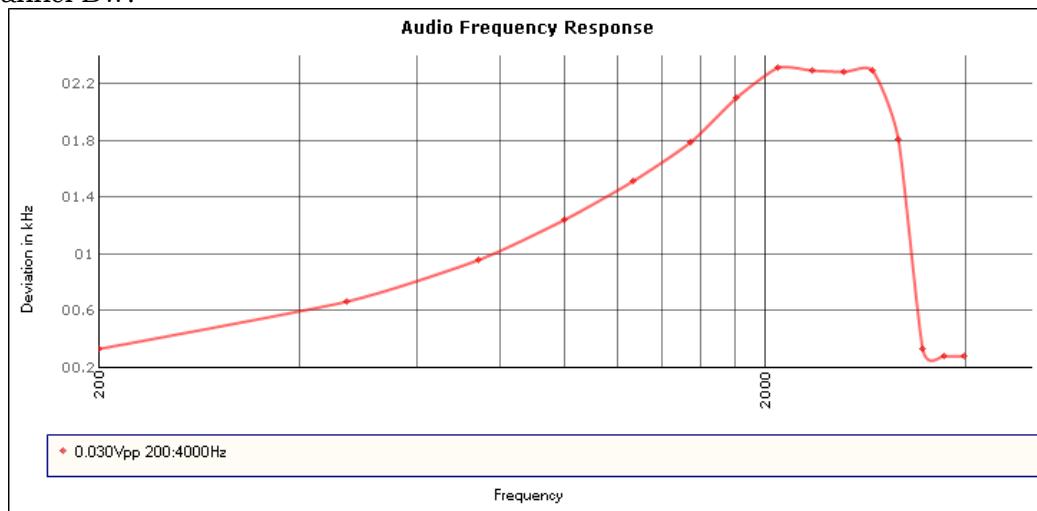

Wide channel BW:

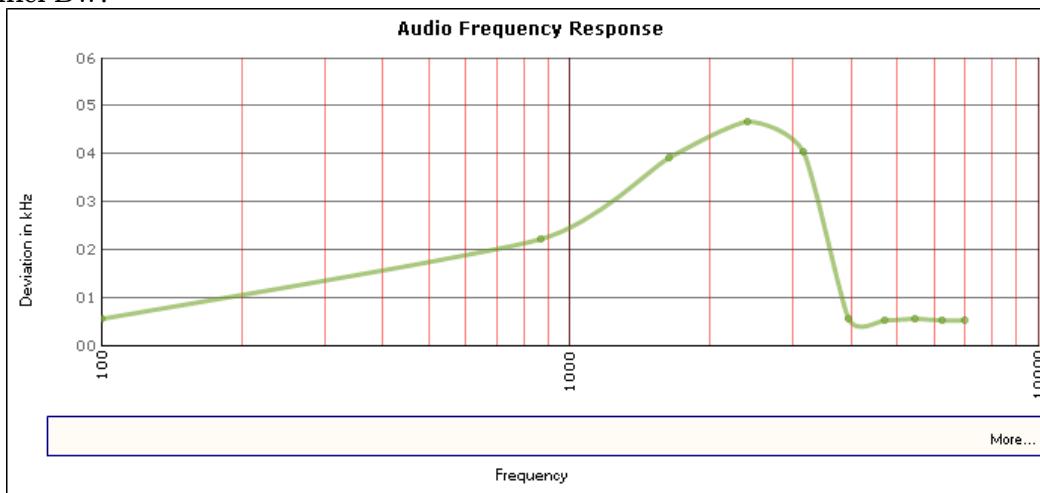

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
Page 8 of 29


AUDIO LOW PASS FILTER

VOICE MODULATED COMMUNICATION EQUIPMENT


Part 2.1047(a) Voice modulated communication equipment: For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

AUDIO LOW PASS FILTER

Narrow channel BW:

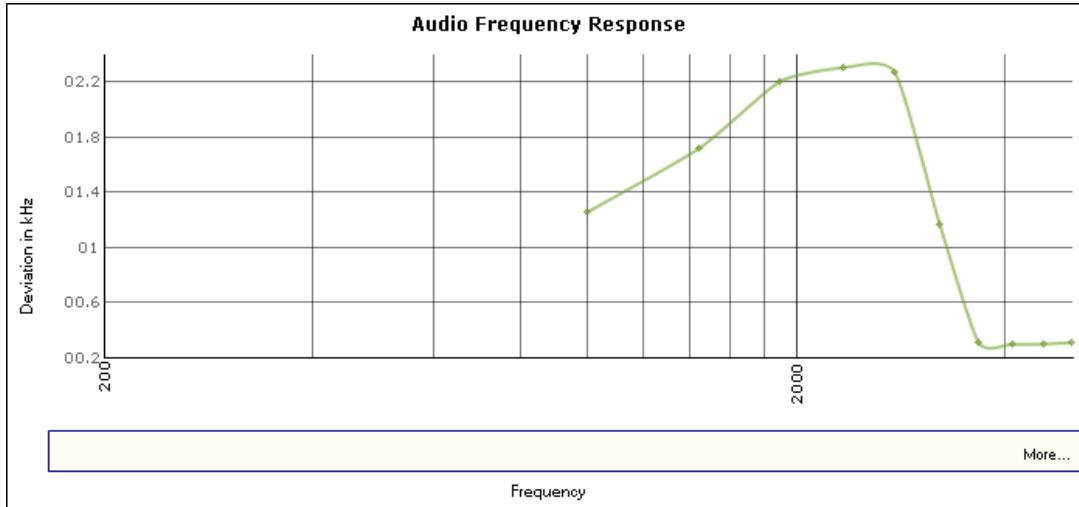

Wide channel BW:

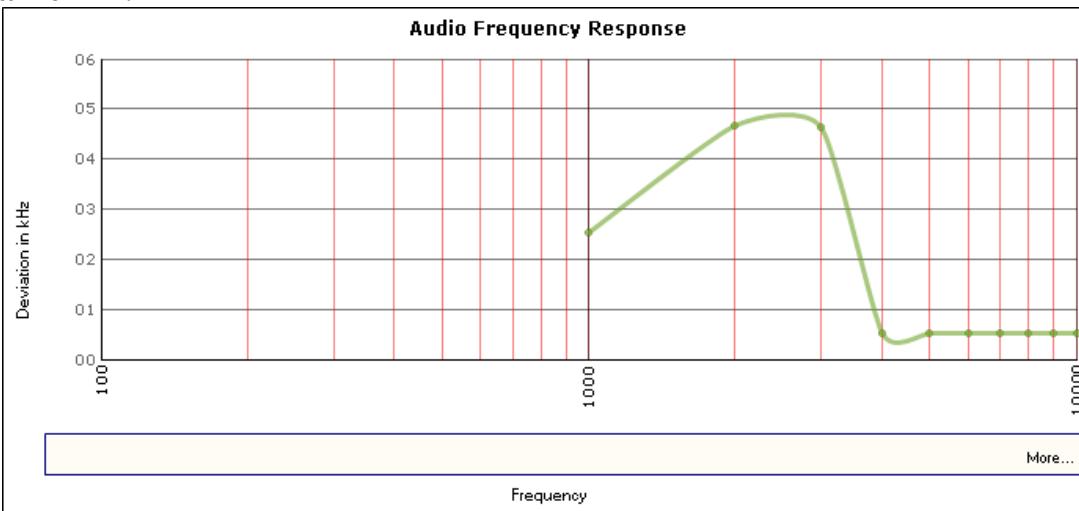

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
Page 9 of 29

AUDIO INPUT VERSUS MODULATION

Rule Part No.: FCC Part 2.1047(b) & 90, IC RSS-119 5.2


Test Requirements:

Method of Measurement: **Modulation cannot exceed 100%**, The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C:2004. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz.


Test data:

Modulation Limiting Plot

Narrow channel BW

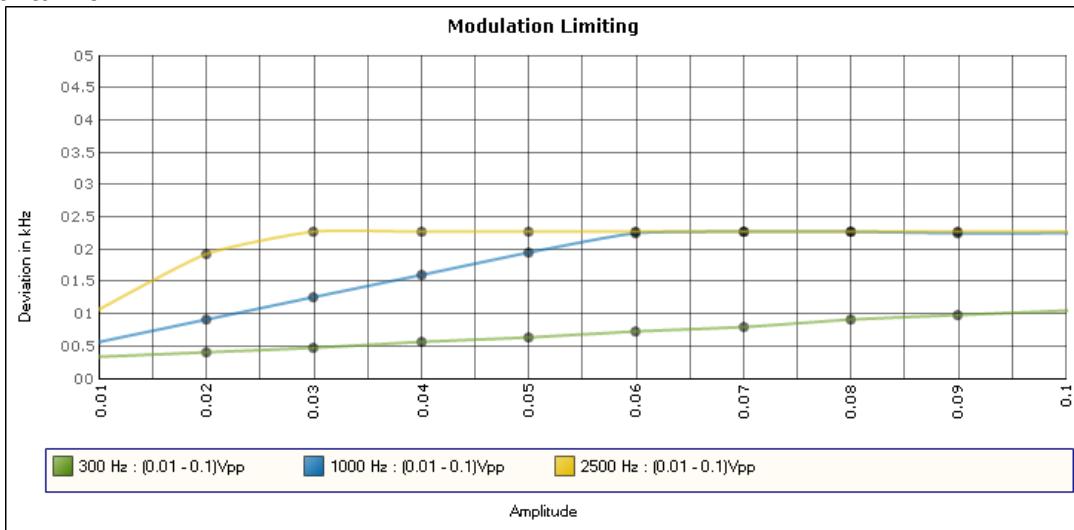

Wide channel BW

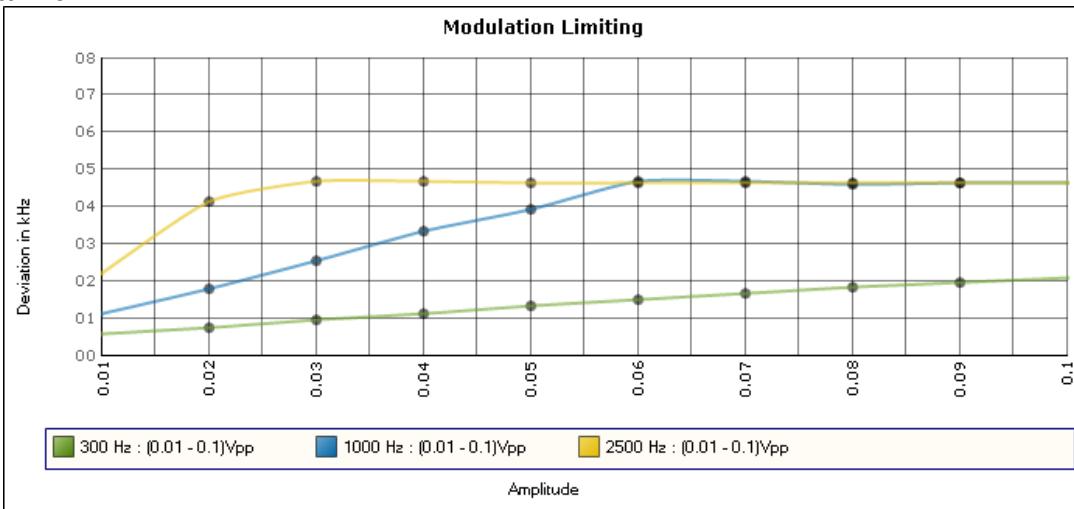

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc

OCCUPIED BANDWIDTH

FCC Part 2.1049(c), RSS-GEN 4.6 EMISSION BANDWIDTH **FCC Part 90.210(b) RSS-119 4.2 25kHz Channel Spacing**

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + 10\log(P)$ dB.

Part 90.210(c) 12.5kHz Channel Spacing Not Equipped with a Low Pass Filter

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz but not more than 10 kHz: At least $83 \log(fd/5)$ dB; (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least $29 \log(fd/11)$ dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least $43 + 10\log(P)$ dB.

Part 90.210(d) Emission Mask D - 12.5 kHz channel BW equipment.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(fd - 2.88)$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

Part 90.210(e) Emission Mask E - 6.25 kHz channel BW equipment.

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(fd - 3.0)$ dB or 55 + 10 Log(P) or 65, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10\log(P)$ dB or 65 dB, whichever is the lesser attenuation.

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085


Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 11 of 29

OCCUPIED BANDWIDTH MEASUREMENT

Test procedure: ANSI/TIA-603-C:2004 para 2.2.11.

Test Setup Diagram:

OCCUPIED BANDWIDTH MEASUREMENT

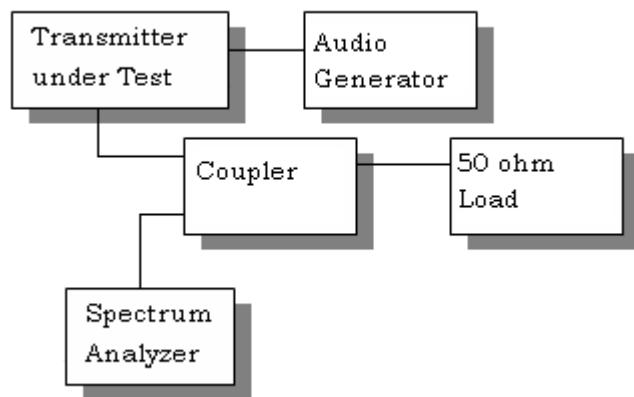

Test Data: See the plots below

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085


IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
Page 12 of 29

Analog 12.5 kHz channel spacing (11K0F3E)

NOTES:

 MOTOROLA SOLUTIONS, INC. - VHF PORTABLE RADIO
 OCCUPIED BANDWIDTH PLOT -

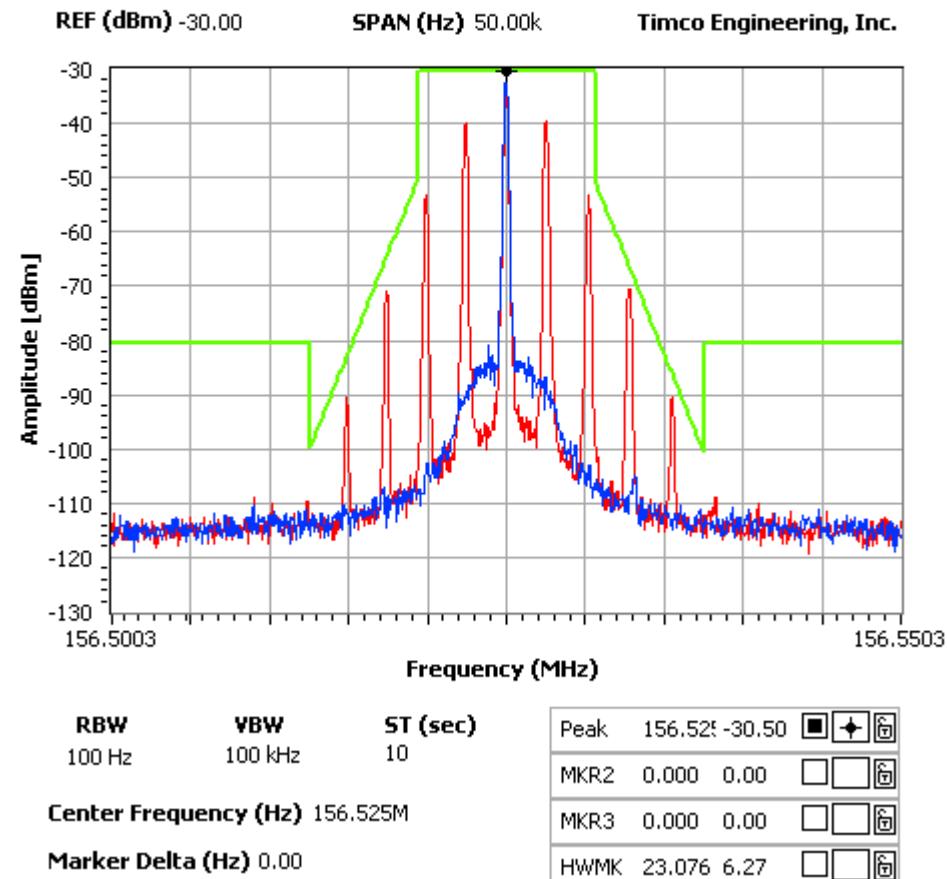FCC 90.210 Mask D


Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085


IC: 109AB-99FT3085

 Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 13 of 29

Analog 25 kHz channel spacing (16K0F3E)

NOTES:

 MOTOROLA SOLUTIONS, INC. - VHF PORTABLE RADIO
 OCCUPIED BANDWIDTH PLOT

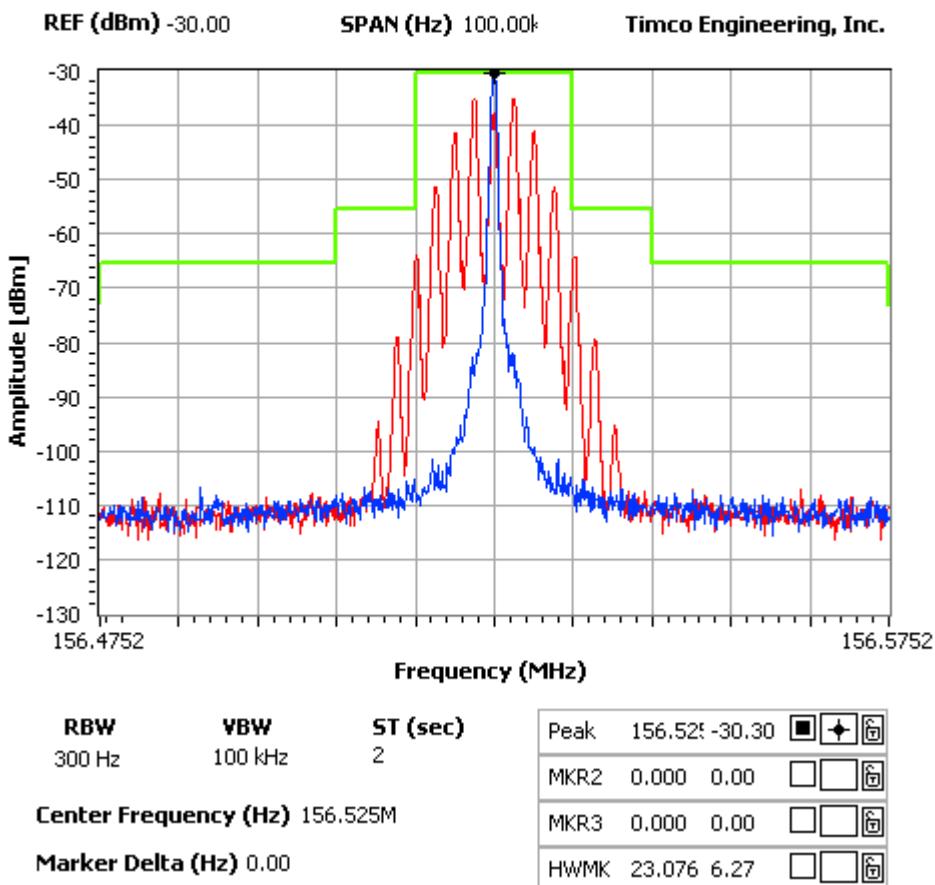FCC 90.210 Mask B


Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085


IC: 109AB-99FT3085

 Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 14 of 29

Digital 12.5 kHz channel spacing

NOTES:

 MOTOROLA, INC. Schaumburg, IL - VHF PORTABLE RADIO
 OCCUPIED BANDWIDTH PLOT

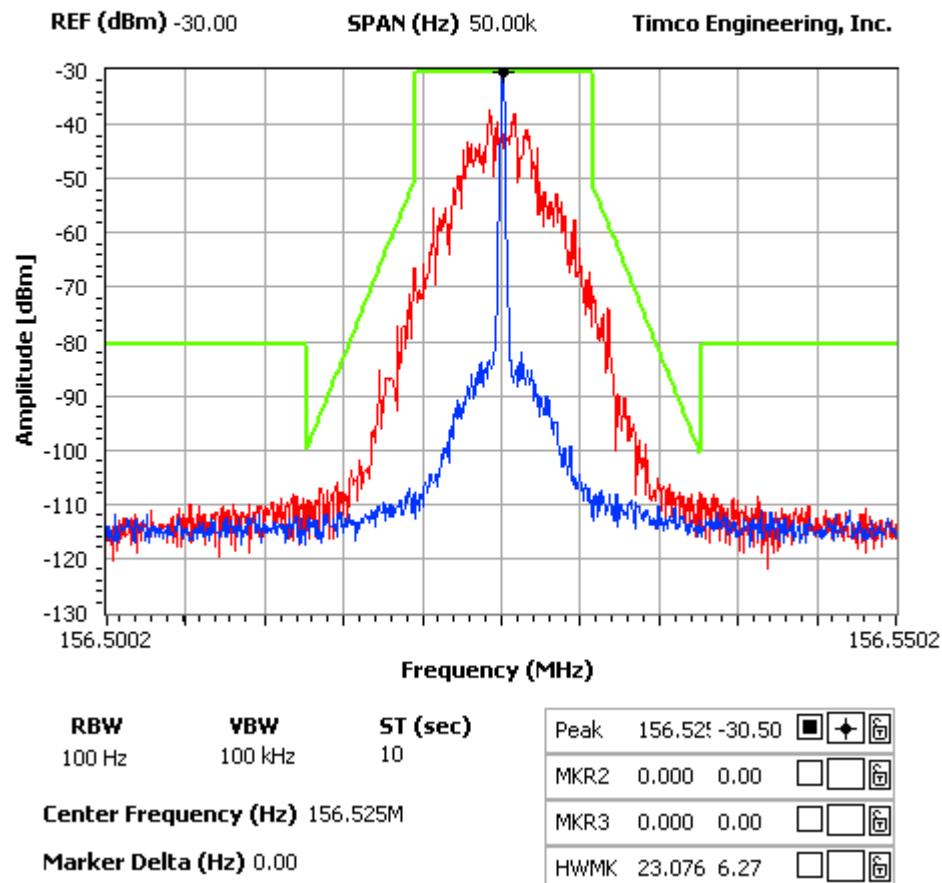FCC 90.210 Mask D


Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085


IC: 109AB-99FT3085

 Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 15 of 29

Digital 12.5 kHz channel spacing (O.153 Test Pattern)

NOTES:

 MOTOROLA, INC. Schaumburg, IL - VHF PORTABLE RADIO
 OCCUPIED BANDWIDTH PLOT

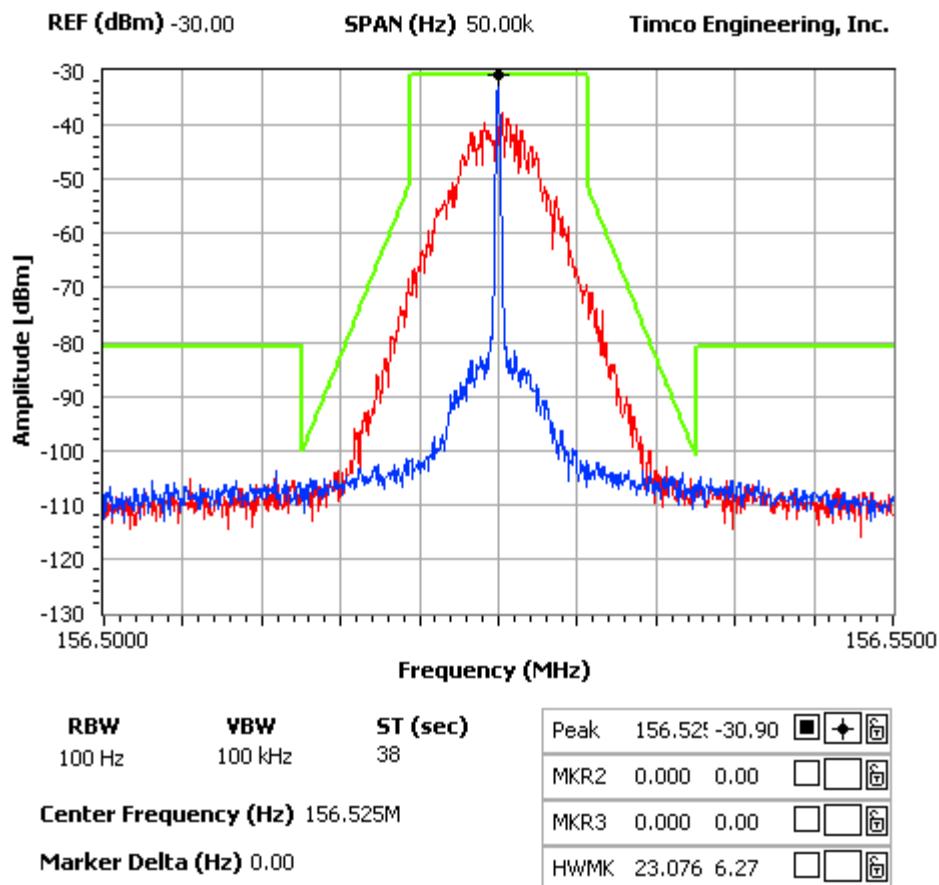FCC 90.210 Mask D


Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

 Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 16 of 29

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Rule Part No.: FCC Part 2.1051(a), RSS-GEN 7.1.4

Requirements: 12.5kHz Channel Spacing = 57dBc (for 5 Watts)
 12.5kHz Channel Spacing = 50dBc (for 1 Watts)

Method of Measurement: The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-C:2004.

FCC Limit for:

25 kHz Channel Spacing = 50
 12.5 kHz Spacing = 57
 6.25 kHz Channel Spacing = N/A

Test Data:

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
138.125	276.25	81.4		138.125	276.25	72.4
	414.38	95.3			414.38	93.9
	552.50	106.5			552.50	96.5
	690.63	98.8			690.63	99.3
	828.75	98.1			828.75	98.3
	966.88	100.1			966.88	99.2
	1105.00	98.1			1105.00	92.7
	1243.13	98			1243.13	91.6
	1381.25	98.7			1381.25	90.7

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
150.925	301.85	82.5		150.925	301.85	75.4
	452.78	89.9			452.78	99.6
	603.70	105			603.70	96.7
	754.63	96.4			754.63	94.2
	905.55	98.2			905.55	98.8
	1056.48	96.5			1056.48	91.4
	1207.40	96.3			1207.40	91.6
	1358.33	97.9			1358.33	91.4
	1509.25	99			1509.25	91.5

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 17 of 29

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
156.525	313.05	84.8		156.525	313.05	78.1
	469.58	89.5			469.58	96.9
	626.10	105.6			626.10	97.2
	782.63	94.9			782.63	92.5
	939.15	96.3			939.15	96.2
	1095.68	96.9			1095.68	92.4
	1252.20	97.6			1252.20	92
	1408.73	99			1408.73	91.9
	1565.25	98.6			1565.25	92.7

TF HIGH POWER	EF	dB below carrier		TF LOW POWER	EF	dB below carrier
173.785	347.57	94.6		173.785	347.57	84.4
	521.36	91.4			521.36	94
	695.14	103.4			695.14	97.4
	868.93	98.6			868.93	97.3
	1042.71	94.9			1042.71	89.9
	1216.50	95.6			1216.50	90.5
	1390.28	98.6			1390.28	92.2
	1564.07	98.5			1564.07	90.7
	1737.85	97.5			1737.85	90.3


Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 18 of 29

Method of Measuring Conducted Spurious Emissions

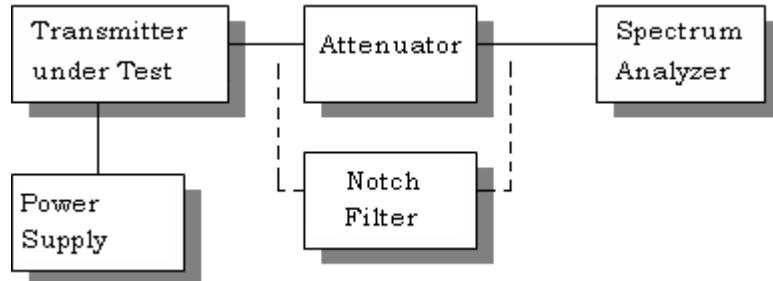

METHOD OF MEASUREMENT: The procedure used was ANSI/TIA 603-C:2004. The measurements were made at TIMCO ENGINEERING INC. 849 N.W. State Road 45, Newberry, Florida 32669.

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
Page 19 of 29


FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Parts. No.: FCC Part 2.1053, RSS-GEN 4.9

Requirements: The FCC limits for radiated emissions are the same as previously stated for the conducted emissions.

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C: 2004 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

Test Setup Diagram:

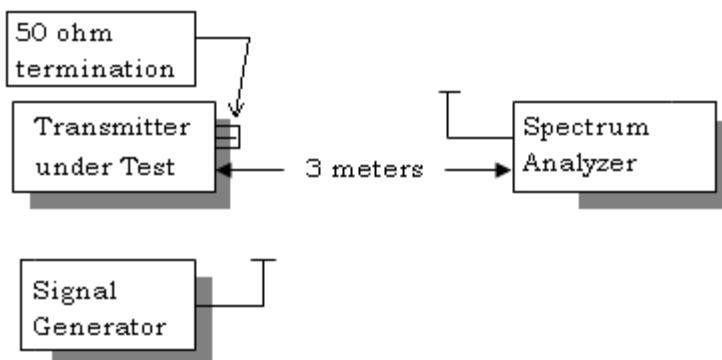

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 20 of 29

Test Data:
High Power

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
138.13	0	0
276.25	H	97.1
414.38	H	103.9
552.50	H	112.1
690.63	H	110.0
828.75	H	99.3
966.88	H	106.7
1105.00	H	99.9
1243.13	H	98.6
1381.25	H	98.6

Low Power

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
138.13	0	0
276.25	H	90.1
414.38	H	103.6
552.50	H	105.8
690.63	H	103.3
828.75	H	99.8
966.88	H	98.8
1105.00	H	93.5
1243.13	H	91.7
1381.25	H	91.5

High Power

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
150.93	0	0
301.85	H	96.2
452.78	H	110.8
603.70	H	112.9
754.63	H	95.3
905.55	H	98.0
1056.48	H	99.1
1207.40	H	98.5
1358.33	H	99.3
1509.25	H	100.4

Low Power

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
150.93	0	0
301.85	H	87.9
452.78	H	106.0
603.70	H	106.6
754.63	H	99.7
905.55	H	97.9
1056.48	H	92.8
1207.40	H	91.9
1358.33	H	91.5
1509.25	H	92.6

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 21 of 29

High Power

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
156.53	0	0
313.05	H	94.6
469.58	H	116.2
626.10	H	113.1
782.63	H	108.2
939.15	H	107.3
1095.68	H	98.8
1252.20	H	98.5
1408.73	H	99.5
1565.25	H	100.0

Low Power

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
156.53	0	0
313.05	H	86.6
469.58	H	108.4
626.10	H	106.7
782.63	H	100.7
939.15	H	98.7
1095.68	H	92.2
1252.20	H	91.8
1408.73	H	92.2
1565.25	H	92.1

HIGH POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
173.79	0	0
347.57	H	97.0
521.36	H	110.6
695.14	H	110.2
868.93	H	98.3
1042.71	H	100.2
1216.50	H	98.7
1390.28	H	101.0
1564.07	H	101.9
1737.85	H	97.5

LOW POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
173.79	0	0
347.57	H	88.0
521.36	H	108.8
695.14	H	102.5
868.93	H	97.7
1042.71	H	94.0
1216.50	H	93.0
1390.28	H	91.7
1564.07	H	93.5
1737.85	H	90.6

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 22 of 29

RECEIVER RADIATED SPURIOUS EMISSIONS

Receiver data as shown below is not part of the FCC certification process. Per FCC Rules Part 15.101(b), the receiver is subject to verification.

The data shown below is part of the IC Certification process only.

Rule Parts. No.: RSS-GEN 4.10, 6

Requirements:

Frequency MHz	Limits
30 – 88	40.0 dB μ V/m measured @ 3 meters
88 – 216	43.5 dB μ V/m measured @ 3 meters
216 – 960	46.0 dB μ V/m measured @ 3 meters
Above 960	54.0 dB μ V/m measured @ 3 meters

TEST DATA:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m	Margin dB
138.1	276.25	1.5	V	2.71	14.74	18.95	27.06
138.1	276.25	1.7	H	2.71	14.74	19.15	26.86
150.9	301.85	1.6	V	2.81	14.48	18.89	27.11
150.9	301.85	1.8	H	2.81	14.48	19.09	26.91
156.5	313.85	1.5	V	2.87	14.36	18.73	27.27
156.5	313.85	1.9	H	2.87	14.36	19.13	26.87
173.8	347.57	1.6	V	3.04	15.00	19.64	26.36
173.8	347.57	1.8	H	3.04	15.00	19.84	26.16

The data represents the noise floor as there were no significant emissions found.

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 23 of 29

FREQUENCY STABILITY

Rule Parts. No.: FCC Part 2.1055, Part 90.213, RSS-119 5.3, RSS-GEN 7.2.4

Requirements: Temperature range requirements: -30 to +50° C.
 Voltage Variation +, -15%
 ±1.5 PPM

Method of Measurements: ANSI/TIA 603-C:2004

Test Data:

Assigned Frequency (Ref. Frequency) (MHz)		156.525043
Temperature (°C)	Frequency (MHz)	Frequency Stability (PPM)
-30	156.524957	-0.55
-20	156.524993	-0.32
-10	156.525048	0.03
0	156.525046	0.02
+10	156.525063	0.13
+20	156.525067	0.15
+30	156.525080	0.24
+40	156.525077	0.22
+50	156.525075	0.20

Assigned Frequency (Ref. Frequency) (MHz)		
% Battery (%)	Frequency (MHz)	Frequency Stability (PPM)
-15%	156.525045	0.01
	156.525043	0.00
+15%	156.525046	0.02

* Minimum supply voltage is 6.0V (20% below nominal voltage is 7.4V).
 Transmitter cannot function below this point.

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 24 of 29

TRANSIENT FREQUENCY BEHAVIOR

FCC Part 2.1055(a)(1)

FCC Part 90.214, IC RSS-119 5.8

REQUIREMENTS: Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time Intervals	Maximum frequency difference	All Equipment	
		150-174 MHz	421-512 MHz

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

t_1^4	± 25.0 kHz	5.0 ms	10.0 ms
t_2	± 12.5 kHz	20.0 ms	25.0 ms
t_3^4	± 25.0 kHz	5.0 ms	10.0 ms

Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

t_1^4	± 12.5 kHz	5.0 ms	10.0 ms
t_2	± 6.25 kHz	20.0 ms	25.0 ms
t_3^4	± 12.5 kHz	5.0 ms	10.0 ms

Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

t_1^4	± 6.25 kHz	5.0 ms	10.0 ms
t_2	± 3.125 kHz	20.0 ms	25.0 ms
t_3^4	± 6.25 kHz	5.0 ms	10.0 ms



Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 25 of 29

Narrow channel BW:

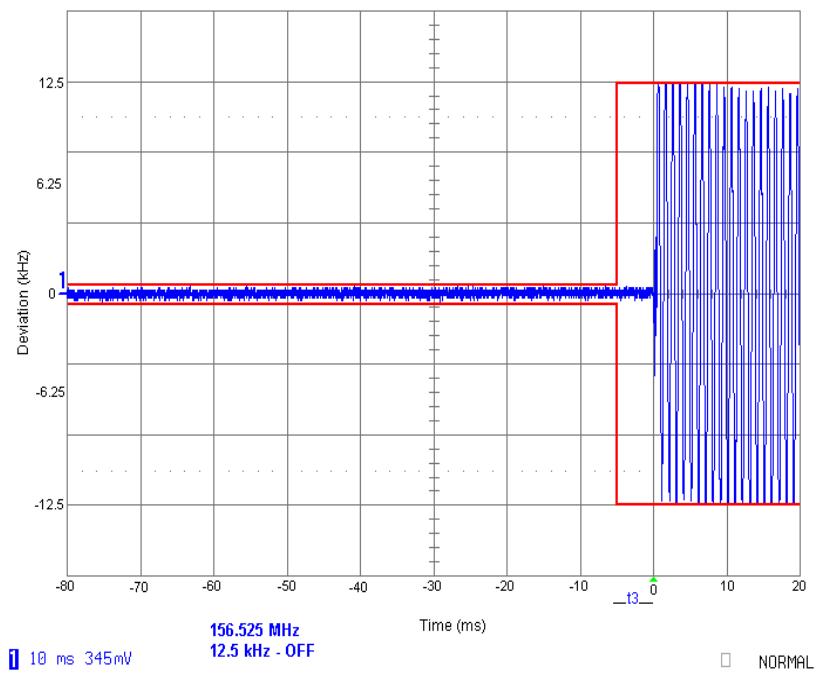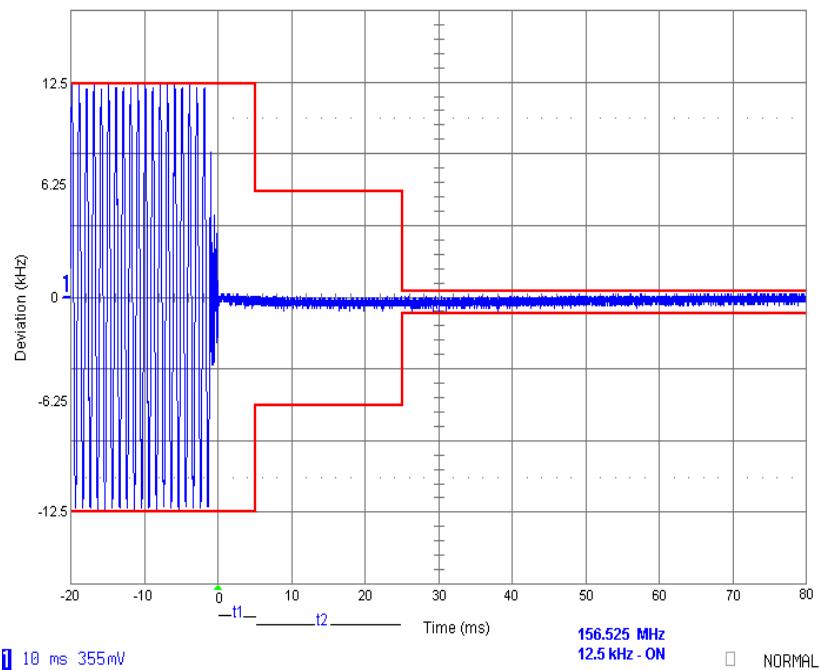



Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
Page 26 of 29

Wide channel BW:

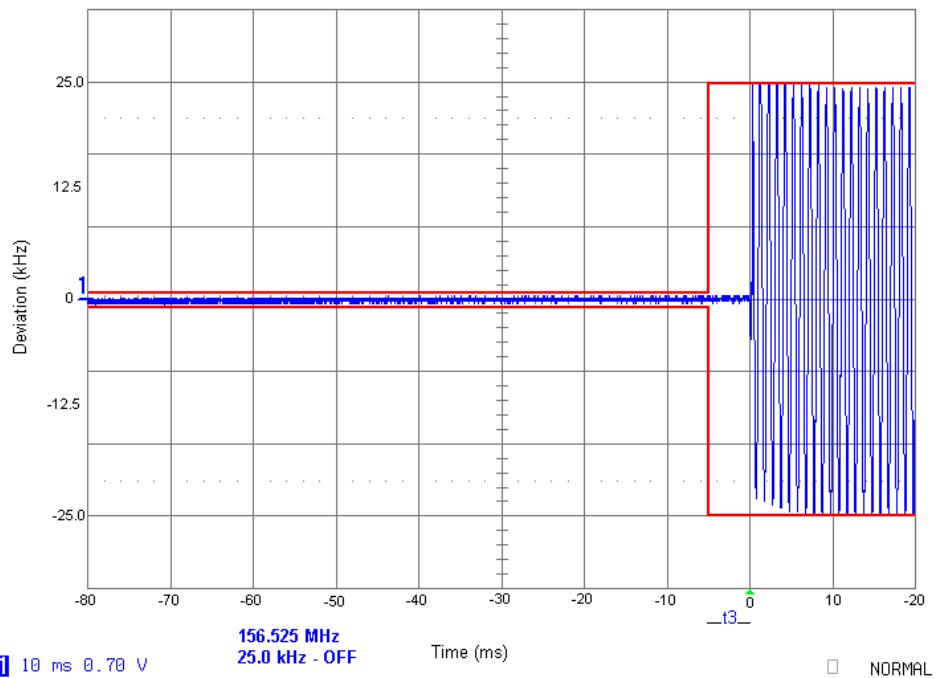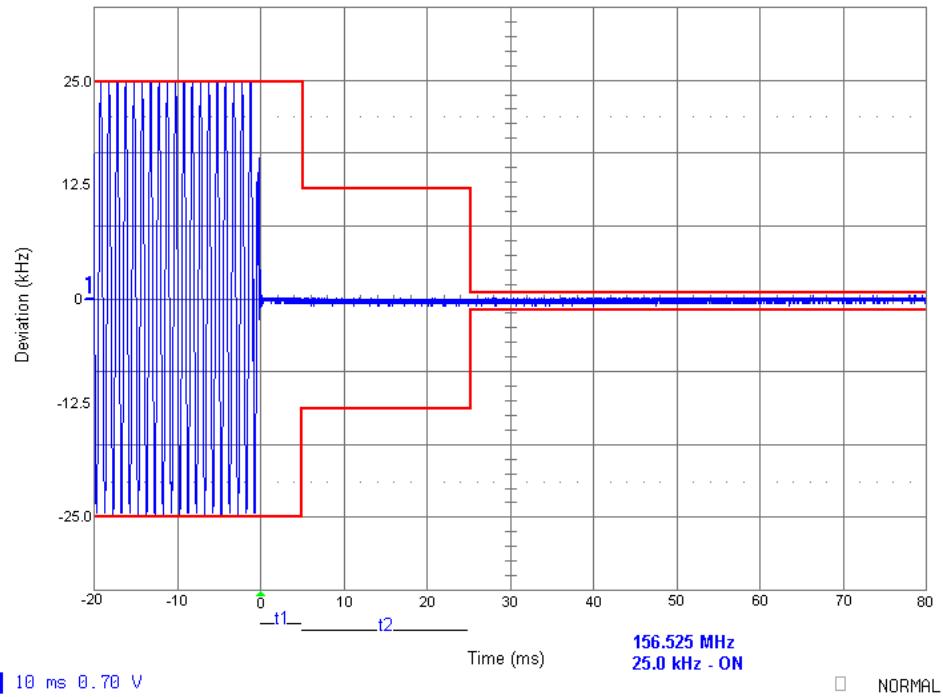

Applicant: MOTOROLA SOLUTIONS, INC.


FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
Page 27 of 29

TEST PROCEDURE: ANSI/TIA 603-C:2004 PARA 2.2.19

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB. With the levels set as above the transient frequency behavior was observed & recorded.

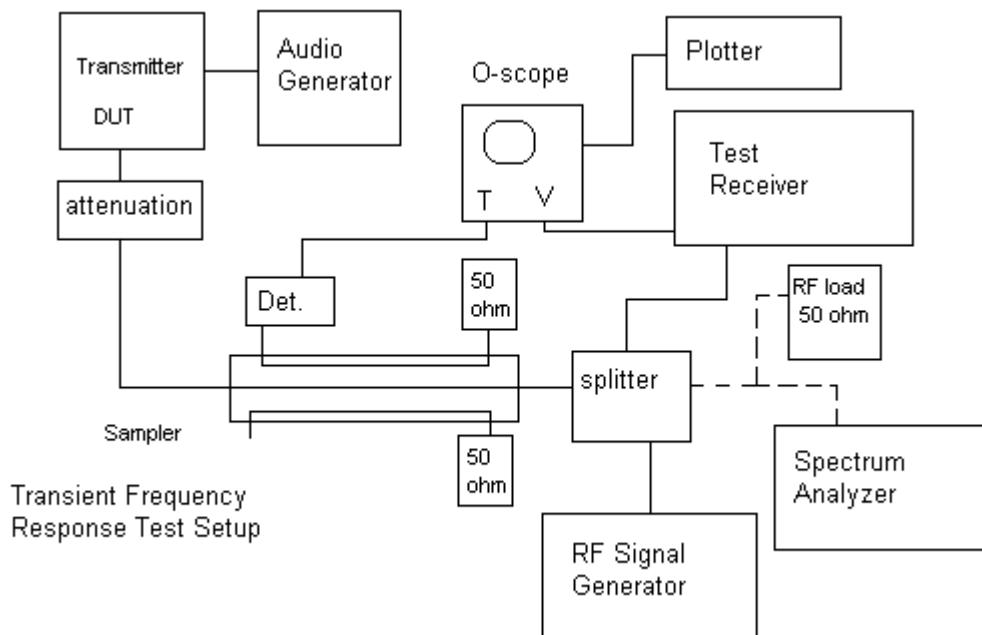

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc
 Page 28 of 29

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/10/10	5/10/12
AC Voltmeter	HP	400FL	2213A14499	CAL 6/12/11	6/12/13
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 9/10/09	9/10/11
Antenna: Passive Loop	EMC Test Systems	EMCO 6512	9706-1211	CAL. 9/1/09	9/2/11
Frequency Counter	HP	5385A	2730A03025	CAL 9/4/09	9/4/11
Hygro-Thermometer	Extech	445703	0602	CAL 6/15/11	6/15/13
Modulation Analyzer	HP	8901A	3435A06868	CAL 9/26/09	9/26/11
Digital Multimeter	Fluke	FLUKE-77	35053830	CAL 11/18/09	11/18/11
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/10	4/25/12
Antenna	ETS	3117	41534	9/22/2010	9/22/2012
Antenna	Electro metrics	LPA-25	1122	5/04/2011	5/04/2013
Antenna	Electro metrics	BIA-25	1171	1/15/2010	1/15/2012

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3085

IC: 109AB-99FT3085

Report: M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1690CT11\1690CT11TestReport.doc