

Prüfbericht-Nr.: <i>Test report no.:</i>	CN219ZLB 001	Auftrags-Nr.: <i>Order no.:</i>	168318237	Seite 1 von 22 <i>Page 1 of 22</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2021-04-29	
Auftraggeber: <i>Client:</i>	KEE TAT INNOVATIVE TECHNOLOGY HOLDINGS LTD Dongshan Management District, Qishi Town, Dongguan City, Guangdong Province, China, 523000			
Prüfgegenstand: <i>Test item:</i>	Smart Gateway			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	GW2001 (Trademark: JUBEE)			
Auftrags-Inhalt: <i>Order content:</i>	FCC and IC approval			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 2.1091 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019 RSS-102 Issue 5 March 2015			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2021-06-30	Please refer to photo documents		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003056890-001 to 002			
Prüfzeitraum: <i>Testing period:</i>	2021-06-18 – 2021-07-12			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i> 2021-10-20	Ausstellungsdatum: <i>Issue date:</i> 2021-10-26			
Stellung / Position	Department Manager	Stellung / Position	Department Manager	
Sonstiges / Other:				
FCC ID: 2A2WY-GW2001 IC: 27625-GW2001 HVIN: GW2001				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 99%dB BANDWIDTH

RESULT: Pass

5.1.5 6dB BANDWIDTH

RESULT: Pass

5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.4	INDEPENDENT OPERATION MODES	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS.....	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	12
5.1.1	<i>Antenna Requirement.....</i>	<i>12</i>
5.1.2	<i>Maximum Peak Conducted Output Power.....</i>	<i>13</i>
5.1.3	<i>Conducted Power Spectral Density.....</i>	<i>14</i>
5.1.4	<i>99%dB Bandwidth.....</i>	<i>15</i>
5.1.5	<i>6dB Bandwidth.....</i>	<i>16</i>
5.1.6	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>17</i>
5.1.7	<i>Radiated Spurious Emission.....</i>	<i>18</i>
5.1.8	<i>Conducted Emission on AC Mains.....</i>	<i>19</i>
6	SAFETY HUMAN EXPOSURE	20
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	20
6.1.1	<i>Electromagnetic Fields</i>	<i>20</i>
7	PHOTOGRAPHS OF THE TEST SET-UP	22
8	LIST OF TABLES	22

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of Conducted & Radiated Testing

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China

FCC Registration No.: 694916

IC Registration No.: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Wireless Connectivity Tester	Rohde & Schwarz	CMW270	101375	2021-08-30
Signal Analyzer	Rohde & Schwarz	FSV 40	101441	2021-08-30
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	Rohde & Schwarz	WMS32 (V10.40.10)	N/A	N/A
Power Meter	Rohde & Schwarz	NRP2	107105	2021-12-20
Wideband Power Sensor	Rohde & Schwarz	NRP-Z81	105350	2021-12-20
Unwanted Emission Testing				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR 7	102021	2021-08-11
Signal Analyzer	R&S	FSV 40	101439	2021-08-10
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2021-08-10
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2021-08-10
Amplifier	R&S	SCU-18F	180070	2021-08-10
Amplifier	R&S	SCU40A	100475	2021-09-10
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2021-08-08
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2021-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2021-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2021-09-13
Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	2021-09-02
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22
Unwanted Emission Testing				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2021-09-03
Artificial Mains Network	R&S	ENV216	102333	2021-08-19

Prüfbericht - Nr.: CN219ZLB 001

Test Report No.

Seite 6 von 22

Page 6 of 22

Artificial Mains Network	R&S	ENV432	101411	2021-08-19
Current Probe	R&S	EZ-17	101247	2021-08-19
Voltage Probe	R&S	ESH2-Z3	100557	2021-08-19
Attenuator	R&S	ESH2Z31	100300	2021-08-19
EMC32 test software	R&S	EMC32(Ver.10.50.01)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Item		Extended Uncertainty
Conducted Emission		± 2.74 dB
Radiated Emission (30-1000MHz)	Field strength (dB μ V/m)	4.27dB
Radiated Emission (above 1000MHz)	Field strength (dB μ V/m)	4.46dB
Radio Spectrum		± 1.5 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Smart Gateway, it supports ZigBee wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Smart Gateway
Type Designation	GW2001
FCC ID	2A2WY-GW2001
IC	27625-GW2001
HVIN	GW2001
Operating Voltage	AC 120V, 60Hz, 0.2A
Testing Voltage	AC 120V, 60Hz
Technical Specification of ZigBee	
Operating Frequency	2405-2480 MHz
Channel Number	16 channels
Channel separation	5MHz
Modulation	OQPSK
Antenna Type	Printed Antenna
Smart Antenna Systems:	Not Applicable
Number of Antenna	1
Antenna Gain	3 dBi

Table 3: RF Channel and Frequency of ZigBee

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
11	2405.00	15	2425.00	19	2445.00	23	2465.00
12	2410.00	16	2430.00	20	2450.00	24	2470.00
13	2415.00	17	2435.00	21	2455.00	25	2475.00
14	2420.00	18	2440.00	22	2460.00	26	2480.00

3.3 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.4 Independent Operation Modes

The basic operation modes are:

- A. On, transmitting mode
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Off

3.5 Submitted Documents

- Application Form
- Block Diagram
- FCC/IC Label and Location Info
- Operation Description
- Photo Document
- Schematics
- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
N/A	N/A	N/A	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

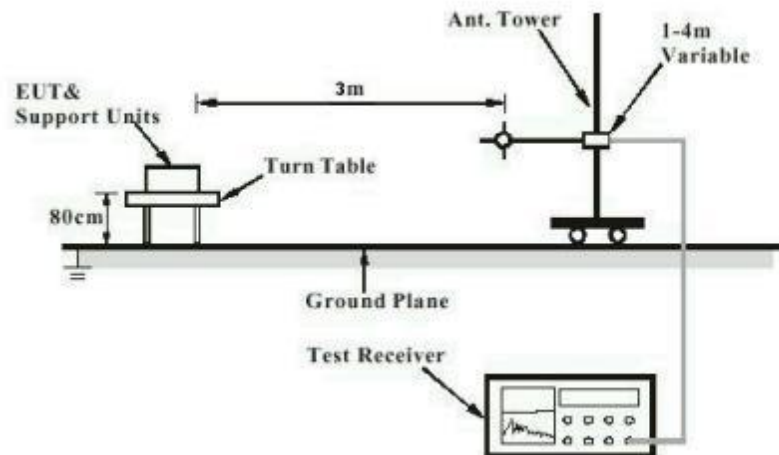


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


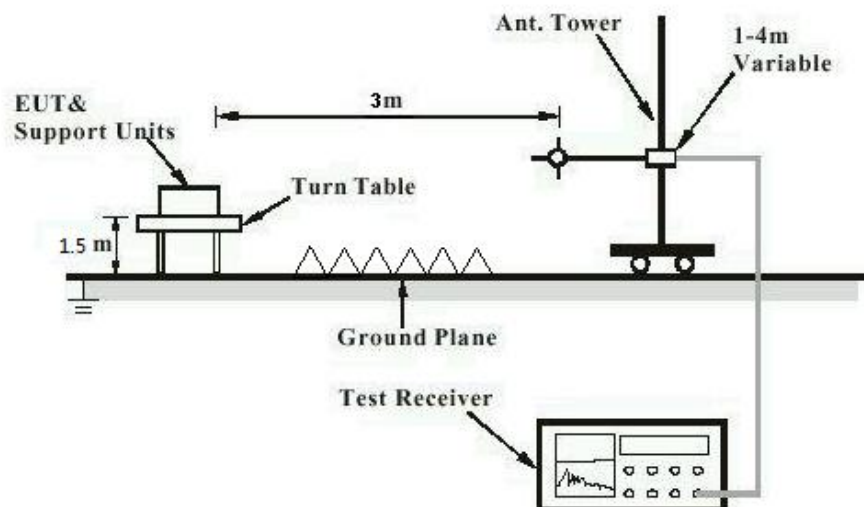


Diagram of Measurement Configuration for Conducted Transmitter Measurement

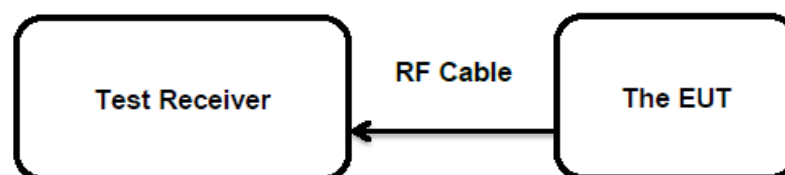

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard

: FCC Part 15.247(b)(4) and Part 15.203
: RSS-Gen Clause 6.7

Limit

: the use of antennas with directional gains that do not
: exceed 6 dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 3dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:
Pass
Test Specification

Test standard	:	FCC Part 15.247(b)(3)
	:	RSS-247 Clause 5.4(d)
Basic standard	:	ANSI C63.10: 2013
Limits	:	< 1 Watt (Maximum Conducted Peak Power)
	:	e.i.r.p. <4W
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2021-07-12
Input voltage	:	AC 120V, 60Hz
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	22.8 °C
Relative humidity	:	49 %
Atmospheric pressure	:	101 kPa

For details refer to following test result.

Table 5: Test Result of Maximum Peak Conducted Output Power,

Channel	Channel Frequency (MHz)	Peak Output Power		Limit
		(dBm)	(W)	(W)
Low Channel	2405	11.2	0.01318	1
Middle Channel	2445	10.1	0.01023	1
High Channel	2480	9.7	0.00933	1

Note: The cable loss is taken into account in results and the e.i.r.p. is 14.2 dBm less than 4W (36 dBm).

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(e)
	: RSS-247 Clause 5.2(b)
Basic standard	: ANSI C63.10: 2013
Limits	: 8 dBm / 3kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2021-07-12
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 22.8 °C
Relative humidity	: 49 %
Atmospheric pressure	: 101 kPa

For details refer to following test result.

Table 6: Test Result of Power Spectral Density

Channel	Channel Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2405	-4.22	8
Middle Channel	2445	-5.04	8
High Channel	2480	-5.72	8

Note: The cable loss is taken into account in results.

5.1.4 99%dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard : RSS-Gen clause 6.7
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2021-07-12
Input voltage : AC 120V, 60Hz
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 22.8 °C
Relative humidity : 49 %
Atmospheric pressure : 101 kPa

Table 7: Test Result of 99% Bandwidth

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2405	2300	/	Pass
Mid Channel	2445	2275	/	Pass
High Channel	2480	2275	/	Pass

5.1.5 6dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(a)(2)
RSS-247 Clause 5.2(a)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2021-07-12
Input voltage : AC 120V, 60Hz
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 22.8 °C
Relative humidity : 49 %
Atmospheric pressure : 101 kPa

Table 8: Test Result of 99% Bandwidth

Channel	Channel Frequency (MHz)	-6dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2405	1700	500	Pass
Mid Channel	2445	1700	500	Pass
High Channel	2480	1700	500	Pass

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2021-07-12
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 22.8 °C
Relative humidity	: 49 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3 & 5.5
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Table 4 & Table 5
Kind of test site	:	3m Semi-anechoic Chamber

Test Setup

Date of testing	:	2021-07-07
Input voltage	:	AC 120V, 60Hz
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	23 °C
Relative humidity	:	45 %
Atmospheric pressure	:	101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

5.1.8 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.207(a) RSS-Gen Clause 8.8
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207(a) RSS-Gen Table 4
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2021-06-18
Input voltage	:	AC 120V, 60Hz
Operation mode	:	A
Earthing	:	Connected
Ambient temperature	:	23 °C
Relative humidity	:	49 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

6 Safety Human Exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Pass****Test Specification**

Test standard : CFR47 FCC Part 2: Section 2.1091
CFR47 FCC Part 1: Section 1.1310
FCC KDB Publication 447498 v06
FCC KDB Publication 865664 D02 v01r02
OET Bulletin 65 (Edition 97-01)
RSS-102 Issue 5 March 2019

FCC requirement: Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 20cm normally can be maintained between the user and the device.

MPE Calculation Method according to OET Bulletin 65

Power Density: $S_{(mW/cm^2)} = PG/4\pi R^2$ or $EIRP/4\pi R^2$

Where:

S = power density (mW/cm²)

P = power input to the antenna (mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (cm)

The nominal maximum conducted output power specified:

ZigBee: 11.20 dBm

From the peak RF output power, the minimum mobile separation distance, d=20 cm, as well as the antenna gain (3.00 dBi ZigBee), the RF power density can be calculated as below:

For ZigBee: $S_{(mW/cm^2)} = PG/4\pi R^2 = 0.005 \text{ mW/cm}^2$

Limits for Maximum Permissible Exposure (MPE) according to FCC Part 1.1310: 1.0 mW/cm²

➤ **IC requirements:** The EUT shall comply with the requirement of RSS-102 section 2.5.2.

Exemption from Routine Evaluation Limits – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;

- RF exposure evaluation exempted power for 2.4G DTS: 2.676 W

The nominal maximum conducted output power specified:

ZigBee: 11.20 dBm

Antenna Gain: 3.00 dBi ZigBee

The Max. e.i.r.p. for ZigBee: 14.20dBm = 0.026 W

The e.i.r.p. for the ZigBee is less than the RF exposure evaluation exempted power. So RF exposure evaluation is not required.

“RF Radiation Exposure Statement Caution: This Transmitter must be installed to provide a separation distance of at least 20 cm from all persons.”

7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

8 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	8
Table 3: RF Channel and Frequency of ZigBee	9
Table 4: List of Accessories and Auxiliary Equipment.....	10
Table 5: Test Result of Maximum Peak Conducted Output Power,	13
Table 6: Test Result of Power Spectral Density	14
Table 7: Test Result of 99% Bandwidth	15
Table 8: Test Result of 99% Bandwidth	16