



A3258_5G_Product-mmWave-MPE_Simulation_Report- withsimPDPlots

Model No	FCC ID:
A3258	BCG-E8947A

Date of Simulation:

3/1/2025-6/15/2025

Location:

Apple Inc., Cupertino, CA, USA



Table of Contents

1	Introduction.....	5
2	MPE Simulation Methodology	5
3	MPE Measurements	7
4	MPE (sPD) Simulations.....	8
5	Uncertainty Budget for Simulation.....	12
6	Simulation vs. Measurement.....	13
	Appendix A: Worst Phase Derivation for Beam Pair	17
	Appendix B: 4 cm ² Averaging PD and Scaling Factor.....	18
	Appendix C: MPE (sPD) Simulation Using New Guideline from Qualcomm	27
	References.....	33



List of Figures

Figure 1. Model validation workflow for MPE simulation and evaluation.	6
Figure 2. MPE measurement setup.	7
Figure 3. Sketch of the probe showing that the minimum measurable distance is 2 mm.	7
Figure 4. Schematic of the simulation model consisting of a back-firing 5G antenna array.	8
Figure 5. Evaluating surfaces for MPE (sPD).	9
Figure 6. An example version of the antenna codebook.	11
Figure 7. Simulated and measured point PD for different beams for n258.	14



List of Tables

Table 1- PD Evaluation Planes (any distance less than 2.5 cm is reported as 0 cm)	9
Table 2 – Preliminary budget of the uncertainty contributions of the numerical algorithm for the validation- or testing-setup	12
Table 3 - Simulated and measured n258 MPE (sPD) at 2 mm away from DUT.	13
Table 4 - Simulated and measured n261 MPE (sPD) at 2 mm away from DUT.	14
Table 6 – Simulated and measured n260 MPE (sPD) at 2 mm away from DUT.	15



1 Introduction

This document provides an overview of the methodology used for Maximum Permissible Exposure (MPE) compliance of the 5G mmWave radios on next generation iPhone.

Due to the presence of an antenna array with multiple beams, we propose to use a combination of simulation and measurement to demonstrate MPE (sPD) compliance. At a high level, the discussion is grouped into the following topics:

- Brief introduction to MPE simulation methodology
- Explanation of the approach to demonstrate MPE (sPD) compliance in a device using measurements
- Brief review of the device configuration and operation, and detailed description of the simulation methodology and results

A few things to be noted are:

1. The simulation and validation methods described herein follow QC guidance for SAR Char and PD Char for determining the worst-case beam for static transmission measurements.
2. The PD simulation models are built with different CAD models for different programs.
3. Based on guidance, we intend to characterize the three highest MPE beams per polarization to choose the scaling factor for all other beams on that polarization.

2 MPE Simulation Methodology

3D full-wave simulation is used to evaluate MPE for each antenna array beam. Each beam is created by invoking a pre-defined codebook that has the proper array elements' excitation (i.e., magnitude and phase) to create the beam.

The following steps are taken to verify the validity of the model used for MPE simulations and then the verified model is used for the MPE calculations:

1) EM Simulation:

- Import a CAD model that represents the actual product in the simulation tool
- Define material properties inside the product based on vendor's inputs
- Perform mesh seeding and solve

2) Compile Fields and Codebook:

- Extract field data from solved model and arrange in format required by Qualcomm Module Group (MG) Script [1]
- Input PD char codebook generated by Qualcomm Webchar tool

3) MPE Calculations:

- Set averaging area to 4cm² using MG Script configuration xml file



- Run MG script to generate MPE and power limit tables for each beam ID in codebook

4) Validate Simulation Model:

- Measure MPE
- Compare measurement vs simulation
- Once a correlation is established, and model's accuracy is verified, this model will be used for computational MPE assessments

5) Run Additional Verifications:

- Use verification data generated by MG Script
- Measure MPE for worst case beams given by MG Script
- Use EM tools, MG Script to complete additional verifications

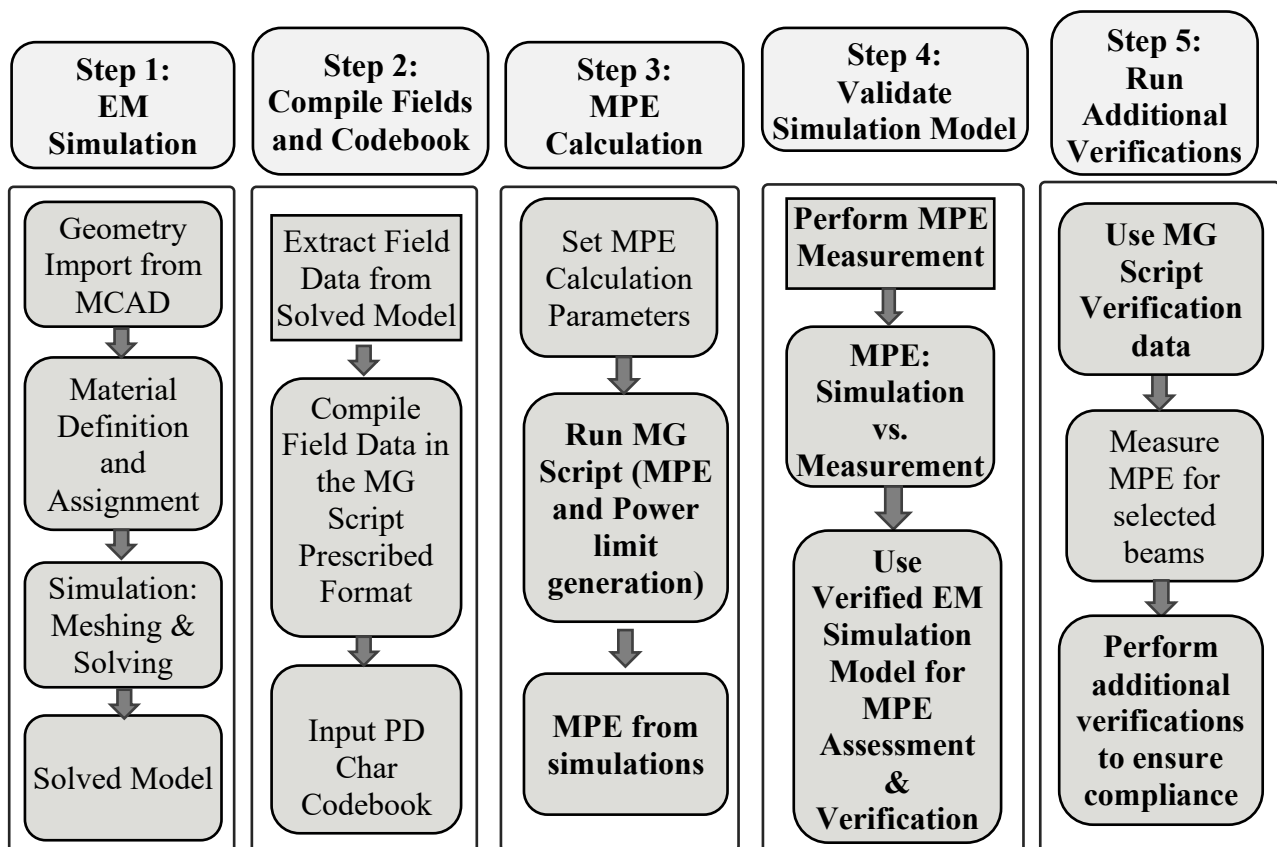


Figure 1. Model validation workflow for MPE simulation and evaluation.



3 MPE Measurements

A mmWave DAE SN 1411 module from SPEAG is used to measure the MPE (sPD) above the DUT. Figure 2 shows the setup of measurement. The mmWave E-field probe is used to measure the electric field above DUT. The near-field magnetic field and MPE are further obtained using this setup. The measurement algorithm can be found in [2] in detail.

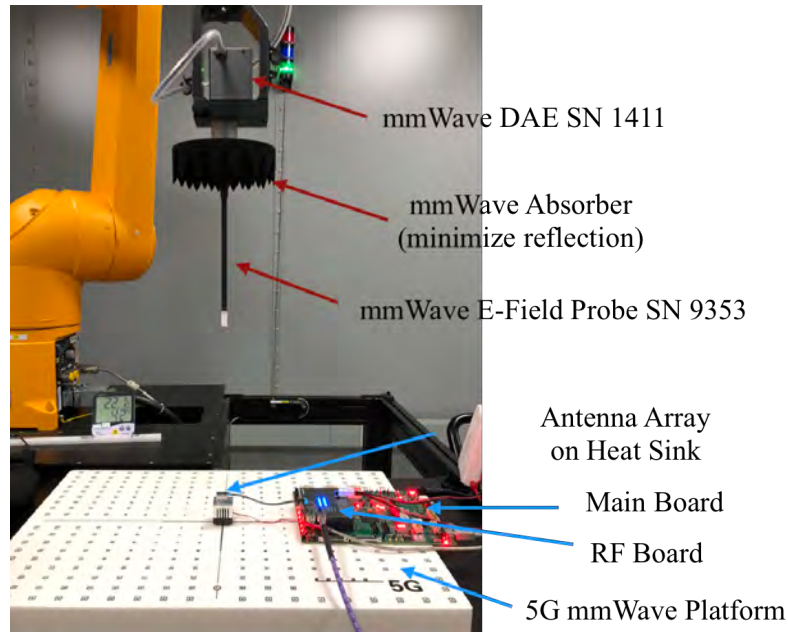


Figure 2. MPE measurement setup.

The distance from probe sensor tip to the edge of the housing is 1.5 mm, and there is 0.5 mm gap between probe tip and the DUT surface to prevent mechanical damage. Therefore, the closest distance that the setup can measure is 2 mm as shown below in Figure 3.

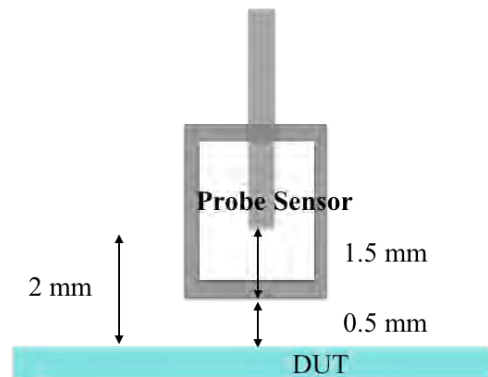


Figure 3. Sketch of the probe showing that the minimum measurable distance is 2 mm.



4 MPE (sPD) Simulations

In 5G, MIMO antennas are designed to orient the beam to specific directions to improve link budgets. Most MIMOs can be configured by using the codebook with each code resulting in a different exposure. The number of codes in the codebook can be very large and measurements of all possible configurations have been shown to be impractical. Therefore, simulation is used to determine the modes/configurations that result in the highest MPE.

All elements are dual polarized patch antennas with horizontal and vertical feeds.

Simulation Models

Figure 4 is a schematic of the simulation model. There is a single antenna array in the phone, which is top-firing array.

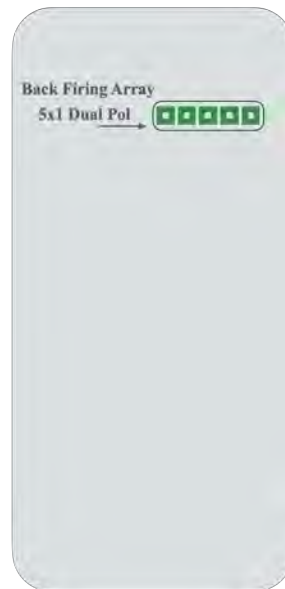


Figure 4. Schematic of the simulation model consisting of a back-firing 5G antenna array.

The measurements and simulations are correlated across different evaluating surfaces 2 mm away from each DUT surface (drawn not to scale), as shown in Figure 5 below. Six surfaces will be evaluated, respectively: front (S1), back (S2), left (S3), right (S4), top (S5) and bottom (S6). As Table 1 shows, for an antenna array, only the evaluating planes within 2.5 cm from the edges of the antenna module will be considered.

The “left” and “right” edges in the report are defined relative to the front of the device.

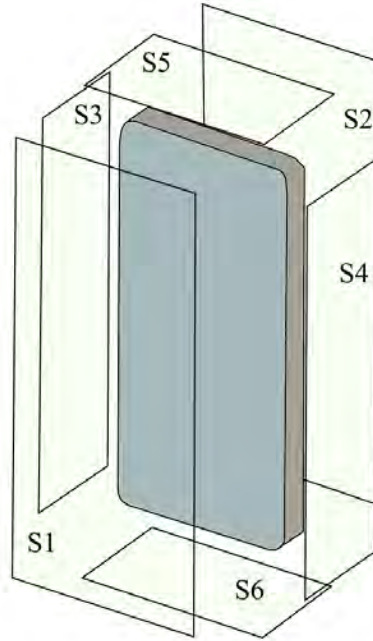


Figure 5. Evaluating surfaces for MPE (sPD).

Table 1- PD Evaluation Planes (any distance less than 2.5 cm is reported as 0 cm)

	Front (S1)	Rear (S2)	Left from Front View (S3)	Right from Front View (S4)	Top (S5)	Bottom (S6)
Back Array	Yes (0 cm)	Yes (0 cm)	Yes (0 cm)	Yes (0 cm)	Yes (0 cm)	No (13.2 cm)

Power Density Definition

After solving the 3D full-wave electromagnetic simulation, various physical quantities can be derived. To calculate PD evaluation, two physical quantities, an electric field $\vec{E}$ and a magnetic field $\vec{H}$ are needed. The actual consumption power can be expressed as the real term of the Poynting vector $\vec{S}$ from the cross product of $\vec{E}$ and complex conjugation of $\vec{H}$ as shown below:

$$\vec{S} = \frac{1}{2} \text{Re}(\vec{E} \times \vec{H}^*)$$

$\vec{S}$ can be expressed as localized power density based on a peak value of each spatial point on mesh grid. From the localized power density $\vec{S}$, the spatial-averaged power density (PD) on an evaluated area (A) can be shown as below:

$$\text{PD} = \frac{1}{A} \int_A \vec{S} \cdot d\vec{A} = \frac{1}{2A} \int_A \text{Re}(\vec{E} \times \vec{H}^*) \cdot d\vec{A}$$



For the purposes of these simulations, PD is the total power density value considering the contributions of x, y, and z components of localized power density $\vec{S}$. The evaluated area A is 4 cm². To capture worst-case power density conditions, simulations and measurements were performed assuming a 100% duty cycle. The quantities described in this section are evaluated using Qualcomm MG Script. Please refer to Appendix A for worst case total power density derivation.

Simulation Methodology:

A time domain 3D Full-Wave Electromagnetic Simulation is performed using CST Studio Suite. The solver calculates electric and magnetic fields at discrete locations and time samples. To achieve high accuracy at all locations, the total electromagnetic energy inside the calculation domain is used as a convergence criterion. The solvers terminate when the normalized energy is decayed to -40 dB. This ensures -40 dB decay at all locations and ensures high accuracy of simulation output.

Boundary Conditions:

The boundary condition for simulating electromagnetic behavior in CST is to allow the electromagnetic waves to be electrically open at the boundary and radiated far away without reflection. CST can support the absorption boundary condition (ABC) for radiation boundary and normally requires a quarter-wavelength separation from the structure.

Source Excitation and Example Codebook:

Figure 66 shows an example of the codebook for a back firing antenna module. The third column of the codebook is the beam ID. The other notable columns are “Amplitude” and “Phase” columns which are the excitation amplitude and phase for each antenna element. Each beam has a “Paired_with” beam for concurrent MIMO streams. The last column is the index of the beam which is paired with the index shown in the third column. The “Amplitude” is in dBm, and “Phase” is in degrees. In real applications, amplitude of the input power for n258, n261 and n260 is 6 dBm. One thing to be noted is that the codebook is defined at the chipset, not at the antenna elements.



Band	Shared_Band	Beam_ID	Module	Ant_Group	Subarray	Ant_Type	Ant_Feed	Amplitude	Phase	Paired_With
257	261	0	0	0	3	PATCH	9	0	0	128
257	261	1	0	0	3	PATCH	10	0	0	129
257	261	2	0	0	3	PATCH	11	0	0	130
257	261	3	0	0	3	PATCH	12	0	0	131
257	261	4	0	0	3	PATCH	13	0	0	132
257	261	5	0	0	3	PATCH	12;13	0;0	315;0	133
257	261	6	0	0	3	PATCH	9;10	0;0	281.25;0	134
257	261	7	0	0	3	PATCH	10;11	0;0	0;0	135
257	261	8	0	0	3	PATCH	9;10	0;0	101.25;0	136
257	261	9	0	0	3	PATCH	10;11	0;0	213.75;146.2	137
257	261	10	0	0	3	PATCH	9;10	0;0	168.75;315	138
257	261	11	0	0	3	PATCH	11;12	0;0	146.25;146.2	139
257	261	12	0	0	3	PATCH	9;10;11;12;13	0;0;0;0;0	247.5;258.75	140
257	261	13	0	0	3	PATCH	9;10;11;12;13	0;0;0;0;0	78.75;135;78	141
257	261	14	0	0	3	PATCH	9;10;11;12;13	0;0;0;0;0	168.75;292.5	142
257	261	15	0	0	3	PATCH	9;10;11;12;13	0;0;0;0;0	292.5;123.75	143
257	261	16	0	0	3	PATCH	9;10;11;12;13	0;0;0;0;0	67.5;326.25	144
257	261	17	0	0	3	PATCH	9;10;11;12;13	0;0;0;0;0	191.25;213.7	145
257	261	18	0	0	3	PATCH	9;10;11;12;13	0;0;0;0;0	281.25;11.25	146
257	261	19	0	0	3	PATCH	9;10;11;12;13	0;0;0;0;0	56.25;213.75	147
257	261	20	0	0	3	PATCH	9;10;11;12;13	0;0;0;0;0	146.25;22.5	148
257	261	128	0	1	2	PATCH	2	0	0	0
257	261	129	0	1	2	PATCH	3	0	0	1
257	261	130	0	1	2	PATCH	4	0	0	2
257	261	131	0	1	2	PATCH	1	0	0	3
257	261	132	0	1	2	PATCH	5	0	0	4
257	261	133	0	1	2	PATCH	1;5	0;0	168.75;0	5

Figure 6. An example version of the antenna codebook.

Averaging the Power Density for MPE (sPD):

Qualcomm MG script performs spatial averaging needed to determine the MPE values from the power density simulation results over the 4 cm² area required by the FCC.



5 Uncertainty Budget for Simulation

Below is a table summarizing the budget of the uncertainty contributions of the numerical algorithm and of the rendering of the simulation setup. The table was filled using the IEC 62704-1, 2017 [3].

Table 2 – Preliminary budget of the uncertainty contributions of the numerical algorithm for the validation- or testing-setup

Uncertainty component	Probability distribution	Divisor $f(d, h)^1$	C_i^2	Uncertainty %
Mesh resolution	Normal	1	1	0.02
ABC	Normal	1	1	0.08
Power budget	Normal	1	1	0.26
Convergence	Rectangular	1,73	1	0.03
DUT dielectrics	Normal	1	1	4.89
Lossy conductors	Rectangular	1,73	1	0.03
Combined standard uncertainty ($k = 1$)				5.31

Note 1: The divisor is a function of the probability distribution and degrees of freedom (ν_i and ν_{eff}).

Note 2: c_i is the sensitivity coefficient that is applied to convert the variability of the uncertainty component into a variability of psPD.









6 Simulation vs. Measurement

The measured MPE and simulated MPE values for band n258 are summarized below in Table 3, with unit W/m^2 . The difference between simulated and measured MPE values is in dB. Simulated and measured point PD for different beams for n258 are shown in Figure 7. The comparison is performed as per guidelines in [4].

Beam ID	Ant Pol	Simulation (W/m^2)	Measurement (W/m^2)	Delta = Sim – Meas. (dB)
		S2	S2	S2
16	V	16.2	10.8	1.76
19	V	15.51	10.5	1.69
14	V	16.17	10.1	2.04
275	H	15.28	9.62	2.01
271	H	14.17	9.25	1.85
276	H	13.66	10.1	1.31

Table 3 - Simulated and measured n258 MPE (sPD) at 2 mm away from DUT.

Beam ID	Surface	Simulated Point PD	Measured Point PD	Print out from MG Script
275	S2			
	S3			

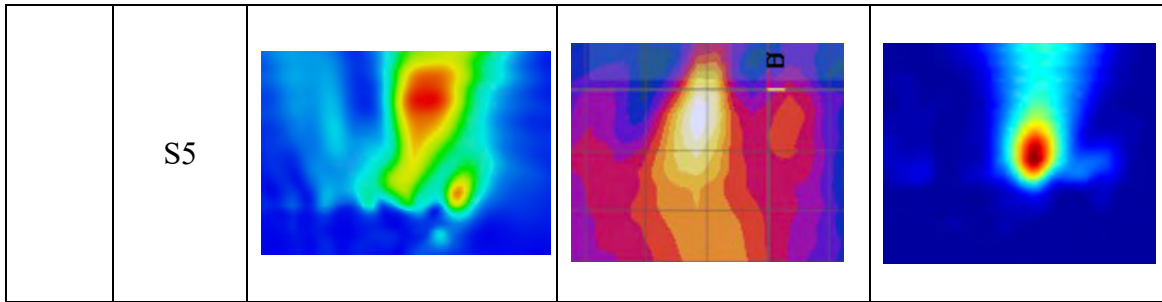








Figure 7. Simulated and measured point PD for different beams for n258.

Measured MPE and simulated MPE values for band n261 are summarized below in Table 4, with unit W/m^2 . The difference between simulated and measured MPE values is in dB. Simulated and measured point PD for different beams for n261 are shown in Figure 8.

Beam ID	Ant Pol	Simulation (W/m2)	Measurement (W/m2)	Delta = Sim – Meas. (dB)
		S2	S2	S2
20	V	19.86	12	11.1
15	V	20.07	12.6	9.52
19	V	18.03	9.2	11.4
271	H	17.47	13.6	12.7
276	H	17.00	13.1	12.3
269	H	16.38	14.2	13.3

Table 4 - Simulated and measured n261 MPE (sPD) at 2 mm away from DUT.

Beam ID	Surface	Simulated Point PD	Measured Point PD	Print out from MG Script
20	S2			
	S3			

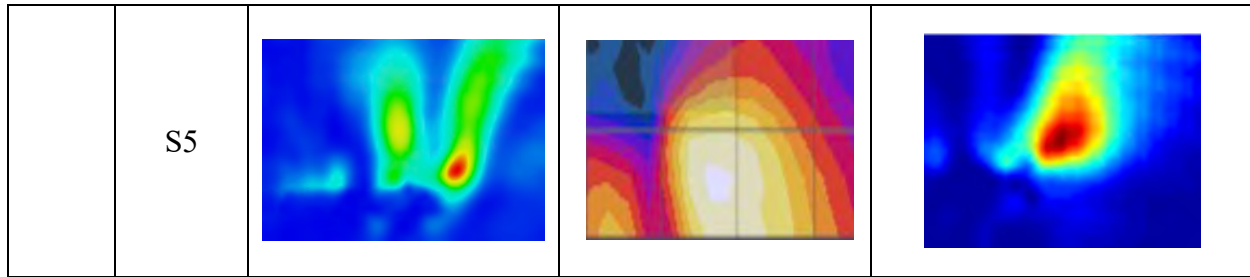


Figure 8. Simulated and measured point PD for different beams for n261.

Measured MPE and simulated MPE values for band n260 are summarized below in Table 5, with unit W/m². The difference between simulated and measured MPE values is in dB. Simulated and measured point PD for different beams for n260 are shown in Figure 9.

Beam ID	Ant Pol	Simulation (W/m ²)	Measurement (W/m ²)	Delta = Sim – Meas. (dB)
		S2	S2	S2
17	V	18.8	11.1	2.29
12	V	18.39	9.52	2.86
13	V	18.27	11.4	2.05
271	H	19.39	12.7	1.84
276	H	17.31	12.3	1.48
275	H	20.4	13.3	1.86

Table 5 – Simulated and measured n260 MPE (sPD) at 2 mm away from DUT.

Beam ID	Surface	Simulated Point PD	Measured Point PD	Print out from MG Script
17	S2			

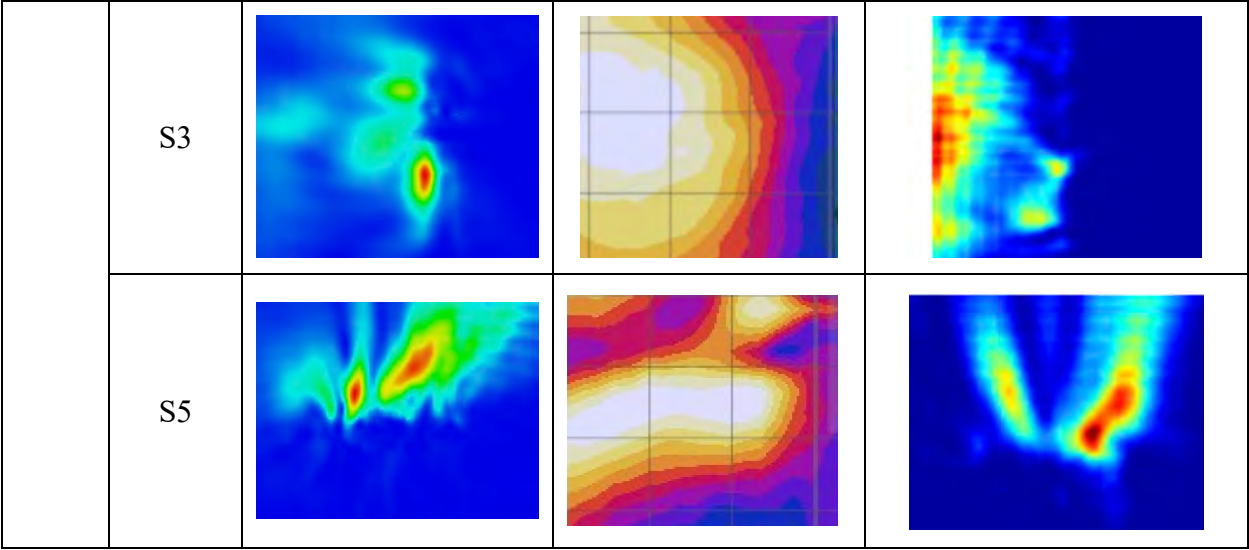


Figure 9. Simulated and measured point PD for different beams for n260.



Appendix A: Worst Phase Derivation for Beam Pair

For beam pairs, since the relative phase between two beams is unknown, so finding the worst-case PD by sweeping the relative phase for all possible angles is required for conservative assessments.

Assuming E-field and H-field for beam ID a are $\{E_x_a, E_y_a, E_z_a\}$ and $\{H_x_a, H_y_a, H_z_a\}$, respectively; for beam pair which is ID b is $\{E_x_b, E_y_b, E_z_b\}$ and $\{H_x_b, H_y_b, H_z_b\}$, respectively. The relative phase between beam a and b is θ , the combined E and H field after beam pairing is:

$$E_{x_pair_i}(\theta) = E_{x_a} + E_{x_b} \times e^{-j\omega\theta}$$

$$E_{y_pair_i}(\theta) = E_{y_a} + E_{y_b} \times e^{-j\omega\theta}$$

$$E_{z_pair_i}(\theta) = E_{z_a} + E_{z_b} \times e^{-j\omega\theta}$$

$$H_{x_pair_i}(\theta) = H_{x_a} + H_{x_b} \times e^{-j\omega\theta}$$

$$H_{y_pair_i}(\theta) = H_{y_a} + H_{y_b} \times e^{-j\omega\theta}$$

$$H_{z_pair_i}(\theta) = H_{z_a} + H_{z_b} \times e^{-j\omega\theta}$$

The combined PD can be calculated as:

$$PD_{x_pair_i}(\theta) = E_{y_pair_i}(\theta) \times H_{z_pair_i}(\theta)^* - E_{z_pair_i}(\theta) \times H_{y_pair_i}(\theta)^*$$

$$PD_{y_pair_i}(\theta) = E_{z_pair_i}(\theta) \times H_{x_pair_i}(\theta)^* - E_{x_pair_i}(\theta) \times H_{z_pair_i}(\theta)^*$$

$$PD_{z_pair_i}(\theta) = E_{x_pair_i}(\theta) \times H_{y_pair_i}(\theta)^* - E_{y_pair_i}(\theta) \times H_{x_pair_i}(\theta)^*$$

$$PD(\theta) = \frac{1}{2}[(\text{Re}(PD_{x_pair_i}(\theta)))^2 + (\text{Re}(PD_{y_pair_i}(\theta)))^2 + (\text{Re}(PD_{z_pair_i}(\theta)))^2]^{1/2}$$

Sweep θ from 0 degree to 360 degree to find the worst case beam pair. For more details, please refer to [4].



Appendix B: 4 cm² Averaging PD and Scaling Factor

4 cm² Averaging PD: The simulated sPD results for all three bands n258, n261 and band n260 are shown in tables a), b), and c) respectively.

a) Simulated sPD (W/m²) at 4 cm² averaging for n258.

Beam ID 1	Beam ID 2	4 cm ² sPD (W/m ²) at 6 dBm per port, n258								
		LB			MB			HB		
		S2	S3	S5	S2	S3	S5	S2	S3	S5
0		1.63	0.44	0.21	1.79	0.35	0.23	1.83	0.42	0.23
1		2.14	0.23	0.26	2.22	0.3	0.29	2.23	0.34	0.35
2		3.18	0.48	0.46	3.17	0.4	0.41	2.99	0.36	0.41
3		1.73	0.1	0.16	1.98	0.09	0.2	2.16	0.15	0.22
4		2.48	0.23	0.55	2.52	0.21	0.61	2.51	0.23	0.57
5		2.93	0.29	0.45	3.46	0.34	0.54	4.05	0.33	0.57
6		5.23	0.42	0.77	5.75	0.36	0.82	5.95	0.37	0.9
7		6.12	0.81	0.77	6.31	0.86	0.75	6.17	1	0.8
8		5.27	1.06	0.82	5.75	1.16	0.86	5.77	1.13	0.91
9		3.95	0.31	0.6	4.54	0.23	0.67	4.87	0.31	0.76
10		6.04	0.6	0.83	6.4	0.61	0.85	6.4	0.65	0.91
11		5.98	0.25	1.05	6.3	0.25	0.98	6.62	0.3	1.17
12		9.2	0.9	1.39	10.8	0.76	2.01	12.32	0.84	2.34
13		13.36	2.08	2.12	14.39	1.93	2.56	15.15	1.67	2.59
14		16.2	0.87	3.35	16.17	0.74	3.47	15.88	0.68	3.44
15		14.52	0.52	3.49	14.18	0.53	3.12	13.79	0.57	3.17
16		15.67	2.22	2.72	16.2	2.69	2.96	15.77	3.03	2.91
17		10.88	1.39	1.82	12.39	1.24	2.47	13.81	1.13	2.69
18		14.8	1.81	2.23	15.42	1.63	2.62	15.55	1.39	2.69
19		15.56	0.45	3.64	15.51	0.3	3.57	15.36	0.31	3.68
20		15.4	1.02	3.45	15.32	1.25	3.2	14.86	1.35	3.05
256		1.54	0.21	0.27	1.83	0.29	0.36	1.98	0.3	0.52
257		2.06	0.45	0.21	2.02	0.41	0.17	2.04	0.38	0.18
258		2.26	0.18	0.52	2.28	0.17	0.45	2.28	0.19	0.46
259		2.1	0.23	0.16	2.06	0.25	0.18	2.1	0.26	0.17
260		1.91	0.18	0.31	1.91	0.17	0.3	1.96	0.25	0.44
261		3.73	0.28	0.67	4.19	0.3	0.57	4.37	0.24	0.61
262		5.67	0.41	0.7	5.67	0.49	0.68	5.7	0.49	0.82
263		5.69	0.46	0.9	5.91	0.46	0.77	6.02	0.47	0.72
264		5.28	0.59	0.58	5.11	0.56	0.56	5.33	0.67	0.55
265		5.15	0.32	0.57	5.23	0.36	0.78	5.32	0.34	0.73
266		5.89	0.65	0.82	5.86	0.71	0.79	5.85	0.73	0.94
267		5.06	1.01	0.78	5.21	0.99	0.8	5.25	1	0.96



268		5.5	0.48	1.38	7.33	0.38	2.31	8.97	0.42	3.52
269		10.88	0.61	3.3	11.77	0.8	3.86	12.5	0.67	3.96
270		14.06	1.19	3.24	14.33	1.15	3.08	14.6	1.15	3.01
271		14.77	0.92	2.83	14.17	0.64	2.66	14.14	0.9	2.86
272		13.23	2.25	1.82	13.3	2.74	2.03	13.93	3.12	2.14
273		6.8	0.46	1.87	8.68	0.46	2.94	10.3	0.43	4.06
274		13.14	0.78	3.9	13.2	0.74	3.77	13.33	0.73	3.42
275		15.1	1.34	2.98	15.28	1.09	2.96	15.29	1.01	3.07
276		14.1	1.11	2.68	13.66	1.28	2.59	14.11	1.65	2.62
0	256	4.28	0.67	0.72	4.81	0.81	1.11	4.77	0.87	1.06
1	257	4.7	0.97	0.59	4.78	0.94	0.56	4.66	1.01	0.65
2	258	6.17	0.87	1.67	6.35	0.86	1.49	6.26	0.8	1.54
3	259	4.42	0.48	0.33	4.58	0.48	0.34	4.7	0.7	0.42
4	260	5.05	0.66	1.26	5.1	0.6	1.41	5.23	0.77	1.62
5	261	7.24	1	1.53	8.17	1.15	1.45	8.77	1.01	1.72
6	262	13.74	1.21	1.97	14.45	1.26	1.96	14.54	1.12	2.3
7	263	12.51	1.96	1.8	13.22	1.92	1.79	13.45	2.07	1.76
8	264	10.28	2.33	1.66	10.93	2.29	1.62	11.55	2.21	1.7
9	265	11.12	0.83	1.63	12.16	0.83	1.89	12.57	0.76	1.91
10	266	15.21	1.8	2.14	15.54	1.95	2.17	15.16	1.88	2.53
11	267	9.01	1.6	2.05	9.72	1.46	1.87	9.55	1.54	2.28
12	268	16.53	1.97	4.47	21.55	1.92	7.14	24.65	1.96	9.86
13	269	27.09	4.17	9.49	29.63	4.49	10.95	31.07	3.35	10.67
14	270	31.93	3.62	9.31	31.72	3.2	8.66	32.36	2.7	9
15	271	30.63	1.58	8.99	29.94	1.56	7.95	28.72	2.3	8.35
16	272	32.12	5.44	5.93	33.11	6.32	6.53	33.09	7.4	6.54
17	273	19.51	2.82	6.17	24.78	2.76	9.07	27.83	2.19	11.2
18	274	30.61	3.86	10.07	31.01	4.01	9.92	31.28	3.06	9.4
19	275	32.08	2.78	9.36	32.25	1.96	8.44	32.63	1.69	9.18
20	276	31.3	2.56	8.41	30.2	2.79	7.82	30.98	3.22	7.39

b) Simulated sPD (W/m^2) at 4 cm^2 averaging for n261.

Beam ID 1	Beam ID 2	4 cm^2 sPD (W/m^2) at 6 dBm per port, n261								
		LB			MB			HB		
		S2	S3	S5	S2	S3	S5	S2	S3	S5
0		2.73	0.58	0.34	2.81	0.64	0.36	2.78	0.62	0.35
1		2.54	0.36	0.35	2.59	0.46	0.34	2.57	0.61	0.31
2		2.54	0.41	0.56	2.61	0.47	0.64	2.68	0.52	0.55
3		2.85	0.37	0.25	2.96	0.39	0.21	2.84	0.35	0.2
4		3.52	0.48	0.75	3.6	0.45	0.68	3.6	0.48	0.65
5		5.5	0.24	1.01	5.36	0.46	1.07	5.25	0.63	0.85
6		6.12	0.26	0.96	6.37	0.37	0.97	6.45	0.43	0.95
7		7.29	1.36	0.98	7.62	1.71	1.01	7.29	1.93	1.04



8		4.39	1.4	0.85	4.52	1.57	0.79	4.5	1.57	0.68
9		5.94	1.06	0.99	6.42	0.96	0.95	6.44	0.79	0.91
10		8.39	0.34	1.39	8.46	0.28	1.1	8	0.37	1.01
11		7.28	0.94	1.11	7.55	0.97	1.04	7.72	0.99	1.09
12		13.31	1.58	1.72	14.03	1.62	1.96	15.55	1.27	2.24
13		16.93	1.22	3.25	16.27	0.95	3.48	16.1	0.81	3.38
14		17.32	1.06	4.05	17.81	0.95	4	17.64	0.69	3.87
15		19.09	2.67	3.64	20.07	3.13	3.51	20.12	3.63	3.97
16		17.75	6.45	3.18	17.95	6.66	3.56	17.33	7.37	2.89
17		16.76	0.83	2.14	16.92	0.79	2.48	17.27	0.63	2.72
18		17.13	1.51	3.82	17.42	1.38	3.83	17.28	1.12	3.54
19		18.05	0.63	4.72	18.03	0.82	4.55	18.48	0.78	4.25
20		18.82	5.37	3.47	19.86	6.05	3.76	19.3	6.92	3.63
256		2.73	0.43	0.38	2.64	0.37	0.41	2.59	0.29	0.49
257		2.24	0.5	0.26	2.23	0.57	0.3	2.2	0.55	0.26
258		2.79	0.31	0.65	2.72	0.38	0.62	2.73	0.41	0.66
259		2.86	0.41	0.24	3.04	0.38	0.29	3.02	0.3	0.3
260		2.58	0.3	0.65	2.24	0.25	0.57	2.14	0.26	0.55
261		5.5	0.4	0.89	5.7	0.41	0.9	5.56	0.36	0.83
262		6.31	0.3	1.25	6.55	0.3	1.03	6.59	0.21	1.09
263		7.21	1.35	1.01	6.58	1.32	0.99	5.78	1.08	0.93
264		5.35	1.54	0.83	5.06	1.56	0.95	4.36	1.41	0.94
265		4.83	0.41	0.68	4.58	0.51	0.83	4.9	0.41	0.94
266		6.49	0.4	1.13	6.58	0.44	1	6.48	0.31	0.97
267		6.37	0.94	0.98	5.93	0.82	1.07	5.69	0.8	1.07
268		12.93	0.46	4.72	13.43	0.31	4.87	14.42	0.4	5.38
269		16.32	1.05	2.81	16.38	1.06	2.55	16.29	0.85	2.59
270		14.91	1.43	3	14.7	1.45	3.22	15.13	1.1	3.26
271		17.76	2.63	3.49	17.47	3.01	3.37	16.57	3.14	3.24
272		15.96	5.52	2.17	14.95	5.12	2.32	13.88	4.72	2.41
273		16.19	0.8	4.28	16.76	0.69	4.13	17.26	0.61	3.93
274		15.72	1.04	2.95	15.51	0.94	3.28	15.88	0.63	3.33
275		15.14	1.2	3.28	15.25	1.23	3.45	15.28	1.2	3.38
276		18.08	5.03	2.7	17	4.92	2.73	15.9	4.72	2.54
0	256	6.05	1.29	1.16	6.27	1.49	1.15	6.33	1.33	1.29
1	257	5.61	1.22	0.72	5.35	1.4	0.82	5.25	1.47	0.76
2	258	5.74	0.79	2.1	6.12	0.96	2.15	6.21	0.89	1.99
3	259	6.39	1.08	0.64	6.76	0.97	0.65	6.36	1	0.77
4	260	6.83	1.19	2.38	6.51	0.96	2.23	6.5	1.12	1.9
5	261	11.9	0.92	2.71	12.07	1.23	2.75	12.2	1.38	2.36
6	262	11.52	0.75	2	11.81	0.95	1.92	12.08	0.74	2.1
7	263	15.7	3.67	2.67	15.61	4.33	2.8	14.59	4.28	2.76
8	264	10.13	4.25	1.78	9.92	4.92	1.89	9.29	4.83	2.12
9	265	10.87	2.52	2.09	11.65	2.58	2.22	12.14	1.94	2.21
10	266	17.34	1.25	4.09	17.01	1.02	3.45	16.74	0.81	3.29



11	267	15.82	2.36	3.23	15.41	2.43	3.28	15.76	2.59	3.38
12	268	31.55	2.41	10.43	32.58	2.86	11.48	34.85	2.56	12.69
13	269	36.49	2.46	8.9	36.55	2.61	8.67	35.76	2.26	8.12
14	270	36.46	4.07	10.08	36.44	4.02	10.99	36.61	2.86	10.8
15	271	40.7	6.03	10.78	41.38	7.07	10.24	41.13	7.53	11
16	272	37.31	13.6	7.35	36.94	14.5	8.71	37.5	15.48	7.12
17	273	40.53	2.24	10.48	40.1	1.86	10.75	39.37	1.75	11.12
18	274	36.21	4.06	9.62	36.23	3.88	9.35	36.42	2.72	8.91
19	275	36.81	2.44	12.29	36.66	2.69	12.65	37.03	2.74	11.88
20	276	40.41	11.6	8.56	40.05	11.6	9.1	39.86	11.9	9.01

c) Simulated sPD (W/m²) at 4 cm² averaging for n260.

Beam ID 1	Beam ID 2	4 cm ² sPD (W/m ²) at 6 dBm per port, n260								
		LB			MB			HB		
		S2	S3	S5	S2	S3	S5	S2	S3	S5
0		2.45	0.82	0.24	3.24	1.08	0.37	3.26	0.88	0.31
1		2.33	0.36	0.36	3.01	0.39	0.37	2.72	0.43	0.43
2		2.31	0.26	0.59	3.07	0.34	0.74	2.95	0.33	0.72
3		2.47	0.37	0.2	3.56	0.35	0.22	3.53	0.34	0.35
4		3.09	0.19	0.49	3.78	0.2	0.68	3.45	0.2	0.77
5		5.43	0.89	0.32	6.93	0.82	0.59	6.91	0.78	0.75
6		4.67	0.21	1.41	6.44	0.34	1.49	5.81	0.38	1.49
7		4.54	0.64	1.15	6.36	0.44	1.27	6.76	0.3	1.32
8		4.08	1.71	0.74	4.53	1.88	0.96	4.36	1.47	1.04
9		4.91	0.75	0.41	7.23	1.1	0.66	7.18	1.13	0.61
10		4.82	0.34	1.12	7.12	0.24	1.29	7.39	0.2	1.25
11		5.24	0.45	1.05	6.56	0.59	1.24	6	0.55	1.51
12		13.66	3.13	0.5	18.39	4.47	1.23	17.3	5.68	1.25
13		11.96	0.85	0.86	18.27	0.69	1.68	18.1	0.91	1.57
14		10.94	0.87	3.13	15.86	1.05	3.48	16.19	0.9	3.38
15		12.64	1.45	3.62	14.64	1.28	4.17	14.29	0.91	3.71
16		7.39	4.41	1.07	8	3.48	2.19	9.1	3.23	2.18
17		13.22	1.4	0.49	18.8	1.92	1.4	17.8	3.19	1.42
18		10.96	0.77	1.66	16.83	0.86	2.44	17.21	0.9	2.08
19		13.06	1.12	4.28	15.95	1.2	4.42	15.55	1.35	3.82
20		7.58	2.66	1.63	10.76	2.22	3.17	11.99	1.96	3.1
256		2.73	0.73	0.27	2.89	0.57	0.33	3.06	0.71	0.32
257		2.19	0.3	0.35	3.25	0.31	0.45	2.81	0.28	0.43
258		2.25	0.25	0.53	3.27	0.34	0.61	3.16	0.31	0.61
259		2.7	0.22	0.2	3.76	0.26	0.31	3.69	0.21	0.35
260		2.72	0.15	0.53	4.07	0.16	0.49	3.66	0.17	0.56
261		4.52	1.25	0.9	5.18	1.3	0.86	4.81	1.34	0.64
262		5.4	0.24	0.64	8.11	0.28	0.94	7.24	0.35	1.25
263		4.81	0.72	0.45	7.03	0.71	0.46	7.27	0.57	0.68
264		3.87	0.88	0.82	5.93	0.96	0.72	5.46	0.8	0.61



265		5.41	0.48	0.91	8.01	0.56	1.31	7.54	0.5	1.52
266		5.62	0.13	0.65	9.35	0.09	0.67	8.81	0.12	0.89
267		4.67	1.33	0.64	5.35	1.12	0.44	5.56	1.23	0.47
268		12.18	1.43	3.01	15.53	2.07	3.86	13.86	2.67	3.39
269		10.63	0.78	2.54	17.43	0.64	3.49	16.13	0.61	3.68
270		12.53	1.2	1.14	19.63	0.63	1.98	18.1	0.67	2.76
271		13.72	1.3	1.07	19.39	0.98	1.01	18.67	1.13	1.24
272		6.48	2.92	1.28	10.8	3.01	0.91	13.28	2.48	0.81
273		11.09	0.78	2.81	17.43	0.7	3.77	16.07	0.74	3.93
274		11.1	0.51	1.99	17.87	0.55	2.87	16.1	0.66	3.41
275		14.28	1.52	0.8	20.4	0.72	1.31	19	1.16	1.76
276		11.91	1.7	1.36	17.31	1.37	0.96	18.29	1.24	0.95
0	256	6.3	2.05	0.67	6.46	2.24	0.87	6.67	2.36	0.77
1	257	6.95	0.66	0.97	7.05	0.75	0.85	5.91	0.6	1.14
2	258	7.12	0.6	1.75	6.84	0.76	1.96	6.13	0.71	1.91
3	259	8.06	0.74	0.38	8.45	0.7	0.65	7.89	0.55	0.92
4	260	7.99	0.37	1.43	8.38	0.49	1.84	7.45	0.51	2.14
5	261	8.93	2.35	1.25	10.88	1.87	1.35	11.37	2.26	1.3
6	262	13.68	0.48	2.72	14.7	0.58	2.94	13.42	0.67	3.28
7	263	12.74	1.31	2.05	14.9	1.15	2.5	14.61	1.01	2.59
8	264	8.47	3.23	1.81	10.95	3.29	2.01	9.78	2.61	1.65
9	265	9.25	1.34	1.42	13.22	1.52	1.96	13.12	1.84	1.97
10	266	14.58	0.7	2.35	17.13	0.36	1.92	16.37	0.41	2.22
11	267	8.41	2.07	1.38	10.54	1.8	1.38	10.34	2.1	1.64
12	268	37.06	3.9	4.75	36.54	6.78	5.35	33.58	8.27	5.21
13	269	39.19	1.73	5.9	38.05	1.59	6.83	35.64	2.17	6.9
14	270	40.1	3.13	6.59	37.44	2.4	7.53	35.81	2.25	8.97
15	271	33.54	3.14	5.74	37.5	3	5.73	34.86	2.52	6.23
16	272	14.05	8.21	3.34	19.4	7.54	3.27	24.38	6.73	3.77
17	273	37.94	1.99	4.86	38.01	2.79	6.13	35.22	4.75	6.63
18	274	39.79	1.66	6.43	36.7	1.85	7.79	34.75	2.05	8.09
19	275	38.47	3.97	7.18	38.9	2.56	7.26	35.46	3.43	7.85
20	276	22.89	4.53	3.53	29.7	4.79	4.76	31.63	3.44	4.44

Scaling factor calculation:

The simulated scaling factor results for all three bands n258, n261 and band n260 are shown in tables a), b), and c) respectively. The scaling factor is defined as the MPE internal design limit (5 W/m²) divided by the simulated averaged power density.

a) Scaling factor for n258

Beam ID 1	Beam ID 2	S LB	S MB	S HB	S
0		3.07	2.79	2.73	2.73
1		2.34	2.25	2.24	2.24
2		1.57	1.58	1.67	1.57
3		2.89	2.53	2.31	2.31
4		2.02	1.98	1.99	1.98
5		1.71	1.45	1.23	1.23
6		0.96	0.87	0.84	0.84
7		0.82	0.79	0.81	0.79
8		0.95	0.87	0.87	0.87



9		1.27	1.1	1.03	1.03
10		0.83	0.78	0.78	0.78
11		0.84	0.79	0.76	0.76
12		0.54	0.46	0.41	0.41
13		0.37	0.35	0.33	0.33
14		0.31	0.31	0.31	0.31
15		0.34	0.35	0.36	0.34
16		0.32	0.31	0.32	0.31
17		0.46	0.4	0.36	0.36
18		0.34	0.32	0.32	0.32
19		0.32	0.32	0.33	0.32
20		0.32	0.33	0.34	0.32
256		3.25	2.73	2.53	2.53
257		2.43	2.48	2.45	2.43
258		2.21	2.19	2.19	2.19
259		2.38	2.43	2.38	2.38
260		2.62	2.62	2.55	2.55
261		1.34	1.19	1.14	1.14
262		0.88	0.88	0.88	0.88
263		0.88	0.85	0.83	0.83
264		0.95	0.98	0.94	0.94
265		0.97	0.96	0.94	0.94
266		0.85	0.85	0.85	0.85
267		0.99	0.96	0.95	0.95
268		0.91	0.68	0.56	0.56
269		0.46	0.42	0.4	0.4
270		0.36	0.35	0.34	0.34
271		0.34	0.35	0.35	0.34
272		0.38	0.38	0.36	0.36
273		0.74	0.58	0.49	0.49
274		0.38	0.38	0.38	0.38
275		0.33	0.33	0.33	0.33
276		0.35	0.37	0.35	0.35
0	256	1.17	1.04	1.05	1.04
1	257	1.06	1.05	1.07	1.05
2	258	0.81	0.79	0.8	0.79
3	259	1.13	1.09	1.06	1.06
4	260	0.99	0.98	0.96	0.96
5	261	0.69	0.61	0.57	0.57
6	262	0.36	0.35	0.34	0.34
7	263	0.4	0.38	0.37	0.37
8	264	0.49	0.46	0.43	0.43
9	265	0.45	0.41	0.4	0.4
10	266	0.33	0.32	0.33	0.32
11	267	0.55	0.51	0.52	0.51
12	268	0.3	0.23	0.2	0.2
13	269	0.18	0.17	0.16	0.16
14	270	0.16	0.16	0.15	0.15
15	271	0.16	0.17	0.17	0.16



16	272	0.16	0.15	0.15	0.15
17	273	0.26	0.2	0.18	0.18
18	274	0.16	0.16	0.16	0.16
19	275	0.16	0.16	0.15	0.15
20	276	0.16	0.17	0.16	0.16

b) Scaling factor for n261

Beam ID 1	Beam ID 2	S LB	S MB	S HB	S
0		1.83	1.78	1.8	1.78
1		1.97	1.93	1.95	1.93
2		1.97	1.92	1.87	1.87
3		1.75	1.69	1.76	1.69
4		1.42	1.39	1.39	1.39
5		0.91	0.93	0.95	0.91
6		0.82	0.78	0.78	0.78
7		0.69	0.66	0.69	0.66
8		1.14	1.11	1.11	1.11
9		0.84	0.78	0.78	0.78
10		0.6	0.59	0.63	0.59
11		0.69	0.66	0.65	0.65
12		0.38	0.36	0.32	0.32
13		0.3	0.31	0.31	0.3
14		0.29	0.28	0.28	0.28
15		0.26	0.25	0.25	0.25
16		0.28	0.28	0.29	0.28
17		0.3	0.3	0.29	0.29
18		0.29	0.29	0.29	0.29
19		0.28	0.28	0.27	0.27
20		0.27	0.25	0.26	0.25
256		1.83	1.89	1.93	1.83
257		2.23	2.24	2.27	2.23
258		1.79	1.84	1.83	1.79
259		1.75	1.64	1.66	1.64
260		1.94	2.23	2.34	1.94
261		0.91	0.88	0.9	0.88
262		0.79	0.76	0.76	0.76
263		0.69	0.76	0.87	0.69
264		0.93	0.99	1.15	0.93
265		1.04	1.09	1.02	1.02
266		0.77	0.76	0.77	0.76
267		0.78	0.84	0.88	0.78
268		0.39	0.37	0.35	0.35
269		0.31	0.31	0.31	0.31
270		0.34	0.34	0.33	0.33
271		0.28	0.29	0.3	0.28
272		0.31	0.33	0.36	0.31
273		0.31	0.3	0.29	0.29
274		0.32	0.32	0.31	0.31



275		0.33	0.33	0.33	0.33
276		0.28	0.29	0.31	0.28
0	256	0.83	0.8	0.79	0.79
1	257	0.89	0.93	0.95	0.89
2	258	0.87	0.82	0.81	0.81
3	259	0.78	0.74	0.79	0.74
4	260	0.73	0.77	0.77	0.73
5	261	0.42	0.41	0.41	0.41
6	262	0.43	0.42	0.41	0.41
7	263	0.32	0.32	0.34	0.32
8	264	0.49	0.5	0.54	0.49
9	265	0.46	0.43	0.41	0.41
10	266	0.29	0.29	0.3	0.29
11	267	0.32	0.32	0.32	0.32
12	268	0.16	0.15	0.14	0.14
13	269	0.14	0.14	0.14	0.14
14	270	0.14	0.14	0.14	0.14
15	271	0.12	0.12	0.12	0.12
16	272	0.13	0.14	0.13	0.13
17	273	0.12	0.12	0.13	0.12
18	274	0.14	0.14	0.14	0.14
19	275	0.14	0.14	0.14	0.14
20	276	0.12	0.12	0.13	0.12

c) *Scaling factor for n260*

Beam ID 1	Beam ID 2	S LB	S MB	S HB	S
0		2.04	1.54	1.53	1.53
1		2.15	1.66	1.84	1.66
2		2.16	1.63	1.69	1.63
3		2.02	1.4	1.42	1.4
4		1.62	1.32	1.45	1.32
5		0.92	0.72	0.72	0.72
6		1.07	0.78	0.86	0.78
7		1.1	0.79	0.74	0.74
8		1.23	1.1	1.15	1.1
9		1.02	0.69	0.7	0.69
10		1.04	0.7	0.68	0.68
11		0.95	0.76	0.83	0.76
12		0.37	0.27	0.29	0.27
13		0.42	0.27	0.28	0.27
14		0.46	0.32	0.31	0.31
15		0.4	0.34	0.35	0.34
16		0.68	0.63	0.55	0.55
17		0.38	0.27	0.28	0.27
18		0.46	0.3	0.29	0.29
19		0.38	0.31	0.32	0.31
20		0.66	0.46	0.42	0.42
256		1.83	1.73	1.63	1.63
257		2.28	1.54	1.78	1.54



258		2.22	1.53	1.58	1.53
259		1.85	1.33	1.36	1.33
260		1.84	1.23	1.37	1.23
261		1.11	0.97	1.04	0.97
262		0.93	0.62	0.69	0.62
263		1.04	0.71	0.69	0.69
264		1.29	0.84	0.92	0.84
265		0.92	0.62	0.66	0.62
266		0.89	0.53	0.57	0.53
267		1.07	0.93	0.9	0.9
268		0.41	0.32	0.36	0.32
269		0.47	0.29	0.31	0.29
270		0.4	0.25	0.28	0.25
271		0.36	0.26	0.27	0.26
272		0.77	0.46	0.38	0.38
273		0.45	0.29	0.31	0.29
274		0.45	0.28	0.31	0.28
275		0.35	0.25	0.26	0.25
276		0.42	0.29	0.27	0.27
0	256	0.79	0.77	0.75	0.75
1	257	0.72	0.71	0.85	0.71
2	258	0.7	0.73	0.82	0.7
3	259	0.62	0.59	0.63	0.59
4	260	0.63	0.6	0.67	0.6
5	261	0.56	0.46	0.44	0.44
6	262	0.37	0.34	0.37	0.34
7	263	0.39	0.34	0.34	0.34
8	264	0.59	0.46	0.51	0.46
9	265	0.54	0.38	0.38	0.38
10	266	0.34	0.29	0.31	0.29
11	267	0.59	0.47	0.48	0.47
12	268	0.13	0.14	0.15	0.13
13	269	0.13	0.13	0.14	0.13
14	270	0.12	0.13	0.14	0.12
15	271	0.15	0.13	0.14	0.13
16	272	0.36	0.26	0.21	0.21
17	273	0.13	0.13	0.14	0.13
18	274	0.13	0.14	0.14	0.13
19	275	0.13	0.13	0.14	0.13
20	276	0.22	0.17	0.16	0.16



Appendix C: MPE (sPD) Simulation Using New Guideline from Qualcomm

Since only single antenna array is used next generation iPhone the guidance regarding Smart-TX GEN2 is not fully applicable. However, guidelines relevant to the single antenna array simulations are still retained.

C.1 Changes in Modeling Approach Using Smart-Tx GEN2

Simulation model needs to be large enough to include an antenna module located inside the EUT. Additionally, the simulation domain needs to be sufficiently large for “Qualcomm MG Script” to extract valid E- and H-fields from all adjacent exposure surfaces of the EUT extended by at least 35 mm in all directions. To accomplish this, recommended setting in CST design studio for the “radiation boundary” is at least 40 mm away from EUT to well contain all adjacent exposure surfaces (S1~S6 in Figure 2).

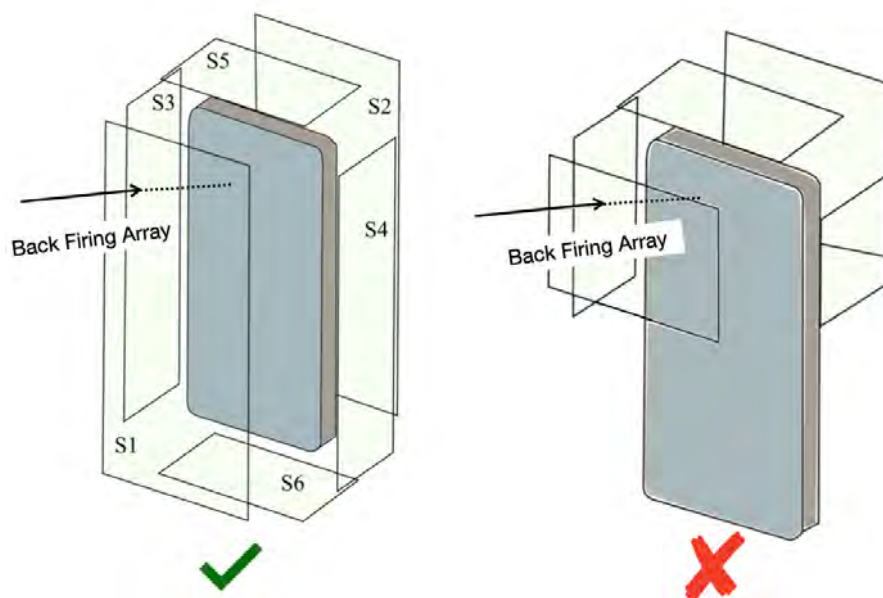


Figure C.2. Simulation model examples.

C.2 GEN2 PD Generation Using Qualcomm MG Script

Use “Qualcomm MG script” to extract E- and H-fields from the validated simulation and to assess the mutual coupling between all the mmW modules and all the beams in the codebook to determine the backoff value for each mmW module. Note the assessment and backoff value derivation are automated with “Qualcomm MG script”. Once the script is done with assessment, it will provide the *sim.power_{limit}* (backoff is already included) for all the beams for all three channels for the specified *sPD_{design_target}*.



C.3 Additional Verifications for GEN2

The sPD for GEN2 cannot be finalized until the additional verifications described in this section are performed and passed. The below steps are followed for verifications in the mid channel.

VERIFICATION 1: Use “Qualcomm MG script” to print the sPD plots for all the beams selected and evaluated for model validation. Compare the printed sPD plot to the corresponding simulated/measured sPD, the printed sPD distributions should match the simulated sPD distributions as shown in Figure 7, 8 and 9 to verify that “Qualcomm MG script” is properly used.

VERIFICATION 2: “Qualcomm MG script” identifies the worst-case 4cm^2 sPD and its location (x,y,z) . This worst-case 4cm^2 sPD is maximum 4cm^2 sPD value out of all exposure surfaces when assuming the worst beam from an antenna module is active. As only single antenna module is used the *contribution factors* are not calculated. However, for the worst beam at given location sPD can be evaluated using CST (or other EM simulation tool). In this report, the verification is completed when sPD values using MG script and CST are within 2% of numerical tolerance.

VERIFICATION 3: Measure power density for the beam identified by “Qualcomm MG script” on their corresponding worst surfaces. Set the device in FTM mode, the sPD measurement should be performed at the reference power level with CW modulation. Scale the measured sPD to obtain 4cm^2 *sPD(i)* for beam *i* at the *sim.power.limit*. Demonstrate that the measured *sPD sim.power.limit* is less than or equal to *sPD_design_target* within the uncertainty at reference power level.

For the iPhone, which contains the back firing antenna module, the following verifications are for n258, n261 and n260, respectively.

1) Band n258

“Qualcomm MG script” identifies the worst-case beam 16. The script prints below information corresponding to the identified worst-case 4cm^2 sPD:

- the worst location coordinates (x, y, z) in meter = $(-0.01850, 0.05750, -0.01339)$
- the worst-surface = S2 (back surface, see Figure C.2)
- the worst-sPD = 16.20 W/m^2
- *sim.power.limit* at worst-case beam = 0.9 dBm

As shown in Table C.1, the printed *sPD* matches the simulated *sPD* factor within 2%, and the *normalized combined sPD* is less than 1.0. Thus, the verification 2 is completed for this program.

As shown in Table C.2, the measured *sPD* at the worst location $\leq$ *sPD_design_target* uncertainty at reference power level. Thus, the verification 3 is completed for this program.

**Table C.1** - sPD from Qualcomm MG script and from CST for a worst case beam.

Worse-case surface		S2 (Back surface)
Worst-case location (x,y,z) in meters		(-0.01850, 0.05750, -0.01339)
sPD_design_target (W/m ²)		5
Value printed by MG Script		Value by EM tool
Beam ID 16	MG script sPD (W/m ²)	Simulated 4cm ² sPD (W/m ²)
	16.20	16.1965
Verify	MG script $sPD \approx$ Simulated 4cm ² sPD	

Table C.2: Measured 4cm² sPD on worst surface and beam for device with a single antenna module.

Module#	Beam ID	Dominant Surface	Measured 4cm ² sPD at <i>sim.power.limit</i> on dominant surface (W/m ²)
0	16	S2 (Back)	3.34
sPD_design_target + uncertainty at reference power level of 1 dB			$= 5 * 10^{(+1/10)} = 6.3 \text{ W/m}^2$
Verify			Measured worst case 4cm ² $sPD < sPD_design_target$ + uncertainty at reference power level

2) Band n261

“Qualcomm MG script” identifies the worst-case beam 15. The script prints below information corresponding to the identified worst-case 4cm² sPD :

- the worst location coordinates (x, y, z) in meter = (-0.01850, 0.05650, -0.01339)
- the worst-surface = S2 (back surface, see Figure C.2)
- the worst- $sPD = 20.07 \text{ W/m}^2$
- *sim.power.limit* at worst-case beam = -0.04 dBm



As shown in Table C.3, the printed *sPD* matches the simulated *sPD* factor within 2%, and the *normalized combined sPD* is less than 1.0. Thus, the verification 2 is completed for this program.

As shown in Table C.4, the measured *sPD* at the worst location $\leq sPD_design_target$ uncertainty at reference power level. Thus, the verification 3 is completed for this program.

Table C.3 - *sPD* from Qualcomm MG script and from CST for worst case.

Worse-case surface		S2 (Back surface)
Worst-case location (x,y,z) in meters		(-0.01850, 0.05650, -0.01339)
<i>sPD_design_target</i> (W/m ²)		5
Value printed by MG Script		Value by EM tool
Beam ID 15	MG script <i>sPD</i> (W/m ²)	Simulated 4cm ² <i>sPD</i> (W/m ²)
	20.07	20.0673
Verify	MG script <i>sPD</i> $\approx$ Simulated 4cm ² <i>sPD</i>	

Table C.4 - Measured 4cm² *sPD* on worst surface and beam for device with a single antenna module.

Module#	Beam ID	Dominant Surface	Measured 4cm ² <i>sPD</i> at <i>sim.power.limit</i> on dominant surface (W/m ²)
0	15	S2 (Back)	3.14
<i>sPD_design_target</i> + uncertainty at reference power level of 1 dB			$= 5 * 10^{(+1/10)} = 6.3 \text{ W/m}^2$
Verify			Measured worst case 4cm ² <i>sPD</i> < <i>sPD_design_target</i> + uncertainty at reference power level



3) Band n260

“Qualcomm MG script” identifies the worst-case beam 275. The script prints below information corresponding to the identified worst-case 4cm² sPD:

- the worst location coordinates (x, y, z) in meter = (-0.01250, 0.05050, -0.01339)
- the worst-surface = S2 (back surface, see Figure C.2)
- the worst-sPD = 20.40 W/m²
- *sim.power.limit* at worst-case beam = -0.11 dBm

As shown in Table C.5, the printed sPD matches the simulated sPD factor within 2%, and the *normalized combined sPD* is less than 1.0. Thus, the verification 2 is completed for this program.

As shown in Table C.6, the measured sPD at the worst location $\leq$ sPD_{design_target} uncertainty at reference power level. Thus, the verification 3 is completed for this program.

Table C.5 - sPD from Qualcomm MG script and from CST for worst case beam.

Worse-case surface		S2 (Back surface)
Worst-case location (x,y,z) in meters		(-0.01250, 0.05050, -0.01339)
sPD _{design_target} (W/m ²)		5
Value printed by MG Script		Value by EM tool
Beam ID 275	MG script sPD (W/m ²)	Simulated 4cm ² sPD (W/m ²)
	20.40	20.4012
Verify	MG script sPD $\approx$ Simulated 4cm ² sPD	

Table C.6 - Measured 4cm² sPD on worst surface and beam for device with a single antenna module.

Module#	Beam ID	Dominant Surface	Measured 4cm ² sPD at <i>sim.power.limit</i> on dominant surface (W/m ²)
0	275	S2 (Back)	3.26
sPD _{design_target} + uncertainty at reference power level of 1 dB			$= 5 * 10^{(+1/10)} = 6.3 \text{ W/m}^2$



Verify	Measured worst case 4cm ² SPD < <i>SPD_design_target</i> + uncertainty at reference power level
--------	--



References

1. *Qualcomm Module Group (MG) Script Rev B User Guide.*
2. S. Pfeifer , E. Carrasco, P. Crespo-Valero, E. Neufeld, S. Kuhn, T. Samaras, A. Christ, M. H. Capstick, and N. Kuster, “*Total field reconstruction in the near field using pseudo-vector E-field measurement,*” IEEE Trans. Electromagnetic Compatibility, vol. 61, no. 2, pp. 476–486, Apr. 2019.
3. IEC/IEEE 62704-1:2017 “*Determining the peak spatial-average specific absorption rate (SAR) in the human body from wireless communications devices, 30 MHz to 6 GHz - Part 1: General requirements for using the finite difference time-domain (FDTD) method for SAR calculations*”
4. *5G mmW NR Enabled QRD SAR Char and PD Char for Qualcomm Smart Transmit PD Char Requirements for 2nd Generation of Smart Transmit (GEN2).*