



FCC RF - TEST REPORT

Report Number : **68.910.22.0002.01** Date of Issue: 2022-02-18

Model : SP-10A

Product Type : Smart Pillow

Applicant : Xiamen WayLink Technology Co., LTD.

Address : 108# Tian 'an Road, Jimei District, 361021 Xiamen city,
PEOPLE'S REPUBLIC OF CHINA

Manufacturer : Xiamen WayLink Technology Co., LTD.

Address : 108# Tian 'an Road, Jimei District, 361021 Xiamen city,
PEOPLE'S REPUBLIC OF CHINA

Test Result : **Positive** **Negative**

Total pages including Appendices : 36

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.



1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment under Test.....	4
4	Summary of Test Standards	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Test Setups.....	8
8	Systems test configuration.....	9
9	Technical Requirement.....	10
9.1	Conducted Emission.....	10
9.2	Conducted output power.....	13
9.3	6dB bandwidth.....	15
9.4	99% bandwidth	17
9.5	Power spectral density.....	19
9.6	Spurious RF conducted emissions	21
9.7	Band edge	26
9.8	Spurious radiated emissions for transmitter.....	28
10	Test Equipment List	35
11	System Measurement Uncertainty.....	36

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu, Nantou, Nanshan District, Shenzhen, 518052 China

FCC Designation Number: CN5009

FCC Registration No.: 514049

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

3 Description of the Equipment under Test

Product:	Smart Pillow
Model no.:	SP-10A
FCC ID:	2A32YSP-10A
Rating:	Powered by DC 5V, 1000mA external adapter Adapter Model: CT-088 Input: AC 100-240V, 50/60Hz, Max 0.15A Output: DC 5V, 1000mA
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	40
Modulation:	GFSK
Antenna Type:	Internal antenna
Antenna Ports	Ant 1
Antenna Gain:	-3dBi Max for 2.4GHz
Description of the EUT:	The equipment supports Bluetooth Low Energy functions (1Mbps data rate). The TX and RX range is 2402MHz-2480MHz for Bluetooth.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2021 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10 (2013).

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C			
Test Condition		Test Result	Test Site
§15.207	Conducted emission AC power port	Pass	Site 1
§15.247 (b) (3)	Conducted output power	Pass	Site 1
§15.247(e)	Power spectral density	Pass	Site 1
§15.247(a)(2)	6dB bandwidth	Pass	Site 1
§15.247(a)(1)	20dB Occupied bandwidth	N/A	--
§15.247(a)(2)	99% Occupied Bandwidth	Pass	Site 1
§15.247(a)(1)	Carrier frequency separation	N/A	--
§15.247(a)(1)(iii)	Number of hopping frequencies	N/A	--
§15.247(a)(1)(iii)	Dwell Time	N/A	--
§15.247(d)	Spurious RF conducted emissions	Pass	Site 1
§15.247(d)	Band edge	Pass	Site 1
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	Pass	Site 1
§15.203	Antenna requirement	Pass See note 2	--

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an integrated antenna, which gain is -3dBi Max for 2.4GHz. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.



6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2A32YSP-10A, complies with 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C

SUMMARY:

All tests according to the regulations cited on page 6 were

- Performed

- **Not** Performed

The Equipment under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: 2021-12-15

Testing Start Date: 2021-12-20


Testing End Date: 2021-12-22

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch –

Reviewed by:

Prepared by:

Tested by:



Jessie He
Project Manager


Myron Yu
Project Engineer

Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


Below 1GHz

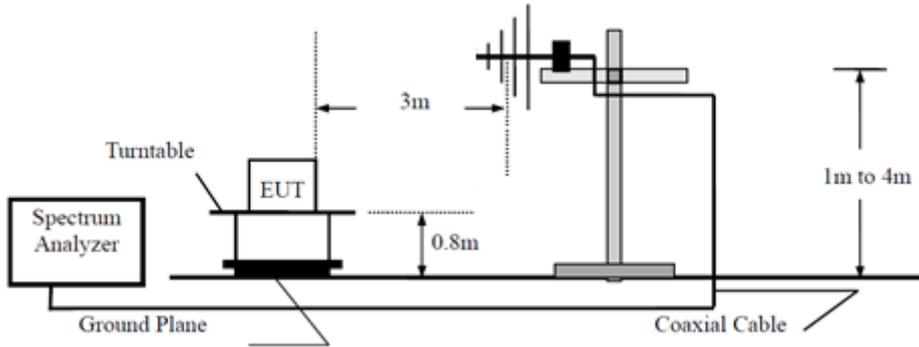


Above 1GHz

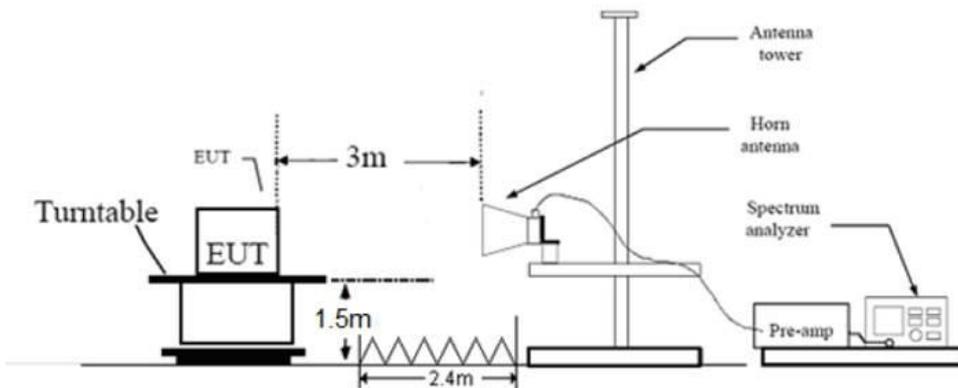

7.2 Conducted RF test setups



7.3 AC Power Line Conducted Emission test setups

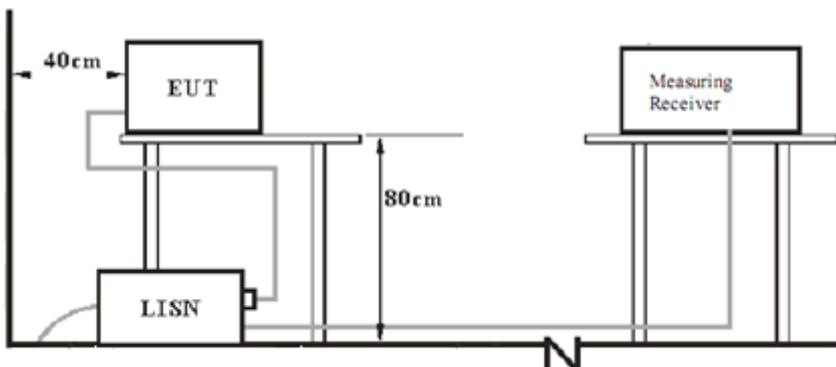

8 Systems test configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model no.	Serial no.	CAL. DUE DATE
Laptop	Thinkpad	X220	---	---

The system was configured to channel 0, 19, and 39 for the test.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Limit


According to §15.207, conducted emissions limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreasing linearly with logarithm of the frequency

Conducted Emission

Product Type : Smart Pillow
 M/N : L1
 Operating Condition : ON + Transmit
 Test Specification : Power Line, Live
 Comment : AC 120V/60Hz (External adapter)

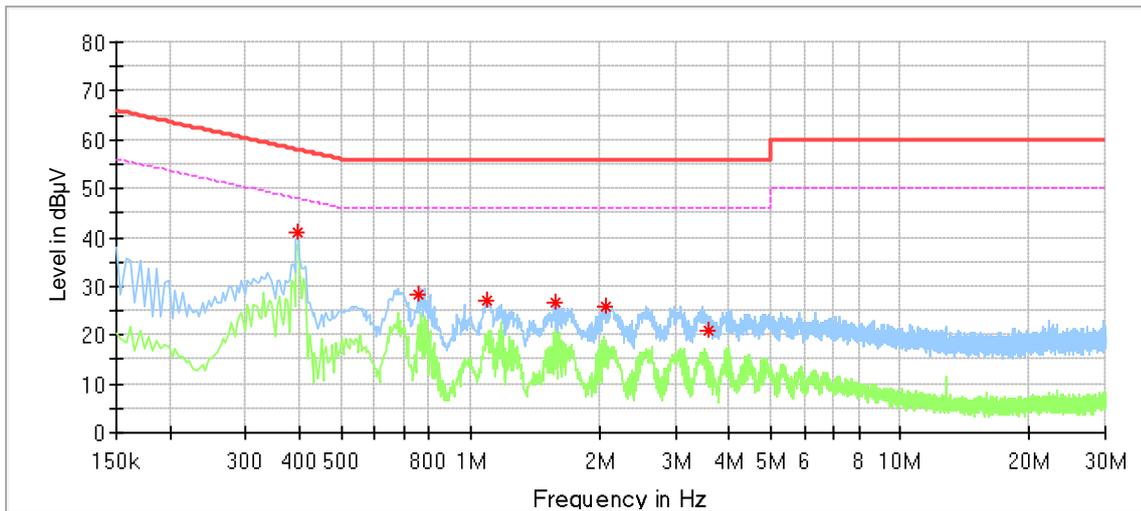

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.398000	41.15	---	57.90	16.75	L1	9.21
0.754000	28.19	---	56.00	27.81	L1	9.20
1.098000	27.07	---	56.00	28.93	L1	9.20
1.574000	26.76	---	56.00	29.24	L1	9.22
2.054000	26.03	---	56.00	29.97	L1	9.23
3.566000	20.81	---	56.00	35.19	L1	9.27

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Smart Pillow
 M/N : L1
 Operating Condition : ON + Transmit
 Test Specification : Power Line, Neutral
 Comment : AC 120V/60Hz (External adapter)

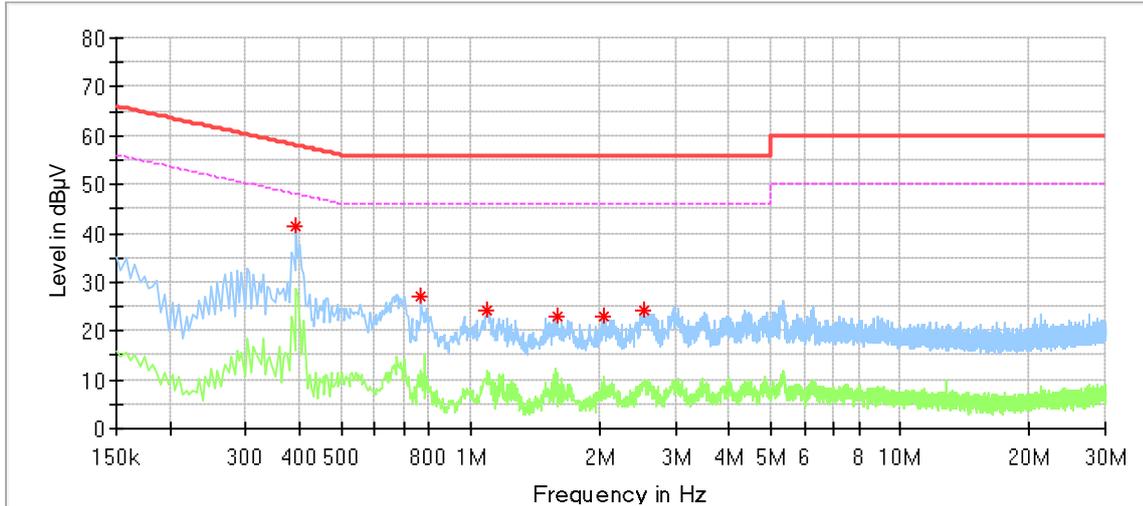

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.394000	41.54	---	57.98	16.44	N	9.38
0.766000	26.92	---	56.00	29.08	N	9.39
1.098000	24.08	---	56.00	31.92	N	9.40
1.590000	23.12	---	56.00	32.88	N	9.41
2.050000	23.16	---	56.00	32.84	N	9.42
2.542000	24.36	---	56.00	31.64	N	9.44

Remark:
 Level=Reading Level + Correction Factor
 Correction Factor=Cable Loss + LISN Factor
 (The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted output power

Test Method

1. The EUT was placed on 0.8m height table, the RF output of EUT was connected to the power meter by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:
RBW > the 6dB bandwidth of the emission being measured, VBW \geq 3RBW, Span \geq 3RBW
Sweep = auto, Detector function = peak, Trace = max hold.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

Limits


According to §15.247 (b) (3), conducted output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30

Test result as below table

Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Result
Low channel 2402MHz	-0.91	30	Pass
Middle channel 2440MHz	-1.41	30	Pass
High channel 2480MHz	-1.35	30	Pass

BLE_BT4.0_Ant1_2402

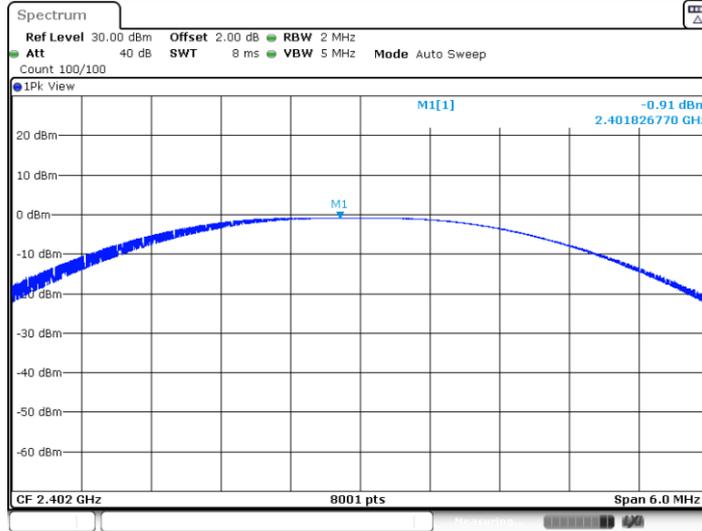

Date: 17.DEC.2021 09:16:46

BLE_BT4.0_Ant1_2440



Date: 17.DEC.2021 09:13:49

BLE_BT4.0_Ant1_2480



Date: 17.DEC.2021 09:15:07

9.3 6dB bandwidth

Test Method

1. Connect EUT test port to spectrum analyzer.
2. Use the following spectrum analyzer settings:
RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
4. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit


Limit [kHz]

≥500

Test result


Channel (MHz)	Result (MHz)	Limit (KHz)	Verdict
2402	0.808	≥500	PASS
2440	0.800	≥500	PASS
2480	0.812	≥500	PASS

Test Graphs

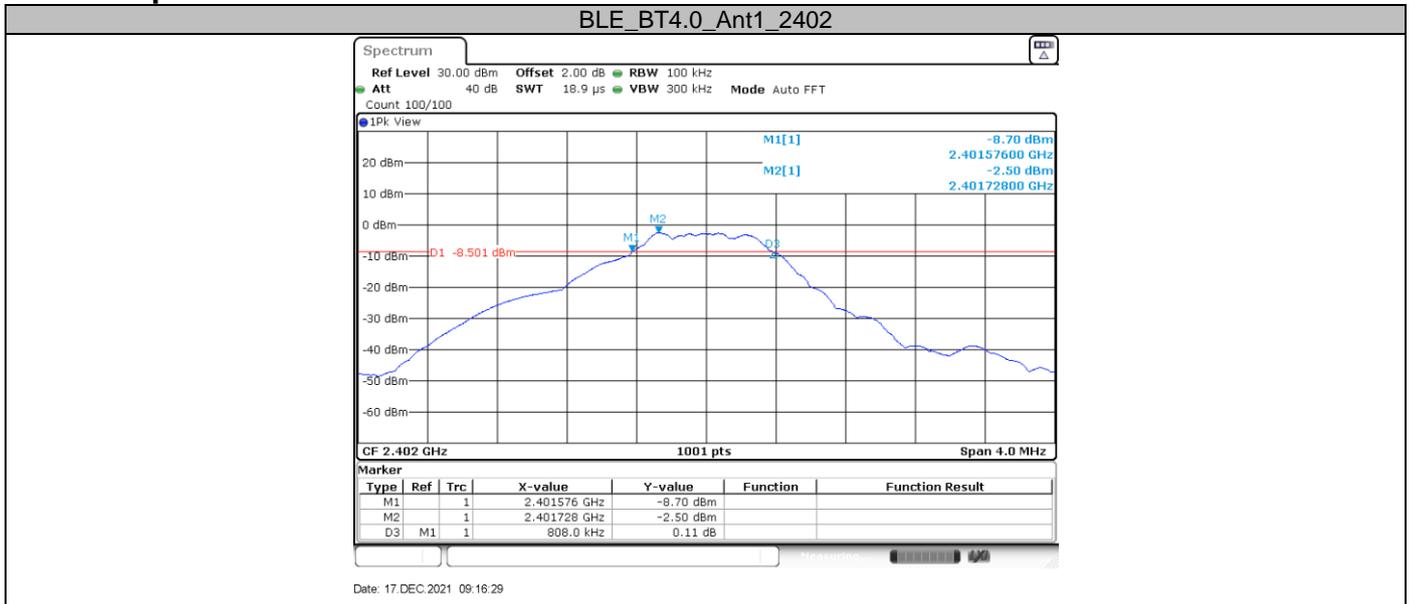




BLE_BT4.0_Ant1_2440

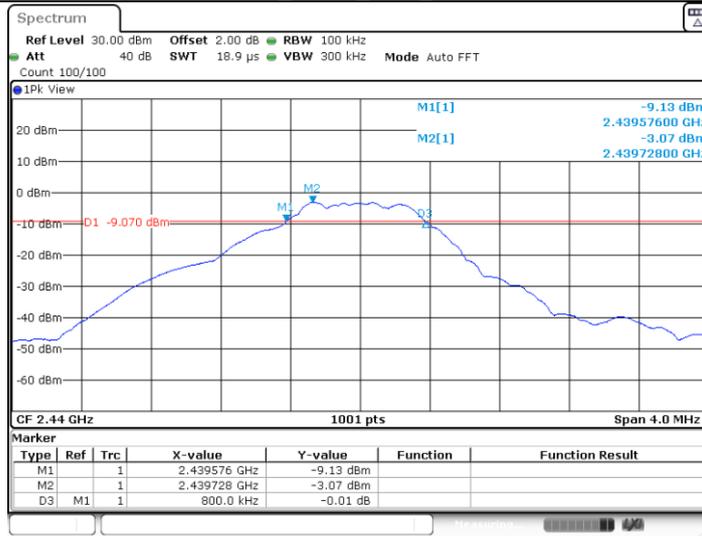

Date: 17.DEC.2021 09:13:32

BLE_BT4.0_Ant1_2480

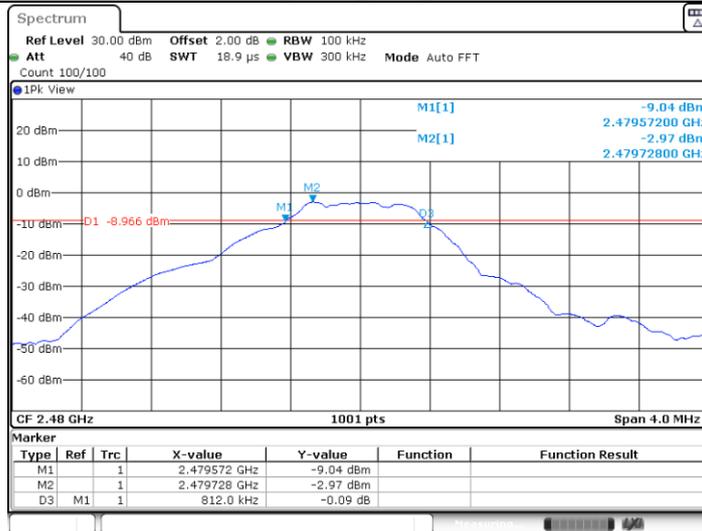

Date: 17.DEC.2021 09:14:50

9.4 99% bandwidth

Test Method

1. Connect EUT test port to spectrum analyzer.
2. Use the following spectrum analyzer settings:
 RBW=1% to 5% of the actual occupied, VBW≥3RBW, Sweep = auto,
 Detector function = peak, Trace = max hold
3. Use the automatic bandwidth measurement capability of an instrument, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
4. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit


Limit [kHz]

--


Test result

Channel (MHz)	Result (MHz)	Limit	Verdict
2402	1.303	---	PASS
2440	1.275	---	PASS
2480	1.275	---	PASS

Test Graphs

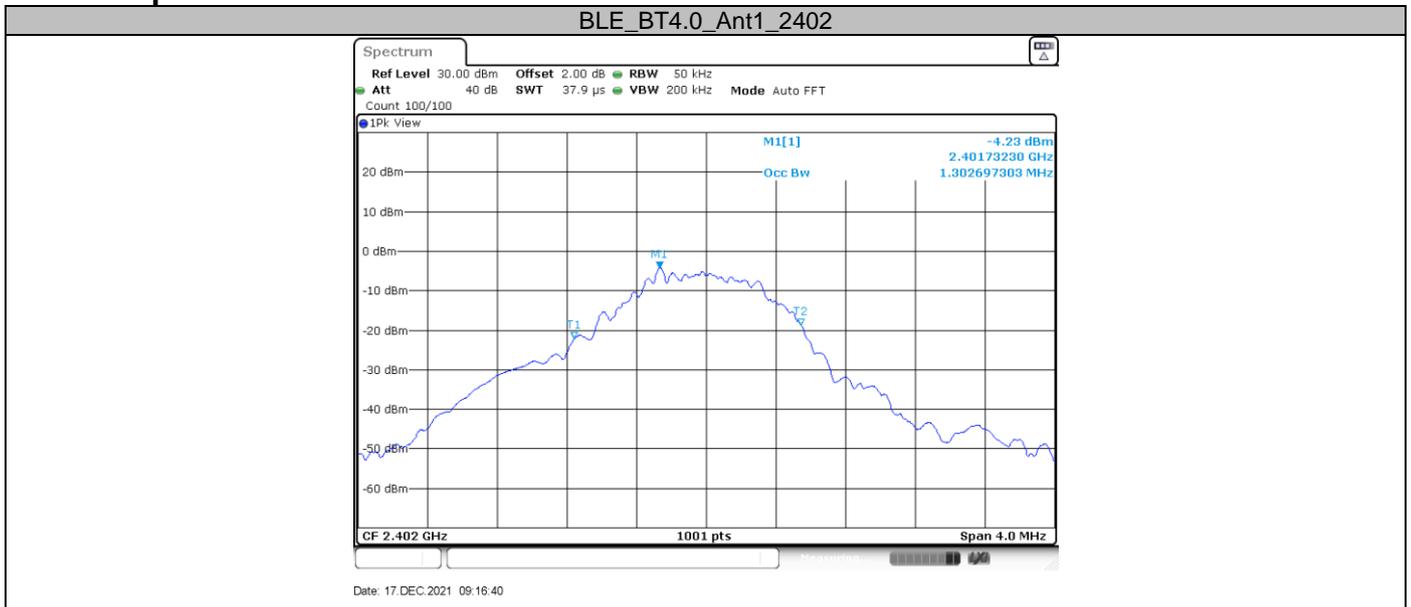


BLE_BT4.0_Ant1_2440

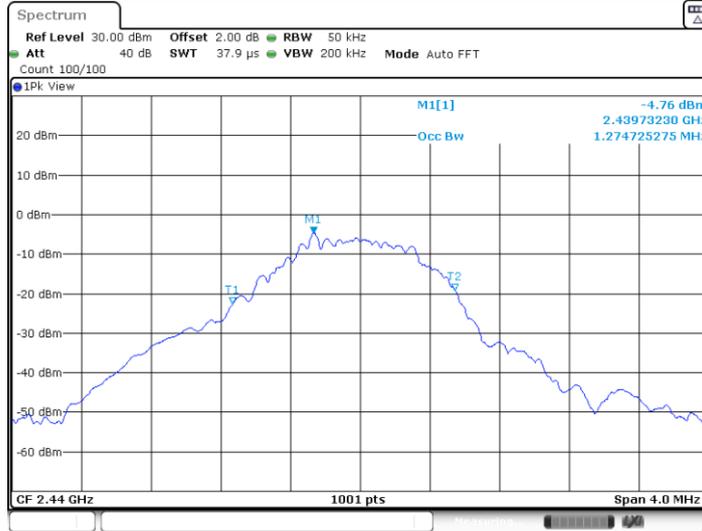

Date: 17.DEC.2021 09:13:43

BLE_BT4.0_Ant1_2480

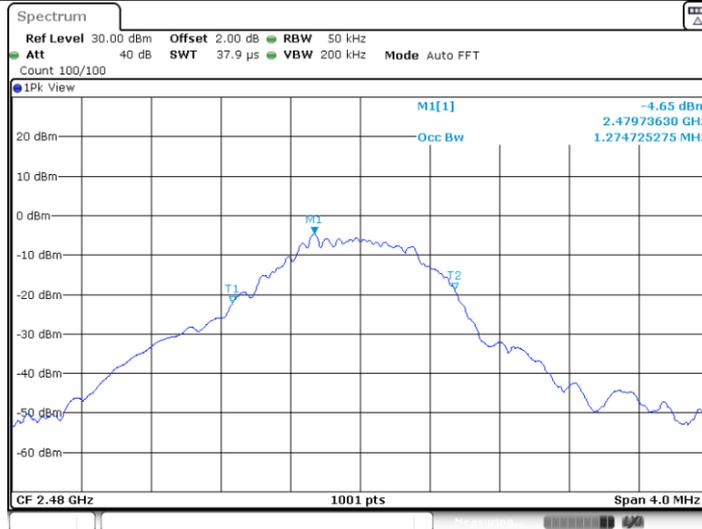

Date: 17.DEC.2021 09:15:01

9.5 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set analyzer center frequency to DTS channel center frequency. RBW=10kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
3. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
4. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3KHz]

≤8


Test result

Channel (MHz)	Result (dBm/3KHz)	Limit(dBm/3KHz)	Verdict
2402	-17.45	8	PASS
2440	-18.48	8	PASS
2480	-18.37	8	PASS

Test Graphs

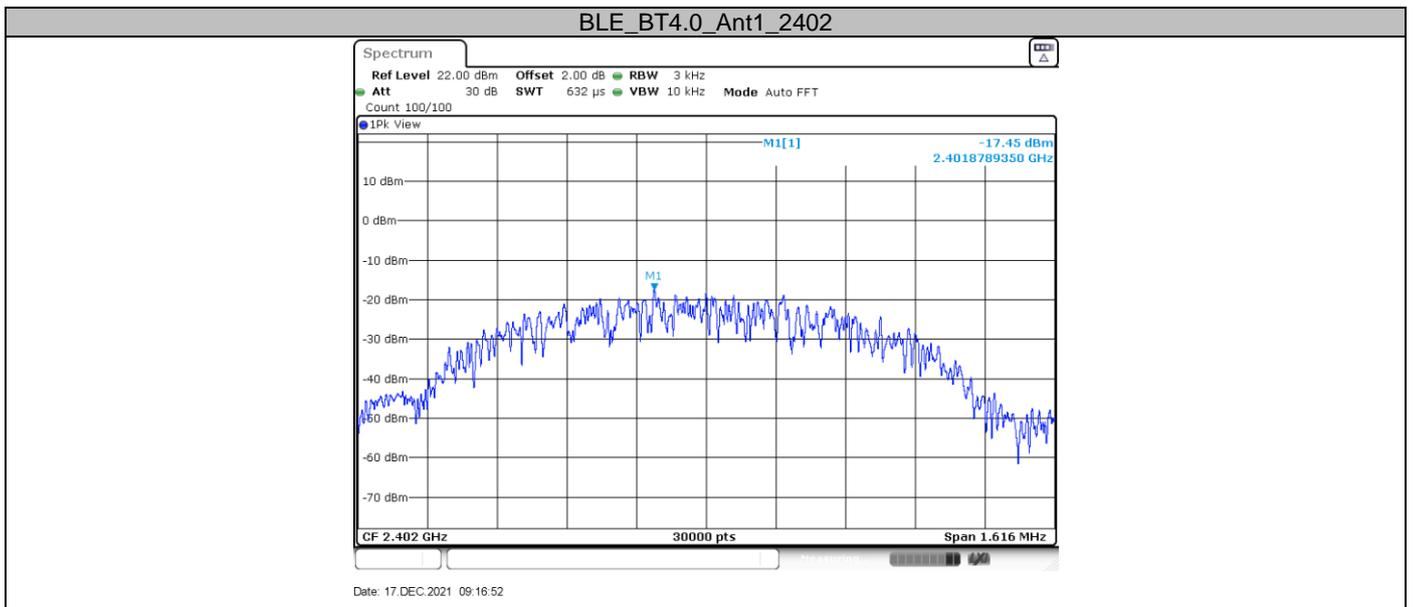


BLE_BT4.0_Ant1_2440

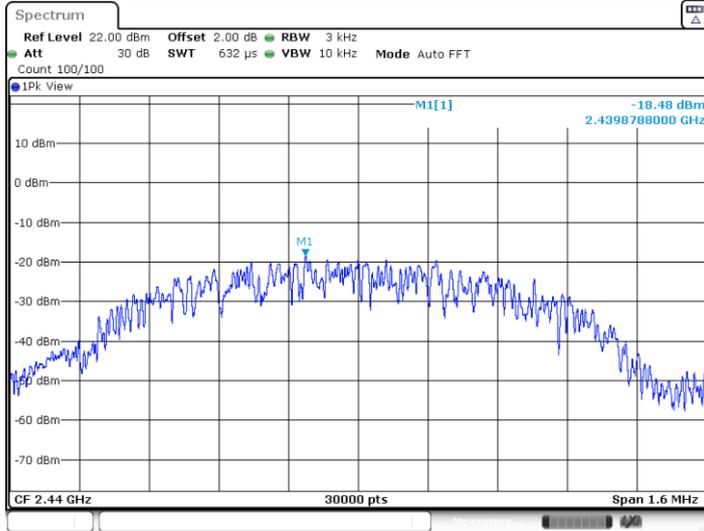

Date: 17.DEC.2021 09:13:55

BLE_BT4.0_Ant1_2480

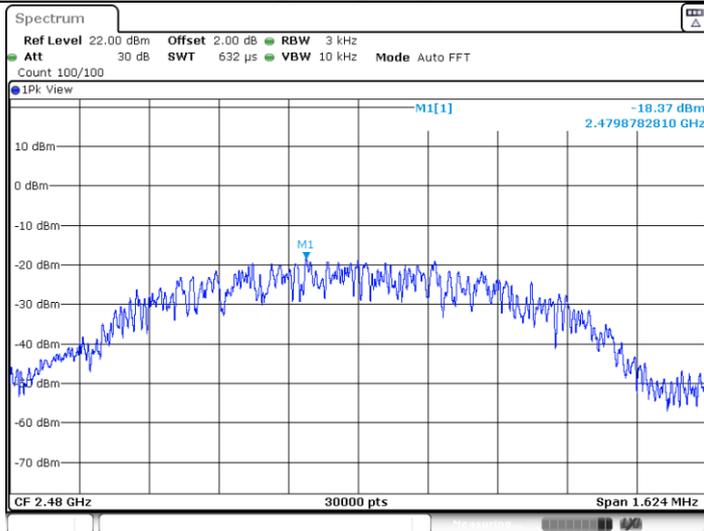

Date: 17.DEC.2021 09:15:13

9.6 Spurious RF conducted emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
4. The level displayed must comply with the limit specified in this Section. Submit these plots.
5. Repeat above procedures until all frequencies measured were complete.

Limit



Frequency Range MHz	Limit (dBc)
30-25000	-20

Test result


Test Mode	Antenna	Channel (MHz)	Freq Range (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
BLE_BT4.0	Ant1	2402	Reference	-4.41	-4.41	---	PASS
			30~1000	30~1000	-57.26	<=-24.41	PASS
			1000~26500	1000~26500	-48.16	<=-24.41	PASS
		2440	Reference	-4.58	-4.58	---	PASS
			30~1000	30~1000	-56.92	<=-24.58	PASS
			1000~26500	1000~26500	-50.61	<=-24.58	PASS
		2480	Reference	-4.01	-4.01	---	PASS
			30~1000	30~1000	-57.41	<=-24.01	PASS
			1000~26500	1000~26500	-48.25	<=-24.01	PASS

Test Graphs

Remark: The emissions exceed limit is fundamental signal.

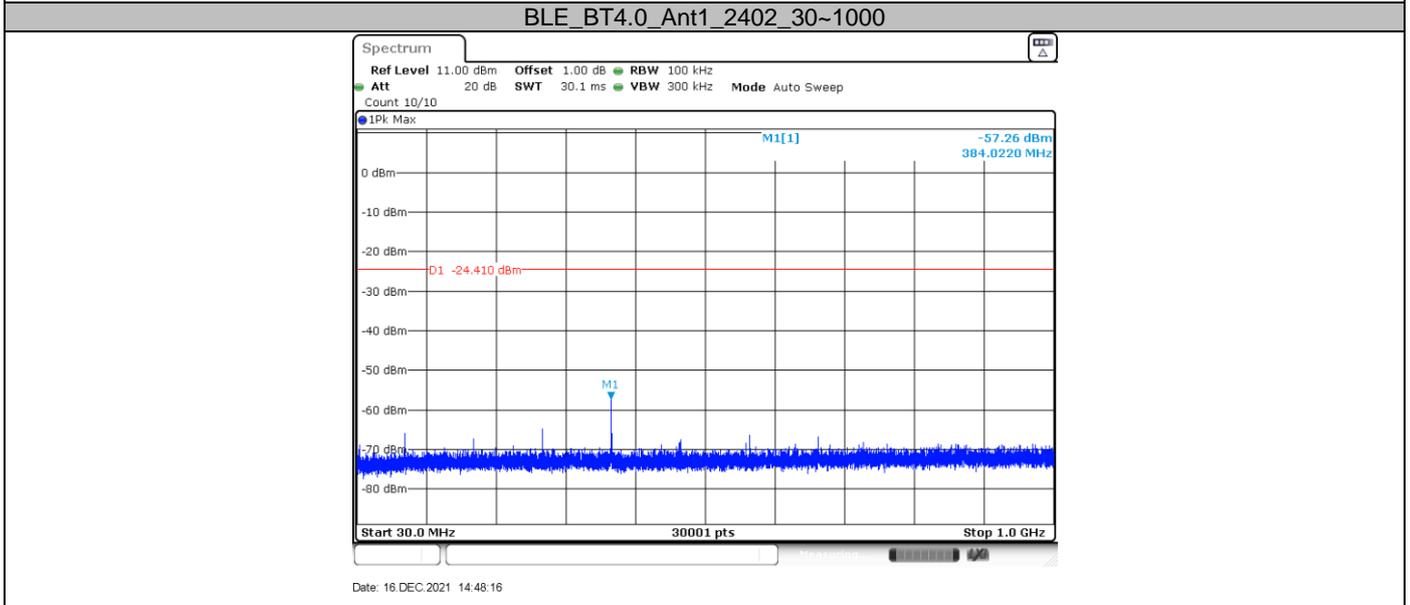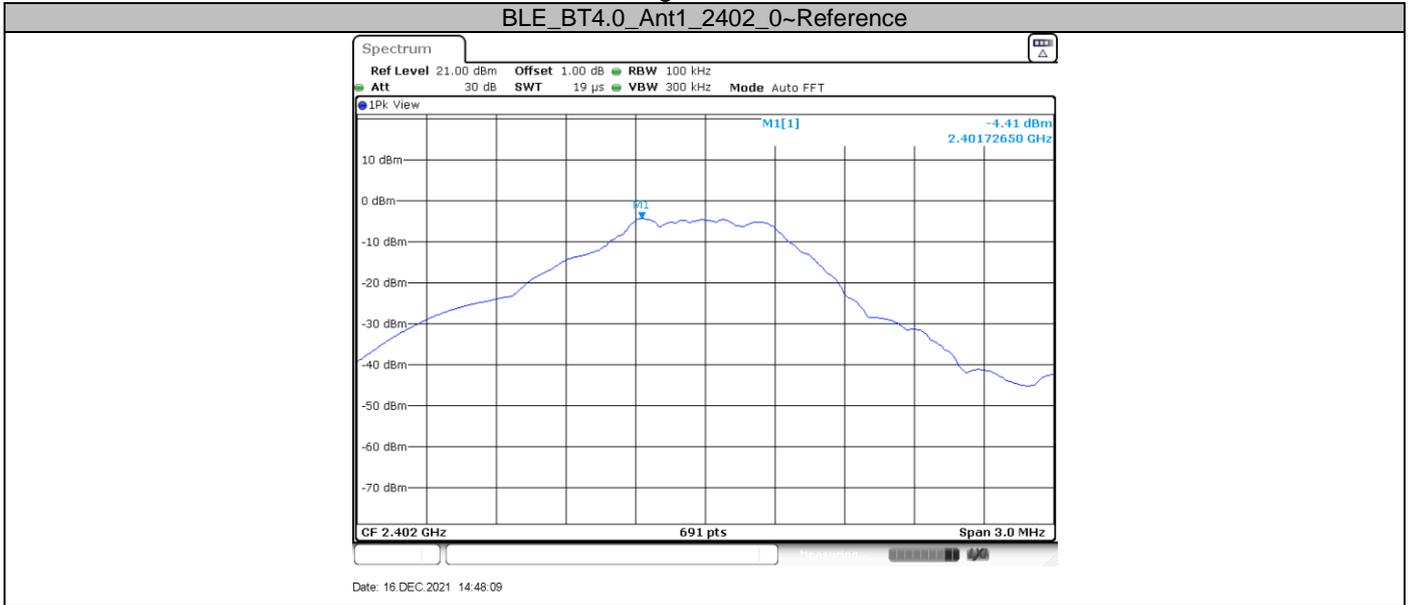

BLE_BT4.0_Ant1_2402_1000~26500

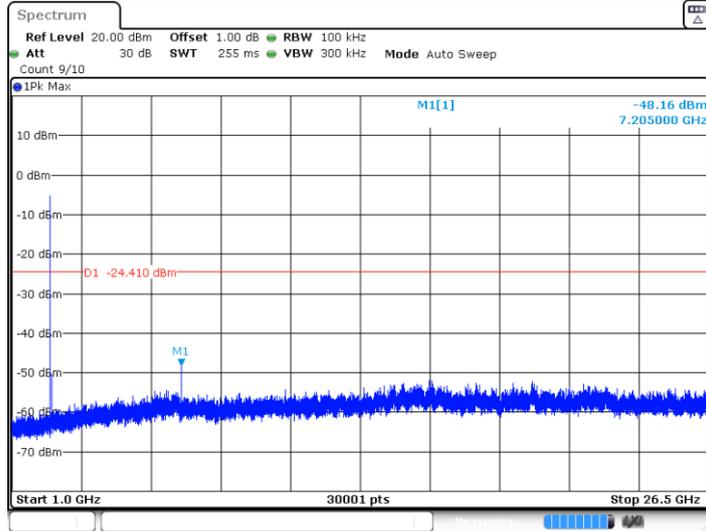


Date: 16 DEC 2021 14:48:23

BLE_BT4.0_Ant1_2440_0~Reference




Date: 16 DEC 2021 14:49:56

BLE_BT4.0_Ant1_2440_30~1000

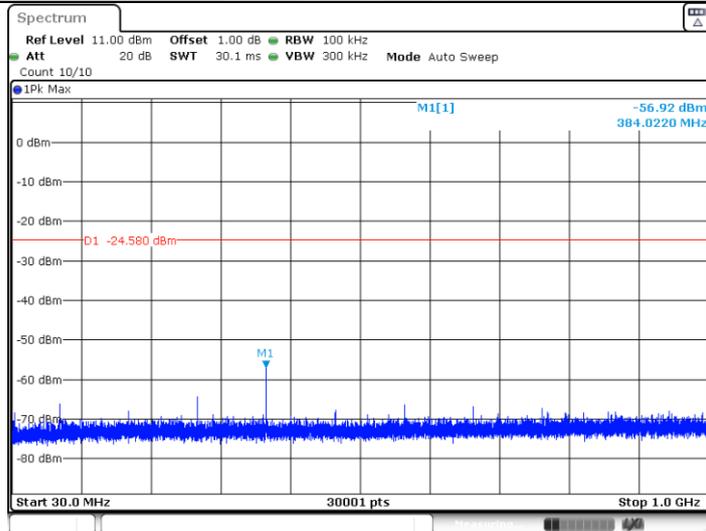


Date: 16 DEC 2021 14:50:02

BLE_BT4.0_Ant1_2440_1000~26500

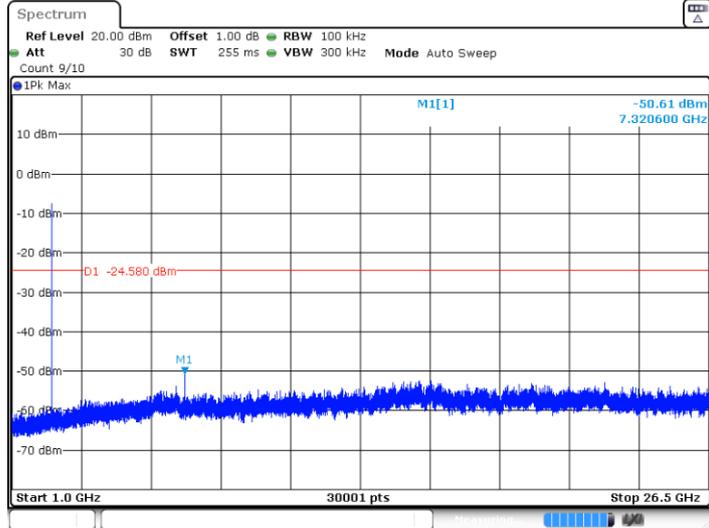


Date: 16 DEC 2021 14:50:10

BLE_BT4.0_Ant1_2480_0~Reference

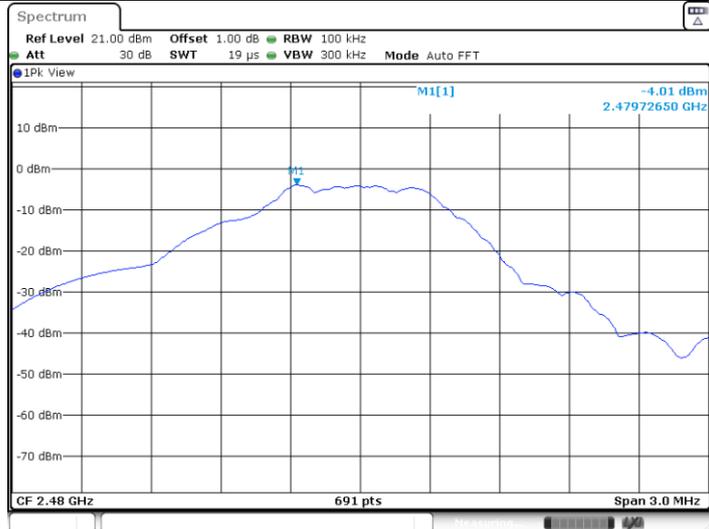


Date: 16 DEC 2021 14:52:16

BLE_BT4.0_Ant1_2480_30~1000

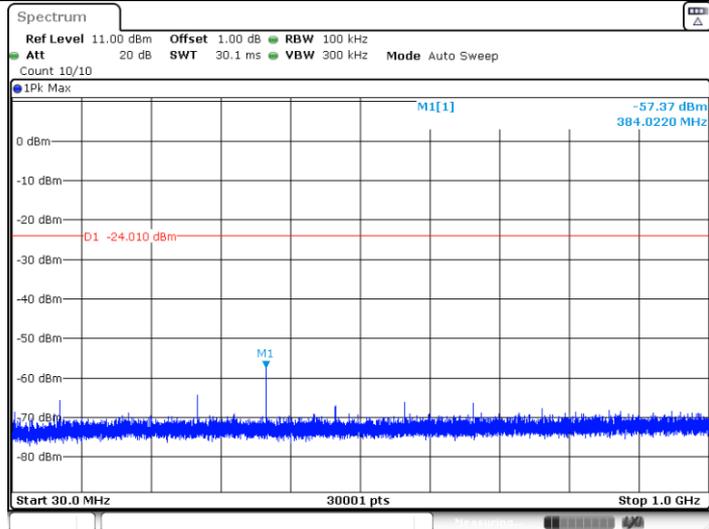

Date: 16 DEC 2021 14:52:23

BLE_BT4.0_Ant1_2480_1000~26500

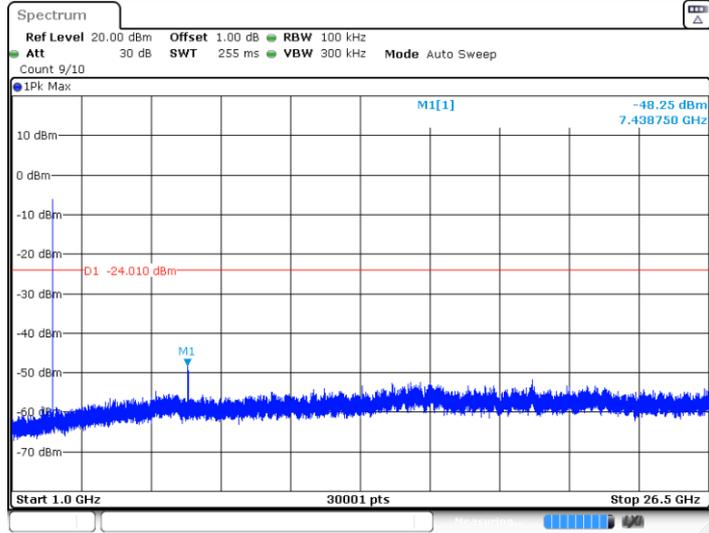

Date: 16 DEC 2021 14:52:30

9.7 Band edge

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize, use the peak and delta measurement to record the result.
4. The level displayed must comply with the limit specified in this Section.
5. Repeat the test at the hopping off and hopping on mode, submit all the plots.

Limit:


According to §15.247(d) and RSS-247 5.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) and RSS-Gen 8.10, must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)) and RSS-Gen.

Frequency Range MHz	Limit (dBc)
30-25000	-20

Test result

Test Mode	Antenna	Ch Name	Channel (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
BLE_BT4.0	Ant1	Low	2402	-2.65	-52.6	<=-22.65	PASS
		High	2480	-2.85	-56.18	<=-22.85	PASS

Test result

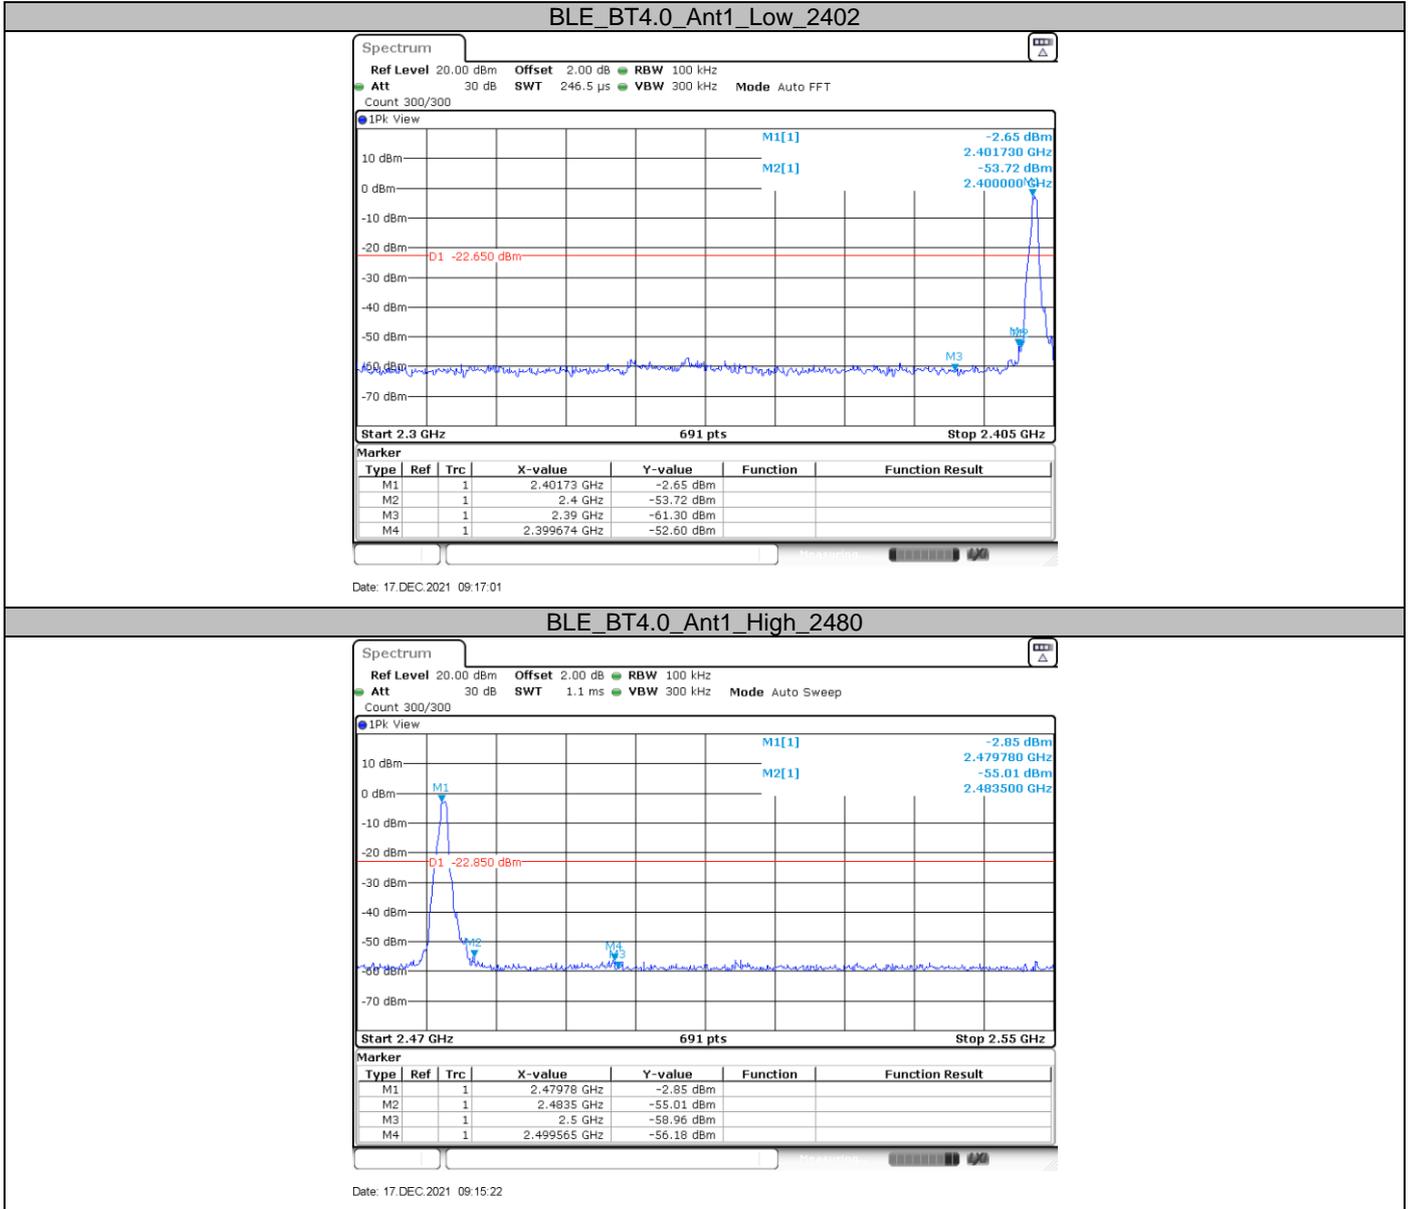

9.8 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious

RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious

RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW \ [3 × RBW].

c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \setminus \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dB μ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:


Remark:

- (1) Data of measurement within frequency range 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report,
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are the noise floor or attenuated more than 10dB below the permissible limits or the field strength is too small to be measured.
- (3) Level= Reading Level + Correction Factor
- (4) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)

Below 1G:

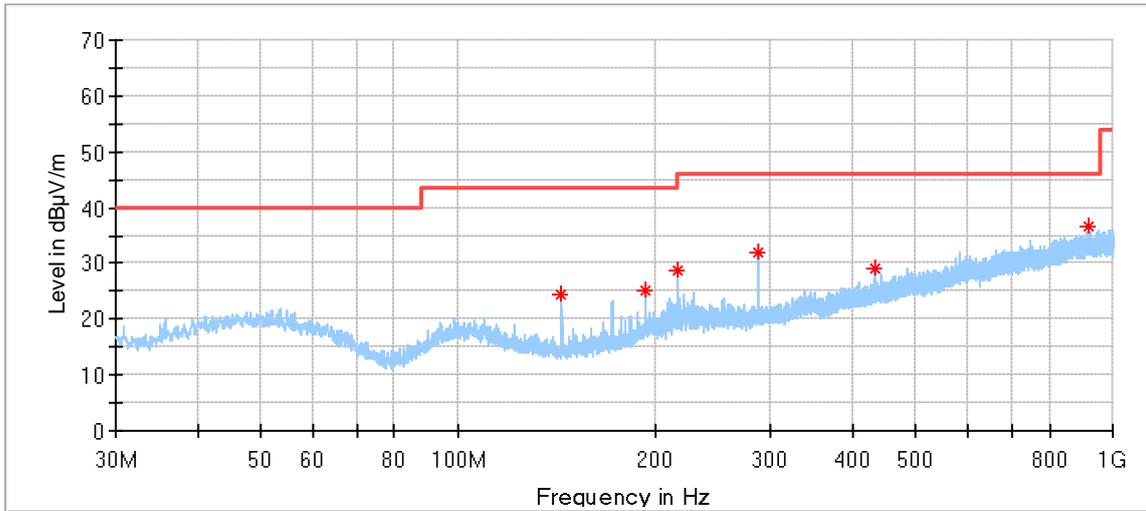


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
143.975000	24.52	43.50	18.98	100.0	H	113.0	14.95
193.822222	25.01	43.50	18.49	200.0	H	92.0	18.42
215.970556	28.82	43.50	14.68	100.0	H	185.0	18.39
287.966111	31.80	46.00	14.20	200.0	H	257.0	20.57
432.011111	29.24	46.00	16.77	100.0	H	0.0	24.11
918.843333	36.66	46.00	9.34	100.0	H	71.0	31.87

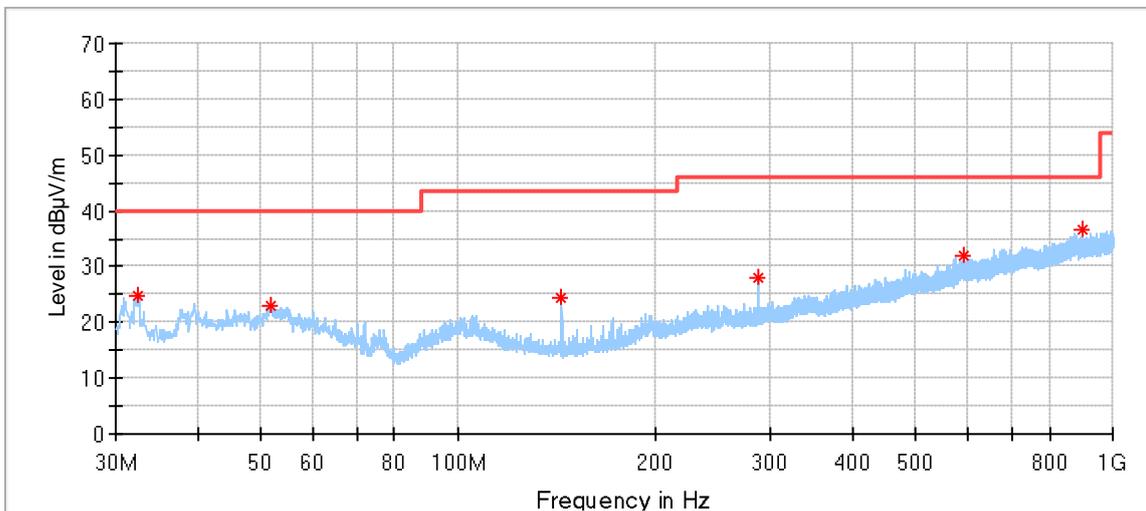


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.532778	24.76	40.00	15.24	100.0	V	309.0	16.74
51.825000	23.07	40.00	16.93	100.0	V	31.0	20.77
143.975000	24.24	43.50	19.26	100.0	V	325.0	14.95
287.966111	27.93	46.00	18.07	100.0	V	98.0	20.57
591.360556	32.12	46.00	13.88	200.0	V	359.0	27.44
901.221667	36.47	46.00	9.53	200.0	V	192.0	31.55

Low channel 2402MHz

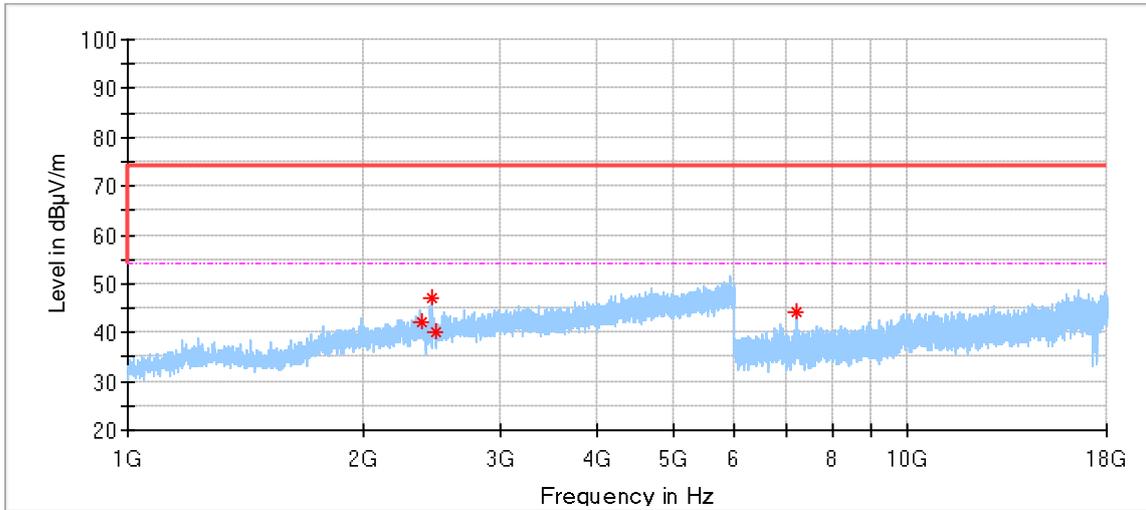

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.500000	42.21	74.00	31.79	150.0	H	0.0	-2.23
2461.000000	46.91	74.00	27.09	150.0	H	285.0	-1.90
2484.000000	40.04	74.00	33.96	150.0	H	352.0	-1.83
7206.000000	44.20	74.00	29.80	150.0	H	300.0	7.33

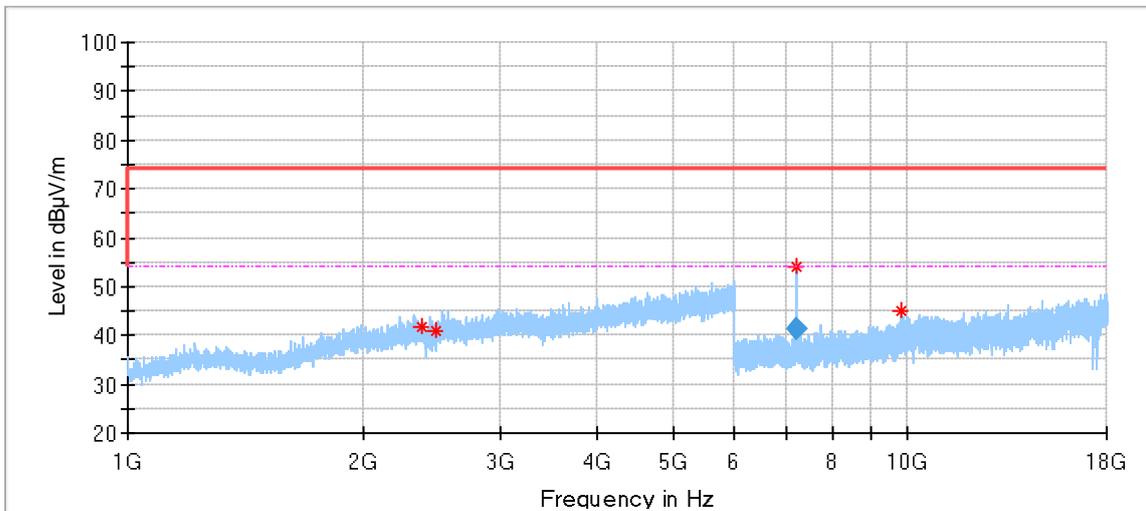


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.500000	41.65	74.00	32.35	150.0	V	157.0	-2.23
2484.000000	41.08	74.00	32.92	150.0	V	148.0	-1.83
7205.000000	54.07	74.00	19.93	150.0	V	29.0	7.33
9808.000000	45.12	74.00	28.88	150.0	V	356.0	10.92


Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.000000	41.23	54.00	12.77	150.0	V	29.0	7.33

Middle channel 2440MHz

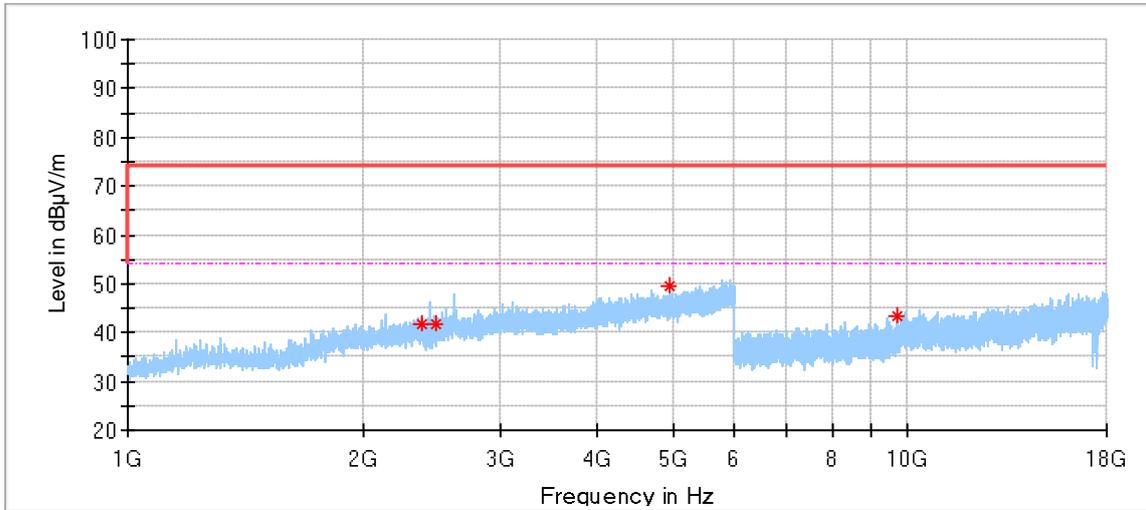


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.000000	41.68	74.00	32.32	150.0	H	61.0	-2.23
2490.000000	41.57	74.00	32.43	150.0	H	301.0	-1.83
4944.000000	49.38	74.00	24.62	150.0	H	61.0	4.56
9700.000000	43.29	74.00	30.71	150.0	H	33.0	9.86

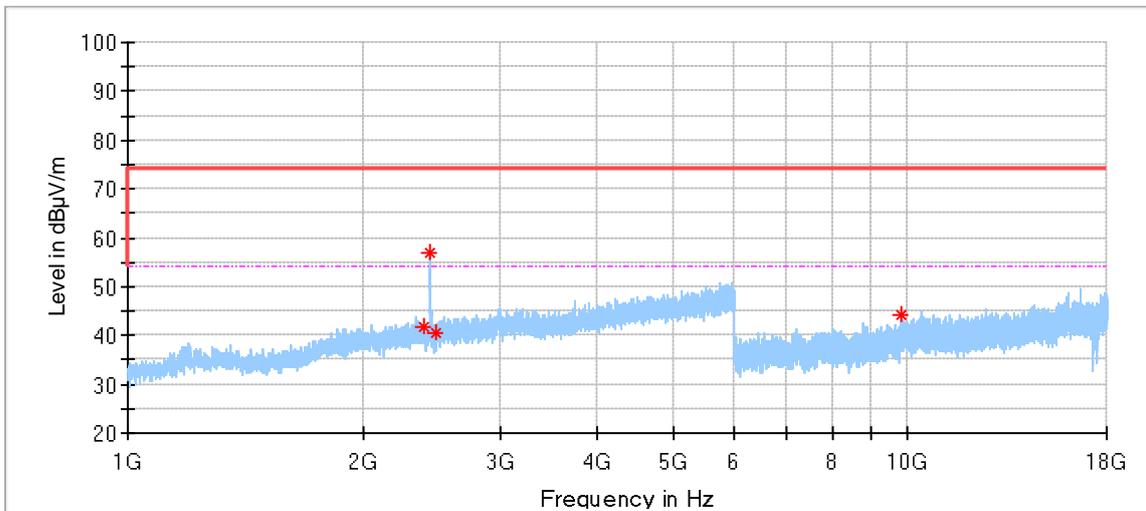


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2390.500000	41.66	74.00	32.34	150.0	V	48.0	-2.22
2439.000000	56.91	74.00	17.09	150.0	V	0.0	-2.03
2484.500000	40.58	74.00	33.42	150.0	V	272.0	-1.83
9837.000000	44.34	74.00	29.66	150.0	V	4.0	11.41

High channel 2480MHz

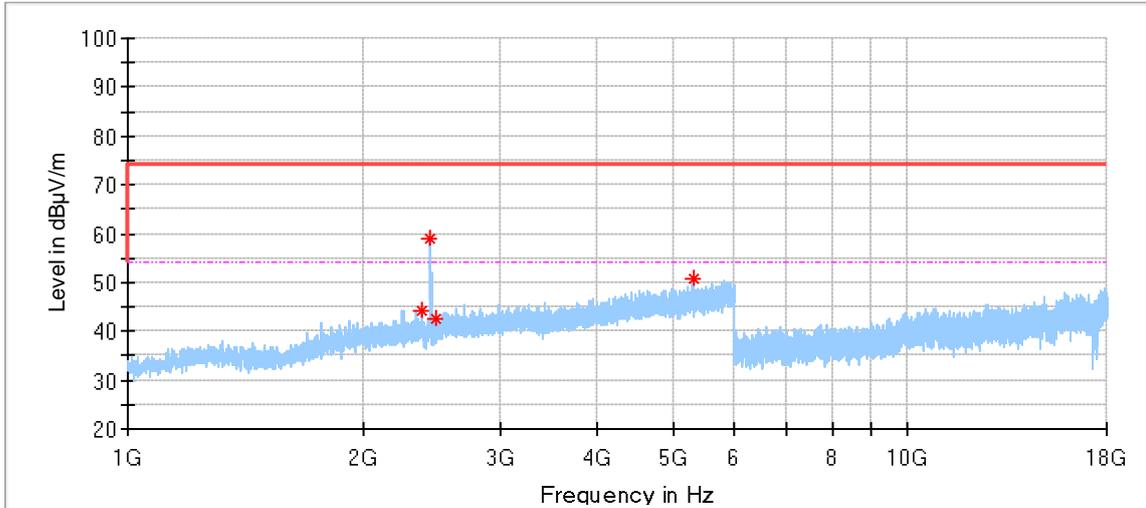

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2386.500000	44.31	74.00	29.69	150.0	H	257.0	-2.24
2439.500000	59.08	74.00	14.92	150.0	H	78.0	-2.02
2489.000000	42.40	74.00	31.60	150.0	H	114.0	-1.83
5303.000000	50.83	74.00	23.17	150.0	H	194.0	5.48

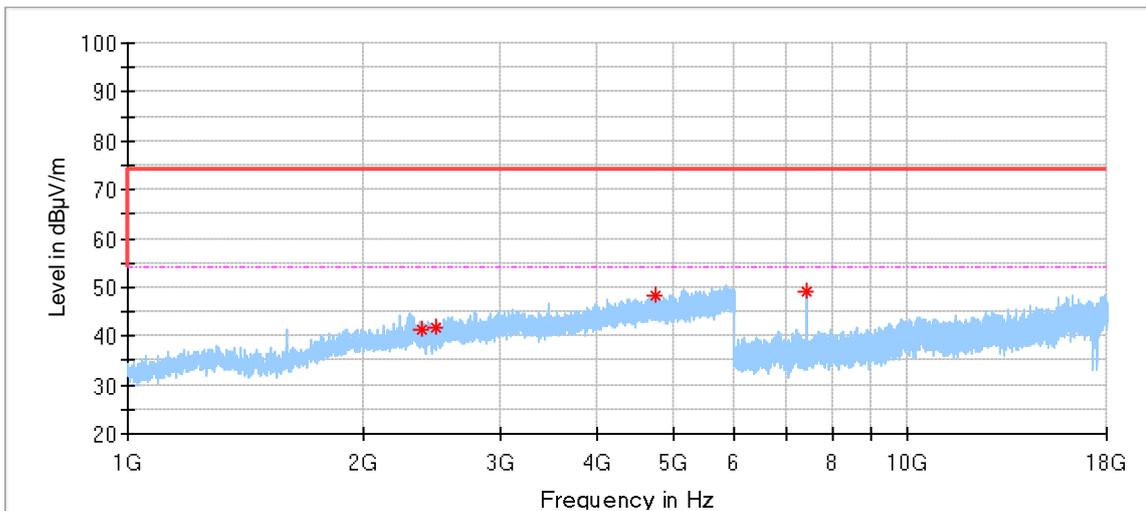

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.500000	41.19	74.00	32.81	150.0	V	77.0	-2.23
2491.000000	41.69	74.00	32.32	150.0	V	157.0	-1.82
4760.000000	48.30	74.00	25.70	150.0	V	86.0	4.36
7439.000000	49.12	74.00	24.88	150.0	V	60.0	7.61

10 Test Equipment List

Conducted Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-19-002	102590	1	2022-6-4
LISN	Rohde & Schwarz	ENV216	68-4-87-19-001	102472	1	2022-6-5
Attenuator	Shanghai Huaxiang	TS2-26-3	68-4-81-16-003	080928189	1	2022-6-3
Test software	Rohde & Schwarz	EMC32	68-4-90-19-005-A01	Version10.35.02	N/A	N/A
Shielding Room	TDK	CSR #2	68-4-90-19-005	----	1	2022-11-07
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-19-002	102590	1	2022-6-4
LISN	Rohde & Schwarz	ENV216	68-4-87-19-001	102472	1	2022-6-5

Radiated Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2022-6-4
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2022-2-2
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2022-5-24
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2022-10-10
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2022-10-10
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2022-7-21
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2022-7-27
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2022-8-23
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2023-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

RF conducted test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2022-6-3
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157	68-4-93-14-003	101226/100851	1	2022-6-3
Power Splitter	Weinschel	1580	68-4-85-14-001	SC319	1	2022-6-3
Test software	Tonscend	System for BT/WIFI	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	1	2022-11-07

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission 150kHz-30MHz	3.31dB
Uncertainty for Radiated Emission 30MHz-1000MHz	Horizontal: 4.67dB; Vertical: 4.65dB
Uncertainty for Radiated Emission 1000MHz-18000MHz	Horizontal: 4.76dB; Vertical: 4.75dB
Uncertainty for Radiated Emission 3000MHz-18000MHz	Horizontal: 4.69dB; Vertical: 4.68dB;
Uncertainty for Radiated Emission 18000MHz-40000MHz	Horizontal: 4.51dB; Vertical: 4.50dB
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.16dB Frequency test involved: 0.6×10^{-7} or 1%

---End of report---