

TEST REPORT


CBSD-SAS Interoperability Test for of WEH37-TM24B
Certification

APPLICANT
Wave Electronics co.,Ltd

REPORT NO.
HCT-OT-2507-SS001

DATE OF ISSUE
July 16, 2025

Tested by
Chan Young Kim



Technical Manager
Dae Gun Kim



HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-OT-2507-SS001

DATE OF ISSUE

July 16, 2025

Applicant

Wave Electronics co.,Ltd
402, 114-6, Central town-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea

**Product Name
Model Number**

5G O-RU
WEH37-TM24B

Date of Test

July 08, 2025 ~ July 11, 2025

Test Standard Used

FCC 47 CFR Part 96
ONGO-TS-9001-V1.3.0
WINNF-TS-0122 V1.2.0

Test Results

Refer to the attachment

Frequency range

3 550 MHz ~ 3 700 MHz

Manufacture

Wave Electronics co.,Ltd

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 16, 2025	Initial Release

Notice

Content

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. Applicant Information	5
2. Equipment Under Test (EUT)	5
2.1 Identification of the EUT	5
2.2 Supported Features	5
3. Measurement Setup	6
3.1 Test Equipment	6
3.2 Test Environment	6
3.3 Test Configuration.....	6
4. Test Summary	7
5. Test Results	8
5.1 CBSD Registration Process.....	8
5.2 CBSD Spectrum Grant Process	15
5.3 CBSD Heart Beat Process	17
5.4 CBSD Relinquishment Process	27
5.5 CBSD Deregistration Process	30
5.6 CBSD Security Validation	33
5.7 CBSD RF Power Measurement.....	38
6. TEST LOGS.....	43
7. TEST SETUP PHOTOGRAPHS	44

1. Applicant Information

The EUT has been tested by request of

Company	Wave Electronics co.,Ltd
---------	--------------------------

2. Equipment Under Test (EUT)

2.1 Identification of the EUT

Model	WEH37-TM24B
Serial Number	CBSD 1: 1DT012249B00006 CBSD 2: 1DT012249B00013
Hardware version	1.0
Software version	1.0
Firmware version	1.0
FCC ID	2BKZBWEH37-TM24B
CBSD Category	Category A
Unit Under Test Type	CBSD with DP
Transmitter Frequency Band	NR n48

2.2 Supported Features

	Conditional Test Case	Supported
C1	Mandatory for UUT which supports multi-step registration message	<input checked="" type="checkbox"/>
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	<input type="checkbox"/>
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message	<input type="checkbox"/>
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	<input type="checkbox"/>
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	<input type="checkbox"/>
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration.	<input type="checkbox"/>

3. Measurement Setup


3.1 Test Equipment

No.	Instrument	Model	Manufacturer	Serial No.	Due to Calibration
1	Signal Analyzer	N9030A	Agilent	US51350313	2026-03-13
2	SAS Test Harness Laptop	NT551XDA	SAMSUNG	KPXH99YR9003T4D	N/A
3	Hub switch	NEXT-510POE-TP	EZ-NET	202203250121	N/A
4	UE	WD-H812P	WOORINET	010118	N/A
5	UE	WD-H812P	WOORINET	010130	N/A

3.2 Test Environment

SAS Test Harness version	V1.0.3
Operating System	Windows 10
TLS Version	V1.2
Python version	V2.7

3.3 Test Configuration

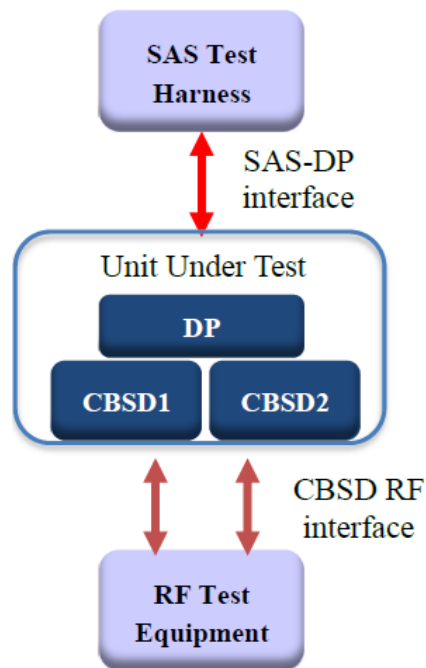

4. Test Summary

Section	Test Case ID	Test Case Title	Test Result
6.1.4.1.2	WINNF.FT.D.REG.2	Domain Proxy Multi-Step registration	PASS
6.1.4.2.2	WINNF.FT.D.REG.9	Domain Proxy Missing Required parameters (responseCode 102)	PASS
6.1.4.2.4	WINNF.FT.D.REG.11	Domain Proxy Pending registration (responseCode 200)	PASS
6.1.4.2.6	WINNF.FT.D.REG.13	Domain Proxy Invalid parameters (responseCode 103)	PASS
6.1.4.2.8	WINNF.FT.D.REG.15	Domain Proxy Blacklisted CBSD (responseCode 101)	PASS
6.1.4.2.10	WINNF.FT.D.REG.17	Domain Proxy Unsupported SAS protocol version responseCode 100)	PASS
6.1.4.2.12	WINNF.FT.D.REG.19	Domain Proxy Group Error (responseCode 201)	PASS
6.3.4.2.1	WINNF.FT.C.GRA.1	Unsuccessful Grant responseCode=400 (INTERFERENCE)	PASS
6.3.4.2.2	WINNF.FT.C.GRA.2	Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)	PASS
6.4.4.1.2	WINNF.FT.D.HBT.2	Domain Proxy Heartbeat Success Case (first Heartbeat Response)	PASS
6.4.4.2.1	WINNF.FT.C.HBT.3	Heartbeat responseCode=105 (DEREGISTER)	PASS
6.4.4.2.3	WINNF.FT.C.HBT.5	Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response	PASS
6.4.4.2.4	WINNF.FT.C.HBT.6	Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response	PASS
6.4.4.2.5	WINNF.FT.C.HBT.7	Heartbeat responseCode=502 (UNSYNC_OP_PARAM)	PASS
6.4.4.2.6	WINNF.FT.D.HBT.8	Domain Proxy Heartbeat responseCode=500 (TEMINATED_GRANT)	PASS
6.4.4.3.1	WINNF.FT.C.HBT.9	Heartbeat Response Absent (First Heartbeat)	PASS
6.4.4.3.2	WINNF.FT.C.HBT.10	Heartbeat Response Absent (Subsequent Heartbeat)	PASS
6.6.4.1.2	WINNF.FT.D.RLQ.2	Domain Proxy Successful Relinquishment	PASS
6.6.4.2.2	WINNF.FT.D.RLQ.4	Domain Proxy Unsuccessful Relinquishment, responseCode=102	PASS
6.6.4.3.2	WINNF.FT.D.RLQ.6	Domain Proxy Unsuccessful Relinquishment, responseCode=103	PASS
6.7.4.1.2	WINNF.FT.D.DRG.2	Domain Proxy Successful Deregistration	PASS
6.7.4.2.2	WINNF.FT.D.DRG.4	Domain Proxy Deregistration responseCode=102	PASS
6.7.4.3.1	WINNF.FT.C.DRG.5	Deregistration responseCode=103	PASS
6.8.4.1.1	WINNF.FT.C.SCS.1	Successful TLS connection between UUT and SAS Test Harness	PASS
6.8.4.2.1	WINNF.FT.C.SCS.2	TLS failure due to revoked certificate	PASS
6.8.4.2.2	WINNF.FT.C.SCS.3	TLS failure due to expired server certificate	PASS
6.8.4.2.3	WINNF.FT.C.SCS.4	TLS failure when SAS Test Harness certificate is issue by unknown CA	PASS
6.8.4.2.4	WINNF.FT.C.SCS.5	TLS failure when certificate at the SAS Test Harness is corrupted	PASS
7.1.4.1.1	WINNF.PT.C.HBT.1	UUT RF Transmit Power Measurement	PASS

5. Test Results

5.1 CBSD Registration Process

5.1.1 [WINNF.FT.D.REG.2] Domain Proxy Multi-Step registration

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	<p>CBSD sends correct Registration request information, as specified in[n.5], to the SAS Test Harness:</p> <ul style="list-style-type: none"> • The required <i>userId</i>, <i>fcid</i> and <i>cbsdSerialNumber</i> registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. <p>Note: It is outside the scope of this document to test the Registration information that is supplied via another means.</p>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	<ul style="list-style-type: none"> • SAS Test Harness sends a CBSD Registration Response as follows: <ul style="list-style-type: none"> - <i>cbsdId</i> = <i>Ci</i> - <i>measReportConfig</i> shall not be included - <i>responseCode</i> = 0 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i> =0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.1.2 [WINNF.FT.D.REG.9] Domain Proxy Missing Required parameters (responseCode 102)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode = Ri for CBSD1 and CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.1.3 [WINNF.FT.D.REG.11] Domain Proxy Pending registration (responseCode 200)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode (Ri) = 200 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.1.4 [WINNF.FT.D.REG.13] Domain Proxy Invalid parameters (responseCode 103)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode R1 = 0 for CBSD1 and R2 = 103 for CBSD2. 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.1.5 [WINNF.FT.D.REG.15] Domain Proxy Blacklisted CBSD (responseCode 101)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode R1 = 0 for CBSD1 and R2 = 101 for CBSD2. 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.1.6 [WINNF.FT.D.REG.17] Domain Proxy Unsupported SAS protocol version (responseCode 100)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode (Ri) = 100 for CBSD1 and CBSD2. 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.1.7 [WINNF.FT.D.REG.19] Domain Proxy Group Error (responseCode 201)

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	<p>SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows:</p> <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode R1 = 0 for CBSD1 and R2 = 201 for CBSD2. 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.2 CBSD Spectrum Grant Process

5.2.1 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness, with cbsdId = C 	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none"> • <i>cbsdId</i>=C • <i>responseCode</i>=R 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.2.2 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness, with cbsdId = C 	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none"> • <i>cbsdId</i>=C • <i>responseCode</i>(R) = 401 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> • UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.3 CBSD Heart Beat Process

5.3.1 [WINNF.FT.D.HBT.2] Domain Proxy Heartbeat Success Case (first Heartbeat Response)

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none"> DP has two CBSD registered successfully with SAS Test Harness, with <code>cbsdId = Ci, i={1,2}</code> 	--	--
2	UUT sends a message: <ul style="list-style-type: none"> If message is a Spectrum Inquiry Request, go to step 3 If message is a Grant Request, go to step 5 	--	--
3	DP sends a Spectrum Inquiry Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Spectrum Inquiry Request message is formatted correctly for each CBSD, including for <code>CBSDi, i={1,2}</code> : <ul style="list-style-type: none"> <code>cbsdId = C</code> List of <code>frequencyRange</code> objects sent by DP are within the CBRS frequency range 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
4	If a separate Spectrum Inquiry Request message was sent for each CBSD, the SAS Test Harness shall respond to each Spectrum Inquiry Request message with a separate Spectrum Inquiry Response message. If a single Spectrum Inquiry Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Spectrum Inquiry Response message containing a 2-object array. Verify parameters for each CBSD within the Spectrum Inquiry Response message are as follows, for <code>CBSDi, i={1,2}</code> : <ul style="list-style-type: none"> <code>cbsdId = C</code> <code>availableChannel</code> is an array of <code>availableChannel</code> objects <code>responseCode = 0</code> 	--	--
5	DP sends a Grant Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Grant Request message is formatted correctly for each CBSD, including for <code>CBSDi, i={1,2}</code> : <ul style="list-style-type: none"> <code>cbsdId = C</code> <code>maxEIRP</code> is at or below the limit appropriate for CBSD category as defined by Part 96 <code>operationFrequencyRange, Fi</code>, sent by UUT is a valid range within the CBRS band 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

6	<p>If a separate Grant Request message was sent for each CBSD, the SAS Test Harness shall respond to each Grant Request message with a separate Grant Response message.</p> <p>If a single Grant Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Grant Response message containing a 2-object array.</p> <p>Verify parameters for each CBSD within the Grant Response message are as follows, for CBSDi, i={1,2}:</p> <ul style="list-style-type: none"> • <i>cbsdId</i>= C • <i>grantId</i>= Gi = a valid grant ID • <i>grantExpireTime</i> = UTC time greater than duration of the test • <i>responseCode</i>= 0 	--	--
7	<p>Ensure DP sends first Heartbeat Request message for each CBSD.</p> <p>This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Heartbeat Request message is formatted correctly for each CBSD, including, for CBSDi i={1,2}:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = Ci, i={1,2} • <i>grantId</i> = Gi, i={1,2} • <i>operationState</i> = "GRANTED" 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
8	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Verify parameters for each CBSD within the Heartbeat Response message are as follows, for CBSDi:</p> <ul style="list-style-type: none"> • <i>cbsdId</i>= Ci • <i>grantId</i>= Gi • <i>transmitExpireTime</i>= current UTC time + 200 seconds • <i>responseCode</i>= 0 	--	--
9	<p>For further Heartbeat Request messages sent from DP after completion of step 8, validate message is sent within latest specified heartbeatInterval for CBSDi:</p> <ul style="list-style-type: none"> • <i>cbsdId</i>= Ci • <i>grantId</i>= Gi • <i>operationState</i>= "AUTHORIZED" <p>and SAS Test Harness responds with a Heartbeat Response message including the following parameters, for CBSDi</p> <ul style="list-style-type: none"> • <i>cbsdId</i>= Ci • <i>grantId</i>= Gi • <i>transmitExpireTime</i>= current UTC time + 200 seconds • <i>responseCode</i>= 0 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

10	<p>Monitor the RF output of the UUT from start of test until UUT transmission commences. Monitor the RF output of the UUT from start of test until RF transmission commences. Verify:</p> <ul style="list-style-type: none">• UUT does not transmit at any time prior to completion of the first heartbeat response• UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range Fi.	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
----	---	--	-------------------------------

5.3.2 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DEREGISTER)

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ◦ valid cbsdId = C ◦ valid grantId = G ◦ grant is for frequency range F, power P ◦ grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "AUTHORIZED" 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>transmitExpireTime</i> = T = Current UTC time • <i>responseCode</i> = 105 (DEREGISTER) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT shall stop transmission within (T + 60 seconds) of completion of step 3 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.3.3 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ◦ valid cbsdId = C ◦ valid grantId = G ◦ grant is for frequency range F, power P ◦ grantExpireTime = UTC time greater than duration of the test • UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request) 	--	--
2	<p>UUT sends a Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT) 	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G • operationState = "GRANTED" <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> • cbsdId = C • grantId = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT does not transmit at any time 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.3.4 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ◦ valid <i>cbsdId</i> = C ◦ valid <i>grantId</i> = G ◦ grant is for frequency range F, power P ◦ <i>grantExpireTime</i> = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "AUTHORIZED" 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>transmitExpireTime</i> = T = current UTC time • <i>responseCode</i> = 501 (SUSPENDED_GRANT) 	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p>	--	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "GRANTED" <p>B. UUT sends a Relinquishment Request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT shall stop transmission within (T + 60 seconds) of completion of step 3 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.3.5 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ◦ valid <i>cbsdId</i> = C ◦ valid <i>grantId</i> = G ◦ grant is for frequency range F, power P ◦ <i>grantExpireTime</i> = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "AUTHORIZED" 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>transmitExpireTime</i> = T = Current UTC Time • <i>responseCode</i> = 502 (UNSYNC_OP_PARAM) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the SAS-CBSD interface. Verify:</p> <ul style="list-style-type: none"> • UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: <ul style="list-style-type: none"> ◦ <i>cbsdId</i> = C ◦ <i>grantId</i> = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT shall stop transmission within (T+60) seconds of completion of step 3. 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.3.6 [WINNF.FT.C.HBT.8] Domain Proxy Heartbeat responseCode=500 (TERMINATED_GRANT)

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> DP has two CBSD registered successfully with SAS Test Harness Each CBSD {1,2} has a valid single grant as follows: <ul style="list-style-type: none"> valid cbsdId = Ci, i={1,2} valid grantId = Gi, i={1,2} grant is for frequency range Fi, power Pi grantExpireTime = UTC time greater than duration of the test Both CBSD are in AUTHORIZED state and transmitting within their granted bandwidth on RF interface 	--	--
2	<p>DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of size 2. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly for each CBSD, including, for CBSDi i={1,2}:</p> <ul style="list-style-type: none"> cbsdId = Ci, i = {1,2} grantId = Gi, i = {1,2} operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	<p>If separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message. If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array. Parameters for each CBSD within the Heartbeat Response message should be as follows, for CBSDi:</p> <ul style="list-style-type: none"> cbsdId = Ci grantId = Gi For CBSD1: <ul style="list-style-type: none"> transmitExpireTime = current UTC time + 200 seconds For CBSD2: <ul style="list-style-type: none"> transmitExpireTime = T = current UTC time responseCode = 500 (TERMINATED_GRANT) 	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT. If CBSD sends further Heartbeat Request messages for CBSD1, SAS Test Harness shall respond with a Heartbeat Response message with parameters:</p> <ul style="list-style-type: none"> cbsdId = C1 grantId = G1 transmitExpireTime = current UTC time + 200 seconds responseCode = 0 Heartbeat Request message is within heartbeatInterval of previous Heartbeat Request message 	--	--
5	<p>Monitor the RF output of CBSD2. Verify:</p> <ul style="list-style-type: none"> CBSD2 shall stop transmission within bandwidth F2 within (T+ 60 seconds) of completion of step 3 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.3.7 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ◦ valid <i>cbsdId</i> = C ◦ valid <i>grantId</i> = G ◦ grant is for frequency range F, power P ◦ <i>grantExpireTime</i> = UTC time greater than duration of the test • UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request) 	--	--
2	<p>UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> • <i>cbsdId</i> = C • <i>grantId</i> = G • <i>operationState</i> = "GRANTED" 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--	--
4	<p>Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify:</p> <ul style="list-style-type: none"> • At any time during the test, UUT shall not transmit on RF interface 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.3.8 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: <ul style="list-style-type: none"> ◦ valid <i>cbsdId</i>= C ◦ valid <i>grantId</i>= G ◦ grant is for frequency range F, power P ◦ <i>grantExpireTime</i>= UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> • <i>cbsdId</i>= C • <i>grantId</i>= G • <i>operationState</i>= "AUTHORIZED" 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none"> • <i>cbsdId</i>= C • <i>grantId</i>= G • <i>transmitExpireTime</i>= current UTC time + 200 seconds • <i>responseCode</i>= 0 	--	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> • UUT shall stop all transmission on RF interface within (<i>transmitExpireTime</i>+ 60 seconds), using the <i>transmitExpireTime</i> sent in Step 3. 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.4 CBSD Relinquishment Process

5.4.1 [WINNF.FT.D.RLQ.2] Domain Proxy Successful Relinquishment

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> DP has successfully completed SAS Discovery and Authentication with SAS Test Harness DP has successfully registered 2 CBSD with SAS Test Harness, each with <i>cbsdId</i>=Ci, <i>i</i>={1,2} DP has received a valid grant with <i>grantId</i> = Gi, <i>i</i>={1,2} for each CBSD Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants <p>Invoke trigger to relinquish each UUT Grant from the SAS Test Harness</p>	--	--
2	<p>Verify DP sends a Relinquishment Request message for each CBSD.</p> <p>This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> <i>cbsdId</i>= Ci <i>grantId</i>= Gi 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	<p>If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Relinquishment Response shall be as follows:</p> <ul style="list-style-type: none"> <i>cbsdId</i>= Ci <i>grantId</i>= Gi <i>responseCode</i> = 0 	--	--
4	<p>After completion of step 3, SAS Test Harness will not provide any additional positive response (<i>responseCode</i>=0) to further request messages from the UUT.</p>	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> UUT shall stop RF transmission at any time between triggering the relinquishments and UUT sending the relinquishment requests for each CBSD. 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.4.2 [WINNF.FT.D.RLQ.4] Domain Proxy Unsuccessful Relinquishment, responseCode=102

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> DP has successfully completed SAS Discovery and Authentication with SAS Test Harness DP has successfully registered 2 CBSD with SAS Test Harness, each with <i>cbsdId</i>=Ci, <i>i</i>={1,2} DP has received a valid grant with <i>grantId</i> = Gi, <i>i</i>={1,2} for each CBSD Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants <p>Invoke trigger on UUT to Relinquish Grant from the SAS Test Harness</p>	--	--
2	<p>DP with two CBSDs sends Relinquishment Request with two objects to the SAS Test Harness. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> <i>cbsdId</i>= Ci <i>grantId</i>= Gi 	--	--
3	<p>If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message. If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array. Parameters for each CBSD within the Relinquishment Response shall be as follows:</p> <ul style="list-style-type: none"> <i>cbsdId</i>= Ci No <i>grantId</i> <i>responseCode</i> = Ri 	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (<i>responseCode</i> =0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <p>A. UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</p>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.4.3 [WINNF.FT.D.RLQ.6] Domain Proxy Unsuccessful Relinquishment, responseCode=103

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> DP has successfully completed SAS Discovery and Authentication with SAS Test Harness DP has successfully registered 2 CBSD with SAS Test Harness, each with <i>cbsdId</i>=Ci, <i>i</i>={1,2} DP has received a valid grant with <i>grantId</i> = Gi, <i>i</i>={1,2} for each CBSD Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants <p>Invoke trigger on UUT to Relinquish Grant from the SAS Test Harness</p>	--	--
2	<p>DP with two CBSDs sends Relinquishment Request with two objects to the SAS Test Harness. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> <i>cbsdId</i>= Ci <i>grantId</i>= Gi 	--	--
3	<p>If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message. If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array. Parameters for each CBSD within the Relinquishment Response shall be as follows:</p> <ul style="list-style-type: none"> <i>cbsdId</i>= Ci No <i>grantId</i> <i>responseCode</i> = Ri 	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (<i>responseCode</i> =0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <p>A. UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</p>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.5 CBSD Deregistration Process

5.5.1 [WINNF.FT.D.DRG.2] Domain Proxy Successful Deregistration

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> DP has successfully completed SAS Discovery and Authentication with SAS Test Harness DP has successfully registered 2 CBSD with SAS Test Harness, each with <i>cbsdId</i>=Ci, i={1,2} DP has received a valid grant with <i>grantId</i> = Gi, i={1,2} for each CBSD Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants <p>Invoke trigger on UUT to Relinquish Grant from the SAS Test Harness</p>	--	--
2	UUT may send a Relinquishment request and receives Relinquishment response with <i>responseCode</i> =0 for each CBSD	--	--
3	<p>Verify DP sends a Deregistration Request message for each CBSD.</p> <p>This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Deregistration Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> <i>cbsdId</i>=Ci 	--	--
4	<p>The SAS Test Harness sends the Deregistration Response Message to UUT with:</p> <ul style="list-style-type: none"> No <i>cbsdId</i> <i>responseCode</i> = 102 	--	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response (<i>responseCode</i> =0) to further request messages from the UUT.	--	--
6	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.5.2 [WINNF.FT.D.DRG.4] Domain Proxy Deregistration responseCode=102

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> DP has successfully completed SAS Discovery and Authentication with SAS Test Harness DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. <p>Invoke trigger to deregister each UUT from the SAS Test Harness</p>	--	--
2	UUT may send a Relinquishment request and receives Relinquishment response with responseCode=0 for each CBSD	--	--
3	<p>Verify DP sends a Deregistration Request message for each CBSD.</p> <p>This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Deregistration Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> cbsdId = Ci 	--	--
4	<p>If a separate Deregistration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Deregistration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Deregistration Response Message shall be as follows:</p> <ul style="list-style-type: none"> No cbsdId in either response responseCode = Ri 	--	--
5	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: <ul style="list-style-type: none"> A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.5.3 [WINNF.FT.C.DRG.5] Deregistration responseCode=103

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with <i>cbsdId</i>=C • UUT has received a valid grant with <i>grantId</i>= G • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--	--
2	UUT may send a Relinquishment request and receives Relinquishment response with <i>responseCode</i> =0	--	--
3	UUT sends Deregistration Request to SAS Test Harness with <i>cbsdId</i> =C	--	--
4	<p>The SAS Test Harness sends the Deregistration Response Message to UUT with:</p> <ul style="list-style-type: none"> • <i>responseData</i>= cbsdId • <i>responseCode</i>= 103 	--	--
5	After completion of step 3, SAS Test Harness will not provide any positive response (<i>responseCode</i> =0) to further request messages from the UUT.	--	--
6	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> • UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: <ul style="list-style-type: none"> A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

5.6 CBSD Security Validation

5.6.1 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> UUT shall start CBSD-SAS communication with the security procedure The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate. Configure the SAS Test Harness to accept the security procedure and establish the connection 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
2	<ul style="list-style-type: none"> Make sure that Mutual authentication happens between UUT and the SAS Test Harness. Make sure that UUT uses TLS v1.2 Make sure that cipher suites from one of the following is selected, <ul style="list-style-type: none"> TLS_RSA_WITH_AES_128_GCM_SHA256 TLS_RSA_WITH_AES_256_GCM_SHA384 TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none"> UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with <i>responseCode</i>= 0 and <i>cbsdId</i>. 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

Wireshark Capture Example for Test Case:

The Wireshark capture shows a successful TLS connection between UUT and SAS Test Harness. The capture is filtered for 'tls' and shows the following packets:

- 224 2025-07-08 16:23:22.818505 172.21.130.15 172.21.130.15 TLSv1.2 347 Client Hello (SHA-mocksas.testharness.cbsd.winnf.github.com)
- 225 2025-07-08 16:23:22.828262 172.21.130.15 172.21.130.15 TLSv1.2 1464 Server Hello
- 227 2025-07-08 16:23:22.828262 172.21.130.15 172.21.130.15 TLSv1.2 591 Certificate, Server Key Exchange, Certificate Request, Server Hello Done
- 232 2025-07-08 16:23:22.827510 172.21.130.15 172.21.130.15 TLSv1.2 1464 Certificate
- 233 2025-07-08 16:23:22.827510 172.21.130.15 172.21.130.15 TLSv1.2 445 Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message
- 235 2025-07-08 16:23:22.833488 172.21.130.15 172.21.130.15 TLSv1.2 185 Change Cipher Spec, Encrypted Handshake Message
- 236 2025-07-08 16:23:22.834997 172.21.130.15 172.21.130.15 TLSv1.2 476 Application Data
- 237 2025-07-08 16:23:22.850956 172.21.130.15 172.21.130.15 TLSv1.2 100 Application Data
- 239 2025-07-08 16:23:22.895709 172.21.130.15 172.21.130.15 TLSv1.2 590 Application Data, Application Data, Application Data, Application Data, Application Data, A
- 248 2025-07-08 16:23:24.288798 172.21.130.15 172.21.130.15 TLSv1.2 347 Client Hello (SHA-mocksas.testharness.cbsd.winnf.github.com)
- 249 2025-07-08 16:23:24.293820 172.21.130.15 172.21.130.15 TLSv1.2 1464 Server Hello
- 251 2025-07-08 16:23:24.293820 172.21.130.15 172.21.130.15 TLSv1.2 591 Certificate, Server Key Exchange, Certificate Request, Server Hello Done
- 256 2025-07-08 16:23:24.299314 172.21.130.15 172.21.130.15 TLSv1.2 1464 Certificate
- 257 2025-07-08 16:23:24.299314 172.21.130.15 172.21.130.15 TLSv1.2 445 Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message
- 259 2025-07-08 16:23:24.301259 172.21.130.15 172.21.130.15 TLSv1.2 185 Change Cipher Spec, Encrypted Handshake Message
- 260 2025-07-08 16:23:24.301900 172.21.130.15 172.21.130.15 TLSv1.2 441 Application Data
- 261 2025-07-08 16:23:24.302570 172.21.130.15 172.21.130.15 TLSv1.2 100 Application Data
- 263 2025-07-08 16:23:24.347194 172.21.130.15 172.21.130.15 TLSv1.2 808 Application Data, Application Data, Application Data, Application Data, Application Data, A
- 269 2025-07-08 16:23:25.713439 172.21.130.15 172.21.130.15 TLSv1.2 347 Client Hello (SHA-mocksas.testharness.cbsd.winnf.github.com)
- 270 2025-07-08 16:23:25.722508 172.21.130.15 172.21.130.15 TLSv1.2 1464 Server Hello
- 272 2025-07-08 16:23:25.722508 172.21.130.15 172.21.130.15 TLSv1.2 591 Certificate, Server Key Exchange, Certificate Request, Server Hello Done

The packet details for the first Client Hello (224) are shown below:

```

Length: 89
Handshake Protocol: Server Hello
Handshake Type: Server Hello (2)
Length: 85
Version: TLS 1.2 (0x0303)
Random: 57e467b54b9f1106f32f69f4fb314f8d842aca83841629eff7ca2c81cf
Session ID Length: 32
Session ID: 0a3196dbd83fafa08035d9ef1d9e3bd4f9926d19a5a503ac1ff17207b9ec2
Cipher Suite: TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 (0xc02f)
Compression Method: null (0)
Extensions Length: 13
Extensions: renegotiation_info (len=1)
Extension: ec_point_formats (len=4)
[JAS5 Fullstring: 771,49199,65281-1]
[JAS5: 303951d4c50ef62e991652225a6f0281]

```

5.6.2 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> UUT shall start CBSD-SAS communication with the security procedures 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
2	<ul style="list-style-type: none"> Make sure that UUT uses TLS v1.2 for security establishment. Make sure UUT selects the correct cipher suite. UUT shall use CRL or OCSP to verify the validity of the server certificate. Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness. 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	UUT may retry for the security procedure which shall fail	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

Wireshark Capture Example for Test Case:

WINNF.FT.C.SCS.2.0711.pcapng.pcapng

파일(F) 편집(E) 보기(V) 이동(G) 캡처(C) 분석(A) 통계(S) 전화(Y) 무선(W) 도구(T) 도움말(H)

Filter: tls

No.	Time	Source	Destination	Protocol	Length	Info
100	2025-07-11 10:37:29.127913	172.21.130.50	172.21.130.15	TLSv1.2	350	Client Hello (SHA256WithRSAEncryption, TLSv1.2)
101	2025-07-11 10:37:29.155869	172.21.130.15	172.21.130.50	TLSv1.2	1464	Server Hello
103	2025-07-11 10:37:29.155869	172.21.130.15	172.21.130.50	TLSv1.2	738	Certificate, Server Key Exchange, Certificate Request, Server Hello Done
108	2025-07-11 10:37:29.161933	172.21.130.50	172.21.130.15	TLSv1.2	1464	Certificate
109	2025-07-11 10:37:29.161933	172.21.130.50	172.21.130.15	TLSv1.2	445	Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message
111	2025-07-11 10:37:29.167333	172.21.130.15	172.21.130.50	TLSv1.2	105	Change Cipher Spec, Encrypted Handshake Message
112	2025-07-11 10:37:29.169130	172.21.130.50	172.21.130.15	TLSv1.2	85	Encrypted Alert

Frame 100: 350 bytes on wire (2800 bits), 350 bytes captured (2800 bits) on interface \Device\NPF_{887DE53D-0660-47F5-9926-D780B2B2CF85}, id 0

Ethernet II, Src: SuperMicroCo_df:51:2c (3c:ec:ef:df:51:2c), Dst: SamsungElect_id:a9:77 (8c:b0:e9:1d:a9:77)

Internet Protocol Version 4, Src: 172.21.130.50, Dst: 172.21.130.15


Transmission Control Protocol, Src Port: 35766, Dst Port: 5000, Seq: 1, Ack: 1, Len: 296

Transport Layer Security

5.6.3 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> UUT shall start CBSD-SAS communication with the security procedures 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
2	<ul style="list-style-type: none"> Make sure that UUT uses TLS v1.2 for security establishment. Make sure UUT selects the correct cipher suite. UUT shall use CRL or OCSP to verify the validity of the server certificate. Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness. 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	UUT may retry for the security procedure which shall fail.	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL


Wireshark Capture Example for Test Case:

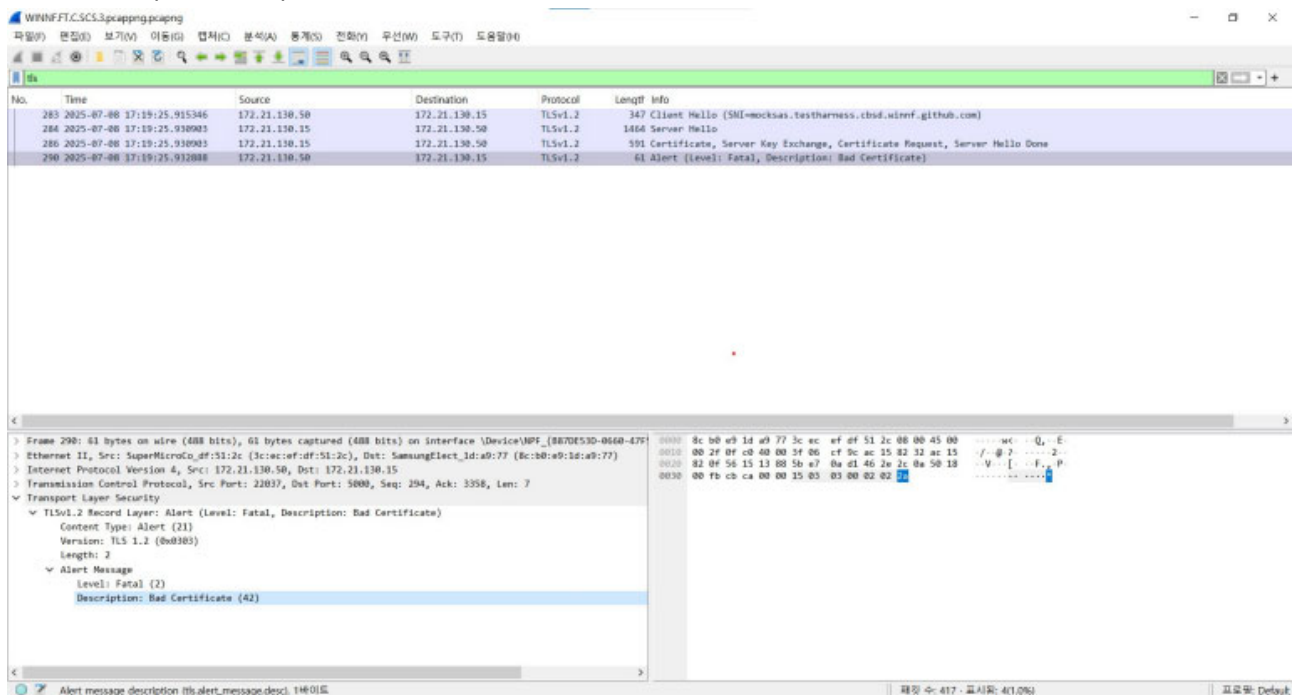

5.6.4 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> UUT shall start CBSD-SAS communication with the security procedures 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
2	<ul style="list-style-type: none"> Make sure that UUT uses TLS v1.2 for security establishment. Make sure UUT selects the correct cipher suite. UUT shall use CRL or OCSP to verify the validity of the server certificate Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness. 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	UUT may retry for the security procedure which shall fail.	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL


Wireshark Capture Example for Test Case:

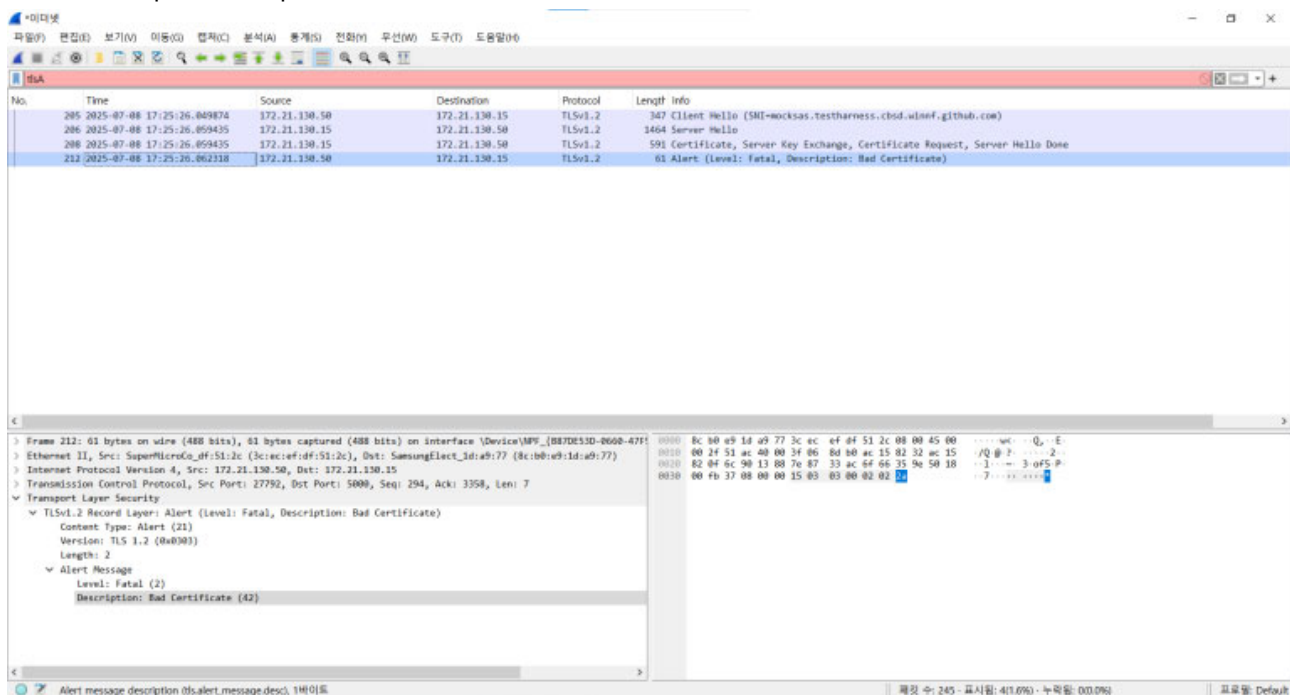

5.6.5 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> UUT shall start CBSD-SAS communication with the security procedures 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
2	<ul style="list-style-type: none"> Make sure that UUT uses TLS v1.2 for security establishment. Make sure UUT selects the correct cipher suite. UUT shall use CRL or OCSP to verify the validity of the server certificate. Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness. 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
3	UUT may retry for the security procedure which shall fail.	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> UUT shall not transmit RF 	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

Wireshark Capture Example for Test Case:

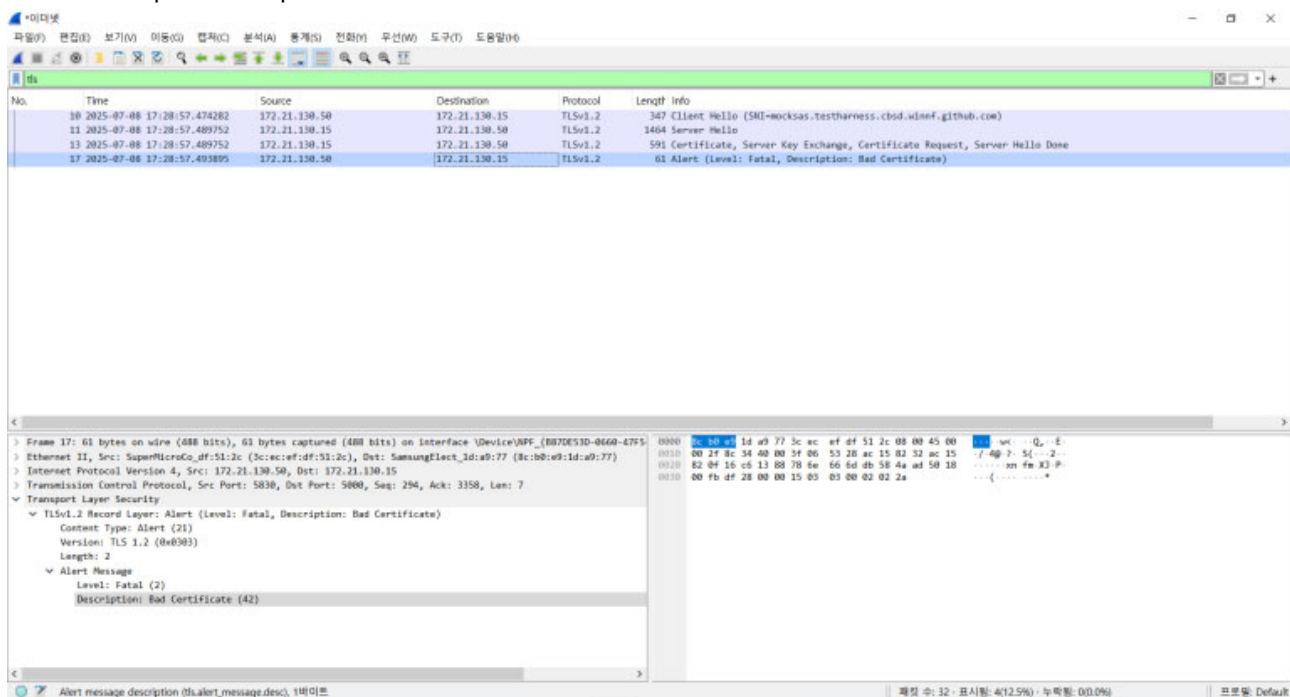

5.7 CBSD RF Power Measurement

5.7.1 [WINNF.PT.C.HBT.1] UUT RF Transmit Power Measurement

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT has registered with the SAS, with CBSD ID = C • UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case <p><i>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</i></p>	--	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none"> • UUT sends Heartbeat Request, including: <ul style="list-style-type: none"> ◦ cbsdId= C ◦ grantId= G • SAS Test Harness responds with Heartbeat Response, including: <ul style="list-style-type: none"> ◦ cbsdId= C ◦ grantId= G ◦ transmitExpireTime= current UTC time + 200 seconds ◦ responseCode= 0 	--	--
3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfil the requirements of the power measurement method.</p> <p><i>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</i></p>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

● RF Power Measurements


Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfill the requirements of the power measurement method

Frequency [MHz]	Bandwidth [MHz]	Granted maxEIRP [dBm/MHz]	Conducted Power Density					Duty Cycle Factor (dB)	Antenna Gain [dBi]	maxEIRP [dBm/MHz]
			Tx1 Conducted PSD [dBm/MHz]	Tx2 Conducted PSD [dBm/MHz]	Tx3 Conducted PSD [dBm/MHz]	Tx4 Conducted PSD [dBm/MHz]	Total Conducted PSD [dBm/MHz]			
3624.99	40	16	0.873	0.909	0.825	0.992	6.921	3.010	6.00	15.931
3624.99	40	10	-5.532	-5.161	-5.219	-5.226	0.738	3.010	6.00	9.748
3624.99	40	4	-11.161	-11.275	-11.311	-11.290	-5.238	3.010	6.00	3.772


- Plots of RF Power Measurements

Granted max EIRP = 16 dBm/MHz


Tx 1

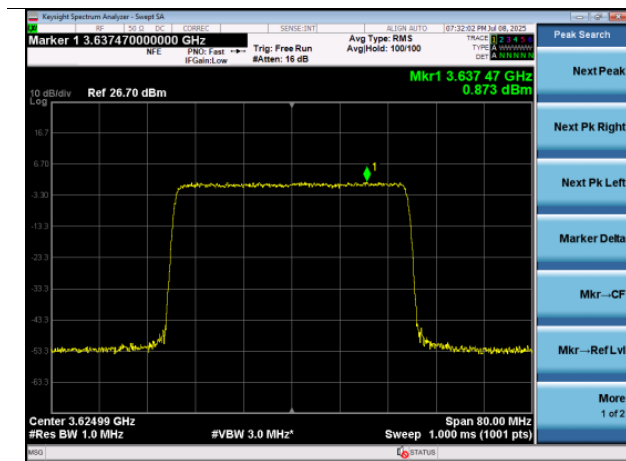


Tx 2

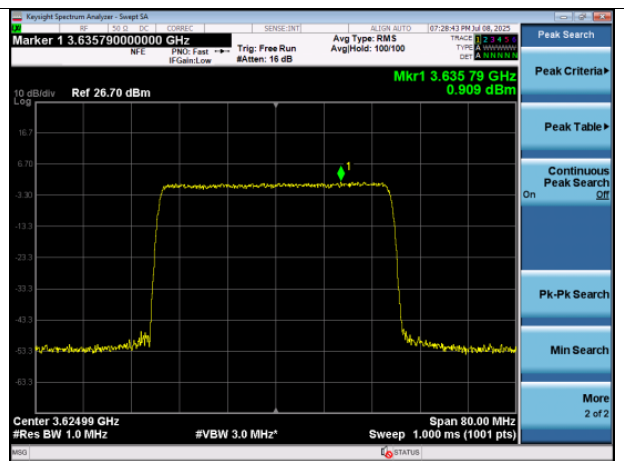

Tx 3

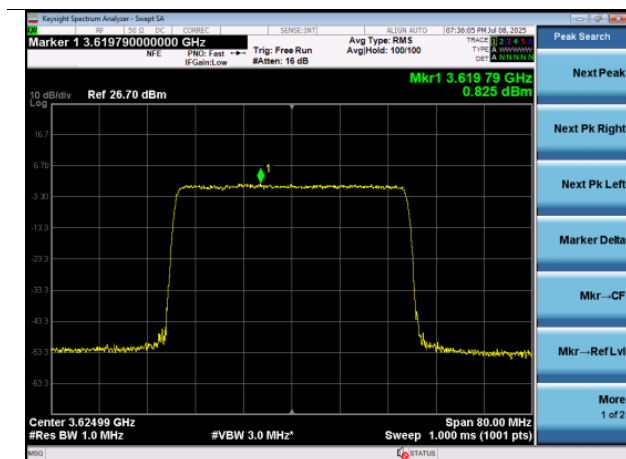


Tx 4

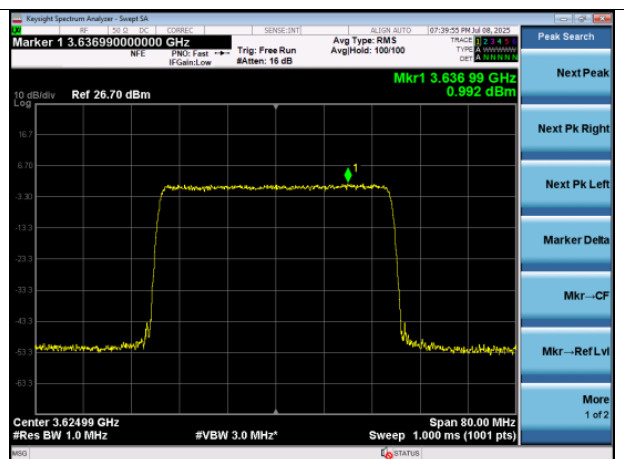


Granted max EIRP = 10 dBm/MHz


Tx 1

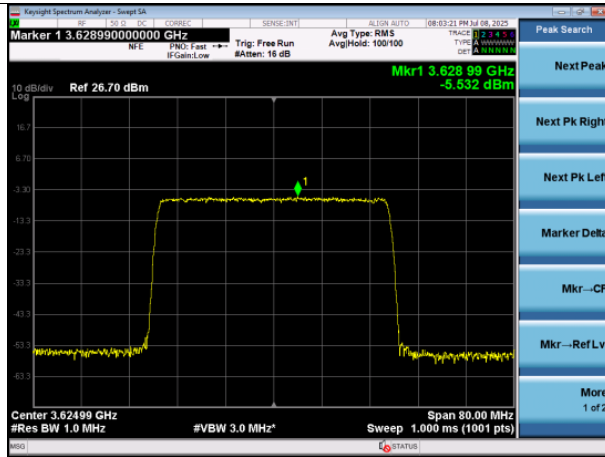


Tx 2

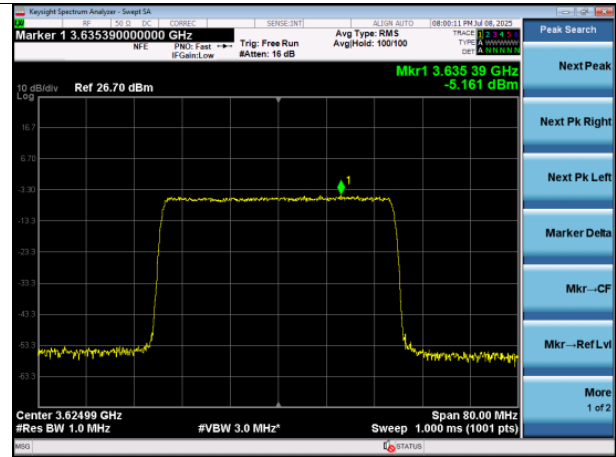

Tx 3

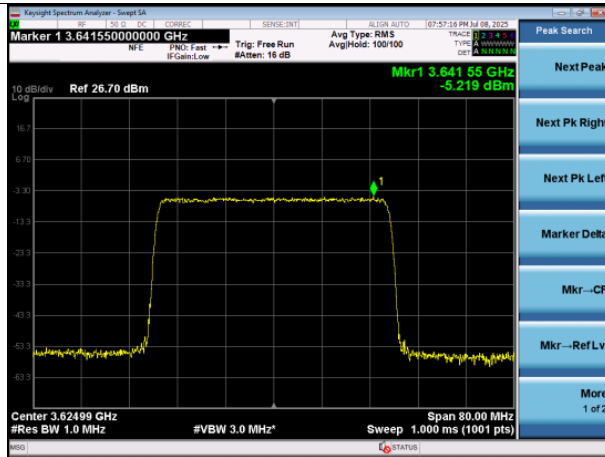


Tx 4

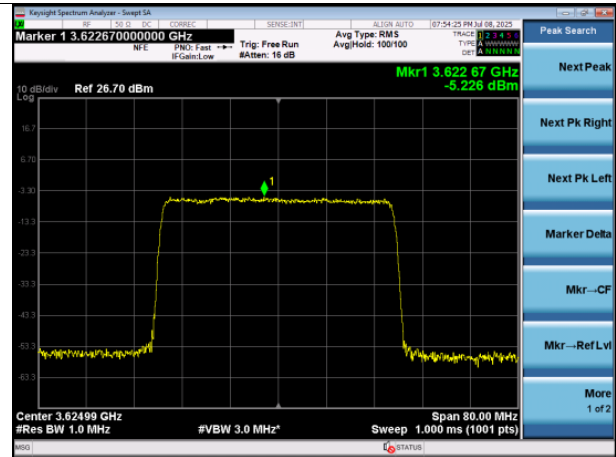


Granted max EIRP = 4 dBm/MHz


Tx 1

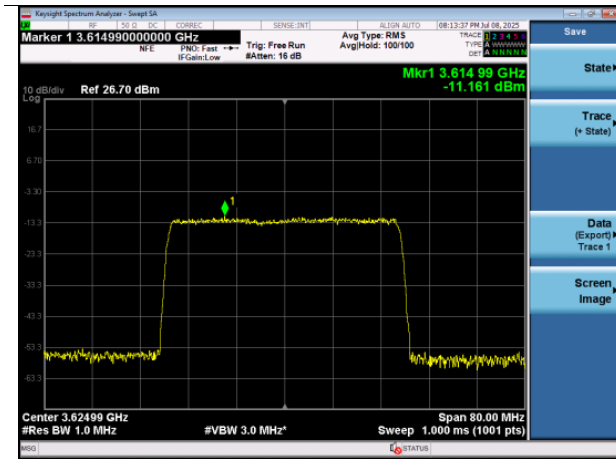


Tx 2

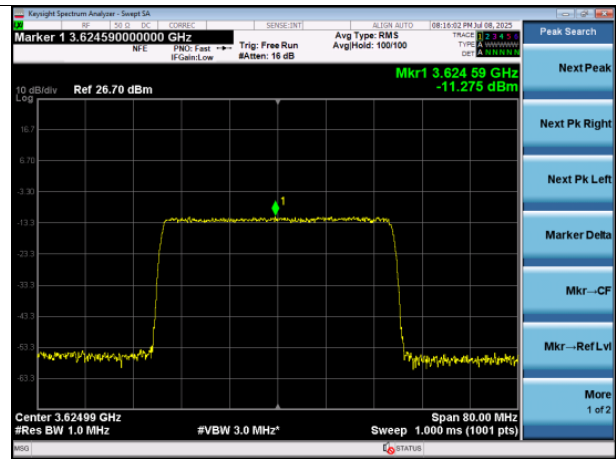

Tx 3

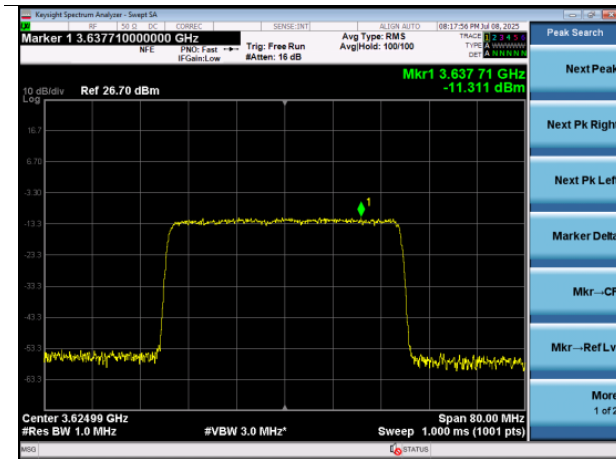

Tx 4

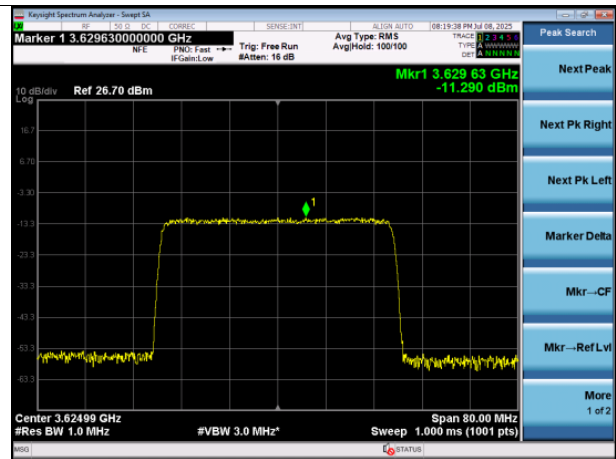

6. TEST LOGS

Please refer to the attached file named 'Test Logs'

7. TEST SETUP PHOTOGRAPHS

