

NOTES: UNLESS OTHERWISE SPECIFIED

PURCHASED LABEL

1. PRINT PER LABEL CONTENT SHOWN.

2 PRINTING SPECIFICATION:

INK COLOR - BLACK
BACKGROUND - WHITE
MATERIAL - 2mil POLYESTER with 1 mil CLEAR OVERCOAT
ADHESIVE - 1.8 mil #350 ACRYLIC

LABEL SIZE - 2.0 x 1.0 ± .02

CORNER RADIUS - .05 ± .02
ROLL SIZE - 500, MAX

3 INNER DIE CUT: 1.25 x 0.5 ± .02

4. DIE CUT TO LINER.
PERFORATING LINER BETWEEN LABELS IS OPTIONAL.
PART NUMBER TO BE PRINTED ON THE WASTE MATRIX.


5. LABEL MUST CONFORM TO UL 969 AND SHALL
BE UL APPROVED MATERIAL WITH SUPPLIER
NAME AND LABEL NAME OR DESIGNATION ON
INSIDE OF ROLL CORE.

6. LABEL MUST BE PROCURED FROM UL AUTHORIZED
SUPPLIER.

7. REFERENCE S14913.

8. THIS PART IS A U.L. CRITICAL PART. ANY CHANGES TO THIS
PART MUST BE APPROVED BY EMC/SAFETY GROUP.


9. THIS PART/ASSEMBLY SHALL BE COMPLIANT PER THE
LATEST REVISION OF ABBOTT SPECIFICATION S205053.

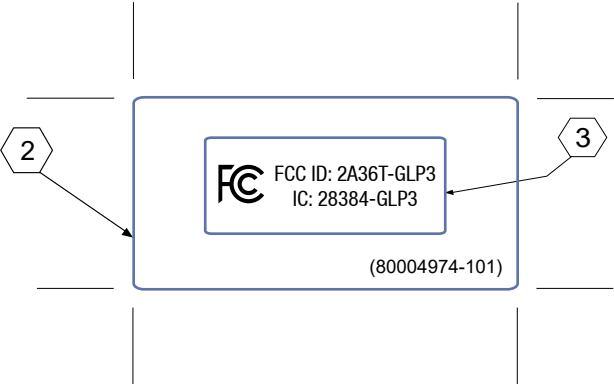

CONFIDENTIAL INFORMATION


CONTAINS TRADE SECRET AND/OR CONFIDENTIAL INFORMATION
WHICH IS THE PROPERTY OF ABBOTT LABORATORIES. AS PROVIDED
BY 21CFR 20.61. DO NOT DISCLOSE TO THE PUBLIC.

UNLESS OTHERWISE SPECIFIED:	DWN BY: S. Goldston	DATE: 07/14/22	 ABBOTT DIAGNOSTIC DIVISION ABBOTT LABORATORIES 1921 HURD DRIVE IRVING, TEXAS 75038, USA				
	MATERIAL: 2		TITLE: LABEL, GLP3 FCC - IC ID				
DIMENSIONS IN INCHES TOLERANCES .XX ± .02 .XXX ± .010 ANGULAR ± 2° 63 ✓ THREADS CLASS 2A OR 2B REMOVE BURRS AND SHARP EDGES .02 MAX.	APPLIED FINISH: None						
			SCALE 1/1		SIZE B	DWG NO. 80004974-101	REV. A
			DO NOT SCALE DRAWING		SHEET 1 OF 1		



*: Deviating dimensions require the consent of Abbott /
*: Abweichende Maße bedürfen der Zustimmung durch Abbott

Material requirements:
self-adhesive, abrasion-proof, temperature-resistant from -20 to +80°C /
Materialanforderungen:
Selbstklebend, abriebfest und temperaturbeständig von -20 bis +80°C


		General tolerances		Surface finish		Scale 1:1		Weight: 0.00 g	
		DIN ISO 2768 - mK		DIN ISO 1302		Material		Sale No. 12837	Revision C
				Date	Signature	Component Label SAL Alinity c Section			
				Cre. Part 28.10.2020	she				
				Cre. Drw. 12.10.2022	WREDEKX				
				Appv d					
				Standard					
				 Abbott Sachsenkamp 5, 20097 Hamburg		Article No.			Sheet
						20036515-101			1 / 1
Rev.	Change	Date	Name	Refer to protection notice ISO 16016		Replacement for:		Replaced by:	

SAL Alinity c

Component Label
IC HVIN Location


FCC/IC Label
Location
(Permanent
Acrylic
Adhesive)





*: Deviating dimensions require the consent of Abbott /
*: Abweichende Maße bedürfen der Zustimmung durch Abbott

Material requirements:
self-adhesive, abrasion-proof, temperature-resistant from -20 to +80°C /
Materialanforderungen:
Selbstklebend, abriebfest und temperaturbeständig von -20 bis +80°C

		General tolerances		Surface finish		Scale 1:1		Weight: 0.00 g		
		DIN ISO 2768 - mK		DIN ISO 1302		Material		Sale No. 12838	Revision C	
				Date	Signature	Component Label SAL Alinity i Section				
				Cre. Part	28.10.2020					she
				Cre. Drw.	12.10.2022					WREDEKX
				Appv'd						
				Standard						
				 Abbott Sachsenkamp 5, 20097 Hamburg			Article No.		Sheet	
							20036516-101		1 / 1	
Rev.	Change	Date	Name	Refer to protection notice ISO 16016		Replacement for:		Replaced by:		

SAL Alinity i

Component Label
IC HVIN Location

FCC/IC Label
Location
(Permanent
Acrylic
Adhesive)

