




FCC DFS TEST REPORT

FCC ID : MSQ-RTGW00
Equipment : Wireless-AC3100 Dual Band Gigabit Router
Brand Name : ASUS
Model Name : RT-AC3100, RT-AC88R, RT-AC88U
Applicant : ASUSTeK COMPUTER INC.
4F, No. 150, Li-Te Rd., Peitou, Taipei 112, Taiwan
Manufacturer (1) : ASKEY TECHNOLOGY (JIANG SU) LTD
NO1388, Jiao Tong Road, Wujiang Economic
Technological Development Area Jiangsu Province
215200 China
Manufacturer (2) : Compal Networking (KunShan) Co., LTD.
No. 520, Nabbang Rd., Economic & Technical
Development Zone Kunshan, Jiangsu Province China
Standard : 47 CFR FCC Part 15.407

The product was received on Nov. 29, 2018, and testing was started from Mar. 06, 2019 and completed on Mar. 28, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

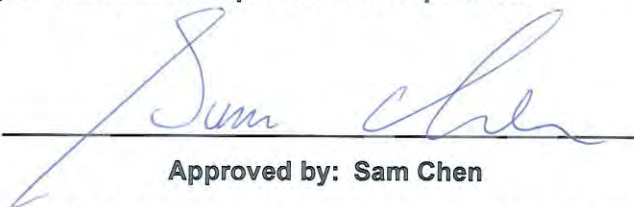

Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Accessories	14
1.3 Support Equipment.....	15
1.4 Testing Applied Standards	16
1.5 Testing Location Information	16
2 Test Configuration of EUT.....	17
2.1 Test Channel Frequencies Configuration.....	17
2.2 The Worst Case Measurement Configuration.....	17
3 Dynamic Frequency Selection (DFS) Test Result	18
3.1 General DFS Information	18
3.2 Radar Test Waveform Calibration	21
3.3 In-service Monitoring	29
3.4 Statistical Performance Check	37
4 Test Equipment and Calibration Data	39
5 Measurement Uncertainty	40

Appendix A. Test Photos

Photographs of EUT v01



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB Ver1.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.3	FCC KDB 905462 7.8.3	DFS: In-Service Monitoring for Channel Move Time (CMT)	PASS	-
3.3	FCC KDB 905462 7.8.3	DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT)	PASS	-
3.3	FCC KDB 905462 7.8.3	DFS: In-Service Monitoring for Non-Occupancy Period (NOP)	PASS	-
3.4	FCC KDB 905462 7.8.4	DFS: Statistical Performance Check	PASS	-
3.1.4	FCC KDB 905462 8.1	User Access Restrictions	PASS	-
Note1: For Client without radar detection (Bridge), Since the product is client without radar detection function, only Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period are required to perform. Note2: For Master (Extender), only Channel Move Time, Channel Closing Transmission Time, Statistical Performance Check on one of the radar types is required to perform.				

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Cindy Peng



1 General Description

1.1 Information

1.1.1 RF General Information

Specification Items	Description	
Frequency Range	5250 MHz – 5350 MHz 5470 MHz – 5725 MHz	
Power Type	From power adapter	
Channel Bandwidth	20/40/80/80+80 MHz operating channel bandwidth	
Operating Mode	<input checked="" type="checkbox"/> Master (AP Router and Extender)	
	<input type="checkbox"/> Client with radar detection	
	<input checked="" type="checkbox"/> Client without radar detection (Bridge and Mesh)	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input checked="" type="checkbox"/> With TPC	<input type="checkbox"/> Without TPC
Weather Band (5600~5650MHz)	<input checked="" type="checkbox"/> With 5600~5650MHz	<input type="checkbox"/> Without 5600~5650MHz
Software / Firmware Version	9.0.0.4.384_5743	
<ul style="list-style-type: none">11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.VHT20, VHT40 and VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.EUT employ a TPC mechanism and TPC have the capability to operate at least 6 dB below highest RF output power.		

Note: The above information was declared by manufacturer.

**TPC Power Result
For Nss1:**

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-
5.25-5.35GHz	14.50	20.50	17.87	23.87
5.47-5.725GHz	14.69	20.69	18.06	24.06
802.11ac VHT20_Nss1,(MCS0)_4TX	-	-	-	-
5.25-5.35GHz	14.73	20.73	18.10	24.10
5.47-5.725GHz	14.92	20.92	18.29	24.29
802.11ac VHT40_Nss1,(MCS0)_4TX	-	-	-	-
5.25-5.35GHz	17.76	23.76	21.13	27.13
5.47-5.725GHz	17.76	23.76	21.13	27.13
802.11ac VHT80_Nss1,(MCS0)_4TX	-	-	-	-
5.25-5.35GHz	15.02	21.02	18.39	24.39
5.47-5.725GHz	17.92	23.92	21.29	27.29
802.11ac VHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-
5.25-5.35GHz	14.43	20.43	23.82	29.82
5.47-5.725GHz	14.50	20.50	23.89	29.89
802.11ac VHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-
5.25-5.35GHz	14.52	20.52	23.91	29.91
5.47-5.725GHz	14.54	20.54	23.93	29.93
802.11ac VHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-
5.25-5.35GHz	14.44	20.44	23.83	29.83
5.47-5.725GHz	14.51	20.51	23.90	29.90

For Nss2:

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11ac VHT20-BF_Nss2,(MCS0)_4TX	-	-	-	-
5.25-5.35GHz	16.71	22.71	23.09	29.09
5.47-5.725GHz	17.56	23.56	23.94	29.94
802.11ac VHT40-BF_Nss2,(MCS0)_4TX	-	-	-	-
5.25-5.35GHz	17.40	23.40	23.78	29.78
5.47-5.725GHz	17.55	23.55	23.93	29.93
802.11ac VHT80-BF_Nss2,(MCS0)_4TX	-	-	-	-
5.25-5.35GHz	16.03	22.03	22.41	28.41
5.47-5.725GHz	17.57	23.57	23.95	29.95

For 802.11ac (VHT80+80) mode, Nss1:

Mode	Min Power (dBm)	Max Power (dBm)	Min EIRP (dBm)	Max EIRP (dBm)
802.11ac VHT80+80_Nss1,(MCS0)_4TX	-	-	-	-
5.25-5.35GHz	13.34	19.34	16.71	22.71
802.11ac VHT80+80_Nss1,(MCS0)_4TX	-	-	-	-
5.47-5.725GHz	16.61	22.61	19.98	25.98

1.1.2 Antenna Information

Set	Brand	P/N	Antenna Type	Connector	Gain (dBi)		Color Ring
					2.4GHz	5GHz	
1	PSA	RFDPA171300SBLB809	Dipole Antenna	Reversed-SMA	2.25	3.37	Red
2	PSA	RFDPA171300SBLB810	Dipole Antenna	Reversed-SMA	2.25	3.37	Black
3	PSA	RFDPA171300SBLB811	Dipole Antenna	Reversed-SMA	2.20	3.36	Black
4	PSA	RFDPA171300SBLB812	Dipole Antenna	Reversed-SMA	2.18	3.19	Black
5	PSA	RFDPA171300SBLB813	Dipole Antenna	Reversed-SMA	2.20	3.36	Red
6	PSA	RFDPA171300SBLB814	Dipole Antenna	Reversed-SMA	2.18	3.19	Red
7	WHA YU	C660-510345-A(SRF2015719)	Dipole Antenna	Reversed-SMA	2.25	3.20	Red
8	WHA YU	C660-510346-A(SRF2015720)	Dipole Antenna	Reversed-SMA	2.25	3.20	Black
9	WHA YU	C660-510364-A(SRF20151386)	Dipole Antenna	Reversed-SMA	1.9	3.3	Black
10	WHA YU	C660-510365-A(SRF20151717)	Dipole Antenna	Reversed-SMA	1.9	3.3	Red

Note1: The above information was declared by manufacturer.

Note2: 1. The EUT has ten sets of antenna and there are four antennas for each set.

2. Both antennas above are the same type. Besides, only set 1 antenna was selected to perform the test and written in this report due to the highest gain.

For IEEE 802.11a/b/g/n/ac mode:

For 2.4GHz and 5GHz (3TX/3RX) function:

Port 1, Port 2 and Port 3 can be used as transmitting/receiving antenna.

Port 1, Port 2 and Port 3 could transmit/receive simultaneously.

For 2.4GHz and 5GHz (4TX/4RX) function:

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

1.1.3 DFS Band Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144.

For 40MHz bandwidth systems, use Channel 54, 62, 102, 110, 118, 126, 134, 142.

For 80MHz bandwidth systems, use Channel 58, 106, 122, 138.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz	-	-
5470~5725 MHz Band 3	100	5500 MHz	124	5620 MHz
	102	5510 MHz	126	5630 MHz
	104	5520 MHz	128	5640 MHz
	106	5530 MHz	132	5660 MHz
	108	5540 MHz	134	5670 MHz
	110	5550 MHz	136	5680 MHz
	112	5560 MHz	138	5690 MHz
	116	5580 MHz	140	5700 MHz
	118	5590 MHz	142	5710 MHz
	120	5600 MHz	144	5720 MHz
	122	5610 MHz	-	-

1.1.4 Table for 80+80 MHz Mode

Type	Channel No.	Frequency
1	42+58	5210+5290 MHz
2	106+122	5530+5610 MHz

1.1.5 Table for Multiple Listing

The EUT has three model numbers which are identical to each other in all aspects except for the following table:

Model No.	LAN Port	Heat sink color
RT-AC88U	8 LAN ports	Silver, Red
RT-AC3100	4 LAN ports	Silver, Black
RT-AC88R	8 LAN ports	Silver, Red

From the above models, model: RT-AC88U was selected as representative model for the test and its data was recorded in this report.

1.1.6 Table for EUT Function

The EUT supports below functions:

No.	Description
1	Master (AP Router)
2	Master (Extender)
3	Client without radar detection (Bridge)
4	Client without radar detection (Mesh)



1.1.7 Table for Adapter detail

(1) The difference between adapter 1 and adapter 4 as below:

Adapter1 (model: ADP-45BW B)			
Design No	MFG TITLE	MFG PART	DESCRIPTION
Q1	AUK	SMK0760F	FET 600V 7A 1.2ohm TO-220F-3P
Q1	ST	STP6NK60ZFP	FET 600V 6A 1.2ohm TO-220FP-3P
Q1	TOSHIBA	TK10A60DR(STA4,X)	FET 600V 10A 750mohm TO-220SIS-3P
D101	ST	STPS20S100CT	DIO SBD 20A 100V TO-220AB-3P C.C.
D101	ST	STPS20SM100ST	DIO SBD 20A 100V TO-220AB-3P
D101	ST	STPS30SM100ST	DIO SBD 30A 100V TO-220AB-3P
IC31	ON	DAP022ASN65T1G	IC ASIC PWM CURRENT MODE TSOP-6P SMD
IC131	TI	TL432BIDBZR	IC VOL REF ADJ 2.495V 100mA 0.5%
IC131	NXP	TL431BMFDT	IC VOL REF ADJ 2.495V 100mA 0.5%
IC131	DIODES	AS431ANTR-G1	IC VOL REF ADJ 2.5V 100mA 0.5% SOT-23-3P
IC32	EVERLIGHT	EL816M(Y)(D)-VG	PHOTO TR 50mA 80V DIP-4P 150%-300%
IC32	SHARP	PC123Y92FZ0F	PHOTO TR 50mA 70V DIP-4P 160%-300%
IC32	Renesas	PS2561DL1-1Y-V-A(G)	EOL PHOTO TR 40mA 80V DIP-4P 150%-300%
CX1	EUROPTRONIC	MPX2224K30B15LXD20	CAP X2 MP PC 305VAC 0.22uF K S15
CX1	OKAYA	LE224-MX-30-C3.2	CAP X2 MP PC 300VAC 0.22uF K S15
CX1	HUA	MKP-224K0275AB115S-G	CAP X2 MP PC 275VAC 0.22uF K S15
FL1	DELTA	HFV-MP13202	LINE FILTER T14 14mH MIN
FL101	DELTA	LFV-MP13303	LINE FILTER T10 17uH MIN
T1	DELTA	MV-MP13167	TRANSFORMER MAIN RM10 1mH +/-5%
C1	NICHICON	UPT2G680MHD3	CAP AL 400V 68uF M 16*25 P7.5
C1	NCC	EKMG401ELL680ML25S	CAP AL 400V 68uF M 16*25 P7.5
C1	L-Tec	TYJ2GM680K25O	CAP AL 400V 68uF M 16*25 P7.5
CY1	MURATA	DE1B3KX221KNHAN99F	CAP Y1/X1 CD 250VAC 220pF K B TP VI10
CY1	TDK	CD70-B2GA221KYVK	CAP Y1/X1 CD 250VAC 220pF K B TP VI10
CY1	WALSIN	YP0AH221K061DASDAB	CAP Y1/X1 CD 250VAC 220pF K B TP VI10
Adapter4 (model: ADP-45BW B)			
Design No	MFG TITLE	MFG PART	DESCRIPTION
Q1	TOSHIBA	TK10A60DR(STA4,X)	FET 600V 10A 750mohm TO-220SIS-3P
Q1	FUJI	FMV11N60ES	FET 600V 11A 750mohm TO-220F-3P
D101	ST	STPS20S100CT	DIO SBD 20A 100V TO-220AB-3P C.C.
D101	ST	STPS20H100CT	DIO SBD 20A 100V TO-220AB-3P C.C.
D101	ST	STPS30H100CT	DIO SBD 30A 100V TO-220AB-3P C.C.
IC31	NeoEnergy	DAP022AT	IC ASIC PWM CURRENT MODE SOT-26-6P SMD
IC131	LITE-ON	LA431OCRPA	IC REGU ADJ 2.495V 100mA 0.4% SOT-23R-3P
IC131	TI	TL432BIDBZR	IC VOL REF ADJ 2.495V 100mA 0.5%
IC131	NXP	TL431BMFDT	IC VOL REF ADJ 2.495V 100mA 0.5%

IC32	EVERLIGHT	EL816M(Y)(D)-VG	PHOTO TR 50mA 80V DIP-4P 150%-300%
IC32	SHARP	PC123Y92FZ0F	PHOTO TR 50mA 70V DIP-4P 160%-300%
IC32	TOSHIBA	TLP785F(D4-GRH,F	PHOTO TR 60mA 80V DIP-4P 150%-300%
CX1	HUA	MKP-334K0275AB115S-G	CAP X2 MP PC 275VAC 0.33uF K S15
CX1	HUA	MKP-334K0275AB115S-P	CAP X2 MP PC 275VAC 0.33uF K S15
CX1	EUROPTRONIC	MPX2334K30B15LXD31	CAP X2 MP PC 305VAC 0.33uF K S15
FL1	DELTA	HFV-MP15027	LINE FILTER T16 12.7mH MIN
FL101	DELTA	LFV-MP13171	LINE FILTER T6 1.55uH MIN
T1	DELTA	MV-MP15037	TRANSFORMER MAIN RM10 1000uH +/-5%
C1	NCC	EKMG401ELL680ML25S	CAP AL 400V 68uF M 16*25 P7.5
CY1	MURATA	DE1B3KX221KNHAN99F	CAP Y1/X1 CD 250VAC 220pF K B TP VI10
CY1	WALSIN	YP0AH221K061DASDAB	CAP Y1/X1 CD 250VAC 220pF K B TP VI10

(2) The difference between adapter 2 and adapter 5 as below:

Adapter 2 (model: AD883J20)	Adapter 5 (model: AD883J20)
Type: 010KLF BAH	Type: 010K-3LF

(3) The difference between adapter 3 and adapter 6 as below:

Adapter 3 (model: ADP-65DW B)			
Design No	MFG TITLE	MFG PART	DESCRIPTION
Q1	AUK	SMK0760F	FET 600V 7A 1.2ohm TO-220F-3P
Q1	ST	STP6NK60ZFP	FET 600V 6A 1.2ohm TO-220FP-3P
Q1	TOSHIBA	TK10A60DR(STA4,X)	FET 600V 10A 750mohm TO-220SIS-3P
D101	ST	STPS20S100CT	DIO SBD 20A 100V TO-220AB-3P C.C.
D101	ST	STPS20SM100ST	DIO SBD 20A 100V TO-220AB-3P
D101	ST	STPS30SM100ST	DIO SBD 30A 100V TO-220AB-3P
IC31	ON	DAP022ASN65T1G	IC ASIC PWM CURRENT MODE TSOP-6P SMD
IC131	TI	TL432BIDBZR	IC VOL REF ADJ 2.495V 100mA 0.5%
IC131	NXP	TL431BMFDT	IC VOL REF ADJ 2.495V 100mA 0.5%
IC131	DIODES	AS431ANTR-G1	IC VOL REF ADJ 2.5V 100mA 0.5% SOT-23-3P
IC32	EVERLIGHT	EL816M(Y)(D)-VG	PHOTO TR 50mA 80V DIP-4P 150%-300%
IC32	SHARP	PC123Y92FZ0F	PHOTO TR 50mA 70V DIP-4P 160%-300%
IC32	Renesas	PS2561DL1-1Y-V-A(G)	EOL PHOTO TR 40mA 80V DIP-4P 150%-300%
CX1	EUROPTRONIC	MPX2224K30B15LXD20	CAP X2 MP PC 305VAC 0.22uF K S15
CX1	OKAYA	LE224-MX-30-C3.2	CAP X2 MP PC 300VAC 0.22uF K S15
CX1	HUA	MKP-224K0275AB115S-G	CAP X2 MP PC 275VAC 0.22uF K S15
FL1	DELTA	HFV-MP13202	LINE FILTER T14 14mH MIN
FL101	DELTA	LFV-MP13303	LINE FILTER T10 17uH MIN
T1	DELTA	MV-MP13167	TRANSFORMER MAIN RM10 1mH +/-5%
C1	NICHICON	UPT2G680MHD3	CAP AL 400V 68uF M 16*25 P7.5
C1	NCC	EKMG401ELL680ML25S	CAP AL 400V 68uF M 16*25 P7.5



C1	L-Tec	TYJ2GM680K25O	CAP AL 400V 68uF M 16*25 P7.5
CY1	MURATA	DE1B3KX221KNHAN99F	CAP Y1/X1 CD 250VAC 220pF K B TP VI10
CY1	TDK	CD70-B2GA221KYVK	CAP Y1/X1 CD 250VAC 220pF K B TP VI10
CY1	WALSIN	YP0AH221K061DASDAB	CAP Y1/X1 CD 250VAC 220pF K B TP VI10
Adapter 6 (model: ADP-65DW B)			
Design No	MFG TITLE	MFG PART	DESCRIPTION
Q1	TOSHIBA	TK10A60DR(STA4,X)	FET 600V 10A 750mohm TO-220SIS-3P
Q1	FUJI	FMV11N60ES	FET 600V 11A 750mohm TO-220F-3P
D101	ST	STPS20S100CT	DIO SBD 20A 100V TO-220AB-3P C.C.
D101	ST	STPS20H100CT	DIO SBD 20A 100V TO-220AB-3P C.C.
D101	ST	STPS30H100CT	DIO SBD 30A 100V TO-220AB-3P C.C.
IC31	NeoEnergy	DAP022AT	IC ASIC PWM CURRENT MODE SOT-26-6P SMD
IC131	LITE-ON	LA431OCRPA	IC REGU ADJ 2.495V 100mA 0.4% SOT-23R-3P
IC131	TI	TL432BIDBZR	IC VOL REF ADJ 2.495V 100mA 0.5%
IC131	NXP	TL431BMFDT	IC VOL REF ADJ 2.495V 100mA 0.5%
IC32	EVERLIGHT	EL816M(Y)(D)-VG	PHOTO TR 50mA 80V DIP-4P 150%-300%
IC32	SHARP	PC123Y92FZ0F	PHOTO TR 50mA 70V DIP-4P 160%-300%
IC32	TOSHIBA	TLP785F(D4-GRH,F	PHOTO TR 60mA 80V DIP-4P 150%-300%
CX1	HUA	MKP-334K0275AB115S-G	CAP X2 MP PC 275VAC 0.33uF K S15
CX1	HUA	MKP-334K0275AB115S-P	CAP X2 MP PC 275VAC 0.33uF K S15
CX1	EUROPTONIC	MPX2334K30B15LXD31	CAP X2 MP PC 305VAC 0.33uF K S15
FL1	DELTA	HFV-MP15027	LINE FILTER T16 12.7mH MIN
FL101	DELTA	LFV-MP13171	LINE FILTER T6 1.55uH MIN
T1	DELTA	MV-MP15037	TRANSFORMER MAIN RM10 1000uH +/-5%
C1	NCC	EKMG401ELL680ML25S	CAP AL 400V 68uF M 16*25 P7.5
CY1	MURATA	DE1B3KX221KNHAN99F	CAP Y1/X1 CD 250VAC 220pF K B TP VI10
CY1	WALSIN	YP0AH221K061DASDAB	CAP Y1/X1 CD 250VAC 220pF K B TP VI10

1.1.8 Table for Class II Change

This product is an extension of original one reported under Sporton project number: FZ531828-15

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Adding Master (Extender) and Client without radar detection (Bridge and Mesh) functions.	DFS test items for Master (Extender) and Client without radar detection (Bridge).

1.2 Accessories

Power	Brand	Model	Rating
Adapter 1	ASUS	ADP-45BW B	Input: 100-240V ~ 50-60Hz, 1.2A Output: 19V, 2.37A
Adapter 2	ASUS	AD883J20	Input: 100-240V ~ 50-60Hz, 1.0A Output: 19V, 2.37A
Adapter 3	ASUS	ADP-65DW B	Input: 100-240V ~ 50-60Hz, 1.5A Output: 19V, 3.42A
Adapter 4	ASUS	ADP-45BW B	Input: 100-240V ~ 50-60Hz, 1.2A Output: 19V, 2.37A
Adapter 5	ASUS	AD883J20	Input: 100-240V ~ 50-60Hz, 1.0A Output: 19V, 2.37A
Adapter 6	ASUS	ADP-65DW B	Input: 100-240V ~ 50-60Hz, 1.5A Output: 19V, 3.42A
Adapter 7	ASUS	AD2066320	Input: 100-240V ~ 50/60Hz 1.0A Output: 19V, 2.37A
Adapter 8	ASUS	ADP-45BW Y	Input: 100-240V ~ 50-60Hz 1.2A Output: 19V, 2.37A
Other			
RJ-45 cable*1: Non-shielded, 1.5m			

Note: The power adapter does not affect the test result of RF tests, so only adapter 1 was tested and recorded in this report.



1.3 Support Equipment

For Client without radar detection (Bridge):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	Wireless-AC3100 Dual Band Gigabit Router (Device)	ASUS	RT-AC88U	MSQ-RTGW00

For Master (Extender):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	Notebook	DELL	E4300	N/A
D	Wireless-AC3100 Dual Band Gigabit Router (Device)	ASUS	RT-AC88U	MSQ-RTGW00
E	Wireless-AC3100 Dual Band Gigabit Router (Device)	ASUS	RT-AC88U	MSQ-RTGW00



1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

1.5 Testing Location Information

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

For Client without radar detection (Bridge):

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
DFS Site	DF01-CB	DK Chang	24~24.6°C / 51~55%	Mar. 06, 2019~Mar. 07, 2019

For Master (Extender):

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
DFS Site	DF01-CB	Jay Luo	22~24°C / 50~60%	Mar. 28, 2019

Test site Designation No. TW0006 with FCC

Test site registered number IC 4086B with Industry Canada.

2 Test Configuration of EUT

2.1 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std.	Test Channel Freq. (MHz)
802.11ac (VHT80)	5530 MHz

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Dynamic Frequency Selection (DFS)
Test Condition	Radiated measurement The EUT shall be configured to operate at the highest transmitter output power setting. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the lowest gain shall be used. The DFS radar test signals have been aligned to the direction corresponding to the EUT's maximum antenna gain.
Modulation Mode	802.11ac (VHT80)

3 Dynamic Frequency Selection (DFS) Test Result

3.1 General DFS Information

3.1.1 DFS Parameters

Table D.1: DFS requirement values	
Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (Note 1).
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. (Notes 1 and 2).
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth (Note 3).

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

Table D.2: Interference threshold values	
Maximum Transmit Power	Value (see note)
EIRP \geq 200 mW	-64 dBm
EIRP < 200 mW and PSD < 10dBm/MHz	-62 dBm
EIRP < 200 mW and PSD \geq 10dBm/MHz	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911D01.

3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

Requirement	DFS Operational mode		
	Master	Client without radar detection	Client with radar detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

3.1.3 Applicability of DFS Requirements during Normal Operation

Requirement	DFS Operational mode		
	Master	Client without radar detection	Client with radar detection
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Closing Transmission Time</i>	Yes	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

**3.1.4 User Access Restrictions**

User Access Restrictions	
<input checked="" type="checkbox"/>	DFS controls (hardware or software) related to radar detection are NOT accessible to the user. Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3.1.5 Channel Loading/Data Streaming

<input type="checkbox"/>	The data file (MPEG-4) has been transmitting in a streaming mode.
<input checked="" type="checkbox"/>	Software to ping the client is permitted to simulate data transfer with random ping intervals.
<input checked="" type="checkbox"/>	Minimum channel loading of approximately 17%.
<input type="checkbox"/>	Unicast protocol has been used.

3.2 Radar Test Waveform Calibration

3.2.1 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1A	1	15 unique PRI in KDB 905462 D02 Table 5a	$\text{Roundup}\left\{\left(\frac{1}{360}\right) \times \left(\frac{19 \times 10^6}{PRI}\right)\right\}$	60%	15
1B	1	15 unique PRI within 518-3066, Excluding 1A PRI		60%	15
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the short pulse radar types 1 through 4. If more than 30 waveforms are used for short pulse radar types 1 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

3.2.2 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Each waveform is defined as follows:

- The transmission period for the Long Pulse Radar test signal is 12 seconds.
- There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst Count.
- Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For



example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.

- ♦ If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- ♦ The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst Count. Each interval is of length $(12,000,000 / \text{Burst Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

3.2.3 Frequency Hopping Radar Test Waveform



Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.

3.2.4 DFS Threshold Level

DFS Threshold Level	
DFS Threshold level: -63 dBm	<input type="checkbox"/> at the antenna connector
	<input checked="" type="checkbox"/> in front of the antenna
The Interference Radar Detection Threshold Level is is $-64 \text{ dBm} + 0 [\text{dBi}] + 1 \text{ dB} = -63 \text{ dBm}$. That had been been taken into account the output power range and antenna gain.	

3.2.5 Calibration Setup

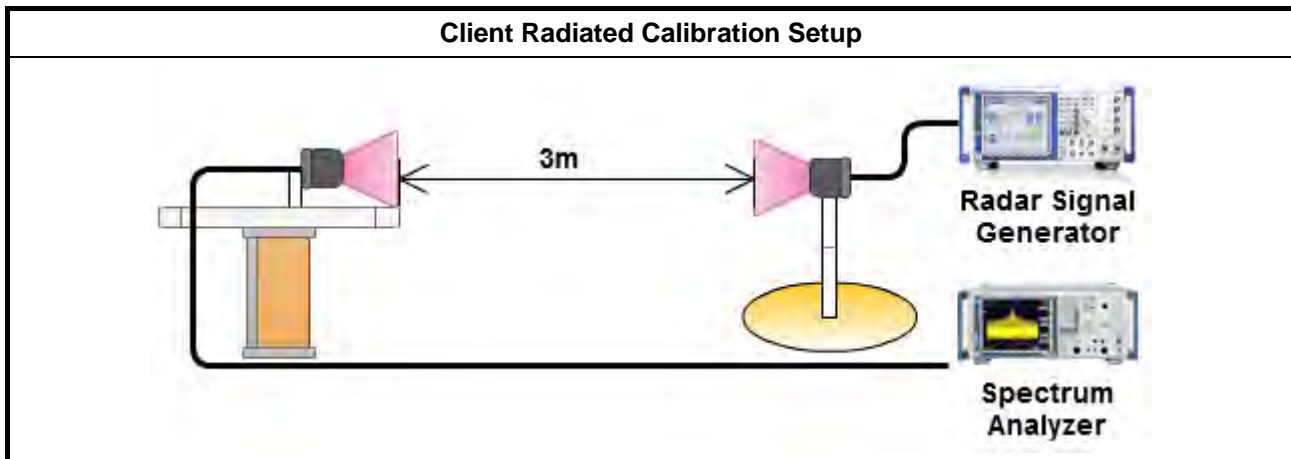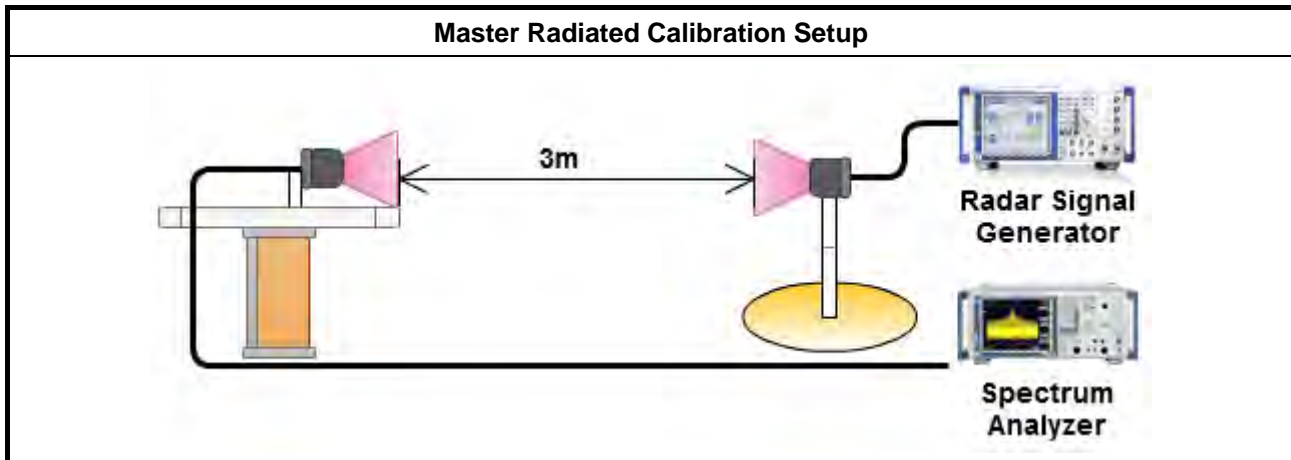




3.2.6 Radar Waveform calibration Plot

For Client without radar detection (Bridge):

Test Frequency: 5530 MHz

Radar #0 DFS detection threshold level

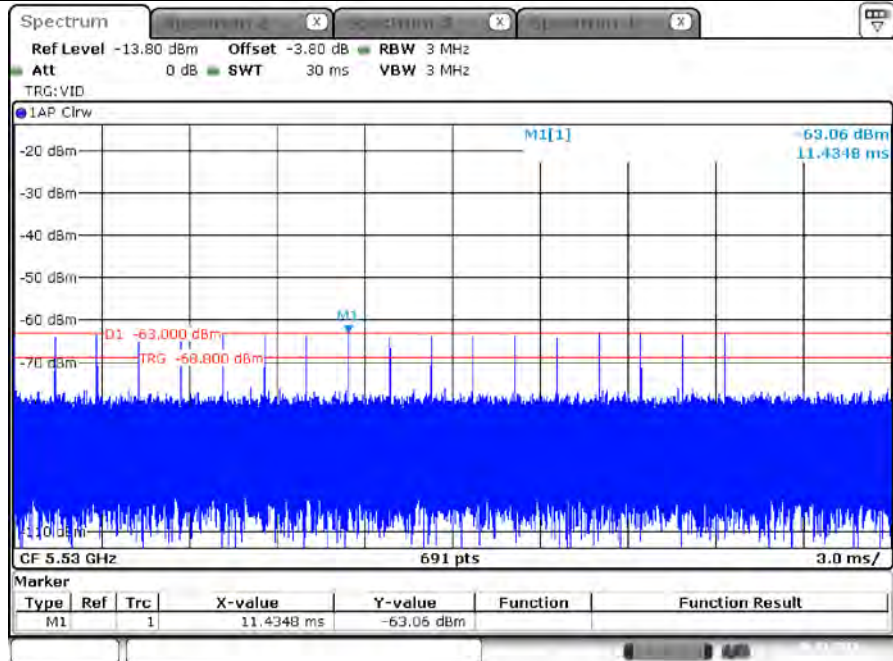


Date: 6 MAR 2019 13:57:52



For Master (Extender):



Radar #4 DFS detection threshold level

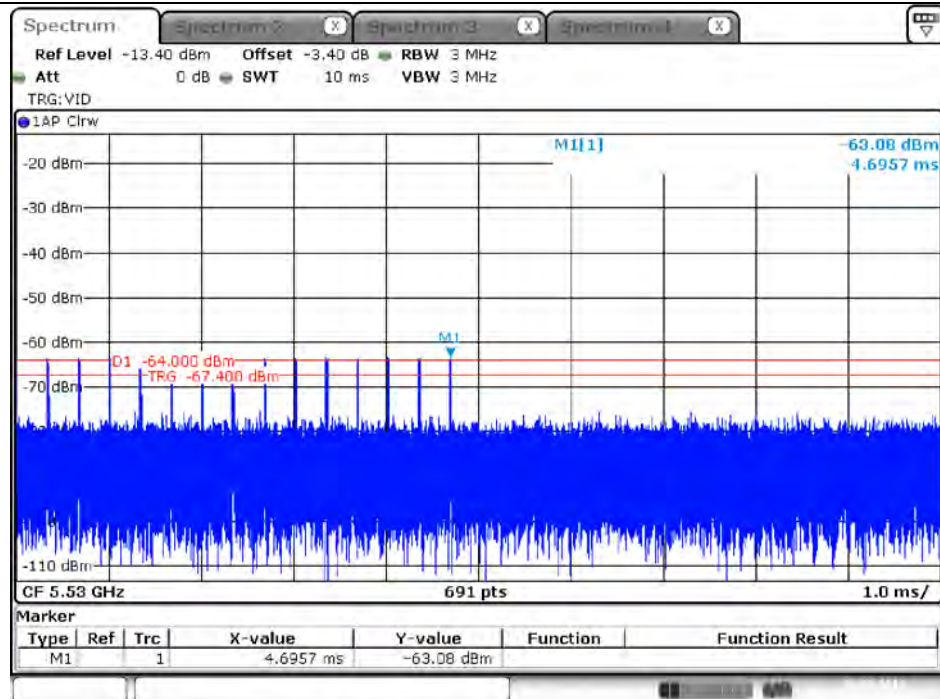

Date: 28.MAR.2019 06:04:55

3.2.7 Test Setup


A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

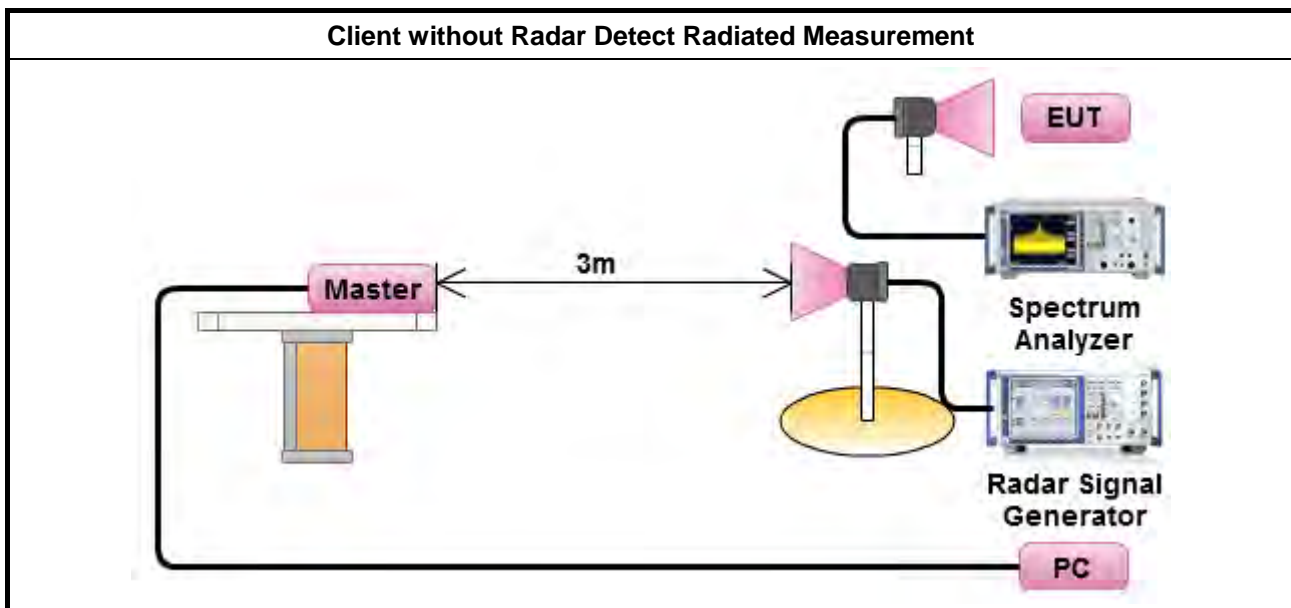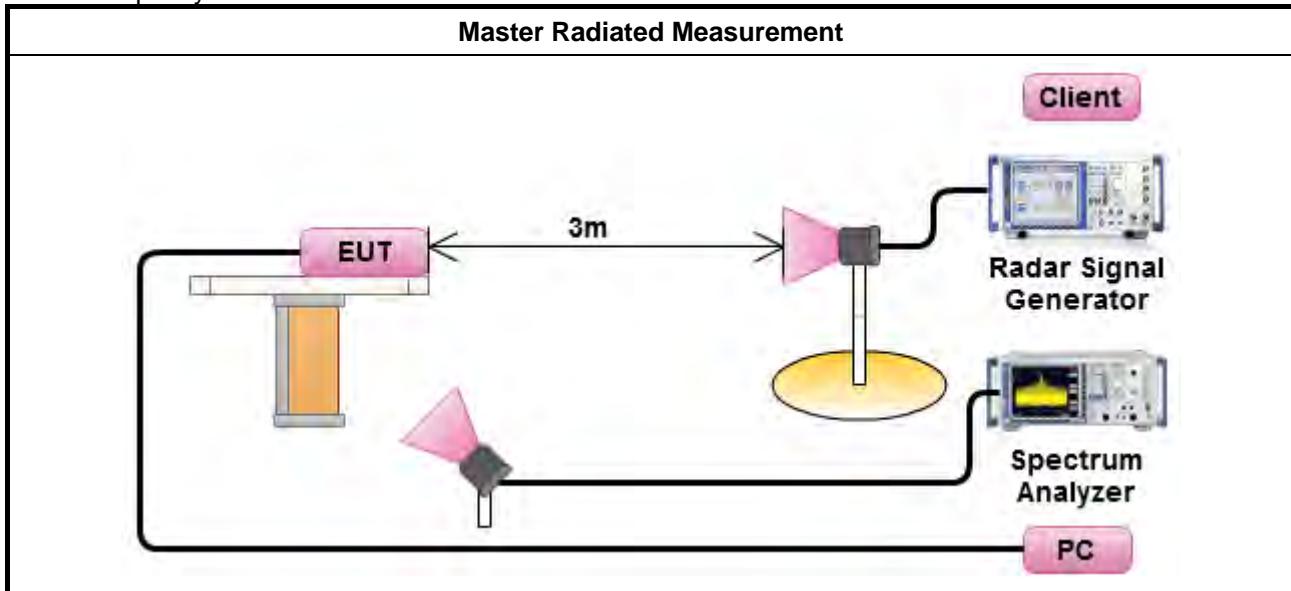




3.2.8 Data traffic Plot

For Client without radar detection (Bridge):

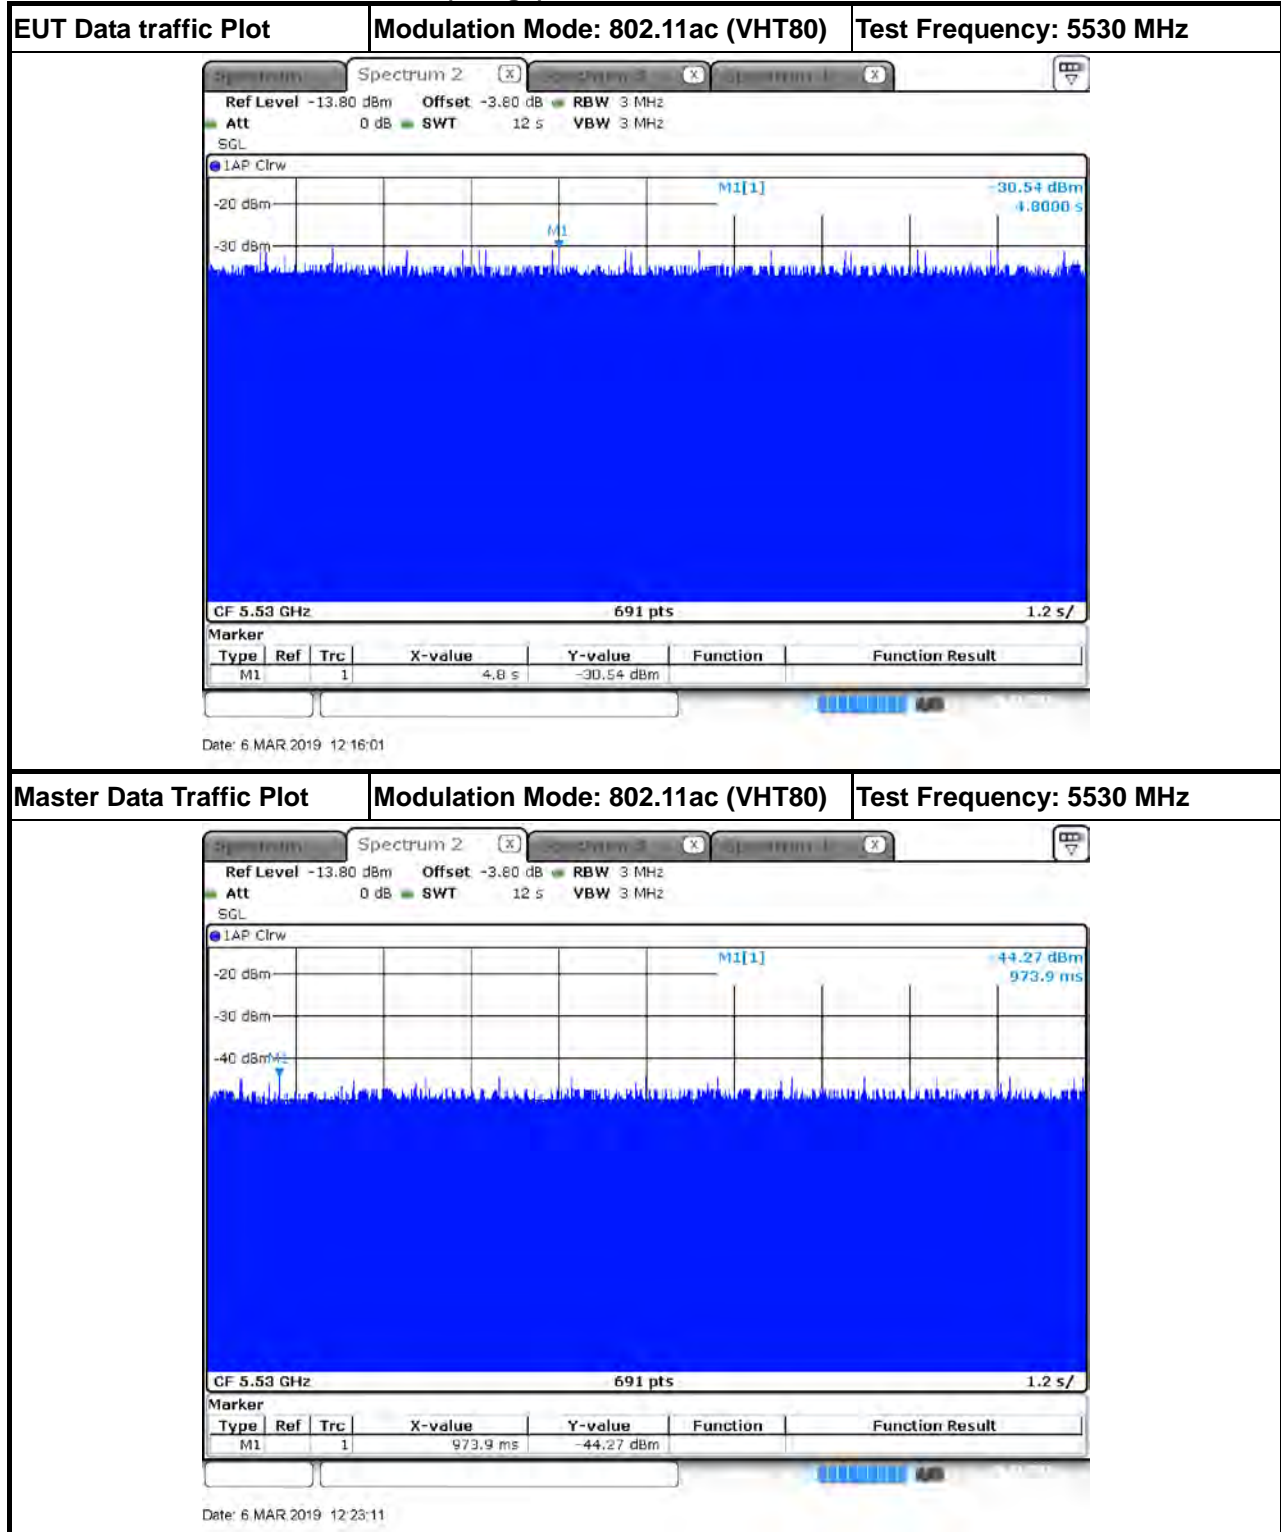

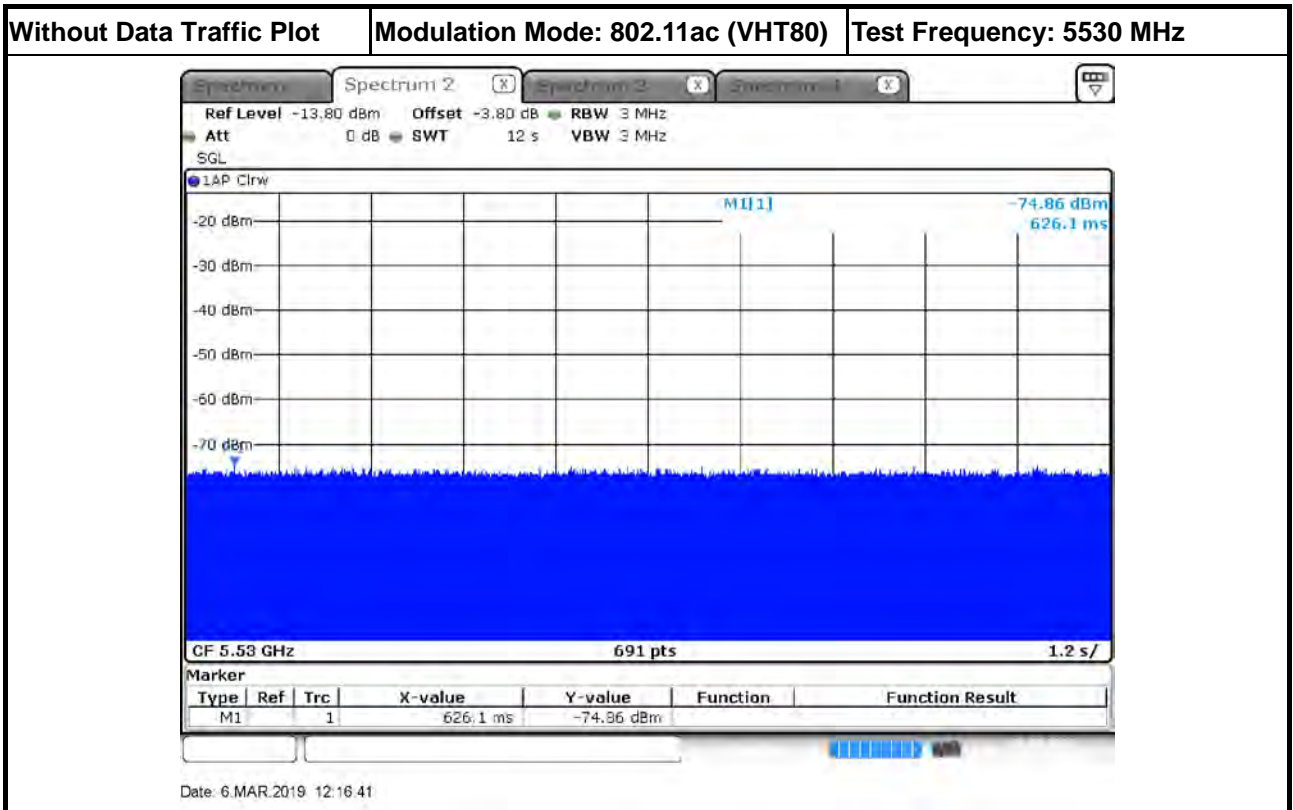

3.3 In-service Monitoring

3.3.1 In-service Monitoring Limit

In-service Monitoring Limit	
Channel Move Time	10 sec
Channel Closing Transmission Time	200 ms + an aggregate of 60 ms over remaining 10 sec periods.
Non-occupancy period	Minimum 30 minutes

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits.
<input checked="" type="checkbox"/>	Verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 12 sec plot needs to be reported for the Short Pulse Radar Types 0. And zoom-in a 60 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.
<input checked="" type="checkbox"/>	Verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits.

3.3.4 Test Result of Channel Move Time

For Client without radar detection (Bridge):


Modulation Mode: 802.11ac (VHT80)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5530 MHz	-
Channel Move Time (sec.)	0.782	< 10s

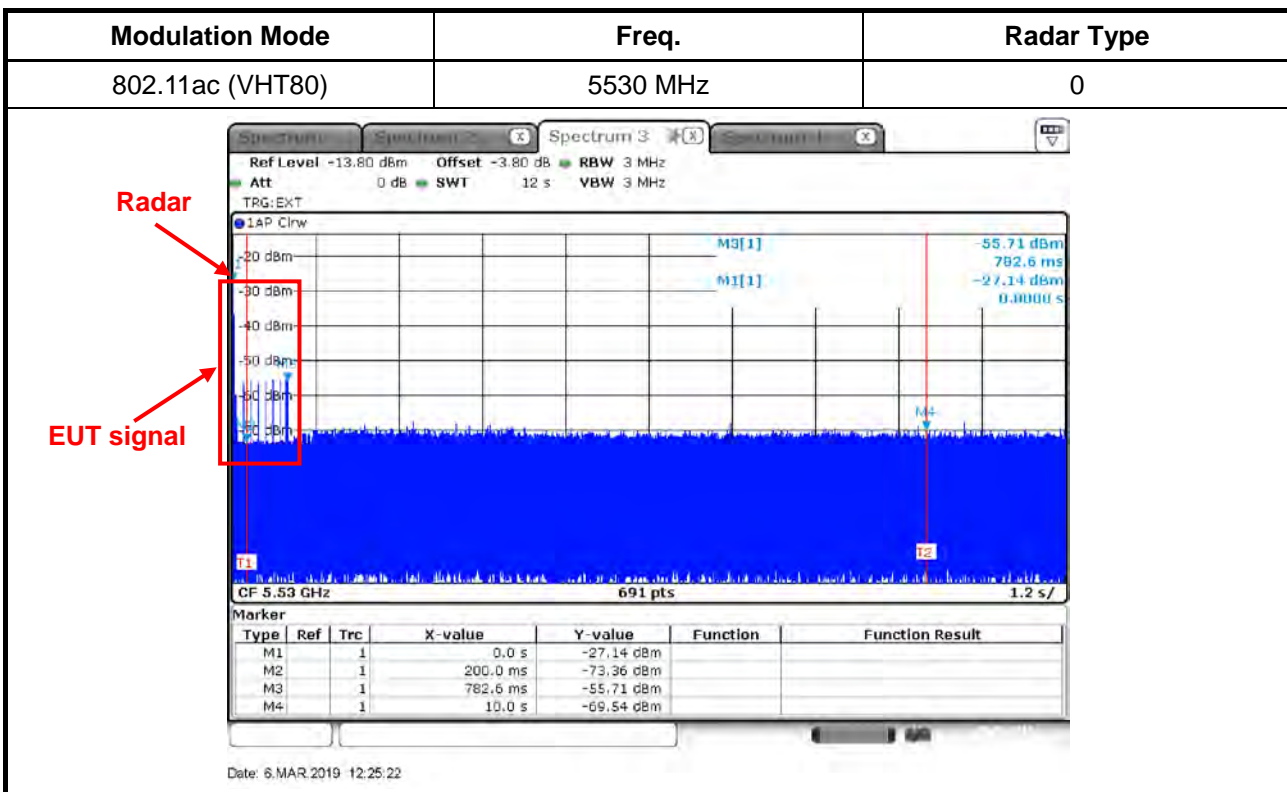

For Master (Extender):
Modulation Mode: 802.11ac (VHT80)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5530 MHz	-
Channel Move Time (sec.)	0.121	< 10s

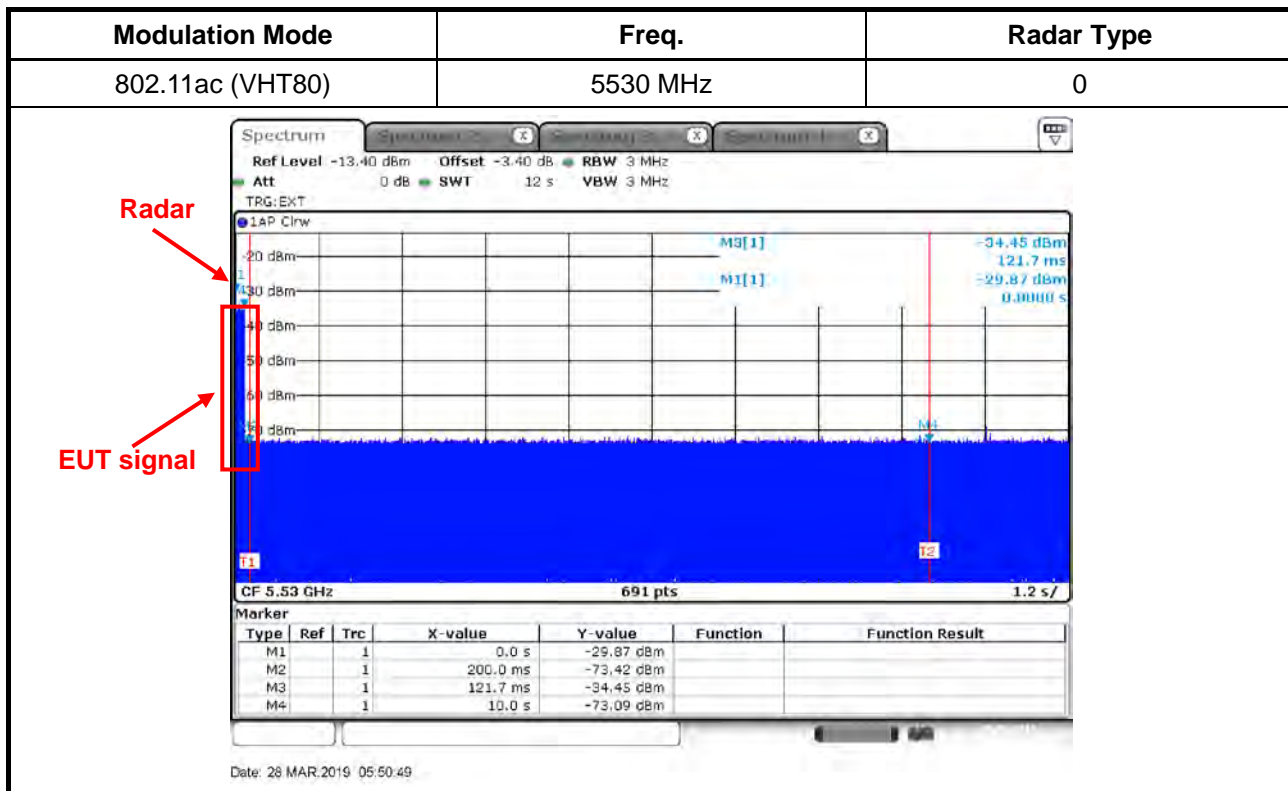




3.3.5 Test Result of Channel Closing Transmission Time

For Client without radar detection (Bridge):

Modulation Mode: 802.11ac (VHT80)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5530 MHz	-
Channel Closing Transmission Time (ms) (Note)	20.289	< 60ms

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

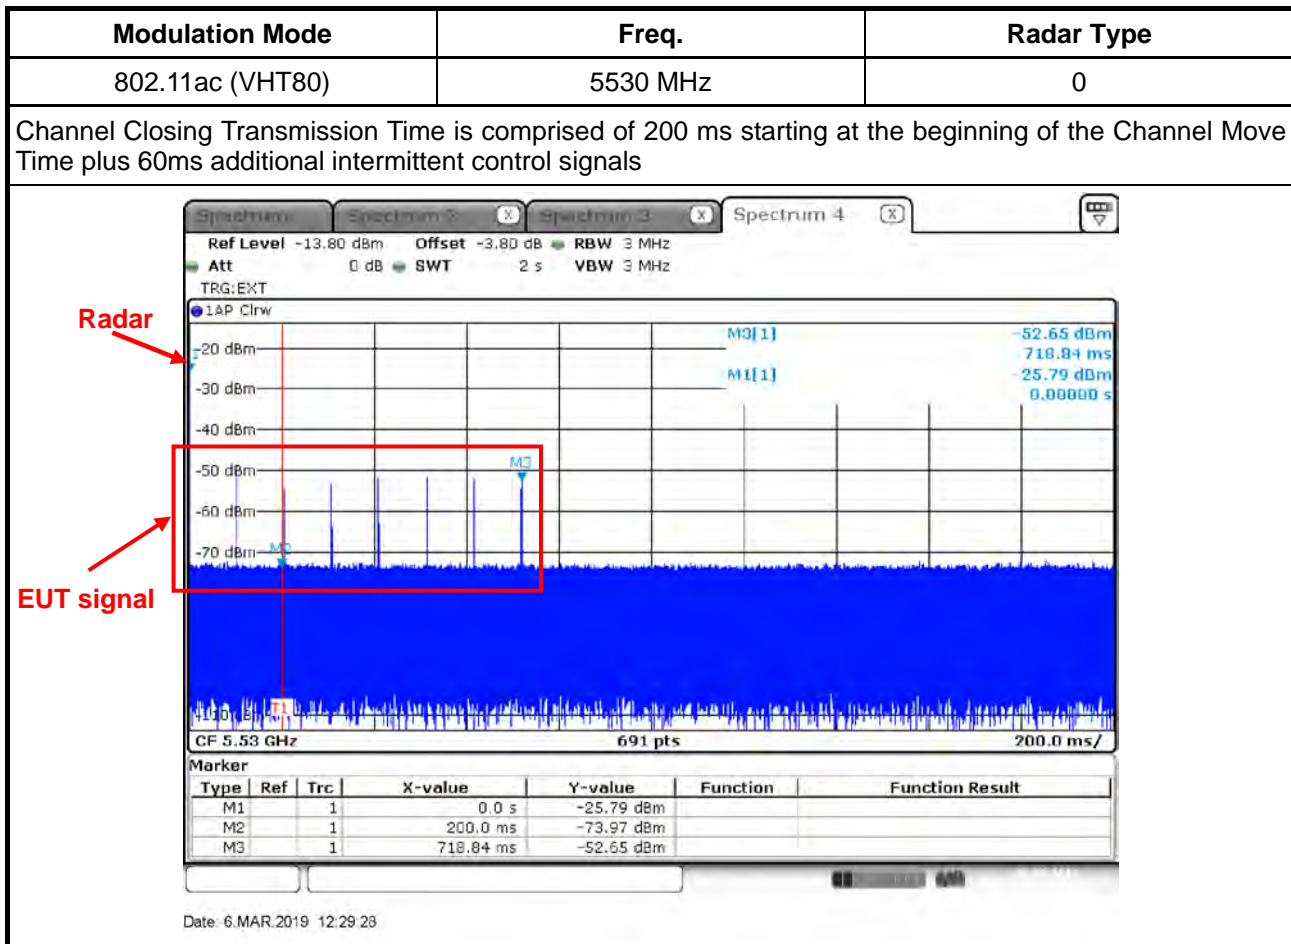

Dwell is the dwell time per spectrum analyzer sampling bin.

S is the sweep time

B is the number of spectrum analyzer sampling bins

C is the intermittent control signals of Channel Closing Transmission Time

N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission

Dwell (2.898 ms)= S (2000 ms) / B (690)

C (20.289 ms) = N (7) X Dwell (2.898 ms)



For Master (Extender):
Modulation Mode: 802.11ac (VHT80)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5530 MHz	-
Channel Closing Transmission Time (ms) (Note)	0.000	< 60ms

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.



Radar

EUT signal

Spectrum

Ref Level -13.40 dBm Offset -3.40 dB RBW 3 MHz
Att 0 dB SWT 2 s VBW 3 MHz
TRG:EXT

1AP Clrw

M3[1] -34.48 dBm 86.96 ms
M1[1] -29.56 dBm 0.00000 s

CF 5.53 GHz 691 pts 200.0 ms/

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1	1	0.0 s	-29.56 dBm		
M2	1	1	200.0 ms	-73.39 dBm		
M3	1	1	86.96 ms	-34.48 dBm		

Date: 28.MAR.2019 05:56:38

C (0.000 ms) = N (0) X Dwell (2.898 ms)

3.3.6 Test Result of Non-Occupancy Period

For Client without radar detection (Bridge):


Modulation Mode: 802.11ac (VHT80)

Parameter	Test Result	Limit
	Type 0	
Test Channel (MHz)	5530 MHz	-
Non-Occupancy Period (min.)	≥ 30	≥ 30 min

Modulation Mode	Freq.
802.11ac (VHT80)	5530 MHz

Non-Occupancy Period

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

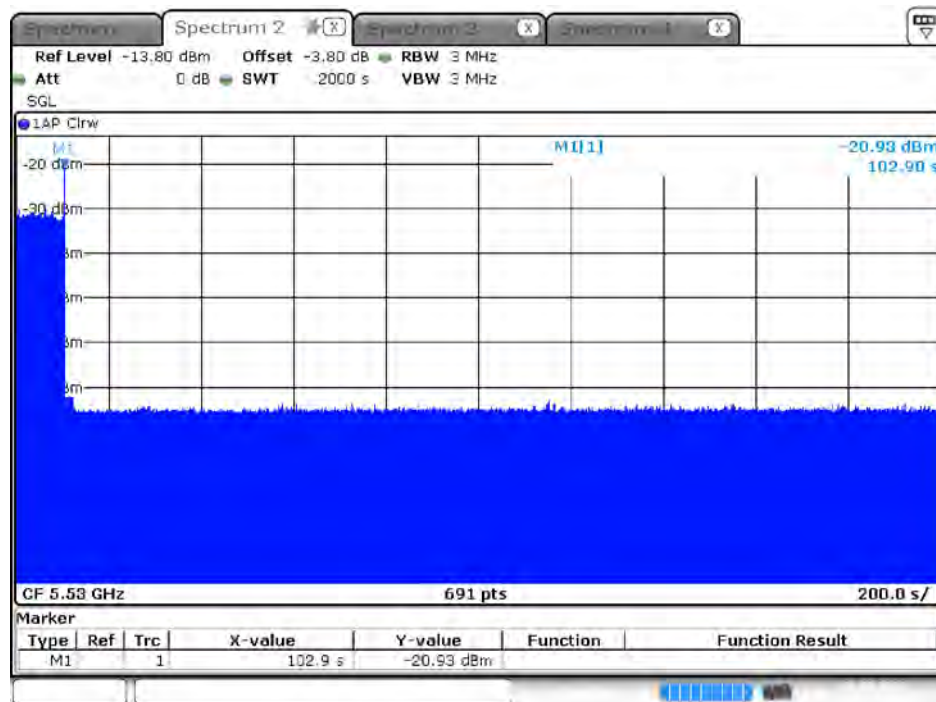



3.4 Statistical Performance Check

3.4.1 Statistical Performance Check Limit

Radar Type	Minimum Percentage of Successful Detection (Pd)	Minimum Trials
1	60%	30
2	60%	30
3	60%	30
4	60%	30
Aggregate (Radar Types 1-4)	80%	120
5	80%	30
6	70%	30

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100 = \text{Probability of Detection Radar Waveform}$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{Pd1 + Pd2 + Pd3 + Pd4}{4}$$

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For Statistical Performance Check test. Demonstrating a minimum channel loading of approximately 17% or greater of the test. Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 1-4 and 6 to ensure detection occurs. Then Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.

**3.4.4 Test Result of Statistical Performance Check**

For Master (Extender):

Modulation Mode: 802.11ac (VHT80)

Type 4 Radar Statistical Performance

Trial #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5497	18.0	242	15	1
2	5493	19.9	279	12	1
3	5508	12.9	487	14	1
4	5564	15.0	452	13	0
5	5495	16.3	230	12	1
6	5501	19.8	238	13	1
7	5514	18.2	420	16	1
8	5559	16.3	452	15	1
9	5558	14.2	495	12	1
10	5509	17.8	228	16	0
11	5560	19.1	211	16	0
12	5521	18.4	283	15	1
13	5495	11.8	411	12	1
14	5500	14.2	284	13	1
15	5499	13.9	202	12	1
16	5522	17.8	340	14	1
17	5546	15.6	290	16	1
18	5561	14.6	250	16	1
19	5569	14.4	484	15	1
20	5555	18.9	387	13	0
21	5555	11.1	348	15	1
22	5558	13.8	291	16	1
23	5504	14.3	295	12	1
24	5507	12.5	300	12	1
25	5524	12.5	322	14	0
26	5542	12.5	383	13	1
27	5492	15.7	322	16	1
28	5563	19.8	469	13	1
29	5526	18.6	406	15	1
30	5517	15.9	238	14	1
Detection Percentage (%)					83.333
Limit					60%
Test Result					Complied



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101026	9kHz~40GHz	Sep. 28, 2018	Sep. 27, 2019	Radiated (DF01-CB)
Signal generator	R&S	SMU200A	105352	25MHz-6GHz	Nov. 01, 2018	Oct. 31, 2019	Radiated (DF01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz – 18GHz	Jun. 29, 2018	Jun. 28, 2019	Radiated (DF01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Jun. 08, 2018	Jun. 07, 2019	Radiated (DF01-CB)
RF Power Divider	ANAREN	2 Way	DFS-01-DV-02	1GHz ~ 6GHz	Oct. 08, 2018	Oct. 07, 2019	Radiated (DF01-CB)
RF Power Divider	MTJ	2 Way	DFS-01-DV-03	1GHz ~ 6GHz	Oct. 08, 2018	Oct. 07, 2019	Radiated (DF01-CB)
RF Power Divider	ANAREN	4 Way	DFS-01-DV-01	1GHz ~ 6GHz	Oct. 08, 2018	Oct. 07, 2019	Radiated (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-57	1 GHz –18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiated (DF01-CB)
RF Cable-high	Woken	RG402	High Cable-58	1 GHz –18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiated (DF01-CB)

Note: Calibration Interval of instruments listed above is one year.



5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Radiated Emission	2.9 dB	Confidence levels of 95%