




POWER ANALYSIS TEST REPORT

Test of: LT25i

To: OET Bulletin 65 Supplement C: (2001-01)
IEEE1528:2003

FCC ID: PY7PM-0060

Test Report Serial No:
UL-SAR-RP89439JD02B V1.0

This Test Report Is Issued Under The Authority Of Richelieu Quoi, SAR Technology Consultant:	 (APPROVED SIGNATORY)
Checked By: Naseer Mirza	 (APPROVED SIGNATORY)
Issue Date:	08 November 2012
Test Dates:	06 September 2012 to 19 September 2012

This report is issued in portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by RFI Global Services Ltd. is under license. Other trademarks and trade names are those of their respective owners

This page has been left intentionally blank.

TABLE OF CONTENTS

1. Customer Information	4
2. Equipment Under Test (EUT)	5
3. Test Specification, Methods and Procedures	8
4. Deviations from the Test Specification.....	9
5. Operation and Configuration of the EUT during Testing	10
6. Measurements, Examinations and Derived Results	11
7. Measurement Uncertainty	14
Appendix 1. Test Equipment Used.....	15
Appendix 2. Measurement Methods.....	16
Appendix 3. Photographs	24

1. Customer Information

Company Name:	Sony Mobile Communications AB
Address:	Nya Vattentorget 22188 Lund Sweden

2. Equipment Under Test (EUT)

2.1. Identification of Equipment Under Test (EUT)

Description:	Mobile Handset
Brand Name:	Sony
Model Name or Number:	LT25i
Serial Number:	CB5A1KTGY9
Type Number:	PM-0060-BV
IMEI Number:	00440245-042436-5
Hardware Version Number:	AP1.1
Software Version Number:	9.0.D.0.164
Hardware Revision of GSM Module:	Not Applicable
Software Revision of GSM Module:	Not Applicable
FCC ID Number:	PY7PM-0060
Country of Manufacture:	China
Date of Receipt:	28 August 2012

Note(s):

This sample was used to perform WWAN conducted power measurements only. The sample supports simultaneous transmission with the WWAN and WLAN antenna > 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

2.2. Description of EUT

The Equipment Under Test is a Smart Phone with GSM 2G Quad Band, 3G Tri band, LTE Penta Band and Wi-Fi bands. The EUT has GPRS Class 12 / EDGE Class 12, UMTS FDD 1, 5, 8 With HSPA (with HSDPA Category 24 and HSUPA Category 6) , LTE Band 1, 3, 5, 7, 20, WLAN 802.11 a/b/g/n, Bluetooth Class 1, Personal hotspot mode and RFID.

2.3. Modifications Incorporated in the EUT

EUT (IMEI: 00440245-042436-5) is used to perform WWAN conducted power measurements only.

2.4. Accessories

Description:	Memory Card
Brand Name:	None Stated (Generic)
Model Name or Number:	None Stated
Serial Number:	None Stated
Country of Manufacture:	China
Connected to Port	Dedicated Micro SD Slot

Description:	Battery
Brand Name:	Sony
Model Name or Number:	BA800
Serial Number:	001610SWGNS
Country of Manufacture:	China
Connected to Port	5-pin contact

2.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Wireless Communication Test Set
Brand Name:	Agilent
Model Name or Number:	8960 Series 10 (E5515C)
Serial Number:	GB46311280
Cable Length and Type:	~4.0m Utiflex Cable
Connected to Port:	RF (Input / Output) Air Link

Description:	Wireless Communication Test Set
Brand Name:	Agilent
Model Name or Number:	8960 Series 10 (E5515E)
Serial Number:	GB462000666
Cable Length and Type:	~4.0m Utiflex Cable
Connected to Port:	RF (Input / Output) Air Link

Test set used for Cat 24 measurements

2.6. Additional Information Related to Testing

Equipment Category	GSM/GPRS850 / PCS/GPRS1900 / UMTS FDD 5 / LTE Band 5 / WiFi802.11 a/b/g/n	
Type of Unit	Portable Transceiver	
Intended Operating Environment:	Within GSM, UMTS, LTE , WiFi and <i>Bluetooth</i> Coverage	
Transmitter Maximum Output Power Characteristics:	UMTS FDD 5	Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.
Transmitter Frequency Range:	UMTS FDD 5	826 to 847 MHz

Additional Information Related to Testing (Continued):


Transmitter Frequency Allocation of EUT When Under Test:	Channel Number	Channel Description	Frequency (MHz)
	4132	Low	826.4
	4183	Middle	836.6
	4233	High	846.6

Additional Information Related to Testing (Continued):

Modulation(s):	UMTS (QPSK): 0 Hz
Modulation Scheme (Crest Factor):	(UMTS FDD / HSDPA): 1
Antenna Type:	Internal integral
Antenna Length:	Unknown
Number of Antenna Positions:	1 fixed (WWAN) / 1 fixed (GPS/WLAN/ <i>Bluetooth</i>) 1 fixed (NFC) / 1 fixed (Diversity)
Power Supply Requirement:	3.7V
Battery Type(s):	Li-ion

Additional Information Related to LTE Test parameter (Continued):

#	Description	Parameter
1	Descriptions of the LTE transmitter and antenna implementation & identify whether it is a standalone transmitter operating independently of other wireless transmitters in the device or sharing hardware components and/or antenna(s) with other transmitters etc.	This model (LT25i) has only one main antenna for LTE/UMTS/GSM bands (as pictured below).

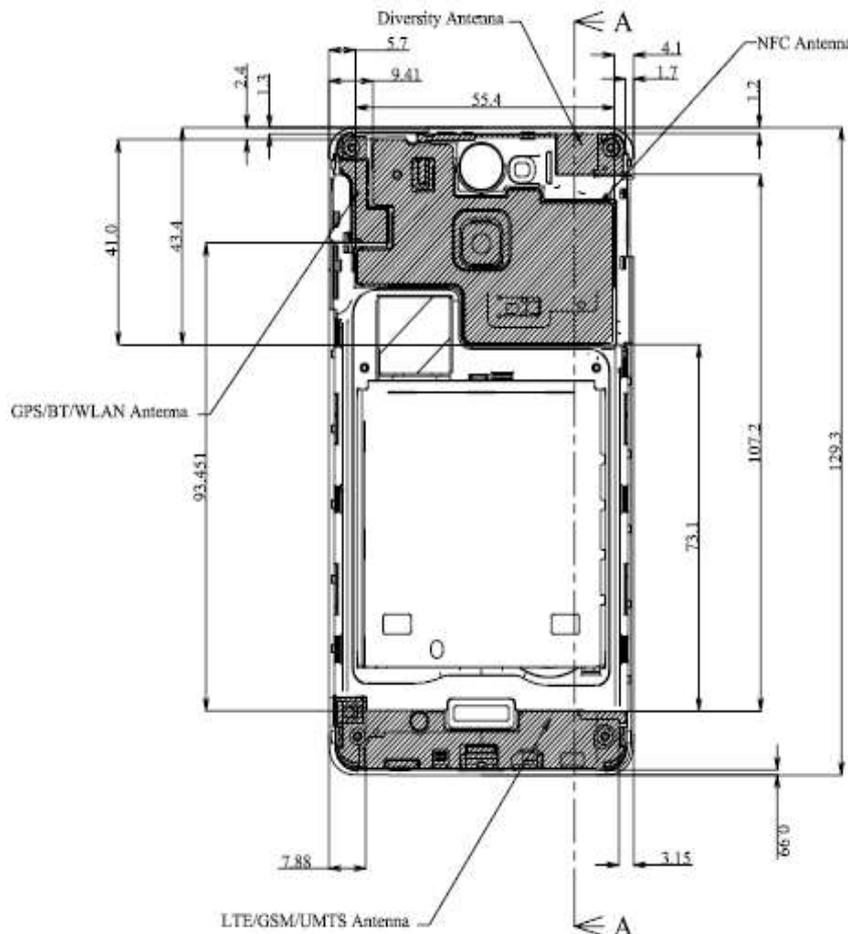

Additional Information Related to LTE Test parameter (Continued):

#	Description	Parameter				
		Simultaneous transmission conditions				
		WWAN			WLAN	Sum of WWAN & WLAN
#	LTE BAND Voice/Data	GSM Voice/Data	UMTS Voice/Data	Wi-Fi 802.11a/b/g/n		
1	Identify the simultaneous transmission conditions for the voice and data configurations supported by all wireless modes, device configurations and frequency bands, for the head and body exposure conditions and device operating configurations (handset flip or cover positions, antenna diversity conditions etc.)	X			X	X
2			X		X	X
3				X	X	X

3. Test Specification, Methods and Procedures

3.1. Test Specification

Reference:	OET Bulletin 65 Supplement C: (2001-01)
Title:	Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
Purpose of Test:	To determine whether the equipment met the basic restrictions as defined in OET Bulletin 65 Supplement C: (2001-01) using the SAR averaging method as described in the test specification above.

3.2. Methods and Procedures Reference Documentation

The methods and procedures used were as detailed in:

Federal Communications Commission, "Evaluating compliance with FCC Guidelines for human exposure to radio frequency electromagnetic fields", OET Bulletin 65 Supplement C, FCC, Washington, D.C, 20554, 2001.

Thomas Schmid, Oliver Egger and Neils Kuster, "Automated E-field scanning system for dosimetric assessments", IEEE Transaction on microwave theory and techniques, Vol. 44, pp. 105-113, January 1996.

Neils Kuster, Ralph Kastle and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with know precision", IEICE Transactions of communications, Vol. E80-B, No.5, pp. 645-652, May 1997.

EN 62209-1: 2006

Title: Basic standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz).

EN 62209-2:2010

Human exposure to radio frequency fields from handheld and body mounted wireless communication devices — Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) (IEC 62209-2:2010)

KDB 447498 D01 "Mobile Portable RF Exposure v04"

KDB 648474 D01 SAR Handsets Multi Xmitter and Ant v01r05"

KDB 648474 D02 SAR Polcy Handsts Multi Xmitter Ant v01r01

KDB 941225 D01 SAR test for 3G devices v02

3.3. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

4. Deviations from the Test Specification

Test was performed as per KDB 648474 D01 "SAR Handsets Multi Xmitter and Ant v01r05", KDB 941225 D01/D03 " KDB 941225 D01 "SAR test for 3G v02" according to the handset procedures in IEEE Std 1528-2003 and OET Bulletin 65 Supplement C 01-01. October 2012 TCB Workshop guidelines were also followed.

Prior to testing the FCC was contacted for enquiry regarding HSDPA Cat24 test conditions under FCC Tracking Number 398090.

5. Operation and Configuration of the EUT during Testing

5.1. Operating Modes

The EUT was tested in the following operating mode(s) unless otherwise stated:

- UMTS FDD 5 Call allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum as per KDB 941225 D01.
- UMTS FDD 5 - RMC 12.2kbps + HSUPA With Test loop mode 1 and TPC bits configured to all "1's", Sub-test 5, AG Index set to 21 and E-TFCI set to 81 with Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.
- UMTS FDD 5 - RMC 12.2kbps + HSDPA With Test loop mode 1 and TPC bits configured to all "1's", Sub-test 1 with Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.
- UMTS FDD 5 - DC HSDPA (Cat 24) With Test loop mode 1 and TPC bits configured to all "1's", Sub-test 1 with Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01. (See Appendix 8 for detailed description)

5.2. Configuration and Peripherals

The EUT was tested in the following configuration(s) unless otherwise stated:

- Standalone fully charged battery powered and dummy battery
- Aligent 8960 model E5515E basestation simulator supports DC-HSDPA, was used to perform DC-HSDPA power measurements. Please refer to Appendix 8 for test set setup to achieve TS 34.121 parameters. The setting covers FRC H-Set 12 (QPSK) in Table C.8.1.12 of TS 34.121-1 to measure DCHSDPA uplink maximum output power using the 4 Rel. 5 HSDPA subtests in Table C.10.1.4 of TS 234.121-1.
- KDB 941225 Rel 6. HSPA procedures were applied to determine SAR exclusion for DC-HSDPA according to the measured power. As the measure maximum output power for DC-HSDPA is $\leq \frac{1}{4}$ dB higher than the WCDMA 12.2 kbps RMC maximum output, SAR was not required.
- The module power levels were measured in both HSPA and 3G RMC 12.2kbps modes and compared to ensure the correct mode of operation had been established.

5.3. Location of Tests

All the measurements described in this report were performed at the premises of UL, Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG United Kingdom

6. Measurements, Examinations and Derived Results

6.1. General Comments

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 7 for details of measurement uncertainties.

6.1.1. Conducted Average Power Measurement 3G: Rel 5 and Rel 6

Modes		HSDPA				HSPA					WCDMA
Sets		1	2	3	4	1	2	3	4	5	Voice / RMC 12.2kbps
Band	Channel	Power [dBm]									
850 (Band 5)	4132 4357	24.5	24.0	23.5	23.5	24.1	24.3	23.5	24.5	23.6	24.5
	4183 4408	24.6	24.1	23.6	23.5	24.2	24.4	23.5	24.6	23.6	24.6
	4233 4458	24.4	24.0	23.5	23.5	24.1	24.2	23.4	24.4	23.4	24.4
β_c		2	12	15	15	11	6	15	2	15	
β_d		15	15	8	4	15	15	9	15	15	
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8	8	8	8	8	8	
AGV		-	-	-	-	20	12	15	17	21	

Modes		DC HSDPA				WCDMA
Sets		1	2	3	4	Voice / RMC 12.2kbps
Band	Channel	Power [dBm]				
850 (Band 5)	4132 4357	22.4	22.7	22.7	22.8	24.5
	4183 4408	22.4	22.8	22.7	22.7	24.6
	4233 4458	22.4	22.8	22.7	22.8	24.4
β_c		2	12	15	15	
β_d		15	15	8	4	
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8	
AGV		-	-	-	-	

*Aligent 8960 model E5515E basestation simulator supports DC-HSDPA, was used to perform DC-HSDPA power measurements. Please refer to Appendix 8 for test set setup to achieve TS 34.121 parameters. The setting covers FRC H-Set 12 (QPSK) in Table C.8.1.12 of TS 34.121-1 to measure DCHSDPA uplink maximum output power using the 4 Rel. 5 HSDPA subtests in Table C.10.1.4 of TS 234.121-1.

KDB 941225 Rel 6. HSPA procedures were applied to determine SAR exclusion for DC-HSDPA according to the measured power. As the measure maximum output power for DC-HSDPA is $\leq \frac{1}{4}$ dB higher than the WCDMA 12.2 kbps RMC maximum output, SAR was not required.

The module power levels were measured in both HSPA and 3G RMC 12.2kbps modes and compared to ensure the correct mode of operation had been established.

The following tables taken from FCC 3G SAR procedures (KDB 941225 D01 SAR test for 3G devices v02) below were applied using an Agilent 8960 series 10 wireless communications test set which supports 3G / HSDPA release 5 / HSPA release 6.

Sub-test Setup for Release 5 HSDPA

Sub-test	β_c	β_d	B_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	SM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, B_{hs}/\beta_c = 24/15$

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Sub-test Setup for Release 6 HSPA

Sub-test	β_c	β_d	B_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	B_{oc}	B_{od}	B_{od} (SF)	B_{od} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	31/15	B_{a11} : 47/15 B_{a12} : 47/15	4	1	2.0	1.0	15	92
4	2/15	15/15	64	2/15	2/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	24/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, B_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH AND E-DPCCH for the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: B_{od} cannot be set directly; it is set by Absolute Grant Value.

7. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Conducted Output Power	826 to 847 MHz	95%	±0.20 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used


RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A034	Narda 20W Termination	Narda	374BNM	8706	Calibrated as part of system	-
A1097	SMA Directional Coupler	MiDISCO	MDC6223-30	None	Calibrated as part of system	-
A1497	Amplifier	Mini-Circuits	zhl-42w (sma)	e020105	Calibrated as part of system	-
C1146	Cable	Rosenberger MICRO-COAX	FA147A F030003030	41752-1	Calibrated as part of system	-
G087	PSU	Thurlby Thandar	CPX200	100701	Calibrated before use	-
M1159	Signal Generator	Agilent Technologies	E8241A	US42110332	Internal Checked 10 Aug 2012	4
M1023	Dual Channel Power Meter	R & S	NRVD	863715/030	18 July 2012	12
M1269	Multimeter	Fluke	179	90250210	15 Jul 2011	12
S256	SAR Lab	UL	Site 56	N/A	Calibrated before use	-
S512	SAR Lab	UL	Site 57	N/A	Calibrated before use	-

Note:

All the assets were in calibration during the course of testing.

Appendix 2. Measurement Methods

Test Setup Diagram:

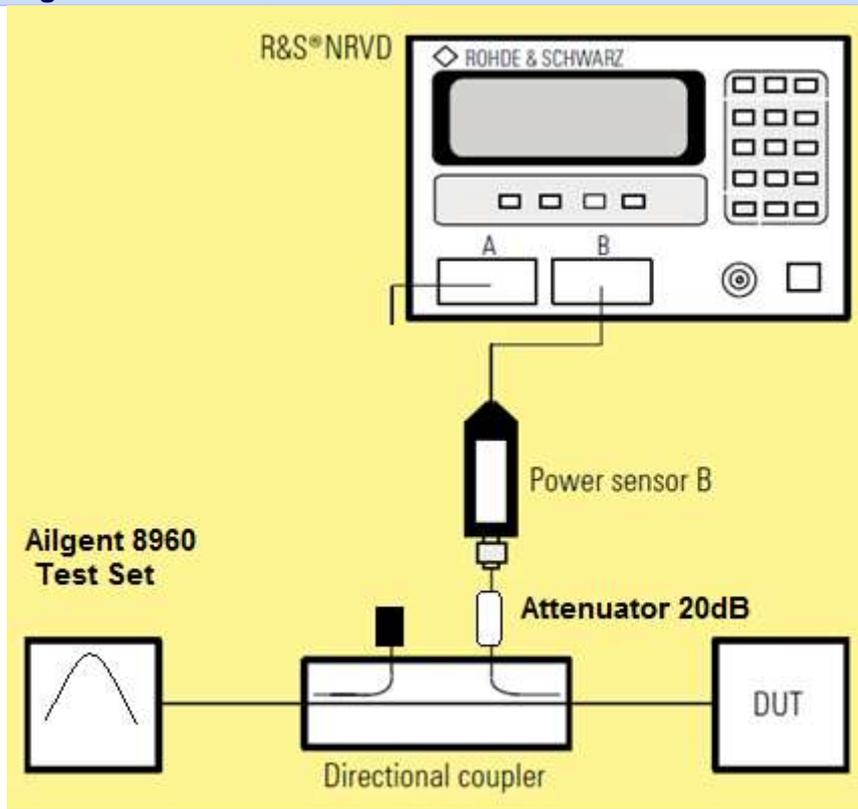


A.8.1. Establish a DC-HSDPA RB Test Mode Connection with DL 42Mbps

RB (radio bearer) test mode is a special, defined-channel configuration designed to simplify the testing environment. Since W-CDMA is an incredibly flexible system, defined radio bearers, called RMCs (reference measurement channels) simplify which configurations need to be tested for RF performance.

RB test mode provides the ability to set up a standalone channel configuration originating from the 8960 via call-processing. The direction of the call setup is always from the 8960 to the UE. This is the typical RF test that is used throughout the lifecycle of a device's design process. Using RB test mode is attractive to device manufacturers because it does not require extra software to control the UE. In this type of call connection, the radio bearer (within the 8960) essentially controls the UE during test.

A.8.1.1 Configure 8960

1. Press **Operating Mode (F1)**, select **Cell Off** operating mode.

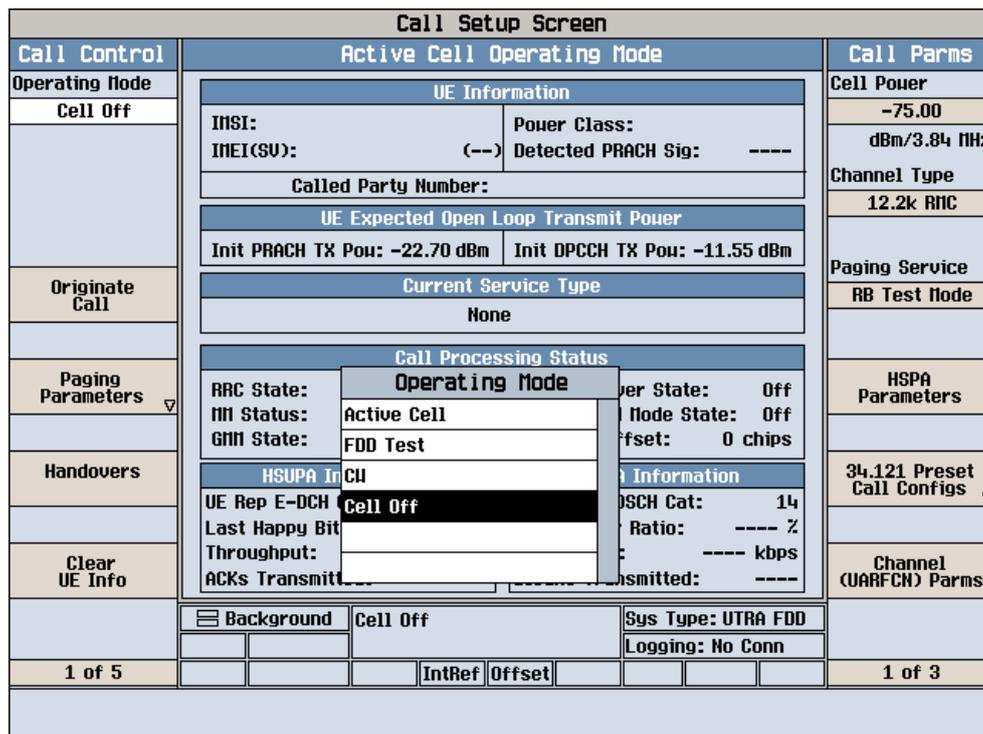

2. Set the **Channel type** to **12.2k + HSDPA**.
3. Set the downlink channel code. In order to achieve the 42 Mbps maximum downlink throughput, you have to set up 15 HS-PDSCHs which will possibly cause a code collision. To easily configure the downlink 15 HS-PDSCH for a maximum throughput, use the code preset to configure the code channels for both the serving cell and the secondary serving cell. Select **Call Control 2 of 6 -> Generator Info (F3) -> Downlink Channel Configs (F4) -> DL Chan code Preset Configs (F5)**, choose **34.121 Tables E.6.2.3,4 (HSDPA 15 HS-PDSCHs)**. Set the **Conn S-CCPCH Cfg** to **Off** to avoid the code collision. To see the channel code allocation for the serving cell and the secondary serving cell, select **Additional Gen Info Screens (F1) -> DC-HSDPA DL Code Chan Info (F4)**.

Call Setup Screen											
Screen Ctrl	DC-HSDPA DL Code Channel Information							Call Parm			
DL Code Channel Info Screen	Serving Cell Primary Scrambling Code:						0	Cell Power			
	Secondary Serving Cell Primary Scrambling Code:						2	-75.00			
Generated Power Info Screen	Channel	Serving Cell DL Chan Info			Sec Cell DL Chan Info			dBm/3.84 MHz			
	Channel	Level (dB)	Current	Desired	OVSF	Chan Code	Level (dB)	Current	Desired	OVSF	Chan Code
OCNS Info Screen	CPICH:	Off	-3.30	256	0	Off	Off	256	0	Channel Type	
	P-CCPCH/SCH:	Off	-5.30	256	1	Off	Off	256	1	12.2k + HSDPA	
DC-HSDPA DL Code Chan Info	S-CCPCH:	Off	-10.30	64	2	Off	Off	256	2	Paging Service	
	PICH:	Off	-8.30	256	2					RB Test Mode	
Return	AICH:	Off	-9.90	256	3	Off	Off	256	2	HSPA Parameters	
	(F-)DPCH:	Off	Off	128	7					34.121 Preset Call Configs	
Return	E-AGCH:	Off	Off	256	42	Off	Off	128	2	Channel (UARFCN) Parm	
	E-HICH:	Off	Off	128	22					1 of 3	
Return	E-RGCH:	Off	Off	128	22	Off	Off	128	3	Cell Off	
	HS-SCCH 1:	Off	Off	128	2					Sys Type: UTRA FDD	
Return	HS-SCCH 2:	Off	Off	128	3	Off	Off	128	3	Logging: No Conn	
	HS-SCCH 3:	Off	Off	128	3					DBUS-INT	
Return	HS-SCCH 4:	Off	Off	128	3	Off	Off	128	3	IntRef	
	HS-PDSCHs:	Off	Off	16	1-15					Offset	
Return	Comp OCNS:	Off	Off	128	WCDMA	Off	Off	128	HSDPA	1 of 3	

4. Configure DC-HSDPA parameters to achieve the Maximum Downlink Data Rate:
 First of all, you must know the maximum data rate of the device under test according to its category and the key factors to achieve the maximum data rate. In this lab, you use a category 24 device whose maximum data rate is 42 Mbps when DC-HSDPA is configured.
 a) Set up the HSDPA RB Test Mode Parameters

Path: Call Parm 1 of 3 -> HSPA Parameters (F10) -> HSDPA Parameters (F10) -> HSDPA RB Test Mode Setup (F8) -> HSDPA RB Test Mode Settings (F8).

- RB Test HS-DSCH Configuration Type = User Defined
- RB Test User Defined HS-DSCH MAC entity = MAC-ehs (Note 1)
- RB Test User Defined HARQ Processes = 6 (Note 2)
- RB Test User Defined UE IR Buffer Allocation = Implicit
- RB Test User Defined DC-HSDPA State = On
- RB Test Mode DC-HSDPA DPCH Loopback State = On

Note 1: DC-HSDPA requires MAC-ehs. You must set the MAC entity to MAC-ehs before setting the DC-HSDPA state)

Note 2: To restrict the amount of soft memory that can be allocated to a single HARQ process (and thus limit the amount of data that has to be transferred across the UE's internal data buses) the specifications require that when setting up a DC-HSDPA call with the implicit HARQ memory partitioning the network must configure 6, 7, or 8 HARQ processes per cell. For the explicit HARQ memory partitioning case, the number of HARQ processes can be 1 through 8, but the memory size for each HARQ process cannot be greater than the number of soft channel bits for an implicit memory partitioning with 6 processes per HS-DSCH channel.

b) Set up the Serving Cell Parameters

Path: F10

- RB Test User Defined 64QAM State =On
- RB Test User Defined Active HS-PDSCHs =15
- RB Test User Def Transport Block Size Index =62
- RB Test User Defined Modulation Type =64QAM
- RB Test User Defined Inter-TTI Interval =1

c) Set up the Secondary Serving Cell Parameters

Path: **F11**

- **RB Test User Def Secondary Cell 64QAM State =On**
- **RB TM User Def Sec Cell Active HS-PDSCHs = 15**
- **RB TM User Def Sec Cell TB Size Index = 62**
- **RB TM User Def Sec Cell Modulation Type =64QAM**
- **RB TM User Def Sec Cell Inter-TTI Interval = 1**

d) Set the **Secondary Serving Cell Power (dBm/3.84 MHz) to -25 dBm/3.84 MHz**

Path: Return (**F12**) -> HSDPA Params 2 of 2 -> Secondary Serv Cell Params (**F10**)

e) Set the **Cell power to -25 dBm/3.84 MHz**

Path: **CALL SETUP -> F7**

f) Set the HSDPA Conn DL Channel Levels

Path: **CALL SETUP -> Call Control 2 of 6 -> Generator Info (F3) ->Downlink Channel Levels (F3) ->**

Connected DL Channel Levels (F3) -> F3

- **HSDPA Cell 1 Connected CPICH Level = -8**
- **HSDPA Cell 1 Connected P-CCPCH/SCH Level = -20**
- **HSDPA Cell 1 Connected PICH Level = off**
- **HSDPA Cell 1 Connected DPCH Level = -30**
- **HSDPA Cell 1 Connected HS-PDSCH Level (Sum) = -1 dBm**
- **HSDPA Cell 1 Connected HS-SCCH 1 to 4 Level = -20,-20,off,off**
- **Secondary Cell HSDPA Conn CPICH Level = -8**
- **Secondary Cell HSDPA Conn PCCPCH/SCH Level = -20**
- **Secondary Cell HSDPA Conn PICH Level = off**
- **Secondary Cell HSDPA Conn HS-PDSCHs Lvl (Sum) = -1 dBm**
- **Secondary Cell HSDPA Conn HS-SCCH 1 to 4 Level = -20,-20,off,off**

5. Set the **Operating Mode (F1) to Active Cell.**

A.8.1.2. Power on the UE and Set up the Connection

Power on the device, and then wait for it to camp on 8960. You should be able to see the following screen.

Call Setup Screen									
Call Control	Active Cell Operating Mode						Call Parm		
Operating Mode	UE Information						Cell Power		
Active Cell	INSI: 001012345678901		Power Class: 4		Detected PRACH Sig: 0		-25.00 dBm/3.84 MHz		
	Called Party Number:						Channel Type		
	UE Expected Open Loop Transmit Power						12.2k + HSDPA		
	Init PRACH TX Pou: -60.00 dBm		Init DPCCH TX Pou: -11.55 dBm				Paging Service		
Originate Call	Current Service Type						RB Test Node		
	None								
Paging Parameters	Call Processing Status						HSPA Parameters		
	RRC State: Idle		Soft Handover State: Off		Compressed Mode State: Off		34,121 Preset Call Configs		
	MM Status: None		GMM State: Attached		Cur DPCH Offset: 0 chips				
Handovers	HSUPA Information			HSDPA Information			Channel (UARFCN) Parm		
	Rep EDCH Cat/Ext: 6/Unrep		Last Happy Bit: None		Throughput: ---- kbps				
Clear UE Info	ACKs Transmitted: ----		Cur UE HS-DSCH Cat: 24		Block Error Ratio: ---- %				
			Throughput: 42101 kbps		Blocks Transmitted: 115500				
			Active Cell		Sys Type: UTRA FDD				
			Idle		Logging: No Conn				
1 of 6	DBUS-INT	IntRef	Offset				1 of 3		

The UE reports HSDPA categories to 8960, which represents its maximum data rate capability. DC-HSDPA requires UE categories 21 to 24.

The GMM state must be **Attached**, otherwise you cannot establish a HSDPA connection.

2. Originate the Connection

a) Now, Originate an RB Test call with DC-HSDPA by pressing „F3“ from the main Call Setup screen.

b) After a connection is set up, you will be able to see the throughput from the HSDPA Information window. Press the **Measurement Reset** key to reset the calculation.

Call Setup Screen									
Call Control	Active Cell Operating Mode						Call Parm		
Operating Mode	UE Information						Cell Power		
Active Cell	INSI: 001012345678901		Power Class: 4		Detected PRACH Sig: 0		-25.00 dBm/3.84 MHz		
	Called Party Number:						Channel Type		
	UE Expected Open Loop Transmit Power						12.2k + HSDPA		
	Init PRACH TX Pou: -60.00 dBm		Init DPCCH TX Pou: -11.55 dBm				Paging Service		
End Call	Current Service Type						RB Test Node		
	RB Test Node - HSDPA								
Paging Parameters	Call Processing Status						HSPA Parameters		
	RRC State: CELL_DCH		Soft Handover State: Off		Compressed Mode State: Off		34,121 Preset Call Configs		
	MM Status: None		GMM State: Attached		Cur DPCH Offset: 0 chips				
Handovers	HSUPA Information			HSDPA Information			Channel (UARFCN) Parm		
	Rep EDCH Cat/Ext: 6/Unrep		Last Happy Bit: None		Throughput: ---- kbps				
Clear UE Info	ACKs Transmitted: ----		Cur UE HS-DSCH Cat: 24		Block Error Ratio: 0 %				
			Throughput: 42101 kbps		Blocks Transmitted: 115500				
			Active Cell		Sys Type: UTRA FDD				
			Connected		Logging: No Conn				
1 of 6	DBUS-INT	IntRef	Offset				1 of 3		

Now you can also check the connected DC-HSDPA downlink channel levels.

Path: CALL SETUP->Call Control 2 of 6 -> Generator Info (F3) -> Additional Gen Info Screens (F1) ->DC-HSDPA DL Code Chan Info (F4).

Call Setup Screen										
Screen Ctrl	DC-HSDPA DL Code Channel Information								Call Parms	
DL Code Channel Info Screen	Serving Cell Primary Scrambling Code: 0								Cell Power	
	Secondary Serving Cell Primary Scrambling Code: 2								-25.00	
Generated Power Info Screen	Channel	Serving Cell DL Chan Info				Sec Cell DL Chan Info				dBm/3.84 MHz
	Channel	Level (dB)		Chan		Level (dB)		Chan		Channel Type
OCNS Info Screen	CPICH:	-8.00	-8.00	256	0	-8.00	-8.00	256	0	12.2k + HSDPA
	P-CCPCH/SCH:	-20.00	-20.00	256	1	-20.00	-20.00	256	1	Paging Service
DC-HSDPA DL Code Chan Info	S-CCPCH:	Off	Off	64	2					RB Test Mode
	PICH:	Off	Off	256	2	Off	Off	256	2	
Return	(F-)DPCH:	-30.00	-30.00	128	7					HSPA Parameters
	E-AGCH:	Off	Off	256	42					
	E-HICH:	Off	Off	128	22					
	E-RGCH:	Off	Off	128	22					
	HS-SCCH 1:	-20.00	-20.00	128	2	-20.00	-20.00	128	2	34,121 Preset Call Configs
	HS-SCCH 2:	-20.00	-20.00	128	3	-20.00	-20.00	128	3	
	HS-SCCH 3:									
	HS-SCCH 4:									
	HS-PDSCHs:	-1.00	-1.00	16	1-15	-1.00	-1.00	16	1-15	Channel (UARFCN) Parms
	Comp OCNS:	-17.91	-17.91	128	HSDPA	-17.65	-17.65	128	HSDPA	
		Active Cell Connected				Sys Type: UTRA FDD				
						Logging: No Conn				
		DBUS-INT		IntRef	Offset					1 of 3

A.8.2. Activate/ Deactivate the Secondary Serving Cell

Once a DC-HSDPA connection is established, 8960 can control the UE to start or stop monitoring the secondary serving cell using HS-SCCH orders. The HS-SCCH orders can be sent on either the serving or secondary serving cell.

A.8.2.1 Deactivate the Secondary Serving Cell

1. Setup the Deactivate Secondary Cell Parameter

Path: CALL SETUP->Call Control 6 of 6 -> HS-SCCH Order (F3) -> Deactivate Secondary Cell (F2)
 In this lab you set it to deactivate the secondary serving cell from the serving cell.

- Deactivate Secondary Cell HS-SCCH Order From = Serving Cell

Press **Send Deactivate Secondary Cell (F5)**

Press Measurement Reset key and see the throughput has dropped to 21 Mbps or so, like the figure below:

Call Setup Screen									
Call Control	Active Cell Operating Mode						Call Parm		
Operating Mode	UE Information						Cell Power		
Active Cell	IMSI: 001012345678901		Power Class: 4		Detected PRACH Sig: 0		-25.00 dBm/3.84 MHz		
	Called Party Number:						Channel Type		
	UE Expected Open Loop Transmit Power						12.2k + HSDPA		
	Init PRACH TX Pow: -60.00 dBm			Init DPCH TX Pow: -11.55 dBm			Paging Service		
End Call	Current Service Type						RB Test Mode		
	RB Test Mode - HSDPA								
Paging Parameters	Call Processing Status						HSPA Parameters		
	RRC State: CELL_DCH		Soft Handover State: Off		Compressed Mode State: Off				
	MM Status: None		Cur DPCH Offset: 0 chips		GMM State: Attached				
Handovers	HSUPA Information			HSDPA Information			34,121 Preset Call Configs		
	Rep EDCH Cat/Ext: 6/Unrep		Cur UE HS-DSCH Cat: 24		Block Error Ratio: 0 %				
	Last Happy Bit: None		Throughput: 21088 kbps		Throughput: 21088 kbps				
Clear UE Info	Throughput: ---- kbps		Blocks Transmitted: 35000		ACKs Transmitted: ----		Channel (UARFCN) Parm		
			Active Cell Connected		Sys Type: UTRA FDD				
					Logging: No Conn				
1 of 6	DBUS-INT	IntRef	Offset						1 of 3

You can see more on the DC-HSDPA Information screen.
Path: CALL SETUP->Call Control 2 of 6 -> Additional Screens (F1) -> HSDPA Information (F4) -> DC-HSDPA Information (F4).

Call Setup Screen									
Screen Ctrl	DC-HSDPA Information						Call Parm		
Channel (UARFCN) Info	Secondary Serving Cell Status						Cell Power		
	Current Secondary Serving Cell Status: Configured-Inactive						-25.00 dBm/3.84 MHz		
HSPA Information	DC-HSDPA Information						Channel Type		
			Summary		Serving Cell		Secondary Serving Cell		12.2k + HSDPA
E-TFCI Recording Information	Block Error Ratio:		0 %		0 %		---- %		Paging Service
	Throughput (kbps):		21082		21082		0		RB Test Mode
	Blocks Transmitted:		66000		66000		0		
	ACKs Received:		65958		65958		0		
HSDPA Information	NACKs Received:		42		42		0		HSPA Parameters
	statDTXs Received:		0		0		0		
	Count of Rep CQI Lim:		----		----		----		
	Last Received CQI:				30		30		
Clear UE Info	Max Allowed CQI:		----		----		----		34,121 Preset Call Configs
	Test Mode User Def TBS:				42192		42192		
	PS Data User Def TBS:				7298		7298		
Return	Last Sig Meas Pur Offs (dB):				6.0		6.0		Channel (UARFCN) Parm
			Active Cell Connected		Sys Type: UTRA FDD				
					Logging: No Conn				
1 of 2	DBUS-INT	IntRef	Offset						1 of 3

A.8.2.2 Re-activate the Secondary Serving Cell

Now you can activate the secondary serving cell by pressing back to the HS-SCCH Order menu.

Path: CALL SETUP->Call Control 6 of 6 -> HS-SCCH Order (F3)

Press **Send Activate Secondary Cell (F1)**.

Press the Measurement Reset key and see the throughput has increased to 42 Mbps. When you look at the DC-HSDPA Information screen, you can see the secondary serving cell is set up again.

Call Setup Screen																																																												
Screen Ctrl	DC-HSDPA Information						Call Parm																																																					
Channel (UARFCN) Info	Secondary Serving Cell Status						Cell Power																																																					
	Current Secondary Serving Cell Status: Configured-Active						-25.00																																																					
HSPA Information	DC-HSDPA Information						dBm/3.84 MHz																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Summary</th> <th>Serving Cell</th> <th>Secondary Serving Cell</th> </tr> </thead> <tbody> <tr> <td>Block Error Ratio:</td> <td>0 %</td> <td>0 %</td> <td>0 %</td> </tr> <tr> <td>Throughput (kbps):</td> <td>41996</td> <td>21064</td> <td>20941</td> </tr> <tr> <td>Blocks Transmitted:</td> <td>11000</td> <td>6000</td> <td>6000</td> </tr> <tr> <td>ACKs Received:</td> <td>10949</td> <td>5991</td> <td>5956</td> </tr> <tr> <td>NACKs Received:</td> <td>51</td> <td>9</td> <td>44</td> </tr> <tr> <td>statDTXs Received:</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>Count of Rep CQI Lim:</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Last Received CQI:</td> <td></td> <td>30</td> <td>30</td> </tr> <tr> <td>Max Allowed CQI:</td> <td></td> <td>----</td> <td>----</td> </tr> <tr> <td>Test Mode User Def TBS:</td> <td></td> <td>42192</td> <td>42192</td> </tr> <tr> <td>PS Data User Def TBS:</td> <td></td> <td>7298</td> <td>7298</td> </tr> <tr> <td>Last Sig Meas Pur Offs (dB):</td> <td></td> <td>6.0</td> <td>6.0</td> </tr> </tbody> </table>							Summary	Serving Cell	Secondary Serving Cell	Block Error Ratio:	0 %	0 %	0 %	Throughput (kbps):	41996	21064	20941	Blocks Transmitted:	11000	6000	6000	ACKs Received:	10949	5991	5956	NACKs Received:	51	9	44	statDTXs Received:	0	0	0	Count of Rep CQI Lim:	----	----	----	Last Received CQI:		30	30	Max Allowed CQI:		----	----	Test Mode User Def TBS:		42192	42192	PS Data User Def TBS:		7298	7298	Last Sig Meas Pur Offs (dB):		6.0	6.0	Channel Type	
	Summary	Serving Cell	Secondary Serving Cell																																																									
Block Error Ratio:	0 %	0 %	0 %																																																									
Throughput (kbps):	41996	21064	20941																																																									
Blocks Transmitted:	11000	6000	6000																																																									
ACKs Received:	10949	5991	5956																																																									
NACKs Received:	51	9	44																																																									
statDTXs Received:	0	0	0																																																									
Count of Rep CQI Lim:	----	----	----																																																									
Last Received CQI:		30	30																																																									
Max Allowed CQI:		----	----																																																									
Test Mode User Def TBS:		42192	42192																																																									
PS Data User Def TBS:		7298	7298																																																									
Last Sig Meas Pur Offs (dB):		6.0	6.0																																																									
E-TFCI Recording Information							12.2k + HSDPA																																																					
HSDPA Information							Paging Service																																																					
							RB Test Mode																																																					
Clear UE Info							HSPA Parameters																																																					
							34.121 Preset Call Configs ▾																																																					
Return							Channel (UARFCN) Parm																																																					
1 of 2	Active Cell			Sys Type: UTRA FDD																																																								
	Connected			Logging: No Conn																																																								
	DBUS-INT	IntRef	Offset						1 of 3																																																			

When DC-HSDPA is active, the HBLER measurement can also be used to perform receiver testing. 3GPP TS 34.121-1 sections 6.3C and 6.3D are supported and can be set up and tested as described in an appendix in another document, DC-HSDPA User Guide.

Appendix 3. Photographs

This appendix contains the following photographs:

Photo Reference Number	Title
PHT/89439JD02/001	Front View of EUT
PHT/89439JD02/002	Rear View of EUT
PHT/89439JD02/003	Left Hand View Side of EUT
PHT/89439JD02/004	Right Hand Side View of EUT
PHT/89439JD02/005	Top View of EUT
PHT/89439JD02/006	Bottom View of EUT
PHT/89439JD02/007	Internal view of WWAN Conducted Sample (CB5A1KT671)
PHT/89439JD02/008	PHF View
PHT/89439JD02/009	Battery View

PHT/89439JD02/001: Front View of EUT



PHT/89439JD02/002: Rear View of EUT



PHT/89439JD02/003: Left Hand View Side of EUT



PHT/89439JD02/004: Right Hand Side View of EUT



PHT/89439JD02/005: Top View of EUT



PHT/89439JD02/006: Bottom View of EUT



PHT/89439JD02/007: Internal view of WWAN Conducted Sample (CB5A1KT671)



PHT/89439JD02/008: PHF View



PHT/89439JD02/009: Battery View

