



# FCC Part 15C Test Report

## FCC ID: 2A3GH-MX10

Applicant: Mopink(shenzhen)Technology Limited.

Address: Building 3, No. 41, Anliang Yanhe Road, Henggang District, Shenzhen, China

Manufacturer: Mopink(shenzhen)Technology Limited.

Address: Building 3, No. 41, Anliang Yanhe Road, Henggang District, Shenzhen, China

EUT: Smart glasses

Trade Mark: N/A

Model Number: MX10, MX01, MX02, MX03, MX04, MX05, MX06, MX07, MX08, MX09, MX11, MX12, MX13, MX14, MX15

Date of Receipt: Oct. 11, 2021

Test Date: Oct. 11, 2021 - Oct. 23, 2021

Date of Report: Oct. 23, 2021

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.247  
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20211019001-1E

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



<b>Table of Contents</b>	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>4</b>
1.1 MEASUREMENT UNCERTAINTY	4
<b>2 . GENERAL INFORMATION</b>	<b>5</b>
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
<b>3 . EMC EMISSION TEST</b>	<b>9</b>
3.1 CONDUCTED EMISSION MEASUREMENT	9
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	9
3.1.2 TEST PROCEDURE	9
3.1.3 DEVIATION FROM TEST STANDARD	9
3.1.4 TEST SETUP	10
3.1.5 EUT OPERATING CONDITIONS	10
3.1.6 TEST RESULTS	10
3.2 RADIATED EMISSION MEASUREMENT	13
3.2.1 RADIATED EMISSION LIMITS	13
3.2.2 TEST PROCEDURE	14
3.2.3 DEVIATION FROM TEST STANDARD	14
3.2.4 TEST SETUP	14
3.2.5 EUT OPERATING CONDITIONS	15
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	16
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	17
3.2.8 TEST RESULTS (1GHZ~25GHZ)	19
3.3 RADIATED BAND EMISSION MEASUREMENT	23
3.3.1 TEST REQUIREMENT:	23
3.3.2 TEST PROCEDURE	23
3.3.3 DEVIATION FROM TEST STANDARD	23
3.3.4 TEST SETUP	24
3.3.5 EUT OPERATING CONDITIONS	24
<b>4 . PEAK OUTPUT POWER</b>	<b>36</b>
4.1 APPLIED PROCEDURES / LIMIT	36
4.1.1 TEST PROCEDURE	36
4.1.2 DEVIATION FROM STANDARD	36
4.1.3 TEST SETUP	36
4.1.4 EUT OPERATION CONDITIONS	36



<b>Table of Contents</b>	<b>Page</b>
4.1.5 TEST RESULTS	37
<b>5 . NUMBER OF HOPPING CHANNEL</b>	<b>40</b>
5.1 APPLIED PROCEDURES / LIMIT	40
5.1.1 TEST PROCEDURE	40
5.1.2 DEVIATION FROM STANDARD	40
5.1.3 TEST SETUP	40
5.1.4 EUT OPERATION CONDITIONS	40
5.1.5 TEST RESULTS	40
<b>6 . BANDWIDTH TEST</b>	<b>42</b>
6.1 APPLIED PROCEDURES / LIMIT	42
6.1.1 TEST PROCEDURE	42
6.1.2 DEVIATION FROM STANDARD	42
6.1.3 TEST SETUP	42
6.1.4 EUT OPERATION CONDITIONS	42
6.1.5 TEST RESULTS	43
<b>7 . HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>46</b>
7.1 APPLIED PROCEDURES / LIMIT	46
7.1.1 TEST PROCEDURE	46
7.1.2 DEVIATION FROM STANDARD	46
7.1.3 TEST SETUP	46
7.1.4 EUT OPERATION CONDITIONS	46
7.1.5 TEST RESULTS	46
<b>8 . DWELL TIME OF OCCUPANCY</b>	<b>48</b>
8.1 APPLIED PROCEDURES / LIMIT	48
8.1.1 TEST PROCEDURE	48
8.1.2 DEVIATION FROM STANDARD	48
8.1.3 TEST SETUP	48
8.1.4 EUT OPERATION CONDITIONS	48
8.1.5 TEST RESULTS	49
<b>9 . ANTENNA REQUIREMENT</b>	<b>52</b>
9.1 STANDARD REQUIREMENT	52
9.2 EUT ANTENNA	52
<b>10 . TEST SETUP PHOTO</b>	<b>53</b>
<b>11 . EUT PHOTO</b>	<b>55</b>



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.205	Band Edge Emission	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

### 1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Smart glasses
Trademark	N/A
Model No.:	MX10, MX01, MX02, MX03, MX04, MX05, MX06, MX07, MX08, MX09, MX11, MX12, MX13, MX14, MX15
Model Difference	All samples are the same except the model name, so we prepare " MX10" for test only.
BT Version:	5.0
Operation Frequency:	2402~2480MHz
Channel numbers:	79 Channels
Channel separation:	1/2/3M
Modulation technology:	GFSK , $\pi/4$ DQPSK, 8DPSK
Antenna Type:	Internal Antenna
Antenna gain:	2.4dBi
Power supply:	DC 5V from charger DC 3.7V from battery

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.
- 3.The RF chip used on the left and right sides of the PCB board of this product and the circuit schematic diagram of the PCB board are the same.



2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
~	~	~	~	~	~
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2441	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
~	~	~	~	~	~
14	2416	41	2443	68	2470
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

**2.2 DESCRIPTION OF TEST MODES**

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description	
Mode 1	CH00	GFSK,π/4 DQPSK,8DPSK
Mode 2	CH39	
Mode 3	CH78	
Mode 4	Link Mode	
For Conducted & Radiated Emission		
Final Test Mode	Description	
Mode 1	CH00	GFSK,π/4 DQPSK,8DPSK
Mode 2	CH39	
Mode 3	CH78	
Mode 4	Link Mode	


Note:

(1) The measurements are performed at the highest, middle, lowest available channels.




**2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

Radiated Spurious Emission Test



Conducted Spurious Emission Test



**2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Smart glasses	MX10	N/A	EUT
E-2	Adapter	HW-0501000E	N/A	Provide by test lab Input: AC 100-240V 50/60Hz Output: DC 5V/1A

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

**2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING**

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Test software Version	Test program: FCC_V2.24		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Setting of Softwave	10	10	10

**2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS**

## Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Dec. 07, 2020	Dec. 06, 2021
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Dec. 07, 2020	Dec. 06, 2021
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Dec. 07, 2020	Dec. 06, 2021
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Dec. 07, 2020	Dec. 06, 2021
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Dec. 07, 2020	Dec. 06, 2021
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Dec. 07, 2020	Dec. 06, 2021
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Dec. 07, 2020	Dec. 06, 2021
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Dec. 07, 2020	Dec. 06, 2021
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Dec. 07, 2020	Dec. 06, 2021
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Dec. 07, 2020	Dec. 06, 2021
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Dec. 07, 2020	Dec. 06, 2021
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Dec. 07, 2020	Dec. 06, 2021
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Dec. 07, 2020	Dec. 06, 2021
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Dec. 07, 2020	Dec. 06, 2021
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Dec. 07, 2020	Dec. 06, 2021
16	D.C. Power Supply	LongWei	PS-305D	010964729	Dec. 07, 2020	Dec. 06, 2021

## Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 25, 2019	Nov. 24, 2022
2	EMI Receiver	R&S	ESR	101421	Dec. 07, 2020	Dec. 06, 2021
3	LISN	R&S	ENV216	102417	Dec. 07, 2020	Dec. 06, 2021
4	843 Cable 1#	ChengYu	CE Cable	001	Dec. 07, 2020	Dec. 06, 2021

## Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0





### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


##### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

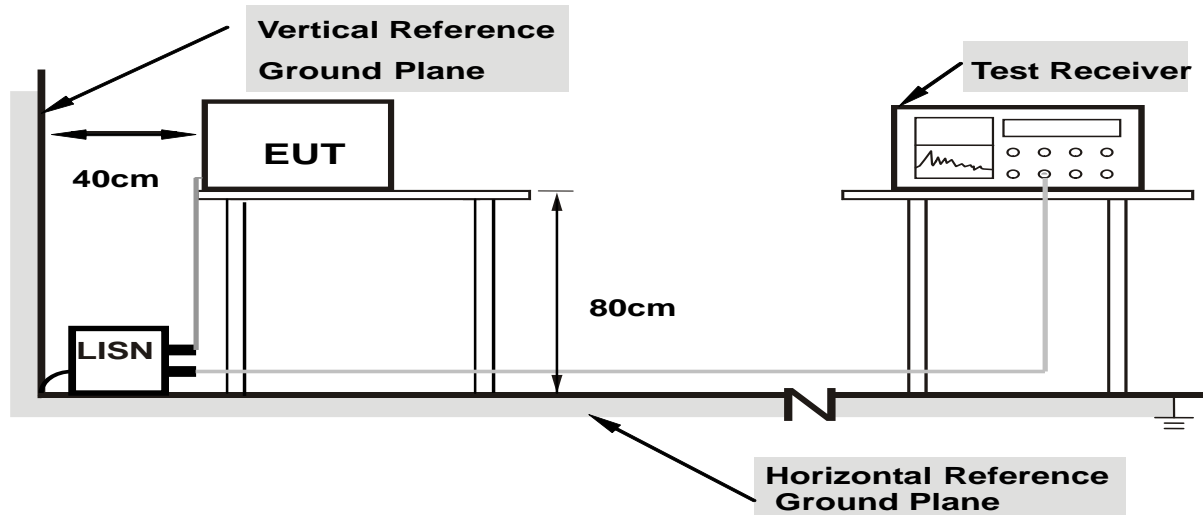

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**


### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.1.6 TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

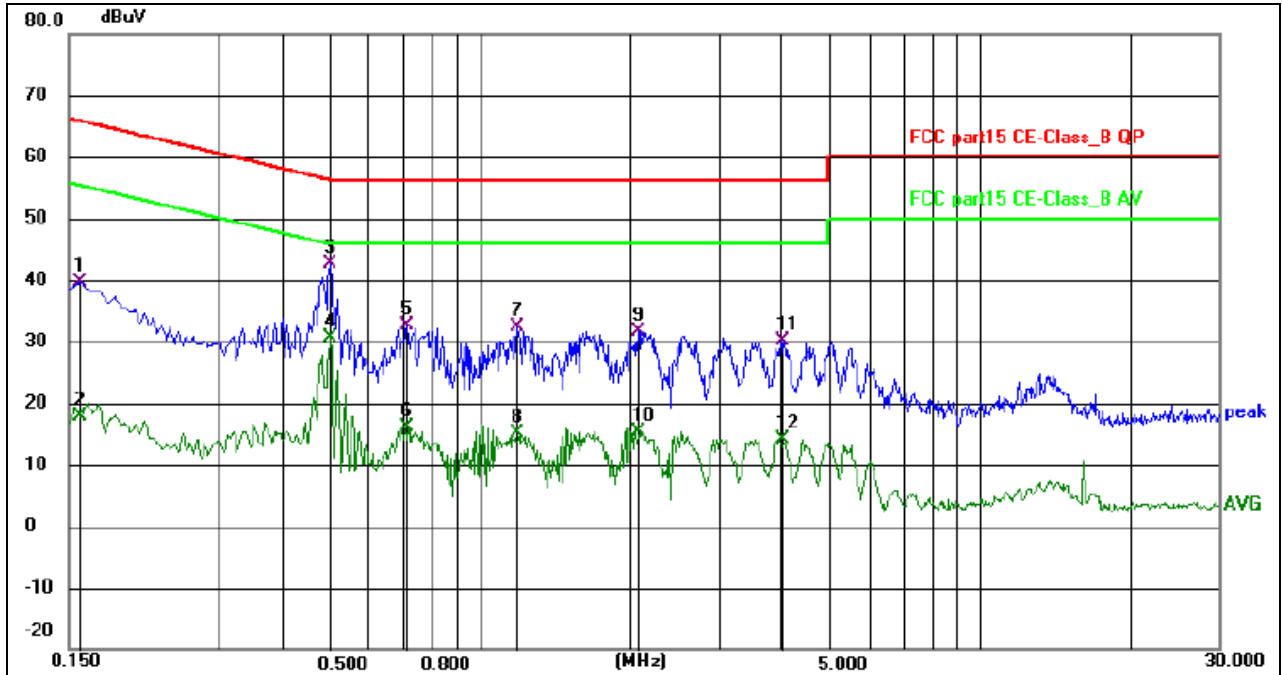


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	29.22	10.49	39.71	65.52	25.81	QP	P	
2	0.1590	7.45	10.49	17.94	55.52	37.58	AVG	P	
3 *	0.5010	33.17	9.35	42.52	56.00	13.48	QP	P	
4	0.5010	21.27	9.35	30.62	46.00	15.38	AVG	P	
5	0.7124	23.00	9.55	32.55	56.00	23.45	QP	P	
6	0.7124	6.47	9.55	16.02	46.00	29.98	AVG	P	
7	1.1894	22.79	9.55	32.34	56.00	23.66	QP	P	
8	1.1894	5.58	9.55	15.13	46.00	30.87	AVG	P	
9	2.0714	21.78	9.93	31.71	56.00	24.29	QP	P	
10	2.0714	5.42	9.93	15.35	46.00	30.65	AVG	P	
11	4.0020	20.33	9.76	30.09	56.00	25.91	QP	P	
12	4.0020	4.34	9.76	14.10	46.00	31.90	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

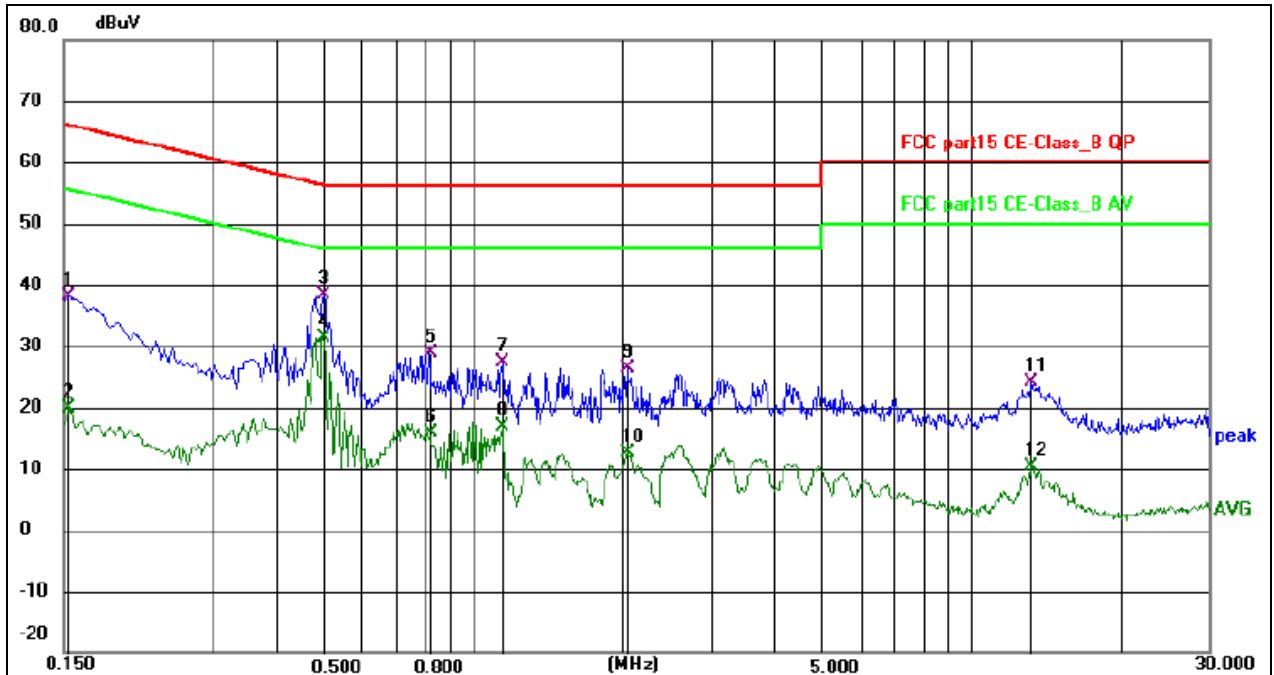

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1544	27.73	10.40	38.13	65.76	27.63	QP	P	
2	0.1544	9.57	10.40	19.97	55.76	35.79	AVG	P	
3	0.5010	28.75	9.55	38.30	56.00	17.70	QP	P	
4 *	0.5010	21.84	9.55	31.39	46.00	14.61	AVG	P	
5	0.8158	19.42	9.44	28.86	56.00	27.14	QP	P	
6	0.8158	6.37	9.44	15.81	46.00	30.19	AVG	P	
7	1.1444	17.73	9.63	27.36	56.00	28.64	QP	P	
8	1.1444	7.17	9.63	16.80	46.00	29.20	AVG	P	
9	2.0400	16.50	9.99	26.49	56.00	29.51	QP	P	
10	2.0400	2.75	9.99	12.74	46.00	33.26	AVG	P	
11	13.2225	13.73	10.30	24.03	60.00	35.97	QP	P	
12	13.2225	0.19	10.30	10.49	50.00	39.51	AVG	P	



**3.2 RADIATED EMISSION MEASUREMENT**

**3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber ( Above 18GHz the distance is 1 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

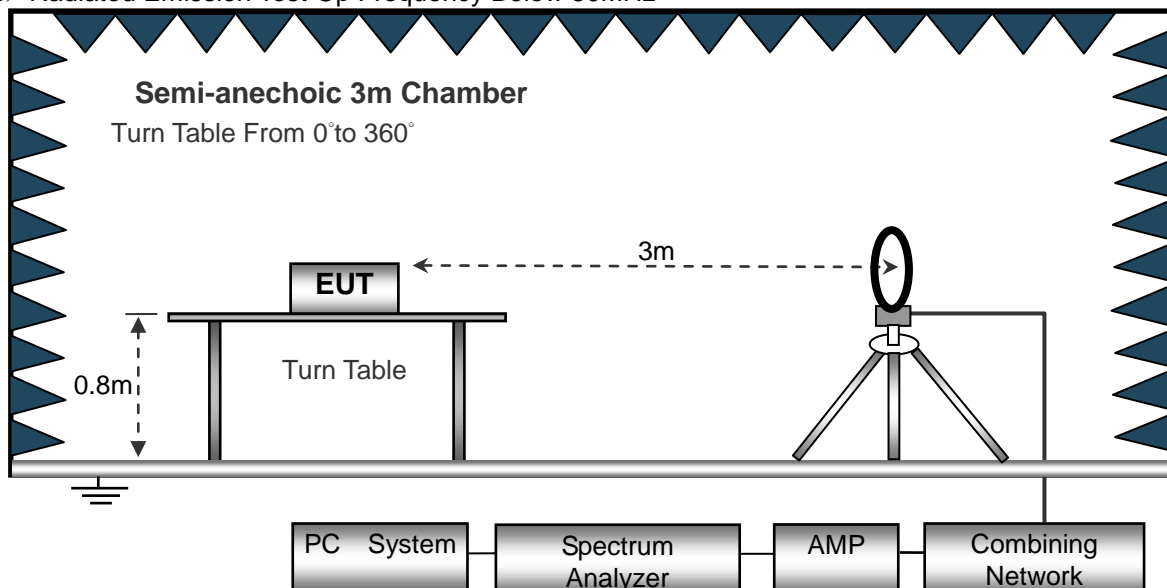

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

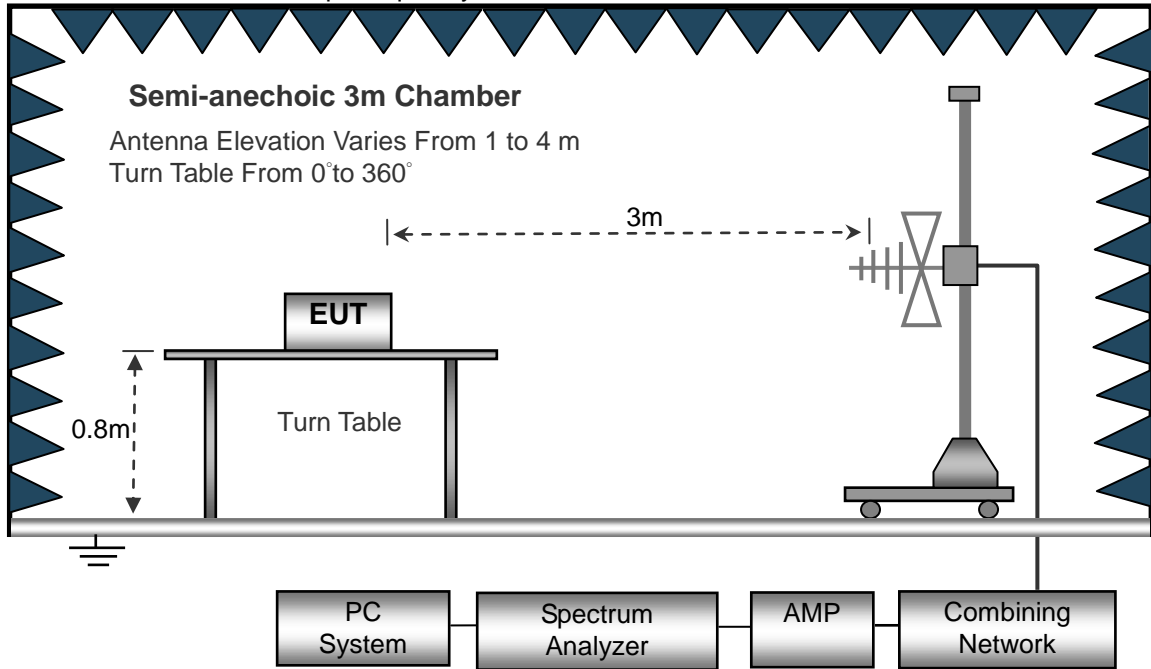

(C) Radiated Emission Test-Up Frequency Above 1GHz

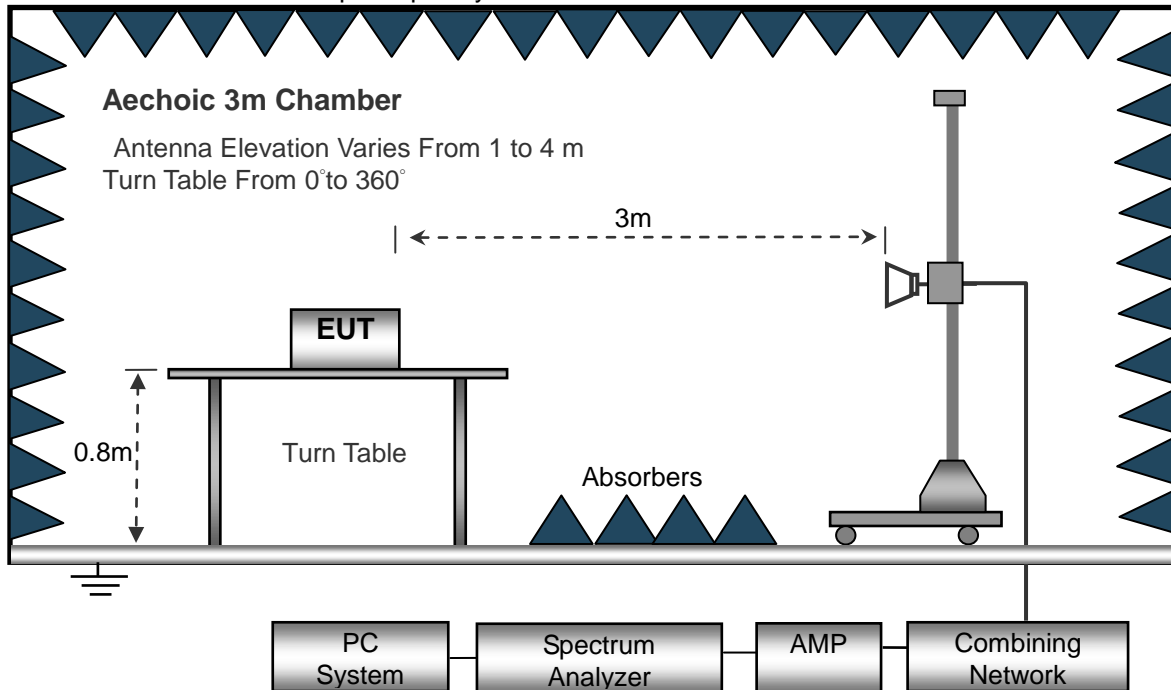

**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);


Limit line = specific limits(dBuv) + distance extrapolation factor.





**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4		

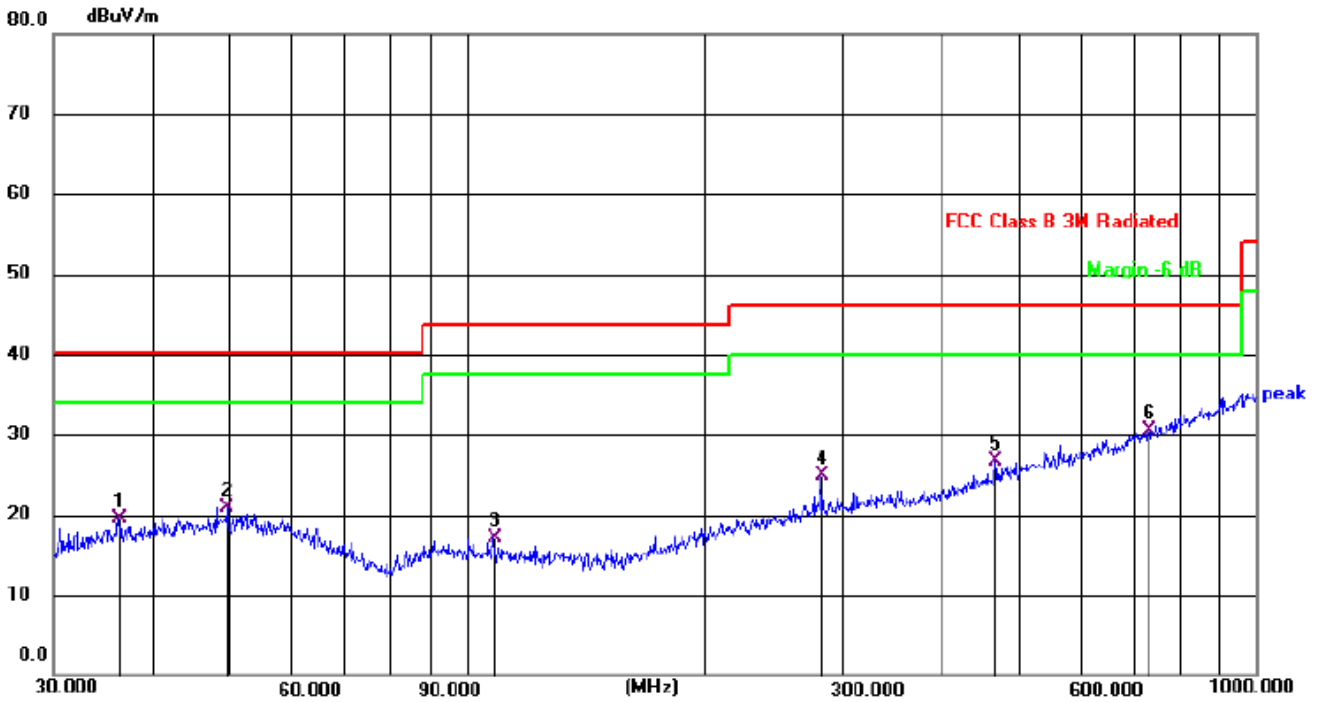

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		36.2541	34.50	-14.94	19.56	40.00	20.44	QP
2		49.7068	34.19	-13.33	20.86	40.00	19.14	QP
3		108.2667	34.88	-17.77	17.11	43.50	26.39	QP
4		281.0075	37.86	-13.04	24.82	46.00	21.18	QP
5		467.2349	35.62	-8.98	26.64	46.00	19.36	QP
6	*	729.3583	34.51	-4.05	30.46	46.00	15.54	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4		

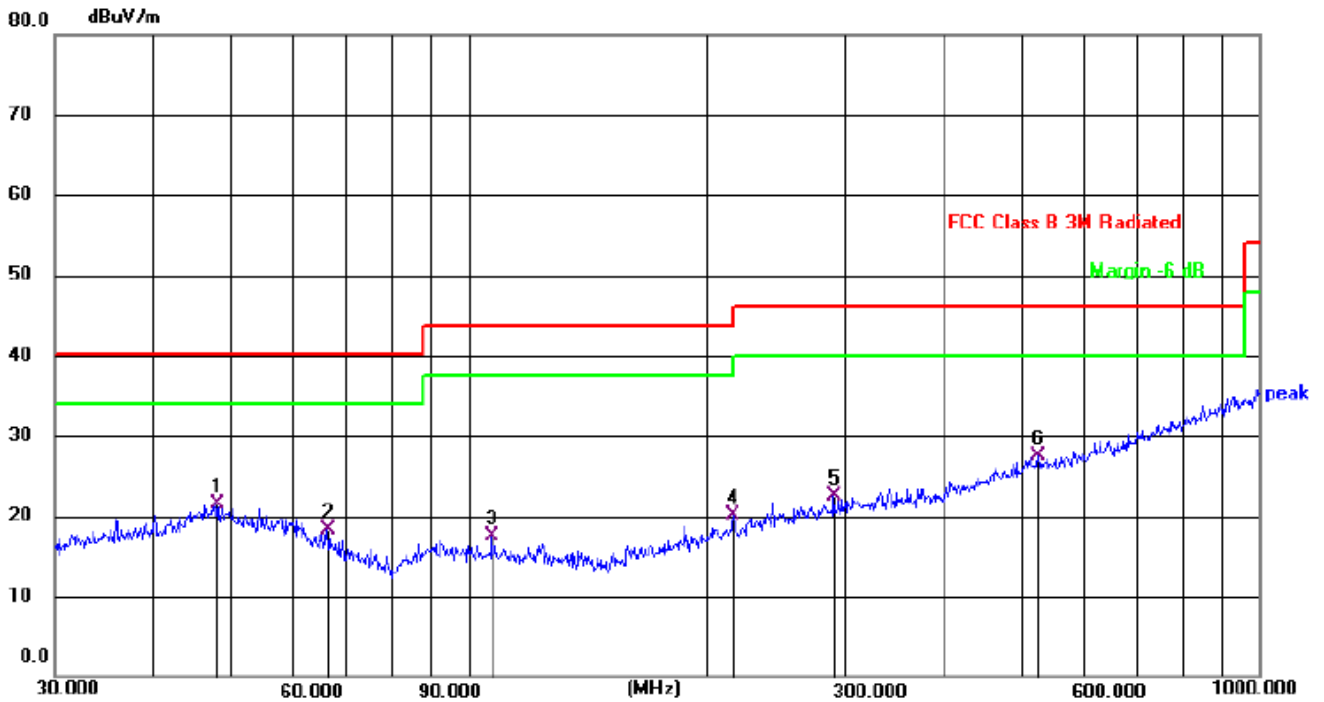

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	48.0166	35.07	-13.50	21.57	40.00	18.43	QP
2		66.3188	34.36	-16.12	18.24	40.00	21.76	QP
3		106.8945	35.29	-17.73	17.56	43.50	25.94	QP
4		216.4513	35.48	-15.32	20.16	46.00	25.84	QP
5		289.6581	35.20	-12.79	22.41	46.00	23.59	QP
6		526.0586	35.22	-7.71	27.51	46.00	18.49	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



**3.2.8 TEST RESULTS (1GHZ~25GHZ)**

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2402</b>									
V	4804.00	67.74	50.62	6.78	31.24	55.14	74.00	-18.86	PK
V	4804.00	55.32	50.62	6.78	31.24	42.72	54.00	-11.28	AV
V	7206.00	66.53	49.94	7.11	36.52	60.22	74.00	-13.78	PK
V	7206.00	54.78	49.94	7.11	36.52	48.47	54.00	-5.53	AV
V	16132.00	48.96	51.54	11.36	41.56	50.34	74.00	-23.66	PK
H	4804.00	66.81	50.62	6.78	31.24	54.21	74.00	-19.79	PK
H	4804.00	55.42	50.62	6.78	31.24	42.82	54.00	-11.18	AV
H	7206.00	69.74	49.94	7.11	36.52	63.43	74.00	-10.57	PK
H	7206.00	53.65	49.94	7.11	36.52	47.34	54.00	-6.66	AV
H	16132.00	48.92	51.54	11.36	41.56	50.30	74.00	-23.70	PK
<b>operation frequency:2441</b>									
V	4882.00	67.51	50.67	6.83	31.36	55.03	74.00	-18.97	PK
V	4882.00	55.13	50.67	6.83	31.36	42.65	54.00	-11.35	AV
V	7323.00	69.39	49.98	7.22	36.52	63.15	74.00	-10.85	PK
V	7323.00	53.44	49.98	7.22	31.24	41.92	54.00	-12.08	AV
V	16132.00	48.79	51.54	11.36	41.56	50.17	74.00	-23.83	PK
H	4882.00	66.59	50.67	6.83	31.36	54.11	74.00	-19.89	PK
H	4882.00	55.23	50.67	6.83	31.36	42.75	54.00	-11.25	AV
H	7323.00	69.48	49.98	7.22	36.52	63.24	74.00	-10.76	PK
H	7323.00	53.55	49.98	7.22	31.24	42.03	54.00	-11.97	AV
H	16132.00	48.75	51.54	11.36	41.56	50.13	74.00	-23.87	PK
<b>operation frequency:2480</b>									
V	4960.00	67.99	50.84	6.86	31.40	55.41	74.00	-18.59	PK
V	4960.00	55.53	50.84	6.86	31.40	42.95	54.00	-11.05	AV
V	7440.00	69.17	50.12	7.27	36.57	62.89	74.00	-11.11	PK
V	7440.00	53.32	50.12	7.27	31.27	41.74	54.00	-12.26	AV
V	16132.00	49.15	51.54	11.36	41.56	50.53	74.00	-23.47	PK
H	4960.00	67.06	50.84	6.86	31.40	54.48	74.00	-19.52	PK
H	4960.00	55.63	50.84	6.86	31.40	43.05	54.00	-10.95	AV
H	7440.00	67.41	50.12	7.27	36.57	61.13	74.00	-12.87	PK
H	7440.00	55.35	50.12	7.27	31.27	43.77	54.00	-10.23	AV
H	16132.00	49.11	51.54	11.36	41.56	50.49	74.00	-23.51	PK

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



$\pi/4$  DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
<b>operation frequency:2402</b>									
V	4804.00	67.42	50.61	6.78	31.23	54.82	74.00	-19.18	PK
V	4804.00	55.71	50.61	6.78	31.23	43.11	54.00	-10.89	AV
V	7206.00	66.32	49.93	7.11	36.51	60.01	74.00	-13.99	PK
V	7206.00	53.40	49.93	7.11	36.51	47.09	54.00	-6.91	AV
V	16132.00	49.39	51.53	11.35	41.55	50.76	74.00	-23.24	PK
H	4804.00	69.53	50.61	6.78	31.23	56.93	74.00	-17.07	PK
H	4804.00	56.44	50.61	6.78	31.23	43.84	54.00	-10.16	AV
H	7206.00	66.38	49.93	7.11	36.51	60.07	74.00	-13.93	PK
H	7206.00	54.72	49.93	7.11	36.51	48.41	54.00	-5.59	AV
H	16132.00	47.83	51.53	11.35	41.55	49.20	74.00	-24.80	PK
<b>operation frequency:2441</b>									
V	4882.00	67.14	50.66	6.83	31.35	54.66	74.00	-19.34	PK
V	4882.00	55.35	50.66	6.83	31.35	42.87	54.00	-11.13	AV
V	7323.00	66.87	49.97	7.22	36.51	60.63	74.00	-13.37	PK
V	7323.00	55.89	49.97	7.22	31.23	44.37	54.00	-9.63	AV
V	16132.00	48.93	51.53	11.35	41.55	50.30	74.00	-23.70	PK
H	4882.00	66.64	50.66	6.83	31.35	54.16	74.00	-19.84	PK
H	4882.00	55.74	50.66	6.83	31.35	43.26	54.00	-10.74	AV
H	7323.00	65.08	49.97	7.22	36.51	58.84	74.00	-15.16	PK
H	7323.00	53.42	49.97	7.22	31.23	41.90	54.00	-12.10	AV
H	16132.00	48.37	51.53	11.35	41.55	49.74	74.00	-24.26	PK
<b>operation frequency:2480</b>									
V	4960.00	67.53	50.83	6.86	31.39	54.95	74.00	-19.05	PK
V	4960.00	55.10	50.83	6.86	31.39	42.52	54.00	-11.48	AV
V	7440.00	66.21	50.11	7.27	36.56	59.93	74.00	-14.07	PK
V	7440.00	54.81	50.11	7.27	31.26	43.23	54.00	-10.77	AV
V	16132.00	46.74	51.53	11.35	41.55	48.11	74.00	-25.89	PK
H	4960.00	66.42	50.83	6.86	31.39	53.84	74.00	-20.16	PK
H	4960.00	54.29	50.83	6.86	31.39	41.71	54.00	-12.29	AV
H	7440.00	65.34	50.11	7.27	36.56	59.06	74.00	-14.94	PK
H	7440.00	55.68	50.11	7.27	31.26	44.10	54.00	-9.90	AV
H	16132.00	47.96	51.53	11.35	41.55	49.33	74.00	-24.67	PK

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8DPSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
<b>operation frequency:2402</b>									
V	4804.00	66.88	50.63	6.78	31.24	54.27	74.00	-19.73	PK
V	4804.00	55.71	50.63	6.78	31.24	43.10	54.00	-10.90	AV
V	7206.00	66.22	49.94	7.11	36.52	59.91	74.00	-14.09	PK
V	7206.00	53.38	49.94	7.11	36.52	47.07	54.00	-6.93	AV
V	16132.00	46.66	51.55	11.36	41.56	48.03	74.00	-25.97	PK
H	4804.00	66.61	50.63	6.78	31.24	54.00	74.00	-20.00	PK
H	4804.00	55.66	50.63	6.78	31.24	43.05	54.00	-10.95	AV
H	7206.00	64.57	49.94	7.11	36.52	58.26	74.00	-15.74	PK
H	7206.00	54.38	49.94	7.11	36.52	48.07	54.00	-5.93	AV
H	16132.00	47.47	51.55	11.36	41.56	48.84	74.00	-25.16	PK
<b>operation frequency:2441</b>									
V	4882.00	66.77	50.68	6.83	31.36	54.28	74.00	-19.72	PK
V	4882.00	54.94	50.68	6.83	31.36	42.45	54.00	-11.55	AV
V	7323.00	65.61	49.98	7.22	36.52	59.37	74.00	-14.63	PK
V	7323.00	53.44	49.98	7.22	31.24	41.92	54.00	-12.08	AV
V	16132.00	47.88	51.55	11.36	41.56	49.25	74.00	-24.75	PK
H	4882.00	65.37	50.68	6.83	31.36	52.88	74.00	-21.12	PK
H	4882.00	53.67	50.68	6.83	31.36	41.18	54.00	-12.82	AV
H	7323.00	65.07	49.98	7.22	36.52	58.83	74.00	-15.17	PK
H	7323.00	53.45	49.98	7.22	31.24	41.93	54.00	-12.07	AV
H	16132.00	46.77	51.55	11.36	41.56	48.14	74.00	-25.86	PK
<b>operation frequency:2480</b>									
V	4960.00	67.62	50.85	6.86	31.40	55.03	74.00	-18.97	PK
V	4960.00	54.67	50.85	6.86	31.40	42.08	54.00	-11.92	AV
V	7440.00	64.89	50.13	7.27	36.57	58.60	74.00	-15.40	PK
V	7440.00	53.45	50.13	7.27	31.27	41.86	54.00	-12.14	AV
V	16132.00	48.53	51.55	11.36	41.56	49.90	74.00	-24.10	PK
H	4960.00	67.54	50.85	6.86	31.40	54.95	74.00	-19.05	PK
H	4960.00	54.78	50.85	6.86	31.40	42.19	54.00	-11.81	AV
H	7440.00	65.32	50.13	7.27	36.57	59.03	74.00	-14.97	PK
H	7440.00	54.07	50.13	7.27	31.27	42.48	54.00	-11.52	AV
H	16132.00	47.88	51.55	11.36	41.56	49.25	74.00	-24.75	PK

**Remark:**



1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.





For Conducted

During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.



Test channel: Lowest channel

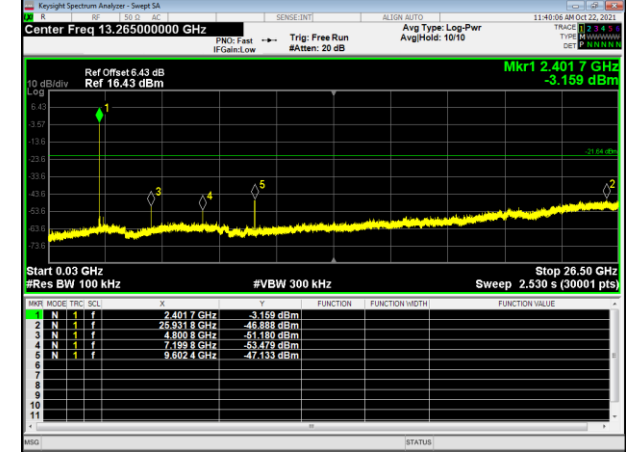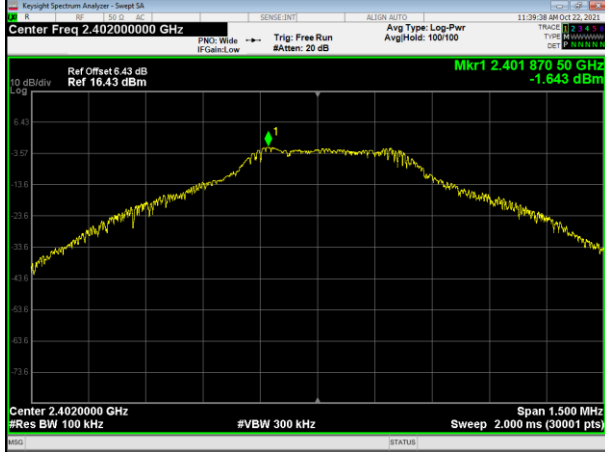

Test channel: Middle channel

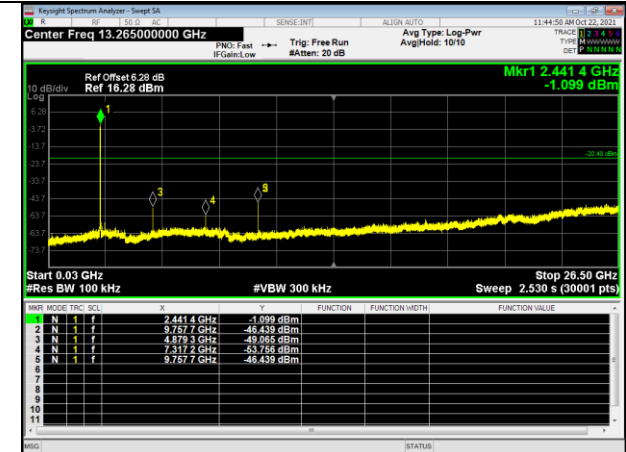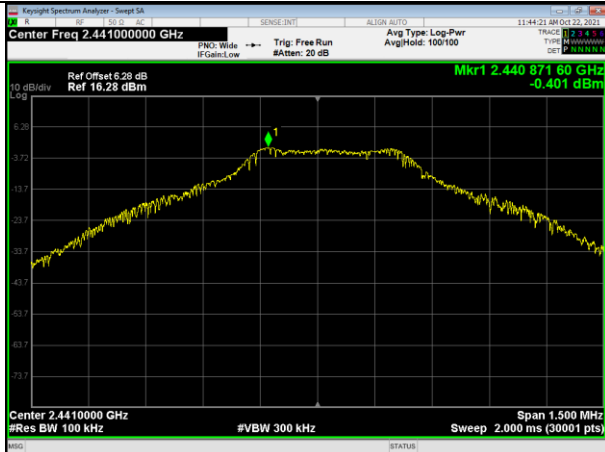

Test channel: Highest channel

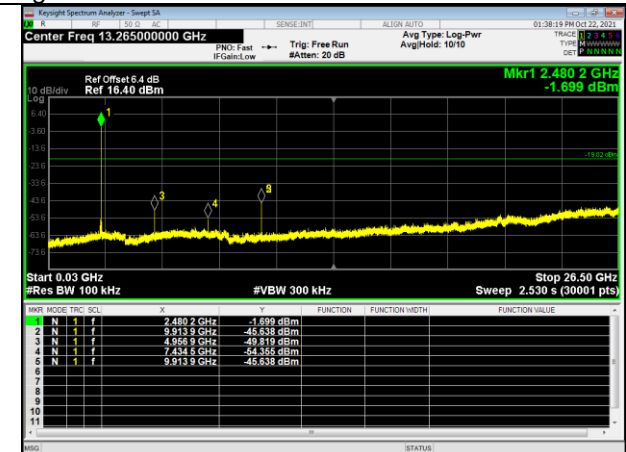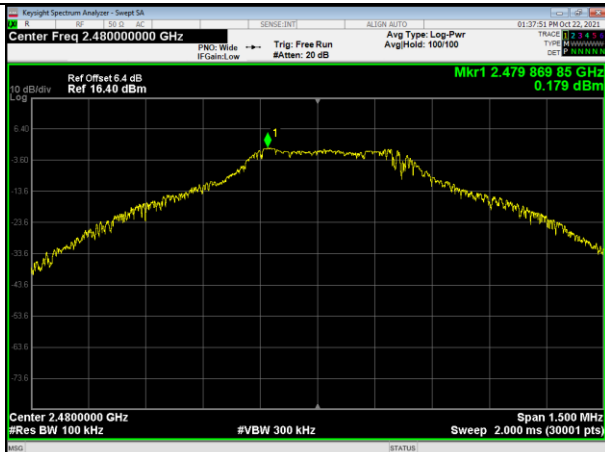

**3.3 RADIATED BAND EMISSION MEASUREMENT****3.3.1 TEST REQUIREMENT:**

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

**3.3.2 TEST PROCEDURE**

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

**3.3.3 DEVIATION FROM TEST STANDARD**

No deviation

### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

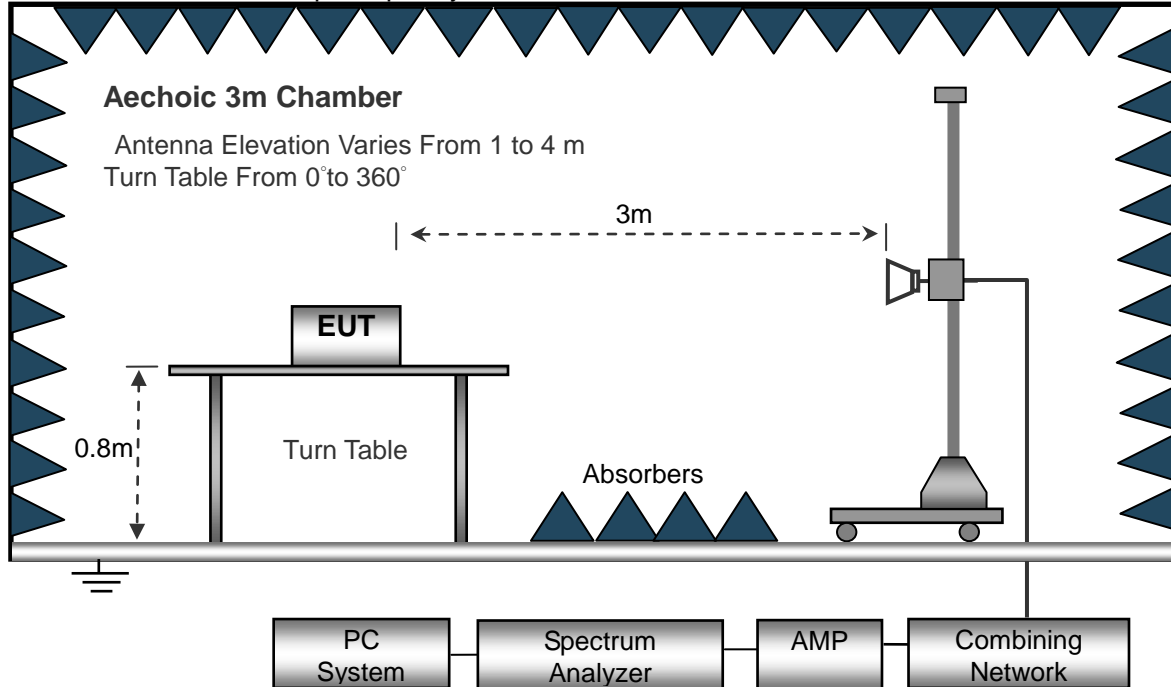

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



**3.3.6 TEST RESULT**

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2402</b>									
V	2390.00	76.42	52.11	2.73	27.37	54.41	74.00	-19.59	PK
V	2390.00	65.18	52.11	2.73	27.37	43.17	54.00	-10.83	AV
V	2400.00	76.63	52.15	2.78	27.40	54.66	74.00	-19.34	PK
V	2400.00	64.77	52.15	2.78	27.40	42.80	54.00	-11.20	AV
H	2390.00	76.71	52.11	2.73	27.37	54.70	74.00	-19.30	PK
H	2390.00	65.21	52.11	2.73	27.37	43.20	54.00	-10.80	AV
H	2400.00	76.58	52.15	2.78	27.40	54.61	74.00	-19.39	PK
H	2400.00	65.15	52.15	2.78	27.40	43.18	54.00	-10.82	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2480</b>									
V	2483.50	76.63	52.22	2.86	27.43	54.70	74.00	-19.30	PK
V	2483.50	65.42	52.22	2.86	27.43	43.49	54.00	-10.51	AV
V	2500.00	76.57	52.25	2.88	27.48	54.68	74.00	-19.32	PK
V	2500.00	64.88	52.25	2.88	27.48	42.99	54.00	-11.01	AV
H	2483.50	76.75	52.22	2.86	27.43	54.82	74.00	-19.18	PK
H	2483.50	65.46	52.22	2.86	27.43	43.53	54.00	-10.47	AV
H	2500.00	76.37	52.25	2.88	27.48	54.48	74.00	-19.52	PK
H	2500.00	65.72	52.25	2.88	27.48	43.83	54.00	-10.17	AV

**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

 $\pi/4$  DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2402</b>									
V	2390.00	76.58	52.10	2.73	27.37	54.58	74.00	-19.42	PK
V	2390.00	65.30	52.10	2.73	27.37	43.30	54.00	-10.70	AV
V	2400.00	76.79	52.14	2.78	27.40	54.83	74.00	-19.17	PK
V	2400.00	64.89	52.14	2.78	27.40	42.93	54.00	-11.07	AV
H	2390.00	76.87	52.10	2.73	27.37	54.87	74.00	-19.13	PK
H	2390.00	65.33	52.10	2.73	27.37	43.33	54.00	-10.67	AV
H	2400.00	76.74	52.14	2.78	27.40	54.78	74.00	-19.22	PK
H	2400.00	65.27	52.14	2.78	27.40	43.31	54.00	-10.69	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2480</b>									
V	2483.50	76.79	52.21	2.86	27.43	54.87	74.00	-19.13	PK
V	2483.50	65.55	52.21	2.86	27.43	43.63	54.00	-10.37	AV
V	2500.00	76.73	52.24	2.88	27.48	54.85	74.00	-19.15	PK
V	2500.00	65.00	52.24	2.88	27.48	43.12	54.00	-10.88	AV
H	2483.50	76.91	52.21	2.86	27.43	54.99	74.00	-19.01	PK
H	2483.50	65.60	52.21	2.86	27.43	43.68	54.00	-10.32	AV
H	2500.00	76.53	52.24	2.88	27.48	54.65	74.00	-19.35	PK
H	2500.00	65.85	52.24	2.88	27.48	43.97	54.00	-10.03	AV

**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 8DPSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2402</b>									
V	2390.00	76.76	52.11	2.73	27.37	54.75	74.00	-19.25	PK
V	2390.00	65.48	52.11	2.73	27.37	43.47	54.00	-10.53	AV
V	2400.00	76.98	52.15	2.78	27.40	55.01	74.00	-18.99	PK
V	2400.00	65.05	52.15	2.78	27.40	43.08	54.00	-10.92	AV
H	2390.00	77.05	52.11	2.73	27.37	55.04	74.00	-18.96	PK
H	2390.00	65.51	52.11	2.73	27.37	43.50	54.00	-10.50	AV
H	2400.00	76.92	52.15	2.78	27.40	54.95	74.00	-19.05	PK
H	2400.00	65.44	52.15	2.78	27.40	43.47	54.00	-10.53	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
<b>operation frequency:2480</b>									
V	2483.50	76.98	52.22	2.86	27.43	55.05	74.00	-18.95	PK
V	2483.50	65.72	52.22	2.86	27.43	43.79	54.00	-10.21	AV
V	2500.00	76.91	52.25	2.88	27.48	55.02	74.00	-18.98	PK
V	2500.00	65.15	52.25	2.88	27.48	43.26	54.00	-10.74	AV
H	2483.50	77.09	52.22	2.86	27.43	55.16	74.00	-18.84	PK
H	2483.50	65.76	52.22	2.86	27.43	43.83	54.00	-10.17	AV
H	2500.00	76.71	52.25	2.88	27.48	54.82	74.00	-19.18	PK
H	2500.00	66.01	52.25	2.88	27.48	44.12	54.00	-9.88	AV



**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.





For Conducted  
Unhopping  
GFSK

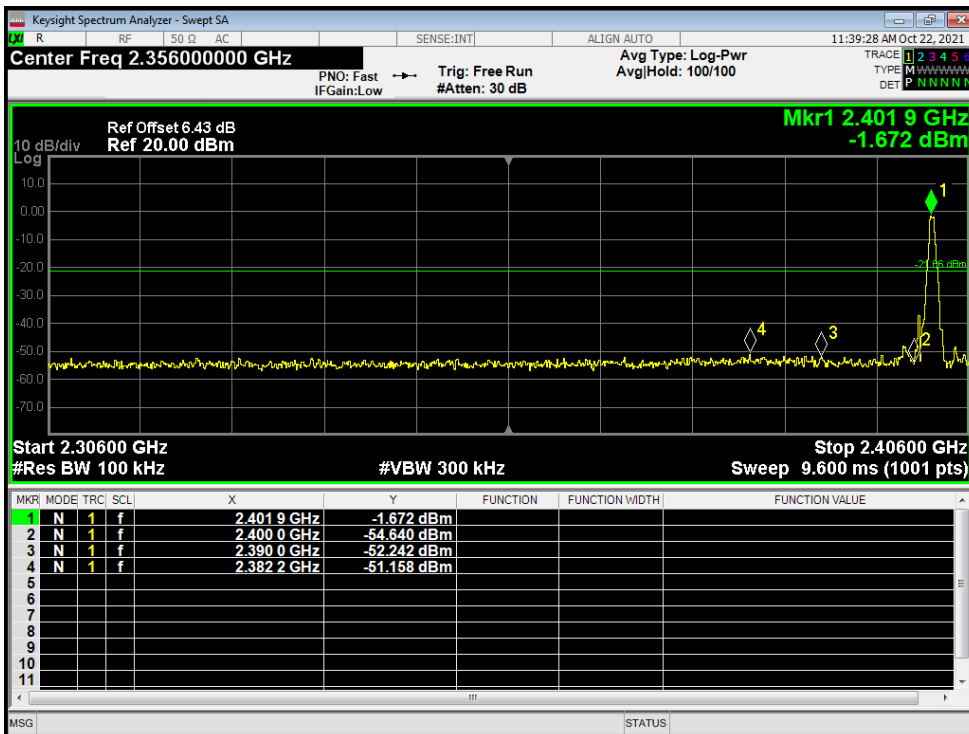
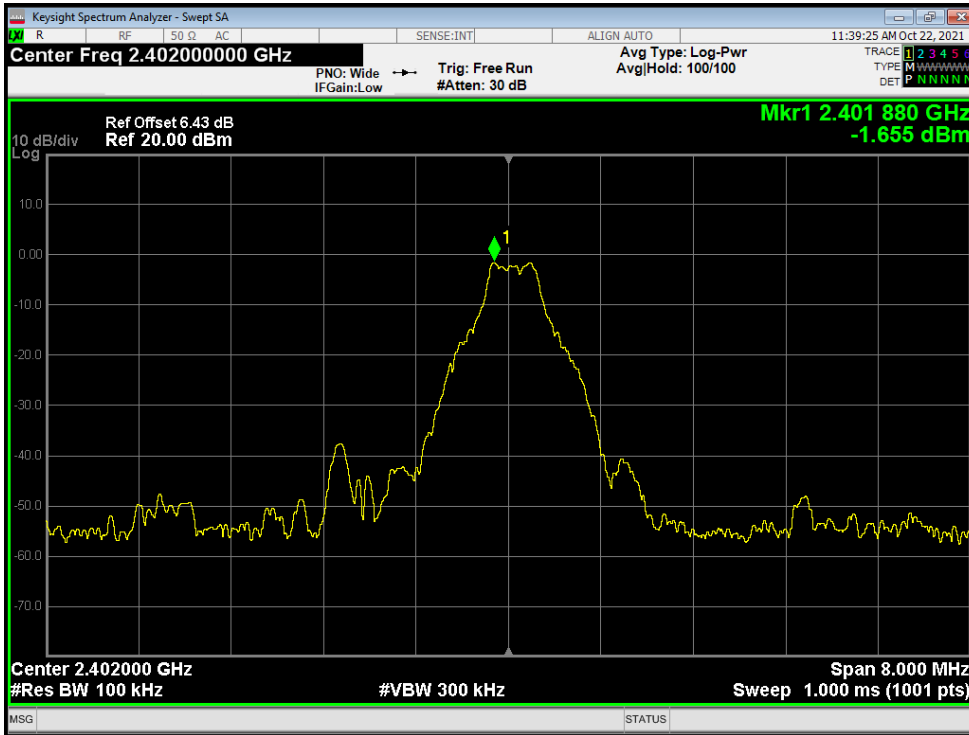


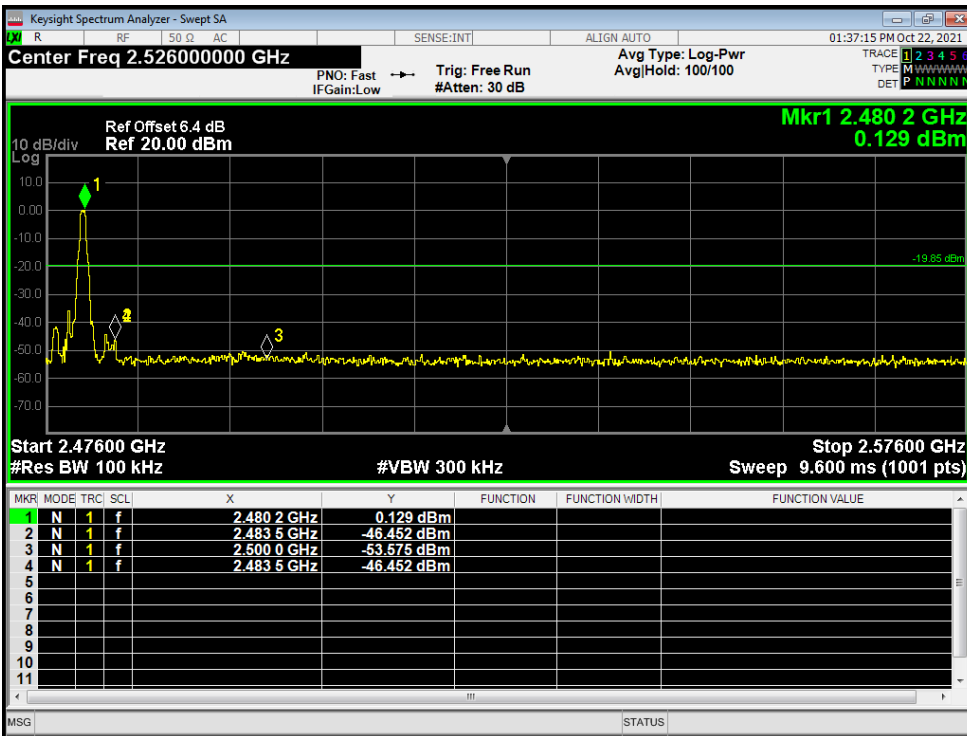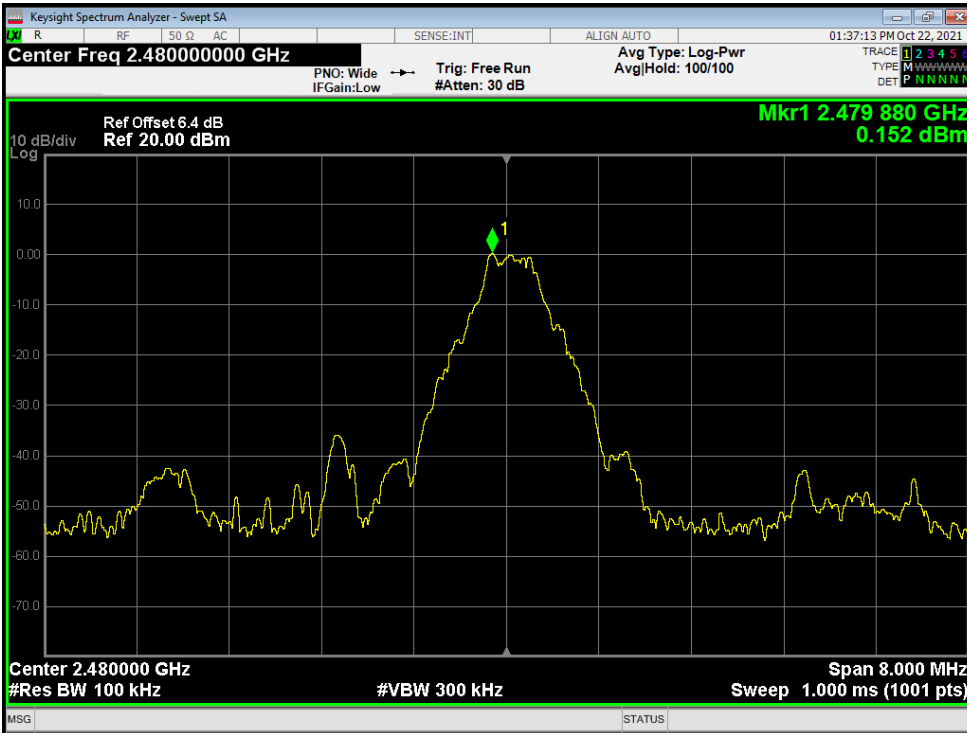





$\pi/4$  DQPSK

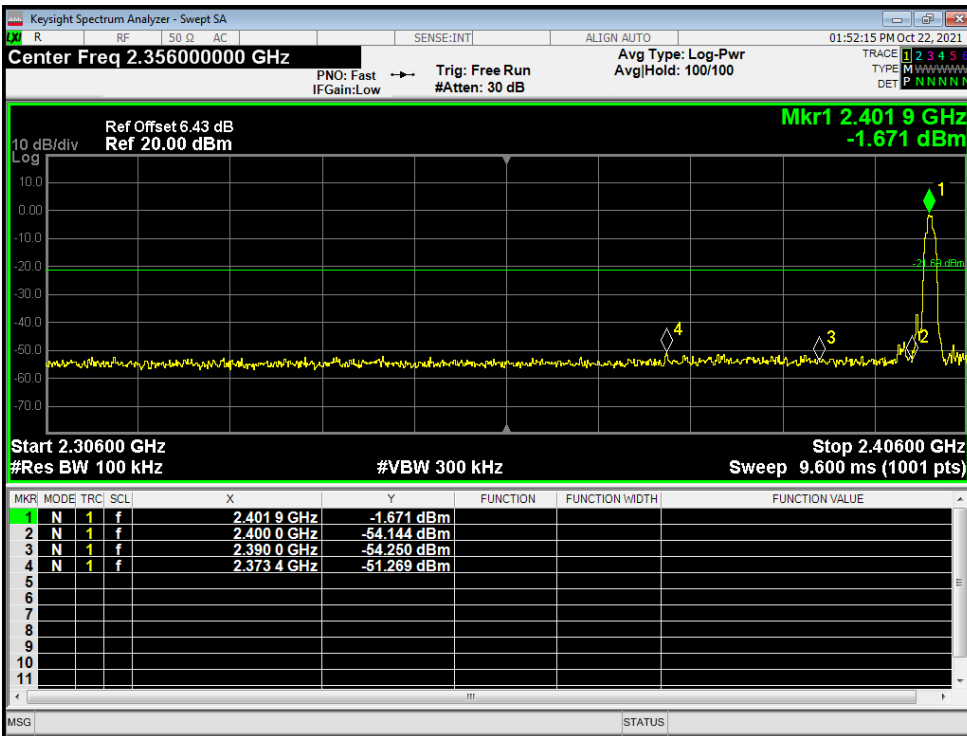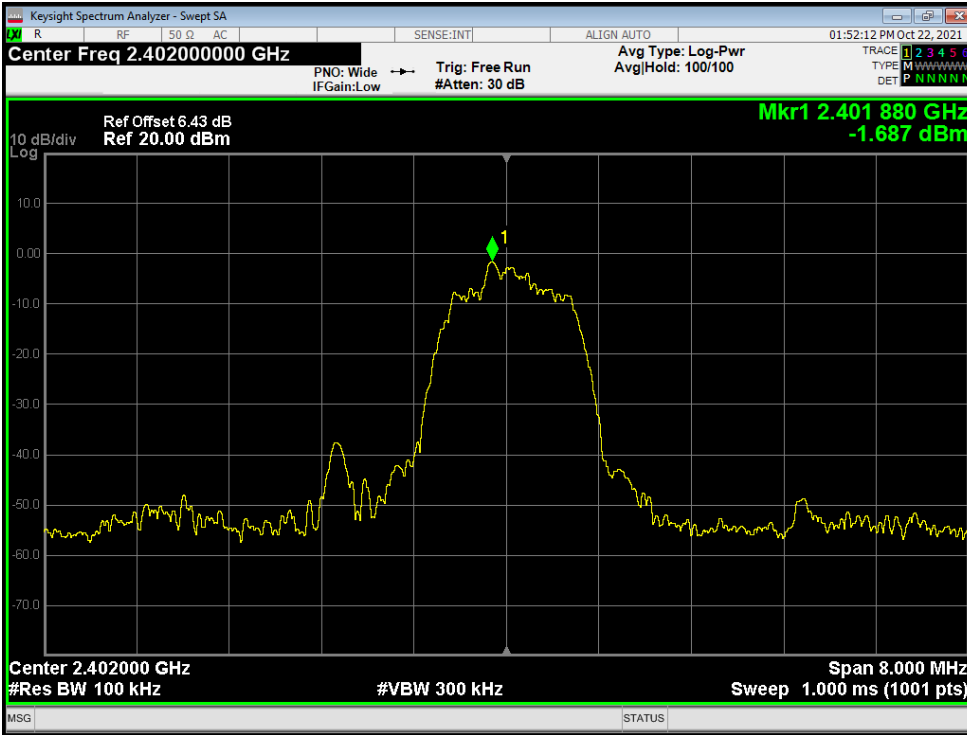

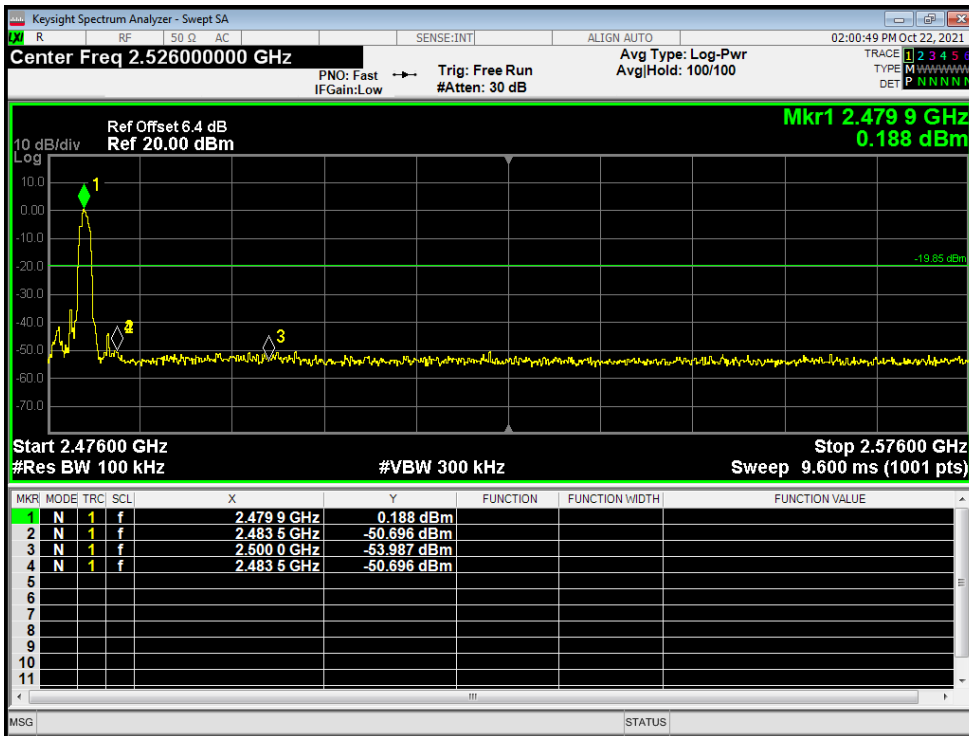
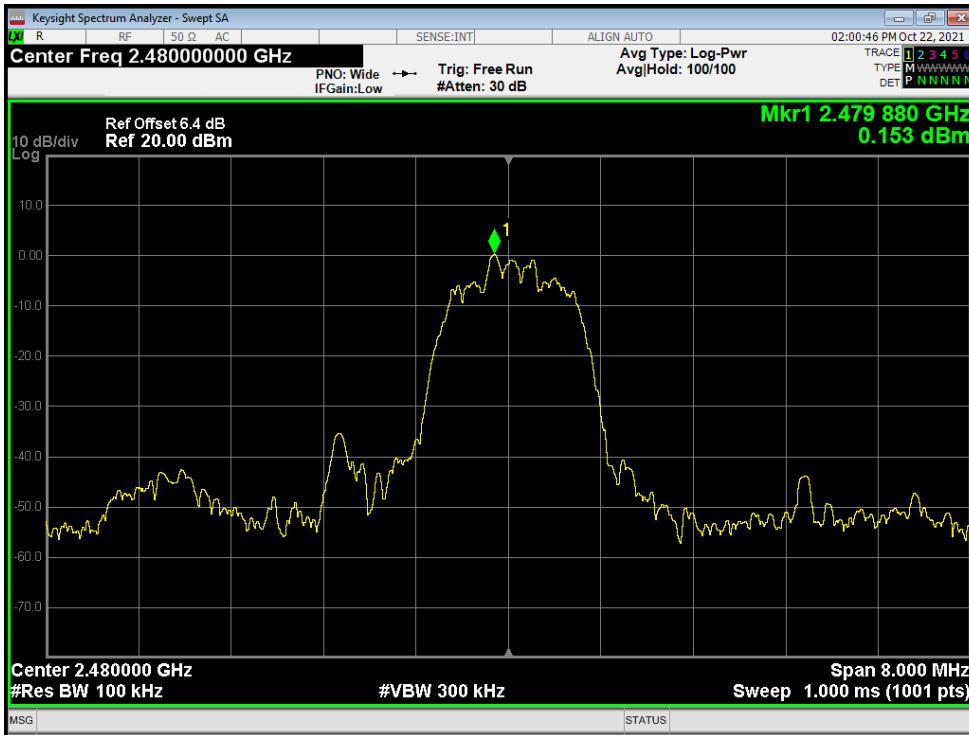




8DPSK

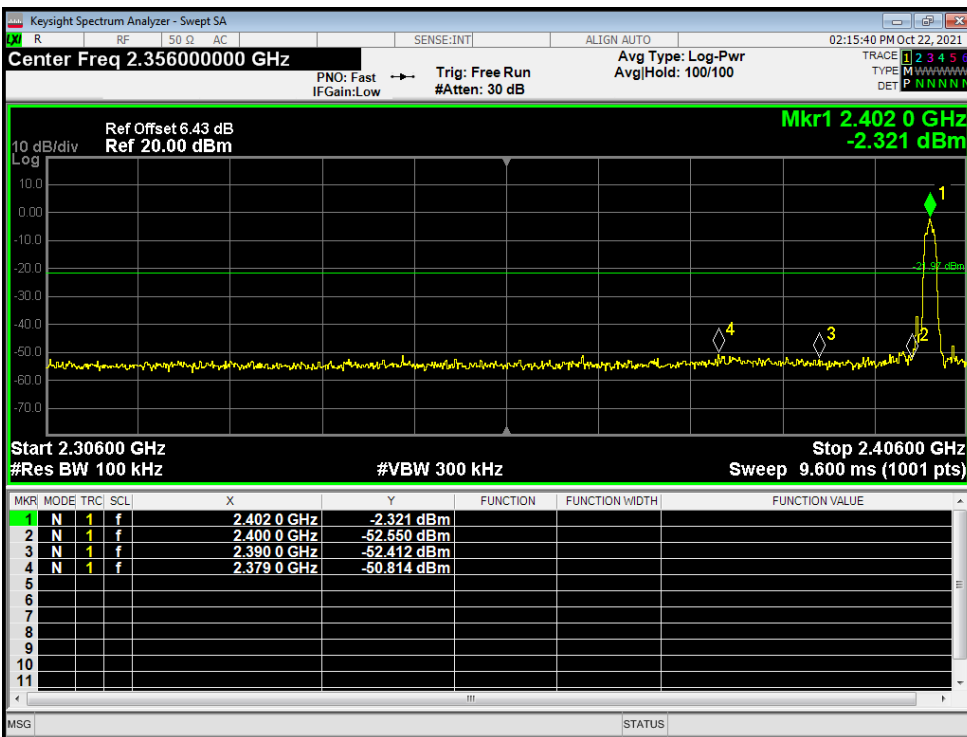
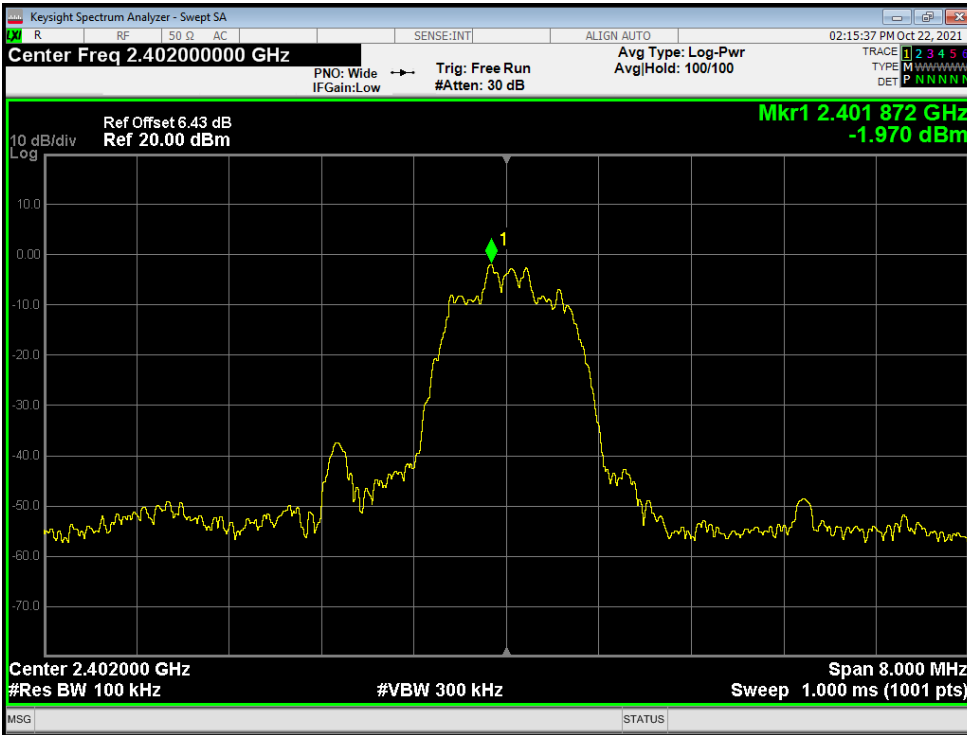





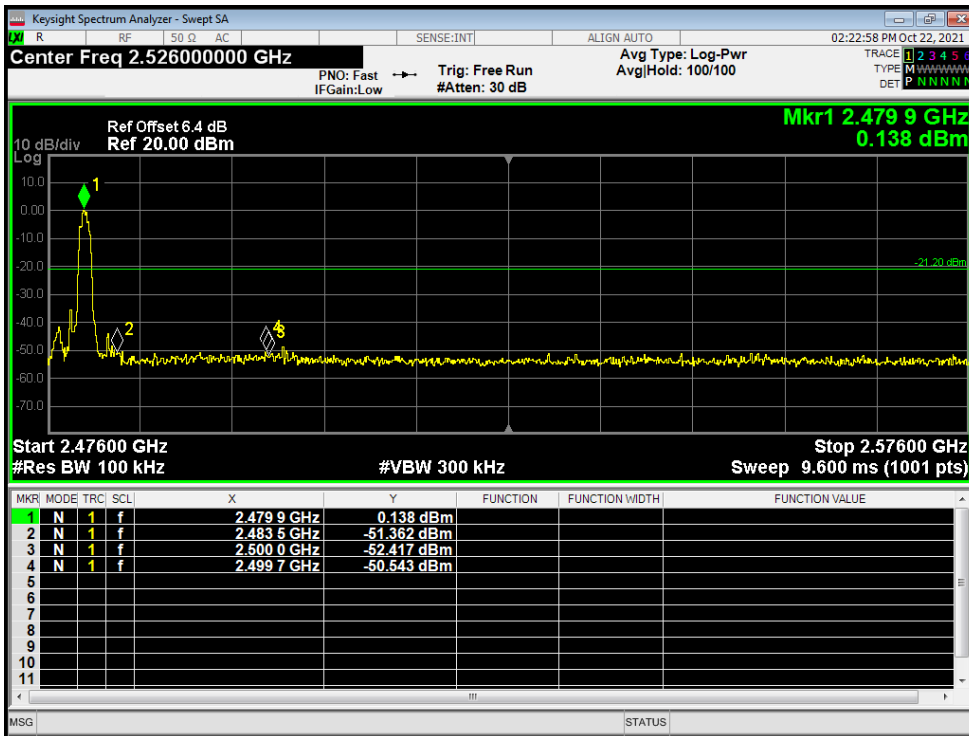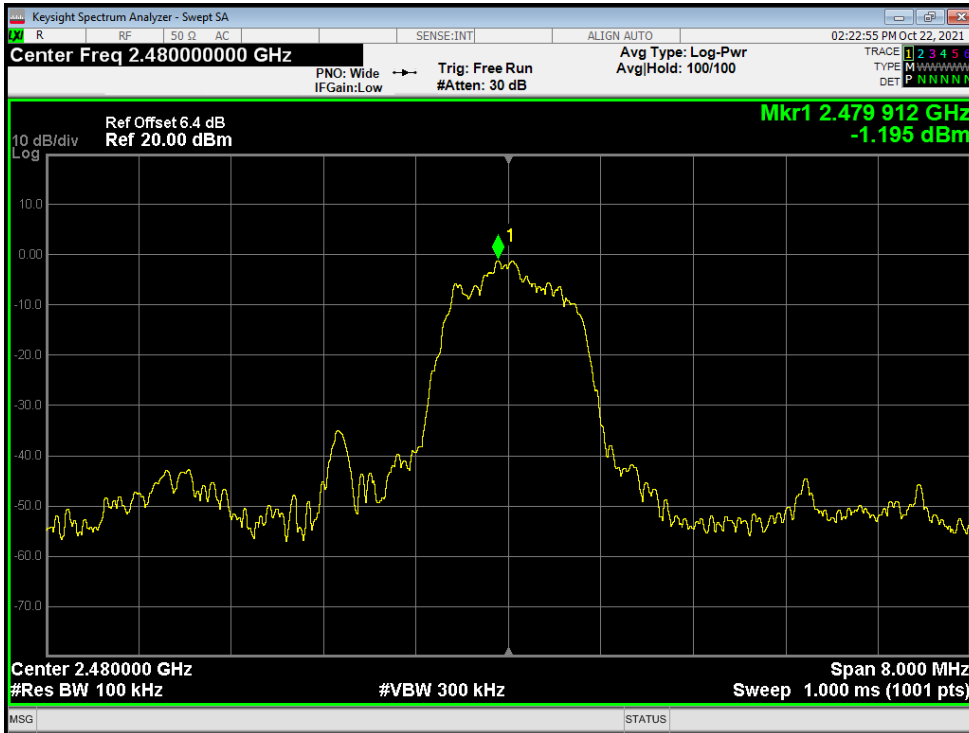



Hopping Mode

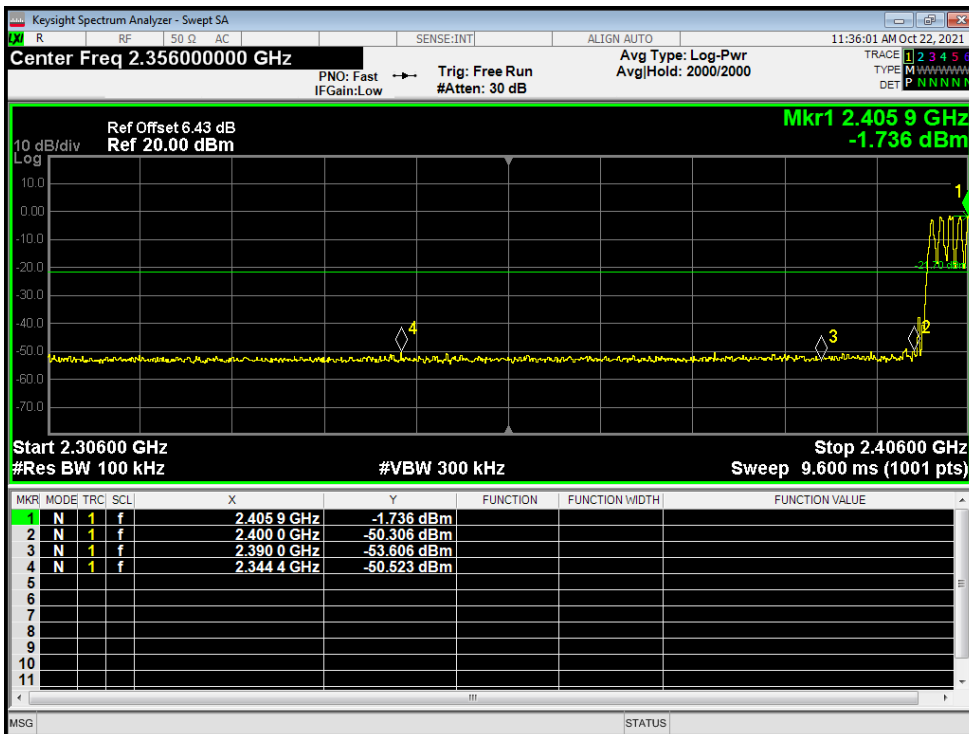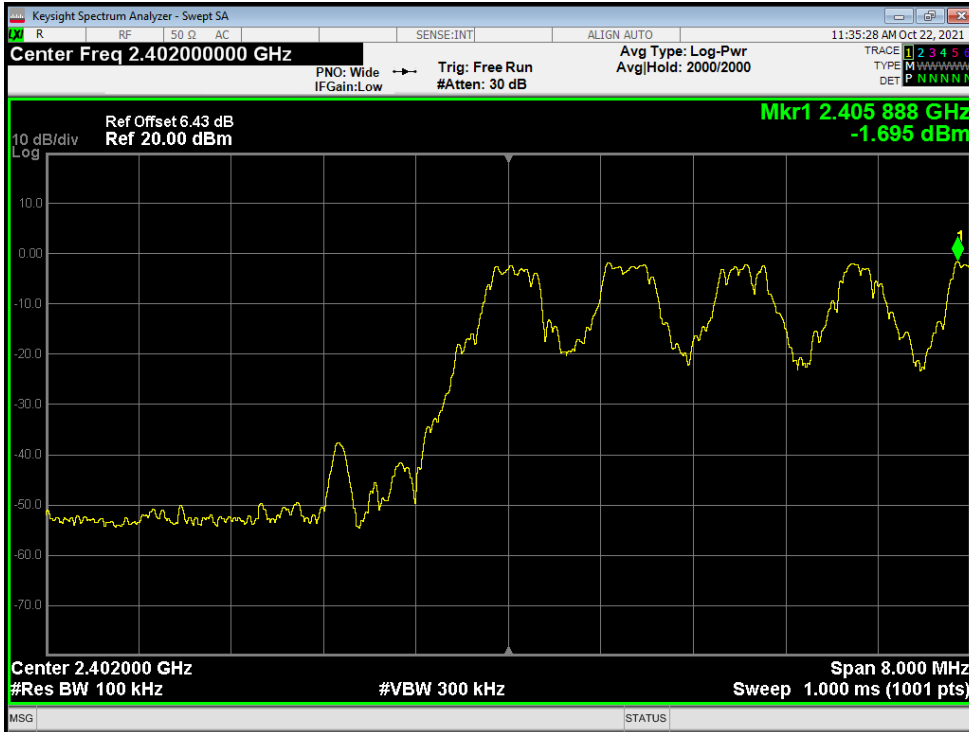

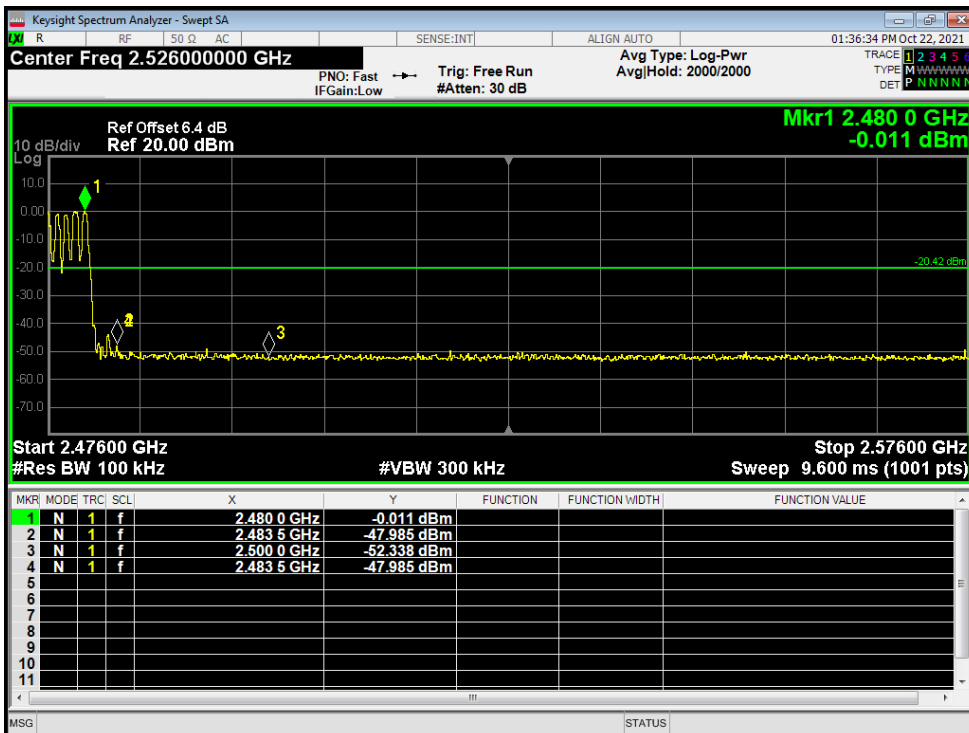



4. PEAK OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	30Bm or 20.96dBm	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured  
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
 VBW ≥ RBW  
 Sweep = auto  
 Detector function = peak  
 Trace = max hold

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP




4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.1.5 TEST RESULTS**


Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00/ CH39 /CH78 (1M/2M/3Mbps Mode)		

Mode	Test Channel	Peak Output Power (dBm)	LIMIT (dBm)
GFSK	CH00	-1.454	30.00
	CH39	-0.312	30.00
	CH78	0.301	30.00
$\pi/4$ DQPSK	CH00	-0.674	20.96
	CH39	0.529	20.96
	CH78	1.086	20.96
8DPSK	CH00	-0.031	20.96
	CH39	1.128	20.96
	CH78	1.714	20.96

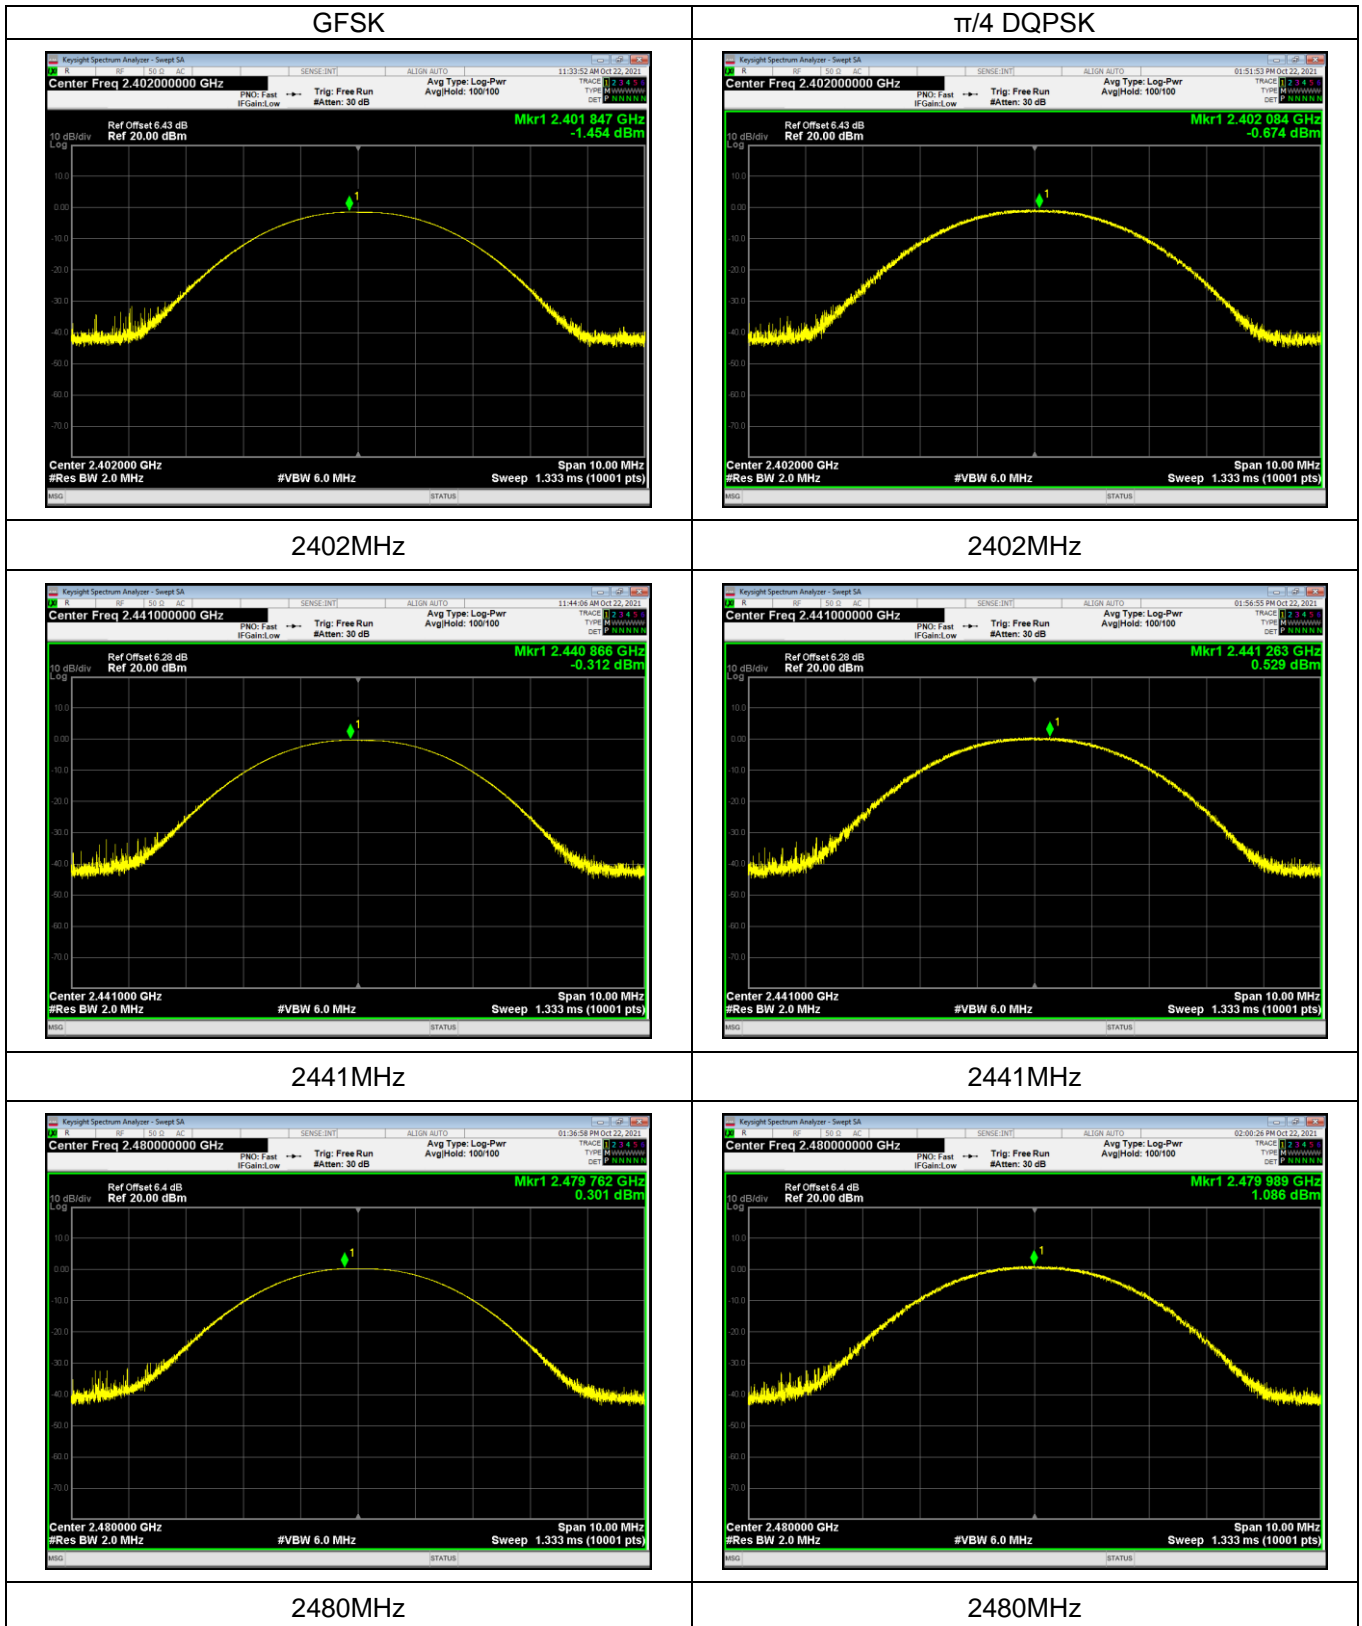





### 8DPSK

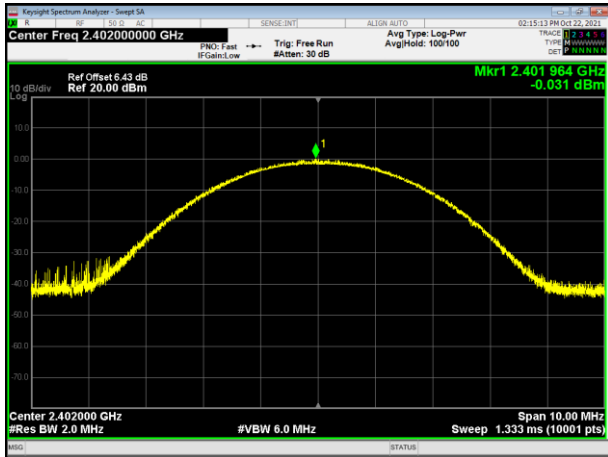

### 2402MHz

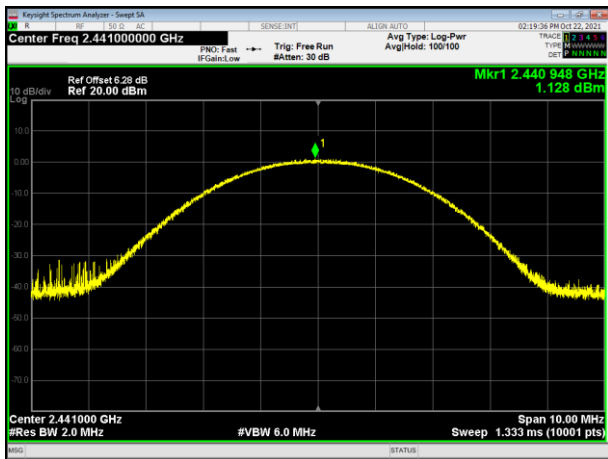

### 2441MHz

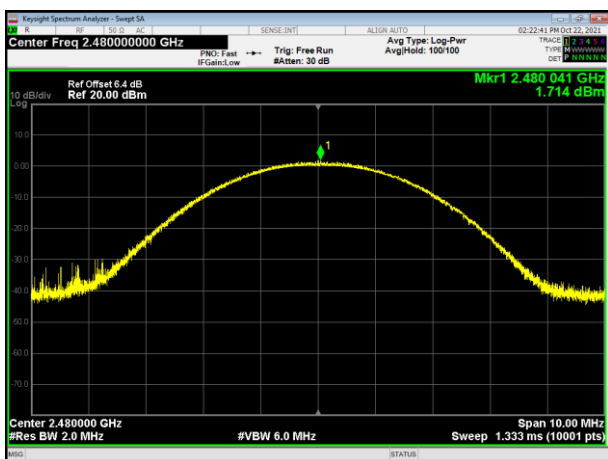

### 2480MHz



**5. NUMBER OF HOPPING CHANNEL**

**5.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW ≥ 1% of the span
VB	VBW ≥ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**5.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

**5.1.2 DEVIATION FROM STANDARD**

No deviation.

**5.1.3 TEST SETUP**



**5.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.5 TEST RESULTS**

Test Mode :	Hopping Mode	
Number of Hopping Channel	GFSK	79
	π/4 DQPSK	79
	8DPSK	79