

Regulatory WLAN Antenna Information

Platform information										
Brand	ODM	****End product model name	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)					
Lenovo	LCFC	Lenovo 14e Chromebook Gen 3, IP Slim 3 Chrome 14IAN8	Yes	regular NB	8.45mm					
****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor		Type	Antenna Part number (Main)			Antenna Part number (Aux)				
INPAQ		PIFA	DC33001YR00			DC33001YR10				
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	1.79	1.42	1.44	2.73	2.37	2.22	2.51	1.93	2.33	
Aux	1.64	2.64	2.90	2.49	2.80	2.78	2.43	2.76	2.51	
Intel Reference Gain/Type/ Separation distance										
Antenna Type	Antenna Peak gain (In dBi)*									Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.83	4.30	5.37	5.59	
Dipole	2.89	2.92	3.19	4.41	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)										
* SAR minimum separation (mm)										
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)										
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)										
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)										
* 3D Peak Antenna gain should be equal or greater than -2 dBi										
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.										

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list
3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)

1. Applicable test methods

ETS-Lindgren AMS-8500 system is 3D fully anechoic chamber, it is applied to the “Conical Cut test method”, the detail description is described as below.


The Conical Cut method requires the ability of the Measurement Antenna to be physically rotated in the theta plane (overhead) of the EUT for implementations using a single Measurement Antenna, Eleven conical cuts are required to capture data at every 15 degrees from the EUT, with the top (0 degrees) and bottom (180 degrees) cuts not being measured. Typically, the EUT will remain affixed to a turntable during the entire measurement process. The Measurement Antenna will be positioned at a starting theta angle. The EUT will then be rotated around the full 360 degrees of phi rotation. The Measurement Antenna will then be positioned at the next theta angle, and the process repeated.

		θ -Axis	Φ -Axis
Passive	Step size	15°~165° step: 15°	0°~345° step: 15°
	N / M (Points)	12	24

2. Test & System Description

a. Test setup


Typical Setup for ETS-Lindgren AMS-8500:

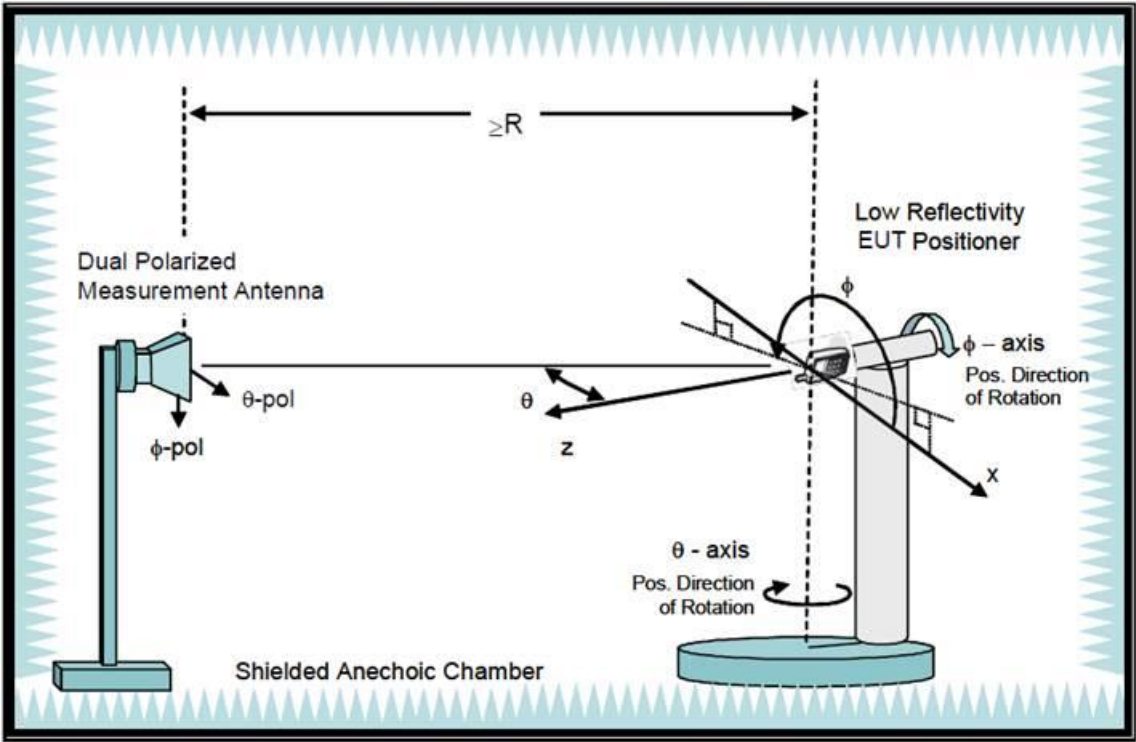

b. Equipment list

Anechoic Chamber

Equipment Description	Manufacturer	Identification no.	Current calibration date	Next calibration date
Network analyzer	Agilent	E5071C	2022/01/07	2023/01/06
Measurement software	ETS-Lindgren	EMQuest	2022/03/03	2023/03/03
Multi axis positioning system(MAPSTM)	ETS-Lindgren	EMCO 2115	2022/03/03	2023/03/03
Multi axis positioning system(MAPSTM)	ETS-Lindgren	EMCO 2110	2022/03/03	2023/03/03
MAPSTM controller	ETS-Lindgren	EMCO 2090	2022/03/03	2023/03/03
Horn antenna	ETS-Lindgren	3164-10	2022/03/03	2023/03/03
Cable 40cm 18 GHz	Jmtt	201EH012010400	2022/04/07	2023/04/07
Cable 6m 18 GHz	Jmtt	201EH012016000	2022/04/07	2023/04/07
Cable 6m 18 GHz	Jmtt	201EH012016000	2022/04/07	2023/04/07
Cable 3.5m 18 GHz	Jmtt	201EH012013500	2022/04/07	2023/04/07
Cable 1.5m 18 GHz	Jmtt	201EH012011500	2022/04/07	2023/04/07

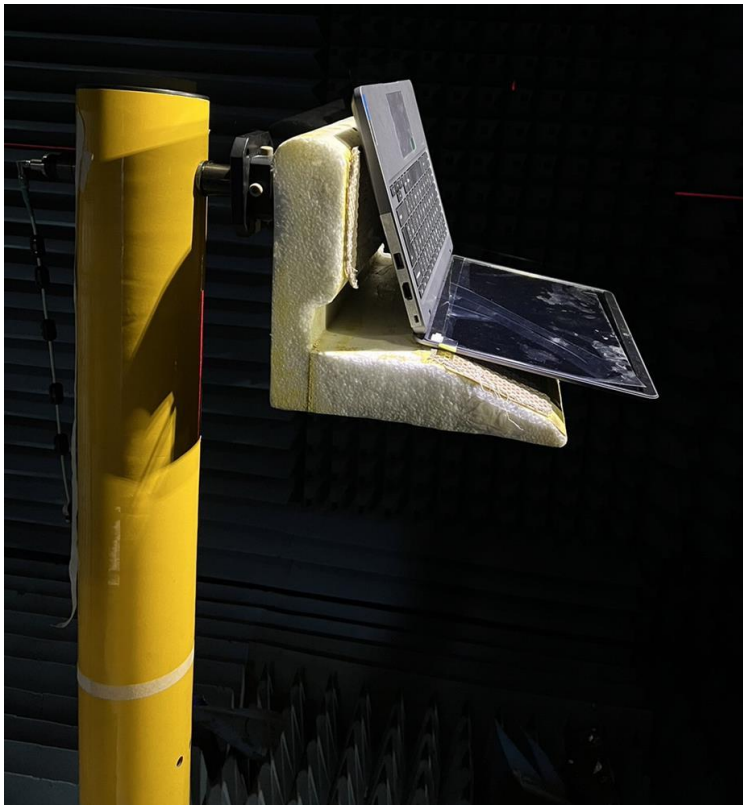3. Setup photo

Antenna Information

Section 1. Antenna Assembly Specifications

1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
P/N: DC33001YR00 (WA-P-LB-02-121) Main Antenna	INPAQ	PIFA	50 ohm Coaxial length: 36.5mm diameter: 1.13mm Connector Type: i-pex(MHF)	2400-2483.5	1.79	1.89	3.0 max	0.10
				5150-5250	1.42	1.57	3.0 max	0.15
				5250-5350	1.44	1.59	3.0 max	0.15
				5470-5725	2.73	2.89	3.0 max	0.16
				5725-5850	2.37	2.53	3.0 max	0.16
				5925-6425	2.22	2.39	3.0 max	0.17
				6425-6525	2.51	2.68	3.0 max	0.17
				6525-6875	1.93	2.10	3.0 max	0.17
				6875-7125	2.33	2.51	3.0 max	0.18
P/N: DC33001YR10 (WA-P-LB-03-012) Aux Antenna	INPAQ	PIFA	50 ohm Coaxial length: 287mm diameter: 1.13mm Connector Type: i-pex(MHF)	2400-2483.5	1.64	2.44	3.0 max	0.80
				5150-5250	2.64	3.83	3.0 max	1.19
				5250-5350	2.90	4.10	3.0 max	1.20
				5470-5725	2.49	3.71	3.0 max	1.22
				5725-5850	2.80	4.04	3.0 max	1.24
				5925-6425	2.78	4.03	3.0 max	1.25
				6425-6525	2.43	3.76	3.0 max	1.33
				6525-6875	2.76	4.12	3.0 max	1.36
				6875-7125	2.51	3.91	3.0 max	1.40

- 3D Antenna Peak Gain required being test in system basis.