



Report No.: KSCR240700144905

Page: 1 of 53

TEST REPORT

Application No.: KSCR2407001449AT
FCC ID: ROR2002
Applicant: Blinq Networks Inc.
Address of Applicant: 140 Renfrew Drive, Suite 200, Markham, L3R 6B3, Canada
Manufacturer: Blinq Networks Inc.
Address of Manufacturer: 140 Renfrew Drive, Suite 200, Markham, L3R 6B3, Canada
Factory: VVDN Technologies Private Limited
Address of Factory: Plot No: CP-07, Sector 8, IMT Manesar, Gurugram, Haryana
Equipment Under Test (EUT):
EUT Name: PCW-400i
Model No.: PCW-400i
Standard(s): CBRSA-TS-9001-V1.2.1
WINNF-TS-0122-V1.0.2
FCC 47 CFR Part 96
KDB 940660 D01 V03
Date of Receipt: 2024-07-31
Date of Test: 2025-01-20 to 2025-02-20
Date of Issue: 2025-02-21

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record			
Version	Description	Date	Remark
00	Original	2025-02-21	/

Authorized for issue by:			
Tested By	 Eric Liu		
	Eric Liu /Project Engineer		
Approved By	 Terry Hou		
	Terry Hou /Reviewer		

2 Test Summary

Item	Standard	Test Case ID	Result
Domain Proxy Multi-Step registration	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.2	Pass
Domain Proxy Single-Step registration for CBSD with CPI signed data	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.6	Pass
Domain Proxy Missing Required parameters (responseCode 102)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.9	Pass
Domain Proxy Pending registration (responseCode 200)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.11	Pass
Domain Proxy Invalid parameters (responseCode 103)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.13	Pass
Domain Proxy Blacklisted CBSD (responseCode 101)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.15	Pass
Domain Proxy Unsupported SAS protocol version responseCode 100)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.17	Pass
Domain Proxy Group Error (responseCode 201)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.19	Pass
Unsuccessful Grant responseCode=400 (INTERFERENCE)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.GRA.1	Pass
Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.GRA.2	Pass
Domain Proxy Heartbeat Success Case (first Heartbeat Response)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.HBT.2	Pass
Heartbeat responseCode=105 (DREGISTER)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.3	Pass
Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.5	Pass
Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.6	Pass
Heartbeat responseCode=502 (UNSYNC_OP_PARAM)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.7	Pass
Domain Proxy Heartbeat responseCode=500 (TERMINATED_GRANT)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.HBT.8	Pass
Heartbeat Response Absent (First Heartbeat)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.9	Pass
Heartbeat Response Absent (Subsequent Heartbeat)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.10	Pass
Successful Grant Renewal in Heartbeat Test Case	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.11	Pass
Domain Proxy Registration Response contains measReportConfig	WINNF-TS-0122-V1.0.2	WINNF.FT.D.MES.2	Pass

Item	Standard	Test Case ID	Result
Grant Response contains measReportConfig	WINNF-TS-0122-V1.0.2	WINNF.FT.C.MES.3	Pass
Domain Proxy Heartbeat Response contains measReportConfig	WINNF-TS-0122-V1.0.2	WINNF.FT.D.MES.5	Pass
Domain Proxy Successful Relinquishment	WINNF-TS-0122-V1.0.2	WINNF.FT.D.RLQ.2	Pass
Domain Proxy Unsuccessful Relinquishment, responseCode=102	WINNF-TS-0122-V1.0.2	WINNF.FT.D.RLQ.4	Pass
Domain Proxy Unsuccessful Relinquishment, responseCode=103	WINNF-TS-0122-V1.0.2	WINNF.FT.D.RLQ.6	Pass
Domain Proxy Successful Deregistration	WINNF-TS-0122-V1.0.2	WINNF.FT.D.DRG.2	Pass
Domain Proxy Deregistration responseCode=102	WINNF-TS-0122-V1.0.2	WINNF.FT.D.DRG.4	Pass
Deregistration responseCode=103	WINNF-TS-0122-V1.0.2	WINNF.FT.C.DRG.5	Pass
Successful TLS connection between UUT and SAS Test Harness	WINNF-TS-0122-V1.0.2	WINNF.FT.C.SCS.1	Pass
TLS failure due to revoked certificate	WINNF-TS-0122-V1.0.2	WINNF.FT.C.SCS.2	Pass
TLS failure due to expired server certificate	WINNF-TS-0122-V1.0.2	WINNF.FT.C.SCS.3	Pass
TLS failure when SAS Test Harness certificate is issued by unknown CA	WINNF-TS-0122-V1.0.2	WINNF.FT.C.SCS.4	Pass
TLS failure when certificate at the SAS Test Harness is corrupted	WINNF-TS-0122-V1.0.2	WINNF.FT.C.SCS.5	Pass
UUT RF Transmit Power Measurement	WINNF-TS-0122-V1.0.2	WINNF.PT.C.HBT.1	Pass
SAS Version: 1.0.0.3			

The UUT is a CBSD with Domain Proxy. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

CBRSA-TS-9001-V1.0.0

CBRS Alliance Certification Test Plan

WINNF-TS-0122-V1.0.2

Test and Certification for Citizens Broadband Radio Service (CBRS); Conformance and Performance

Test Technical Specification; CBSD/DP as Unit Under Test (UUT)

KDB 940660 D01 Part 96 CBRS Eqpt v03

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary.....	3
3 Contents	5
4 General Information.....	6
4.1 Details of E.U.T.....	6
4.2 Description of CBSD/DP Support Features.....	7
4.3 Summary of Test Results	8
4.4 Measurement Uncertainty	8
4.5 Description of Support Units.....	9
4.6 Test Location	9
4.7 Test Facility.....	9
5 Equipment List	10
6 Test Method and Environment.....	11
6.1 CBSD/DP Conformance and Performance	11
6.2 CBSD Test Procedure.....	11
6.3 Test Environment.....	12
6.4 Test Setup	12
7 Test Data.....	13
7.1 CBSD Registration Process.....	13
7.2 CBSD Spectrum Grant Process.....	18
7.3 CBSD HeartBeat Process	19
7.4 CBSD Measurement Report.....	31
7.5 CBSD Relinquishment Process	36
7.6 CBSD Deregistration Process	39
7.7 CBSD Security Validation.....	42
7.8 CBSD RF Power Measurement.....	45
8 Test Data Log.....	48
8.1 WINNF.FT.C.SCS.1	48
8.2 WINNF.FT.C.SCS.2	49
8.3 WINNF.FT.C.SCS.3	50
8.4 WINNF.FT.C.SCS.4	51
8.5 WINNF.FT.C.SCS.5	52
9 Test Setup Photo	53
10 EUT Constructional Details (EUT Photos).....	53

4 General Information

4.1 Details of E.U.T.

Power supply:	44-57V DC By POE
Test Voltage:	120V, 60Hz
Serial Number of Tested EUT:	CBSD-1
CBSD Class:	Category A CBSD
Transmitter Frequency Band:	5GNR N48, N77, N78
Transmitter Frequency Range:	3550~3700MHz
Hardware Version:	V1.0.0
Software Version:	V1.0.0
Antenna Gain:	7.0dBi (Provided by manufacturer)

4.2 Description of CBS/DP Support Features

Condition	Feature Description	Supported
C1	Mandatory for UUT which supports multi-step registration message.	Y
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	N
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.	Y
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	Y
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	N
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration.	Y

Y: Supported

N: Not supported

4.3 Summary of Test Results

WINNF-TS-0122			
Classes	Test Case Items	Pass Items	Pass Rate (%)
FT (CBSD, DP/CBSD)	33	33	100
PT (CBSD, DP/CBSD)	1	1	100
Total	34	34	100

Note:

1. Functional Test (FT): Test to validate the conformance of the Protocols and functionalities implemented in the CBSD/DP UUT to the requirements developed by WINNForum and supporting FCC/DoD requirements.
2. Field/Performance Test (PT): Test to check the capability of the CBSD/DP UUT to support various traffic models and actual operations in the field.

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	RF conducted power	$\pm 0.75\text{dB}$
3	Temperature test	$\pm 1^\circ\text{C}$
4	Humidity test	$\pm 3\%$
5	Supply voltages	$\pm 1.5\%$
6	Time	$\pm 3\%$

4.5 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
NUC	Simply NUC	CBM1r8RB	770000T2
CPE	/	JT8900D N78	GX6000FEB2E4
Router	TP-Link	TL-SG108S-M2	22452H2000477
POE	PROCET	PT-PSE106GBR-10	PT2409211224

4.6 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

- SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
- SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
- Sample source: sent by customer.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

5 Equipment List

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
Laptop	Lenovo	Y510P	HFL000026	N/A	N/A
Spectrum Analyzer	KEYSIGHT	N9020A	KUS2001M00 1-2	08/01/2024	07/31/2025
Shield Room	YanChuang	N/A	KS301115-2	N/A	N/A
Coaxial Cable	Thermax	N/A	13	2024/09/15	2025/09/14
Attenuator	Mini-Circuits	NAT-6-2W	15542-1	N.C.R.	N.C.R.
Humidity / Temperature Indicator	Renke	RS-WS-N01-6J	1032844	2024/03/19	2025/03/18

6 Test Method and Environment

6.1 CBSD/DP Conformance and Performance

Test Requirement:	CBRS CBSD Test Specification WINNF-TS-0122-V1.0.2
Test Method:	CBRS CBSD Test Specification WINNF-TS-0122-V1.0.2 WINNF-IN-0156_WInnForum_SAS_Test_Harness_CBSD_UUT_Tutorial_v1_0_0_1

6.2 CBSD Test Procedure


- a. Connect the UUT to SAS Test Harness system and RF Test instruments via the DP interface and RF components. The highest level is set to test configuration.
- b. UUT shall be UTC time synchronized
- c. The frequency band is granted and set as UUT supported Modulation and Channels, transmitted power of the UUT according to it granted parameters from the SAS Test Harness.
- d. Each test case results were recorded and validated by SAS Test Harness system and RF instruments test cases was recorded test results from SAS Test Harness system.

6.3 Test Environment

Test Harness Version:	V1.0.0.3
Operating System:	Microsoft Windows 10
TLS Version:	1.2
Python Version:	2.7.13
Environmental Conditions:	25deg. C, 65%RH
Input Power:	120Vac, 60Hz

6.4 Test Setup

- 1) DP is deployed on the network management, and the registration of DP to SAS is to register with SAS according to the granularity of CBSD ID;
- 2) The DP and the network element communicate messages according to the cell granularity, and each CBSDID corresponds to a cell of an RRU which belongs to a base station.

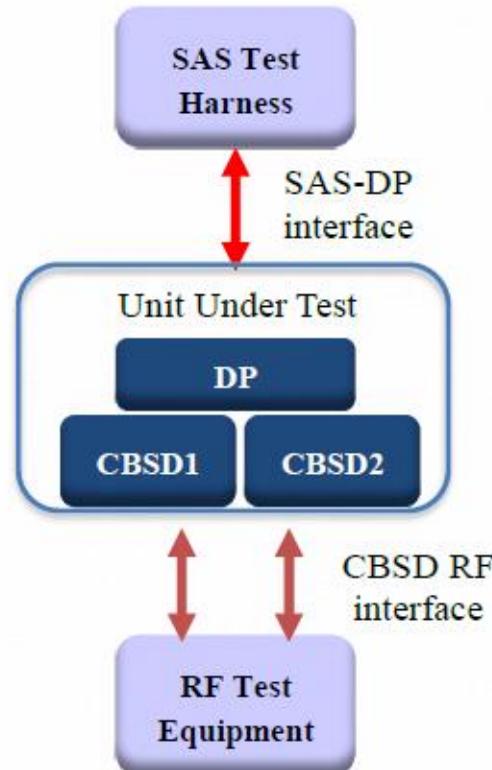

DP/CBSD as UUT, BTS-CBSD communication with Domain Proxy

7 Test Data

7.1 CBSD Registration Process

7.1.1 WINNF.FT.D.REG.2

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness ● UUT is in the Unregistered state 	--	--
2	<p>DP with two CBSD sends correct Registration request information, as specified in [n.5], in the form of one 2-element Array or as individual messages to the SAS Test Harness:</p> <ul style="list-style-type: none"> ● The required userId, fcId and cbsdSerialNumber registration parameters shall be sent for each CBSD and conform to proper format and acceptable ranges. ● Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. <p>Note: It is outside the scope of this document to test the Registration information that is supplied via another means.</p>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<ul style="list-style-type: none"> ● SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or individual messages as follows: <ul style="list-style-type: none"> - cbsId = Ci - measReportConfig shall not be included - responseCode = 0 for each CBSD 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall not transmit RF 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.1.2 WINNF.FT.D.REG.6

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state ● All of the required and REG-Conditional parameters shall be configured and CPI signature provided 	--	--
2	<p>The DP with two CBSDs sends Registration requests in the form of one 2-element Array or as individual messages to the SAS Test Harness:</p> <ul style="list-style-type: none"> ● The required userId, fcId and cbssdSerialNumber and REG-Conditional cbssdCategory, airInterface, measCapability and cpiSignatureData registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. ● Any optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<ul style="list-style-type: none"> ● SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or individual messages as follows: <ul style="list-style-type: none"> - cbssdId = Ci - measReportConfig for each CBSD shall not be included - responseCode = 0 for each CBSD 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall not transmit RF 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.1.3 WINNF.FT.D.REG.9

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	<p>SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows:</p> <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode = 102 for CBSD1 and CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall not transmit RF 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.1.4 WINNF.FT.D.REG.11

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	<p>SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows:</p> <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode = 200 for CBSD1 and CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall not transmit RF 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.1.5 WINNF.FT.D.REG.13

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	<p>SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows:</p> <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode = 0 for CBSD1 - responseCode = 103 for CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall not transmit RF 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.1.6 WINNF.FT.D.REG.15

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	<p>SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows:</p> <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode = 0 for CBSD1 - responseCode = 101 for CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall not transmit RF 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.1.7 WINNF.FT.D.REG.17

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	<p>SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows:</p> <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode = 100 for CBSD1 and CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall not transmit RF 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.1.8 WINNF.FT.D.REG.19

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state 	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	<p>SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows:</p> <ul style="list-style-type: none"> - SAS response does not include a cbsdId. - responseCode = 0 for CBSD1 - responseCode = 201 for CBSD2 	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall not transmit RF 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.2 CBSD Spectrum Grant Process

7.2.1 WINNF.FT.C.GRA.1

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including - cbsdId=C - responseCode = 400	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.2.2 WINNF.FT.C.GRA.2

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including - cbsdId=C - responseCode = 400	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.3 CBSD HeartBeat Process

7.3.1 WINNF.FT.D.HBT.2

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● DP has two CBSD registered successfully with SAS Test Harness, with cbsdId = Ci, i={1,2} 	--	--
2	<p>DP sends a message:</p> <ul style="list-style-type: none"> ● If message is type Spectrum Inquiry Request, go to step 3, or ● If message is type Grant Request, go to step 5 	--	--
3	<p>DP sends a Spectrum Inquiry Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Spectrum Inquiry Request message is formatted correctly for each CBSD, including for CBSDi, i={1,2}:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● List of frequencyRange objects sent by DP are within the CBRS frequency range 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	<p>If a separate Spectrum Inquiry Request message was sent for each CBSD, the SAS Test Harness shall respond to each Spectrum Inquiry Request message with a separate Spectrum Inquiry Response message. If a single Spectrum Inquiry Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Spectrum Inquiry Response message containing a 2-object array. Verify parameters for each CBSD within the Spectrum Inquiry Response message are as follows, for CBSDi, i={1,2}:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● availableChannel is an array of availableChannel objects ● responseCode = 0 	--	--
5	<p>DP sends a Grant Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Grant Request message is formatted correctly for each CBSD, including for CBSDi, i={1,2}:</p> <ul style="list-style-type: none"> ● cbsdId = C ● maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96 ● operationFrequencyRange, Fi, sent by UUT is a valid range within the CBRS band 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
6	<p>If a separate Grant Request message was sent for each CBSD, the SAS Test Harness shall respond to each Grant Request message with a separate Grant Response message. If a single Grant Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Grant Response message containing a 2-object array. Verify parameters for each CBSD within the Grant Response message are as follows, for CBSDi, i={1,2}:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● grantId = Gi = a valid grant ID ● grantExpireTime = UTC time greater than duration of the test 	--	--

	<ul style="list-style-type: none"> ● responseCode = 0 		
7	<p>Ensure DP sends first Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Heartbeat Request message is formatted correctly for each CBSD, including, for CBSD_i i={1,2}:</p> <ul style="list-style-type: none"> ● cbsdId = Ci, i={1,2} ● grantId = Gi, i={1,2} ● operationState = "GRANTED" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
8	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Verify parameters for each CBSD within the Heartbeat Response message are as follows, for CBSD_i:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● grantId = Gi ● transmitExpireTime = current UTC time + 200 seconds ● responseCode = 0 	--	--
9	<p>For further Heartbeat Request messages sent from DP after completion of step 8, validate message is sent within latest specified heartbeatInterval for CBSD_i:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● grantId = Gi ● operationState = "AUTHORIZED" <p>and SAS Test Harness responds with a Heartbeat Response message including the following parameters, for CBSD_i</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● grantId = Gi ● transmitExpireTime = current UTC time + 200 seconds ● responseCode = 0 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
10	<p>Monitor the RF output of the UUT from start of test until UUT transmission commences. Monitor the RF output of the UUT from start of test until RF transmission commences. Verify:</p> <ul style="list-style-type: none"> ● UUT does not transmit at any time prior to completion of the first heartbeat response ● UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range Fi. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail



7.3.2 WINNF.FT.C.HBT.3

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid cbsId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● transmitExpireTime = T = Current UTC time ● responseCode = 105 (DREGISTER) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> ● UUT shall stop transmission within (T + 60 seconds) of completion of step 3 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.3.3 WINNF.FT.C.HBT.5

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid cbsId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request) 	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is formatted correctly, including:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "GRANTED" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● transmitExpireTime = T = current UTC time ● responseCode = 501 (SUSPENDED_GRANT) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "GRANTED" <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> ● UUT does not transmit at any time 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.3.4 WINNF.FT.C.HBT.6

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid cbsId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● transmitExpireTime = T = current UTC time ● responseCode = 501 (SUSPENDED_GRANT) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "GRANTED" <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> ● UUT shall stop transmission within (T+60) seconds of completion of step 3 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.3.5 WINNF.FT.C.HBT.7

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid cbsId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● transmitExpireTime = T = current UTC time ● responseCode = 502 (UNSYNC_OP_PARAM) 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the SAS-CBSD interface. Verify:</p> <ul style="list-style-type: none"> ● UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: <ul style="list-style-type: none"> ○ cbsId = C ○ grantId = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> ● UUT shall stop transmission within (T+60) seconds of completion of step 3 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.3.6 WINNF.FT.D.HBT.8

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● DP has two CBSD registered successfully with SAS Test Harness ● Each CBSD {1,2} has a valid single grant as follows <ul style="list-style-type: none"> ○ valid cbsdId = Ci, i={1,2} ○ valid grantId = Gi, i={1,2} ○ grant is for frequency range Fi, power Pi ○ grantExpireTime = UTC time greater than duration of the test ● Both CBSD are in AUTHORIZED state and transmitting within their granted bandwidth on RF interface 	--	--
2	<p>DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of size 2. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly for each CBSD, including, for CBSDi i={1,2}:</p> <ul style="list-style-type: none"> ● cbsdId = Ci, i = {1,2} ● grantId = Gi, i = {1,2} ● operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>If separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Heartbeat Response message should be as follows, for CBSDi:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● grantId = Gi ● For CBSD1: <ul style="list-style-type: none"> ○ transmitExpireTime = current UTC time + 200 seconds ○ responseCode = 0 ● For CBSD2: <ul style="list-style-type: none"> ○ transmitExpireTime = T = current UTC time ○ responseCode = 500 (TERMINATED_GRANT) 	--	--
4	<p>After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.</p> <p>If CBSD sends further Heartbeat Request messages for CBSD1, SAS Test Harness shall respond with a Heartbeat Response message with parameters:</p> <ul style="list-style-type: none"> ● cbsdId = C1 ● grantId = G1 ● transmitExpireTime = current UTC time + 200 seconds ● responseCode = 0 ● Heartbeat Request message is within heartbeatInterval of previous Heartbeat Request message 	--	--

5	Monitor the RF output of CBSD2. Verify: ● CBSD2 shall stop transmission within bandwidth F2 within (T + 60 seconds) of completion of step 3	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
---	--	--	-------------------------------

7.3.7 WINNF.FT.C.HBT.9

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid cbsId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in GRANTED, but not AUTHORIZED state(i.e. has not performed its first Heartbeat Request) 	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "GRANTED" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>After completion of step 2, SAS Test Harness does not respond to any further</p> <ul style="list-style-type: none"> ● messages from UUT to simulate loss of network connection 	--	--
4	<p>Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify:</p> <ul style="list-style-type: none"> ● At any time during the test, UUT shall not transmit on RF interface 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.3.8 WINNF.FT.C.HBT.10

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid cbsId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface 	--	--
2	<p>UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● transmitExpireTime = T = current UTC time + 200 seconds ● responseCode = 0 	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none"> ● UUT shall stop all transmission on RF interface within (transmitExpireTime + 60 seconds), using the transmitExpireTime sent in Step 3. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.3.9 WINNF.FT.C.HBT.11

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: <ul style="list-style-type: none"> ○ valid cbsId = C ○ valid grantId = G ○ grant is for frequency range F, power P ● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface. ● Grant has the following parameters at the start of the test: <ul style="list-style-type: none"> ○ grantExpireTime = UTC time equal to time at start of test + 300 seconds = Tgrant_expire ○ transmitExpireTime = UTC time equal to time at start of test + 200 seconds ○ heartbeatInterval = 60 seconds 	--	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>If Heartbeat Request message contains grantRenew = TRUE, go to Step 6, else go to Step 3.</p>	--	--
3	<p>Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "AUTHORIZED" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● transmitExpireTime = current UTC + 200 seconds ● grantExpireTime = same as Step 1 ● responseCode = 0 	--	--
5	Go to Step 2	--	--
6	<p>Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "AUTHORIZED" ● grantRenew = TRUE 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
7	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● grantExpireTime = UTC time set far in the future ● transmitExpireTime = current UTC time + 200 seconds ● responseCode = 0 	--	--
8	<p>Continue to respond to any subsequentHeartbeat Request from CBSD with Heartbeat Response with the following parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● transmitExpireTime = same as Step 7 ● responseCode = 0 	--	--
9	Monitor RF transmission of UUT from start of test until Tgrant_expire + 60 seconds and ensure UUT continues to transmit throughout the time period.	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.4 CBSD Measurement Report

7.4.1 WINNF.FT.D.MES.2

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness 	--	--
2	<p>DP sends a Registration Request message for each of two CBSD. This may occur in a separate Request message per CBSD, or together in a single Request message with array of 2.</p> <p>Verify Registration Request message contains all required parameters properly formatted for CBSDi, $i=\{1,2\}$, and specifically:</p> <ul style="list-style-type: none"> ● userId is present and correct ● fcId is present and correct ● cbsdSerialNumber is present and correct ● measCapability = "RECEIVED_POWER_WITHOUT_GRANT" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>If a separate Registration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Registration Request message with a separate Registration Response message.</p> <p>If a single Registration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Registration Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Registration Response message should be as follows, for CBSDi:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● measReportConfig= "RECEIVED_POWER_WITHOUT_GRANT" ● responseCode = 0 	--	--
4	<p>UUT sends a message:</p> <ul style="list-style-type: none"> ● If message is type Spectrum Inquiry Request, go to step 5, or ● If message is type Grant Request, go to step 7 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
5	<p>UUT sends message type Spectrum Inquiry Request. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Spectrum Inquiry Request message contains all required parameters properly formatted for CBSDi, $i=\{1,2\}$, and specifically:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● measReport is present, and is a properly formatted rcvdPowerMeasReport. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
6	<p>If a separate Spectrum Inquiry Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Spectrum Inquiry Request message with a separate Spectrum Inquiry Response message.</p> <p>If a single Spectrum Inquiry Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Spectrum Inquiry Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Spectrum Inquiry Response message should be as follows:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● availableChannel is an array of availableChannel objects ● responseCode = 0 	--	--

7	<p>UUT sends message type Grant Request message. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify the Grant Request message contains all required parameters properly formatted for CBSD<i>i</i>, <i>i</i>= {1,2}, and specifically:</p> <ul style="list-style-type: none">● cbsdId = Ci● measReport is present, and is a properly formatted rcvdPowerMeasReport.	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
---	--	--	-------------------------------

7.4.2 WINNF.FT.C.MES.3

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT has successfully registered with SAS Test Harness, with cbsId=C and measCapability = "RECEIVED_POWER_WITH_GRANT" 	--	--
2	<p>UUT sends a Grant Request message. Verify Grant Request message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> ● cbsId = C ● operationParam is present and format is valid 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>SAS Test Harness sends a Grant Response message, with the following parameters:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G = valid grant ID ● grantExpireTime = UTC time in the future ● heartbeatInterval = 60 seconds ● measReportConfig= "RECEIVED_POWER_WITH_GRANT" ● operationParam is set to valid operating parameters ● channelType = "GAA" ● responseCode = 0 	--	--
4	<p>UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● operationState = "GRANTED" 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
5	<p>If Heartbeat Request message (step 4) contains measReport object, then:</p> <ul style="list-style-type: none"> ● verify measReport is properly formatted as object ● rcvdPowerMeasReport ● end test, with PASS result <p>else, if Heartbeat Request message (step 4) does not contain measReport object, then:</p> <ul style="list-style-type: none"> ● If number of Heartbeat Requests sent by UUT after Step 3 is =5, then stop test with result of FAIL 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
6	<p>SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> ● cbsId = C ● grantId = G ● transmitExpireTime = current UTC time + 200 seconds ● responseCode = 0 <p>Go to Step 4, above</p>	--	--

7.4.3 WINNF.FT.D.MES.5

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} and measCapability = “RECEIVED_POWER_WITH_GRANT” ● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. ● Grants have heartbeatInterval =60 seconds 	--	--
2	<p>Verify DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Heartbeat Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● grantId = Gi ● operationState = “AUTHORIZED” 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Heartbeat Response message containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● grantId = Gi ● measReportConfig= “RECEIVED_POWER_WITH_GRANT” ● responseCode = 0 	--	--
4	<p>Verify DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Heartbeat Request message contains all required parameters properly formatted for each CBSD, and specifically, for CBSDi, i = {1,2}:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● grantId = Gi ● operationState = “AUTHORIZED” ● Check whether measReport is present, and if present, ensure it is a properly formatted rcvdPowerMeasReport object, and record its reception for each CBSDi, i = {1,2}. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
5	<p>If Heartbeat Request message (step 4) contains measReport object, then:</p> <ul style="list-style-type: none"> ● Verify measReport is properly formatted as object rcvdPowerMeasReport ● record which CBSD have successfully sent a measReport object <p>If all CBSDi, i = {1,2} have successfully sent a measReport object, then</p>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

	<ul style="list-style-type: none">● end test, with PASS result <p>else, if the number of Heartbeat Requests sent per CBSD is 5 or more, then stop test with result of FAIL</p>		
6	<p>If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message.</p> <p>If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Heartbeat Response message containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none">● cbsdId = Ci● grantId = Gi● responseCode = 0 <p>Go to Step 4, above.</p>	--	--

7.5 CBSD Relinquishment Process

7.5.1 WINNF.FT.D.RLQ.2

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Gi, i={1,2} ● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--	--
2	<p>Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● grantId = Gi 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Relinquishment Response shall be as follows:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● grantId = Gi ● responseCode = 0 	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall stop RF transmission at any time between triggering the relinquishments and UUT sending the relinquishment requests for each CBSD. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.5.2 WINNF.FT.D.RLQ.4

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsId=C_i, i={1,2} ● DP has received a valid grant with grantId = G_i, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--	--
2	<p>DP with two CBSDs sends Relinquishment Request with two objects to the SAS Test Harness.</p> <p>This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSD_i:</p> <ul style="list-style-type: none"> ● cbsId = C_i ● grantId = G_i 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Relinquishment Response shall be as follows:</p> <ul style="list-style-type: none"> ● cbsId = C_i ● grantId = G_i ● responseCode = R_i 	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <p>A. UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</p>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.5.3 WINNF.FT.D.RLQ.6

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsId=C_i, i={1,2} ● DP has received a valid grant with grantId = G_i, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--	--
2	<p>DP with two CBSDs sends Relinquishment Request with two objects to the SAS Test Harness.</p> <p>This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSD_i:</p> <ul style="list-style-type: none"> ● cbsId = C_i ● grantId = G_i 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<p>If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Relinquishment Response shall be as follows:</p> <ul style="list-style-type: none"> ● cbsId = C_i ● grantId = G_i ● responseCode = 103 	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <p>A. UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request</p>	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.6 CBSD Deregistration Process

7.6.1 WINNF.FT.D.DRG.2

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=C_i, i={1,2} ● DP has received a valid grant with grantId = G_i, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--	--
2	UUT may send a Relinquishment request and receives Relinquishment response with responseCode=0 for each CBSD	--	--
3	<p>Verify DP sends a Deregistration Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Deregistration Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSD_i:</p> <ul style="list-style-type: none"> ● cbsdId = C_i 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	<p>If a separate Deregistration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Deregistration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Deregistration Response shall be as follows:</p> <ul style="list-style-type: none"> ● No cbsdId in either response ● responseCode = R_i 	--	--
5	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
6	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: <ul style="list-style-type: none"> A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.6.2 WINNF.FT.D.DRG.4

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● Each UUT has successfully registered with SAS Test Harness ● Each UUT is in the authorized state ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} ● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	<p>Verify DP sends a Deregistration Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2.</p> <p>Verify Deregistration Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi:</p> <ul style="list-style-type: none"> ● cbsdId = Ci 	 Pass	 Fail
4	<p>If a separate Deregistration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message.</p> <p>If a single Deregistration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array.</p> <p>Parameters for each CBSD within the Deregistration Response shall be as follows:</p> <ul style="list-style-type: none"> ● cbsdId = Ci ● responseCode = 0 	--	--
5	After completion of step 4, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
6	<p>Monitor the RF output of each UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: <p>A. UUT sending a Registration Request message, as this is not mandatory</p> <p>B. UUT sending a Deregistration Request message</p>	 Pass	 Fail

7.6.3 WINNF.FT.C.DRG.5

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT has successfully registered with SAS Test Harness, with cbsdId=C ● UUT has received a valid grant with grantId = G ● UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	<ul style="list-style-type: none"> ● UUT sends Deregistration Request to SAS Test Harness with cbsdId = C. 	--	--
4	The SAS Test Harness sends the Deregistration Response Message to UUT with: <ul style="list-style-type: none"> ● cbsdId=C ● responseCode = 103 	--	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: <ul style="list-style-type: none"> A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message 	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

7.7 CBSD Security Validation

7.7.1 WINNF.FT.C.SCS.1

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> ● UUT shall start CBSD-SAS communication with the security procedure ● The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate. ● Configure the SAS Test Harness to accept the security procedure and establish the connection 	■ Pass	□ Fail
2	<ul style="list-style-type: none"> ● Make sure that Mutual authentication happens between UUT and the SAS Test Harness. ● Make sure that UUT uses TLS v1.2 ● Make sure that cipher suites from one of the following is selected, <ul style="list-style-type: none"> ● TLS_RSA_WITH_AES_128_GCM_SHA256 ● TLS_RSA_WITH_AES_256_GCM_SHA384 ● TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 ● TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 ● TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 	■ Pass	□ Fail
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none"> ● UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with responseCode = 0 and cbssid. 	■ Pass	□ Fail
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall not transmit RF 	■ Pass	□ Fail

7.7.2 WINNF.FT.C.SCS.2

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> ● UUT shall start CBSD-SAS communication with the security procedures 	■ Pass	□ Fail
2	<ul style="list-style-type: none"> ● Make sure that UUT uses TLS v1.2 for security establishment. ● Make sure UUT selects the correct cipher suite. ● UUT shall use CRL or OCSP to verify the validity of the server certificate. ● Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness. 	■ Pass	□ Fail
3	<ul style="list-style-type: none"> ● UUT may retry for the security procedure which shall fail. 	■ Pass	□ Fail
4	<ul style="list-style-type: none"> ● SAS Test-Harness shall not receive any Registration request or any application data. 	--	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none"> ● UUT shall not transmit RF 	■ Pass	□ Fail

7.7.3 WINNF.FT.C.SCS.3

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> ● UUT shall start CBSD-SAS communication with the security procedures 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
2	<ul style="list-style-type: none"> ● Make sure that UUT uses TLS v1.2 for security establishment. ● Make sure UUT selects the correct cipher suite. ● UUT shall use CRL or OCSP to verify the validity of the server certificate. ● Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<ul style="list-style-type: none"> ● UUT may retry for the security procedure which shall fail. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	<ul style="list-style-type: none"> ● SAS Test-Harness shall not receive any Registration request or any application data. 	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> ● UUT shall not transmit RF 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.7.4 WINNF.FT.C.SCS.4

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none"> ● UUT shall start CBSD-SAS communication with the security procedures 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
2	<ul style="list-style-type: none"> ● Make sure that UUT uses TLS v1.2 for security establishment. ● Make sure UUT selects the correct cipher suite. ● UUT shall use CRL or OCSP to verify the validity of the server certificate ● Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<ul style="list-style-type: none"> ● UUT may retry for the security procedure which shall fail. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	<ul style="list-style-type: none"> ● SAS Test-Harness shall not receive any Registration request or any application data. 	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none"> ● UUT shall not transmit RF 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.7.5 WINNF.FT.C.SCS.5

#	Test Execution Steps	Results	
1	<ul style="list-style-type: none">● UUT shall start CBSD-SAS communication with the security procedures	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
2	<ul style="list-style-type: none">● Make sure that UUT uses TLS v1.2 for security establishment.● Make sure UUT selects the correct cipher suite.● UUT shall use CRL or OCSP to verify the validity of the server certificate● Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
3	<ul style="list-style-type: none">● UUT may retry for the security procedure which shall fail.	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
4	<ul style="list-style-type: none">● SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">● UUT shall not transmit RF	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

7.8 CBSD RF Power Measurement

7.8.1 WINNF.PT.C.HBT.1

#	Test Execution Steps	Results	
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none"> ● UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness ● UUT has registered with the SAS, with CBSD ID = C ● UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case ● Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters 	--	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none"> ● UUT sends Heartbeat Request, including: <ul style="list-style-type: none"> ○ cbsdId = C ○ grantId = G ● SAS Test Harness responds with Heartbeat Response, including: <ul style="list-style-type: none"> ○ cbsdId = C ○ grantId = G ○ transmitExpireTime = current UTC time + 200 seconds ● responseCode = 0 	--	--
3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfill the requirements of the power measurement method.</p> <ul style="list-style-type: none"> ● Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology. 	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail


RF measurement plot for Test Case:

- Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfill the requirements of the power measurement method.


Frequency (MHz)	Channel Bandwidth	Granted maxEIRP	Conducted PSD	MIMO Factor	Antenna Gain	Cable Loss	maxEIRP
	(MHz)	(dBm/MHz)	(dBm/MHz)	(dB)	(dBi)	(dB)	(dBm/MHz)
3555	10	18	-18.896	6.02	7	22.8	16.924
3555	10	15	-22.365	6.02	7	22.8	13.455
3555	10	10	-26.709	6.02	7	22.8	9.111

Note:


MaxEIRP= Conducted PSD+ Antenna Gain+ Cable loss+MIMO Factor

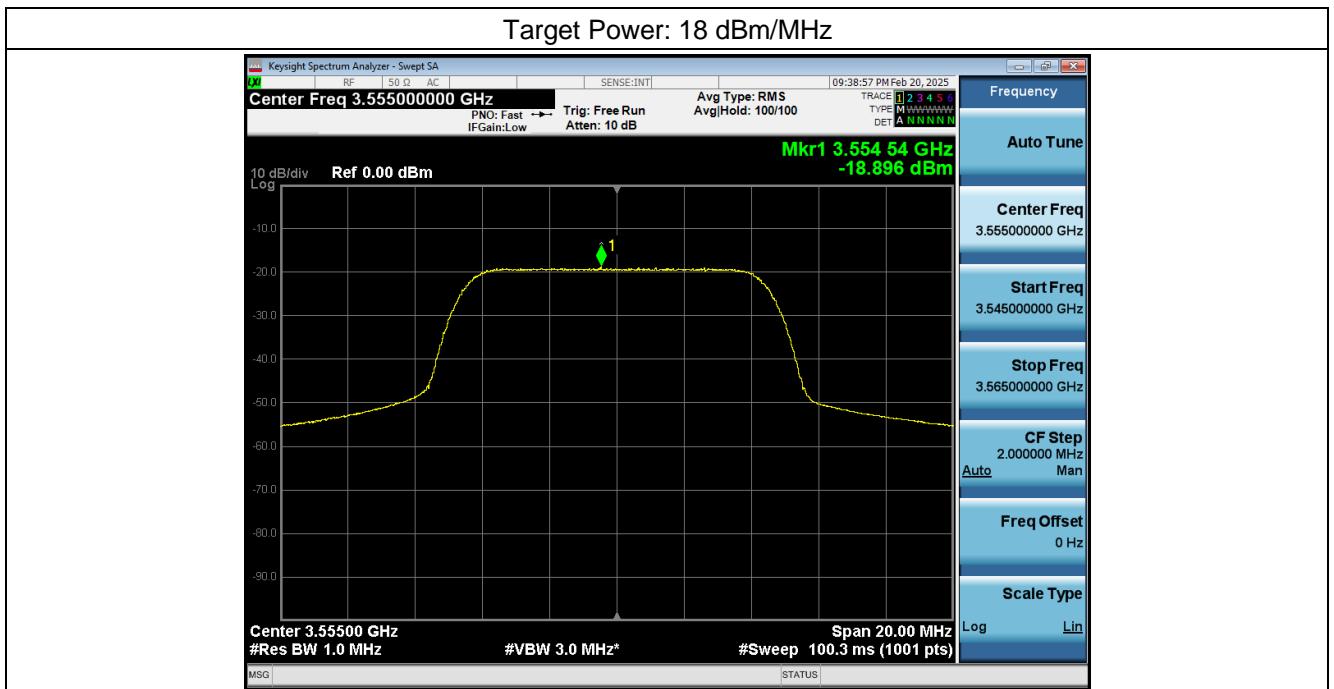

Target Power: 15 dBm/MHz

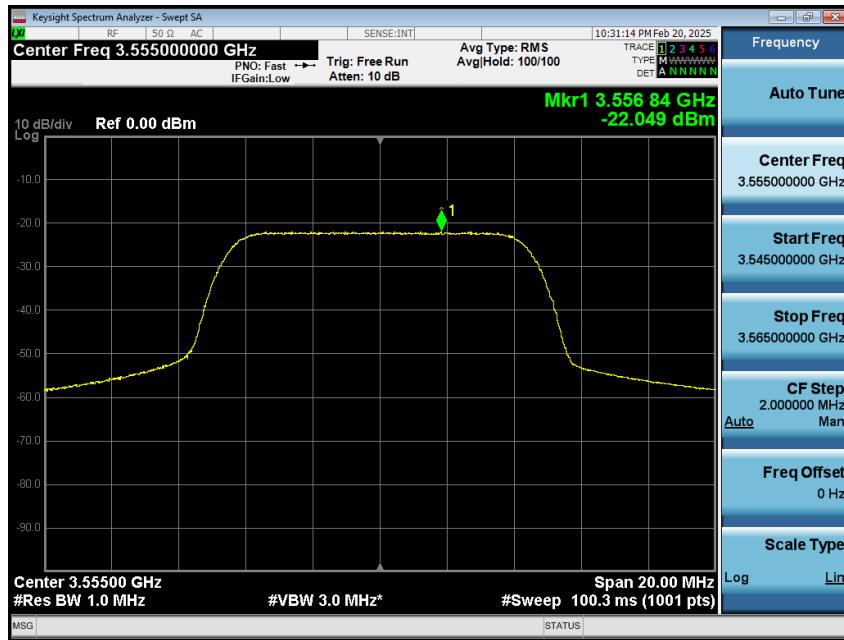


Target Power: 10 dBm/MHz

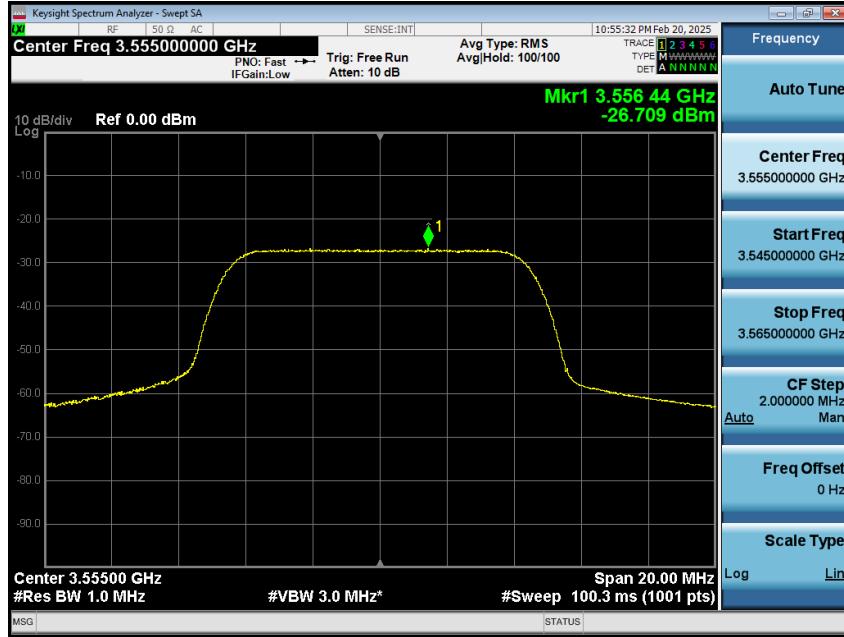

8 Test Data Log

Test data log refer to log files (Log files appendix) except for security test cases which shows below.

8.1 WINNF.FT.C.SCS.1

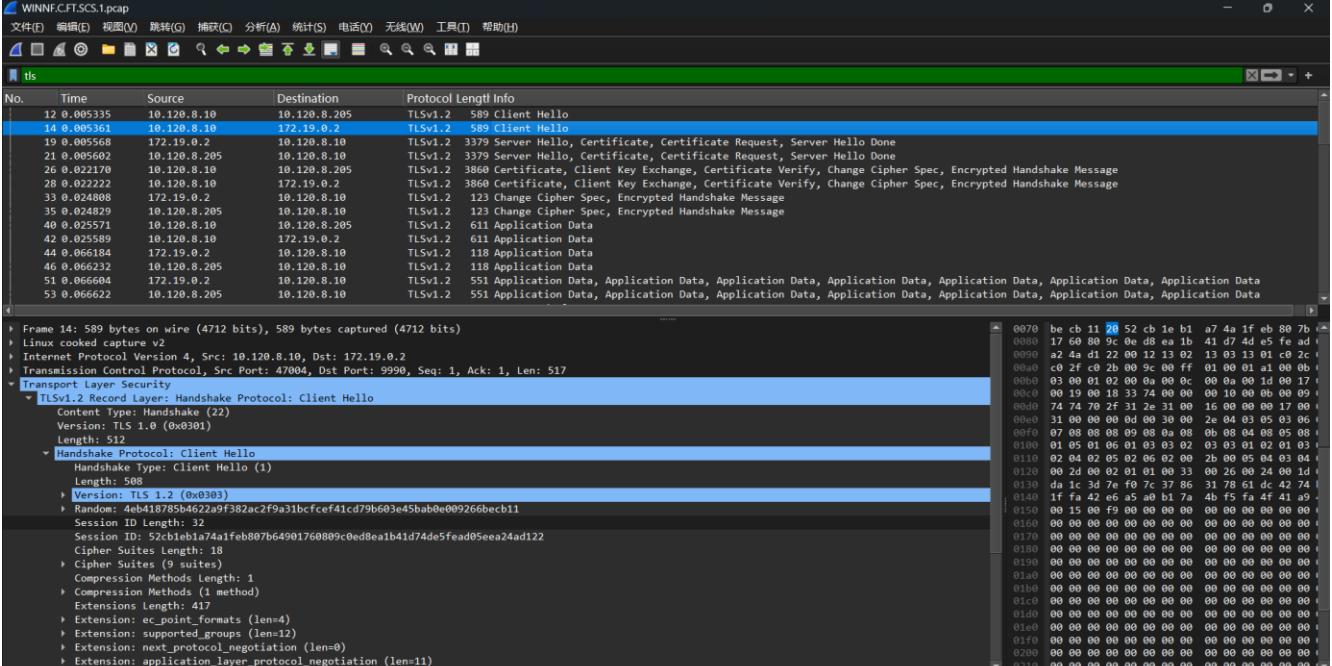

WINNF.CFTSCS.1.cap


File(E) 编辑(E) 视图(V) 跳转(G) 捕获(C) 分析(A) 统计(S) 电话(Y) 无线(W) 工具(T) 帮助(H)

tls


No.	Time	Source	Destination	Protocol Length Info
12	0.005335	10.120.8.10	10.120.8.295	TLsv1.2 589 Client Hello
14	0.005361	10.120.8.10	172.19.0.2	TLsv1.2 589 Client Hello
19	0.005568	172.19.0.2	10.120.8.10	TLsv1.2 3379 Server Hello, Certificate, Certificate Request, Server Hello Done
21	0.005602	10.120.8.295	10.120.8.10	TLsv1.2 3379 Server Hello, Certificate, Certificate Request, Server Hello Done
26	0.022170	10.120.8.10	10.120.8.295	TLsv1.2 3860 Certificate, Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message
28	0.022222	10.120.8.10	172.19.0.2	TLsv1.2 3860 Certificate, Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message
33	0.024888	172.19.0.2	10.120.8.10	TLsv1.2 123 Change Cipher Spec, Encrypted Handshake Message
35	0.024829	10.120.8.295	10.120.8.10	TLsv1.2 123 Change Cipher Spec, Encrypted Handshake Message
40	0.025571	10.120.8.10	10.120.8.295	TLsv1.2 611 Application Data
42	0.025589	10.120.8.10	172.19.0.2	TLsv1.2 611 Application Data
44	0.066184	172.19.0.2	10.120.8.10	TLsv1.2 118 Application Data
46	0.066232	10.120.8.295	10.120.8.10	TLsv1.2 118 Application Data
51	0.066604	172.19.0.2	10.120.8.10	TLsv1.2 551 Application Data, Application Data, Application Data, Application Data, Application Data, Application Data
53	0.066622	10.120.8.295	10.120.8.10	TLsv1.2 551 Application Data, Application Data, Application Data, Application Data, Application Data, Application Data

Frame 14: 589 bytes on wire (4712 bits), 589 bytes captured (4712 bits)
 Linux cooked capture v2
 Internet Protocol Version 4, Src: 10.120.8.10, Dst: 172.19.0.2
 Transmission Control Protocol, Src Port: 47004, Dst Port: 9990, Seq: 1, Ack: 1, Len: 517
 Transmission Control Protocol, Src Port: 47004, Dst Port: 9990, Seq: 1, Ack: 1, Len: 517
 TLSv1.2 Record Layer: Handshake Protocol: Client Hello
 Content Type: Handshake (22)
 Version: TLS 1.0 (0x0301)
 Length: 512
 Handshake Protocol: Client Hello
 Handshake Type: Client Hello (1)
 Length: 508
 Version: TLS 1.2 (0x0303)
 Random: 4eb418785b4622a9f382ac2f9a31bcfce41cd79b603e45bab0e009266becb11
 Session ID length: 32
 Session ID: 52c16b1a74a1feb0807b64901760809c0ed8ea1b41d74de5fead05ee024ad122
 Cipher Suites Length: 18
 Cipher Suites (9 suites)
 Compression Methods Length: 1
 Compression Methods (1 method)
 Extensions Length: 417
 Extension: ec_point_formats (len=4)
 Extension: supported_groups (len=12)
 Extension: next_protocol_negotiation (len=0)
 Extension: application_layer_protocol_negotiation (len=11)

8.2 WINNF.FT.C.SCS.2

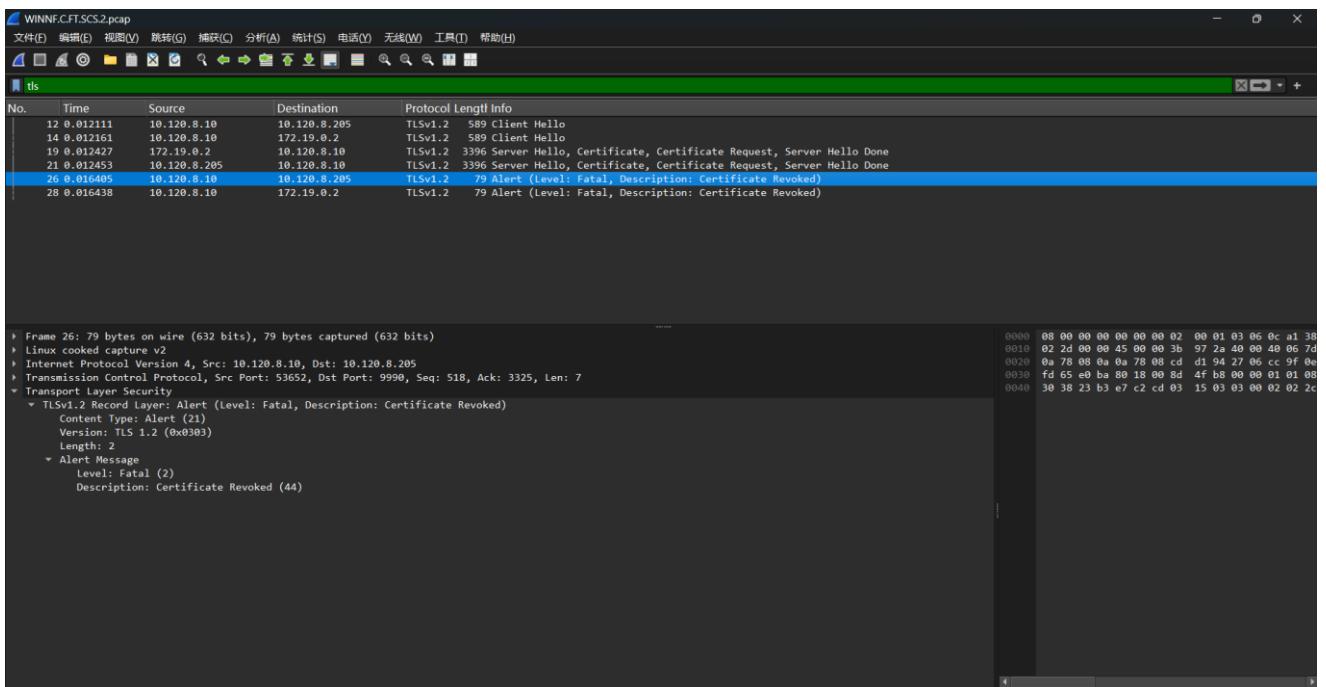

8.3 WINNF.FT.C.SCS.3

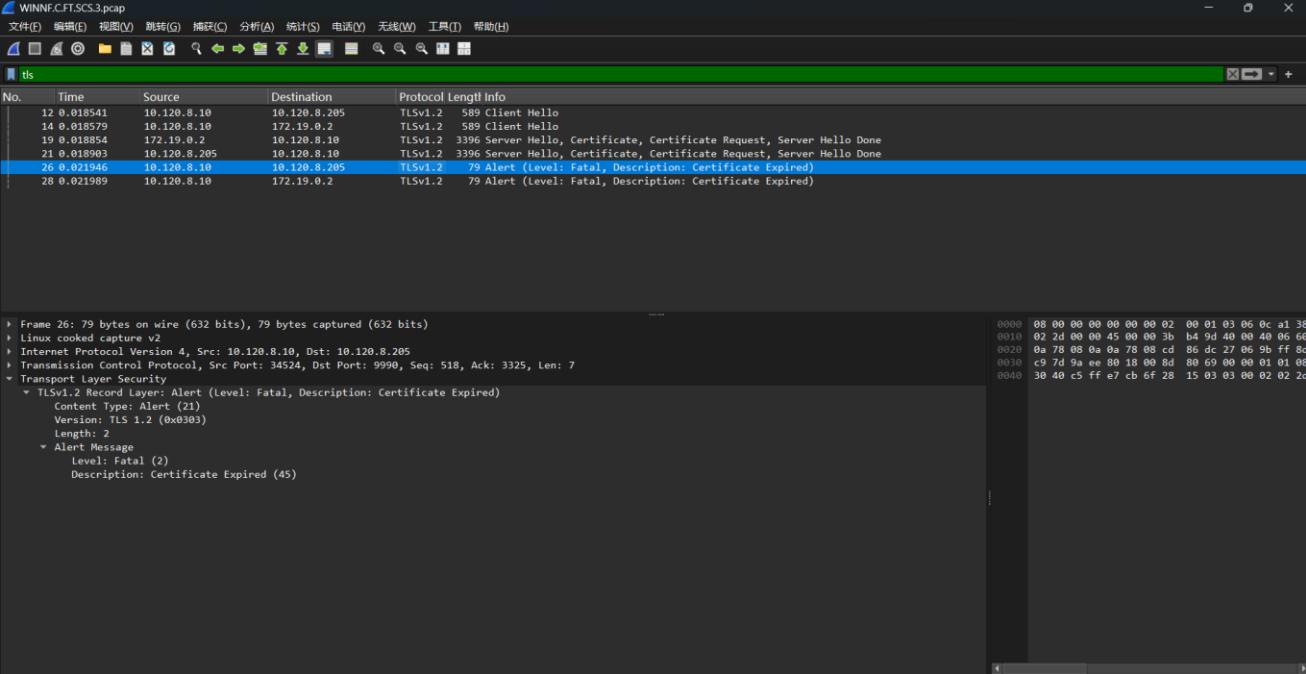

The screenshot shows a Wireshark capture of a TLS handshake between two hosts. The sequence of frames is as follows:

- Frame 12: Client Hello (TLSv1.2, 589 bytes)
- Frame 14: Client Hello (TLSv1.2, 589 bytes)
- Frame 19: Server Hello, Certificate, Certificate Request, Server Hello Done (TLSv1.2, 3396 bytes)
- Frame 21: Server Hello, Certificate, Certificate Request, Server Hello Done (TLSv1.2, 3396 bytes)
- Frame 26: Alert (Level: Fatal, Description: Certificate Expired) (TLSv1.2, 79 bytes)
- Frame 28: Alert (Level: Fatal, Description: Certificate Expired) (TLSv1.2, 79 bytes)

The alert message details:

- Content Type: Alert (21)
- Version: TLS 1.2 (0x0303)
- Length: 2
- Alert Message
 - Level: Fatal (2)
 - Description: Certificate Expired (45)

Hex dump of the alert message:

0000	08 00 00 00 00 00 00 02 00 01 03 06 0c a1 38
0010	02 2d 00 00 45 00 00 3b b4 9d 40 00 40 06 60
0020	0a 78 08 0a 78 08 cd 86 dc 27 06 9b ff 8d
0030	c9 7d 9a ee 80 18 00 8d 80 69 00 00 01 01 08
0040	38 40 c5 ff e7 cb 6f 28 15 03 03 00 02 02 2d

B.4 WINNF.FT.C.SCS.4

Wireshark screenshot showing a TLS handshake and an alert message. The timeline shows the following sequence of frames:

- Frame 12: Client Hello (TLSv1.2, 589 bytes)
- Frame 14: Client Hello (TLSv1.2, 589 bytes)
- Frame 19: Server Hello, Certificate, Certificate Request, Server Hello Done (TLSv1.2, 3368 bytes)
- Frame 21: Server Hello, Certificate, Certificate Request, Server Hello Done (TLSv1.2, 3368 bytes)
- Frame 26: Alert (TLSv1.2, 79 bytes, Level: Fatal, Description: Unknown CA)
- Frame 30: Alert (TLSv1.2, 79 bytes, Level: Fatal, Description: Unknown CA)


The details pane shows the structure of the alert message:

```
> Frame 26: 79 bytes on wire (632 bits), 79 bytes captured (632 bits)
> Linux cooked capture v2
> Internet Protocol Version 4, Src: 10.120.8.10, Dst: 10.120.8.205
> Transmission Control Protocol, Src Port: 41686, Dst Port: 9990, Seq: 518, Ack: 3297, Len: 7
< Transport Layer Security
  < TLSv1.2 Record Layer: Alert (Level: Fatal, Description: Unknown CA)
    Content Type: Alert (2)
    Version: TLS 1.2 (0x0303)
    Length: 2
    < Alert Message
      Level: Fatal (2)
      Description: Unknown CA (48)
```

The bytes pane shows the raw hex and ASCII data for the alert message:

Hex	Dec	ASCII
0000	08 00 00 00 00 00 00 00 02	00 01 03 06 0c a1 38
0010	02 2d 00 00 45 00 00 3b	c3 13 40 00 40 06 51
0020	0a 78 08 0a 0a 78 08 cd	a2 d6 27 06 8a 3f 40
0030	cb 9e db 2f 80 18 00 8d	e3 c6 00 00 01 01 08
0040	30 47 93 0e e7 d2 3c 18	15 03 02 02 02 02 38

8.5 WINNF.FT.C.SCS.5

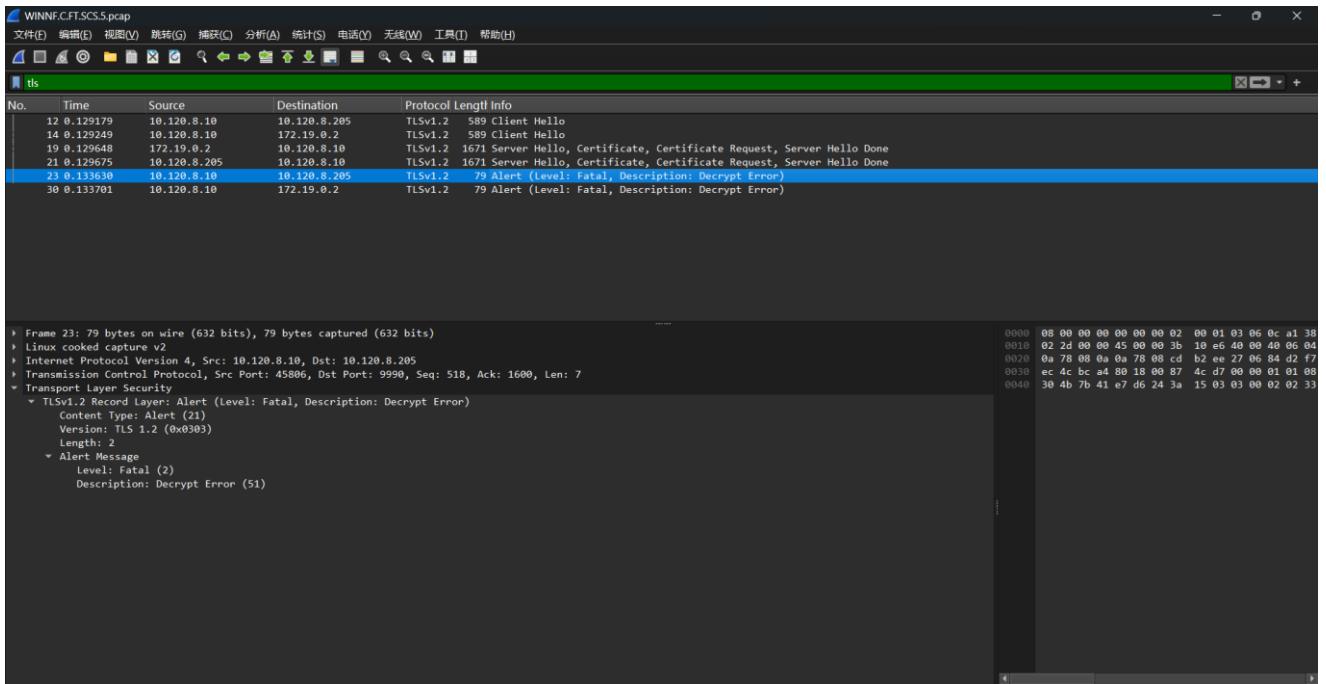



Report No.: KSCR240700144904

Page: 53 of 53

9 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2407001449AT

10 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2407001449AT