




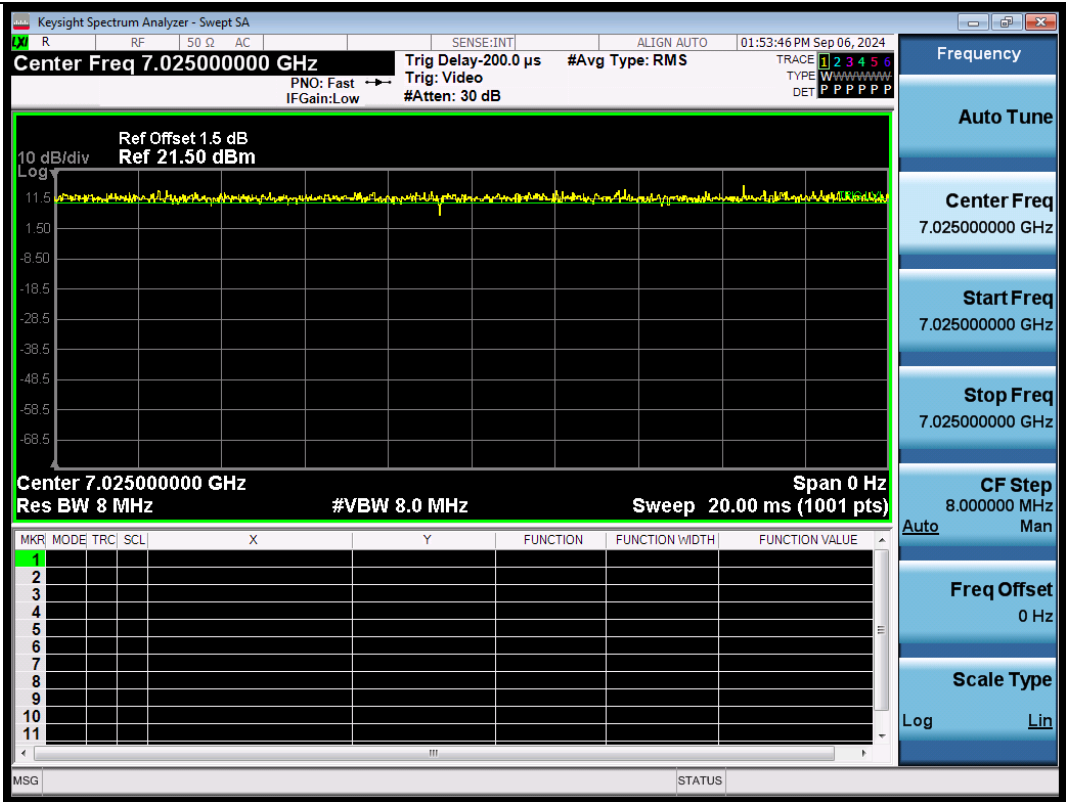


NTNV-11BE80SISO-Ant1-7025

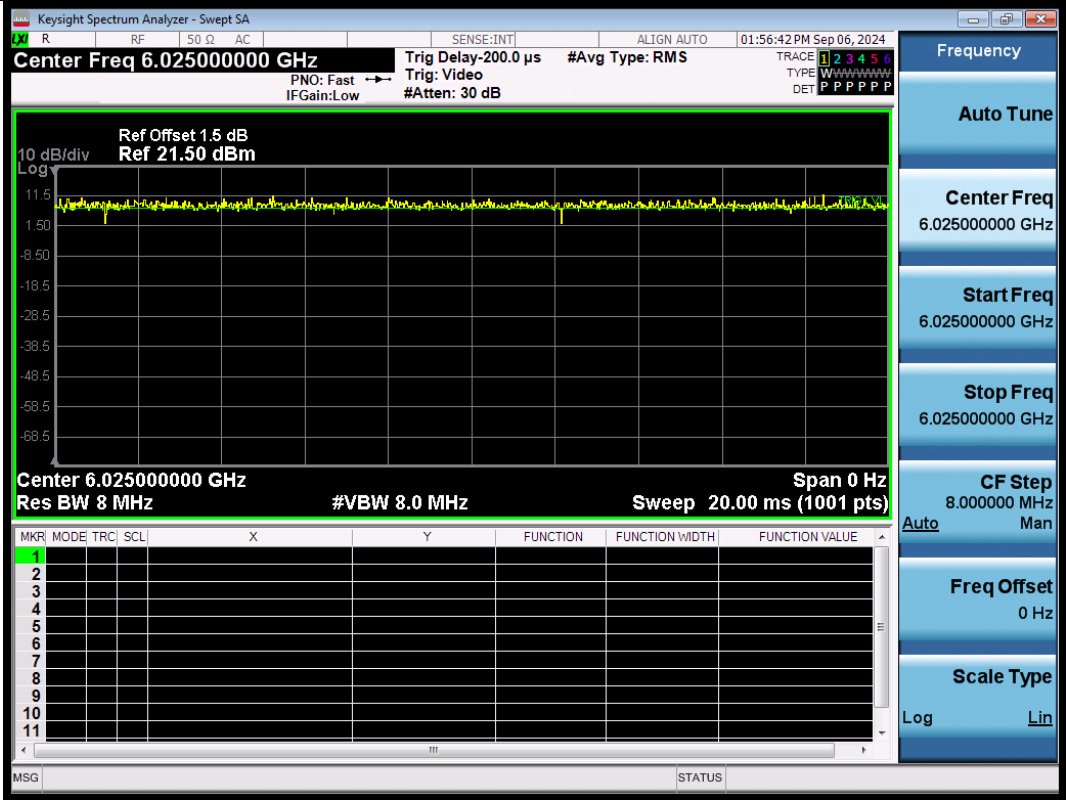


NTNV-11BE160SISO-Ant1-6025

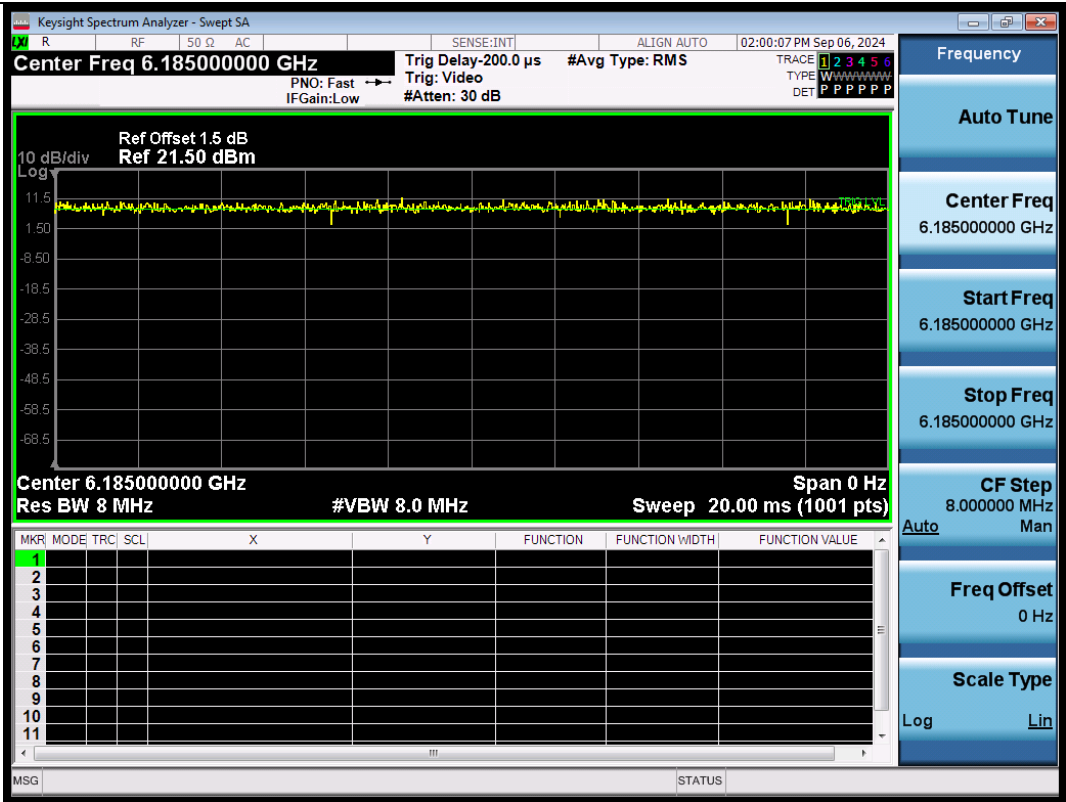


NTNV-11BE160SISO-Ant1-6185

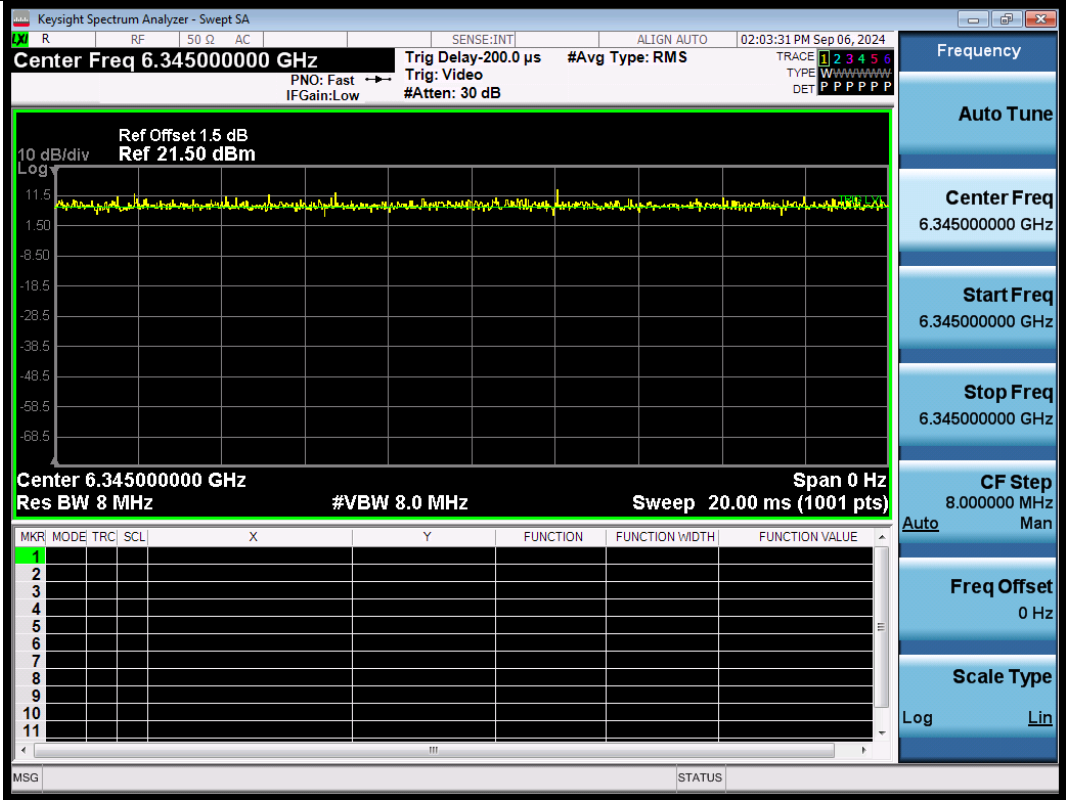


NTNV-11BE160SISO-Ant1-6345

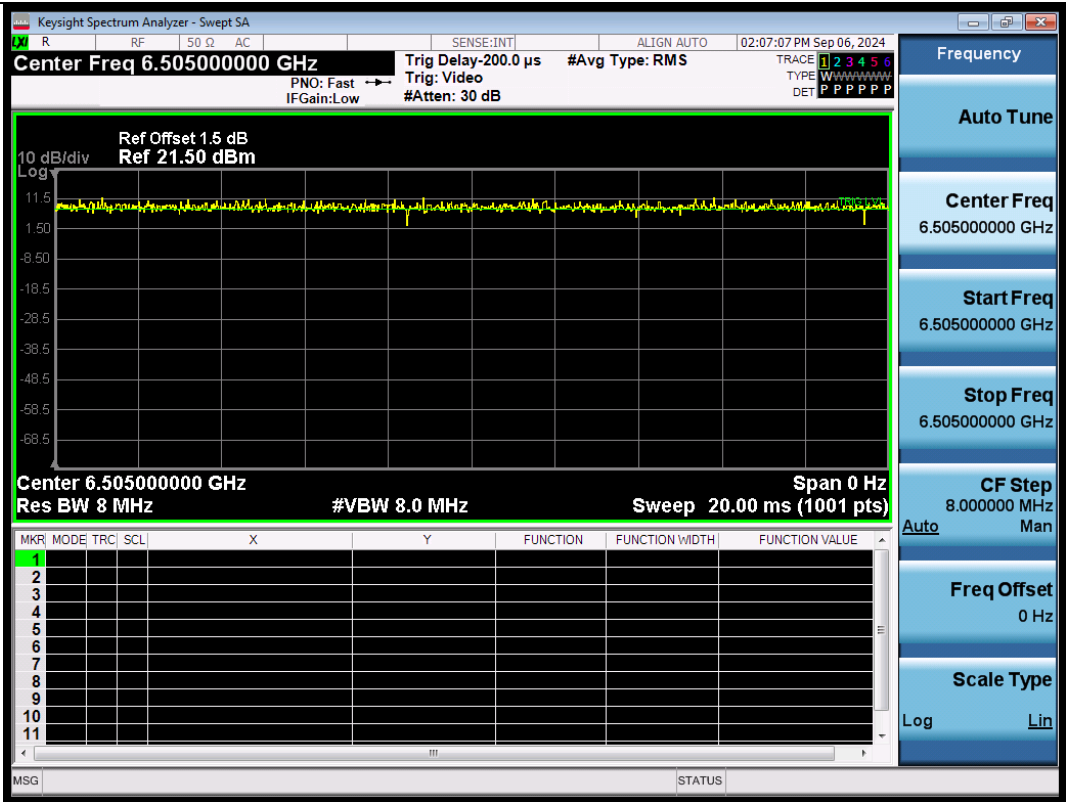


NTNV-11BE160SISO-Ant1-6505

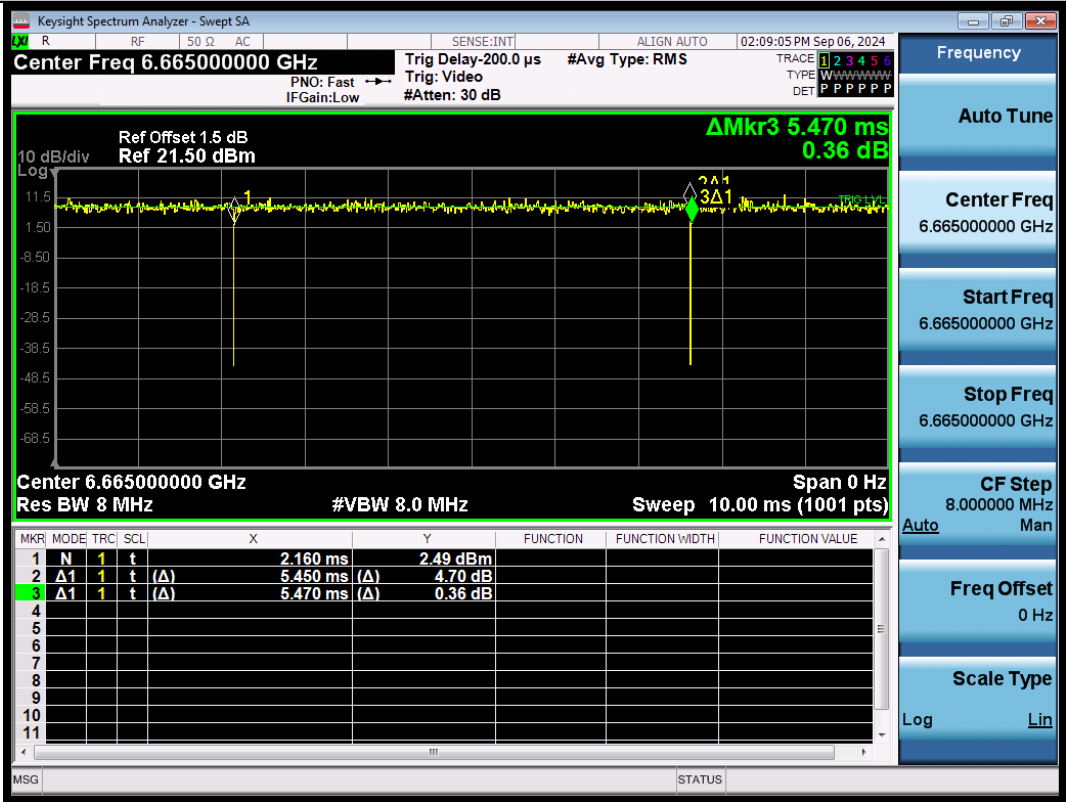


NTNV-11BE160SISO-Ant1-6665

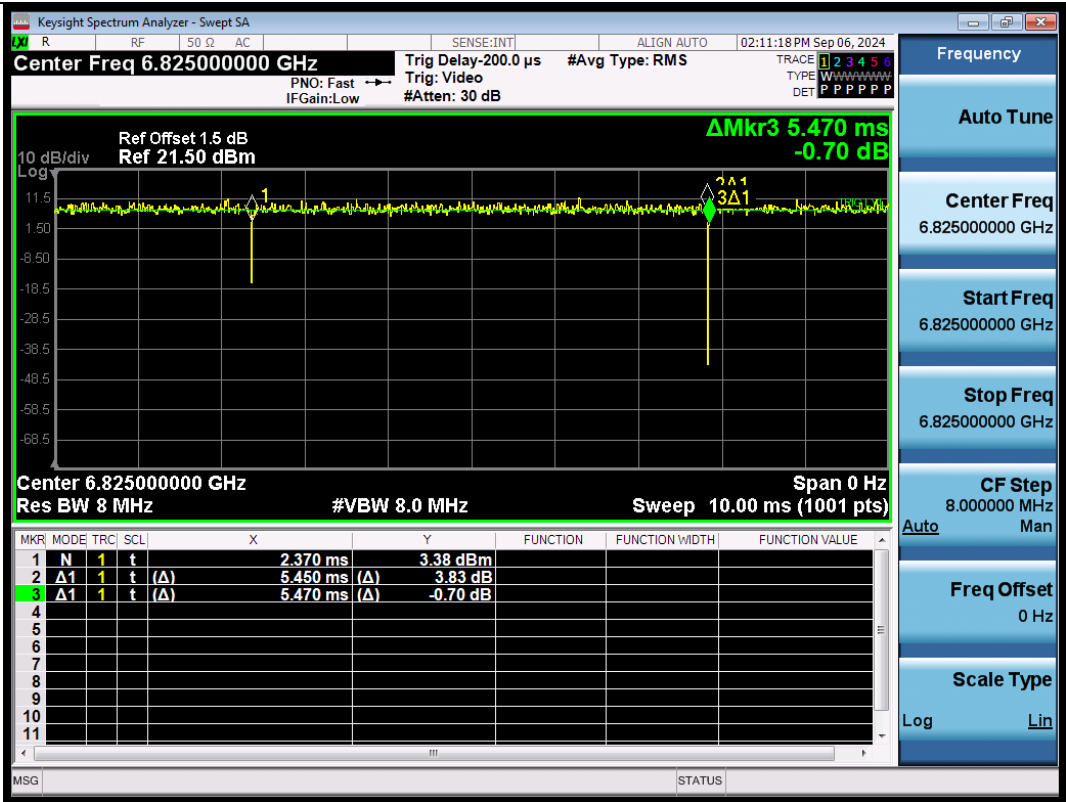


NTNV-11BE160SISO-Ant1-6825

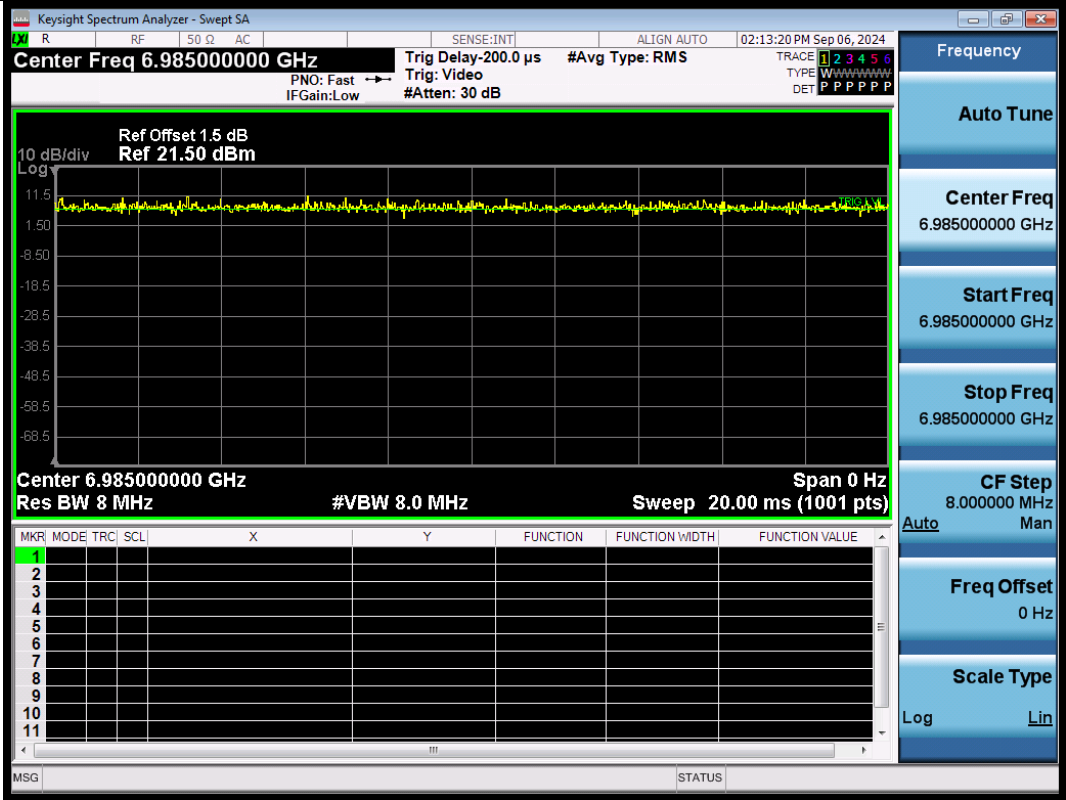


NTNV-11BE160SISO-Ant1-6985

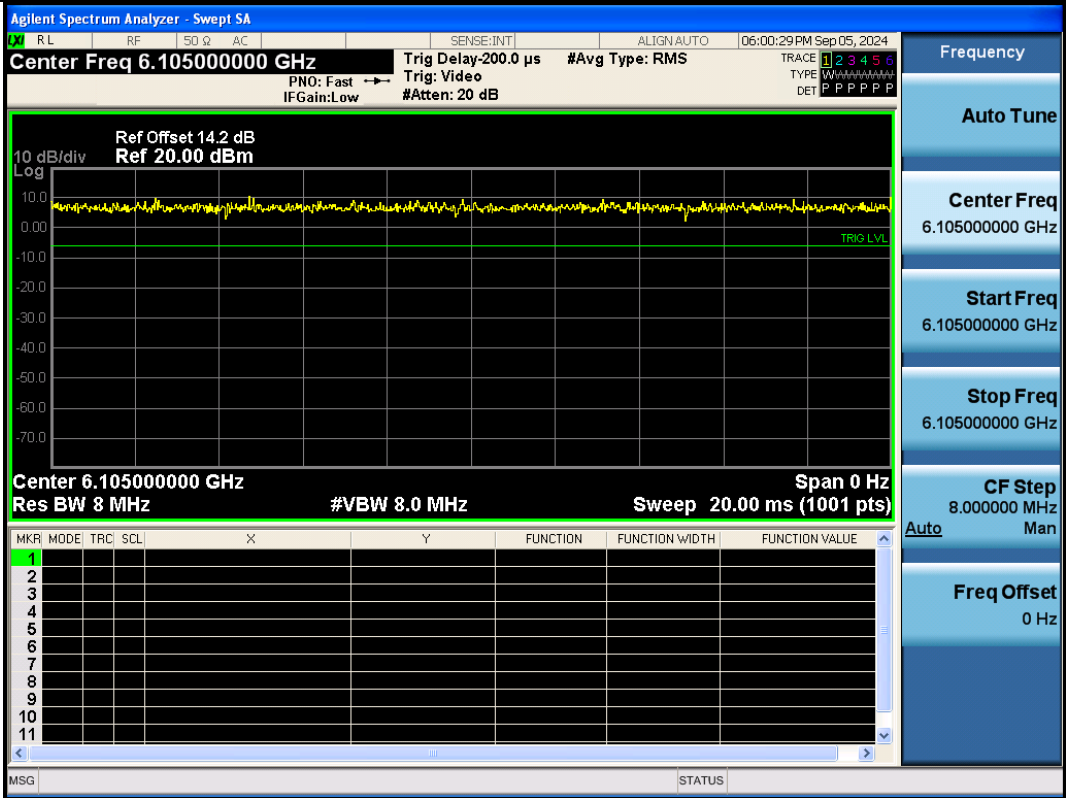


NTNV-11BE320SISO-Ant1-6105

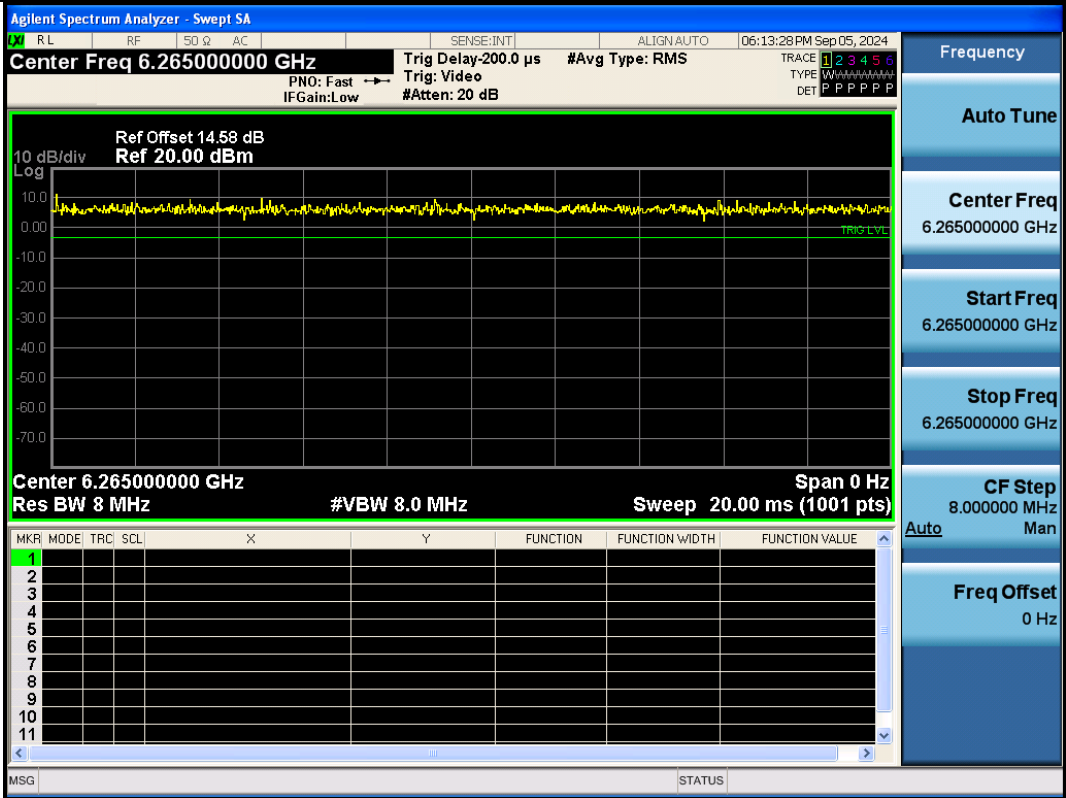


NTNV-11BE320SISO-Ant1-6265

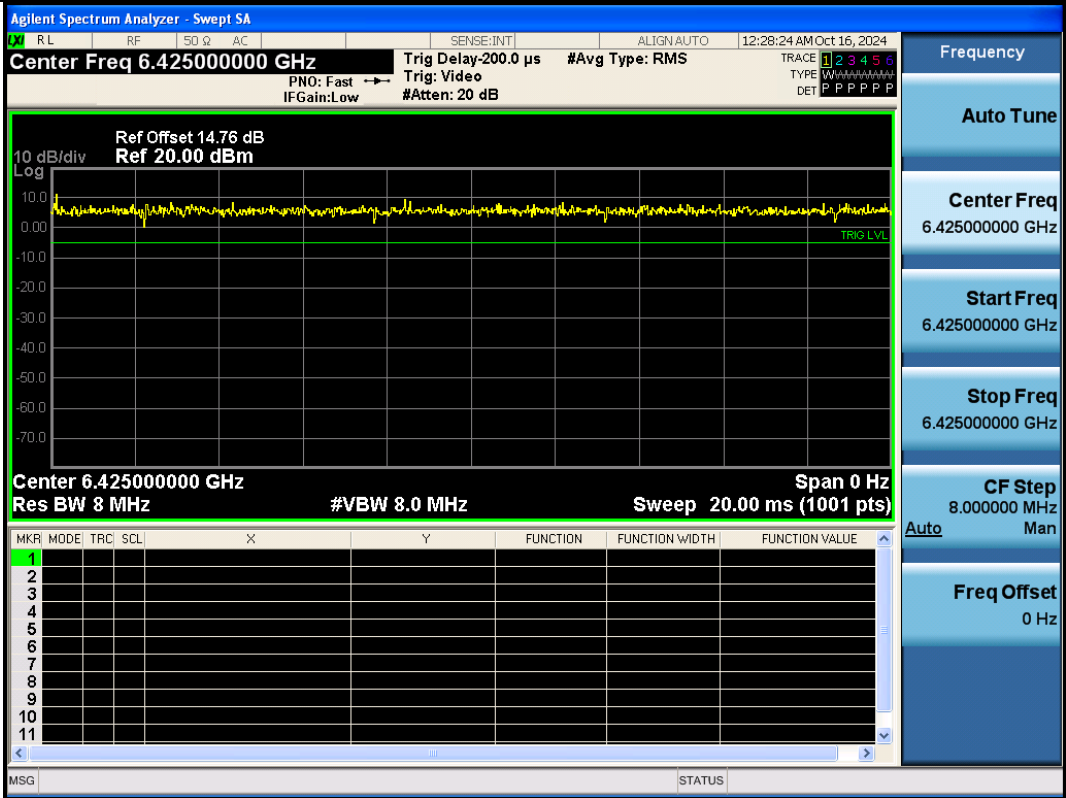


NTNV-11BE320SISO-Ant1-6425

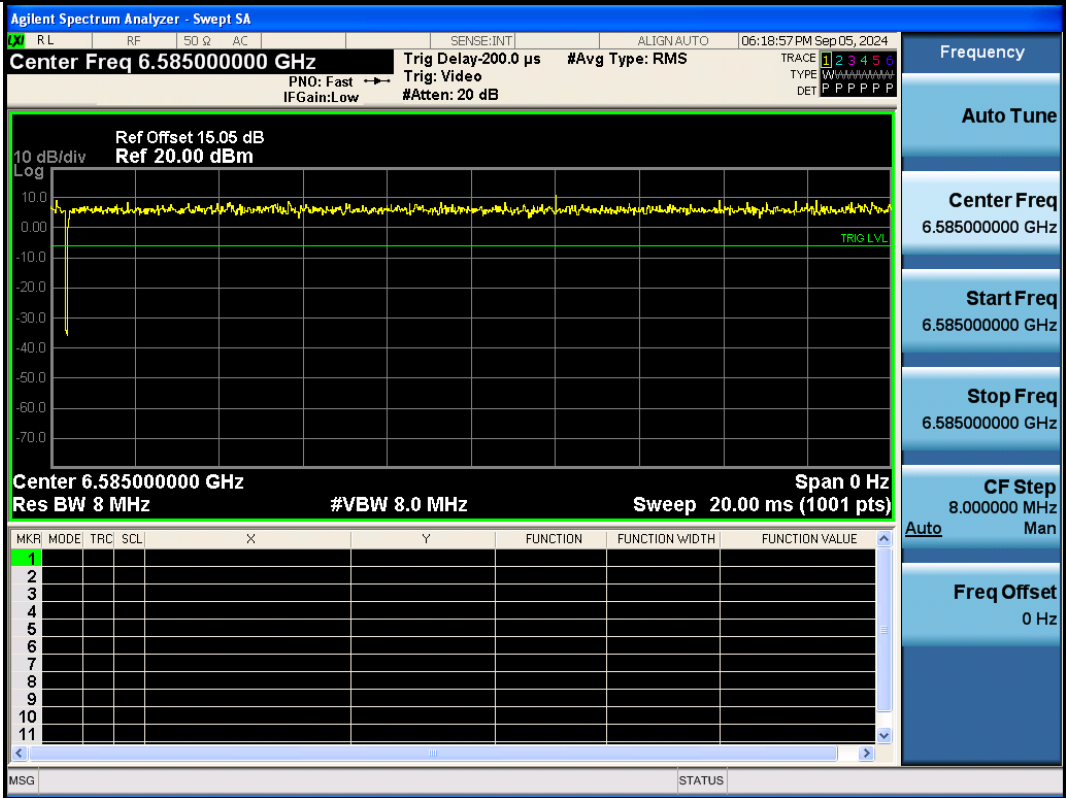

NTNV-11BE320SISO-Ant1-6585

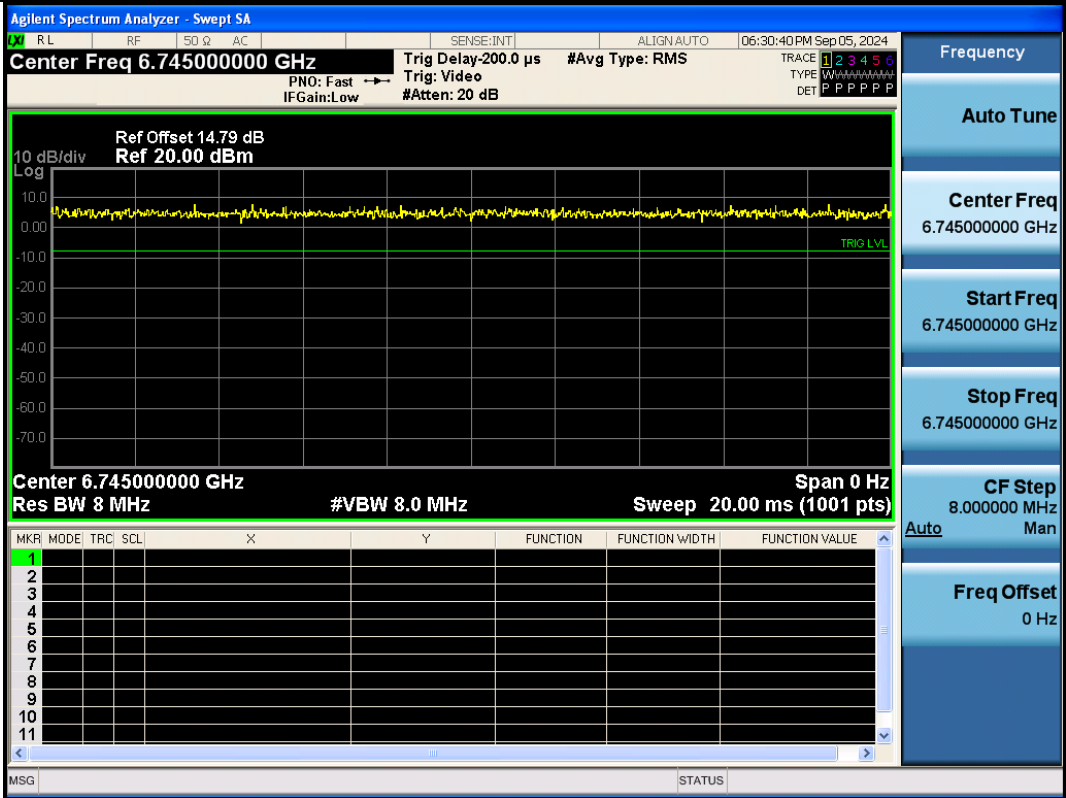

NTNV-11BE320SISO-Ant1-6745

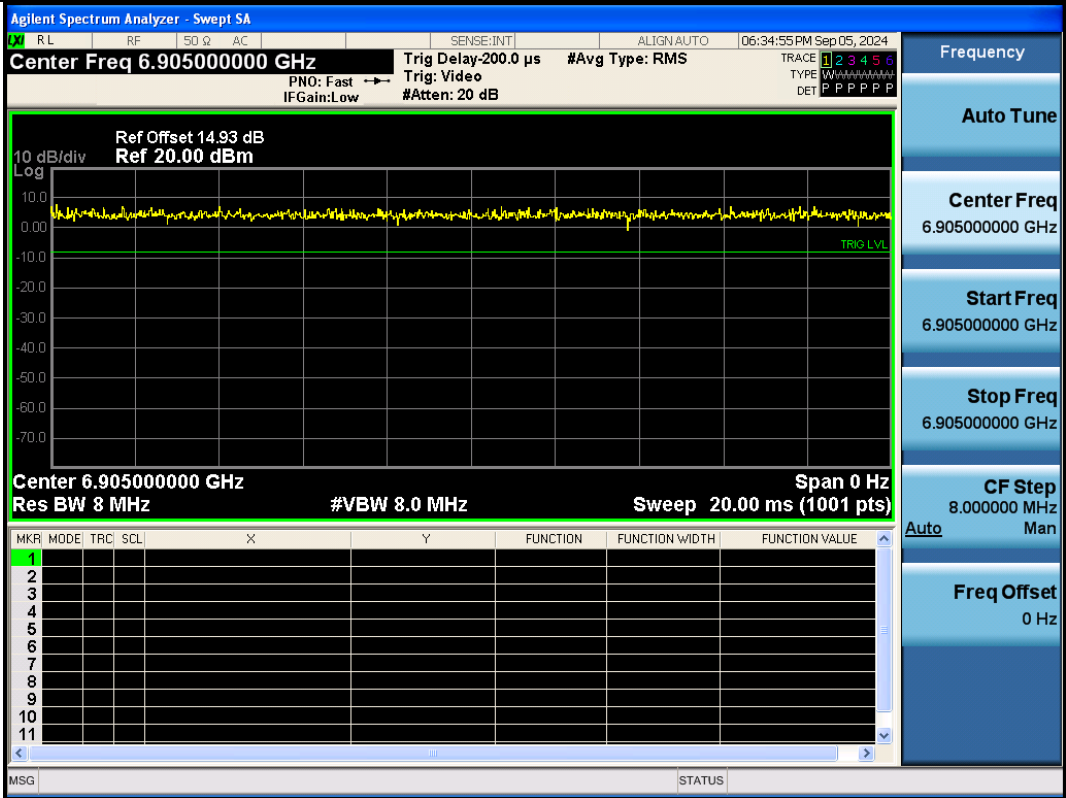

NTNV-11BE320SISO-Ant1-6905

Appendix D: Power Output

Low-power indoor access points:

SISO :								
Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)		EIRP Power (dBm)		EIRP Limit (dBm)	Result
			Antenna1	Antenna2	Antenna1	Antenna2		
Mode 1	1	5955	10.80	10.35	16.80	16.35	30	PASS
	45	6175	10.56	10.96	16.56	16.96	30	PASS
	93	6415	11.08	11.00	17.08	17.00	30	PASS
	97	6435	10.84	10.92	16.84	16.92	30	PASS
	105	6475	10.11	10.74	16.11	16.74	30	PASS
	113	6515	10.79	10.40	16.79	16.40	30	PASS
	117	6535	10.79	10.13	16.79	16.13	30	PASS
	149	6695	10.87	10.69	16.87	16.69	30	PASS
	181	6855	10.72	11.11	16.72	17.11	30	PASS
	185	6875	10.00	10.21	16.00	16.21	30	PASS
	189	6895	10.08	10.34	16.08	16.34	30	PASS
	209	6995	10.33	10.63	16.33	16.63	30	PASS
	233	7115	10.34	10.65	16.34	16.65	30	PASS
Mode 2	3	5965	13.06	12.85	19.06	18.85	30	PASS
	43	6165	12.92	13.23	18.92	19.23	30	PASS
	91	6405	13.01	13.29	19.01	19.29	30	PASS
	99	6445	13.14	13.34	19.14	19.34	30	PASS
	107	6485	13.06	13.18	19.06	19.18	30	PASS
	115	6525	13.60	13.80	19.60	19.80	30	PASS
	123	6565	13.35	13.48	19.35	19.48	30	PASS
	147	6685	13.14	13.10	19.14	19.10	30	PASS
	179	6845	13.48	14.04	19.48	20.04	30	PASS
	187	6885	13.48	13.62	19.48	19.62	30	PASS
	195	6925	13.46	13.88	19.46	19.88	30	PASS
	203	6965	13.51	13.92	19.51	19.92	30	PASS
	227	7085	13.88	13.35	19.88	19.35	30	PASS
Mode 3	7	5985	14.51	14.64	20.51	20.64	30	PASS
	39	6145	14.54	14.86	20.54	20.86	30	PASS
	87	6385	14.54	15.08	20.54	21.08	30	PASS
	103	6465	14.63	14.90	20.63	20.90	30	PASS
	119	6545	14.95	15.27	20.95	21.27	30	PASS
	135	6625	14.41	14.83	20.41	20.83	30	PASS
	151	6705	14.48	14.74	20.48	20.74	30	PASS
	167	6785	14.76	15.03	20.76	21.03	30	PASS
	183	6865	14.92	14.95	20.92	20.95	30	PASS
	199	6945	15.02	15.35	21.02	21.35	30	PASS
	215	7025	15.38	14.89	21.38	20.89	30	PASS

Mode 4	15	6025	14.59	15.09	20.59	21.09	30	PASS
	47	6185	14.85	15.45	20.85	21.45	30	PASS
	79	6345	14.62	15.25	20.62	21.25	30	PASS
	111	6505	14.78	15.36	20.78	21.36	30	PASS
	143	6665	14.94	15.18	20.94	21.18	30	PASS
	175	6825	14.92	14.69	20.92	20.69	30	PASS
	207	6985	14.84	14.67	20.84	20.67	30	PASS
Mode 5	1	5955	10.76	10.40	16.76	16.40	30	PASS
	45	6175	10.67	10.83	16.67	16.83	30	PASS
	93	6415	10.98	11.04	16.98	17.04	30	PASS
	97	6435	10.78	10.95	16.78	16.95	30	PASS
	105	6475	10.90	10.72	16.90	16.72	30	PASS
	113	6515	10.49	10.39	16.49	16.39	30	PASS
	117	6535	10.47	10.18	16.47	16.18	30	PASS
	149	6695	10.78	10.72	16.78	16.72	30	PASS
	181	6855	10.46	11.01	16.46	17.01	30	PASS
	185	6875	10.48	10.24	16.48	16.24	30	PASS
	189	6895	10.34	10.46	16.34	16.46	30	PASS
	209	6995	10.70	10.64	16.70	16.64	30	PASS
	233	7115	10.66	10.58	16.66	16.58	30	PASS
Mode 6	3	5965	12.94	12.76	18.94	18.76	30	PASS
	43	6165	12.61	13.08	18.61	19.08	30	PASS
	91	6405	12.91	13.22	18.91	19.22	30	PASS
	99	6445	12.97	13.28	18.97	19.28	30	PASS
	107	6485	13.05	12.98	19.05	18.98	30	PASS
	115	6525	13.68	13.69	19.68	19.69	30	PASS
	123	6565	13.38	13.31	19.38	19.31	30	PASS
	147	6685	13.11	13.00	19.11	19.00	30	PASS
	179	6845	13.31	13.87	19.31	19.87	30	PASS
	187	6885	13.28	13.46	19.28	19.46	30	PASS
	195	6925	13.15	13.73	19.15	19.73	30	PASS
	203	6965	13.37	13.69	19.37	19.69	30	PASS
	227	7085	13.79	13.05	19.79	19.05	30	PASS
Mode 7	7	5985	14.12	14.73	20.12	20.73	30	PASS
	39	6145	14.50	14.88	20.50	20.88	30	PASS
	87	6385	14.52	15.08	20.52	21.08	30	PASS
	103	6465	14.75	14.85	20.75	20.85	30	PASS
	119	6545	15.20	15.27	21.20	21.27	30	PASS
	135	6625	14.69	14.80	20.69	20.80	30	PASS
	151	6705	14.80	14.67	20.80	20.67	30	PASS
	167	6785	14.81	14.95	20.81	20.95	30	PASS
	183	6865	15.18	15.70	21.18	21.70	30	PASS
	199	6945	15.16	15.04	21.16	21.04	30	PASS
	215	7025	14.53	14.80	20.53	20.80	30	PASS

Mode 8	15	6025	14.82	15.16	20.82	21.16	30	PASS
	47	6185	14.95	15.40	20.95	21.40	30	PASS
	79	6345	14.73	15.23	20.73	21.23	30	PASS
	111	6505	15.06	15.33	21.06	21.33	30	PASS
	143	6665	15.14	14.29	21.14	20.29	30	PASS
	175	6825	15.06	14.59	21.06	20.59	30	PASS
	207	6985	14.85	14.57	20.85	20.57	30	PASS
Mode 9	31	6105	13.28	13.45	19.28	19.45	30	PASS
	63	6265	13.04	13.50	19.04	19.50	30	PASS
	95	6425	13.80	13.76	19.80	19.76	30	PASS
	127	6585	13.43	13.69	19.43	19.69	30	PASS
	159	6745	12.72	13.7	18.72	19.7	30	PASS
	191	6905	13.12	13.36	19.12	19.36	30	PASS

CDD :

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)			EIRP Power	EIRP Limit (dBm)	Result
			Antenna1	Antenna2	Antenna1+2	Antenna1+2		
Mode 1	1	5955	3.91	3.49	6.72	12.72	30	PASS
	45	6175	4.39	4.86	7.64	13.64	30	PASS
	93	6415	3.93	4.72	7.35	13.35	30	PASS
	97	6435	3.89	4.66	7.30	13.30	30	PASS
	105	6475	4.22	4.81	7.54	13.54	30	PASS
	113	6515	4.09	4.57	7.35	13.35	30	PASS
	117	6535	3.30	3.15	6.24	12.24	30	PASS
	149	6695	3.06	3.16	6.12	12.12	30	PASS
	181	6855	4.29	4.98	7.66	13.66	30	PASS
	185	6875	4.14	5.09	7.65	13.65	30	PASS
	189	6895	3.97	4.99	7.52	13.52	30	PASS
	209	6995	4.44	5.38	7.95	13.95	30	PASS
	233	7115	4.63	3.68	7.19	13.19	30	PASS
Mode 2	3	5965	6.67	6.63	9.66	15.66	30	PASS
	43	6165	6.40	7.02	9.73	15.73	30	PASS
	91	6405	6.75	7.11	9.94	15.94	30	PASS
	99	6445	6.62	7.15	9.90	15.90	30	PASS
	107	6485	6.59	7.00	9.81	15.81	30	PASS
	115	6525	7.37	7.64	10.52	16.52	30	PASS
	123	6565	7.06	7.29	10.19	16.19	30	PASS
	147	6685	7.10	6.89	10.01	16.01	30	PASS
	179	6845	7.65	7.92	10.80	16.80	30	PASS
	187	6885	7.42	8.34	10.91	16.91	30	PASS
	195	6925	7.16	8.25	10.75	16.75	30	PASS
	203	6965	7.48	8.22	10.88	16.88	30	PASS
	227	7085	7.05	6.03	9.58	15.58	30	PASS
Mode 3	7	5985	9.42	9.45	12.45	18.45	30	PASS
	39	6145	9.47	9.85	12.67	18.67	30	PASS
	87	6385	10.49	10.84	13.68	19.68	30	PASS
	103	6465	10.67	10.93	13.81	19.81	30	PASS
	119	6545	10.08	10.15	13.13	19.13	30	PASS
	135	6625	9.77	9.78	12.79	18.79	30	PASS
	151	6705	9.84	9.67	12.77	18.77	30	PASS
	167	6785	9.99	9.94	12.98	18.98	30	PASS
	183	6865	10.25	11.01	13.66	19.66	30	PASS
	199	6945	10.13	11.24	13.73	19.73	30	PASS
	215	7025	10.65	10.94	13.81	19.81	30	PASS

Mode 4	15	6025	13.61	14.01	16.82	22.82	30	PASS
	47	6185	13.82	14.63	17.25	23.25	30	PASS
	79	6345	13.53	14.05	16.81	22.81	30	PASS
	111	6505	13.85	14.19	17.03	23.03	30	PASS
	143	6665	13.88	14.31	17.11	23.11	30	PASS
	175	6825	13.71	14.71	17.25	23.25	30	PASS
	207	6985	13.56	14.33	16.97	22.97	30	PASS
Mode 5	1	5955	4.06	3.69	6.89	12.89	30	PASS
	45	6175	4.58	4.82	7.71	13.71	30	PASS
	93	6415	4.24	4.86	7.57	13.57	30	PASS
	97	6435	4.24	4.78	7.53	13.53	30	PASS
	105	6475	4.41	4.86	7.65	13.65	30	PASS
	113	6515	4.36	4.66	7.52	13.52	30	PASS
	117	6535	3.67	3.24	6.47	12.47	30	PASS
	149	6695	3.51	3.23	6.38	12.38	30	PASS
	181	6855	4.55	5.01	7.80	13.80	30	PASS
	185	6875	4.51	5.18	7.87	13.87	30	PASS
	189	6895	4.38	5.21	7.83	13.83	30	PASS
	209	6995	4.81	5.28	8.06	14.06	30	PASS
	233	7115	3.46	3.21	6.35	12.35	30	PASS
Mode 6	3	5965	6.84	6.49	9.68	15.68	30	PASS
	43	6165	6.48	6.83	9.67	15.67	30	PASS
	91	6405	6.90	6.90	9.91	15.91	30	PASS
	99	6445	6.79	6.98	9.90	15.90	30	PASS
	107	6485	6.71	6.77	9.75	15.75	30	PASS
	115	6525	7.49	7.40	10.46	16.46	30	PASS
	123	6565	7.20	7.09	10.16	16.16	30	PASS
	147	6685	7.22	6.70	9.98	15.98	30	PASS
	179	6845	7.69	7.65	10.68	16.68	30	PASS
	187	6885	7.51	8.08	10.81	16.81	30	PASS
	195	6925	7.28	8.53	10.96	16.96	30	PASS
	203	6965	7.54	8.51	11.06	17.06	30	PASS
	227	7085	7.18	6.23	9.74	15.74	30	PASS
Mode 7	7	5985	9.80	9.62	12.72	18.72	30	PASS
	39	6145	9.87	9.90	12.90	18.90	30	PASS
	87	6385	10.65	10.87	13.77	19.77	30	PASS
	103	6465	10.92	10.90	13.92	19.92	30	PASS
	119	6545	10.37	10.15	13.27	19.27	30	PASS
	135	6625	9.89	9.76	12.84	18.84	30	PASS
	151	6705	9.98	9.62	12.81	18.81	30	PASS
	167	6785	10.21	9.94	13.09	19.09	30	PASS
	183	6865	10.38	10.93	13.67	19.67	30	PASS
	199	6945	10.23	11.13	13.71	19.71	30	PASS
	215	7025	10.60	10.83	13.73	19.73	30	PASS

Mode 8	15	6025	13.57	14.10	16.85	22.85	30	PASS
	47	6185	13.82	14.41	17.14	23.14	30	PASS
	79	6345	13.61	14.08	16.86	22.86	30	PASS
	111	6505	14.00	14.19	17.11	23.11	30	PASS
	143	6665	13.88	14.28	17.09	23.09	30	PASS
	175	6825	13.70	14.63	17.20	23.20	30	PASS
	207	6985	13.47	14.30	16.92	22.92	30	PASS
Mode 9	31	6105	12.98	13.44	16.23	22.23	30	PASS
	63	6265	13.12	13.47	16.31	22.31	30	PASS
	95	6425	13.62	13.74	16.69	22.69	30	PASS
	127	6585	13.21	13.06	16.15	22.15	30	PASS
	159	6745	13.32	13.67	16.51	22.51	30	PASS
	191	6905	12.67	13.67	16.21	22.21	30	PASS

Beamforming :

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	EIRP Power	EIRP Limit (dBm)	Result
			Antenna1+2	Antenna1+2		
Mode 1	1	5955	3.33	12.34	30	PASS
	45	6175	4.30	13.31	30	PASS
	93	6415	4.10	13.11	30	PASS
	97	6435	4.03	13.04	30	PASS
	105	6475	4.27	13.28	30	PASS
	113	6515	4.13	13.14	30	PASS
	117	6535	3.22	12.23	30	PASS
	149	6695	3.09	12.10	30	PASS
	181	6855	4.19	13.20	30	PASS
	185	6875	4.13	13.14	30	PASS
	189	6895	4.03	13.04	30	PASS
	209	6995	4.08	13.09	30	PASS
	233	7115	3.61	12.62	30	PASS
Mode 2	3	5965	6.55	15.56	30	PASS
	43	6165	6.61	15.62	30	PASS
	91	6405	6.61	15.62	30	PASS
	99	6445	6.87	15.88	30	PASS
	107	6485	6.74	15.75	30	PASS
	115	6525	6.32	15.33	30	PASS
	123	6565	6.23	15.24	30	PASS
	147	6685	6.36	15.37	30	PASS
	179	6845	7.71	16.72	30	PASS
	187	6885	7.65	16.66	30	PASS
	195	6925	7.33	16.34	30	PASS
	203	6965	7.77	16.78	30	PASS
	227	7085	5.86	14.87	30	PASS
Mode 3	7	5985	9.33	18.34	30	PASS
	39	6145	9.62	18.63	30	PASS
	87	6385	10.52	19.53	30	PASS
	103	6465	10.65	19.66	30	PASS
	119	6545	10.03	19.04	30	PASS
	135	6625	9.68	18.69	30	PASS
	151	6705	9.67	18.68	30	PASS
	167	6785	9.93	18.94	30	PASS
	183	6865	10.49	19.50	30	PASS
	199	6945	10.57	19.58	30	PASS
	215	7025	10.77	19.78	30	PASS

Mode 4	15	6025	13.62	22.63	30	PASS
	47	6185	12.96	21.97	30	PASS
	79	6345	13.68	22.69	30	PASS
	111	6505	13.74	22.75	30	PASS
	143	6665	13.04	22.05	30	PASS
	175	6825	13.09	22.10	30	PASS
	207	6985	13.20	22.21	30	PASS
Mode 5	1	5955	3.47	12.48	30	PASS
	45	6175	4.33	13.34	30	PASS
	93	6415	4.09	13.10	30	PASS
	97	6435	4.10	13.11	30	PASS
	105	6475	4.22	13.23	30	PASS
	113	6515	4.12	13.13	30	PASS
	117	6535	3.32	12.33	30	PASS
	149	6695	3.23	12.24	30	PASS
	181	6855	4.15	13.16	30	PASS
	185	6875	4.07	13.08	30	PASS
	189	6895	4.06	13.07	30	PASS
	209	6995	4.05	13.06	30	PASS
	233	7115	3.29	12.30	30	PASS
Mode 6	3	5965	6.54	15.55	30	PASS
	43	6165	6.61	15.62	30	PASS
	91	6405	6.87	15.88	30	PASS
	99	6445	6.84	15.85	30	PASS
	107	6485	6.72	15.73	30	PASS
	115	6525	6.30	15.31	30	PASS
	123	6565	6.23	15.24	30	PASS
	147	6685	6.39	15.40	30	PASS
	179	6845	7.42	16.43	30	PASS
	187	6885	7.34	16.35	30	PASS
	195	6925	7.50	16.51	30	PASS
	203	6965	7.65	16.66	30	PASS
	227	7085	5.81	14.82	30	PASS
Mode 7	7	5985	9.45	18.46	30	PASS
	39	6145	9.63	18.64	30	PASS
	87	6385	10.74	19.75	30	PASS
	103	6465	10.69	19.70	30	PASS
	119	6545	10.18	19.19	30	PASS
	135	6625	9.79	18.80	30	PASS
	151	6705	9.72	18.73	30	PASS
	167	6785	10.03	19.04	30	PASS
	183	6865	10.50	19.51	30	PASS
	199	6945	10.44	19.45	30	PASS
	215	7025	10.62	19.63	30	PASS

Mode 8	15	6025	13.74	22.75	30	PASS
	47	6185	13.05	22.06	30	PASS
	79	6345	13.78	22.79	30	PASS
	111	6505	13.83	22.84	30	PASS
	143	6665	13.08	22.09	30	PASS
	175	6825	13.17	22.18	30	PASS
	207	6985	13.07	22.08	30	PASS
Mode 9	31	6105	13.07	22.08	30	PASS
	63	6265	13.19	22.20	30	PASS
	95	6425	13.61	22.62	30	PASS
	127	6585	13.10	22.11	30	PASS
	159	6745	13.41	22.42	30	PASS
	191	6905	13.11	22.12	30	PASS

Low-power client devices & Dual Client :

SISO :								
Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)		EIRP Power (dBm)		EIRP Limit (dBm)	Result
			Antenna1	Antenna2	Antenna1	Antenna2		
Mode 1	1	5955	4.20	3.96	10.20	9.96	24	PASS
	45	6175	4.35	4.22	10.35	10.22	24	PASS
	93	6415	4.64	4.60	10.64	10.60	24	PASS
	97	6435	4.61	4.60	10.61	10.60	24	PASS
	105	6475	4.77	4.47	10.77	10.47	24	PASS
	113	6515	4.70	4.72	10.70	10.72	24	PASS
	117	6535	4.64	4.97	10.64	10.97	24	PASS
	149	6695	4.77	4.33	10.77	10.33	24	PASS
	181	6855	4.83	4.56	10.83	10.56	24	PASS
	185	6875	4.72	4.72	10.72	10.72	24	PASS
	189	6895	4.72	4.48	10.72	10.48	24	PASS
	209	6995	4.91	5.18	10.91	11.18	24	PASS
	233	7115	4.57	4.48	10.57	10.48	24	PASS
Mode 2	3	5965	7.29	7.60	13.29	13.60	24	PASS
	43	6165	7.73	7.74	13.73	13.74	24	PASS
	91	6405	8.01	8.19	14.01	14.19	24	PASS
	99	6445	7.49	7.36	13.49	13.36	24	PASS
	107	6485	8.13	7.84	14.13	13.84	24	PASS
	115	6525	7.77	8.04	13.77	14.04	24	PASS
	123	6565	7.43	7.52	13.43	13.52	24	PASS
	147	6685	7.04	6.74	13.04	12.74	24	PASS
	179	6845	7.91	7.95	13.91	13.95	24	PASS
	187	6885	7.73	7.66	13.73	13.66	24	PASS
	195	6925	7.86	8.09	13.86	14.09	24	PASS
	203	6965	7.83	8.21	13.83	14.21	24	PASS
	227	7085	7.81	7.48	13.81	13.48	24	PASS
Mode 3	7	5985	10.35	10.28	16.35	16.28	24	PASS
	39	6145	10.81	10.68	16.81	16.68	24	PASS
	87	6385	10.70	10.78	16.70	16.78	24	PASS
	103	6465	11.03	11.43	17.03	17.43	24	PASS
	119	6545	10.55	10.87	16.55	16.87	24	PASS
	135	6625	11.09	10.78	17.09	16.78	24	PASS
	151	6705	10.33	10.44	16.33	16.44	24	PASS
	167	6785	10.35	10.03	16.35	16.03	24	PASS
	183	6865	10.75	10.48	16.75	16.48	24	PASS
	199	6945	10.71	10.86	16.71	16.86	24	PASS
	215	7025	10.80	10.52	16.80	16.52	24	PASS

Mode 4	15	6025	13.52	13.46	19.52	19.46	24	PASS
	47	6185	13.57	13.66	19.57	19.66	24	PASS
	79	6345	13.70	13.44	19.70	19.44	24	PASS
	111	6505	14.13	14.17	20.13	20.17	24	PASS
	143	6665	13.78	13.56	19.78	19.56	24	PASS
	175	6825	13.49	13.76	19.49	19.76	24	PASS
	207	6985	13.90	13.97	19.90	19.97	24	PASS
Mode 5	1	5955	4.44	4.59	10.44	10.59	24	PASS
	45	6175	4.53	4.58	10.53	10.58	24	PASS
	93	6415	4.75	4.63	10.75	10.63	24	PASS
	97	6435	4.74	4.66	10.74	10.66	24	PASS
	105	6475	4.90	4.51	10.90	10.51	24	PASS
	113	6515	4.79	4.42	10.79	10.42	24	PASS
	117	6535	4.71	4.45	10.71	10.45	24	PASS
	149	6695	4.76	4.51	10.76	10.51	24	PASS
	181	6855	4.89	4.83	10.89	10.83	24	PASS
	185	6875	4.92	4.66	10.92	10.66	24	PASS
	189	6895	4.95	4.64	10.95	10.64	24	PASS
	209	6995	5.10	4.98	11.10	10.98	24	PASS
	233	7115	4.71	4.73	10.71	10.73	24	PASS
Mode 6	3	5965	7.20	7.41	13.20	13.41	24	PASS
	43	6165	7.65	7.74	13.65	13.74	24	PASS
	91	6405	7.93	7.91	13.93	13.91	24	PASS
	99	6445	8.15	8.43	14.15	14.43	24	PASS
	107	6485	8.03	7.91	14.03	13.91	24	PASS
	115	6525	7.64	7.42	13.64	13.42	24	PASS
	123	6565	7.32	7.28	13.32	13.28	24	PASS
	147	6685	6.95	6.72	12.95	12.72	24	PASS
	179	6845	7.84	7.77	13.84	13.77	24	PASS
	187	6885	7.59	7.97	13.59	13.97	24	PASS
	195	6925	7.71	7.82	13.71	13.82	24	PASS
	203	6965	7.77	7.95	13.77	13.95	24	PASS
	227	7085	7.79	8.04	13.79	14.04	24	PASS
Mode 7	7	5985	10.22	9.87	16.22	15.87	24	PASS
	39	6145	10.92	10.90	16.92	16.90	24	PASS
	87	6385	10.73	10.90	16.73	16.90	24	PASS
	103	6465	11.04	10.73	17.04	16.73	24	PASS
	119	6545	10.55	10.65	16.55	16.65	24	PASS
	135	6625	11.05	10.78	17.05	16.78	24	PASS
	151	6705	10.46	10.33	16.46	16.33	24	PASS
	167	6785	10.51	10.54	16.51	16.54	24	PASS
	183	6865	10.79	10.86	16.79	16.86	24	PASS
	199	6945	10.80	10.61	16.80	16.61	24	PASS
	215	7025	10.90	10.96	16.90	16.96	24	PASS

Mode 8	15	6025	13.78	13.67	19.78	19.67	24	PASS
	47	6185	13.23	13.36	19.23	19.36	24	PASS
	79	6345	13.80	13.81	19.80	19.81	24	PASS
	111	6505	14.23	14.17	20.23	20.17	24	PASS
	143	6665	13.83	14.16	19.83	20.16	24	PASS
	175	6825	13.51	13.16	19.51	19.16	24	PASS
	207	6985	13.97	13.59	19.97	19.59	24	PASS
Mode 9	31	6105	13.28	13.45	19.28	19.45	24	PASS
	63	6265	13.04	13.50	19.04	19.50	24	PASS
	95	6425	13.80	13.76	19.80	19.76	24	PASS
	127	6585	13.43	13.69	19.43	19.69	24	PASS
	159	6745	12.72	13.7	18.72	19.70	24	PASS
	191	6905	13.12	13.36	19.12	19.36	24	PASS

CDD :								
Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)			EIRP Power	EIRP Limit (dBm)	Result
			Antenna1	Antenna2	Antenna1+2	Antenna1+2		
Mode 1	1	5955	-1.77	-1.83	1.21	7.21	24	PASS
	45	6175	-1.80	-1.91	1.16	7.16	24	PASS
	93	6415	-1.67	-1.86	1.25	7.25	24	PASS
	97	6435	-1.63	-2.12	1.14	7.14	24	PASS
	105	6475	-1.48	-1.14	1.70	7.70	24	PASS
	113	6515	-1.55	-1.03	1.73	7.73	24	PASS
	117	6535	-1.48	-1.18	1.68	7.68	24	PASS
	149	6695	-0.94	-1.27	1.91	7.91	24	PASS
	181	6855	-1.57	-1.87	1.29	7.29	24	PASS
	185	6875	-1.64	-1.22	1.59	7.59	24	PASS
	189	6895	-1.65	-1.74	1.32	7.32	24	PASS
	209	6995	-1.37	-1.80	1.43	7.43	24	PASS
	233	7115	-1.62	-1.21	1.60	7.60	24	PASS
Mode 2	3	5965	1.36	1.34	4.36	10.36	24	PASS
	43	6165	1.42	1.49	4.47	10.47	24	PASS
	91	6405	1.18	0.73	3.97	9.97	24	PASS
	99	6445	1.34	1.28	4.32	10.32	24	PASS
	107	6485	1.51	1.86	4.70	10.70	24	PASS
	115	6525	1.50	1.76	4.64	10.64	24	PASS
	123	6565	1.56	2.03	4.81	10.81	24	PASS
	147	6685	1.14	0.94	4.05	10.05	24	PASS
	179	6845	1.54	1.25	4.41	10.41	24	PASS
	187	6885	1.37	1.12	4.26	10.26	24	PASS
	195	6925	1.50	1.85	4.69	10.69	24	PASS
	203	6965	1.49	1.99	4.76	10.76	24	PASS
	227	7085	1.42	1.21	4.33	10.33	24	PASS
Mode 3	7	5985	4.57	4.59	7.59	13.59	24	PASS
	39	6145	4.39	4.70	7.56	13.56	24	PASS
	87	6385	4.99	5.44	8.23	14.23	24	PASS
	103	6465	4.65	4.99	7.83	13.83	24	PASS
	119	6545	4.47	4.61	7.55	13.55	24	PASS
	135	6625	4.72	4.56	7.65	13.65	24	PASS
	151	6705	4.70	4.33	7.53	13.53	24	PASS
	167	6785	4.10	4.08	7.10	13.10	24	PASS
	183	6865	4.54	4.83	7.70	13.70	24	PASS
	199	6945	4.60	4.86	7.74	13.74	24	PASS
	215	7025	4.63	4.38	7.52	13.52	24	PASS

Mode 4	15	6025	7.78	7.28	10.55	16.55	24	PASS
	47	6185	7.83	8.30	11.08	17.08	24	PASS
	79	6345	7.40	7.64	10.53	16.53	24	PASS
	111	6505	7.69	7.37	10.54	16.54	24	PASS
	143	6665	7.13	7.11	10.13	16.13	24	PASS
	175	6825	7.27	6.96	10.13	16.13	24	PASS
	207	6985	7.87	8.03	10.96	16.96	24	PASS
Mode 5	1	5955	-1.90	-2.25	0.94	6.94	24	PASS
	45	6175	-1.75	-1.53	1.37	7.37	24	PASS
	93	6415	-0.83	-1.37	1.92	7.92	24	PASS
	97	6435	-0.81	-1.12	2.05	8.05	24	PASS
	105	6475	-1.60	-1.84	1.29	7.29	24	PASS
	113	6515	-1.61	-2.14	1.14	7.14	24	PASS
	117	6535	-1.40	-1.75	1.44	7.44	24	PASS
	149	6695	-0.96	-1.11	1.98	7.98	24	PASS
	181	6855	-1.42	-1.05	1.78	7.78	24	PASS
	185	6875	-1.51	-1.12	1.70	7.70	24	PASS
	189	6895	-1.57	-1.71	1.37	7.37	24	PASS
	209	6995	-1.25	-1.01	1.88	7.88	24	PASS
	233	7115	-1.52	-1.18	1.66	7.66	24	PASS
Mode 6	3	5965	1.47	1.00	4.25	10.25	24	PASS
	43	6165	1.47	1.05	4.28	10.28	24	PASS
	91	6405	1.31	1.37	4.35	10.35	24	PASS
	99	6445	1.33	1.59	4.47	10.47	24	PASS
	107	6485	1.48	1.06	4.29	10.29	24	PASS
	115	6525	1.48	1.45	4.48	10.48	24	PASS
	123	6565	1.59	1.47	4.54	10.54	24	PASS
	147	6685	1.23	0.78	4.02	10.02	24	PASS
	179	6845	1.48	1.60	4.55	10.55	24	PASS
	187	6885	1.34	1.84	4.61	10.61	24	PASS
	195	6925	1.50	1.13	4.33	10.33	24	PASS
	203	6965	1.49	1.28	4.40	10.40	24	PASS
	227	7085	1.45	1.53	4.50	10.50	24	PASS
Mode 7	7	5985	4.62	4.78	7.71	13.71	24	PASS
	39	6145	4.41	4.07	7.25	13.25	24	PASS
	87	6385	5.06	5.37	8.23	14.23	24	PASS
	103	6465	4.57	4.16	7.38	13.38	24	PASS
	119	6545	4.53	4.56	7.56	13.56	24	PASS
	135	6625	4.77	5.08	7.94	13.94	24	PASS
	151	6705	4.73	4.91	7.83	13.83	24	PASS
	167	6785	4.13	4.19	7.17	13.17	24	PASS
	183	6865	4.55	4.40	7.49	13.49	24	PASS
	199	6945	4.62	4.47	7.56	13.56	24	PASS
	215	7025	4.65	4.61	7.64	13.64	24	PASS

Mode 8	15	6025	7.83	7.47	10.66	16.66	24	PASS
	47	6185	7.86	7.48	10.68	16.68	24	PASS
	79	6345	7.40	7.01	10.22	16.22	24	PASS
	111	6505	7.69	7.44	10.58	16.58	24	PASS
	143	6665	7.16	6.75	9.97	15.97	24	PASS
	175	6825	7.32	7.05	10.20	16.20	24	PASS
	207	6985	7.93	8.20	11.08	17.08	24	PASS
Mode 9	31	6105	9.66	10.34	13.02	19.02	24	PASS
	63	6265	9.91	9.72	12.83	18.83	24	PASS
	95	6425	10.08	11.14	13.65	19.65	24	PASS
	127	6585	10.51	11.41	13.99	19.99	24	PASS
	159	6745	10.56	11.89	14.29	20.29	24	PASS
	191	6905	10.66	11.54	14.13	20.13	24	PASS

Beamforming :

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	EIRP Power	EIRP Limit (dBm)	Result
			Antenna1+2	Antenna1+2		
Mode 1	1	5955	-2.05	6.96	24	PASS
	45	6175	-1.91	7.10	24	PASS
	93	6415	-1.96	7.05	24	PASS
	97	6435	-2.17	6.84	24	PASS
	105	6475	-1.48	7.53	24	PASS
	113	6515	-1.37	7.64	24	PASS
	117	6535	-1.59	7.42	24	PASS
	149	6695	-1.20	7.81	24	PASS
	181	6855	-1.78	7.23	24	PASS
	185	6875	-1.56	7.45	24	PASS
	189	6895	-1.88	7.13	24	PASS
	209	6995	-1.66	7.35	24	PASS
	233	7115	-1.81	7.20	24	PASS
Mode 2	3	5965	1.30	10.31	24	PASS
	43	6165	1.42	10.43	24	PASS
	91	6405	0.89	9.90	24	PASS
	99	6445	1.25	10.26	24	PASS
	107	6485	1.58	10.59	24	PASS
	115	6525	1.47	10.48	24	PASS
	123	6565	1.52	10.53	24	PASS
	147	6685	1.02	10.03	24	PASS
	179	6845	1.31	10.32	24	PASS
	187	6885	1.13	10.14	24	PASS
	195	6925	1.51	10.52	24	PASS
	203	6965	1.64	10.65	24	PASS
	227	7085	1.11	10.12	24	PASS
Mode 3	7	5985	4.52	13.53	24	PASS
	39	6145	4.43	13.44	24	PASS
	87	6385	4.98	13.99	24	PASS
	103	6465	4.51	13.52	24	PASS
	119	6545	4.47	13.48	24	PASS
	135	6625	4.52	13.53	24	PASS
	151	6705	4.39	13.40	24	PASS
	167	6785	4.01	13.02	24	PASS
	183	6865	4.51	13.52	24	PASS
	199	6945	4.66	13.67	24	PASS
	215	7025	4.47	13.48	24	PASS

Mode 4	15	6025	7.33	16.34	24	PASS
	47	6185	7.39	16.40	24	PASS
	79	6345	7.00	16.01	24	PASS
	111	6505	7.40	16.41	24	PASS
	143	6665	7.05	16.06	24	PASS
	175	6825	7.05	16.06	24	PASS
	207	6985	7.89	16.90	24	PASS
Mode 5	1	5955	-2.18	6.83	24	PASS
	45	6175	-1.75	7.26	24	PASS
	93	6415	-1.13	7.88	24	PASS
	97	6435	-1.34	7.67	24	PASS
	105	6475	-1.84	7.17	24	PASS
	113	6515	-1.95	7.06	24	PASS
	117	6535	-1.73	7.28	24	PASS
	149	6695	-1.85	7.16	24	PASS
	181	6855	-1.67	7.34	24	PASS
	185	6875	-1.52	7.49	24	PASS
	189	6895	-1.79	7.22	24	PASS
	209	6995	-1.51	7.50	24	PASS
	233	7115	-1.65	7.36	24	PASS
Mode 6	3	5965	1.13	10.14	24	PASS
	43	6165	1.13	10.14	24	PASS
	91	6405	1.25	10.26	24	PASS
	99	6445	1.31	10.32	24	PASS
	107	6485	1.14	10.15	24	PASS
	115	6525	1.32	10.33	24	PASS
	123	6565	1.50	10.51	24	PASS
	147	6685	0.98	9.99	24	PASS
	179	6845	1.43	10.44	24	PASS
	187	6885	1.28	10.29	24	PASS
	195	6925	1.21	10.22	24	PASS
	203	6965	1.25	10.26	24	PASS
	227	7085	1.39	10.40	24	PASS
Mode 7	7	5985	4.47	13.48	24	PASS
	39	6145	3.98	12.99	24	PASS
	87	6385	4.92	13.93	24	PASS
	103	6465	4.30	13.31	24	PASS
	119	6545	4.42	13.43	24	PASS
	135	6625	4.72	13.73	24	PASS
	151	6705	4.79	13.80	24	PASS
	167	6785	4.12	13.13	24	PASS
	183	6865	4.35	13.36	24	PASS
	199	6945	4.52	13.53	24	PASS
	215	7025	4.55	13.56	24	PASS

Mode 8	15	6025	7.62	16.63	24	PASS
	47	6185	7.21	16.22	24	PASS
	79	6345	7.11	16.12	24	PASS
	111	6505	7.38	16.39	24	PASS
	143	6665	6.90	15.91	24	PASS
	175	6825	7.06	16.07	24	PASS
	207	6985	7.67	16.68	24	PASS
Mode 9	31	6105	9.98	18.99	24	PASS
	63	6265	9.76	18.77	24	PASS
	95	6425	10.59	19.60	24	PASS
	127	6585	10.92	19.93	24	PASS
	159	6745	11.24	20.25	24	PASS
	191	6905	11.08	20.09	24	PASS

Appendix E: Maximum Power Spectral Density

Low-power indoor access points:

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	EIRP PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11AX20SISO	Ant1	5955	-1.38	4.62	≤5.00	PASS
11AX20SISO	Ant1	6175	-1.75	4.25	≤5.00	PASS
11AX20SISO	Ant1	6415	-1.28	4.72	≤5.00	PASS
11AX20SISO	Ant1	6435	-1.58	4.42	≤5.00	PASS
11AX20SISO	Ant1	6475	-2.21	3.79	≤5.00	PASS
11AX20SISO	Ant1	6515	-1.59	4.41	≤5.00	PASS
11AX20SISO	Ant1	6535	-1.65	4.35	≤5.00	PASS
11AX20SISO	Ant1	6695	-1.46	4.54	≤5.00	PASS
11AX20SISO	Ant1	6855	-1.52	4.48	≤5.00	PASS
11AX20SISO	Ant1	6875	-2.29	3.71	≤5.00	PASS
11AX20SISO	Ant1	6895	-2.22	3.78	≤5.00	PASS
11AX20SISO	Ant1	6995	-1.95	4.05	≤5.00	PASS
11AX20SISO	Ant1	7115	-1.81	4.19	≤5.00	PASS
11AX40SISO	Ant1	5965	-2.25	3.75	≤5.00	PASS
11AX40SISO	Ant1	6165	-2.45	3.55	≤5.00	PASS
11AX40SISO	Ant1	6405	-2.34	3.66	≤5.00	PASS
11AX40SISO	Ant1	6445	-2.27	3.73	≤5.00	PASS
11AX40SISO	Ant1	6485	-2.40	3.60	≤5.00	PASS
11AX40SISO	Ant1	6525	-1.82	4.18	≤5.00	PASS
11AX40SISO	Ant1	6565	-2.01	3.99	≤5.00	PASS
11AX40SISO	Ant1	6685	-1.99	4.01	≤5.00	PASS
11AX40SISO	Ant1	6845	-1.80	4.20	≤5.00	PASS
11AX40SISO	Ant1	6885	-1.79	4.21	≤5.00	PASS
11AX40SISO	Ant1	6925	-1.91	4.09	≤5.00	PASS
11AX40SISO	Ant1	6965	-1.84	4.16	≤5.00	PASS
11AX40SISO	Ant1	7085	-1.32	4.68	≤5.00	PASS
11AX80SISO	Ant1	5985	-3.85	2.15	≤5.00	PASS
11AX80SISO	Ant1	6145	-3.87	2.13	≤5.00	PASS
11AX80SISO	Ant1	6385	-3.98	2.02	≤5.00	PASS
11AX80SISO	Ant1	6465	-3.91	2.09	≤5.00	PASS
11AX80SISO	Ant1	6545	-3.58	2.42	≤5.00	PASS
11AX80SISO	Ant1	6625	-4.04	1.96	≤5.00	PASS
11AX80SISO	Ant1	6705	-3.69	2.31	≤5.00	PASS
11AX80SISO	Ant1	6785	-3.59	2.41	≤5.00	PASS
11AX80SISO	Ant1	6865	-3.52	2.48	≤5.00	PASS
11AX80SISO	Ant1	6945	-3.47	2.53	≤5.00	PASS
11AX80SISO	Ant1	7025	-3.00	3.00	≤5.00	PASS
11AX160SISO	Ant1	6025	-6.87	-0.87	≤5.00	PASS
11AX160SISO	Ant1	6185	-6.48	-0.48	≤5.00	PASS
11AX160SISO	Ant1	6345	-6.93	-0.93	≤5.00	PASS
11AX160SISO	Ant1	6505	-6.77	-0.77	≤5.00	PASS
11AX160SISO	Ant1	6665	-6.36	-0.36	≤5.00	PASS
11AX160SISO	Ant1	6825	-6.40	-0.40	≤5.00	PASS
11AX160SISO	Ant1	6985	-6.51	-0.51	≤5.00	PASS
11BE20SISO	Ant1	5955	-1.41	4.59	≤5.00	PASS
11BE20SISO	Ant1	6175	-1.82	4.18	≤5.00	PASS
11BE20SISO	Ant1	6415	-1.30	4.70	≤5.00	PASS

11BE20SISO	Ant1	6435	-1.59	4.41	≤5.00	PASS
11BE20SISO	Ant1	6475	-1.40	4.60	≤5.00	PASS
11BE20SISO	Ant1	6515	-1.74	4.26	≤5.00	PASS
11BE20SISO	Ant1	6535	-1.81	4.19	≤5.00	PASS
11BE20SISO	Ant1	6695	-1.26	4.74	≤5.00	PASS
11BE20SISO	Ant1	6855	-1.81	4.19	≤5.00	PASS
11BE20SISO	Ant1	6875	-1.84	4.16	≤5.00	PASS
11BE20SISO	Ant1	6895	-1.87	4.13	≤5.00	PASS
11BE20SISO	Ant1	6995	-1.60	4.40	≤5.00	PASS
11BE20SISO	Ant1	7115	-1.53	4.47	≤5.00	PASS
11BE40SISO	Ant1	5965	-2.25	3.75	≤5.00	PASS
11BE40SISO	Ant1	6165	-2.68	3.32	≤5.00	PASS
11BE40SISO	Ant1	6405	-2.44	3.56	≤5.00	PASS
11BE40SISO	Ant1	6445	-2.34	3.66	≤5.00	PASS
11BE40SISO	Ant1	6485	-2.33	3.67	≤5.00	PASS
11BE40SISO	Ant1	6525	-1.64	4.36	≤5.00	PASS
11BE40SISO	Ant1	6565	-1.93	4.07	≤5.00	PASS
11BE40SISO	Ant1	6685	-2.02	3.98	≤5.00	PASS
11BE40SISO	Ant1	6845	-1.94	4.06	≤5.00	PASS
11BE40SISO	Ant1	6885	-2.05	3.95	≤5.00	PASS
11BE40SISO	Ant1	6925	-2.19	3.81	≤5.00	PASS
11BE40SISO	Ant1	6965	-2.02	3.98	≤5.00	PASS
11BE40SISO	Ant1	7085	-1.39	4.61	≤5.00	PASS
11BE80SISO	Ant1	5985	-3.83	2.17	≤5.00	PASS
11BE80SISO	Ant1	6145	-3.92	2.08	≤5.00	PASS
11BE80SISO	Ant1	6385	-3.94	2.06	≤5.00	PASS
11BE80SISO	Ant1	6465	-3.73	2.27	≤5.00	PASS
11BE80SISO	Ant1	6545	-3.26	2.74	≤5.00	PASS
11BE80SISO	Ant1	6625	-3.71	2.29	≤5.00	PASS
11BE80SISO	Ant1	6705	-3.33	2.67	≤5.00	PASS
11BE80SISO	Ant1	6785	-3.57	2.43	≤5.00	PASS
11BE80SISO	Ant1	6865	-3.30	2.70	≤5.00	PASS
11BE80SISO	Ant1	6945	-3.30	2.70	≤5.00	PASS
11BE80SISO	Ant1	7025	-3.86	2.14	≤5.00	PASS
11BE160SISO	Ant1	6025	-6.76	-0.76	≤5.00	PASS
11BE160SISO	Ant1	6185	-6.36	-0.36	≤5.00	PASS
11BE160SISO	Ant1	6345	-6.71	-0.71	≤5.00	PASS
11BE160SISO	Ant1	6505	-6.38	-0.38	≤5.00	PASS
11BE160SISO	Ant1	6665	-6.14	-0.14	≤5.00	PASS
11BE160SISO	Ant1	6825	-6.23	-0.23	≤5.00	PASS
11BE160SISO	Ant1	6985	-6.49	-0.49	≤5.00	PASS
11BE320SISO	Ant1	6105	-10.38	-4.38	≤5.00	PASS
11BE320SISO	Ant1	6265	-10.46	-4.46	≤5.00	PASS
11BE320SISO	Ant1	6425	-9.89	-3.89	≤5.00	PASS
11BE320SISO	Ant1	6585	-10.34	-4.34	≤5.00	PASS
11BE320SISO	Ant1	6745	-10.60	-4.6	≤5.00	PASS
11BE320SISO	Ant1	6905	-10.97	-4.97	≤5.00	PASS

11AX20CDD	Ant1+2	5955	-5.24	3.77	≤5.00	PASS
11AX20CDD	Ant1+2	6175	-4.93	4.08	≤5.00	PASS
11AX20CDD	Ant1+2	6415	-5.40	3.61	≤5.00	PASS
11AX20CDD	Ant1+2	6435	-5.44	3.57	≤5.00	PASS
11AX20CDD	Ant1+2	6475	-4.99	4.02	≤5.00	PASS
11AX20CDD	Ant1+2	6515	-5.17	3.84	≤5.00	PASS
11AX20CDD	Ant1+2	6535	-5.90	3.11	≤5.00	PASS
11AX20CDD	Ant1+2	6695	-6.07	2.94	≤5.00	PASS
11AX20CDD	Ant1+2	6855	-5.01	4.00	≤5.00	PASS
11AX20CDD	Ant1+2	6875	-5.08	3.93	≤5.00	PASS
11AX20CDD	Ant1+2	6895	-5.24	3.77	≤5.00	PASS
11AX20CDD	Ant1+2	6995	-4.81	4.20	≤5.00	PASS
11AX20CDD	Ant1+2	7115	-4.65	4.36	≤5.00	PASS
11AX40CDD	Ant1+2	5965	-5.46	3.55	≤5.00	PASS
11AX40CDD	Ant1+2	6165	-5.87	3.14	≤5.00	PASS
11AX40CDD	Ant1+2	6405	-5.55	3.46	≤5.00	PASS
11AX40CDD	Ant1+2	6445	-5.65	3.36	≤5.00	PASS
11AX40CDD	Ant1+2	6485	-5.73	3.28	≤5.00	PASS
11AX40CDD	Ant1+2	6525	-4.89	4.12	≤5.00	PASS
11AX40CDD	Ant1+2	6565	-5.27	3.74	≤5.00	PASS
11AX40CDD	Ant1+2	6685	-5.04	3.97	≤5.00	PASS
11AX40CDD	Ant1+2	6845	-4.70	4.31	≤5.00	PASS
11AX40CDD	Ant1+2	6885	-4.88	4.13	≤5.00	PASS
11AX40CDD	Ant1+2	6925	-4.94	4.07	≤5.00	PASS
11AX40CDD	Ant1+2	6965	-4.65	4.36	≤5.00	PASS
11AX40CDD	Ant1+2	7085	-5.06	3.95	≤5.00	PASS
11AX80CDD	Ant1+2	5985	-5.87	3.14	≤5.00	PASS
11AX80CDD	Ant1+2	6145	-5.83	3.18	≤5.00	PASS
11AX80CDD	Ant1+2	6385	-4.89	4.12	≤5.00	PASS
11AX80CDD	Ant1+2	6465	-4.66	4.35	≤5.00	PASS
11AX80CDD	Ant1+2	6545	-5.33	3.68	≤5.00	PASS
11AX80CDD	Ant1+2	6625	-5.64	3.37	≤5.00	PASS
11AX80CDD	Ant1+2	6705	-5.39	3.62	≤5.00	PASS
11AX80CDD	Ant1+2	6785	-5.37	3.64	≤5.00	PASS
11AX80CDD	Ant1+2	6865	-5.16	3.85	≤5.00	PASS
11AX80CDD	Ant1+2	6945	-5.14	3.87	≤5.00	PASS
11AX80CDD	Ant1+2	7025	-4.61	4.40	≤5.00	PASS
11AX160CDD	Ant1+2	6025	-4.87	4.14	≤5.00	PASS
11AX160CDD	Ant1+2	6185	-4.40	4.61	≤5.00	PASS
11AX160CDD	Ant1+2	6345	-4.75	4.26	≤5.00	PASS
11AX160CDD	Ant1+2	6505	-4.50	4.51	≤5.00	PASS
11AX160CDD	Ant1+2	6665	-4.29	4.72	≤5.00	PASS
11AX160CDD	Ant1+2	6825	-4.53	4.48	≤5.00	PASS
11AX160CDD	Ant1+2	6985	-4.62	4.39	≤5.00	PASS
11BE20CDD	Ant1+2	5955	-5.11	3.90	≤5.00	PASS
11BE20CDD	Ant1+2	6175	-4.71	4.30	≤5.00	PASS
11BE20CDD	Ant1+2	6415	-5.04	3.97	≤5.00	PASS
11BE20CDD	Ant1+2	6435	-5.13	3.88	≤5.00	PASS
11BE20CDD	Ant1+2	6475	-4.85	4.16	≤5.00	PASS
11BE20CDD	Ant1+2	6515	-4.92	4.09	≤5.00	PASS
11BE20CDD	Ant1+2	6535	-5.62	3.39	≤5.00	PASS

11BE20CDD	Ant1+2	6695	-5.65	3.36	≤5.00	PASS
11BE20CDD	Ant1+2	6855	-4.79	4.22	≤5.00	PASS
11BE20CDD	Ant1+2	6875	-4.79	4.22	≤5.00	PASS
11BE20CDD	Ant1+2	6895	-4.95	4.06	≤5.00	PASS
11BE20CDD	Ant1+2	6995	-4.49	4.52	≤5.00	PASS
11BE20CDD	Ant1+2	7115	-5.78	3.23	≤5.00	PASS
11BE40CDD	Ant1+2	5965	-5.35	3.66	≤5.00	PASS
11BE40CDD	Ant1+2	6165	-5.77	3.24	≤5.00	PASS
11BE40CDD	Ant1+2	6405	-5.41	3.60	≤5.00	PASS
11BE40CDD	Ant1+2	6445	-5.52	3.49	≤5.00	PASS
11BE40CDD	Ant1+2	6485	-5.71	3.30	≤5.00	PASS
11BE40CDD	Ant1+2	6525	-4.87	4.14	≤5.00	PASS
11BE40CDD	Ant1+2	6565	-5.15	3.86	≤5.00	PASS
11BE40CDD	Ant1+2	6685	-4.91	4.10	≤5.00	PASS
11BE40CDD	Ant1+2	6845	-4.62	4.39	≤5.00	PASS
11BE40CDD	Ant1+2	6885	-4.83	4.18	≤5.00	PASS
11BE40CDD	Ant1+2	6925	-5.11	3.90	≤5.00	PASS
11BE40CDD	Ant1+2	6965	-4.76	4.25	≤5.00	PASS
11BE40CDD	Ant1+2	7085	-5.03	3.98	≤5.00	PASS
11BE80CDD	Ant1+2	5985	-5.48	3.53	≤5.00	PASS
11BE80CDD	Ant1+2	6145	-5.80	3.21	≤5.00	PASS
11BE80CDD	Ant1+2	6385	-4.74	4.27	≤5.00	PASS
11BE80CDD	Ant1+2	6465	-4.55	4.46	≤5.00	PASS
11BE80CDD	Ant1+2	6545	-5.09	3.92	≤5.00	PASS
11BE80CDD	Ant1+2	6625	-5.54	3.47	≤5.00	PASS
11BE80CDD	Ant1+2	6705	-5.15	3.86	≤5.00	PASS
11BE80CDD	Ant1+2	6785	-5.15	3.86	≤5.00	PASS
11BE80CDD	Ant1+2	6865	-5.10	3.91	≤5.00	PASS
11BE80CDD	Ant1+2	6945	-5.43	3.58	≤5.00	PASS
11BE80CDD	Ant1+2	7025	-4.80	4.21	≤5.00	PASS
11BE160CDD	Ant1+2	6025	-4.90	4.11	≤5.00	PASS
11BE160CDD	Ant1+2	6185	-4.45	4.56	≤5.00	PASS
11BE160CDD	Ant1+2	6345	-4.72	4.29	≤5.00	PASS
11BE160CDD	Ant1+2	6505	-4.41	4.60	≤5.00	PASS
11BE160CDD	Ant1+2	6665	-4.37	4.64	≤5.00	PASS
11BE160CDD	Ant1+2	6825	-4.53	4.48	≤5.00	PASS
11BE160CDD	Ant1+2	6985	-4.83	4.18	≤5.00	PASS
11BE320CDD	Ant1+2	6105	-7.53	1.48	≤5.00	PASS
11BE320CDD	Ant1+2	6265	-7.35	1.66	≤5.00	PASS
11BE320CDD	Ant1+2	6425	-6.98	2.03	≤5.00	PASS
11BE320CDD	Ant1+2	6585	-7.38	1.63	≤5.00	PASS
11BE320CDD	Ant1+2	6745	-7.56	1.45	≤5.00	PASS
11BE320CDD	Ant1+2	6905	-7.99	1.02	≤5.00	PASS
11AX20Beamforming	Ant1+2	5955	-8.78	3.23	≤5.00	PASS
11AX20Beamforming	Ant1+2	6175	-8.31	3.70	≤5.00	PASS
11AX20Beamforming	Ant1+2	6415	-8.65	3.36	≤5.00	PASS
11AX20Beamforming	Ant1+2	6435	-8.65	3.36	≤5.00	PASS
11AX20Beamforming	Ant1+2	6475	-8.26	3.75	≤5.00	PASS
11AX20Beamforming	Ant1+2	6515	-8.40	3.61	≤5.00	PASS
11AX20Beamforming	Ant1+2	6535	-7.94	4.07	≤5.00	PASS
11AX20Beamforming	Ant1+2	6695	-8.26	3.75	≤5.00	PASS

11AX20Beamforming	Ant1+2	6855	-8.50	3.51	≤5.00	PASS
11AX20Beamforming	Ant1+2	6875	-8.55	3.46	≤5.00	PASS
11AX20Beamforming	Ant1+2	6895	-8.67	3.34	≤5.00	PASS
11AX20Beamforming	Ant1+2	6995	-8.47	3.54	≤5.00	PASS
11AX20Beamforming	Ant1+2	7115	-8.44	3.57	≤5.00	PASS
11AX40Beamforming	Ant1+2	5965	-8.24	3.77	≤5.00	PASS
11AX40Beamforming	Ant1+2	6165	-7.86	4.15	≤5.00	PASS
11AX40Beamforming	Ant1+2	6405	-8.45	3.56	≤5.00	PASS
11AX40Beamforming	Ant1+2	6445	-8.31	3.70	≤5.00	PASS
11AX40Beamforming	Ant1+2	6485	-8.04	3.97	≤5.00	PASS
11AX40Beamforming	Ant1+2	6525	-8.84	3.17	≤5.00	PASS
11AX40Beamforming	Ant1+2	6565	-9.00	3.01	≤5.00	PASS
11AX40Beamforming	Ant1+2	6685	-8.80	3.21	≤5.00	PASS
11AX40Beamforming	Ant1+2	6845	-7.91	4.10	≤5.00	PASS
11AX40Beamforming	Ant1+2	6885	-8.08	3.93	≤5.00	PASS
11AX40Beamforming	Ant1+2	6925	-8.05	3.96	≤5.00	PASS
11AX40Beamforming	Ant1+2	6965	-7.77	4.24	≤5.00	PASS
11AX40Beamforming	Ant1+2	7085	-9.00	3.01	≤5.00	PASS
11AX80Beamforming	Ant1+2	5985	-9.02	2.99	≤5.00	PASS
11AX80Beamforming	Ant1+2	6145	-8.98	3.03	≤5.00	PASS
11AX80Beamforming	Ant1+2	6385	-7.92	4.09	≤5.00	PASS
11AX80Beamforming	Ant1+2	6465	-7.77	4.24	≤5.00	PASS
11AX80Beamforming	Ant1+2	6545	-8.45	3.56	≤5.00	PASS
11AX80Beamforming	Ant1+2	6625	-8.59	3.42	≤5.00	PASS
11AX80Beamforming	Ant1+2	6705	-8.26	3.75	≤5.00	PASS
11AX80Beamforming	Ant1+2	6785	-8.32	3.69	≤5.00	PASS
11AX80Beamforming	Ant1+2	6865	-8.00	4.01	≤5.00	PASS
11AX80Beamforming	Ant1+2	6945	-8.11	3.90	≤5.00	PASS
11AX80Beamforming	Ant1+2	7025	-7.48	4.53	≤5.00	PASS
11AX160Beamforming	Ant1+2	6025	-8.11	3.90	≤5.00	PASS
11AX160Beamforming	Ant1+2	6185	-8.47	3.54	≤5.00	PASS
11AX160Beamforming	Ant1+2	6345	-7.87	4.14	≤5.00	PASS
11AX160Beamforming	Ant1+2	6505	-7.63	4.38	≤5.00	PASS
11AX160Beamforming	Ant1+2	6665	-8.21	3.80	≤5.00	PASS
11AX160Beamforming	Ant1+2	6825	-8.33	3.68	≤5.00	PASS
11AX160Beamforming	Ant1+2	6985	-8.59	3.42	≤5.00	PASS
11BE20Beamforming	Ant1+2	5955	-8.55	3.46	≤5.00	PASS
11BE20Beamforming	Ant1+2	6175	-8.25	3.76	≤5.00	PASS
11BE20Beamforming	Ant1+2	6415	-8.63	3.38	≤5.00	PASS
11BE20Beamforming	Ant1+2	6435	-8.58	3.43	≤5.00	PASS
11BE20Beamforming	Ant1+2	6475	-8.31	3.70	≤5.00	PASS
11BE20Beamforming	Ant1+2	6515	-8.36	3.65	≤5.00	PASS
11BE20Beamforming	Ant1+2	6535	-7.98	4.03	≤5.00	PASS
11BE20Beamforming	Ant1+2	6695	-8.10	3.91	≤5.00	PASS
11BE20Beamforming	Ant1+2	6855	-8.54	3.47	≤5.00	PASS
11BE20Beamforming	Ant1+2	6875	-8.61	3.40	≤5.00	PASS
11BE20Beamforming	Ant1+2	6895	-8.65	3.36	≤5.00	PASS
11BE20Beamforming	Ant1+2	6995	-8.46	3.55	≤5.00	PASS
11BE20Beamforming	Ant1+2	7115	-8.38	3.63	≤5.00	PASS
11BE40Beamforming	Ant1+2	5965	-8.16	3.85	≤5.00	PASS
11BE40Beamforming	Ant1+2	6165	-8.23	3.78	≤5.00	PASS

11BE40Beamforming	Ant1+2	6405	-8.47	3.54	≤5.00	PASS
11BE40Beamforming	Ant1+2	6445	-8.30	3.71	≤5.00	PASS
11BE40Beamforming	Ant1+2	6485	-8.21	3.80	≤5.00	PASS
11BE40Beamforming	Ant1+2	6525	-8.96	3.05	≤5.00	PASS
11BE40Beamforming	Ant1+2	6565	-8.98	3.03	≤5.00	PASS
11BE40Beamforming	Ant1+2	6685	-8.67	3.34	≤5.00	PASS
11BE40Beamforming	Ant1+2	6845	-8.12	3.89	≤5.00	PASS
11BE40Beamforming	Ant1+2	6885	-8.37	3.64	≤5.00	PASS
11BE40Beamforming	Ant1+2	6925	-8.56	3.45	≤5.00	PASS
11BE40Beamforming	Ant1+2	6965	-8.23	3.78	≤5.00	PASS
11BE40Beamforming	Ant1+2	7085	-9.21	2.80	≤5.00	PASS
11BE80Beamforming	Ant1+2	5985	-8.96	3.05	≤5.00	PASS
11BE80Beamforming	Ant1+2	6145	-9.07	2.94	≤5.00	PASS
11BE80Beamforming	Ant1+2	6385	-7.93	4.08	≤5.00	PASS
11BE80Beamforming	Ant1+2	6465	-7.72	4.29	≤5.00	PASS
11BE80Beamforming	Ant1+2	6545	-8.43	3.58	≤5.00	PASS
11BE80Beamforming	Ant1+2	6625	-8.54	3.47	≤5.00	PASS
11BE80Beamforming	Ant1+2	6705	-8.11	3.90	≤5.00	PASS
11BE80Beamforming	Ant1+2	6785	-8.27	3.74	≤5.00	PASS
11BE80Beamforming	Ant1+2	6865	-8.01	4.00	≤5.00	PASS
11BE80Beamforming	Ant1+2	6945	-8.27	3.74	≤5.00	PASS
11BE80Beamforming	Ant1+2	7025	-7.64	4.37	≤5.00	PASS
11BE160Beamforming	Ant1+2	6025	-7.84	4.17	≤5.00	PASS
11BE160Beamforming	Ant1+2	6185	-8.31	3.70	≤5.00	PASS
11BE160Beamforming	Ant1+2	6345	-7.73	4.28	≤5.00	PASS
11BE160Beamforming	Ant1+2	6505	-7.55	4.46	≤5.00	PASS
11BE160Beamforming	Ant1+2	6665	-8.09	3.92	≤5.00	PASS
11BE160Beamforming	Ant1+2	6825	-8.20	3.81	≤5.00	PASS
11BE160Beamforming	Ant1+2	6985	-8.59	3.42	≤5.00	PASS
11BE320 Beamforming	Ant1+2	6105	-8.5	3.51	≤5.00	PASS
11BE320 Beamforming	Ant1+2	6265	-8.44	3.57	≤5.00	PASS
11BE320 Beamforming	Ant1	6425	-7.91	4.1	≤5.00	PASS
11BE320 Beamforming	Ant1+2	6585	-8.41	3.6	≤5.00	PASS
11BE320 Beamforming	Ant1+2	6745	-8.57	3.44	≤5.00	PASS
11BE320 Beamforming	Ant1+2	6905	-9.12	2.89	≤5.00	PASS

Note : 1.The Duty Cycle Factor and RBW Factor is compensated in the graph.

Note : 2. EIRP PSD = Result + Gain .

Low-power client devices & Dual Client:

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	EIRP PSD [dBm/MHz]	Limit[dBm/MHz]	Verdict
11AX20SISO	Ant1	5955	-8.04	-2.04	≤-1.00	PASS
11AX20SISO	Ant1	6175	-7.78	-1.78	≤-1.00	PASS
11AX20SISO	Ant1	6415	-7.71	-1.71	≤-1.00	PASS
11AX20SISO	Ant1	6435	-7.72	-1.72	≤-1.00	PASS
11AX20SISO	Ant1	6475	-7.57	-1.57	≤-1.00	PASS
11AX20SISO	Ant1	6515	-7.62	-1.62	≤-1.00	PASS
11AX20SISO	Ant1	6535	-7.67	-1.67	≤-1.00	PASS
11AX20SISO	Ant1	6695	-7.11	-1.11	≤-1.00	PASS
11AX20SISO	Ant1	6855	-7.48	-1.48	≤-1.00	PASS
11AX20SISO	Ant1	6875	-7.61	-1.61	≤-1.00	PASS
11AX20SISO	Ant1	6895	-7.59	-1.59	≤-1.00	PASS
11AX20SISO	Ant1	6995	-7.41	-1.41	≤-1.00	PASS
11AX20SISO	Ant1	7115	-7.66	-1.66	≤-1.00	PASS
11AX40SISO	Ant1	5965	-7.80	-1.8	≤-1.00	PASS
11AX40SISO	Ant1	6165	-7.34	-1.34	≤-1.00	PASS
11AX40SISO	Ant1	6405	-7.31	-1.31	≤-1.00	PASS
11AX40SISO	Ant1	6445	-7.11	-1.11	≤-1.00	PASS
11AX40SISO	Ant1	6485	-7.31	-1.31	≤-1.00	PASS
11AX40SISO	Ant1	6525	-7.60	-1.6	≤-1.00	PASS
11AX40SISO	Ant1	6565	-7.92	-1.92	≤-1.00	PASS
11AX40SISO	Ant1	6685	-8.15	-2.15	≤-1.00	PASS
11AX40SISO	Ant1	6845	-7.37	-1.37	≤-1.00	PASS
11AX40SISO	Ant1	6885	-7.71	-1.71	≤-1.00	PASS
11AX40SISO	Ant1	6925	-7.57	-1.57	≤-1.00	PASS
11AX40SISO	Ant1	6965	-7.51	-1.51	≤-1.00	PASS
11AX40SISO	Ant1	7085	-7.22	-1.22	≤-1.00	PASS
11AX80SISO	Ant1	5985	-7.13	-1.13	≤-1.00	PASS
11AX80SISO	Ant1	6145	-7.51	-1.51	≤-1.00	PASS
11AX80SISO	Ant1	6385	-7.70	-1.7	≤-1.00	PASS
11AX80SISO	Ant1	6465	-7.44	-1.44	≤-1.00	PASS
11AX80SISO	Ant1	6545	-7.94	-1.94	≤-1.00	PASS
11AX80SISO	Ant1	6625	-7.32	-1.32	≤-1.00	PASS
11AX80SISO	Ant1	6705	-8.02	-2.02	≤-1.00	PASS
11AX80SISO	Ant1	6785	-7.93	-1.93	≤-1.00	PASS
11AX80SISO	Ant1	6865	-7.65	-1.65	≤-1.00	PASS
11AX80SISO	Ant1	6945	-7.80	-1.8	≤-1.00	PASS
11AX80SISO	Ant1	7025	-7.66	-1.66	≤-1.00	PASS
11AX160SISO	Ant1	6025	-7.19	-1.19	≤-1.00	PASS
11AX160SISO	Ant1	6185	-7.10	-1.1	≤-1.00	PASS
11AX160SISO	Ant1	6345	-7.78	-1.78	≤-1.00	PASS
11AX160SISO	Ant1	6505	-7.48	-1.48	≤-1.00	PASS
11AX160SISO	Ant1	6665	-7.43	-1.43	≤-1.00	PASS
11AX160SISO	Ant1	6825	-7.79	-1.79	≤-1.00	PASS
11AX160SISO	Ant1	6985	-7.56	-1.56	≤-1.00	PASS
11BE20SISO	Ant1	5955	-7.78	-1.78	≤-1.00	PASS
11BE20SISO	Ant1	6175	-7.60	-1.6	≤-1.00	PASS
11BE20SISO	Ant1	6415	-7.59	-1.59	≤-1.00	PASS
11BE20SISO	Ant1	6435	-7.60	-1.6	≤-1.00	PASS

11BE20SISO	Ant1	6475	-7.46	-1.46	≤-1.00	PASS
11BE20SISO	Ant1	6515	-7.56	-1.56	≤-1.00	PASS
11BE20SISO	Ant1	6535	-7.58	-1.58	≤-1.00	PASS
11BE20SISO	Ant1	6695	-7.06	-1.06	≤-1.00	PASS
11BE20SISO	Ant1	6855	-7.40	-1.4	≤-1.00	PASS
11BE20SISO	Ant1	6875	-7.38	-1.38	≤-1.00	PASS
11BE20SISO	Ant1	6895	-7.35	-1.35	≤-1.00	PASS
11BE20SISO	Ant1	6995	-7.23	-1.23	≤-1.00	PASS
11BE20SISO	Ant1	7115	-7.49	-1.49	≤-1.00	PASS
11BE40SISO	Ant1	5965	-7.89	-1.89	≤-1.00	PASS
11BE40SISO	Ant1	6165	-7.40	-1.4	≤-1.00	PASS
11BE40SISO	Ant1	6405	-7.43	-1.43	≤-1.00	PASS
11BE40SISO	Ant1	6445	-7.23	-1.23	≤-1.00	PASS
11BE40SISO	Ant1	6485	-7.43	-1.43	≤-1.00	PASS
11BE40SISO	Ant1	6525	-7.74	-1.74	≤-1.00	PASS
11BE40SISO	Ant1	6565	-8.03	-2.03	≤-1.00	PASS
11BE40SISO	Ant1	6685	-8.28	-2.28	≤-1.00	PASS
11BE40SISO	Ant1	6845	-7.41	-1.41	≤-1.00	PASS
11BE40SISO	Ant1	6885	-7.77	-1.77	≤-1.00	PASS
11BE40SISO	Ant1	6925	-7.69	-1.69	≤-1.00	PASS
11BE40SISO	Ant1	6965	-7.64	-1.64	≤-1.00	PASS
11BE40SISO	Ant1	7085	-7.26	-1.26	≤-1.00	PASS
11BE80SISO	Ant1	5985	-8.03	-2.03	≤-1.00	PASS
11BE80SISO	Ant1	6145	-7.39	-1.39	≤-1.00	PASS
11BE80SISO	Ant1	6385	-7.67	-1.67	≤-1.00	PASS
11BE80SISO	Ant1	6465	-7.48	-1.48	≤-1.00	PASS
11BE80SISO	Ant1	6545	-7.98	-1.98	≤-1.00	PASS
11BE80SISO	Ant1	6625	-7.38	-1.38	≤-1.00	PASS
11BE80SISO	Ant1	6705	-8.05	-2.05	≤-1.00	PASS
11BE80SISO	Ant1	6785	-7.84	-1.84	≤-1.00	PASS
11BE80SISO	Ant1	6865	-7.61	-1.61	≤-1.00	PASS
11BE80SISO	Ant1	6945	-7.71	-1.71	≤-1.00	PASS
11BE80SISO	Ant1	7025	-7.61	-1.61	≤-1.00	PASS
11BE160SISO	Ant1	6025	-7.02	-1.02	≤-1.00	PASS
11BE160SISO	Ant1	6185	-8.01	-2.01	≤-1.00	PASS
11BE160SISO	Ant1	6345	-7.70	-1.7	≤-1.00	PASS
11BE160SISO	Ant1	6505	-7.43	-1.43	≤-1.00	PASS
11BE160SISO	Ant1	6665	-7.43	-1.43	≤-1.00	PASS
11BE160SISO	Ant1	6825	-7.77	-1.77	≤-1.00	PASS
11BE160SISO	Ant1	6985	-7.52	-1.52	≤-1.00	PASS
11BE320SISO	Ant1	6105	-10.78	-4.78	≤-1.00	PASS
11BE320SISO	Ant1	6265	-10.89	-4.89	≤-1.00	PASS
11BE320SISO	Ant1	6425	-11.59	-5.59	≤-1.00	PASS
11BE320SISO	Ant1	6585	-11.80	-5.8	≤-1.00	PASS
11BE320SISO	Ant1	6745	-11.47	-5.47	≤-1.00	PASS
11BE320SISO	Ant1	6905	-11.98	-5.98	≤-1.00	PASS
TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	EIRP PSD [dBm/MHz]	Limit[dBm/MHz]	Verdict
11AX20CDD	Ant1+2	5955	-13.95	-1.93	≤-1.00	PASS
11AX20CDD	Ant1+2	6175	-13.92	-1.9	≤-1.00	PASS

11AX20CDD	Ant1+2	6415	-14.04	-2.02	≤-1.00	PASS
11AX20CDD	Ant1+2	6435	-14.13	-2.11	≤-1.00	PASS
11AX20CDD	Ant1+2	6475	-13.98	-1.96	≤-1.00	PASS
11AX20CDD	Ant1+2	6515	-14.04	-2.02	≤-1.00	PASS
11AX20CDD	Ant1+2	6535	-13.91	-1.89	≤-1.00	PASS
11AX20CDD	Ant1+2	6695	-13.34	-1.32	≤-1.00	PASS
11AX20CDD	Ant1+2	6855	-13.97	-1.95	≤-1.00	PASS
11AX20CDD	Ant1+2	6875	-14.08	-2.06	≤-1.00	PASS
11AX20CDD	Ant1+2	6895	-14.00	-1.93	≤-1.00	PASS
11AX20CDD	Ant1+2	6995	-13.77	-1.75	≤-1.00	PASS
11AX20CDD	Ant1+2	7115	-13.90	-1.88	≤-1.00	PASS
11AX40CDD	Ant1+2	5965	-13.84	-1.82	≤-1.00	PASS
11AX40CDD	Ant1+2	6165	-13.75	-1.73	≤-1.00	PASS
11AX40CDD	Ant1+2	6405	-14.13	-2.11	≤-1.00	PASS
11AX40CDD	Ant1+2	6445	-14.00	-1.98	≤-1.00	PASS
11AX40CDD	Ant1+2	6485	-13.90	-1.88	≤-1.00	PASS
11AX40CDD	Ant1+2	6525	-13.83	-1.81	≤-1.00	PASS
11AX40CDD	Ant1+2	6565	-13.81	-1.79	≤-1.00	PASS
11AX40CDD	Ant1+2	6685	-13.99	-1.97	≤-1.00	PASS
11AX40CDD	Ant1+2	6845	-13.62	-1.6	≤-1.00	PASS
11AX40CDD	Ant1+2	6885	-14.05	-2.03	≤-1.00	PASS
11AX40CDD	Ant1+2	6925	-13.93	-1.91	≤-1.00	PASS
11AX40CDD	Ant1+2	6965	-13.95	-1.93	≤-1.00	PASS
11AX40CDD	Ant1+2	7085	-13.74	-1.72	≤-1.00	PASS
11AX80CDD	Ant1+2	5985	-13.73	-1.71	≤-1.00	PASS
11AX80CDD	Ant1+2	6145	-13.99	-1.97	≤-1.00	PASS
11AX80CDD	Ant1+2	6385	-13.39	-1.37	≤-1.00	PASS
11AX80CDD	Ant1+2	6465	-13.96	-1.94	≤-1.00	PASS
11AX80CDD	Ant1+2	6545	-14.01	-1.99	≤-1.00	PASS
11AX80CDD	Ant1+2	6625	-13.74	-1.72	≤-1.00	PASS
11AX80CDD	Ant1+2	6705	-13.60	-1.58	≤-1.00	PASS
11AX80CDD	Ant1+2	6785	-14.14	-2.12	≤-1.00	PASS
11AX80CDD	Ant1+2	6865	-13.85	-1.83	≤-1.00	PASS
11AX80CDD	Ant1+2	6945	-13.95	-1.93	≤-1.00	PASS
11AX80CDD	Ant1+2	7025	-13.84	-1.82	≤-1.00	PASS
11AX160CDD	Ant1+2	6025	-13.41	-1.39	≤-1.00	PASS
11AX160CDD	Ant1+2	6185	-13.40	-1.38	≤-1.00	PASS
11AX160CDD	Ant1+2	6345	-14.08	-2.06	≤-1.00	PASS
11AX160CDD	Ant1+2	6505	-13.88	-1.86	≤-1.00	PASS
11AX160CDD	Ant1+2	6665	-14.13	-2.11	≤-1.00	PASS
11AX160CDD	Ant1+2	6825	-13.94	-1.92	≤-1.00	PASS
11AX160CDD	Ant1+2	6985	-13.56	-1.54	≤-1.00	PASS
11BE20CDDO	Ant1+2	5955	-14.09	-2.07	≤-1.00	PASS
11BE20CDDO	Ant1+2	6175	-13.84	-1.82	≤-1.00	PASS
11BE20CDDO	Ant1+2	6415	-13.36	-1.34	≤-1.00	PASS
11BE20CDDO	Ant1+2	6435	-13.34	-1.32	≤-1.00	PASS
11BE20CDDO	Ant1+2	6475	-14.08	-2.06	≤-1.00	PASS
11BE20CDDO	Ant1+2	6515	-14.10	-2.08	≤-1.00	PASS
11BE20CDDO	Ant1+2	6535	-13.83	-1.81	≤-1.00	PASS

11BE20CDDO	Ant1+2	6695	-13.39	-1.37	≤-1.00	PASS
11BE20CDDO	Ant1+2	6855	-13.78	-1.76	≤-1.00	PASS
11BE20CDDO	Ant1+2	6875	-14.00	-1.98	≤-1.00	PASS
11BE20CDDO	Ant1+2	6895	-14.00	-1.98	≤-1.00	PASS
11BE20CDDO	Ant1+2	6995	-13.65	-1.63	≤-1.00	PASS
11BE20CDDO	Ant1+2	7115	-13.82	-1.8	≤-1.00	PASS
11BE40CDDO	Ant1+2	5965	-13.71	-1.69	≤-1.00	PASS
11BE40CDDO	Ant1+2	6165	-13.61	-1.59	≤-1.00	PASS
11BE40CDDO	Ant1+2	6405	-13.94	-1.92	≤-1.00	PASS
11BE40CDDO	Ant1+2	6445	-13.98	-1.96	≤-1.00	PASS
11BE40CDDO	Ant1+2	6485	-13.93	-1.91	≤-1.00	PASS
11BE40CDDO	Ant1+2	6525	-13.82	-1.8	≤-1.00	PASS
11BE40CDDO	Ant1+2	6565	-13.75	-1.73	≤-1.00	PASS
11BE40CDDO	Ant1+2	6685	-13.88	-1.86	≤-1.00	PASS
11BE40CDDO	Ant1+2	6845	-13.76	-1.74	≤-1.00	PASS
11BE40CDDO	Ant1+2	6885	-13.99	-1.97	≤-1.00	PASS
11BE40CDDO	Ant1+2	6925	-13.89	-1.87	≤-1.00	PASS
11BE40CDDO	Ant1+2	6965	-13.89	-1.87	≤-1.00	PASS
11BE40CDDO	Ant1+2	7085	-13.70	-1.68	≤-1.00	PASS
11BE80CDDO	Ant1+2	5985	-13.65	-1.63	≤-1.00	PASS
11BE80CDDO	Ant1+2	6145	-13.98	-1.96	≤-1.00	PASS
11BE80CDDO	Ant1+2	6385	-13.35	-1.33	≤-1.00	PASS
11BE80CDDO	Ant1+2	6465	-13.94	-1.92	≤-1.00	PASS
11BE80CDDO	Ant1+2	6545	-13.96	-1.94	≤-1.00	PASS
11BE80CDDO	Ant1+2	6625	-13.66	-1.64	≤-1.00	PASS
11BE80CDDO	Ant1+2	6705	-13.59	-1.57	≤-1.00	PASS
11BE80CDDO	Ant1+2	6785	-14.14	-2.12	≤-1.00	PASS
11BE80CDDO	Ant1+2	6865	-13.79	-1.77	≤-1.00	PASS
11BE80CDDO	Ant1+2	6945	-13.97	-1.95	≤-1.00	PASS
11BE80CDDO	Ant1+2	7025	-13.75	-1.73	≤-1.00	PASS
11BE160CDDO	Ant1+2	6025	-13.43	-1.41	≤-1.00	PASS
11BE160CDDO	Ant1+2	6185	-13.40	-1.38	≤-1.00	PASS
11BE160CDDO	Ant1+2	6345	-14.11	-2.09	≤-1.00	PASS
11BE160CDDO	Ant1+2	6505	-13.82	-1.8	≤-1.00	PASS
11BE160CDDO	Ant1+2	6665	-14.10	-2.08	≤-1.00	PASS
11BE160CDDO	Ant1+2	6825	-13.93	-1.91	≤-1.00	PASS
11BE160CDDO	Ant1+2	6985	-13.50	-1.48	≤-1.00	PASS
11BE320CDD	Ant1+2	6105	-16.70	-4.68	≤-1.00	PASS
11BE320CDD	Ant1+2	6265	-16.87	-4.85	≤-1.00	PASS
11BE320CDD	Ant1+2	6425	-16.63	-4.61	≤-1.00	PASS
11BE320CDD	Ant1+2	6585	-16.65	-4.63	≤-1.00	PASS
11BE320CDD	Ant1+2	6745	-16.22	-4.2	≤-1.00	PASS
11BE320CDD	Ant1+2	6905	-16.87	-4.85	≤-1.00	PASS
TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	EIRP PSD [dBm/MHz]	Limit[dBm/MHz]	Verdict
11AX20Beamforming	Ant1+2	5955	-16.98	-1.95	≤-1.00	PASS
11AX20Beamforming	Ant1+2	6175	-16.88	-1.85	≤-1.00	PASS
11AX20Beamforming	Ant1+2	6415	-16.11	-1.08	≤-1.00	PASS
11AX20Beamforming	Ant1+2	6435	-16.13	-1.1	≤-1.00	PASS
11AX20Beamforming	Ant1+2	6475	-16.76	-1.73	≤-1.00	PASS

11AX20Beamforming	Ant1+2	6515	-16.85	-1.82	≤-1.00	PASS
11AX20Beamforming	Ant1+2	6535	-16.68	-1.65	≤-1.00	PASS
11AX20Beamforming	Ant1+2	6695	-17.05	-2.02	≤-1.00	PASS
11AX20Beamforming	Ant1+2	6855	-16.68	-1.65	≤-1.00	PASS
11AX20Beamforming	Ant1+2	6875	-16.70	-1.67	≤-1.00	PASS
11AX20Beamforming	Ant1+2	6895	-16.70	-1.67	≤-1.00	PASS
11AX20Beamforming	Ant1+2	6995	-16.44	-1.41	≤-1.00	PASS
11AX20Beamforming	Ant1+2	7115	-16.82	-1.79	≤-1.00	PASS
11AX40Beamforming	Ant1+2	5965	-16.56	-1.53	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6165	-16.50	-1.47	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6405	-16.89	-1.86	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6445	-16.83	-1.8	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6485	-16.72	-1.69	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6525	-16.73	-1.7	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6565	-16.69	-1.66	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6685	-16.76	-1.73	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6845	-16.63	-1.6	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6885	-16.73	-1.7	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6925	-16.58	-1.55	≤-1.00	PASS
11AX40Beamforming	Ant1+2	6965	-16.60	-1.57	≤-1.00	PASS
11AX40Beamforming	Ant1+2	7085	-16.62	-1.59	≤-1.00	PASS
11AX80Beamforming	Ant1+2	5985	-16.79	-1.76	≤-1.00	PASS
11AX80Beamforming	Ant1+2	6145	-17.08	-2.05	≤-1.00	PASS
11AX80Beamforming	Ant1+2	6385	-16.54	-1.51	≤-1.00	PASS
11AX80Beamforming	Ant1+2	6465	-16.96	-1.93	≤-1.00	PASS
11AX80Beamforming	Ant1+2	6545	-16.94	-1.91	≤-1.00	PASS
11AX80Beamforming	Ant1+2	6625	-16.70	-1.67	≤-1.00	PASS
11AX80Beamforming	Ant1+2	6705	-16.50	-1.47	≤-1.00	PASS
11AX80Beamforming	Ant1+2	6785	-17.16	-2.13	≤-1.00	PASS
11AX80Beamforming	Ant1+2	6865	-16.87	-1.84	≤-1.00	PASS
11AX80Beamforming	Ant1+2	6945	-16.76	-1.73	≤-1.00	PASS
11AX80Beamforming	Ant1+2	7025	-16.67	-1.64	≤-1.00	PASS
11AX160Beamforming	Ant1+2	6025	-16.60	-1.57	≤-1.00	PASS
11AX160Beamforming	Ant1+2	6185	-16.81	-1.78	≤-1.00	PASS
11AX160Beamforming	Ant1+2	6345	-17.09	-2.06	≤-1.00	PASS
11AX160Beamforming	Ant1+2	6505	-16.15	-1.12	≤-1.00	PASS
11AX160Beamforming	Ant1+2	6665	-16.81	-1.78	≤-1.00	PASS
11AX160Beamforming	Ant1+2	6825	-16.73	-1.7	≤-1.00	PASS
11AX160Beamforming	Ant1+2	6985	-16.69	-1.66	≤-1.00	PASS
11BE20Beamforming	Ant1+2	5955	-16.98	-1.95	≤-1.00	PASS
11BE20Beamforming	Ant1+2	6175	-16.88	-1.85	≤-1.00	PASS
11BE20Beamforming	Ant1+2	6415	-16.11	-1.08	≤-1.00	PASS

11BE20Beamforming	Ant1+2	6435	-16.13	-1.1	≤-1.00	PASS
11BE20Beamforming	Ant1+2	6475	-16.76	-1.73	≤-1.00	PASS
11BE20Beamforming	Ant1+2	6515	-16.85	-1.82	≤-1.00	PASS
11BE20Beamforming	Ant1+2	6535	-16.68	-1.65	≤-1.00	PASS
11BE20Beamforming	Ant1+2	6695	-17.05	-2.02	≤-1.00	PASS
11BE20Beamforming	Ant1+2	6855	-16.68	-1.65	≤-1.00	PASS
11BE20Beamforming	Ant1+2	6875	-16.70	-1.67	≤-1.00	PASS
11BE20Beamforming	Ant1+2	6895	-16.70	-1.67	≤-1.00	PASS
11BE20Beamforming	Ant1+2	6995	-16.44	-1.41	≤-1.00	PASS
11BE20Beamforming	Ant1+2	7115	-16.82	-1.79	≤-1.00	PASS
11BE40Beamforming	Ant1+2	5965	-16.56	-1.53	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6165	-16.50	-1.47	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6405	-16.89	-1.86	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6445	-16.83	-1.8	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6485	-16.72	-1.69	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6525	-16.73	-1.7	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6565	-16.69	-1.66	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6685	-16.76	-1.73	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6845	-16.63	-1.6	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6885	-16.73	-1.7	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6925	-16.58	-1.55	≤-1.00	PASS
11BE40Beamforming	Ant1+2	6965	-16.60	-1.57	≤-1.00	PASS
11BE40Beamforming	Ant1+2	7085	-16.62	-1.59	≤-1.00	PASS
11BE80Beamforming	Ant1+2	5985	-16.79	-1.76	≤-1.00	PASS
11BE80Beamforming	Ant1+2	6145	-17.08	-2.05	≤-1.00	PASS
11BE80Beamforming	Ant1+2	6385	-16.54	-1.51	≤-1.00	PASS
11BE80Beamforming	Ant1+2	6465	-16.96	-1.93	≤-1.00	PASS
11BE80Beamforming	Ant1+2	6545	-16.94	-1.91	≤-1.00	PASS
11BE80Beamforming	Ant1+2	6625	-16.70	-1.67	≤-1.00	PASS
11BE80Beamforming	Ant1+2	6705	-16.50	-1.47	≤-1.00	PASS
11BE80Beamforming	Ant1+2	6785	-17.16	-2.13	≤-1.00	PASS
11BE80Beamforming	Ant1+2	6865	-16.87	-1.84	≤-1.00	PASS
11BE80Beamforming	Ant1+2	6945	-16.76	-1.73	≤-1.00	PASS
11BE80Beamforming	Ant1+2	7025	-16.67	-1.64	≤-1.00	PASS
11BE160Beamforming	Ant1+2	6025	-16.60	-1.57	≤-1.00	PASS
11BE160Beamforming	Ant1+2	6185	-16.81	-1.78	≤-1.00	PASS
11BE160Beamforming	Ant1+2	6345	-17.09	-2.06	≤-1.00	PASS
11BE160Beamforming	Ant1+2	6505	-16.15	-1.12	≤-1.00	PASS
11BE160Beamforming	Ant1+2	6665	-16.81	-1.78	≤-1.00	PASS
11BE160Beamforming	Ant1+2	6825	-16.73	-1.7	≤-1.00	PASS
11BE160Beamforming	Ant1+2	6985	-16.69	-1.66	≤-1.00	PASS
11BE320Beamforming	Ant1+2	6105	-16.70	-1.67	≤-1.00	PASS

11BE320Beamforming	Ant1+2	6265	-16.87	-1.84	≤ -1.00	PASS
11BE320Beamforming	Ant1+2	6425	-16.63	-1.6	≤ -1.00	PASS
11BE320Beamforming	Ant1+2	6585	-16.65	-1.62	≤ -1.00	PASS
11BE320Beamforming	Ant1+2	6745	-16.22	-1.19	≤ -1.00	PASS
11BE320Beamforming	Ant1+2	6905	-16.87	-1.84	≤ -1.00	PASS
Note : 1.The Duty Cycle Factor and RBW Factor is compensated in the graph.						
Note : 2. EIRP PSD = Result + Gain .						

Appendix F: Contention Based Protocol



Low-power indoor access points:



TestMode	EUT Frequency [MHz]	AWGN Frequency [MHz]	Injected AWGN Level (dBm)	Detection Rate(%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Antenna Gain(dBi)	Verdict	
802.11BE(20MHz)	6115	6115	-62.09	100	-62	-68.09	6.0	PASS	
			Rusult: Stop Transmission						
			-69.32	<90	-62	-75.32	6.0		
			Rusult: Minimal Operation						
			-72.66	0	-62	-78.66	6.0		
			Rusult: Normal Operation						
	6435	6435	-62.15	100	-62	-68.15	6.0		
			Rusult: Stop Transmission						
			-69.13	<90	-62	-75.13	6.0		
			Rusult: Minimal Operation						
			-72.39	0	-62	-78.39	6.0		
			Rusult: Normal Operation						
	6535	6535	-62.15	100	-62	-68.15	6.0		
			Rusult: Stop Transmission						
			-69.38	<90	-62	-75.38	6.0		
			Rusult: Minimal Operation						
			-72.22	0	-62	-78.22	6.0		
			Rusult: Normal Operation						
	6895	6895	-62.10	100	-62	-68.1	6.0		
			Rusult: Stop Transmission						
			-69.55	<90	-62	-75.55	6.0		
			Rusult: Minimal Operation						
			-72.19	0	-62	-78.19	6.0		
			Rusult: Normal Operation						

802.11BE320(MHz)	6265	6110	-62.38	100	-62	-68.38	6.0	PASS
			Rusult: Stop Transmission					
			-69.62	<90	-62	-75.62	6.0	
			Rusult: Minimal Operation					
			-72.19	0	-62	-78.19	6.0	
			Rusult: Normal Operation					
		6265	-62.50	100	-62	-68.5	6.0	
			Rusult: Stop Transmission					
			-69.42	<90	-62	-75.42	6.0	
			Rusult: Minimal Operation					
			-72.13	0	-62	-78.13	6.0	
			Rusult: Normal Operation					
		6420	-62.23	100	-62	-68.23	6.0	
			Rusult: Stop Transmission					
			-69.29	<90	-62	-75.29	6.0	
			Rusult: Minimal Operation					
			-72.21	0	-62	-78.21	6.0	
			Rusult: Normal Operation					
	6905	6750	-62.44	100	-62	-68.44	6.0	
			Rusult: Stop Transmission					
			-69.68	<90	-62	-75.68	6.0	
			Rusult: Minimal Operation					
			-72.29	0	-62	-78.29	6.0	
			Rusult: Normal Operation					
		6905	-62.46	100	-62	-68.46	6.0	
			Rusult: Stop Transmission					
			-69.35	<90	-62	-75.35	6.0	
			Rusult: Minimal Operation					
			-72.25	0	-62	-78.25	6.0	
			Rusult: Normal Operation					
		7060	-62.40	100	-62	-68.4	6.0	
			Rusult: Stop Transmission					
			-69.69	<90	-62	-75.69	6.0	
			Rusult: Minimal Operation					
			-72.51	0	-62	-78.51	6.0	
			Rusult: Normal Operation					


Note: Adjusted Power (dBm)= Injected AWGN Level (dBm) — Antenna Gain (dBi)

Note: Adjusted Power (dBm)= Injected AWGN Level (dBm) — Antenna Gain (dBi)

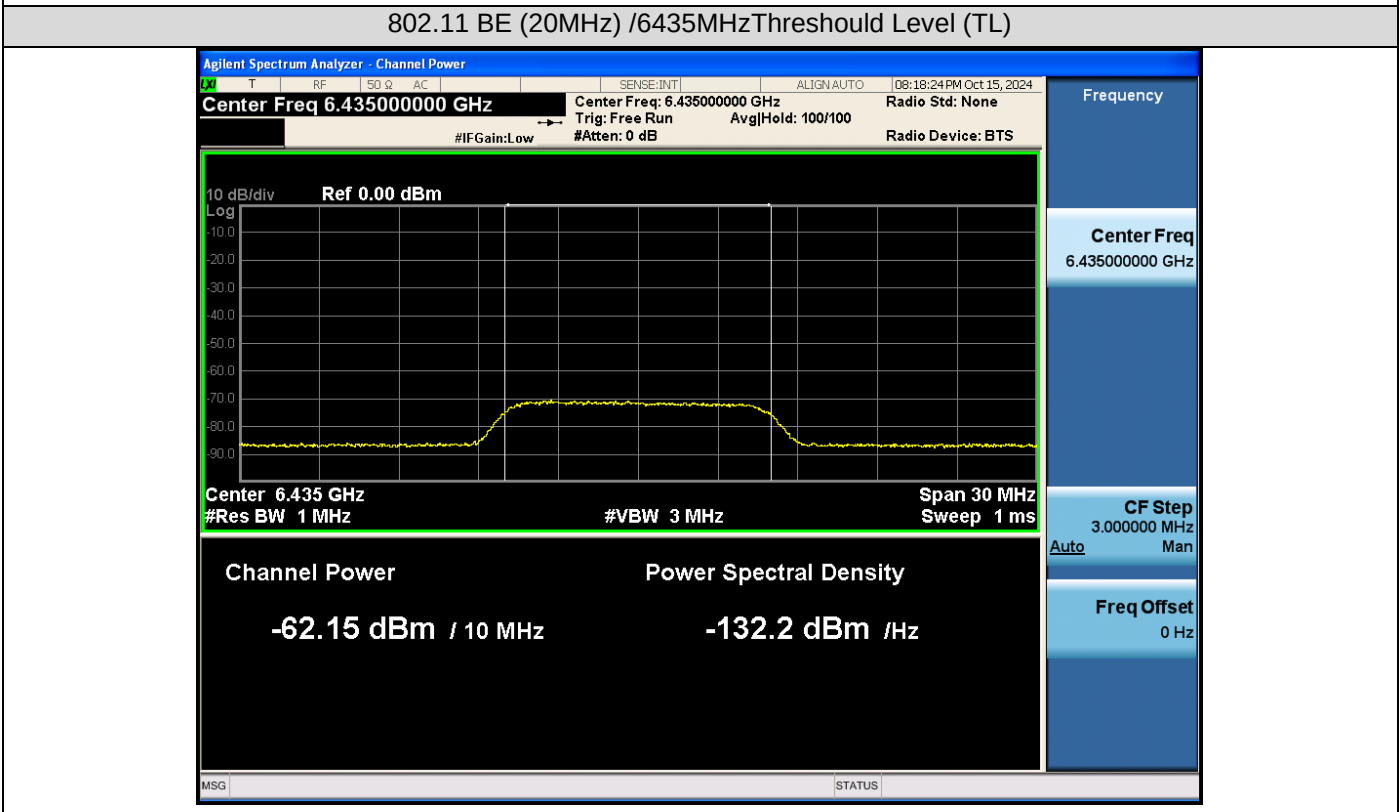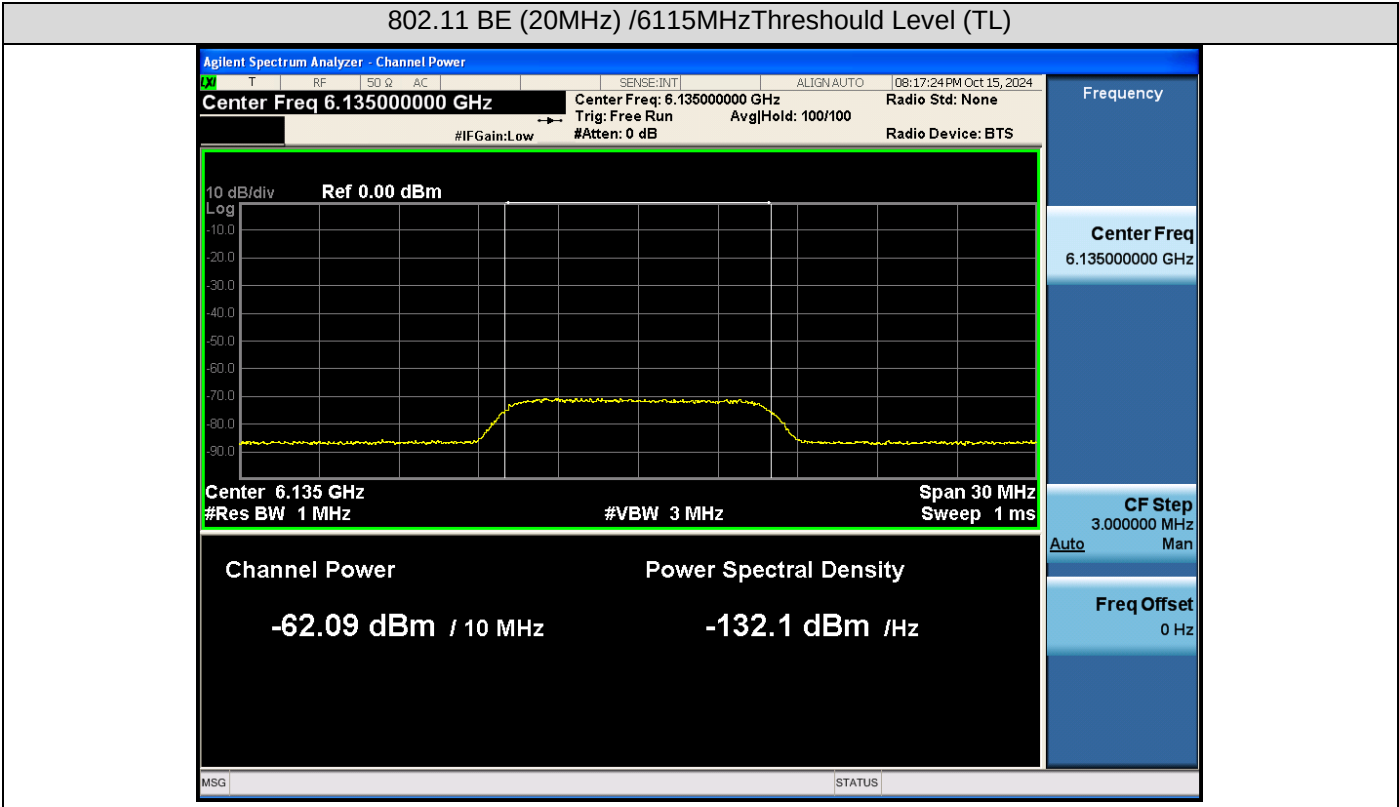


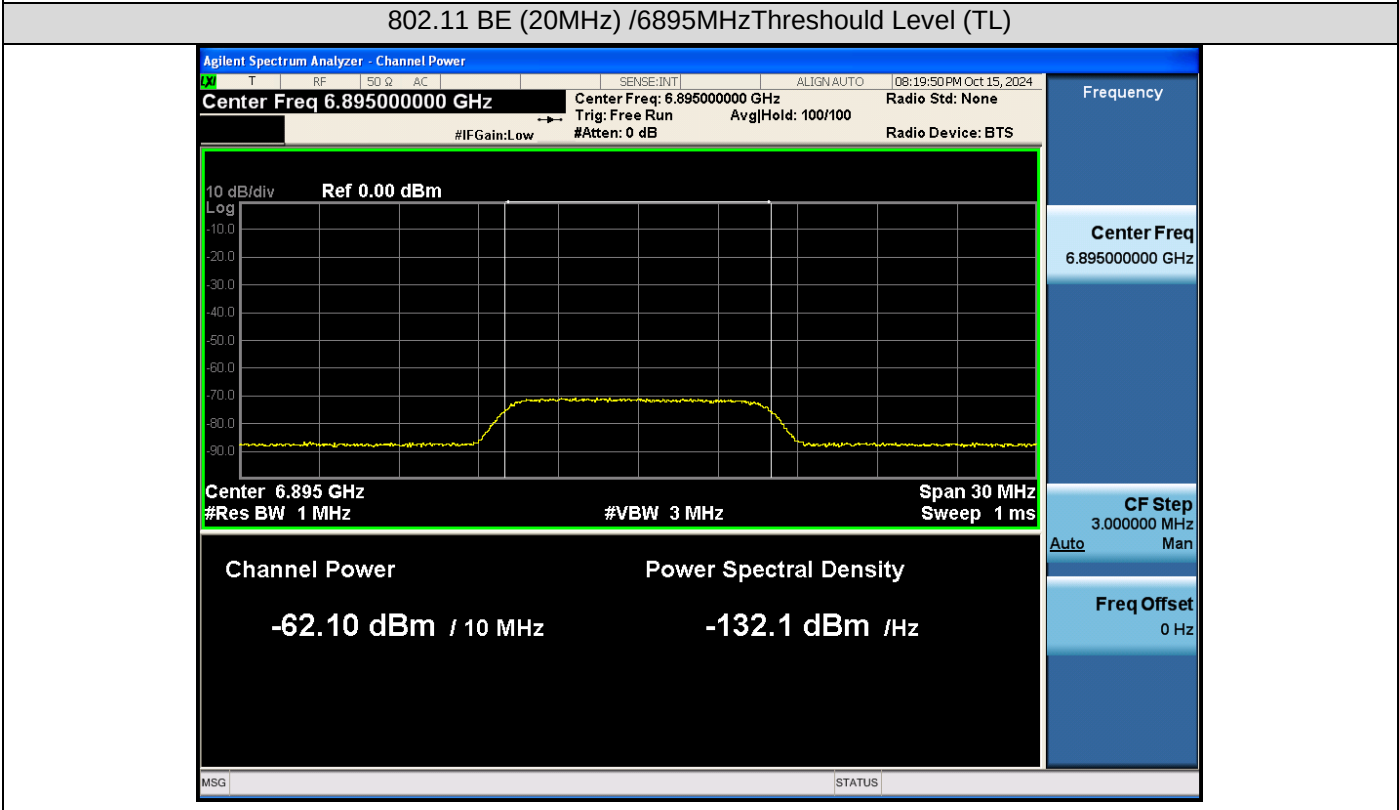
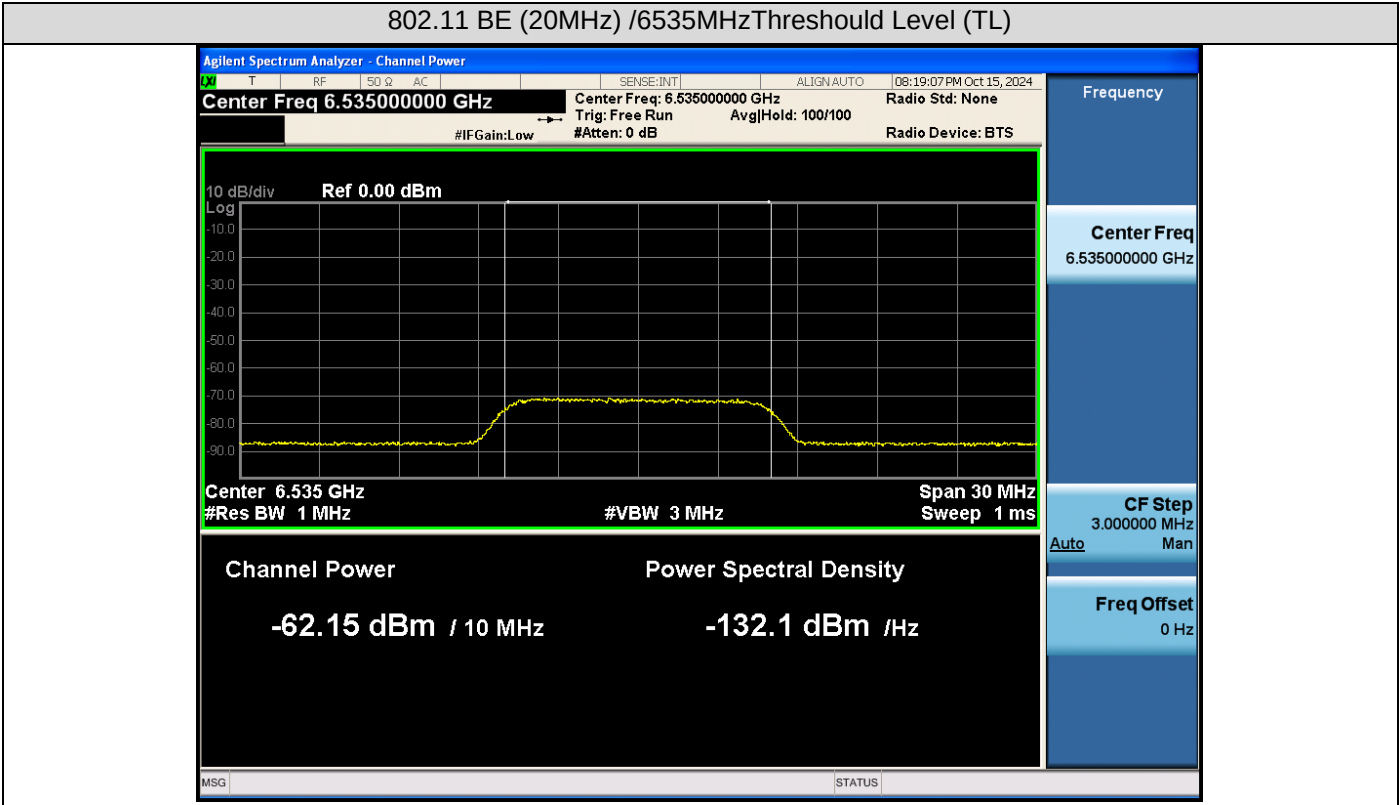


802.11 BE (320MHz) /6110MHzThreshold Level (TL)

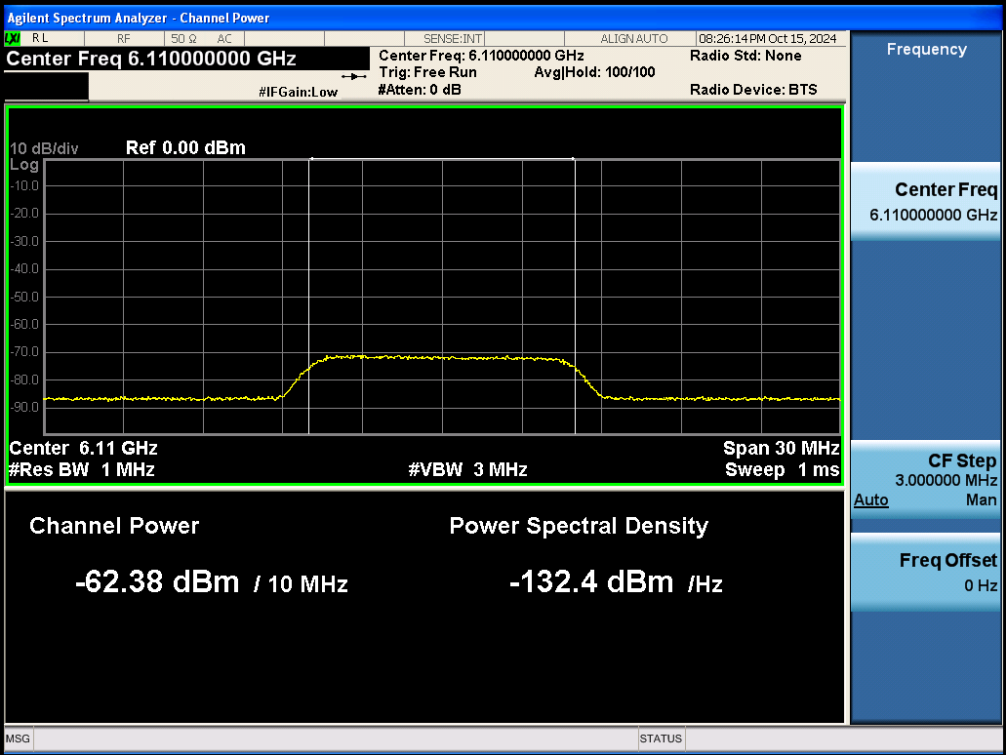


802.11 BE (320MHz) /6265MHzThreshold Level (TL)

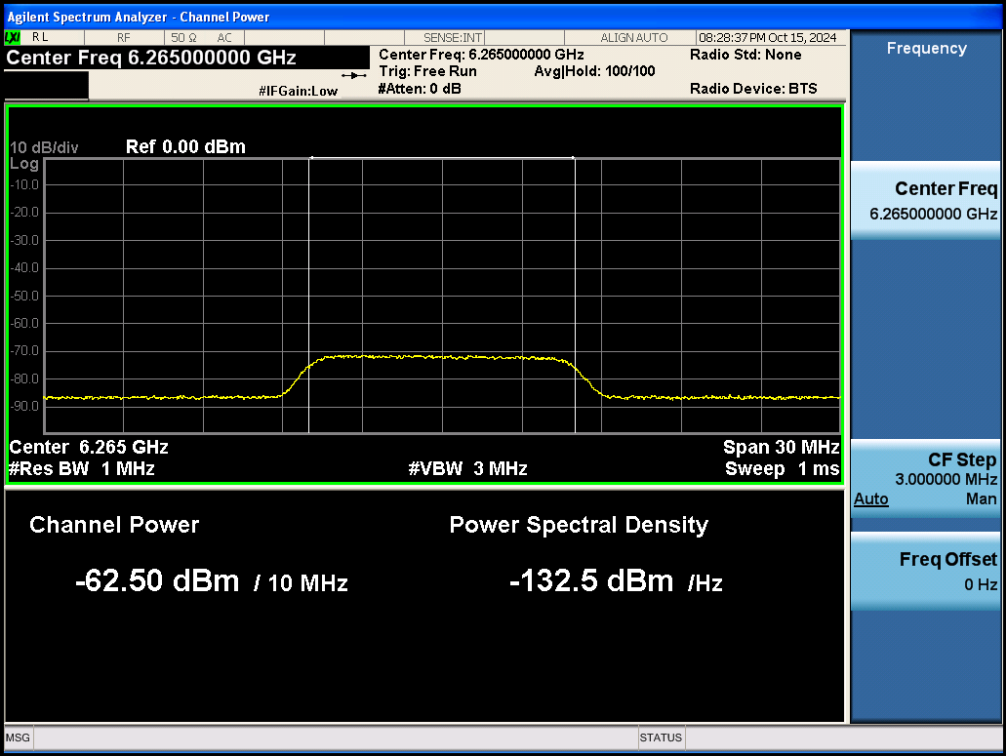


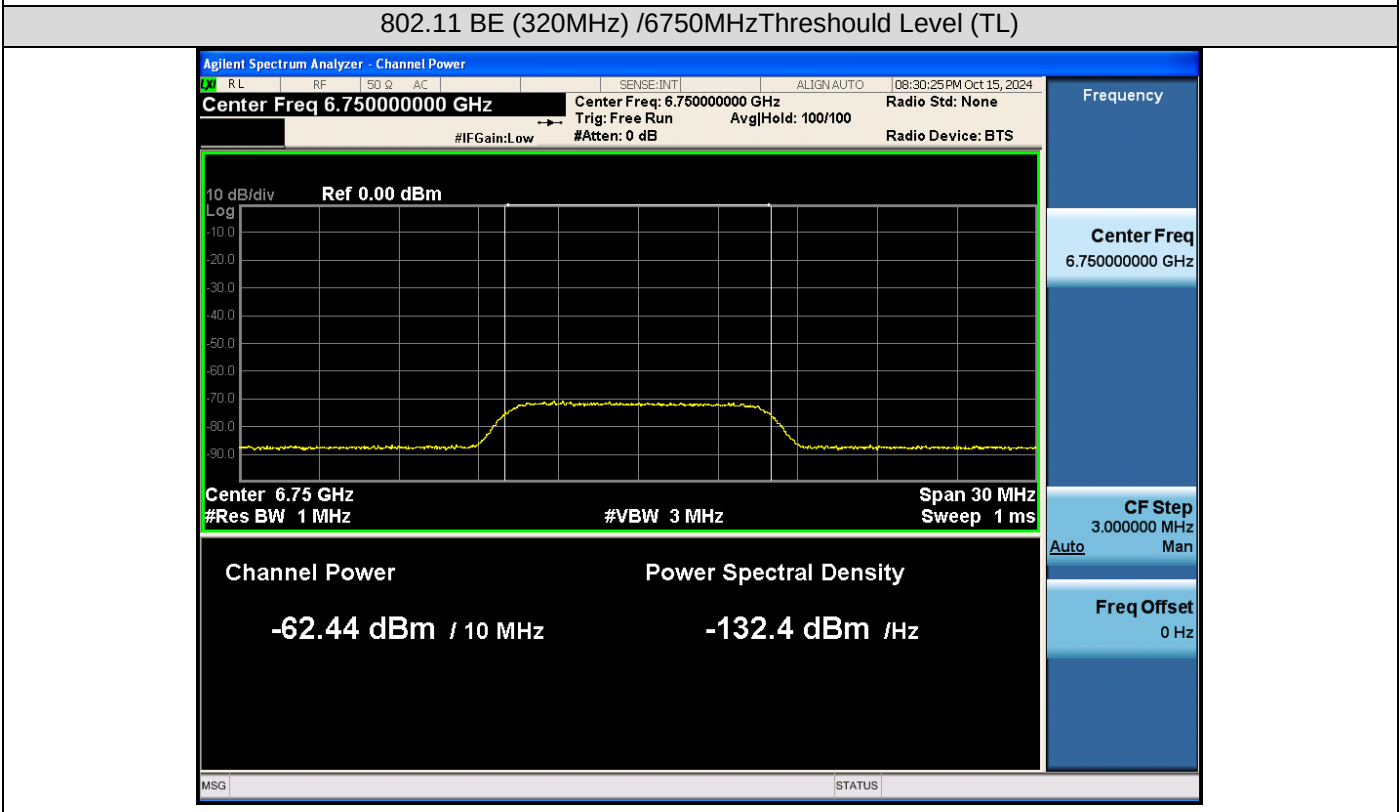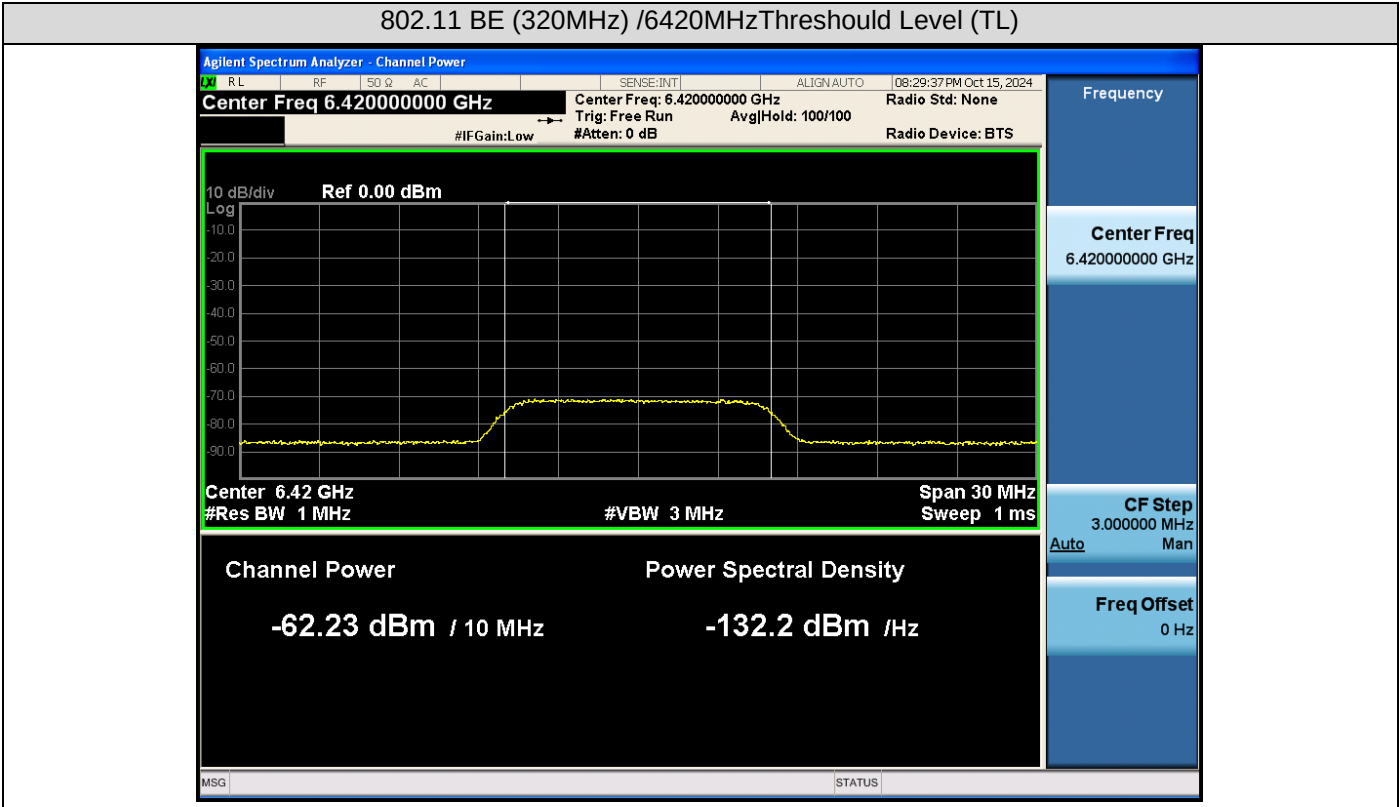


802.11 BE (320MHz) /6905MHzThreshold Level (TL)

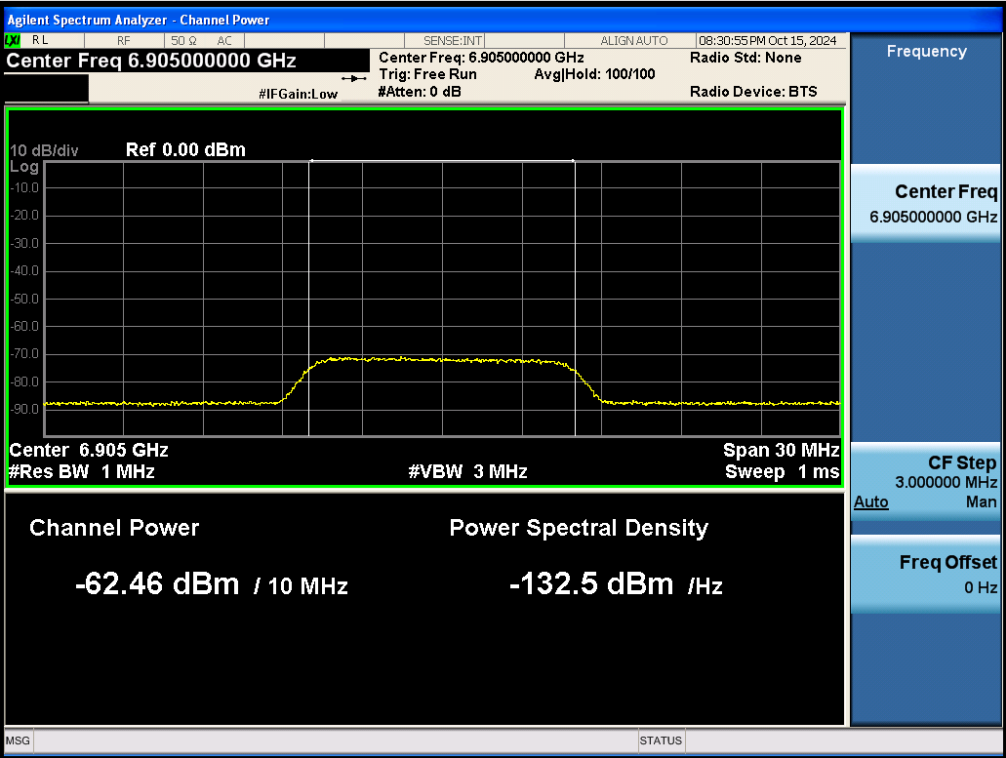


802.11 BE (320MHz) /7060MHzThreshold Level (TL)

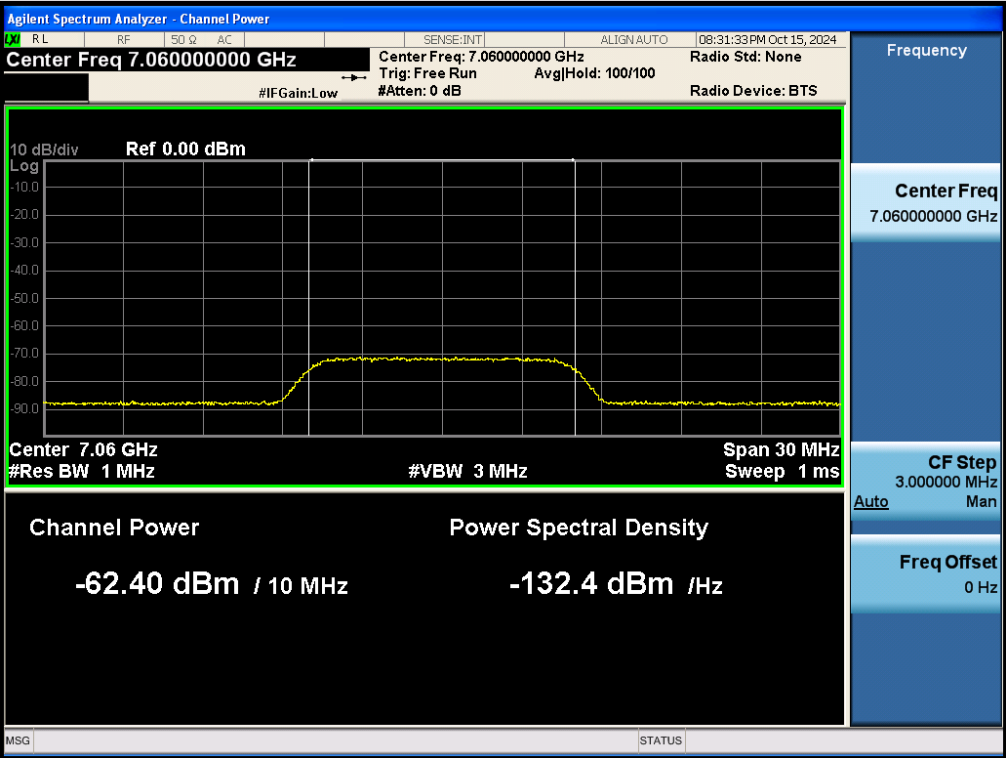


802.11 BE (20MHz) /6115MHz - Stop Transmission

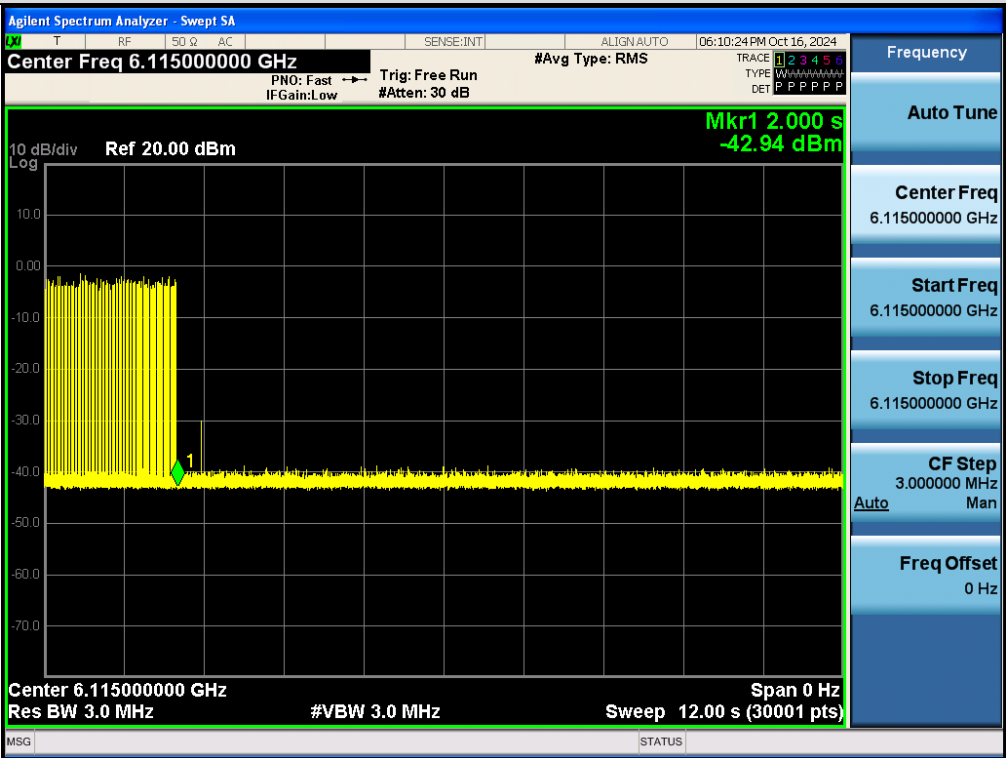


802.11 BE (20MHz) /6115MHz - Minimal Operation

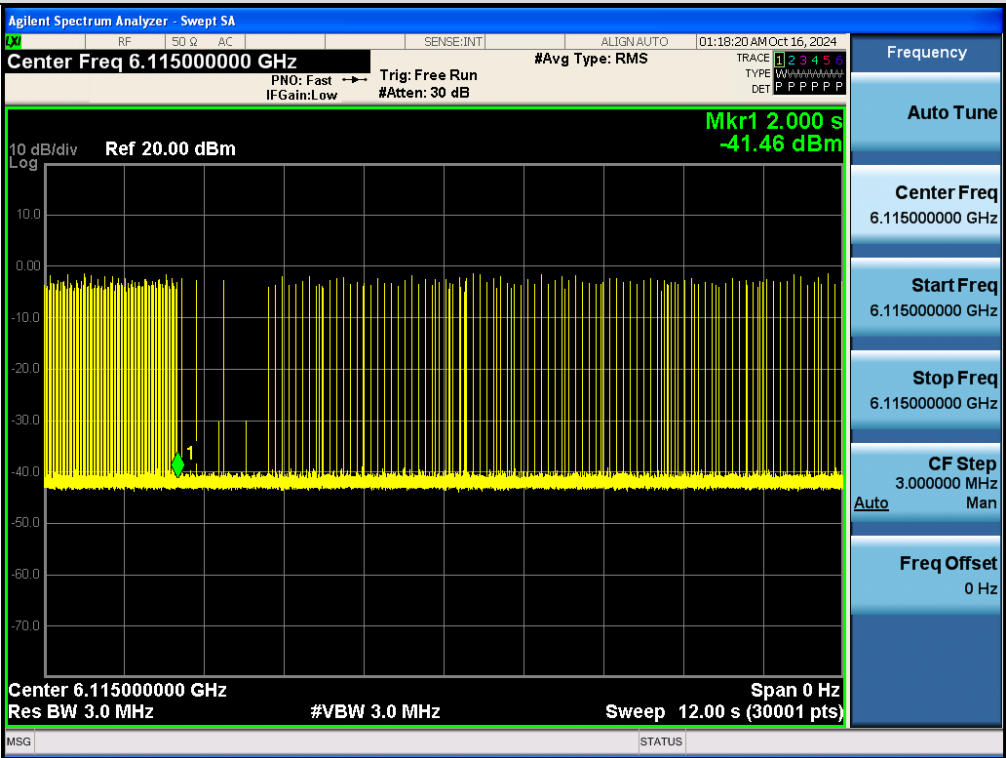


802.11 BE (20MHz) /6115MHz - Normal Operation

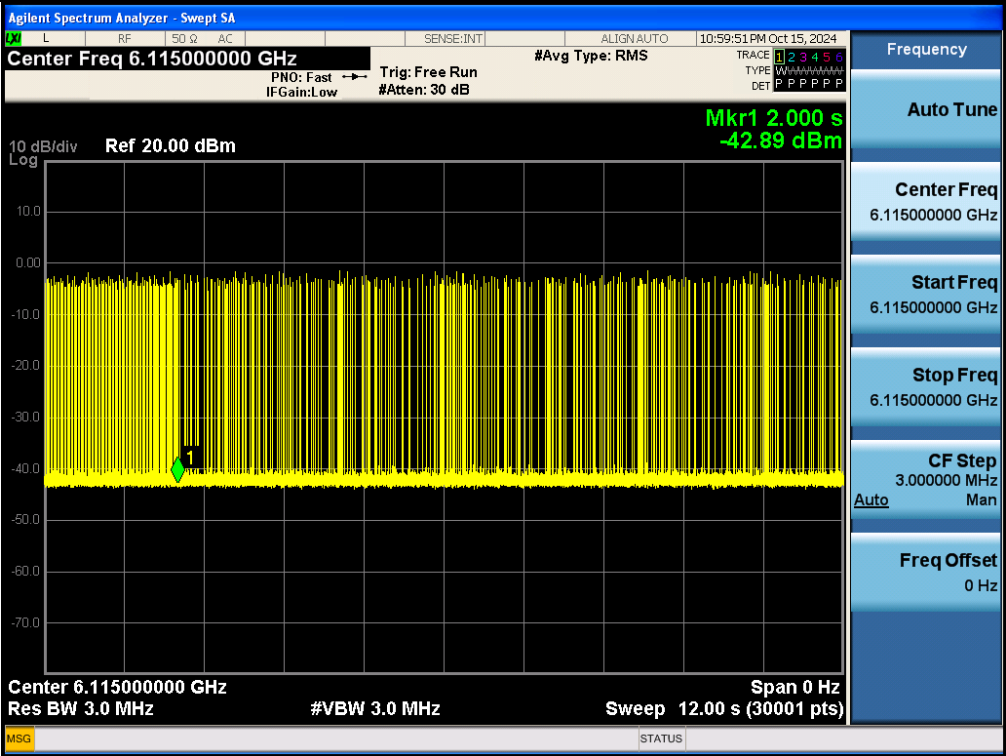


802.11 BE (20MHz) /6435MHz - Stop Transmission


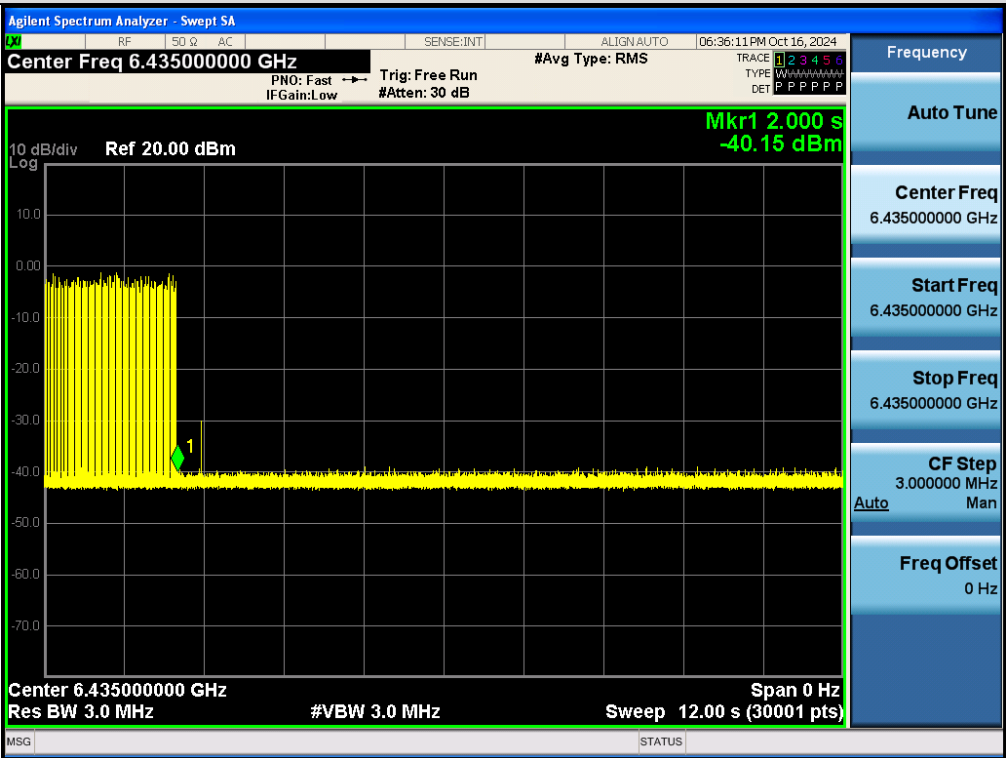




802.11 BE (20MHz) /6435MHz - Minimal Operation

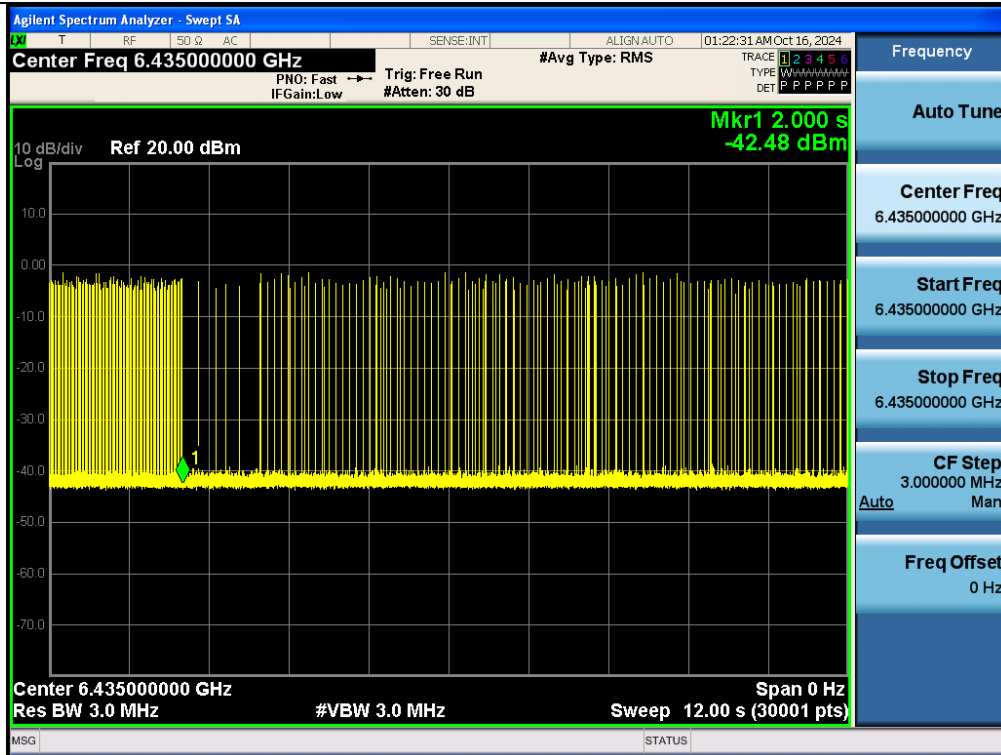


802.11 BE (20MHz) /6435MHz - Normal Operation

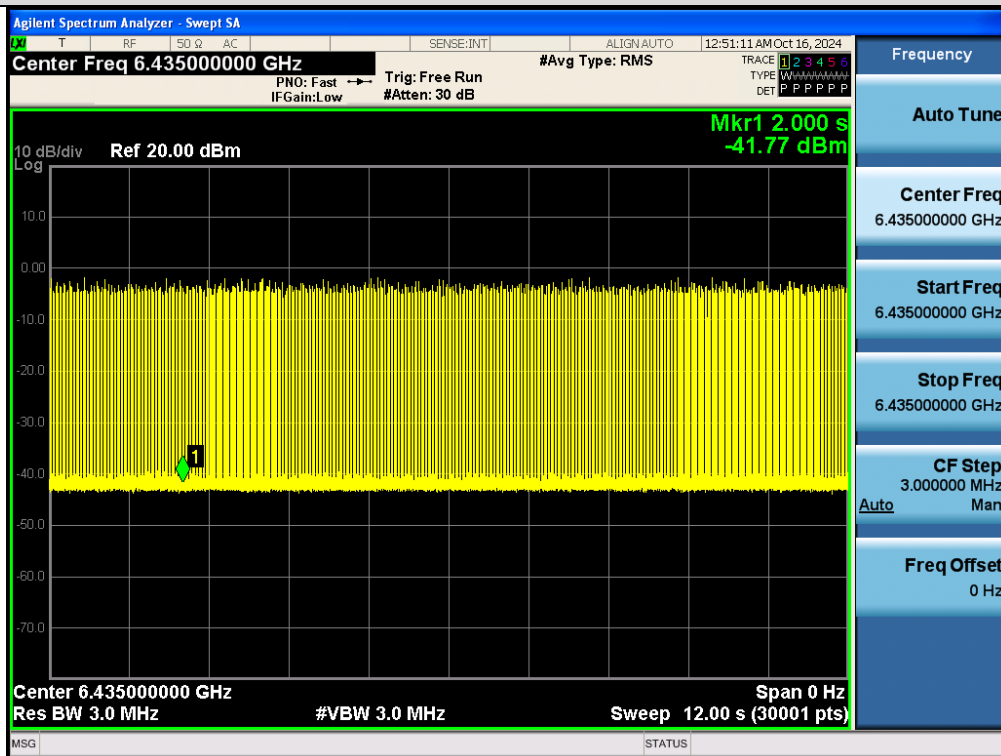

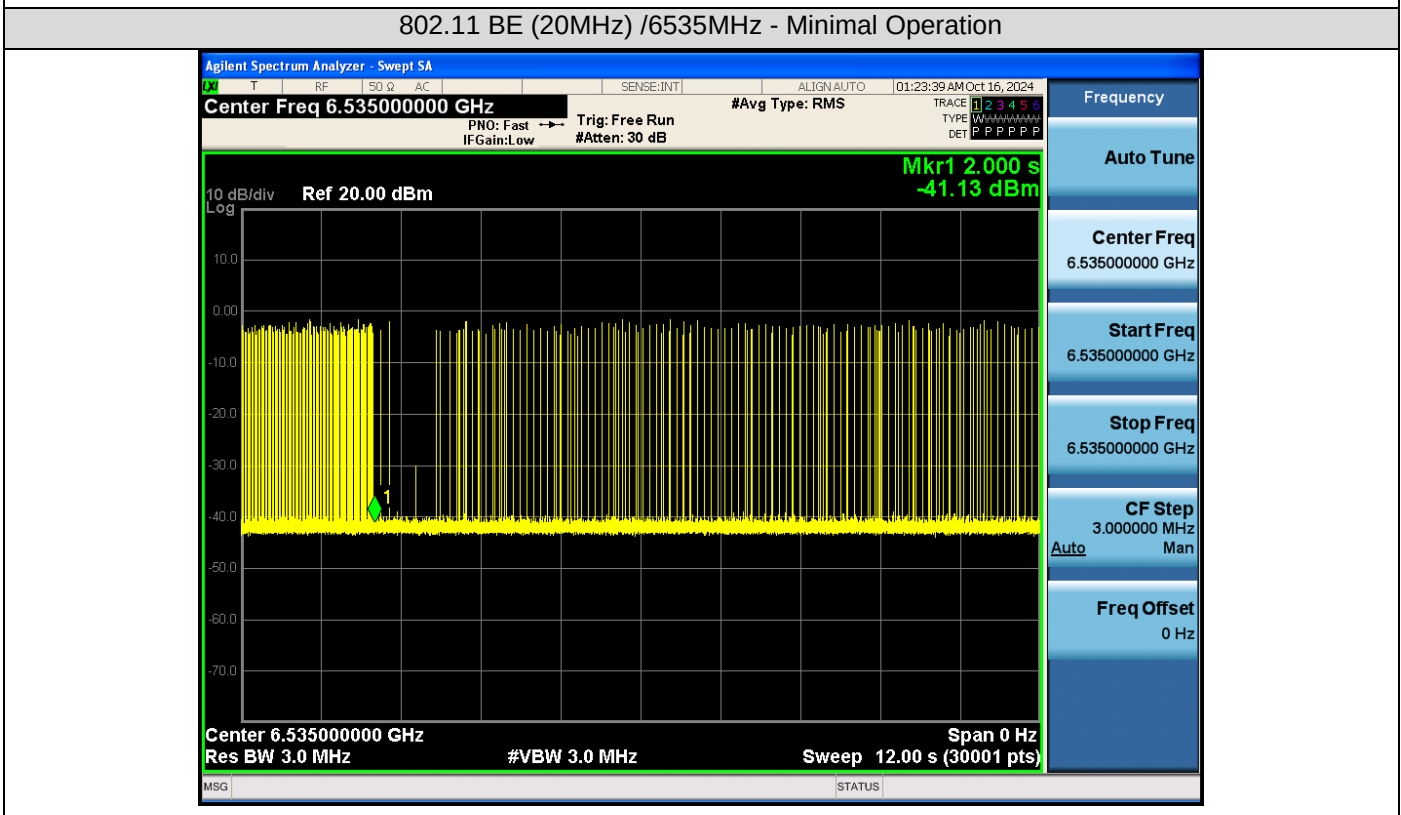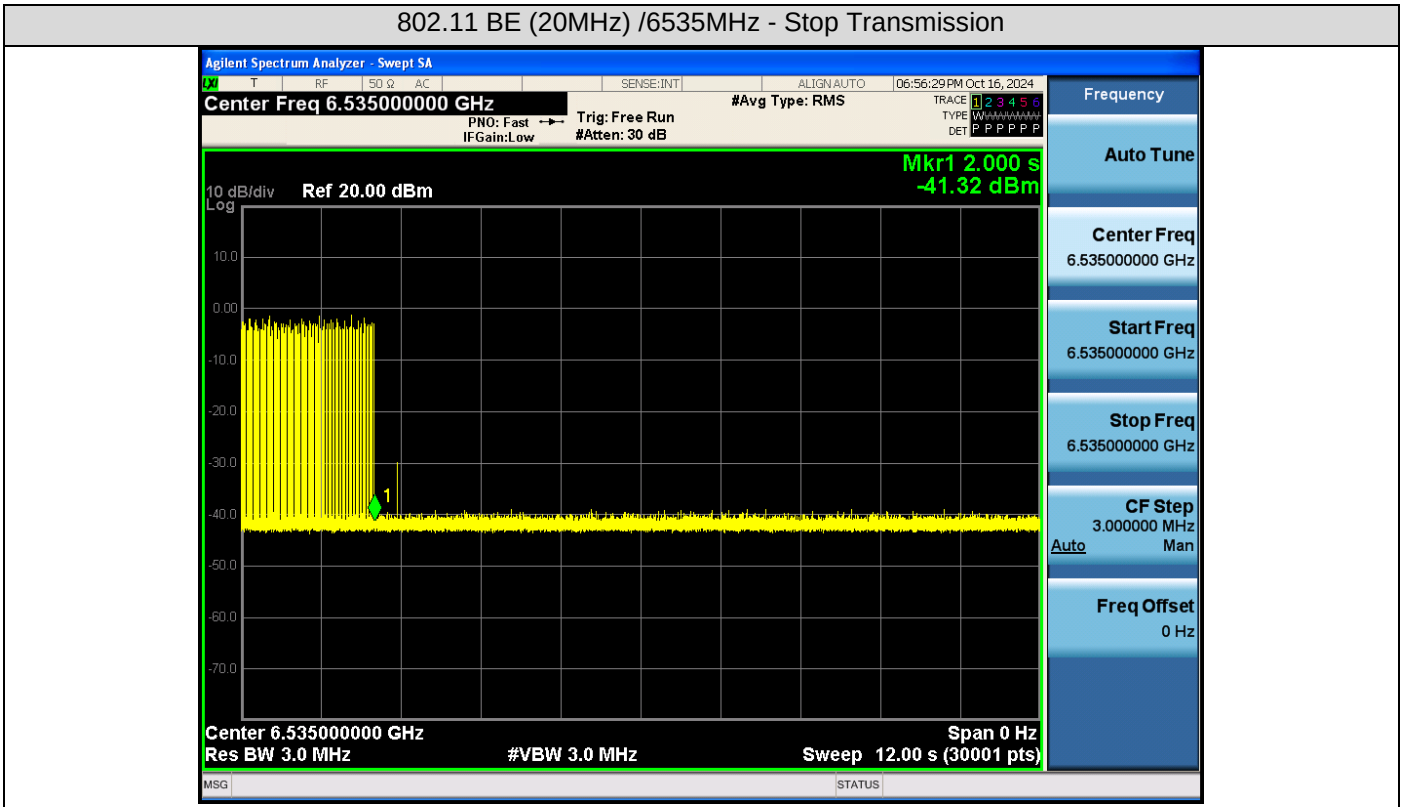


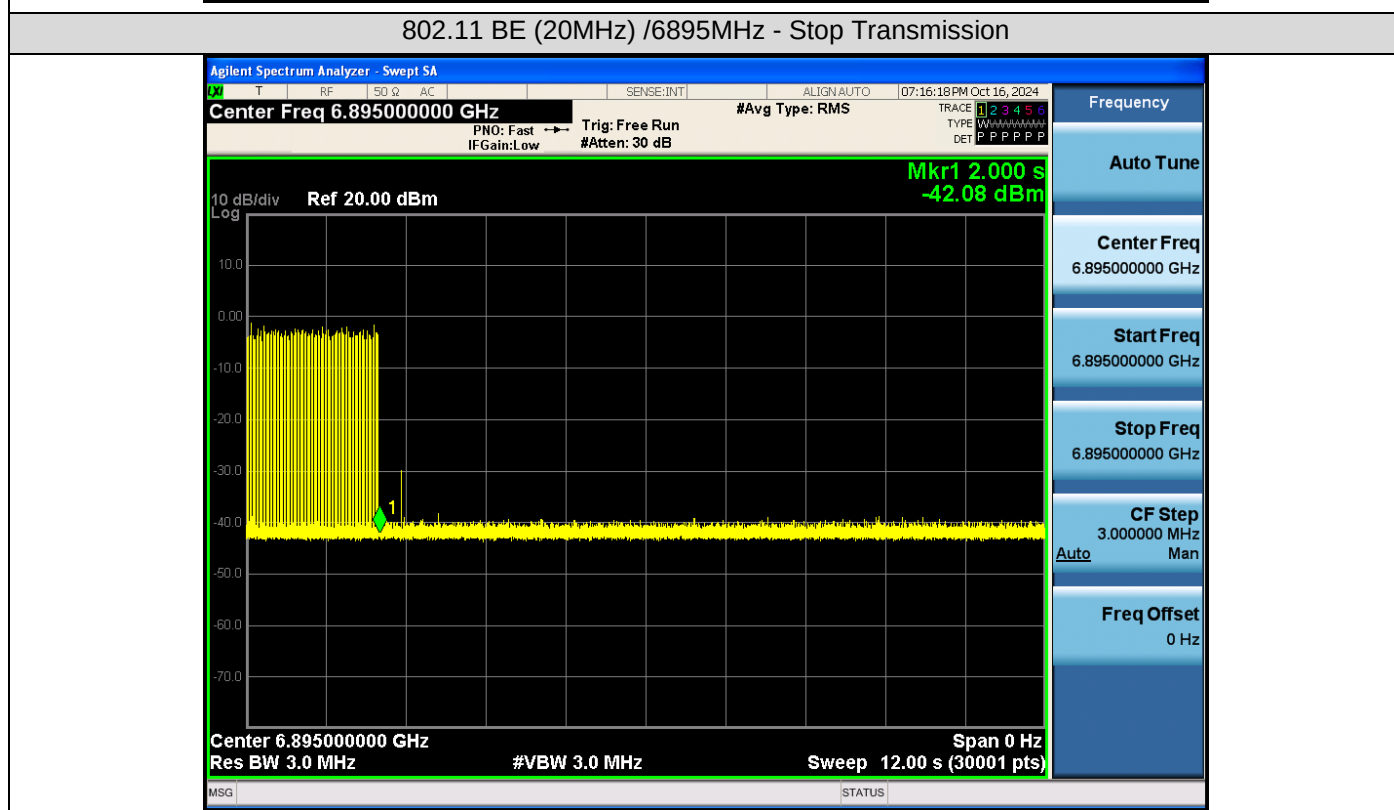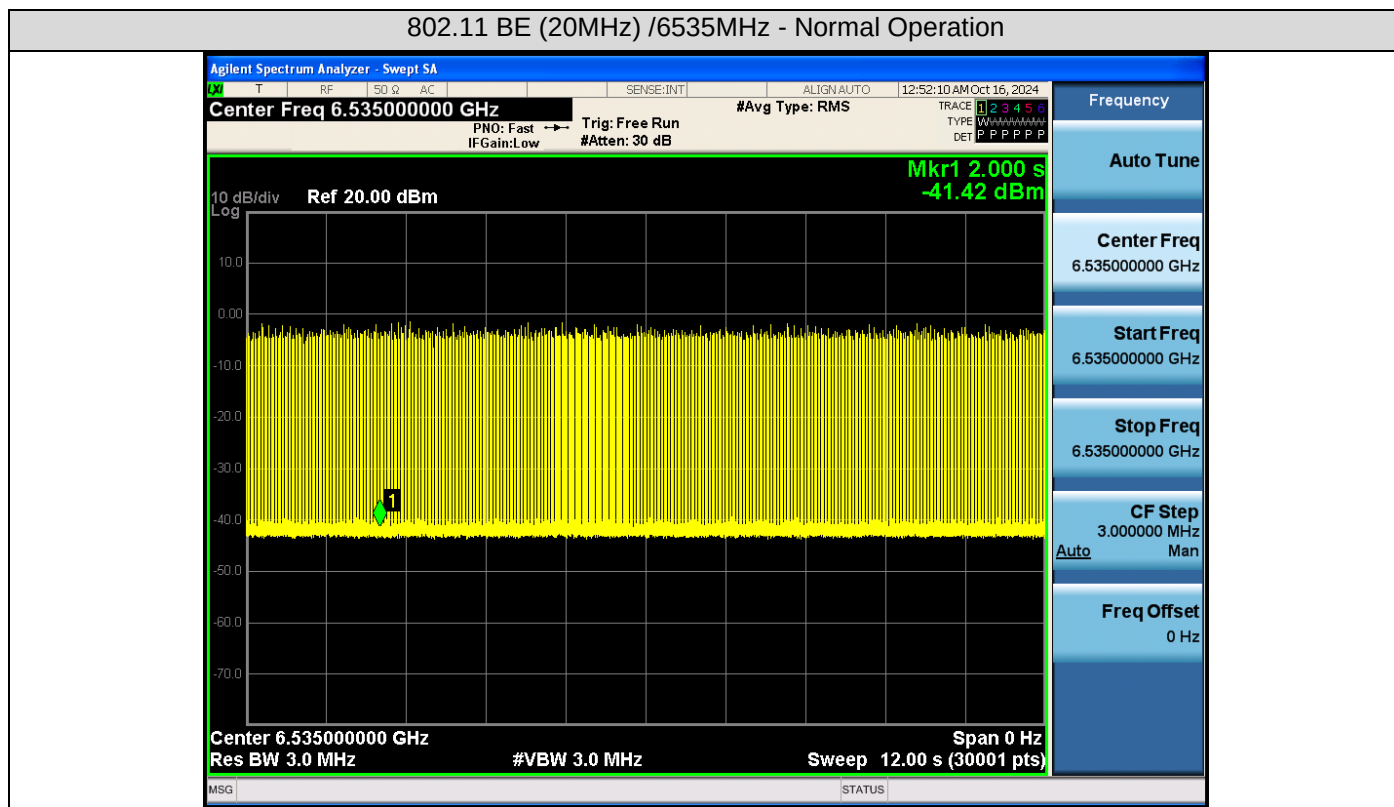


802.11 BE (20MHz) /6895MHz - Minimal Operation

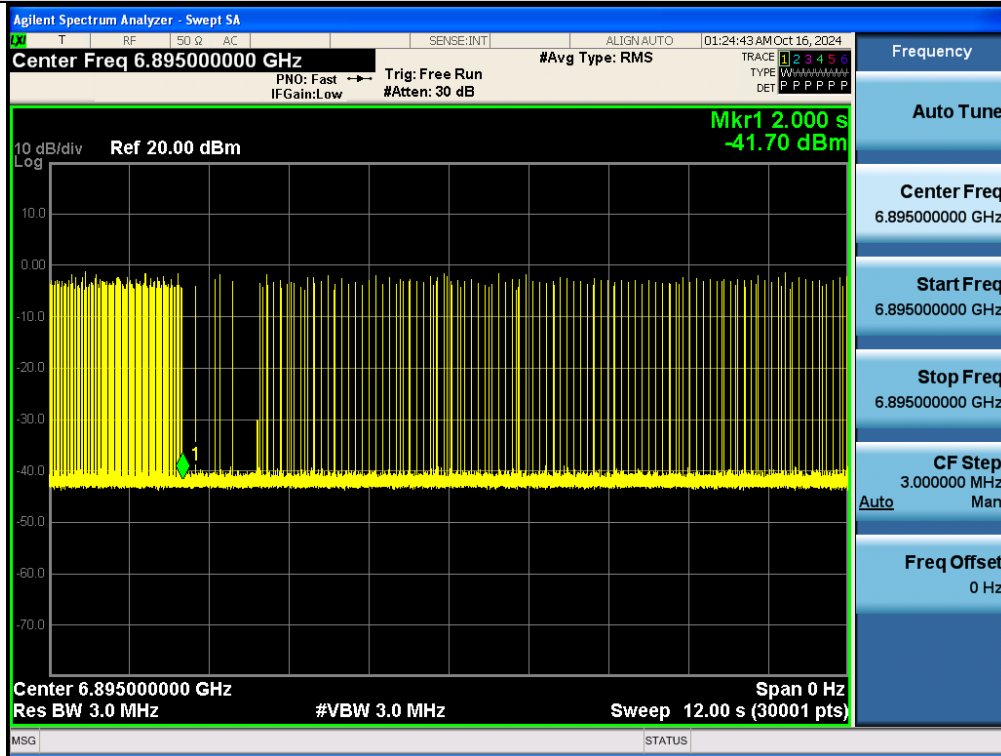


802.11 BE (20MHz) /6895MHz - Normal Operation

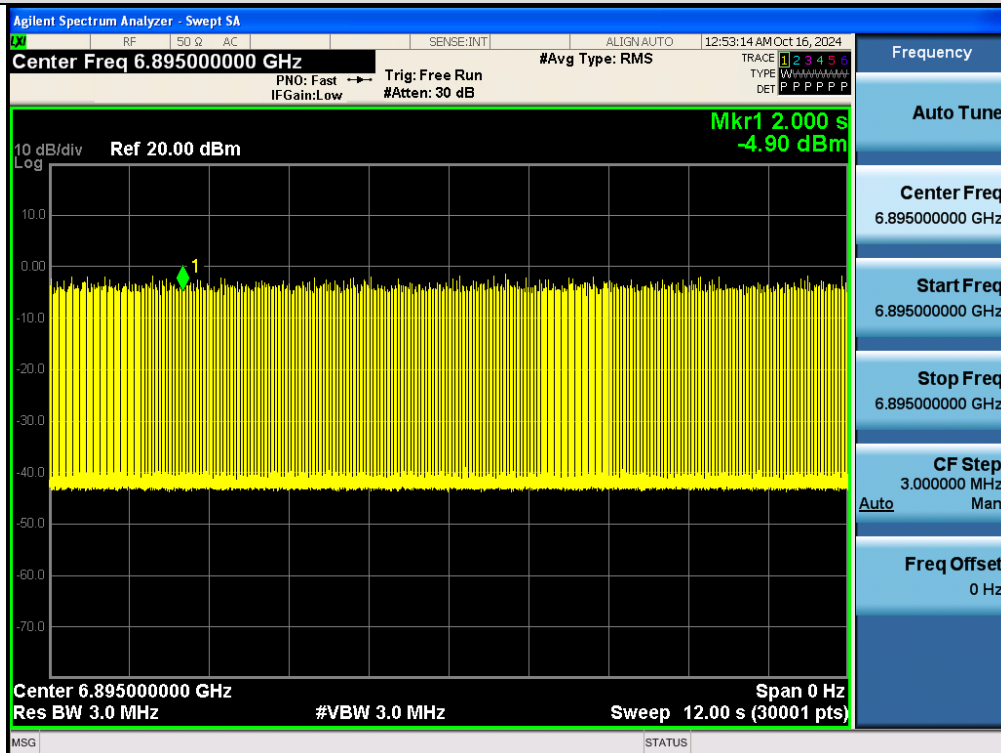


802.11 BE (320MHz) /6265 - 6110MHz - Stop Transmission

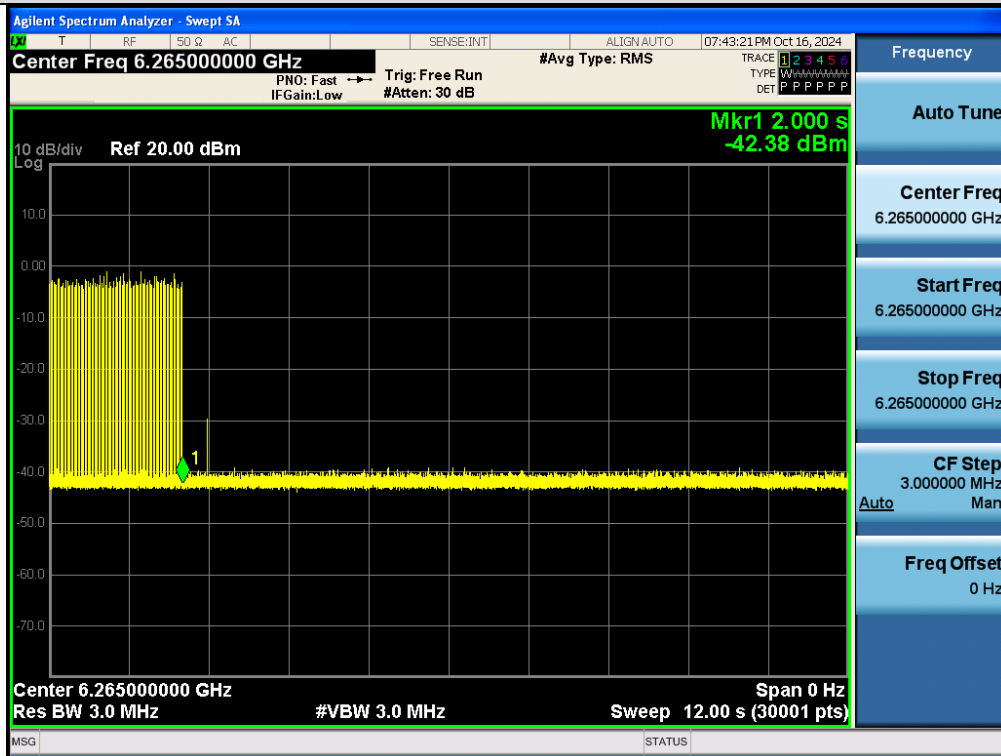


802.11 BE (320MHz) 6265-6110MHz - Minimal Operation


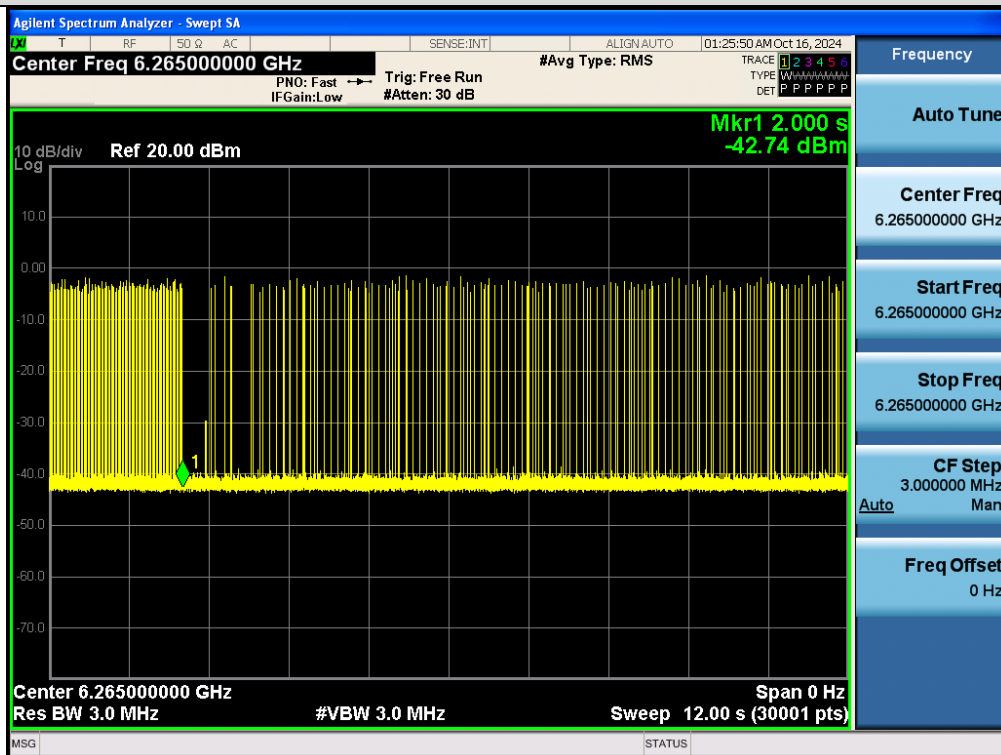


802.11 BE (320MHz) 6265- 6110MHz - Normal Operation

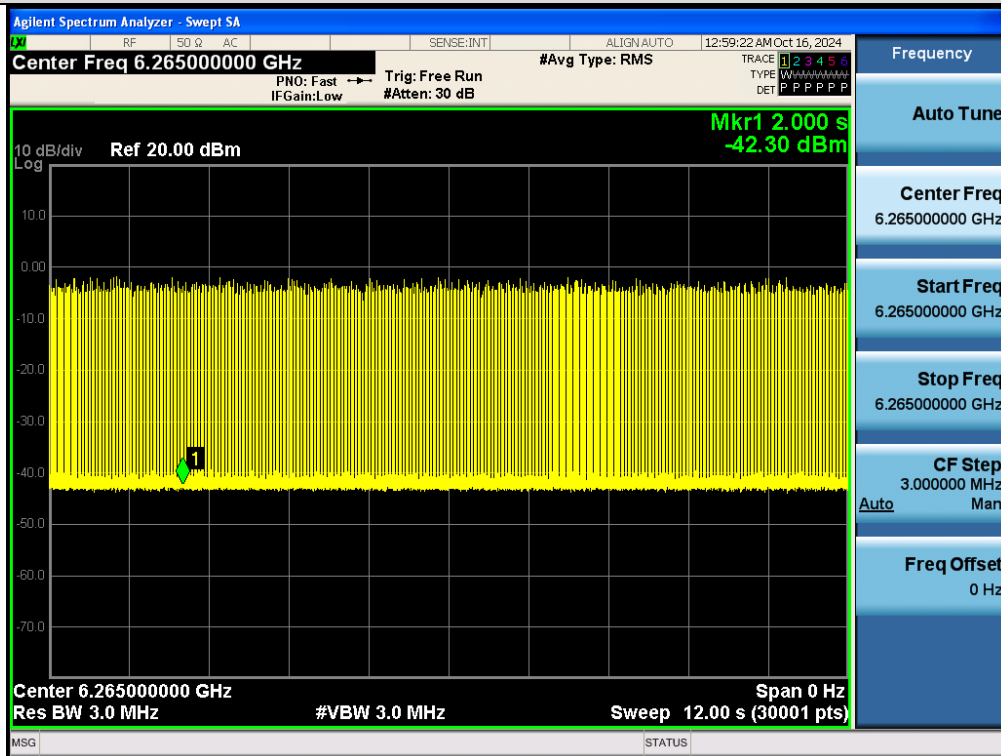


802.11 BE (320MHz) /6265MHz - Stop Transmission

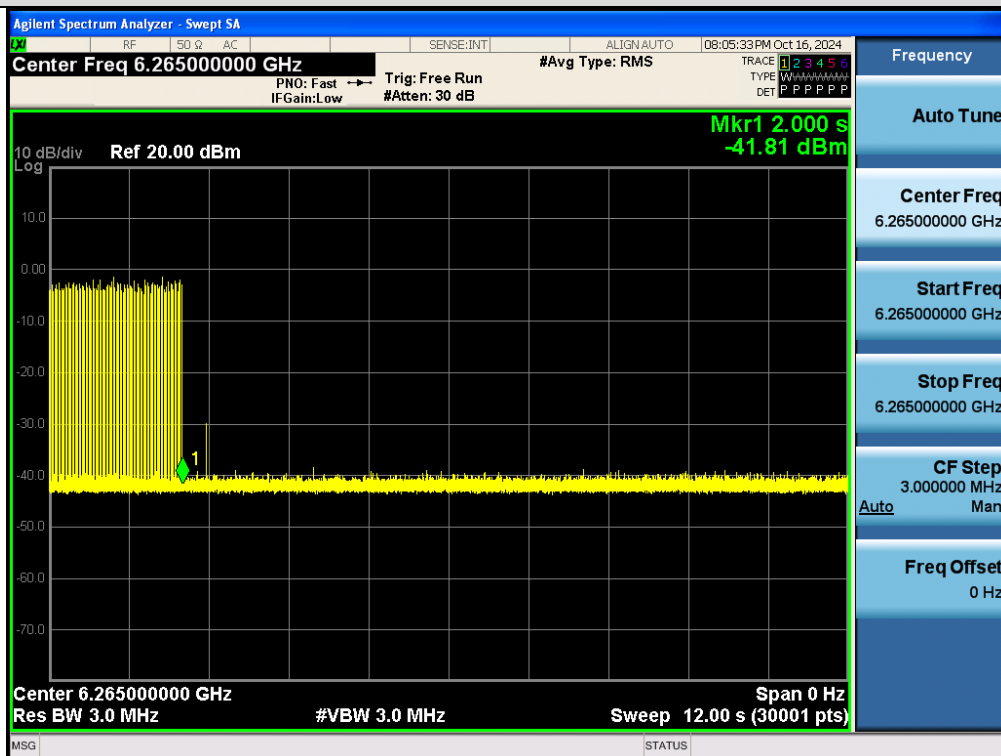


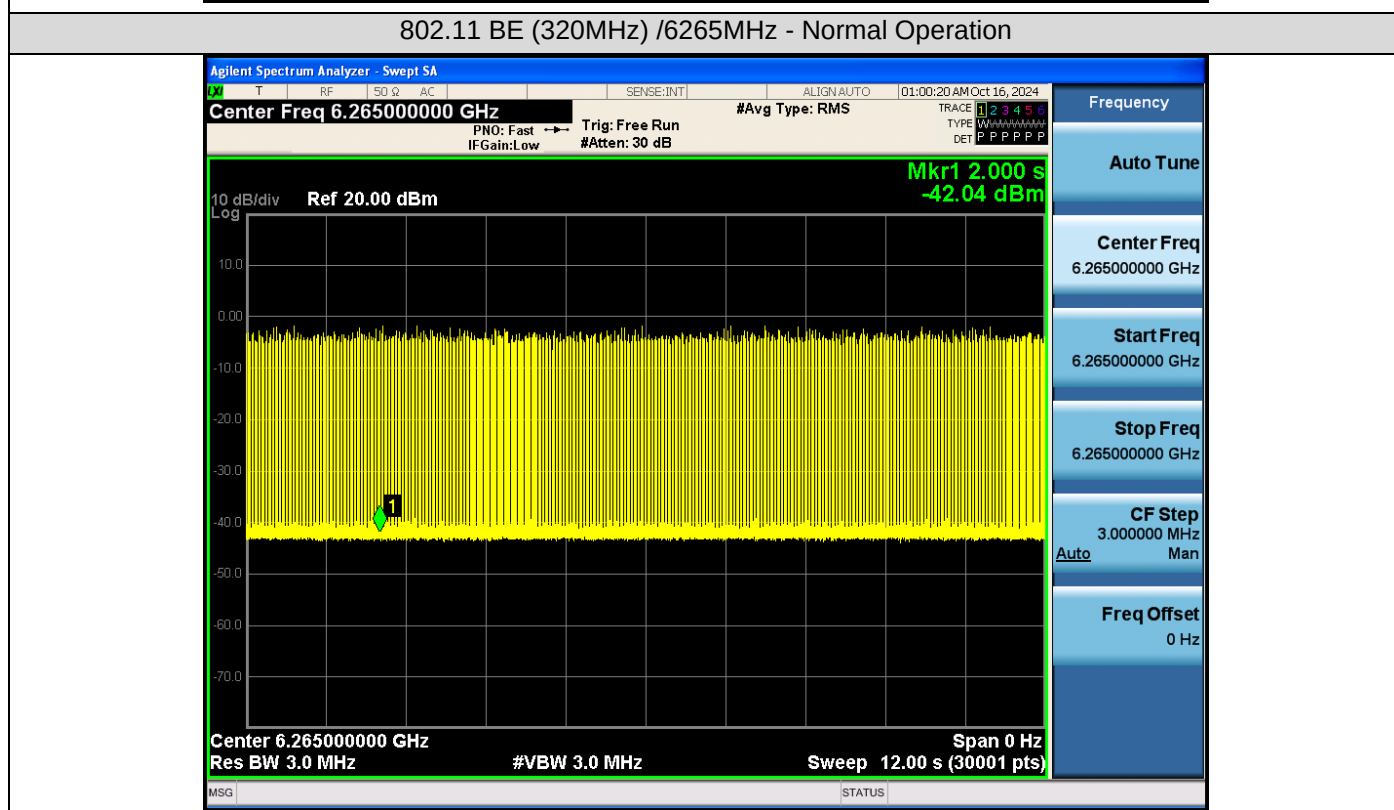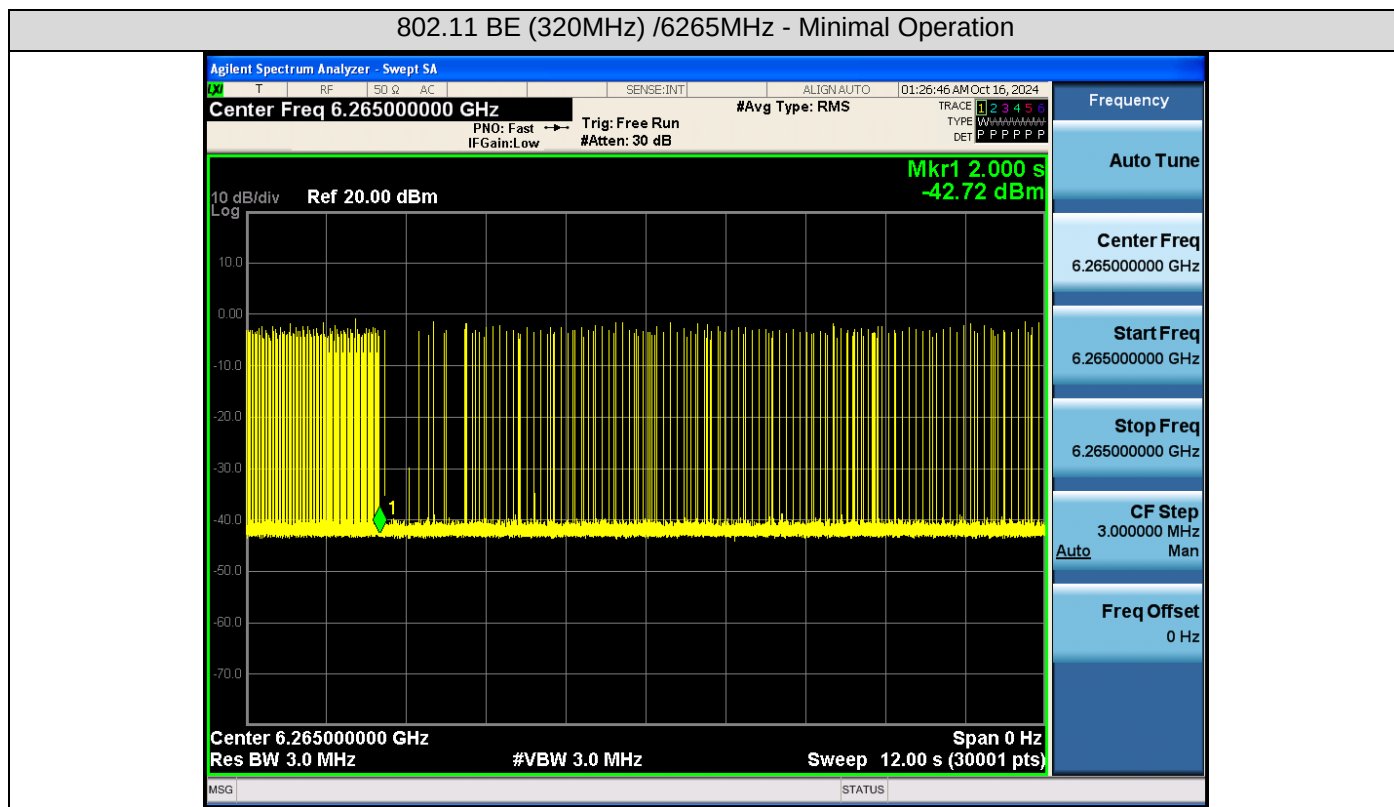


802.11 BE (320MHz) 6265-6420MHz - Stop Transmission

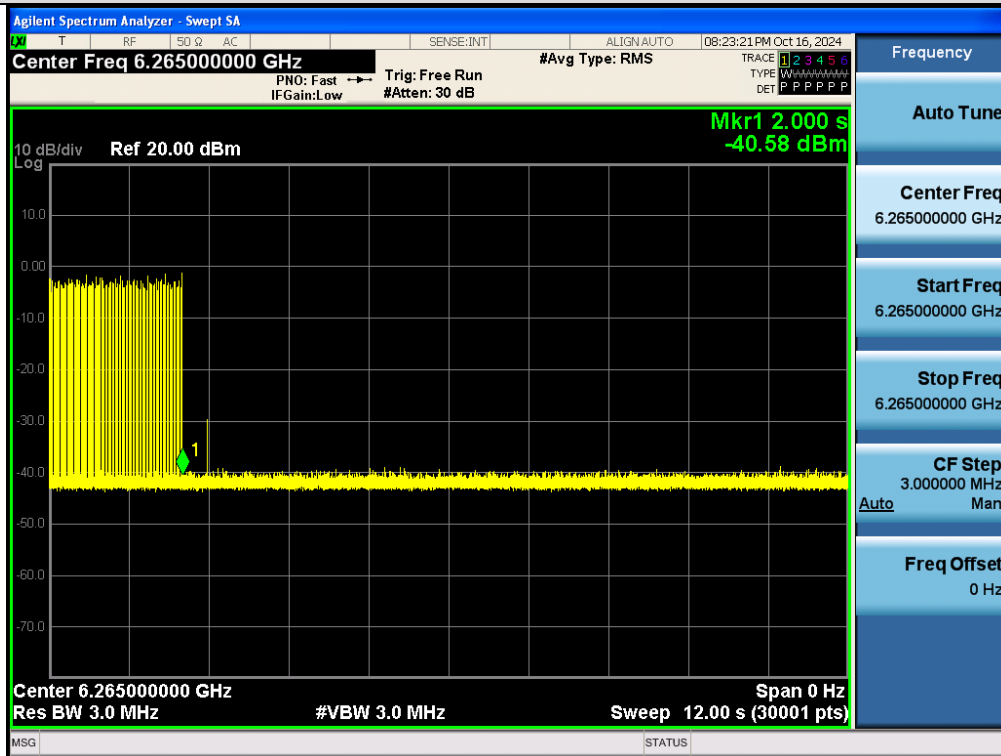


802.11 BE (320MHz) 6265-6420MHz - Minimal Operation


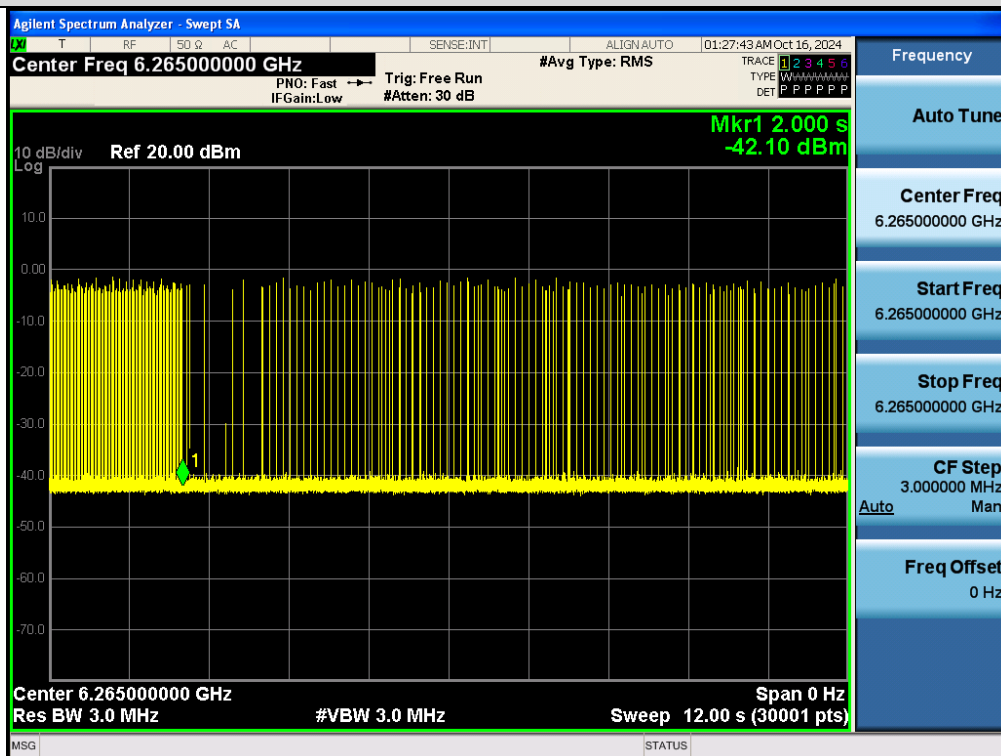


802.11 BE (320MHz) 6265-6420MHz - Normal Operation

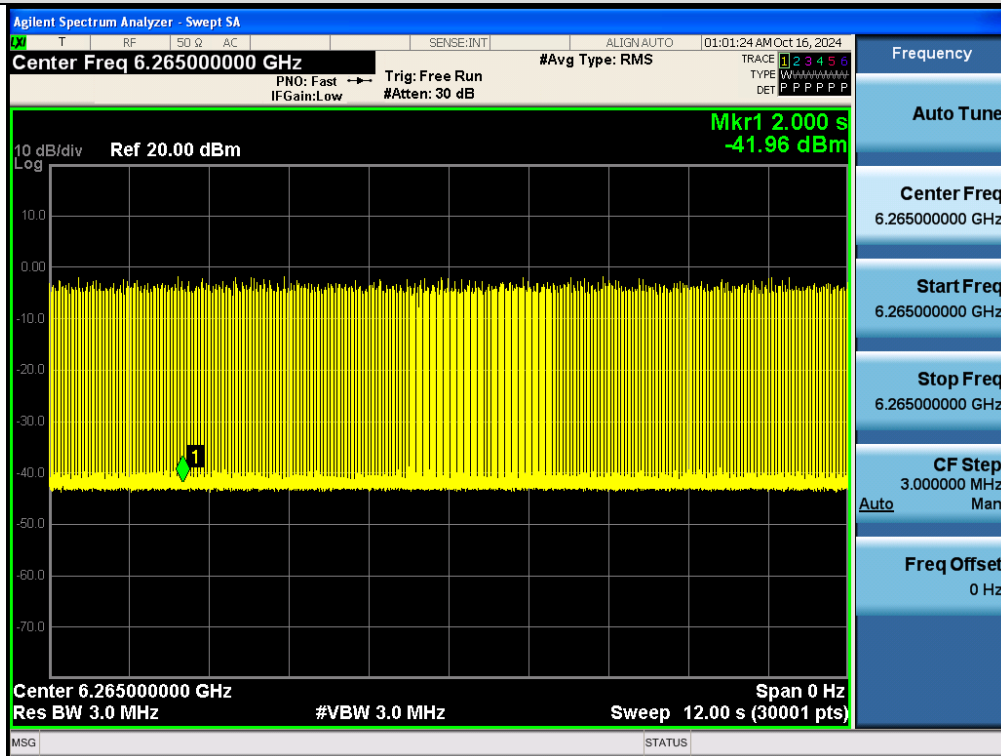


802.11 BE (320MHz) 6905-6750MHz - Stop Transmission

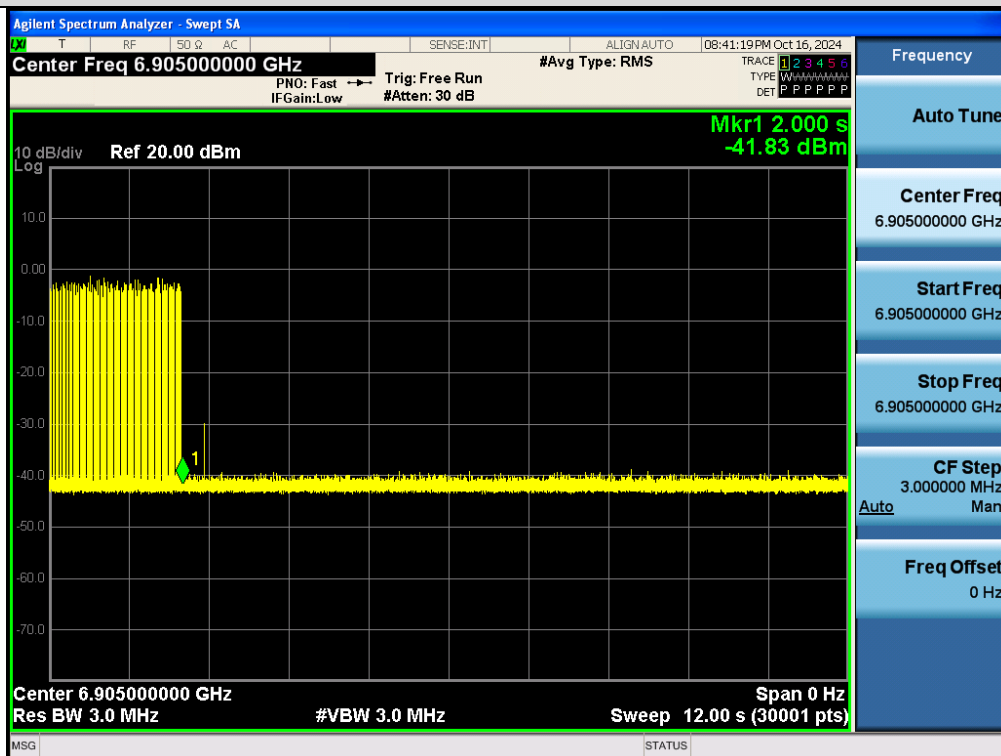


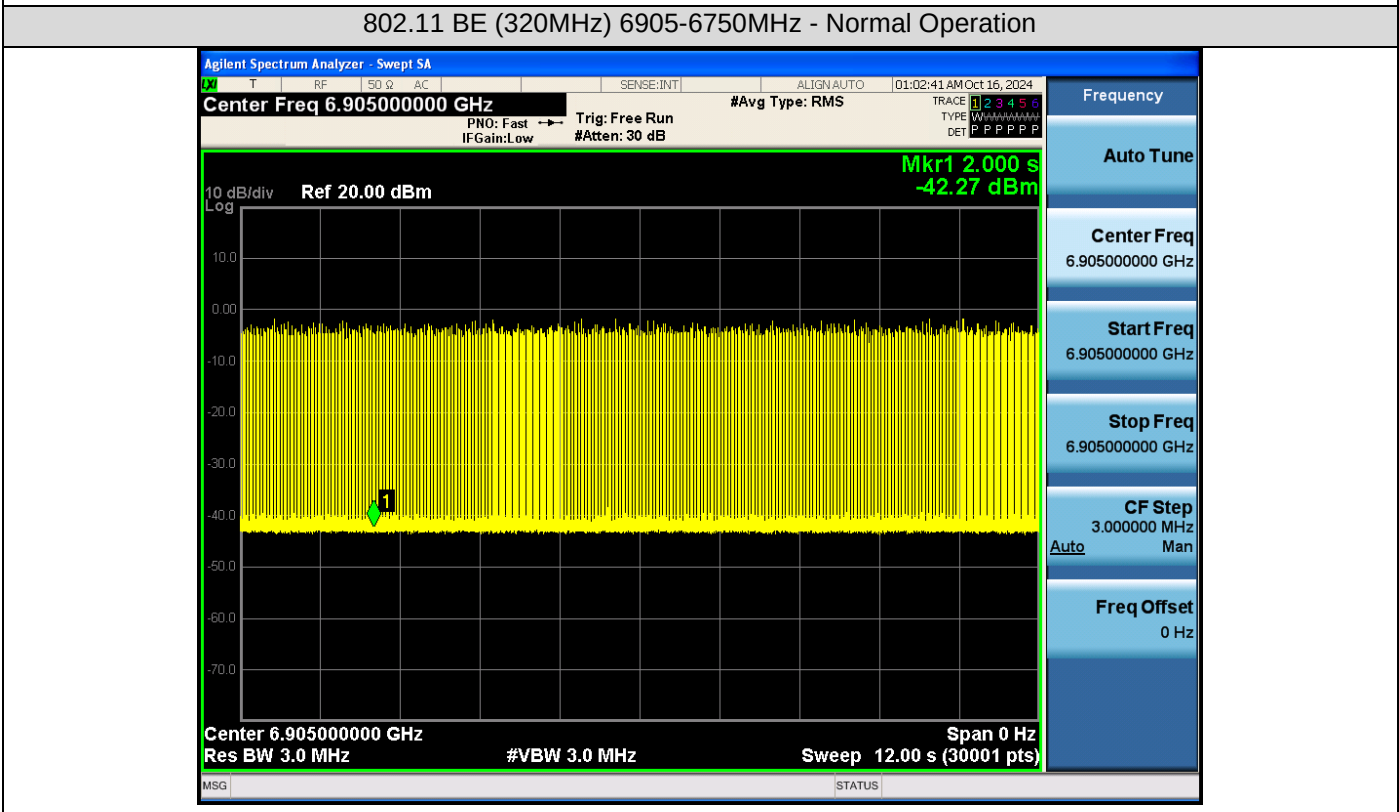
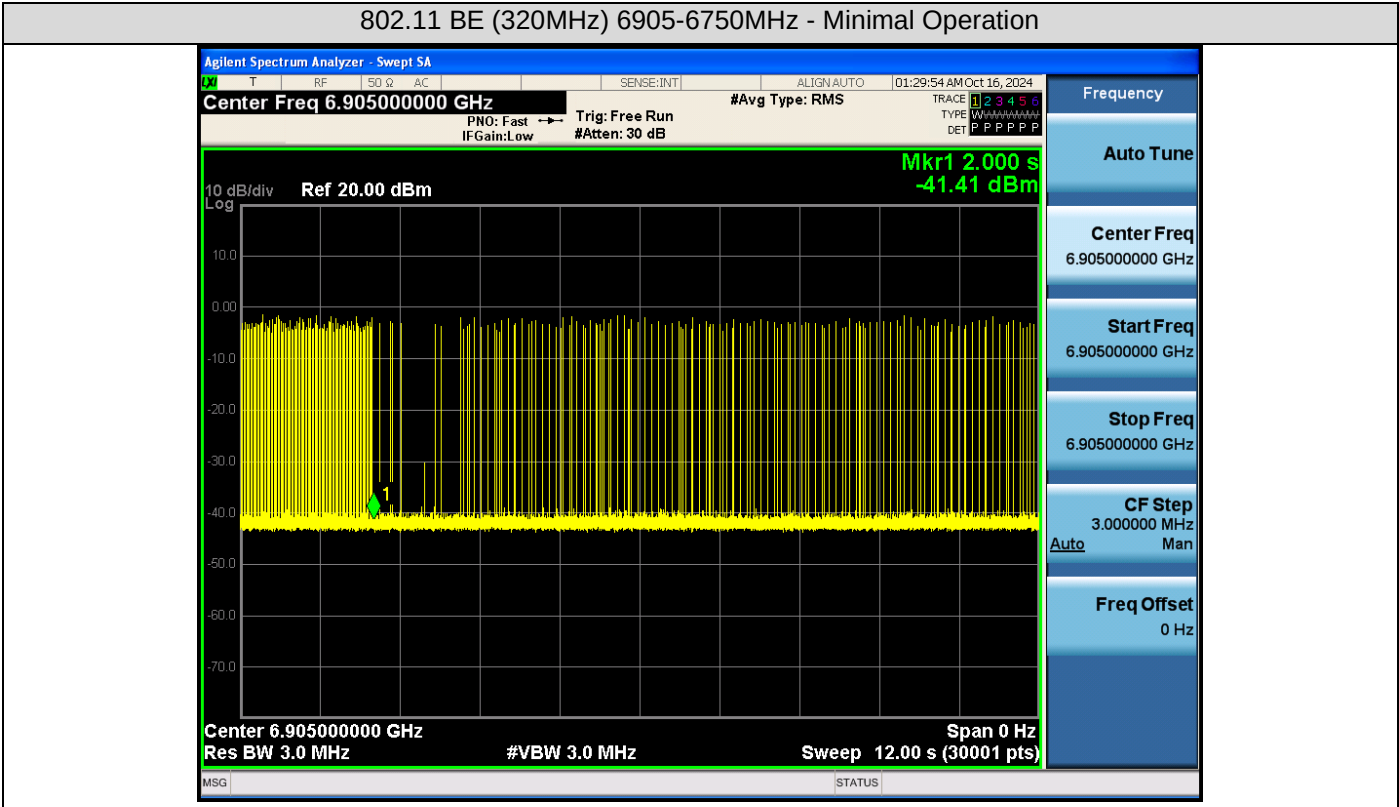


802.11 BE (320MHz) /6905MHz - Stop Transmission

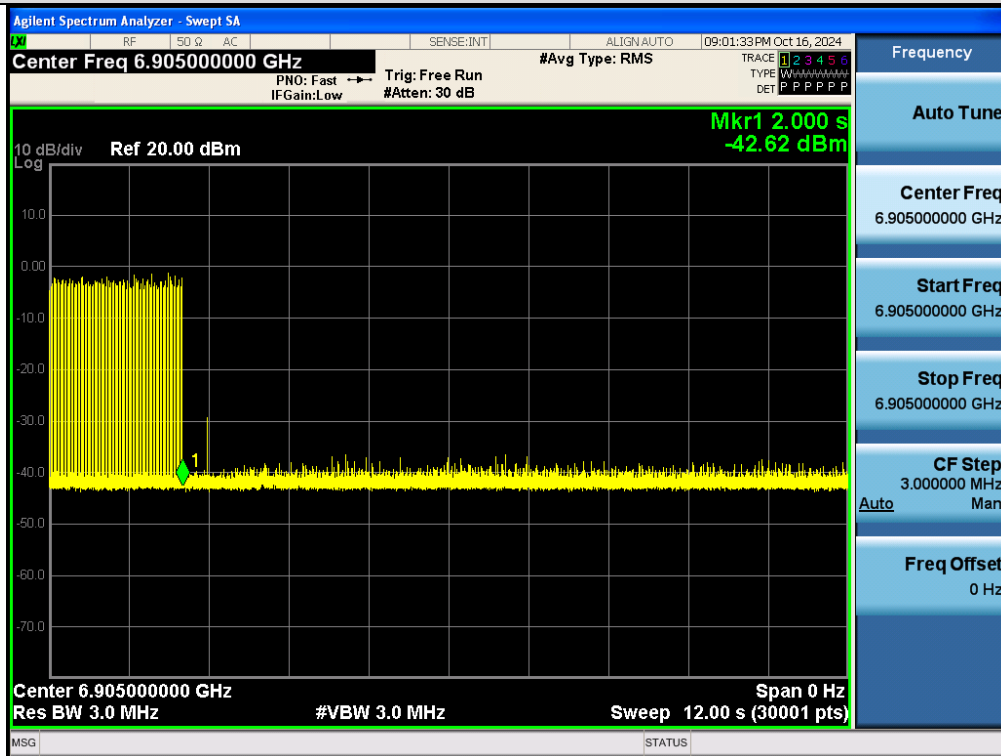


802.11 BE (320MHz) /6905MHz - Minimal Operation

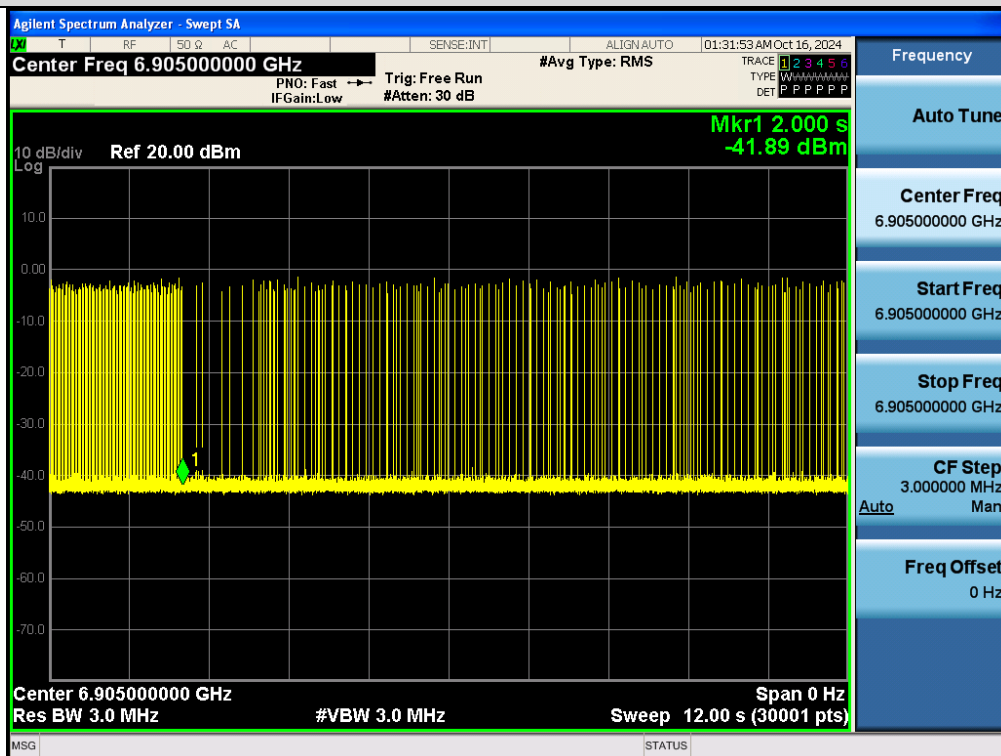


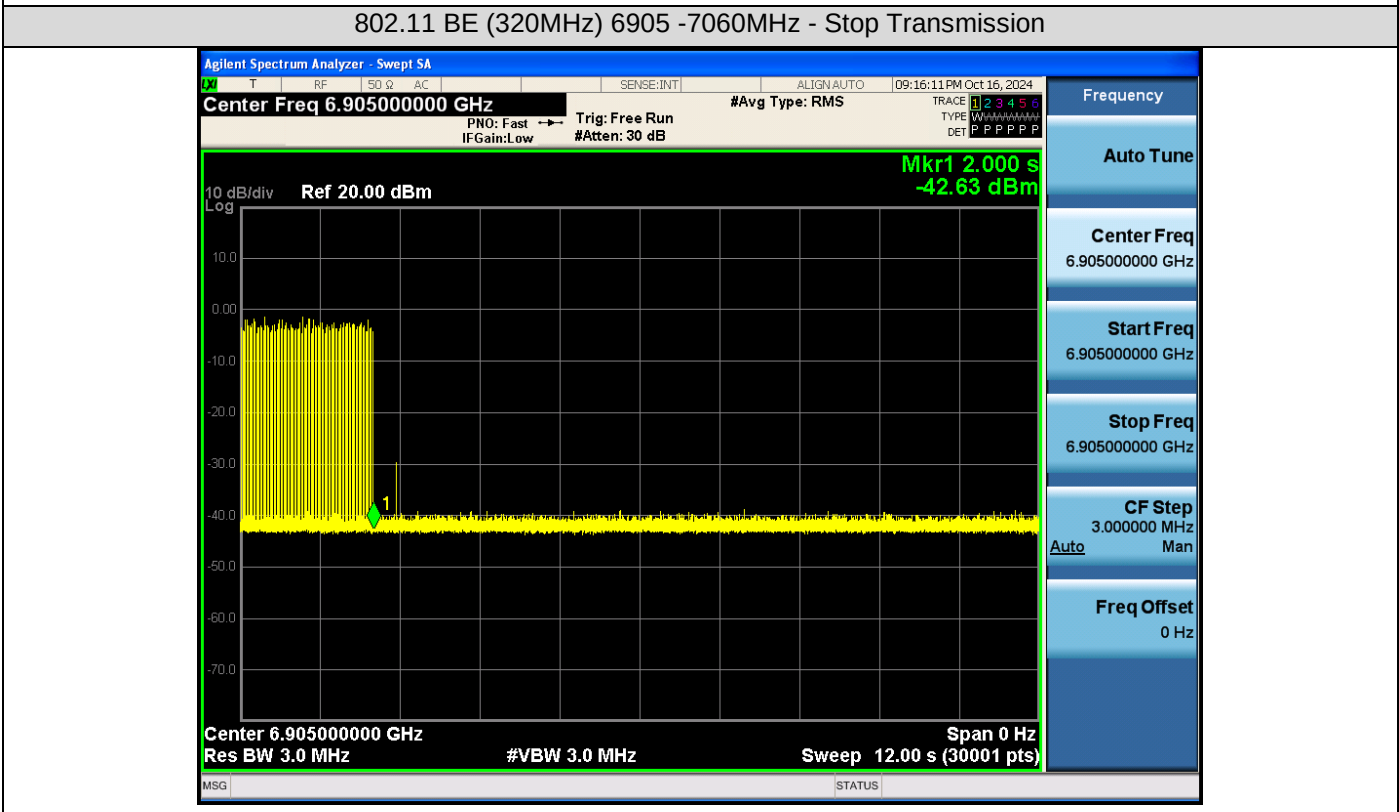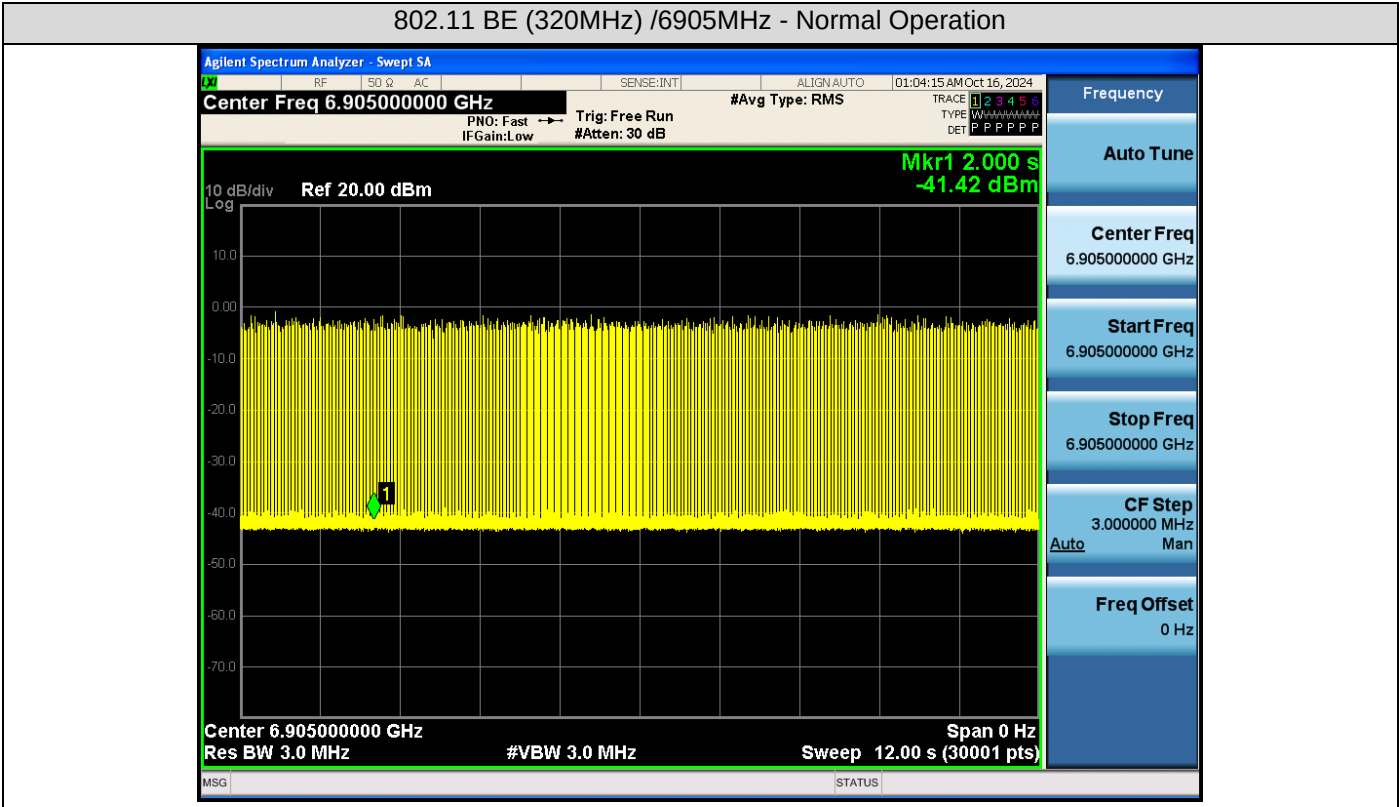

802.11 BE (320MHz) 6905 -7060MHz - Minimal Operation

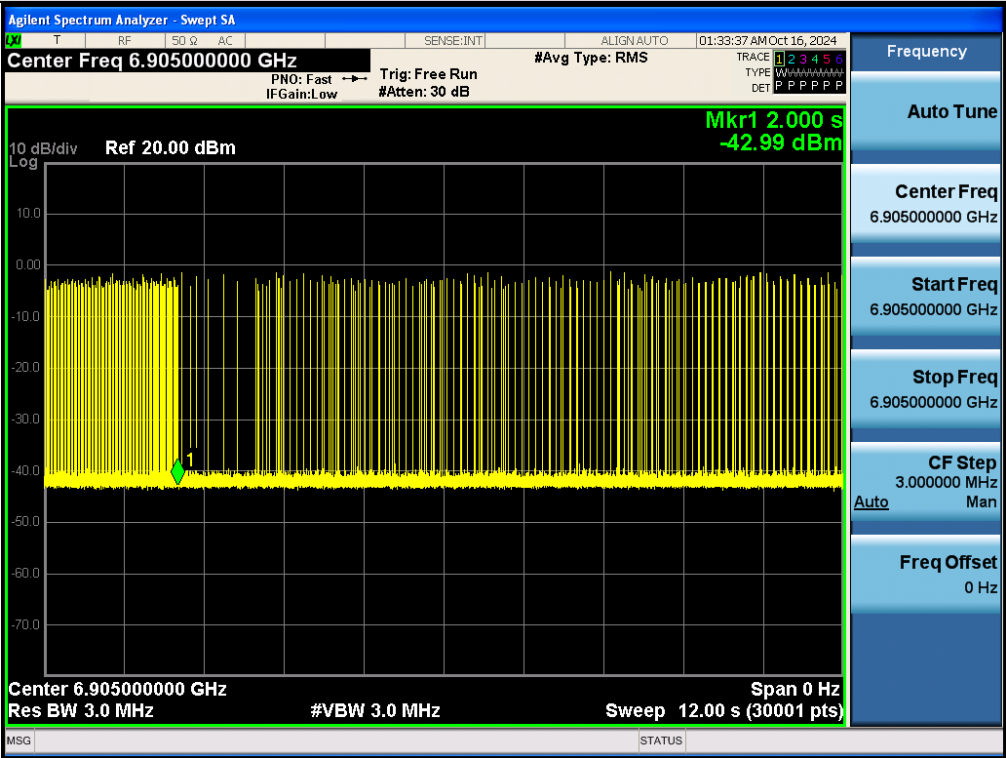



802.11 BE (320MHz) 6905 -7060MHz - Normal Operation


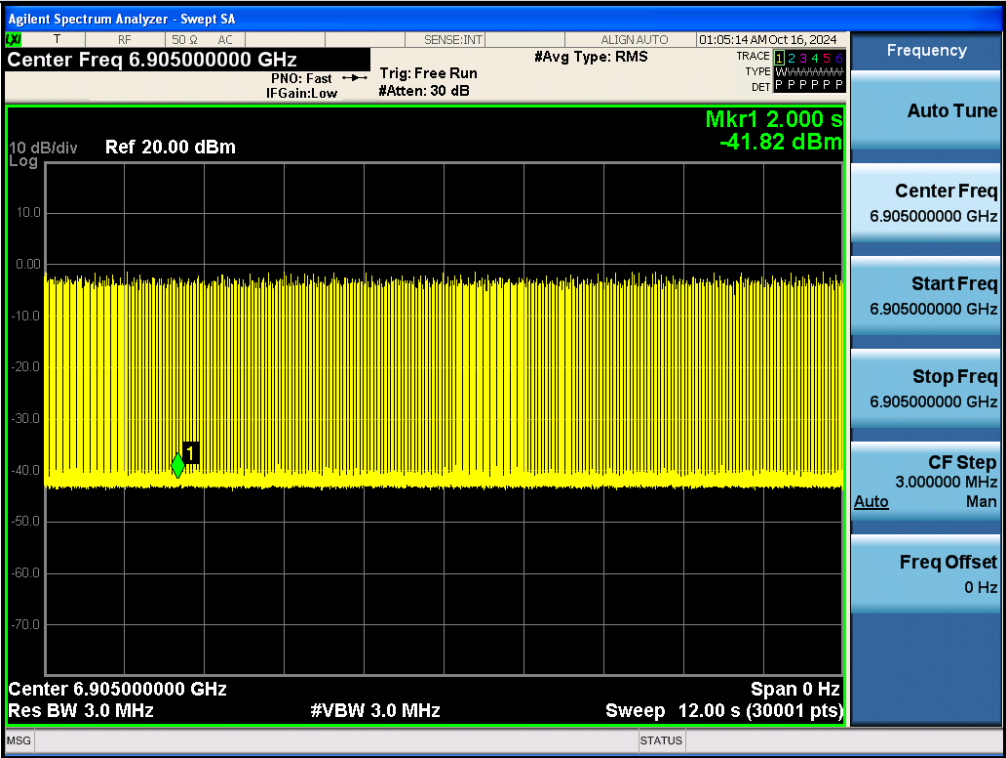


Low-power client devices:


Low power client devices:								
TestMode	EUT Frequency [MHz]	AWGN Frequency [MHz]	Injected AWGN Level (dBm)	Detection Rate(%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Antenna Gain(dBi)	Verdict
802.11BE(20MHz)	6115	6115	-62.09	100	-62	-68.09	6.0	PASS
			Rusult: Stop Transmission					
			-69.32	<90	-62	-75.32	6.0	
			Rusult: Minimal Operation					
			-72.66	0	-62	-78.66	6.0	
			Rusult: Normal Operation					
	6435	6435	-62.15	100	-62	-68.15	6.0	
			Rusult: Stop Transmission					
			-69.13	<90	-62	-75.13	6.0	
			Rusult: Minimal Operation					
			-72.39	0	-62	-78.39	6.0	
			Rusult: Normal Operation					
	6535	6535	-62.15	100	-62	-68.15	6.0	
			Rusult: Stop Transmission					
			-69.38	<90	-62	-75.38	6.0	
			Rusult: Minimal Operation					
			-72.22	0	-62	-78.22	6.0	
			Rusult: Normal Operation					
	6895	6895	-62.10	100	-62	-68.1	6.0	
			Rusult: Stop Transmission					
			-69.55	<90	-62	-75.55	6.0	
			Rusult: Minimal Operation					
			-72.19	0	-62	-78.19	6.0	
			Rusult: Normal Operation					

802.11BE320(MHz)	6265	6110	-62.38	100	-62	-68.38	6.0	PASS
			Rusult: Stop Transmission					
			-69.62	<90	-62	-75.62	6.0	
			Rusult: Minimal Operation					
			-72.19	0	-62	-78.19	6.0	
			Rusult: Normal Operation					
		6265	-62.50	100	-62	-68.5	6.0	
			Rusult: Stop Transmission					
			-69.42	<90	-62	-75.42	6.0	
			Rusult: Minimal Operation					
			-72.13	0	-62	-78.13	6.0	
			Rusult: Normal Operation					
		6420	-62.23	100	-62	-68.23	6.0	
			Rusult: Stop Transmission					
			-69.29	<90	-62	-75.29	6.0	
	Rusult: Minimal Operation							
	-72.21		0	-62	-78.21	6.0		
	Rusult: Normal Operation							
	6905	6750	-62.44	100	-62	-68.44	6.0	
			Rusult: Stop Transmission					
			-69.68	<90	-62	-75.68	6.0	
			Rusult: Minimal Operation					
			-72.29	0	-62	-78.29	6.0	
			Rusult: Normal Operation					
		6905	-62.46	100	-62	-68.46	6.0	
			Rusult: Stop Transmission					
			-69.35	<90	-62	-75.35	6.0	
			Rusult: Minimal Operation					
			-72.25	0	-62	-78.25	6.0	
			Rusult: Normal Operation					
7060		-62.40	100	-62	-68.4	6.0		
		Rusult: Stop Transmission						
		-69.69	<90	-62	-75.69	6.0		
	Rusult: Minimal Operation							
	-72.51	0	-62	-78.51	6.0			
	Rusult: Normal Operation							
Note: Adjusted Power (dBm)= Injected AWGN Level (dBm) - Antenna Gain (dBi)								

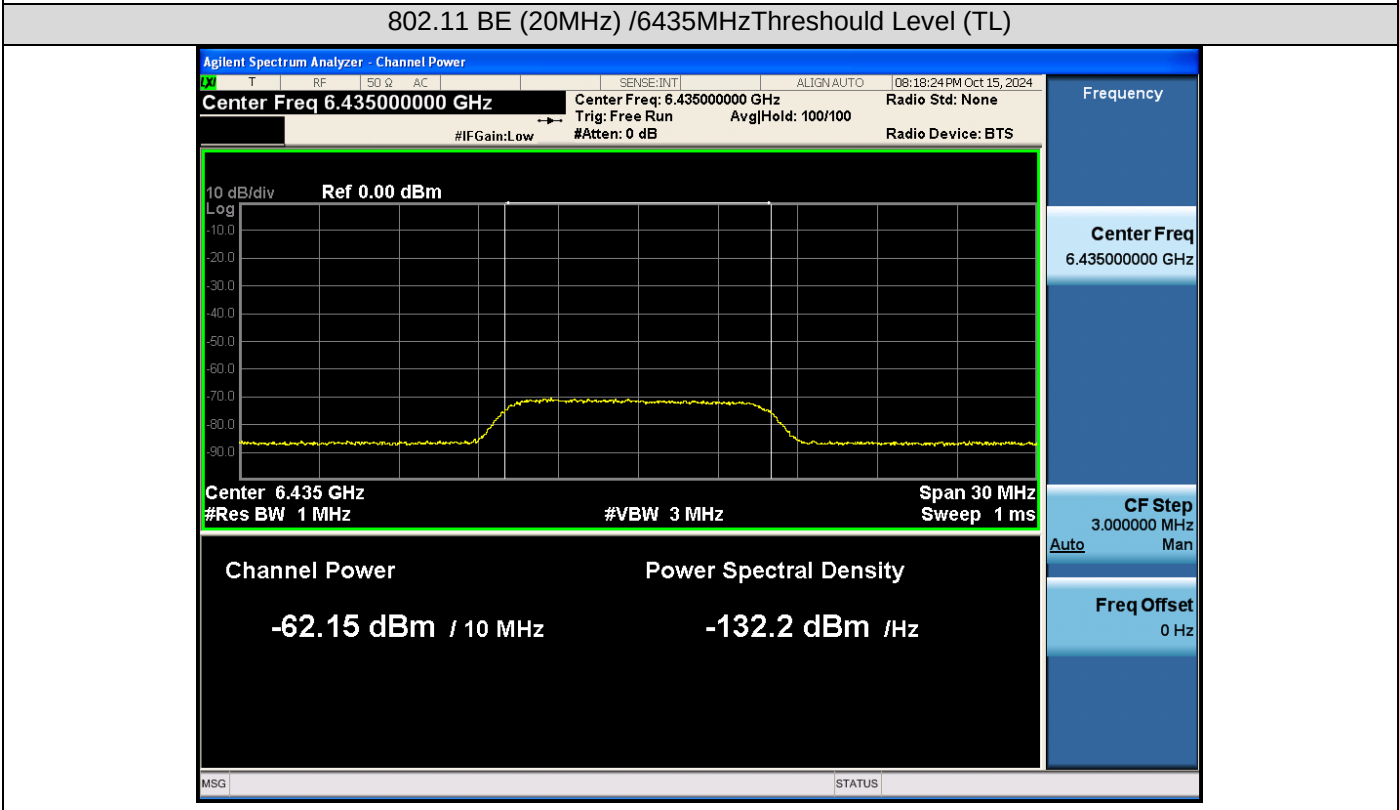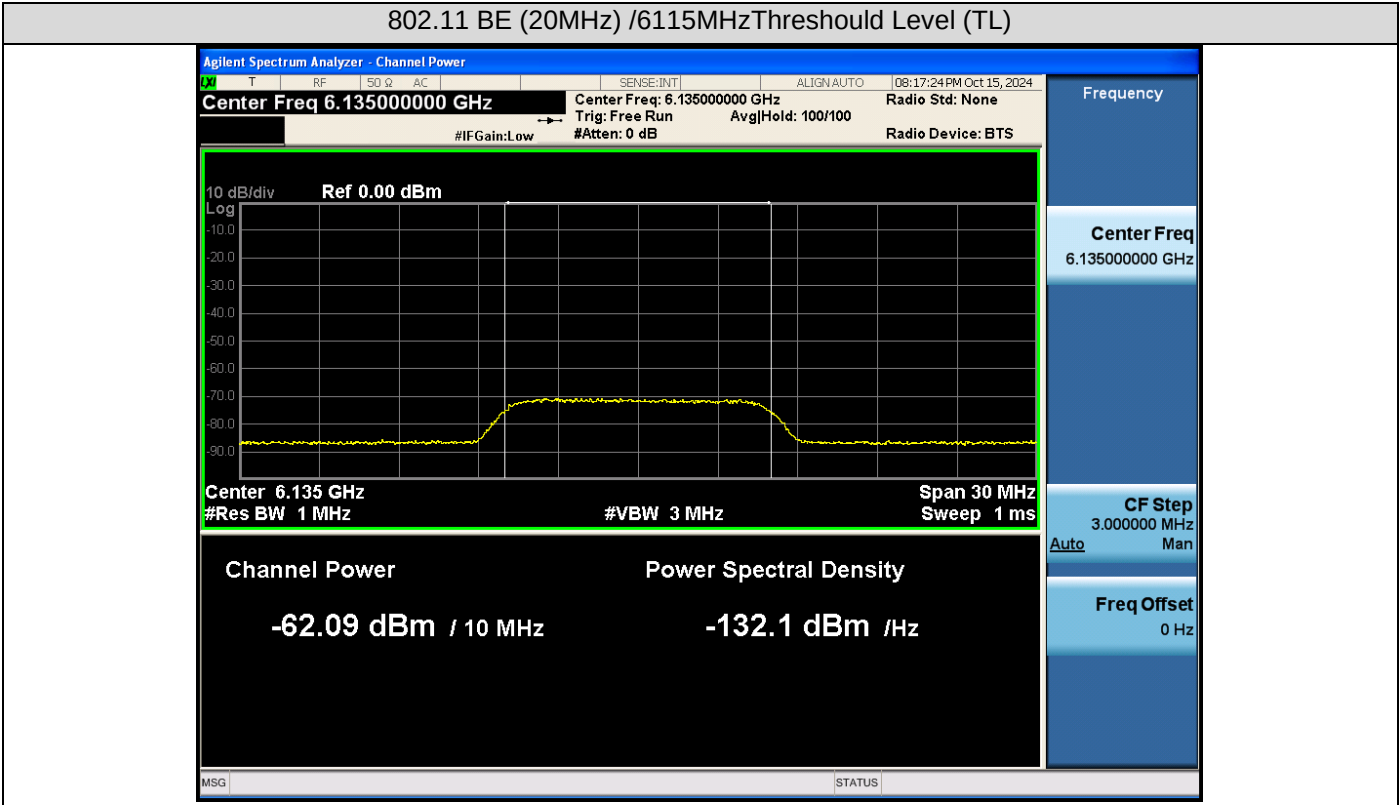


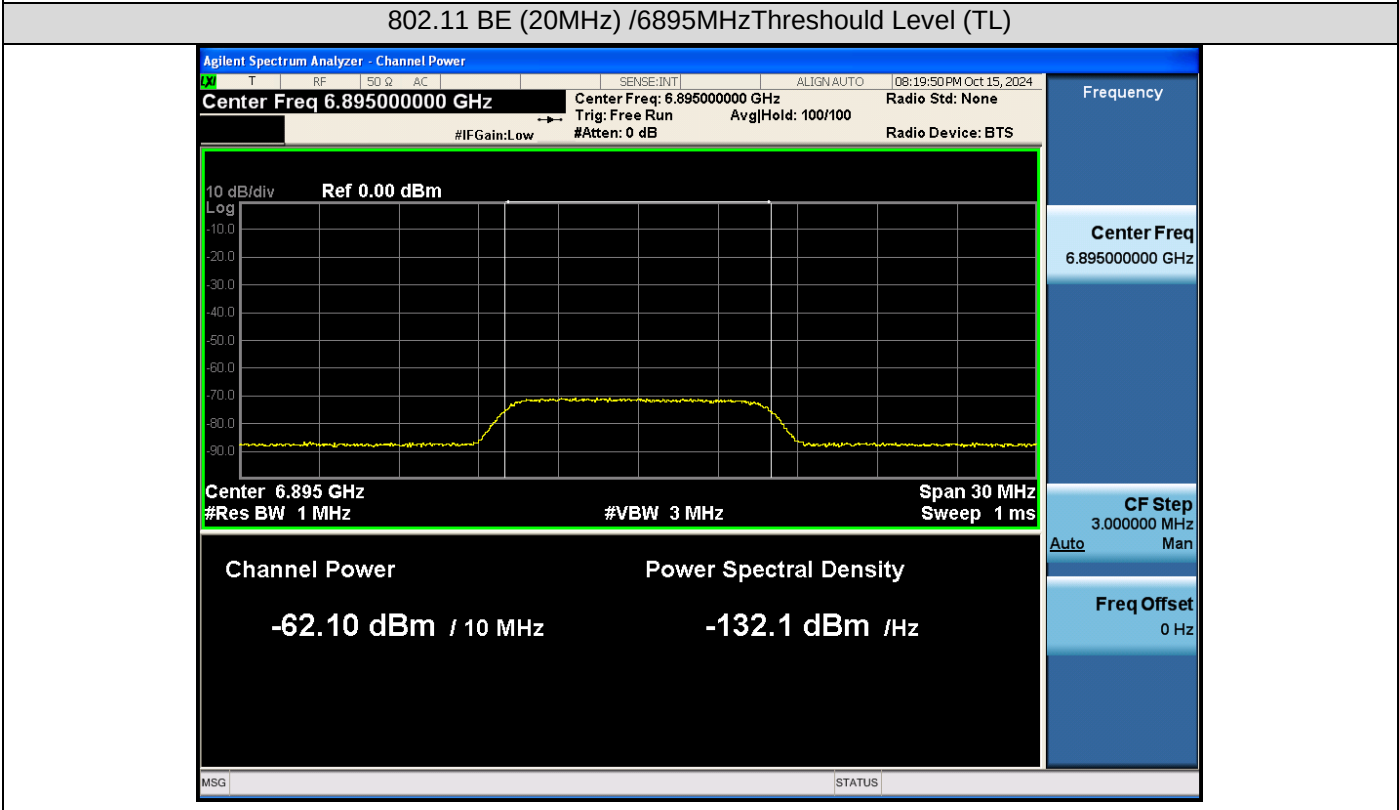
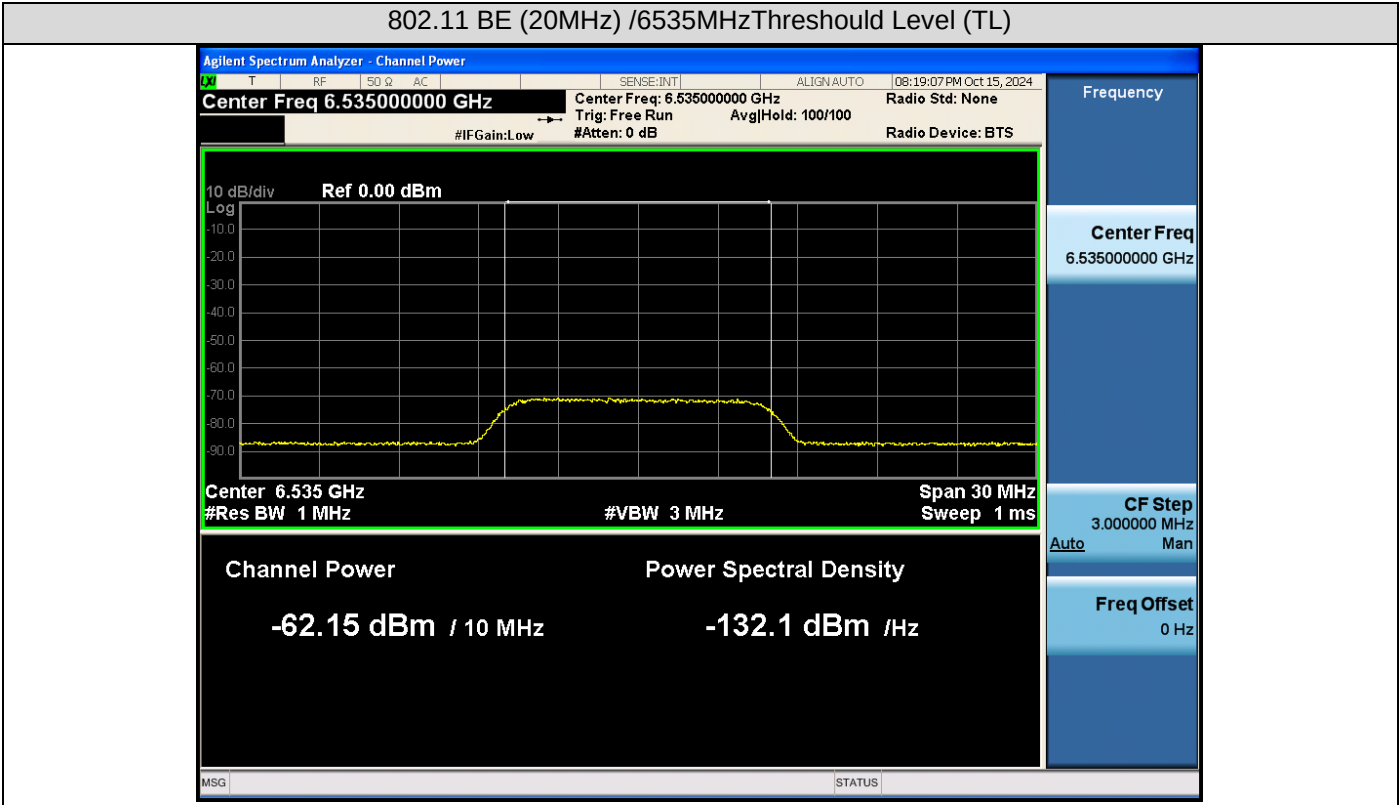


802.11 BE (320MHz) /6110MHzThreshold Level (TL)

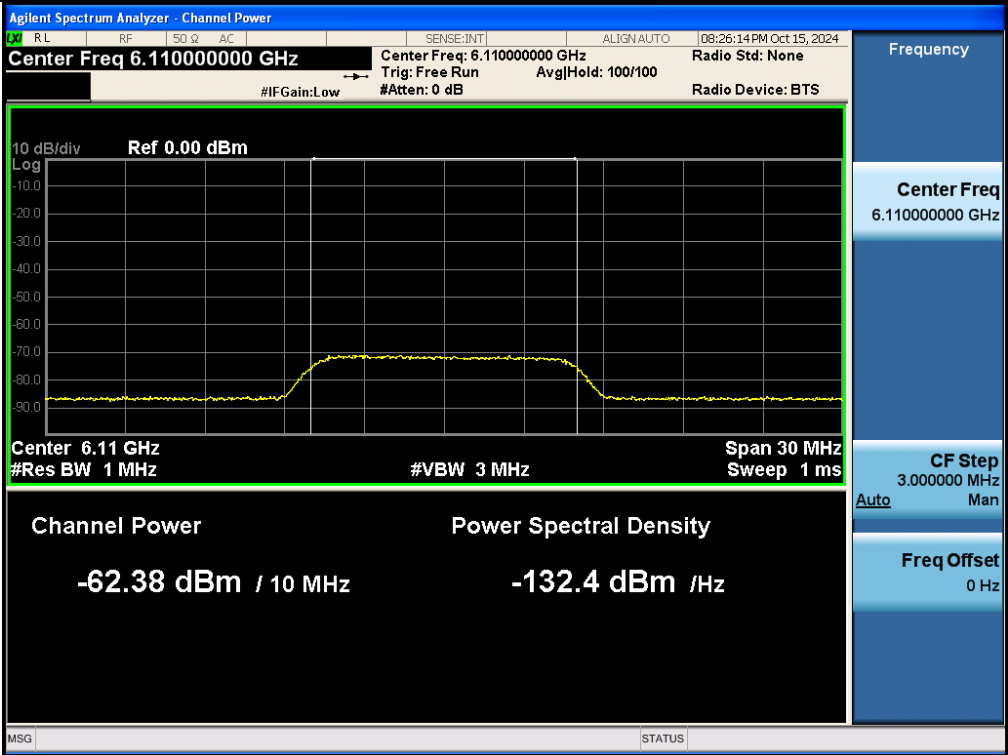


802.11 BE (320MHz) /6265MHzThreshold Level (TL)

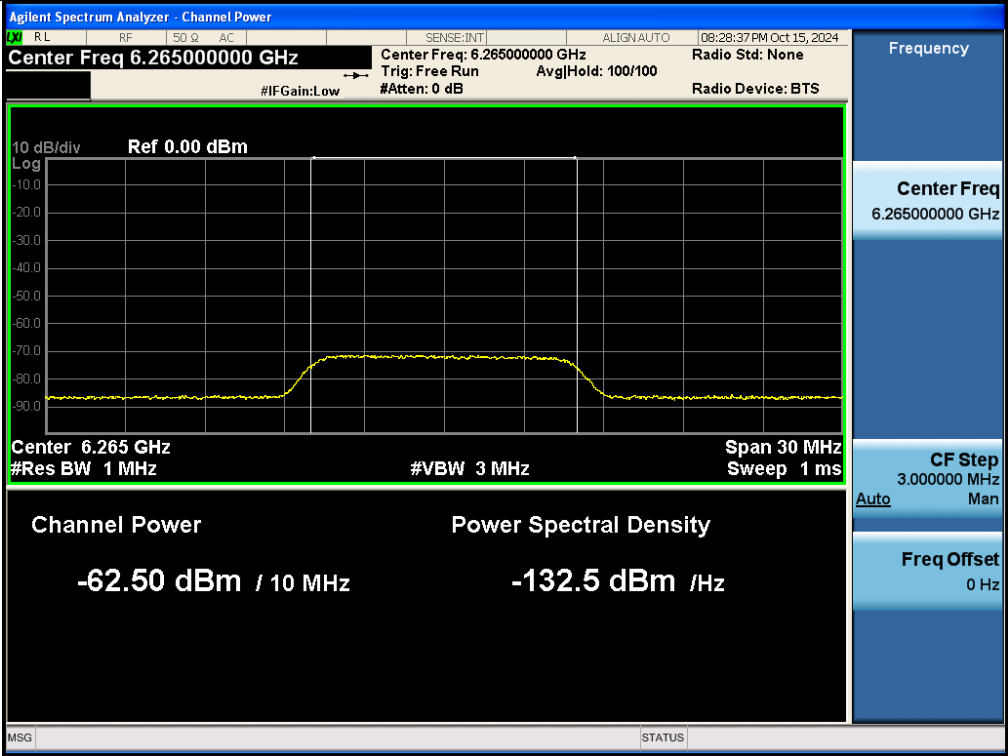


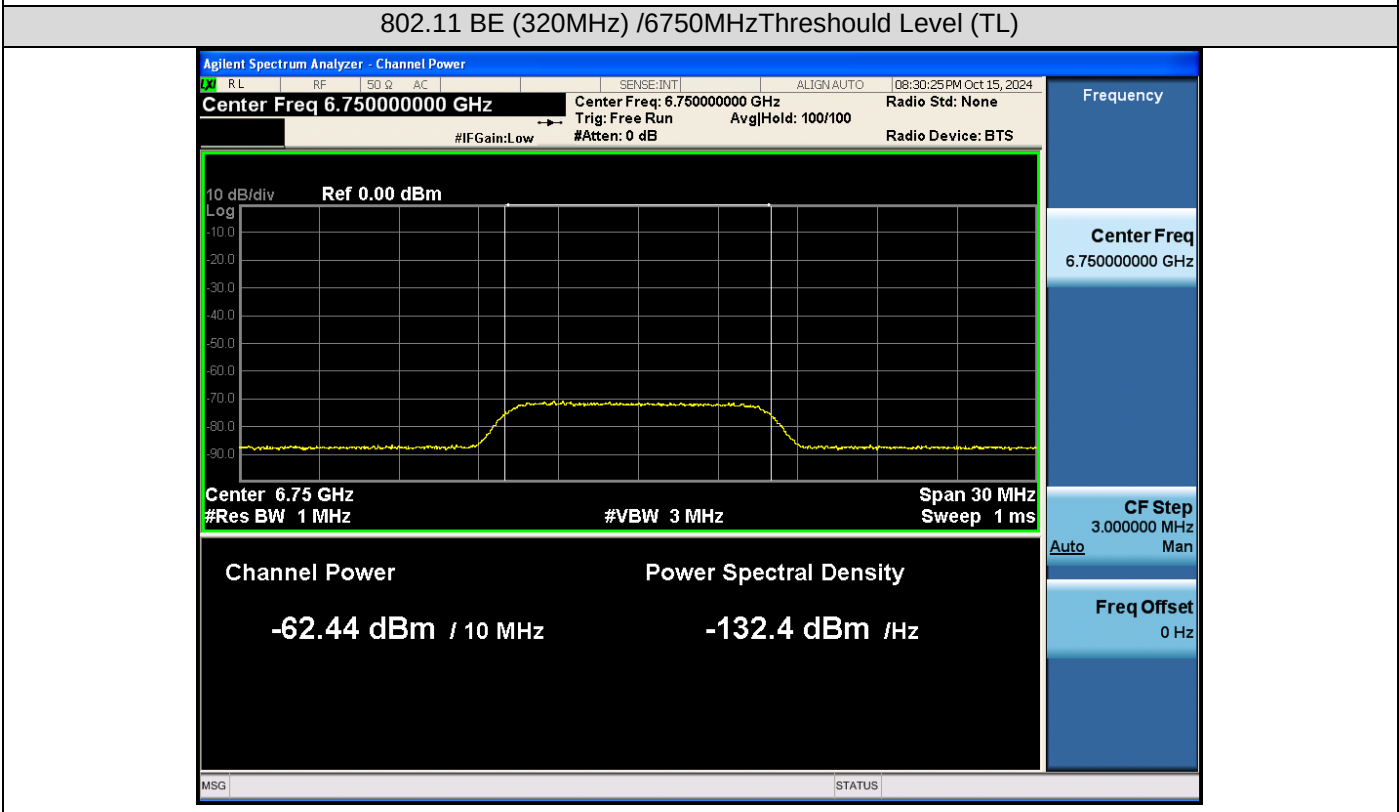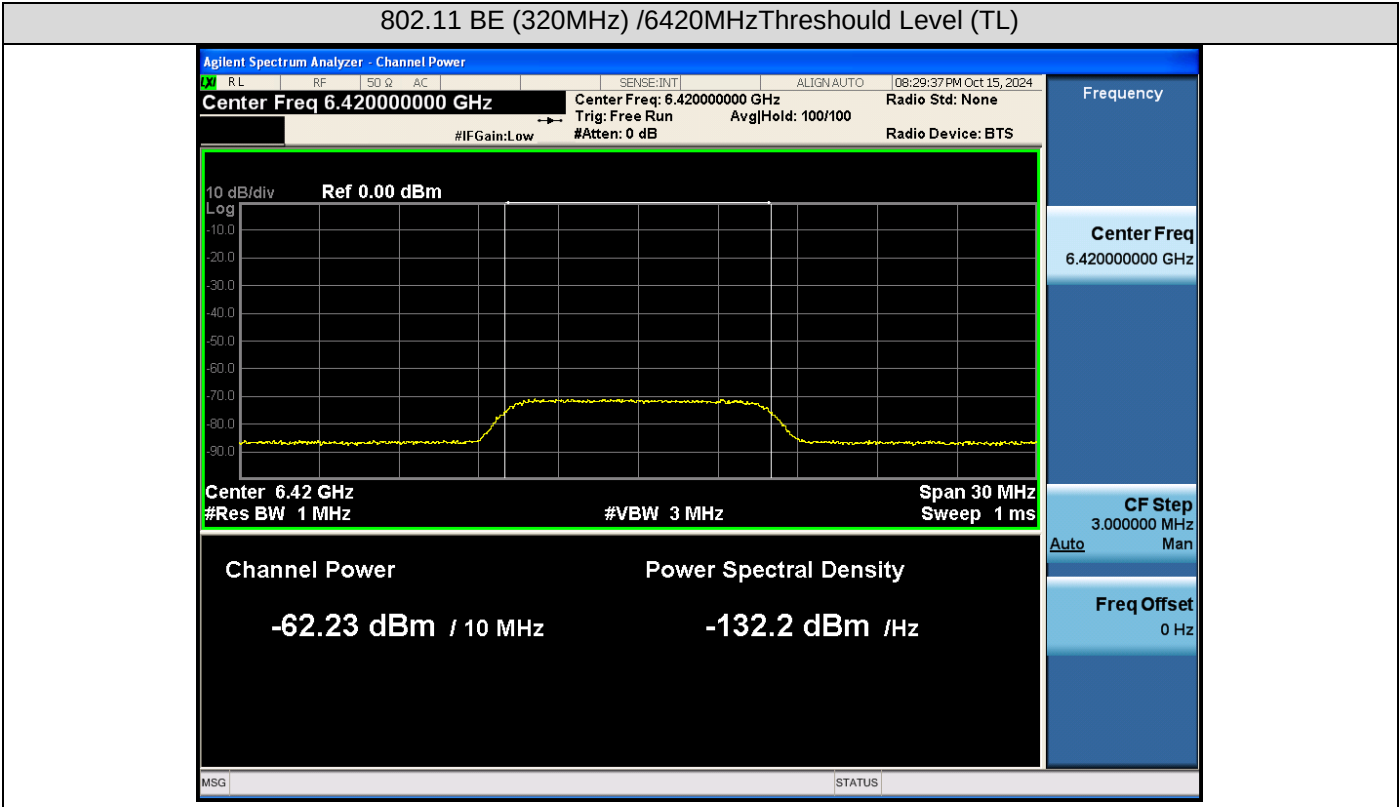


802.11 BE (320MHz) /6905MHzThreshold Level (TL)

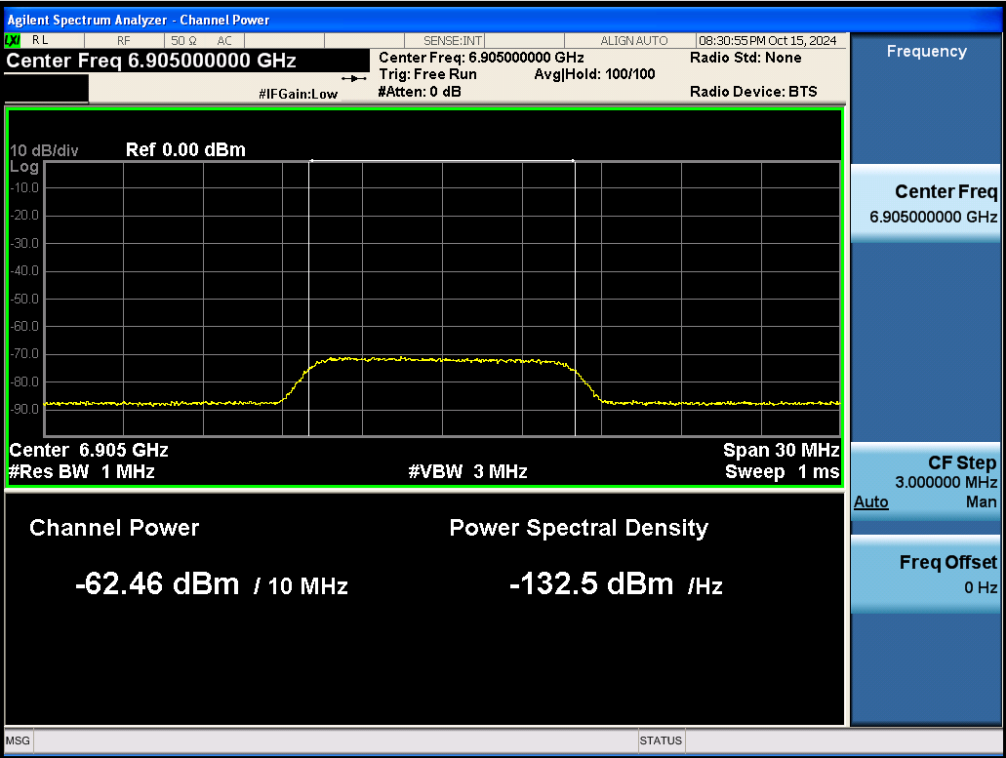


802.11 BE (320MHz) /7060MHzThreshold Level (TL)

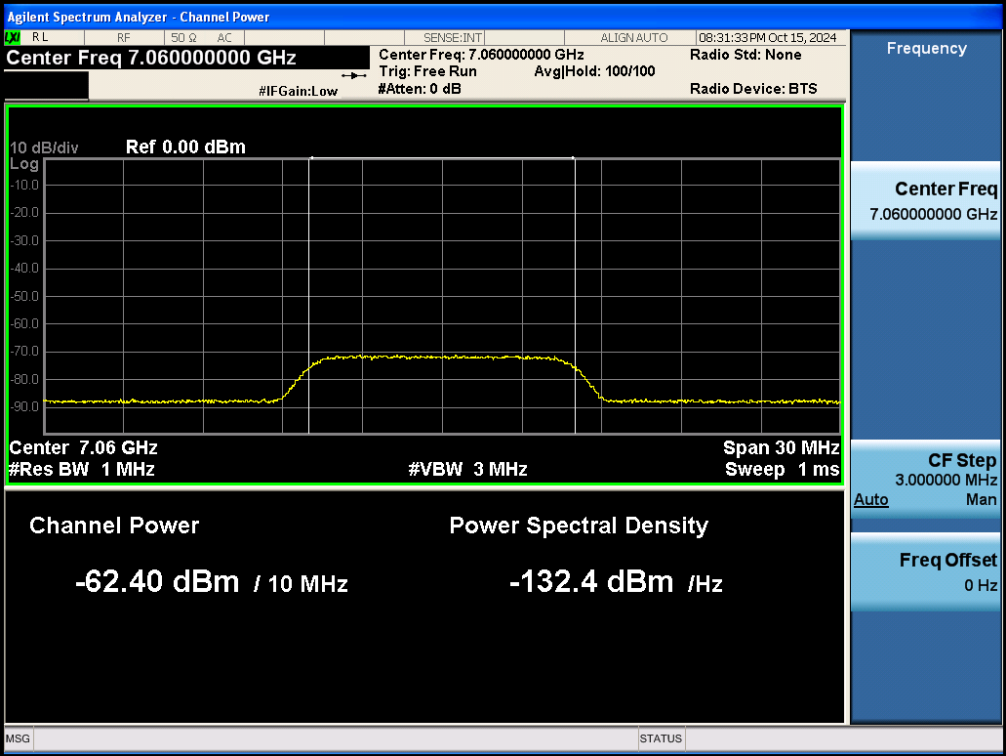


802.11 BE (20MHz) /6115MHz - Stop Transmission

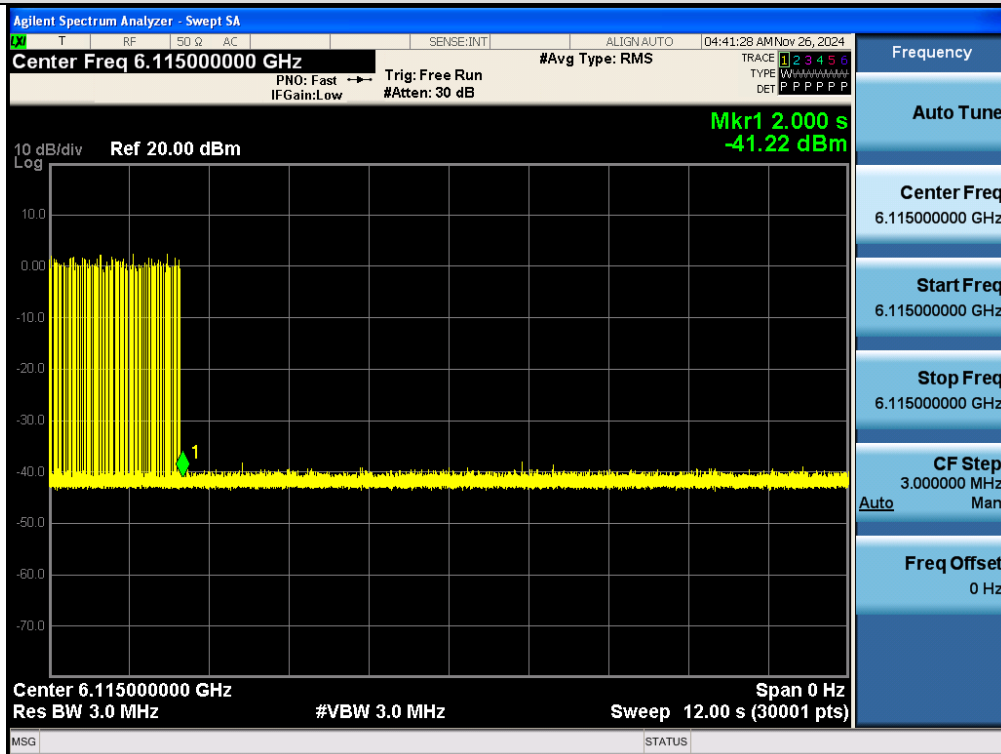


802.11 BE (20MHz) /6115MHz - Minimal Operation

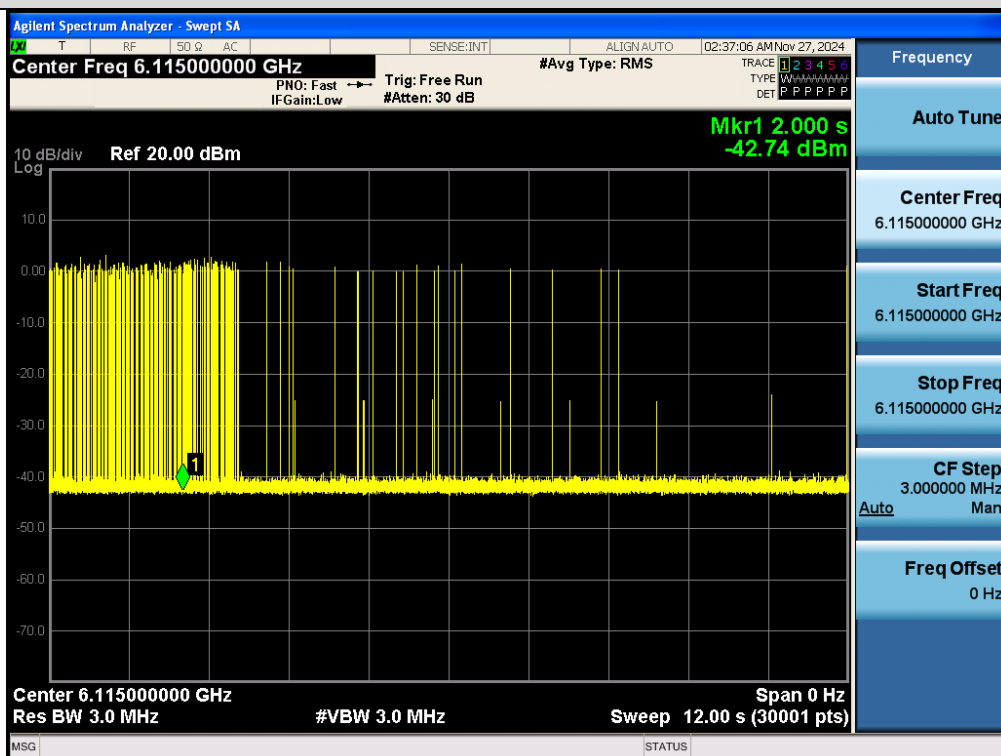


802.11 BE (20MHz) /6115MHz - Normal Operation

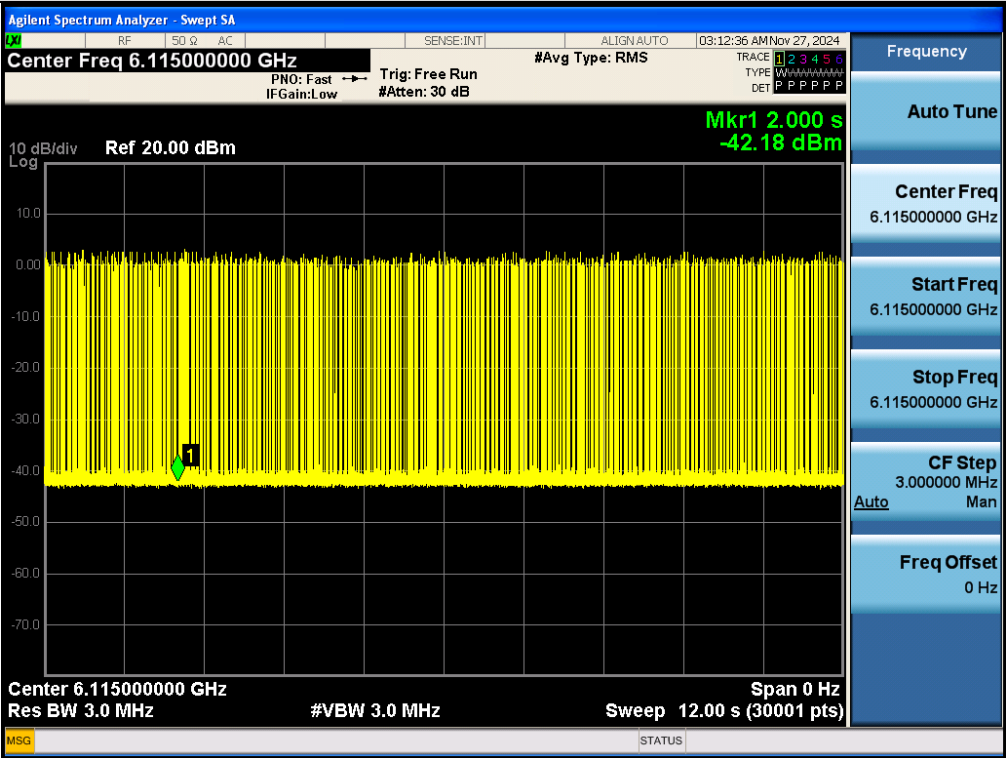


802.11 BE (20MHz) /6435MHz - Stop Transmission


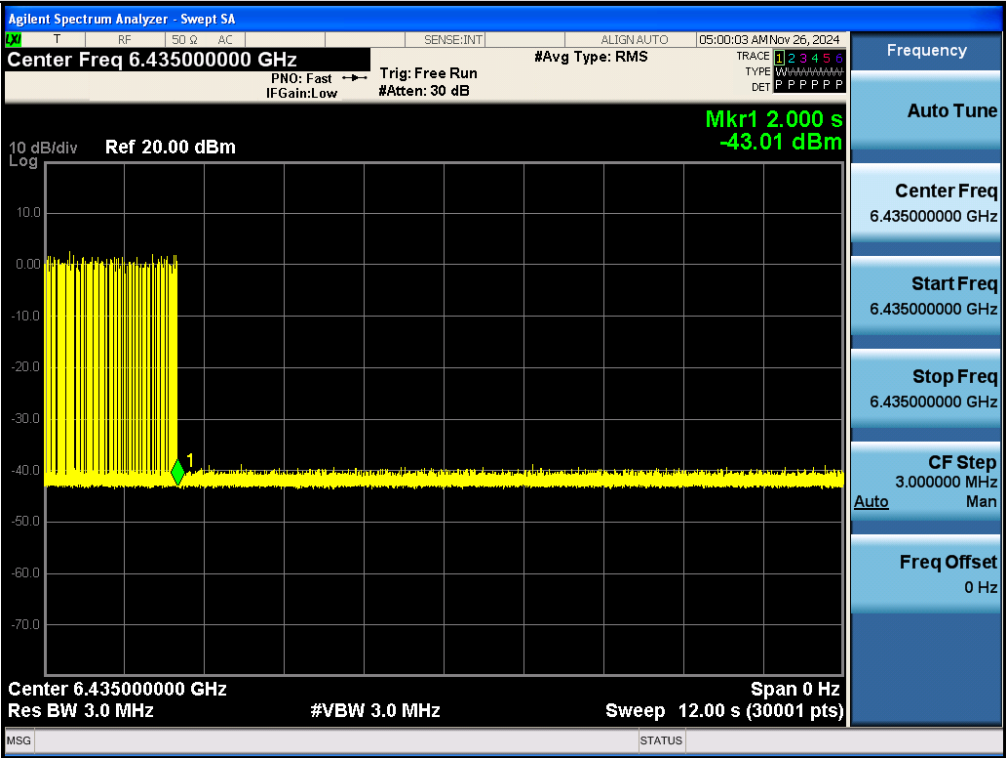


802.11 BE (20MHz) /6435MHz - Minimal Operation

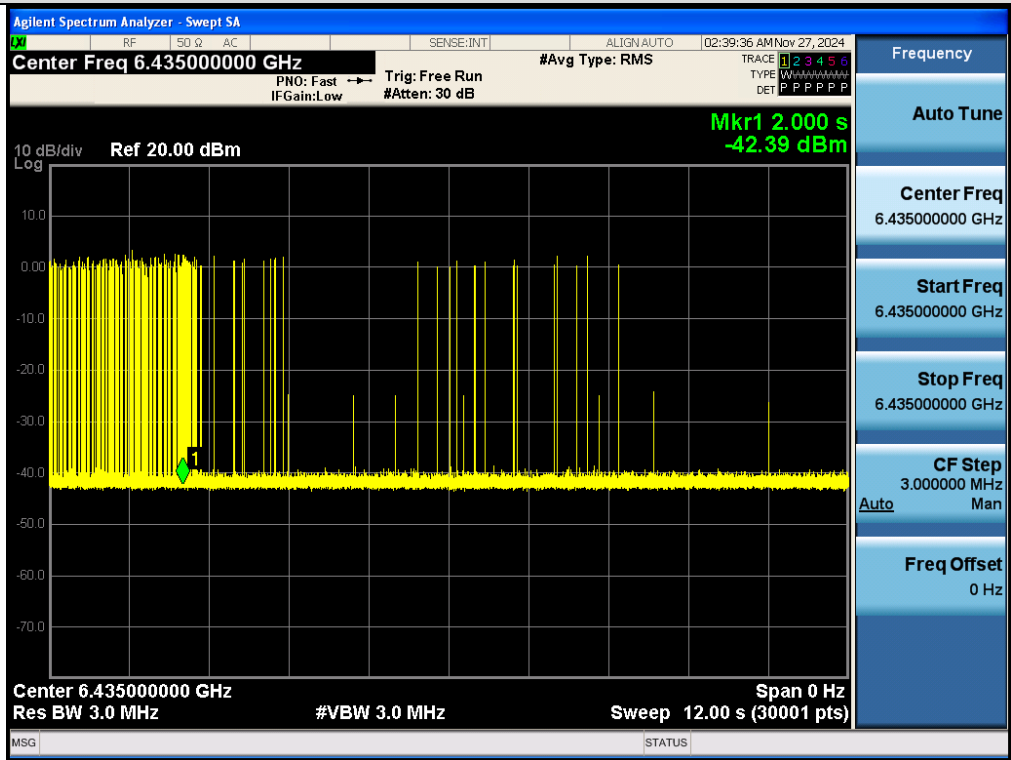


802.11 BE (20MHz) /6435MHz - Normal Operation

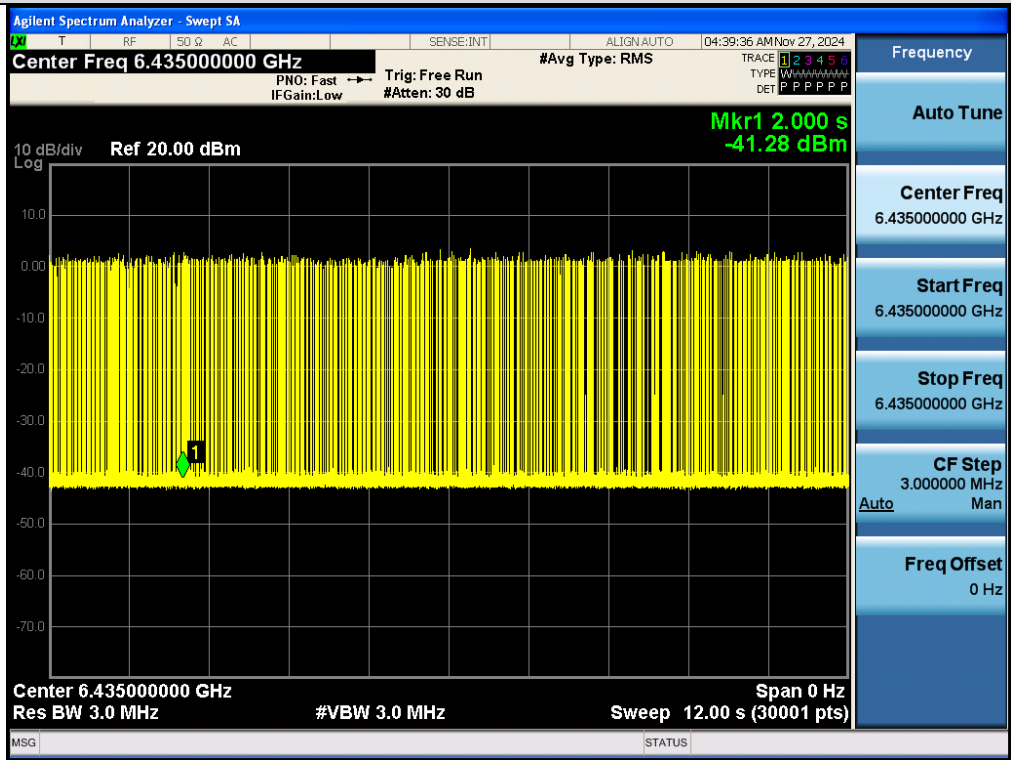


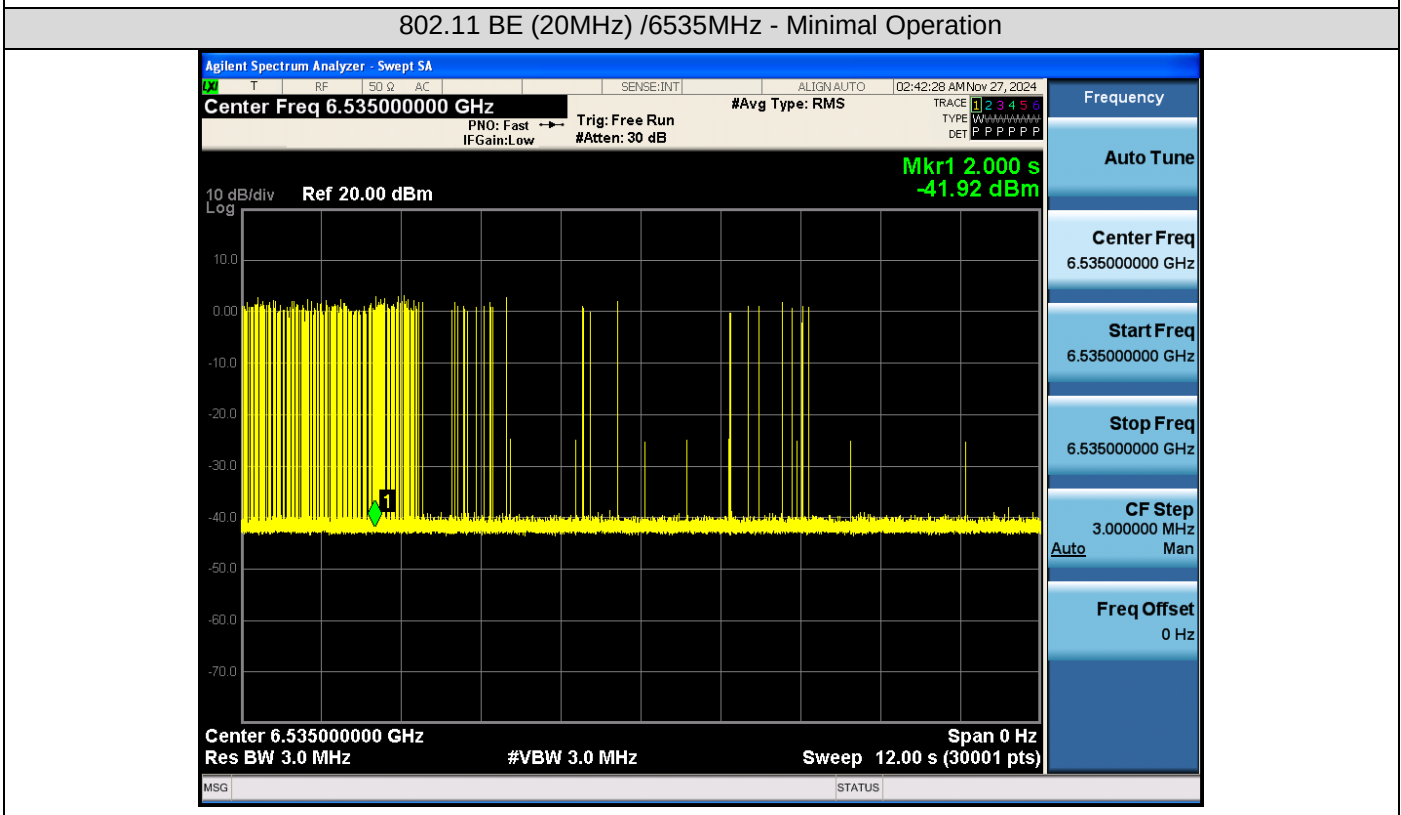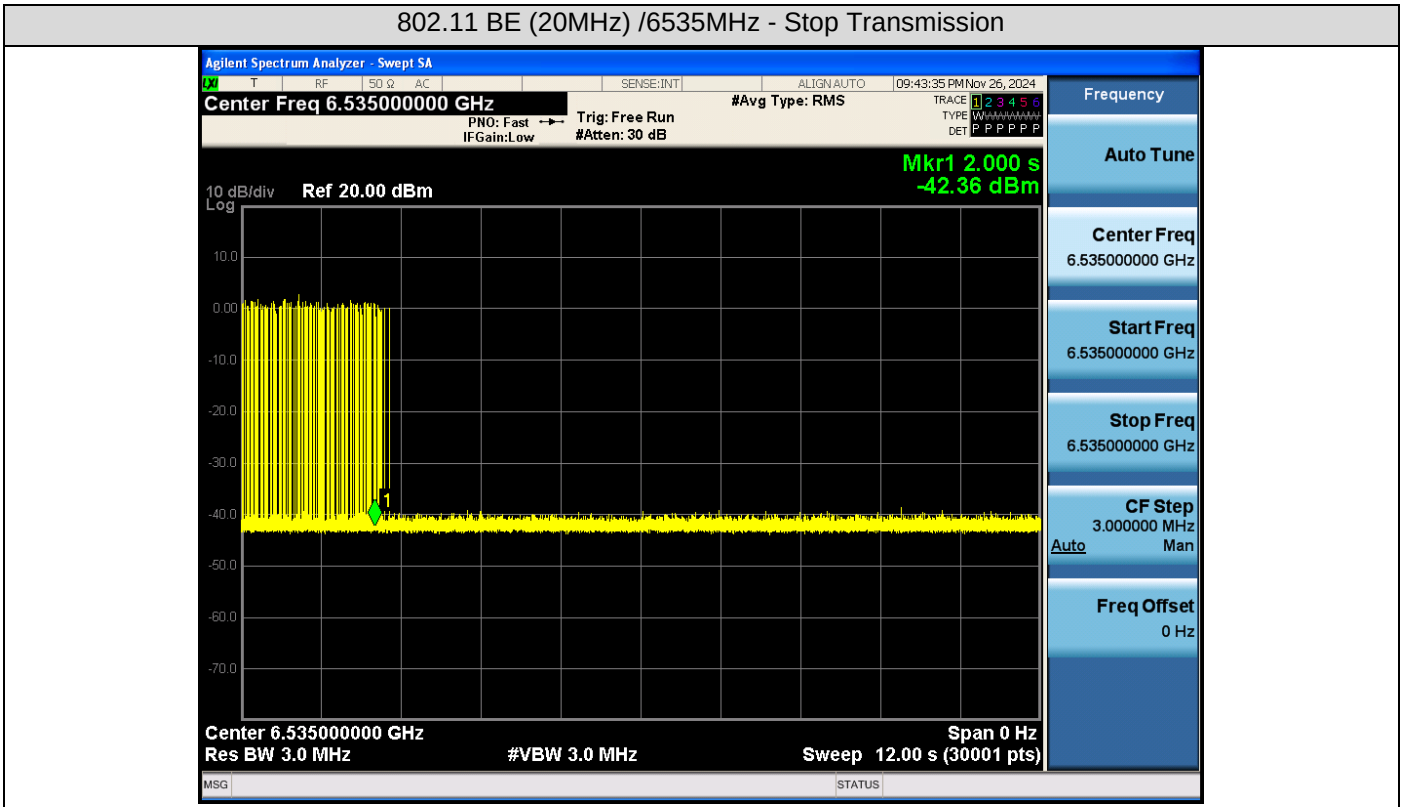


802.11 BE (20MHz) /6535MHz - Normal Operation

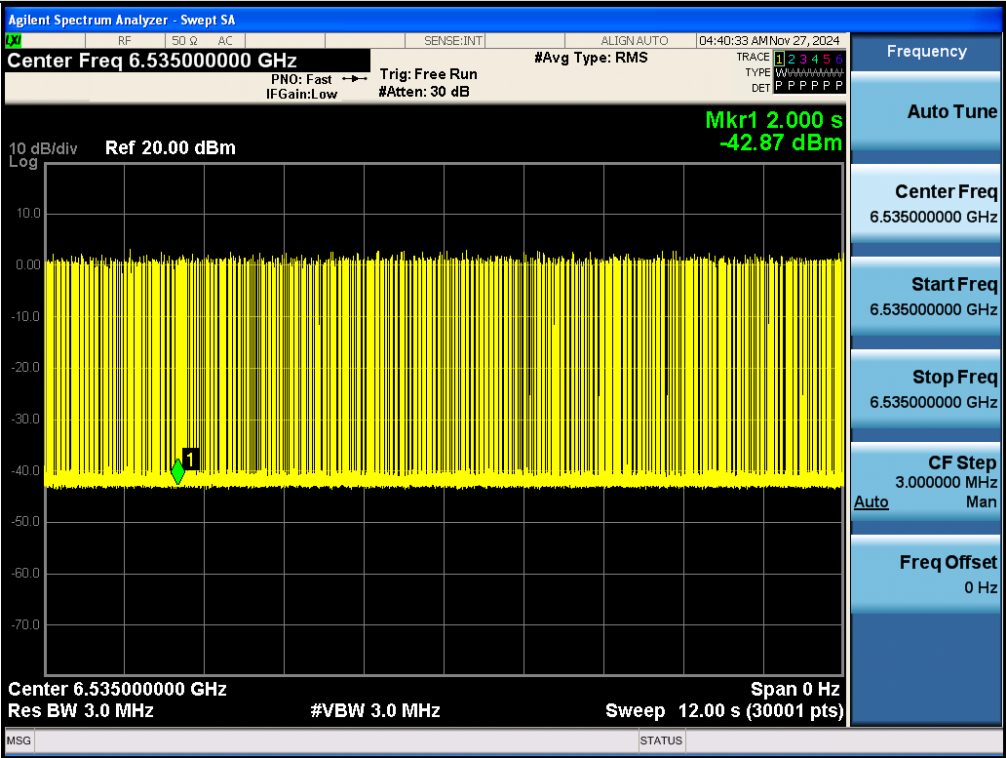


802.11 BE (20MHz) /6895MHz - Stop Transmission

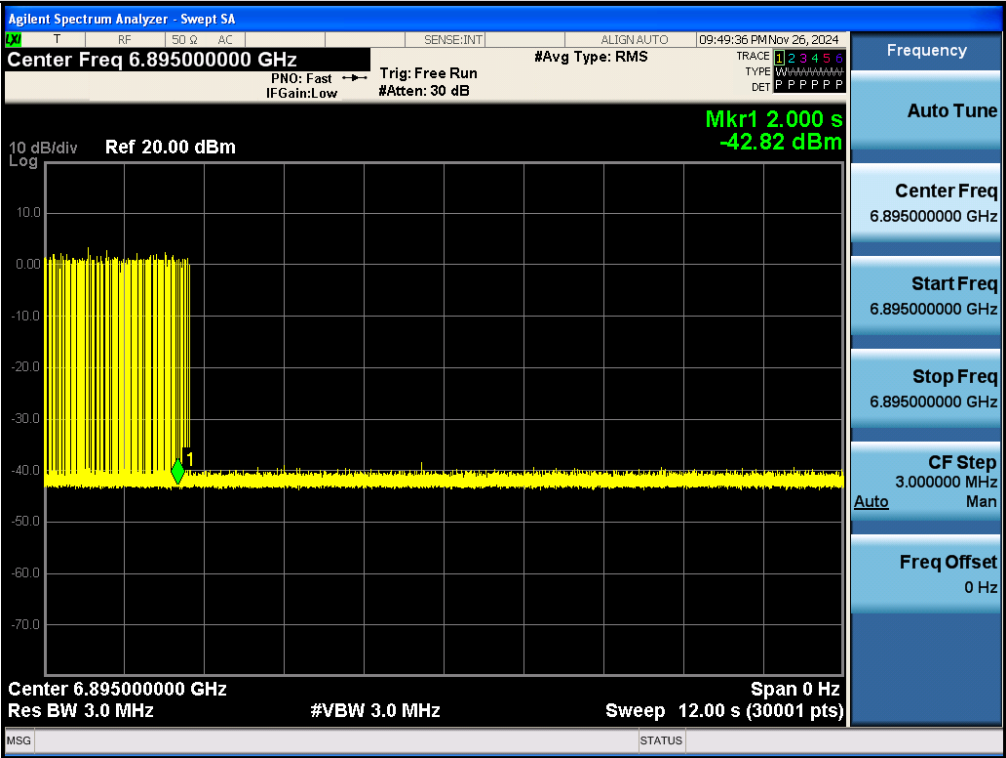


802.11 BE (20MHz) /6895MHz - Minimal Operation

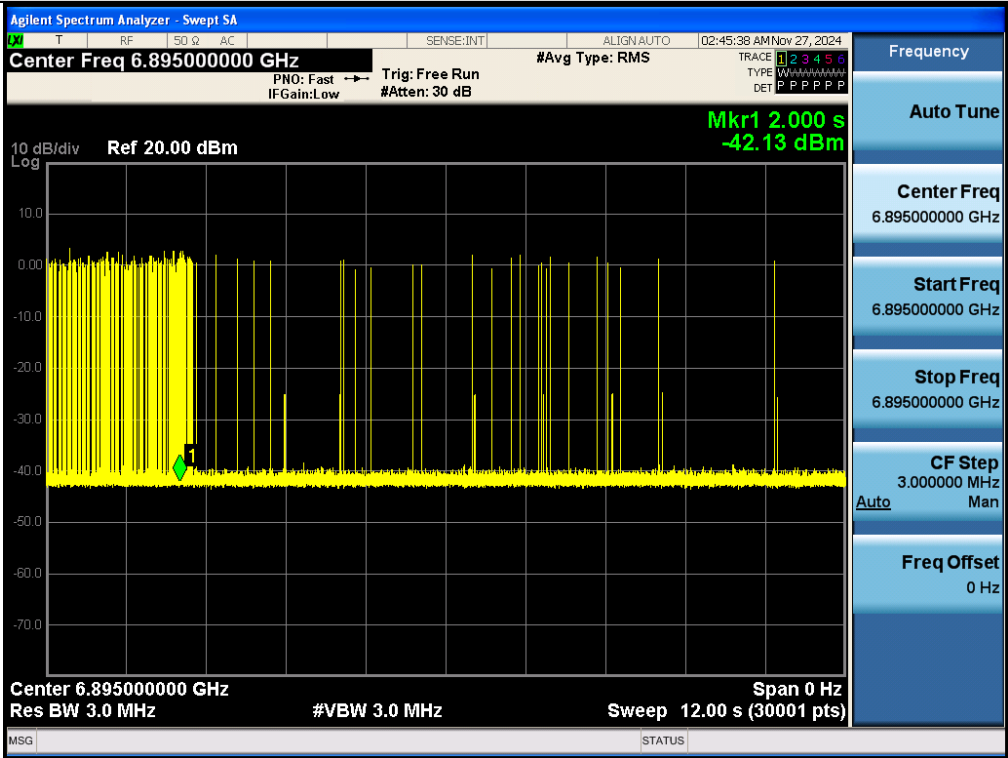


802.11 BE (20MHz) /6895MHz - Normal Operation

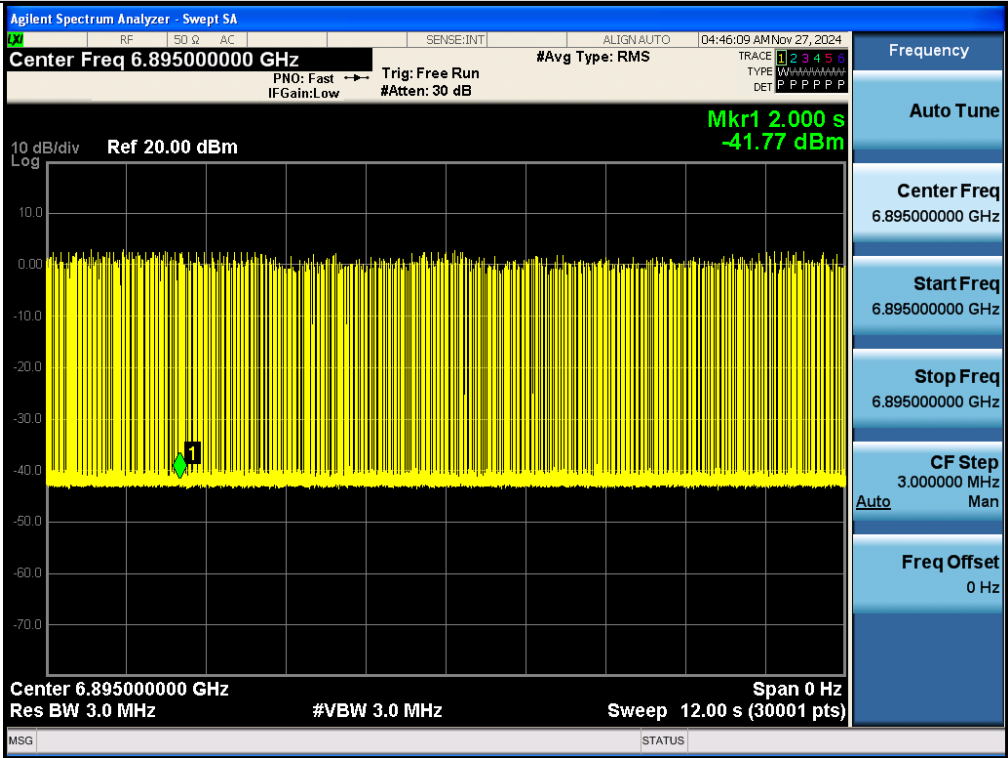


802.11 BE (320MHz) /6265 - 6110MHz - Stop Transmission

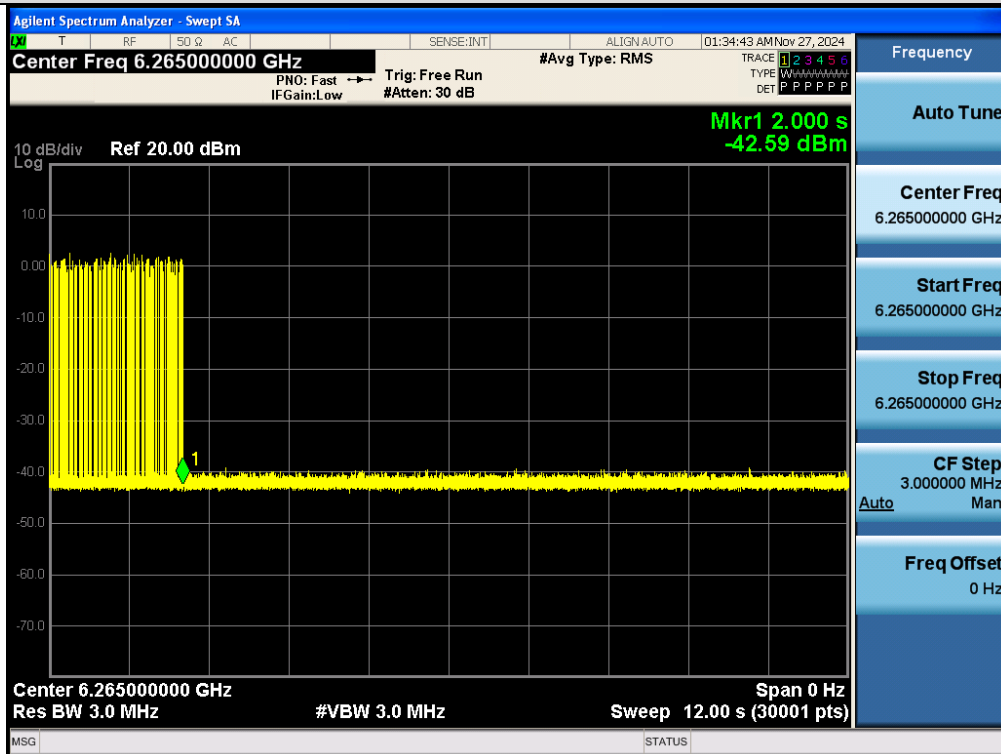


802.11 BE (320MHz) 6265-6110MHz - Minimal Operation

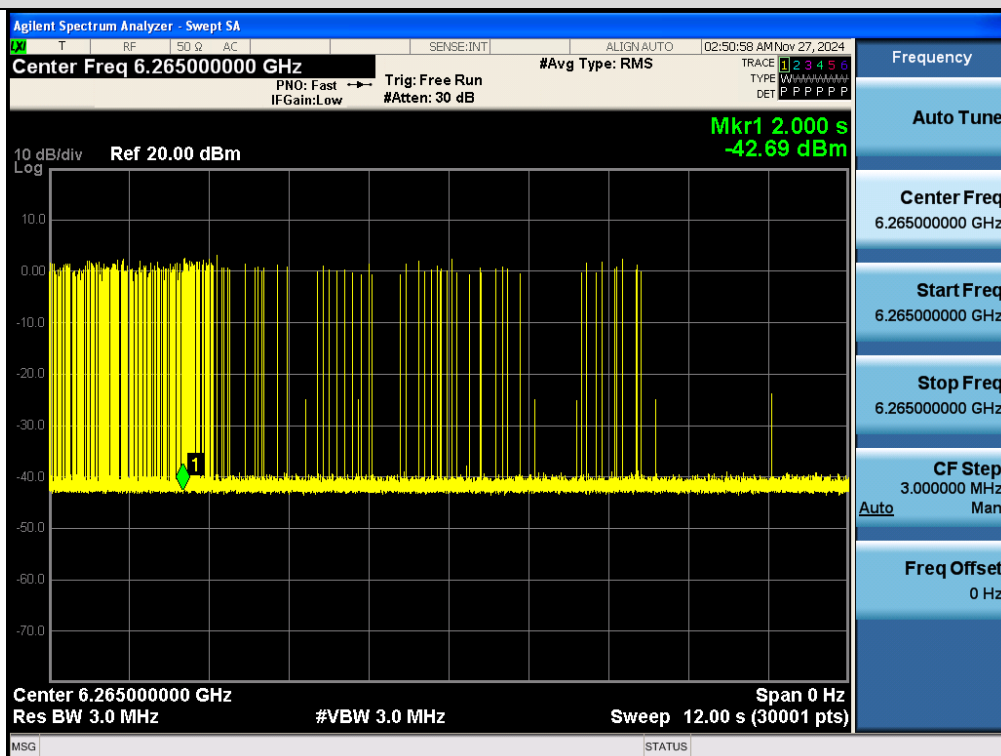




802.11 BE (320MHz) 6265- 6110MHz - Normal Operation

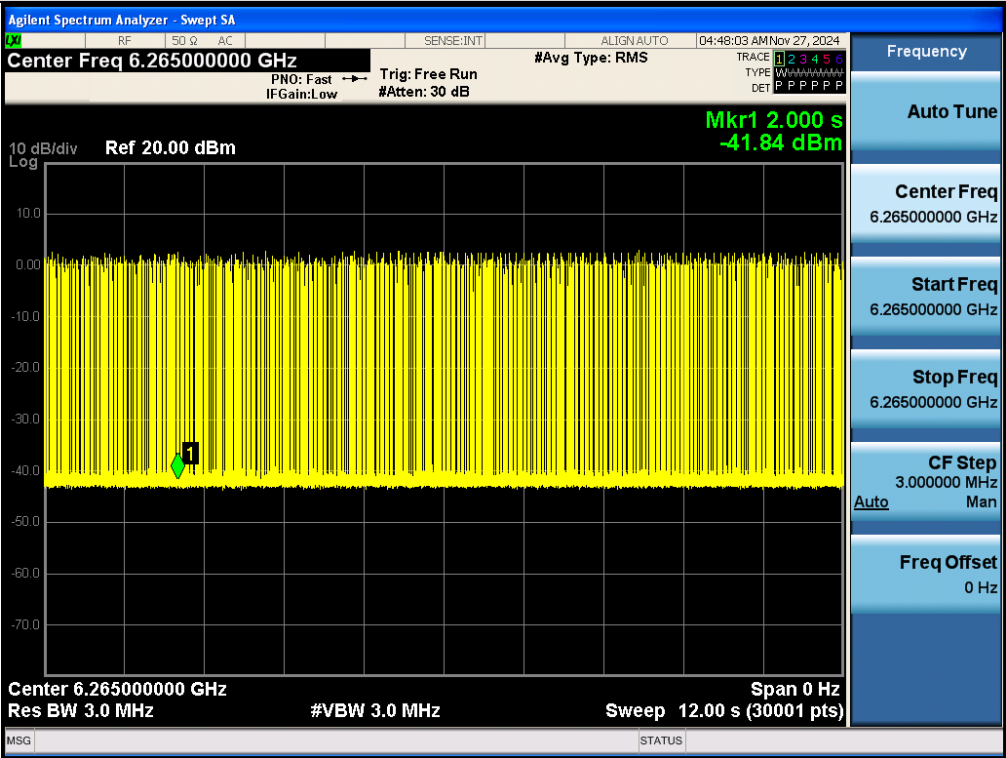


802.11 BE (320MHz) /6265MHz - Stop Transmission

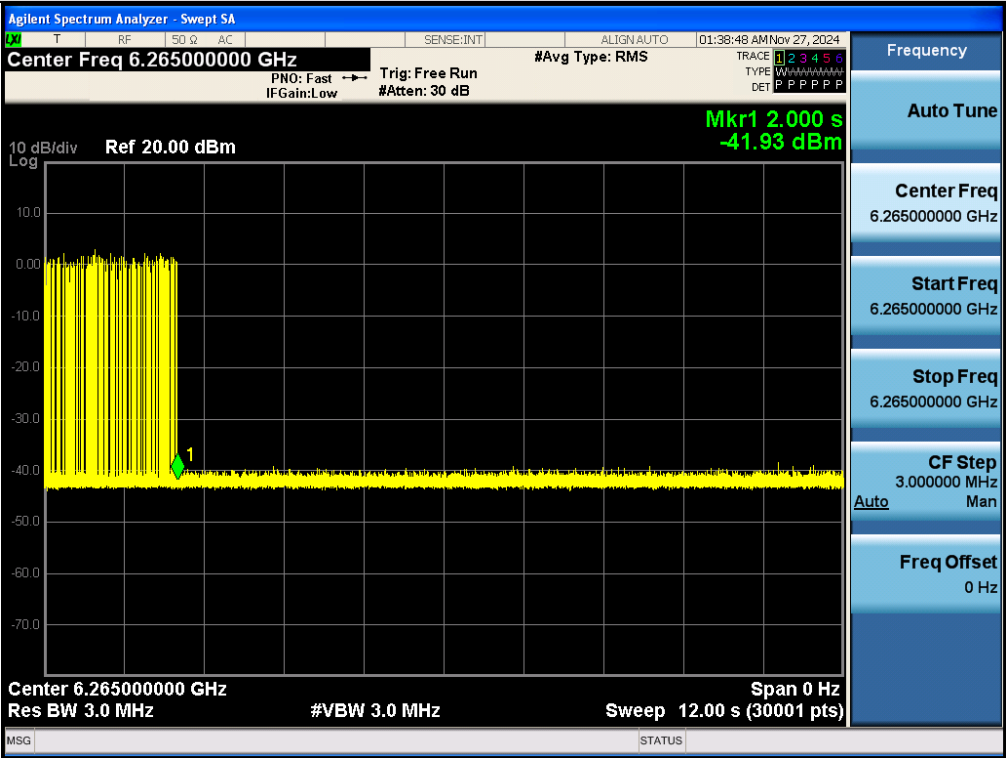

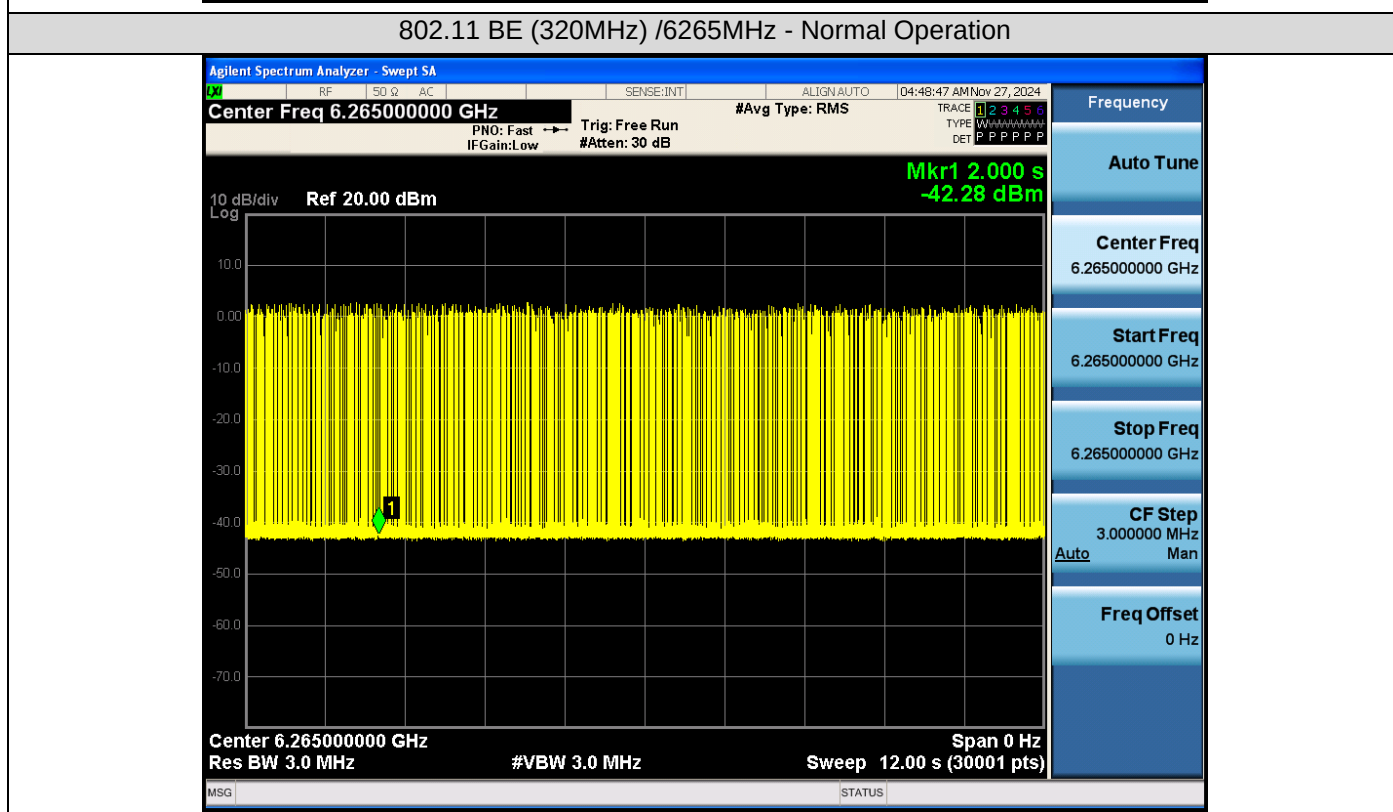


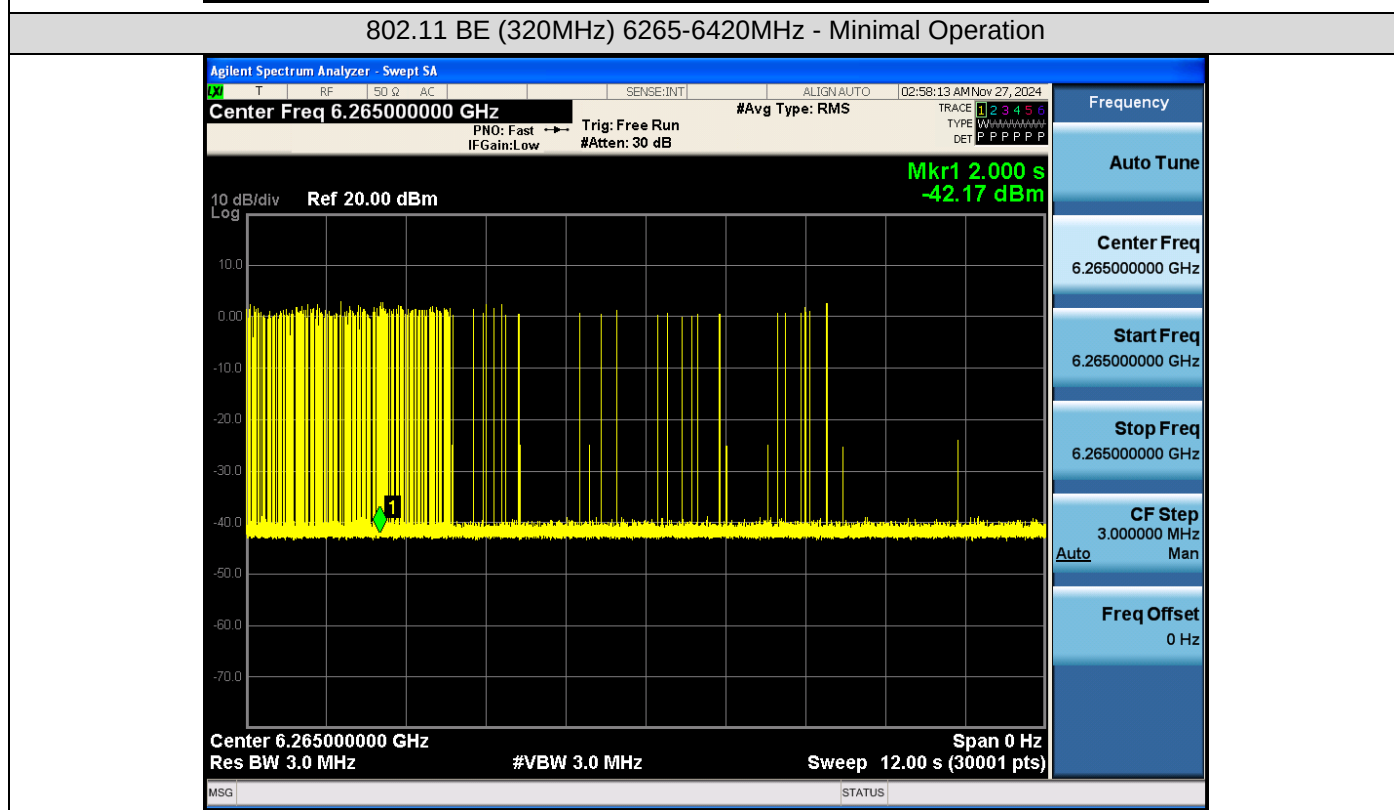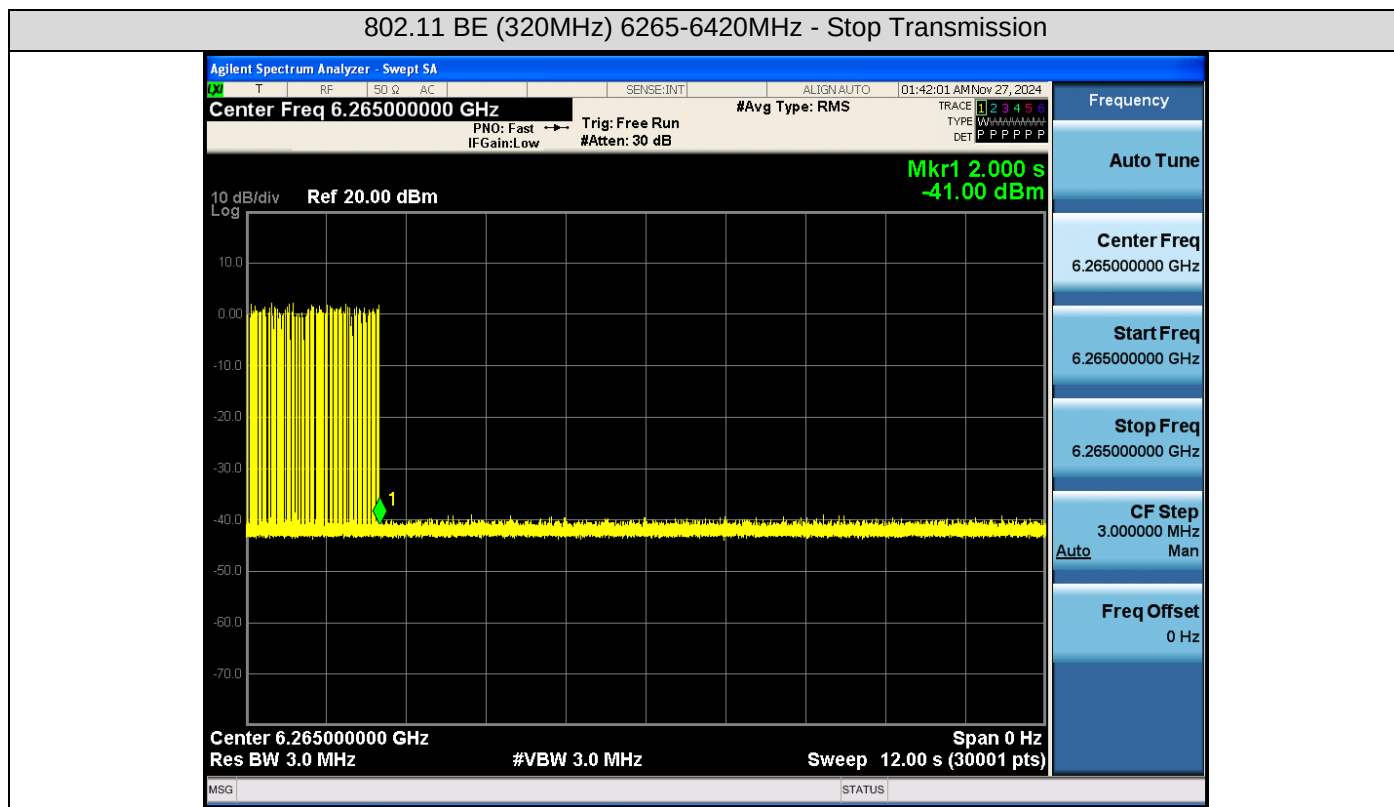


802.11 BE (320MHz) 6265-6420MHz - Normal Operation

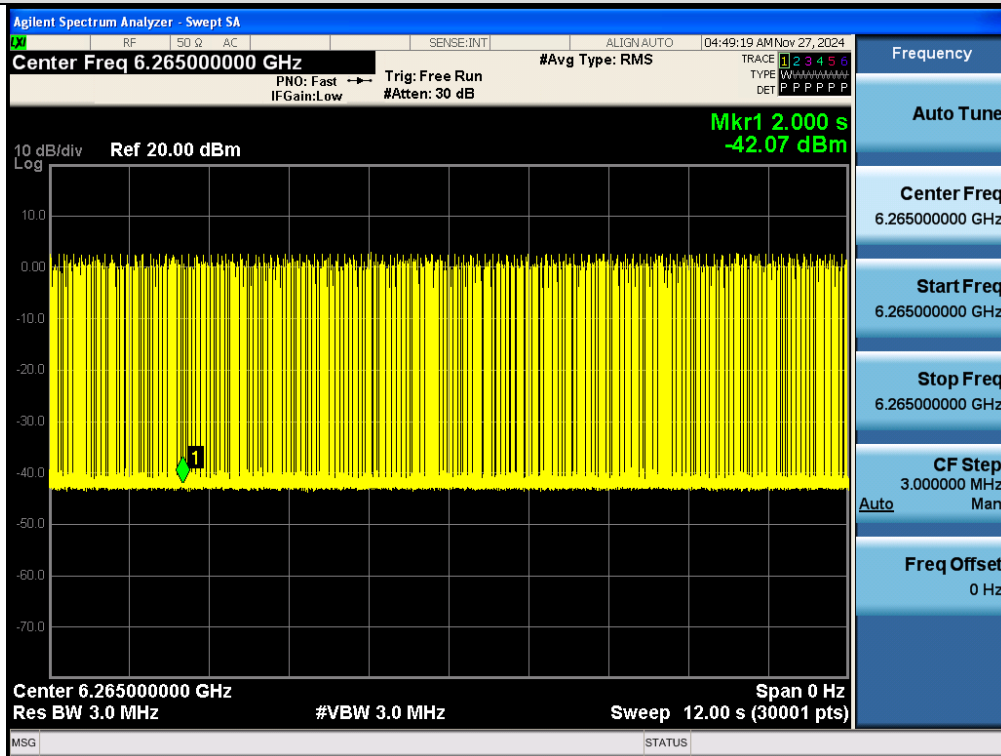


802.11 BE (320MHz) 6905-6750MHz - Stop Transmission


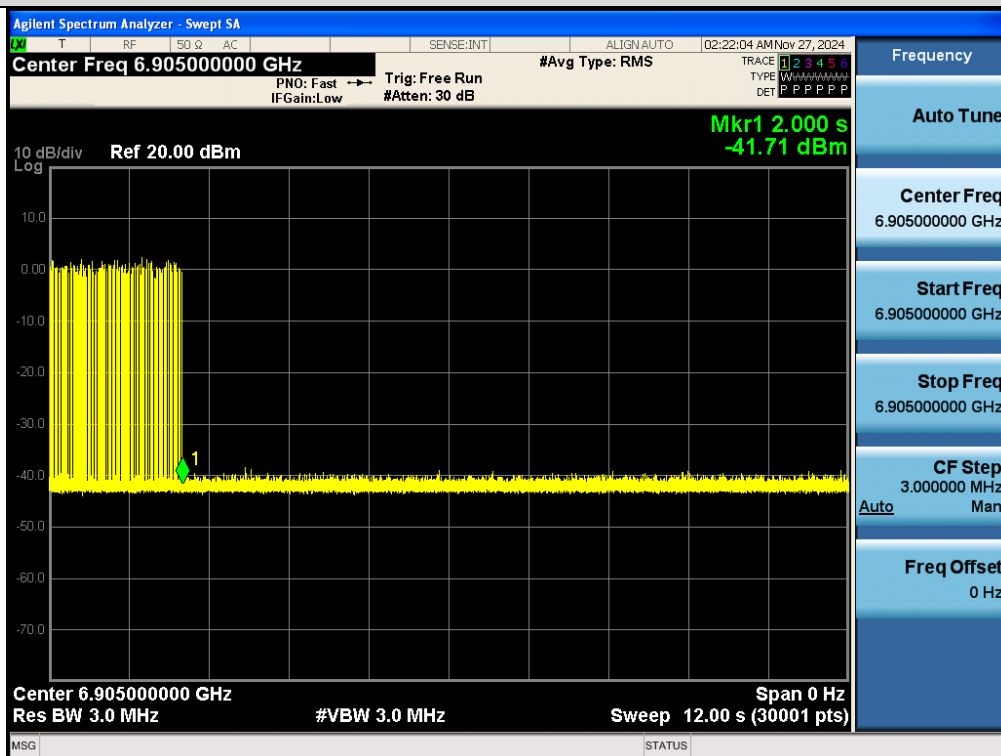


802.11 BE (320MHz) 6905-6750MHz - Minimal Operation

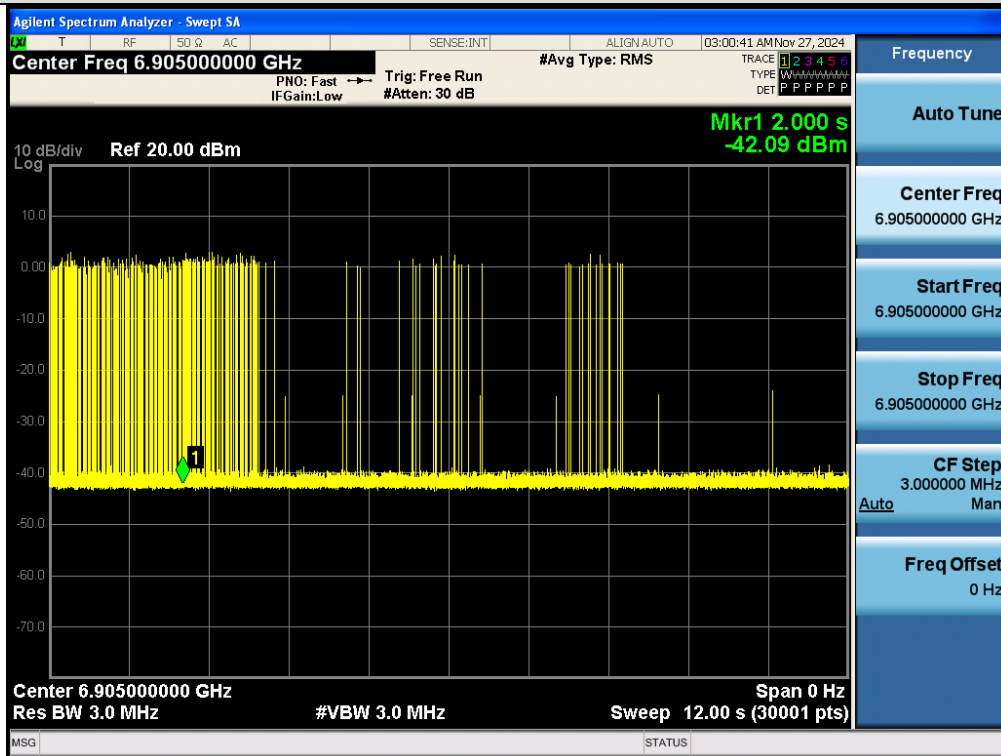


802.11 BE (320MHz) 6905-6750MHz - Normal Operation

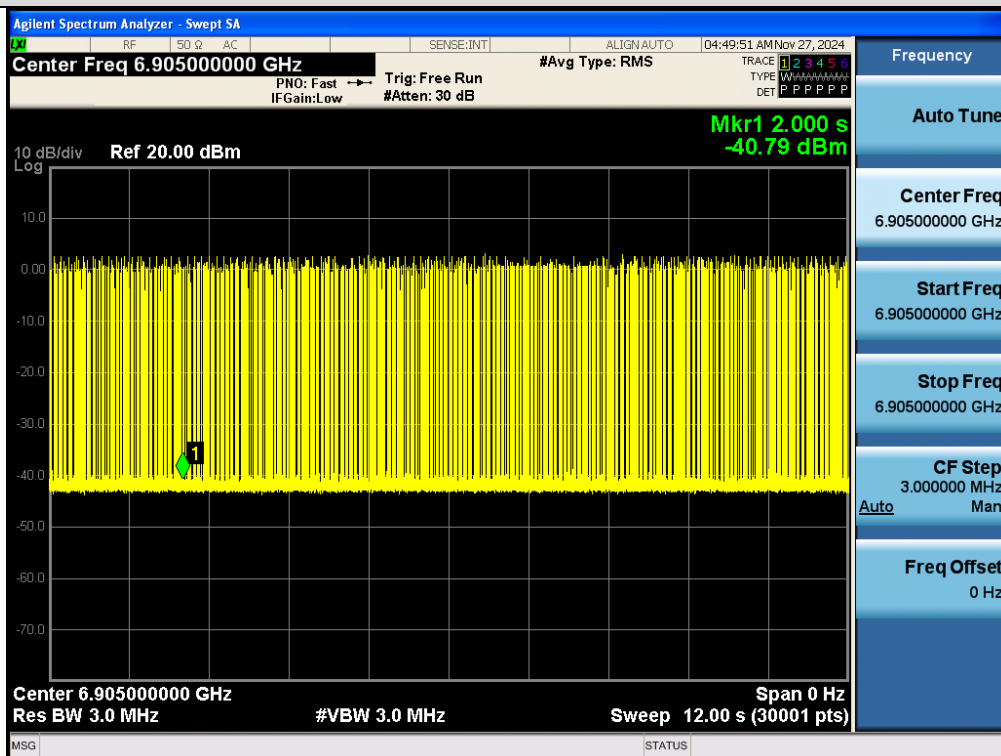


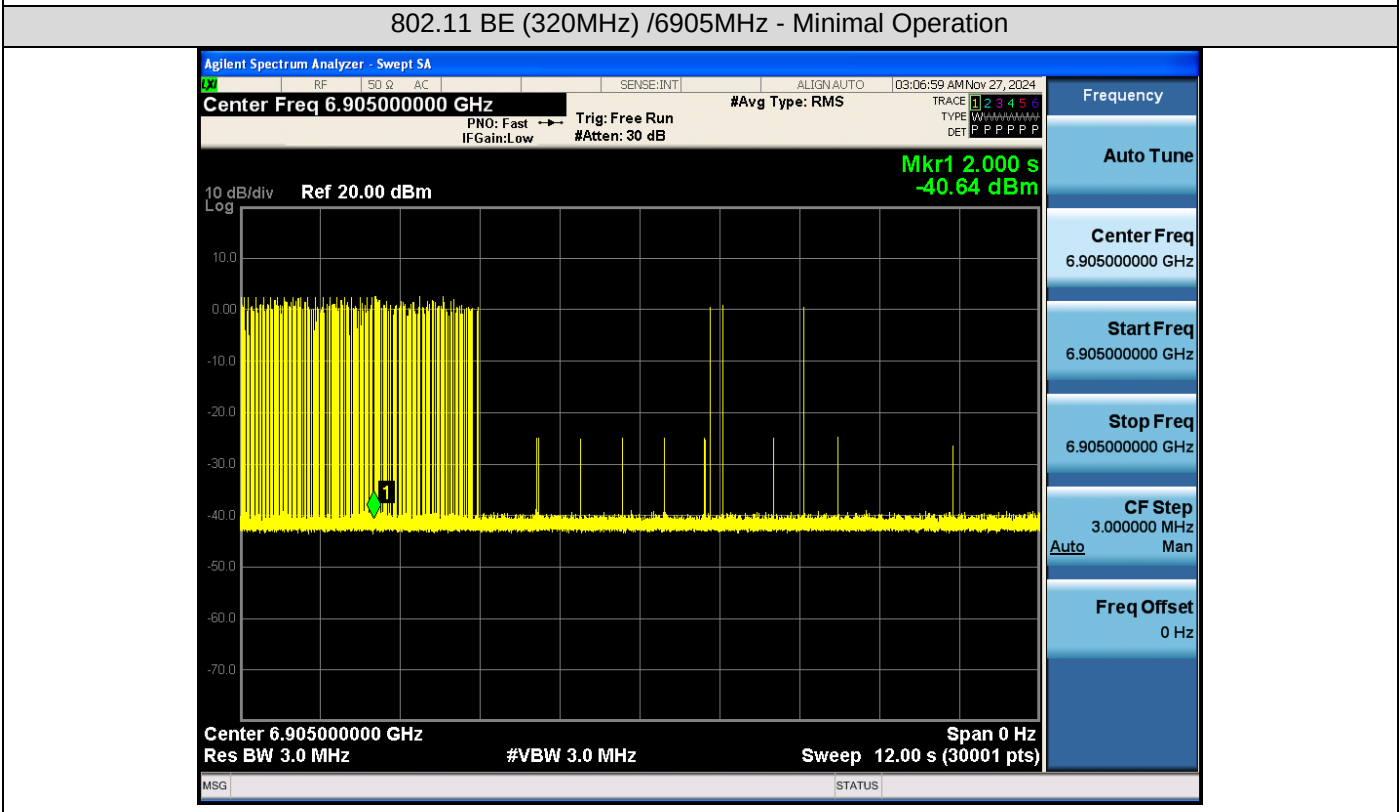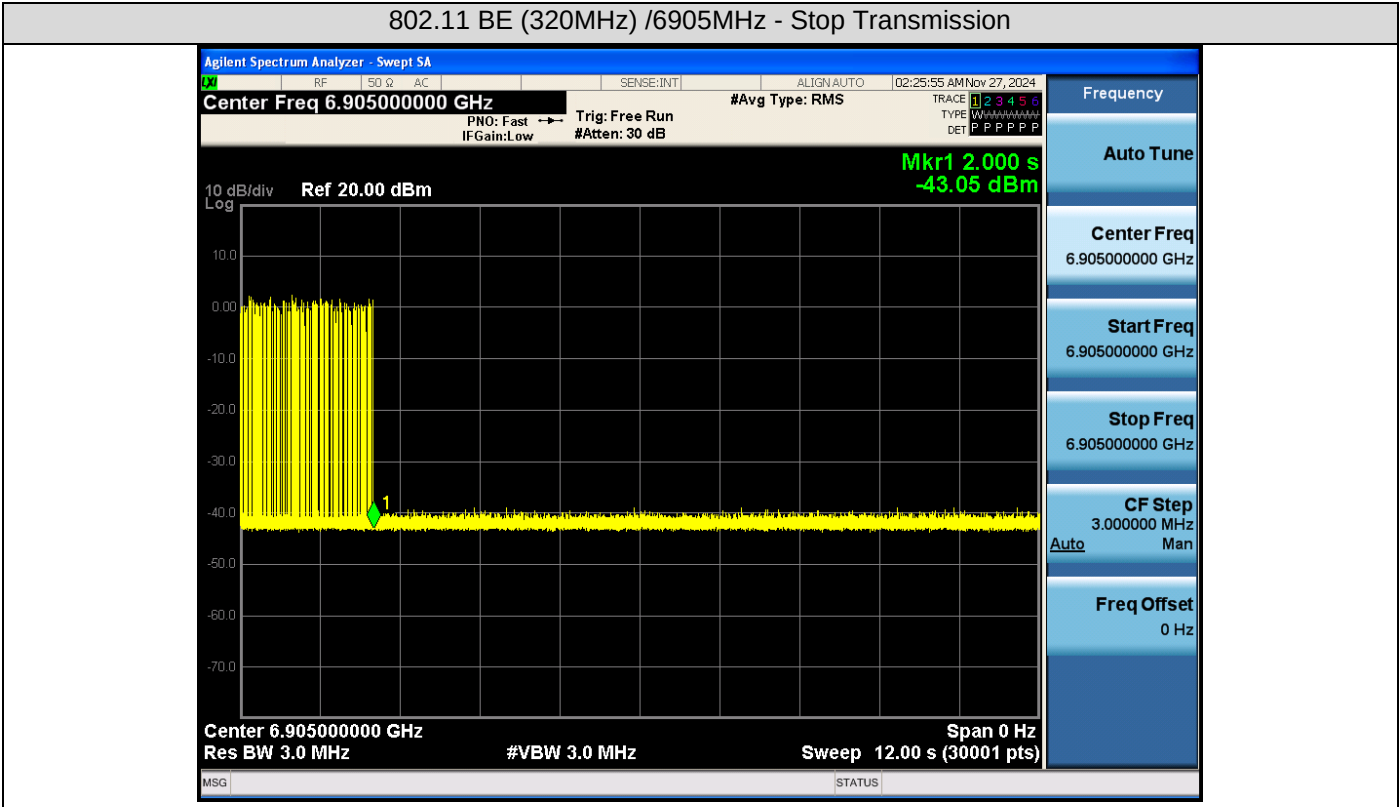


802.11 BE (320MHz) /6905MHz - Normal Operation

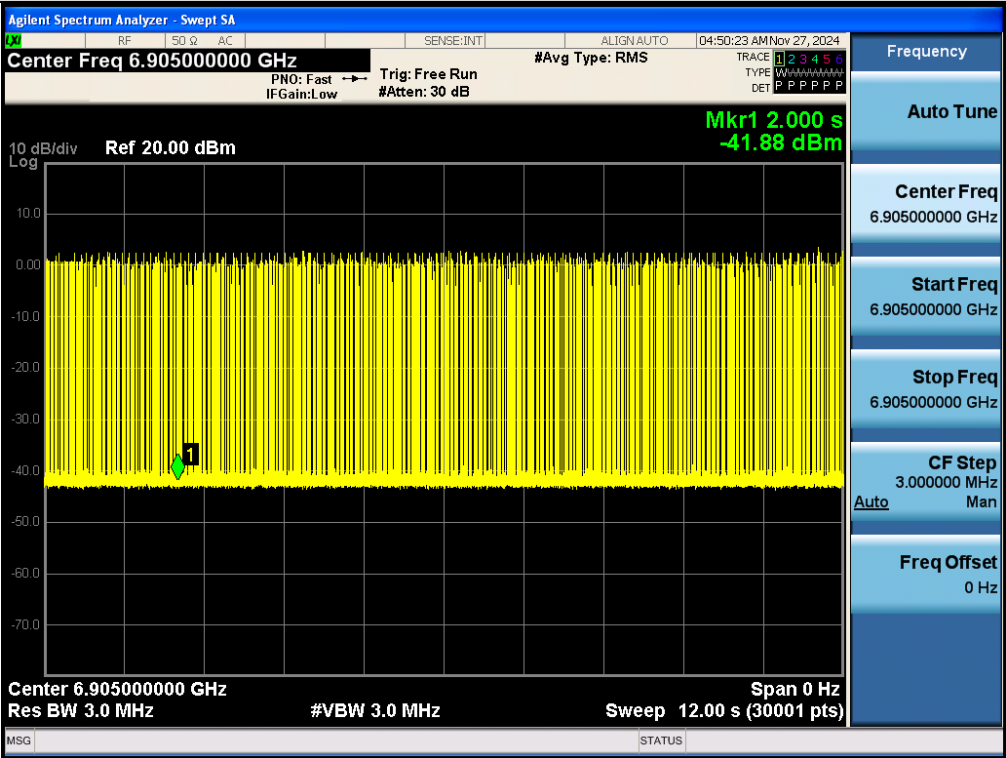


802.11 BE (320MHz) 6905 -7060MHz - Stop Transmission

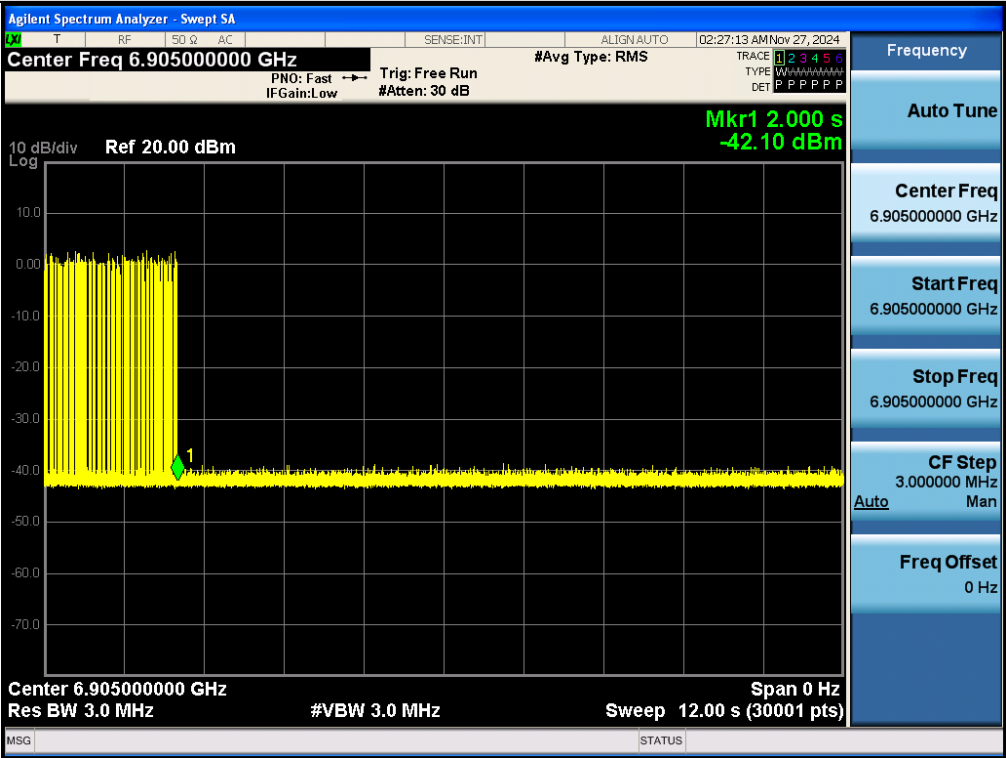

802.11 BE (320MHz) 6905 -7060MHz - Minimal Operation

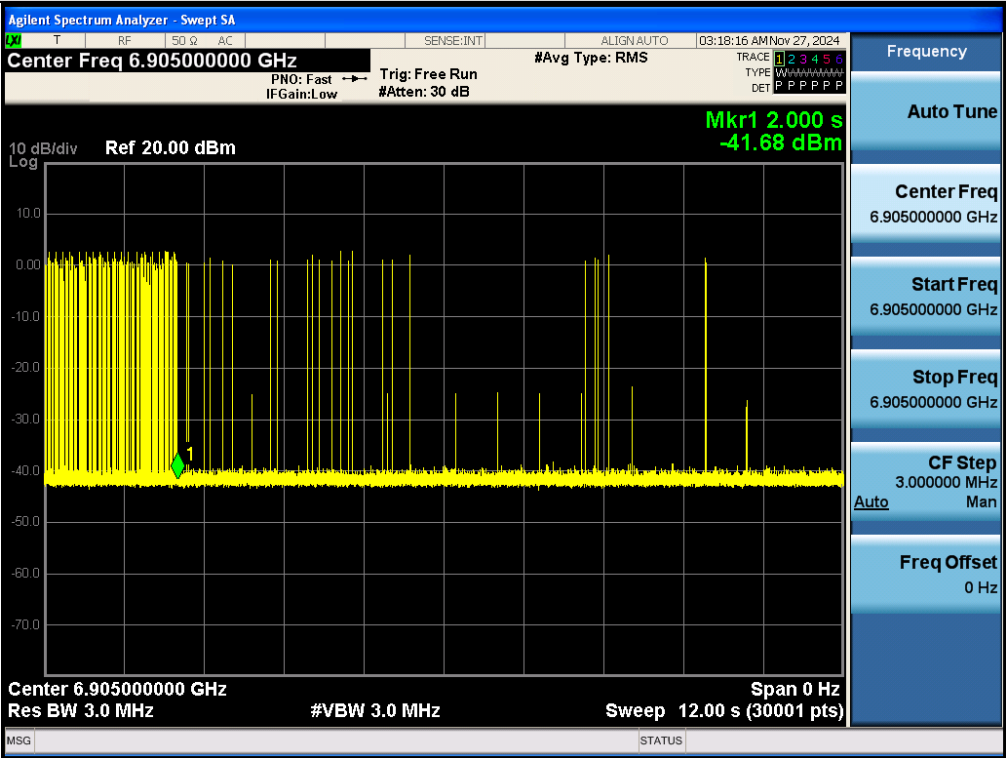

802.11 BE (320MHz) 6905 -7060MHz - Normal Operation

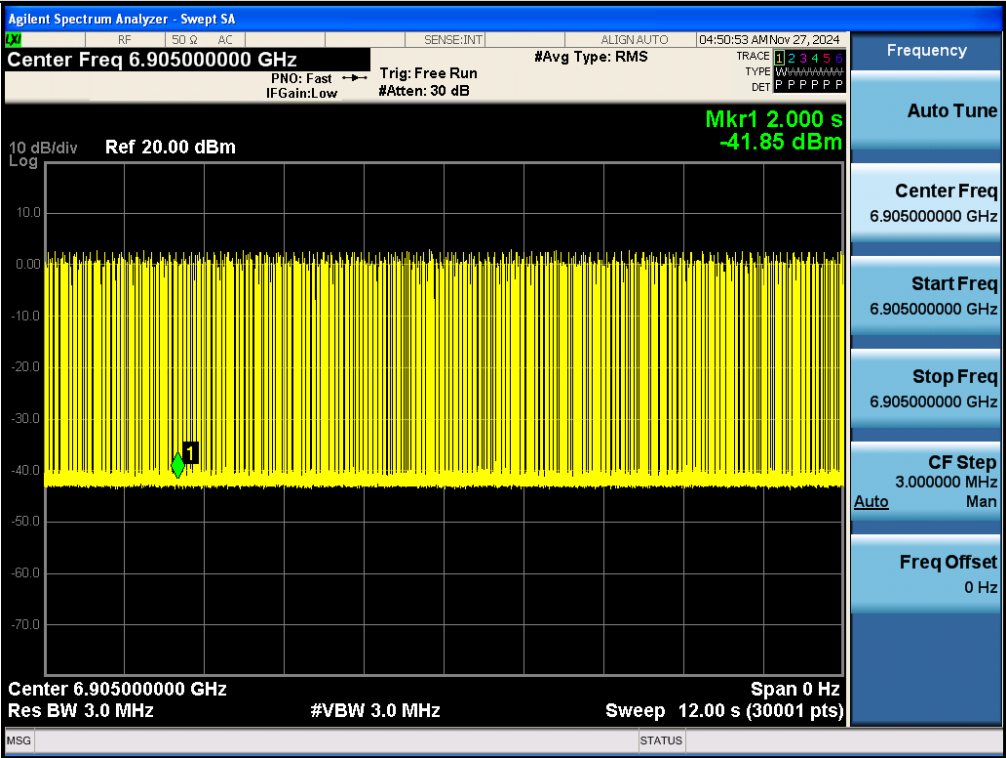


Appendix G: In-Band Emissions

Test Mode	Antenna	Frequency[MHz]	Result	Limit	Verdict
11AX20SISO	Ant1	5955	See test graph	See test graph	PASS
11AX20SISO	Ant1	6175	See test graph	See test graph	PASS
11AX20SISO	Ant1	6415	See test graph	See test graph	PASS
11AX20SISO	Ant1	6435	See test graph	See test graph	PASS
11AX20SISO	Ant1	6475	See test graph	See test graph	PASS
11AX20SISO	Ant1	6515	See test graph	See test graph	PASS
11AX20SISO	Ant1	6535	See test graph	See test graph	PASS
11AX20SISO	Ant1	6695	See test graph	See test graph	PASS
11AX20SISO	Ant1	6855	See test graph	See test graph	PASS
11AX20SISO	Ant1	6875	See test graph	See test graph	PASS
11AX20SISO	Ant1	6895	See test graph	See test graph	PASS
11AX20SISO	Ant1	6995	See test graph	See test graph	PASS
11AX20SISO	Ant1	7115	See test graph	See test graph	PASS
11AX40SISO	Ant1	5965	See test graph	See test graph	PASS
11AX40SISO	Ant1	6165	See test graph	See test graph	PASS
11AX40SISO	Ant1	6405	See test graph	See test graph	PASS
11AX40SISO	Ant1	6445	See test graph	See test graph	PASS
11AX40SISO	Ant1	6485	See test graph	See test graph	PASS
11AX40SISO	Ant1	6525	See test graph	See test graph	PASS
11AX40SISO	Ant1	6565	See test graph	See test graph	PASS
11AX40SISO	Ant1	6685	See test graph	See test graph	PASS
11AX40SISO	Ant1	6845	See test graph	See test graph	PASS
11AX40SISO	Ant1	6885	See test graph	See test graph	PASS
11AX40SISO	Ant1	6925	See test graph	See test graph	PASS
11AX40SISO	Ant1	6965	See test graph	See test graph	PASS
11AX40SISO	Ant1	7085	See test graph	See test graph	PASS
11AX80SISO	Ant1	5985	See test graph	See test graph	PASS
11AX80SISO	Ant1	6145	See test graph	See test graph	PASS
11AX80SISO	Ant1	6385	See test graph	See test graph	PASS
11AX80SISO	Ant1	6465	See test graph	See test graph	PASS
11AX80SISO	Ant1	6545	See test graph	See test graph	PASS
11AX80SISO	Ant1	6625	See test graph	See test graph	PASS
11AX80SISO	Ant1	6705	See test graph	See test graph	PASS
11AX80SISO	Ant1	6785	See test graph	See test graph	PASS
11AX80SISO	Ant1	6865	See test graph	See test graph	PASS
11AX80SISO	Ant1	6945	See test graph	See test graph	PASS
11AX80SISO	Ant1	7025	See test graph	See test graph	PASS
11AX160SISO	Ant1	6025	See test graph	See test graph	PASS
11AX160SISO	Ant1	6185	See test graph	See test graph	PASS
11AX160SISO	Ant1	6345	See test graph	See test graph	PASS
11AX160SISO	Ant1	6505	See test graph	See test graph	PASS
11AX160SISO	Ant1	6665	See test graph	See test graph	PASS
11AX160SISO	Ant1	6825	See test graph	See test graph	PASS
11AX160SISO	Ant1	6985	See test graph	See test graph	PASS
11BE20SISO	Ant1	5955	See test graph	See test graph	PASS
11BE20SISO	Ant1	6175	See test graph	See test graph	PASS
11BE20SISO	Ant1	6415	See test graph	See test graph	PASS


11BE20SISO	Ant1	6435	See test graph	See test graph	PASS
11BE20SISO	Ant1	6475	See test graph	See test graph	PASS
11BE20SISO	Ant1	6515	See test graph	See test graph	PASS
11BE20SISO	Ant1	6535	See test graph	See test graph	PASS
11BE20SISO	Ant1	6695	See test graph	See test graph	PASS
11BE20SISO	Ant1	6855	See test graph	See test graph	PASS
11BE20SISO	Ant1	6875	See test graph	See test graph	PASS
11BE20SISO	Ant1	6895	See test graph	See test graph	PASS
11BE20SISO	Ant1	6995	See test graph	See test graph	PASS
11BE20SISO	Ant1	7115	See test graph	See test graph	PASS
11BE40SISO	Ant1	5965	See test graph	See test graph	PASS
11BE40SISO	Ant1	6165	See test graph	See test graph	PASS
11BE40SISO	Ant1	6405	See test graph	See test graph	PASS
11BE40SISO	Ant1	6445	See test graph	See test graph	PASS
11BE40SISO	Ant1	6485	See test graph	See test graph	PASS
11BE40SISO	Ant1	6525	See test graph	See test graph	PASS
11BE40SISO	Ant1	6565	See test graph	See test graph	PASS
11BE40SISO	Ant1	6685	See test graph	See test graph	PASS
11BE40SISO	Ant1	6845	See test graph	See test graph	PASS
11BE40SISO	Ant1	6885	See test graph	See test graph	PASS
11BE40SISO	Ant1	6925	See test graph	See test graph	PASS
11BE40SISO	Ant1	6965	See test graph	See test graph	PASS
11BE40SISO	Ant1	7085	See test graph	See test graph	PASS
11BE80SISO	Ant1	5985	See test graph	See test graph	PASS
11BE80SISO	Ant1	6145	See test graph	See test graph	PASS
11BE80SISO	Ant1	6385	See test graph	See test graph	PASS
11BE80SISO	Ant1	6465	See test graph	See test graph	PASS
11BE80SISO	Ant1	6545	See test graph	See test graph	PASS
11BE80SISO	Ant1	6625	See test graph	See test graph	PASS
11BE80SISO	Ant1	6705	See test graph	See test graph	PASS
11BE80SISO	Ant1	6785	See test graph	See test graph	PASS
11BE80SISO	Ant1	6865	See test graph	See test graph	PASS
11BE80SISO	Ant1	6945	See test graph	See test graph	PASS
11BE80SISO	Ant1	7025	See test graph	See test graph	PASS
11BE160SISO	Ant1	6025	See test graph	See test graph	PASS
11BE160SISO	Ant1	6185	See test graph	See test graph	PASS
11BE160SISO	Ant1	6345	See test graph	See test graph	PASS
11BE160SISO	Ant1	6505	See test graph	See test graph	PASS
11BE160SISO	Ant1	6665	See test graph	See test graph	PASS
11BE160SISO	Ant1	6825	See test graph	See test graph	PASS
11BE160SISO	Ant1	6985	See test graph	See test graph	PASS
11BE320SISO	Ant1	6105	See test graph	See test graph	PASS
11BE320SISO	Ant1	6265	See test graph	See test graph	PASS
11BE320SISO	Ant1	6425	See test graph	See test graph	PASS
11BE320SISO	Ant1	6585	See test graph	See test graph	PASS
11BE320SISO	Ant1	6745	See test graph	See test graph	PASS
11BE320SISO	Ant1	6905	See test graph	See test graph	PASS

Note1. We have evaluated SISO, CDD, Beamforming mode, shown in the report is the worst data.


Note2. We use the RF output power of Low-power indoor access point Mode for testing, which has a higher RF output power.

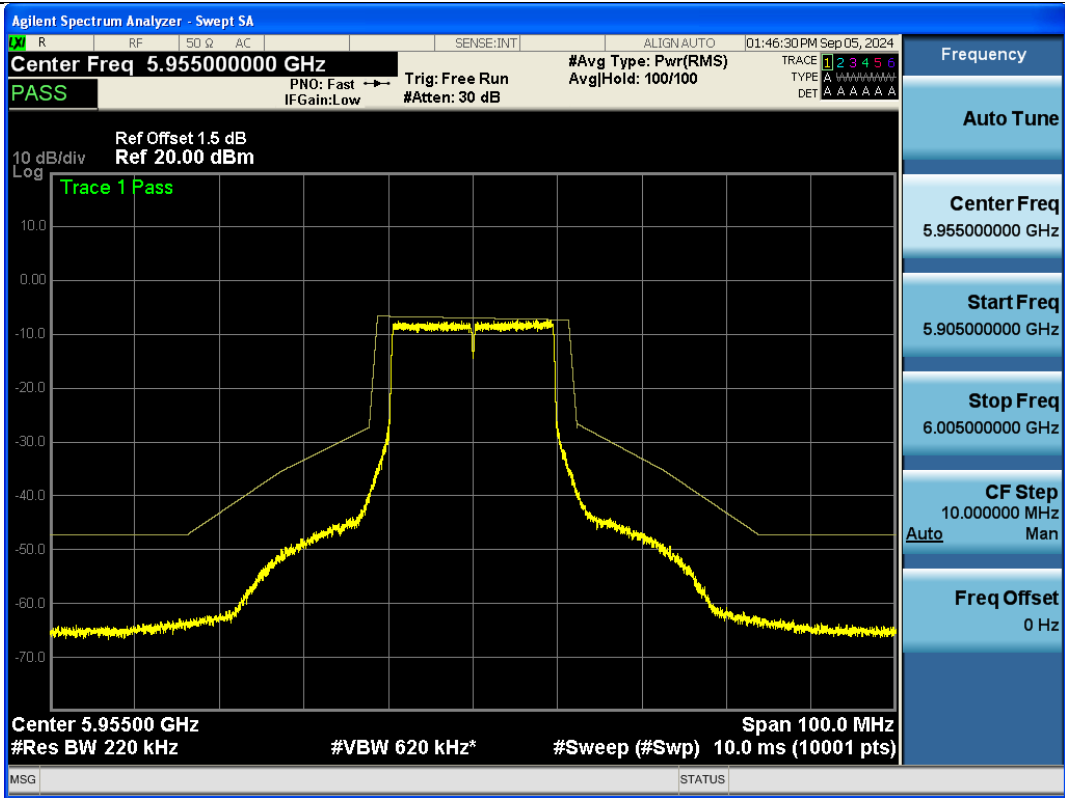


NTNV-11AX20SISO-Ant1-5955-PASS

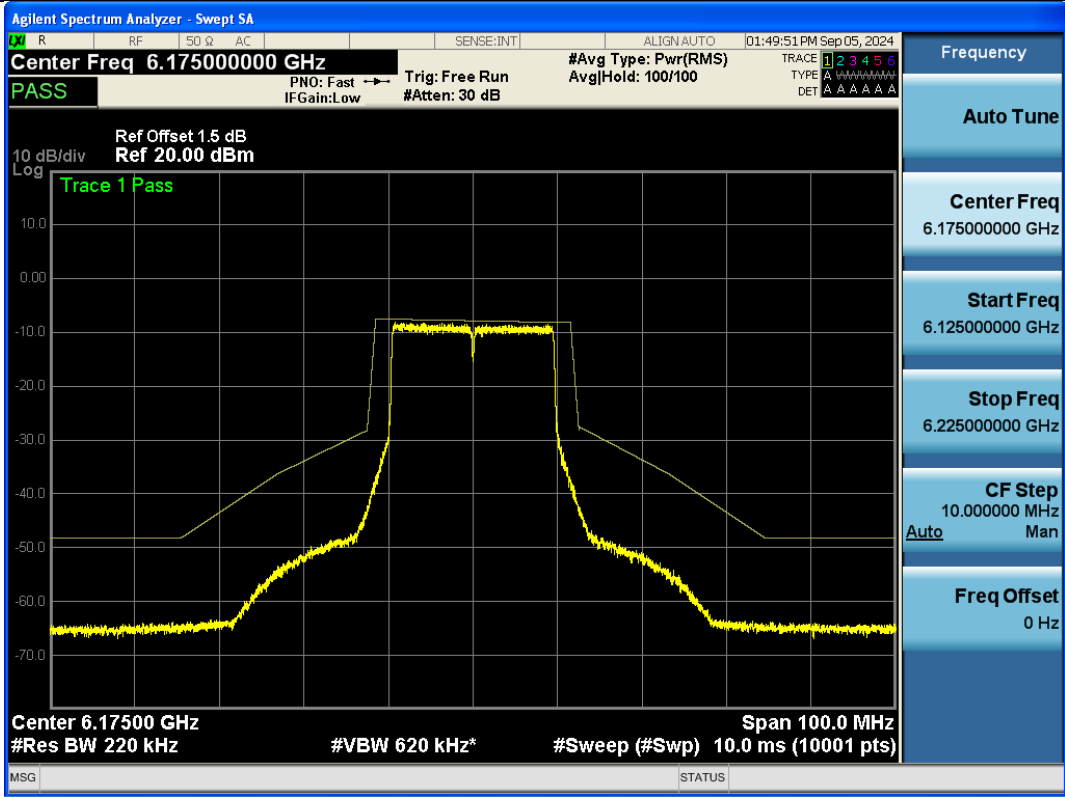


NTNV-11AX20SISO-Ant1-6175-PASS

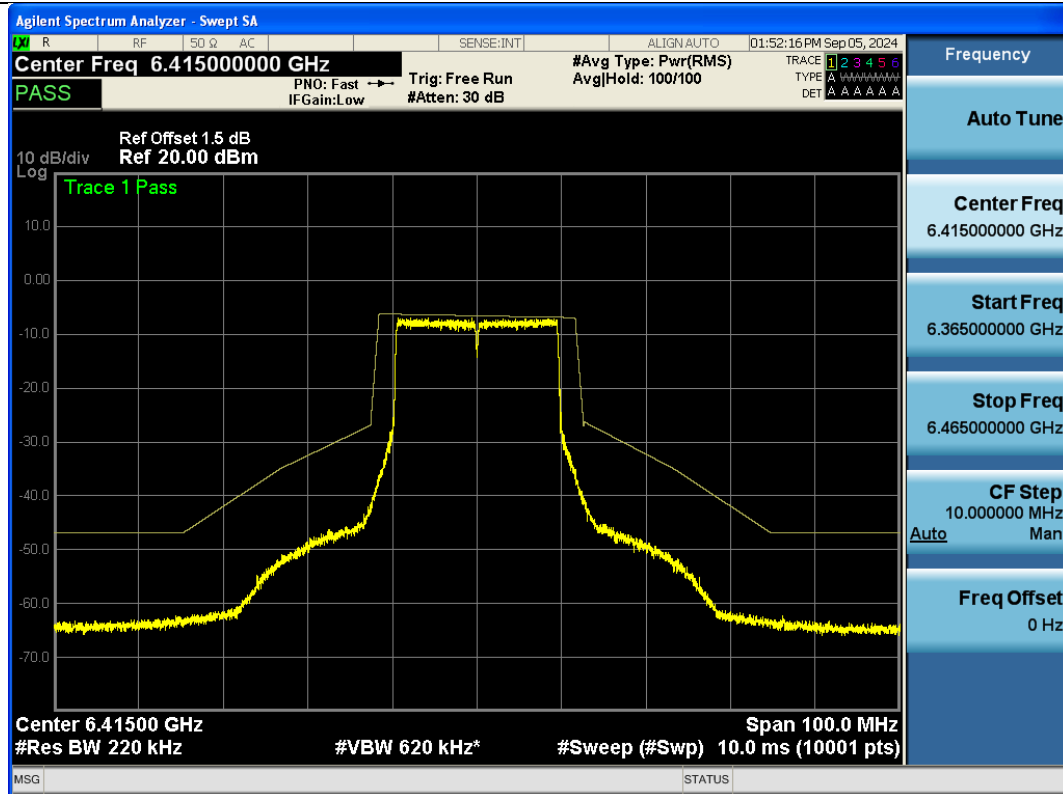


NTNV-11AX20SISO-Ant1-6415-PASS

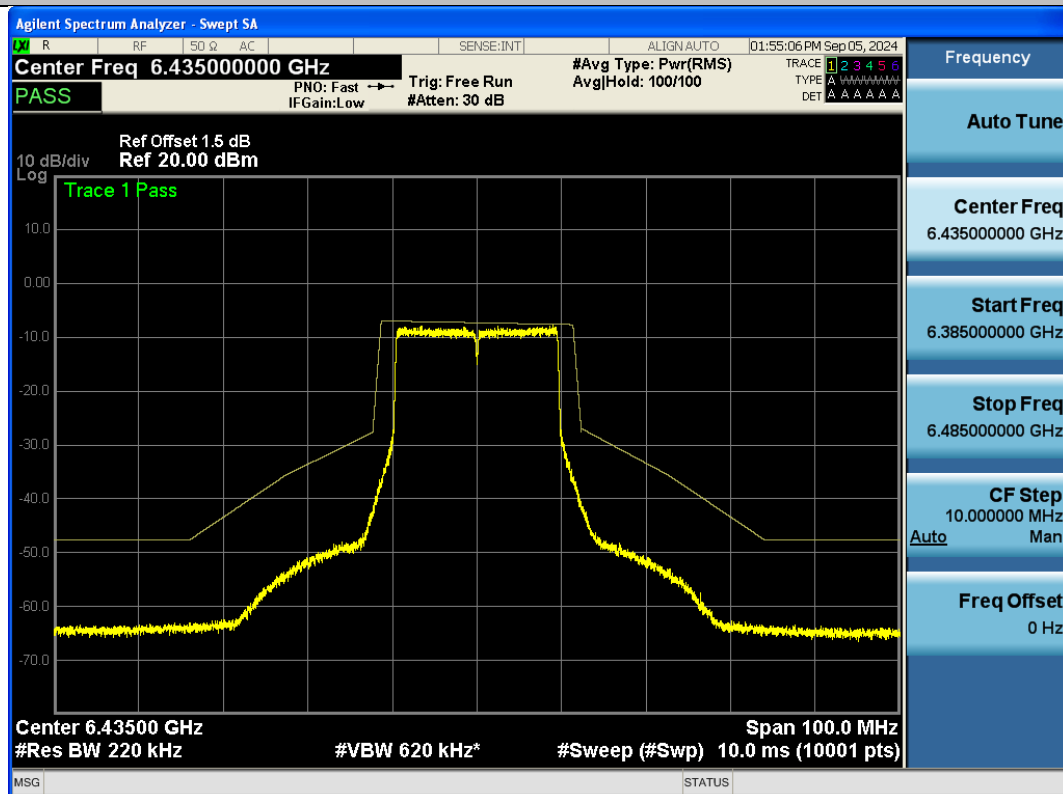


NTNV-11AX20SISO-Ant1-6435-PASS

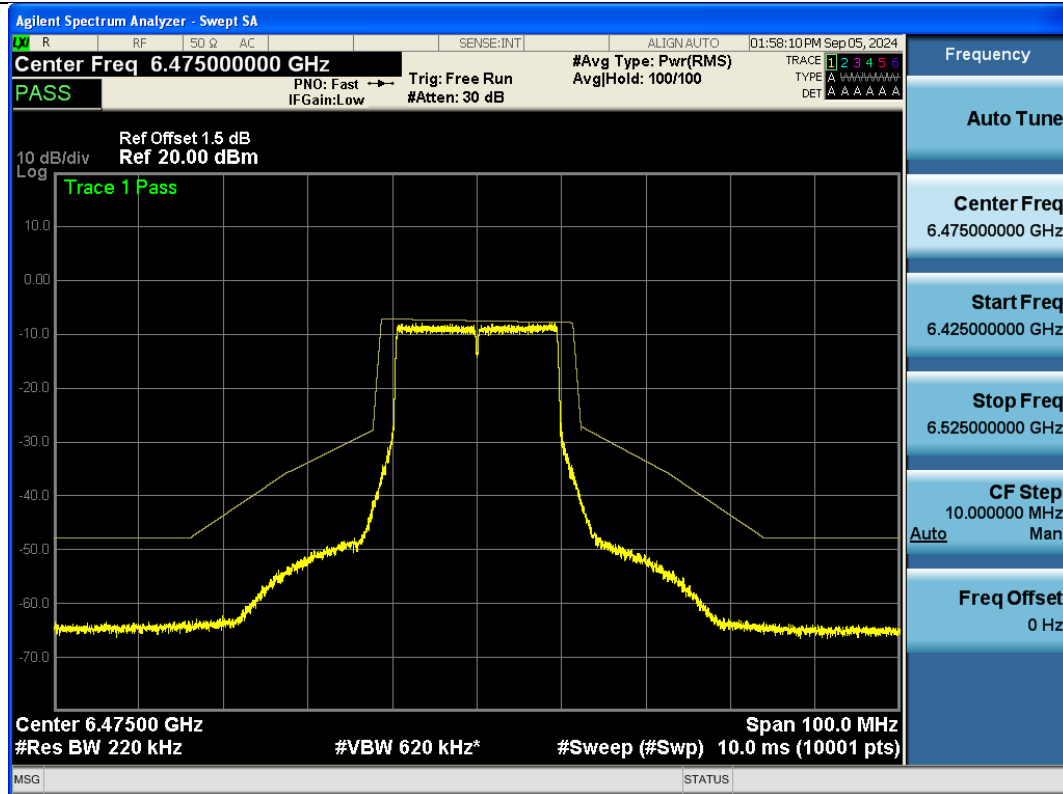


NTNV-11AX20SISO-Ant1-6475-PASS

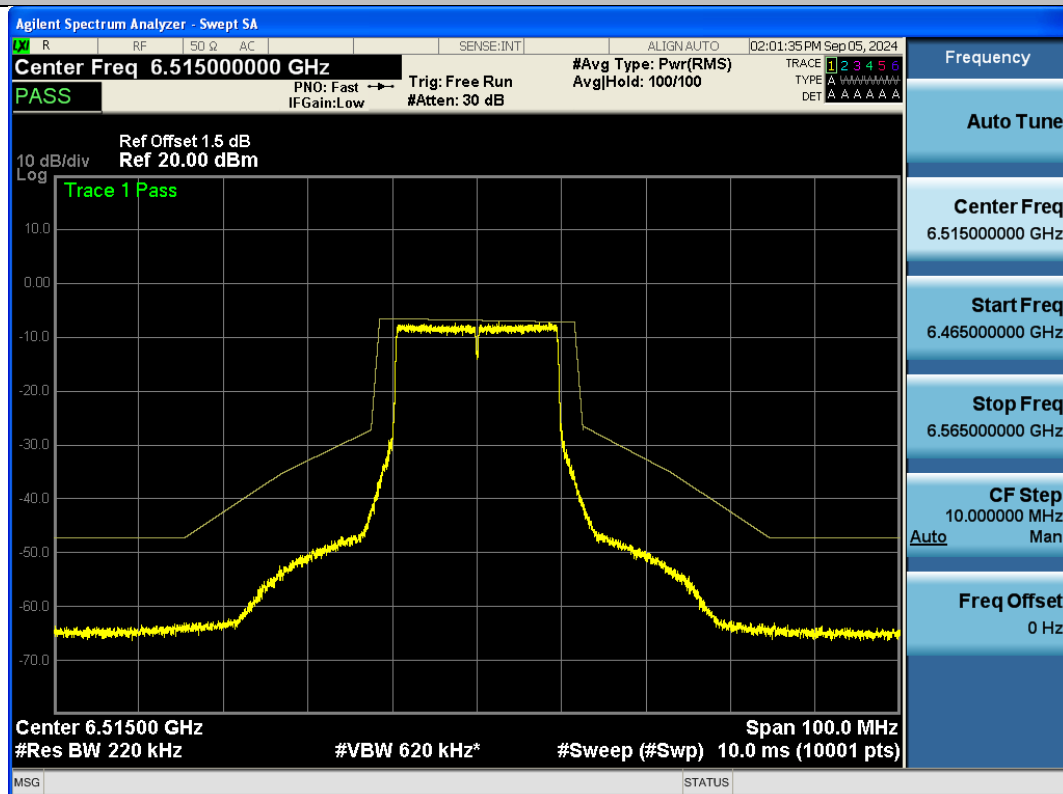


NTNV-11AX20SISO-Ant1-6515-PASS

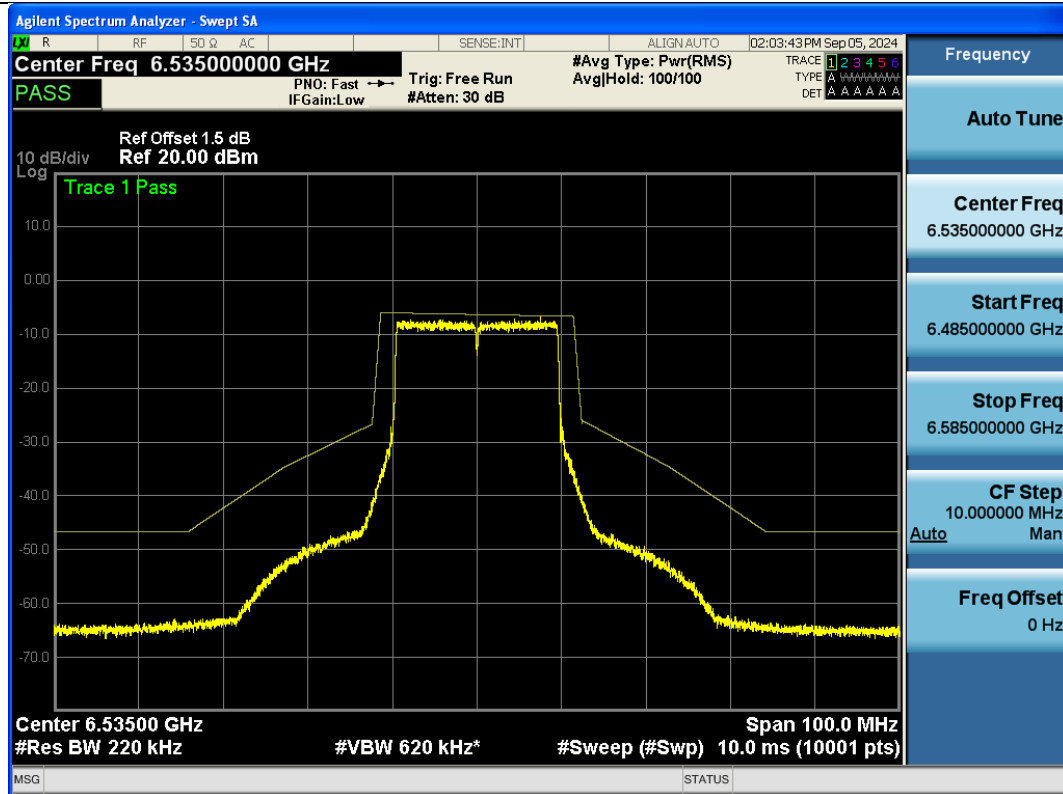


NTNV-11AX20SISO-Ant1-6535-PASS

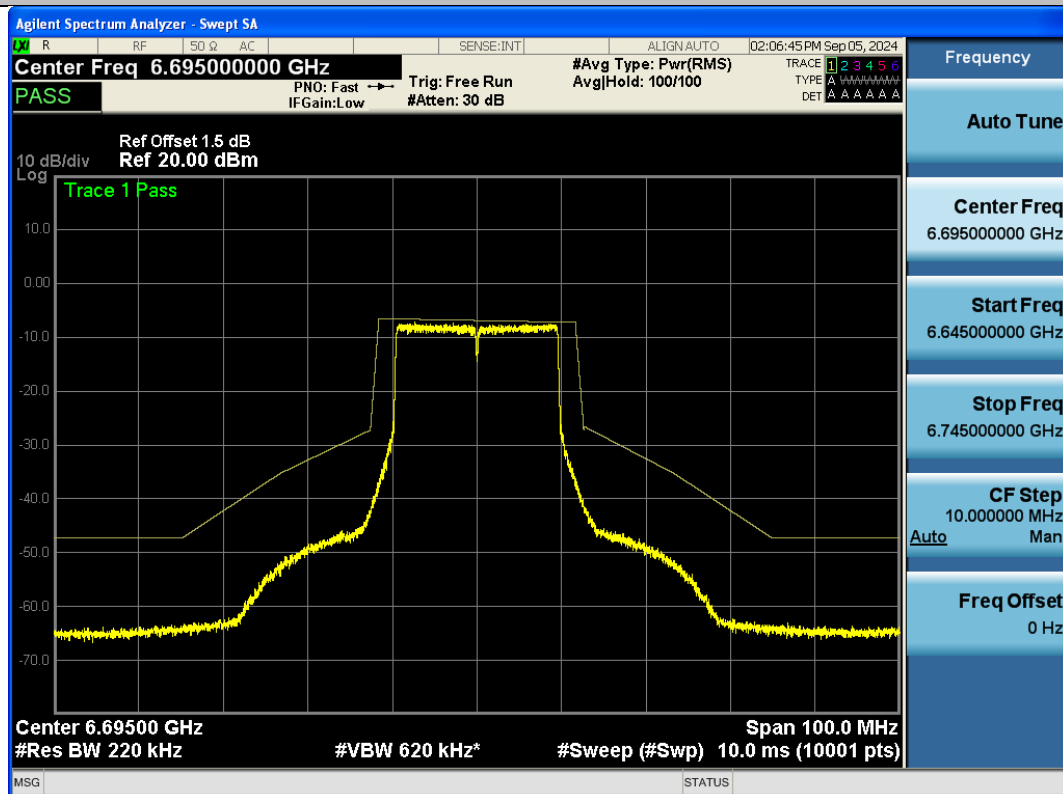


NTNV-11AX20SISO-Ant1-6695-PASS

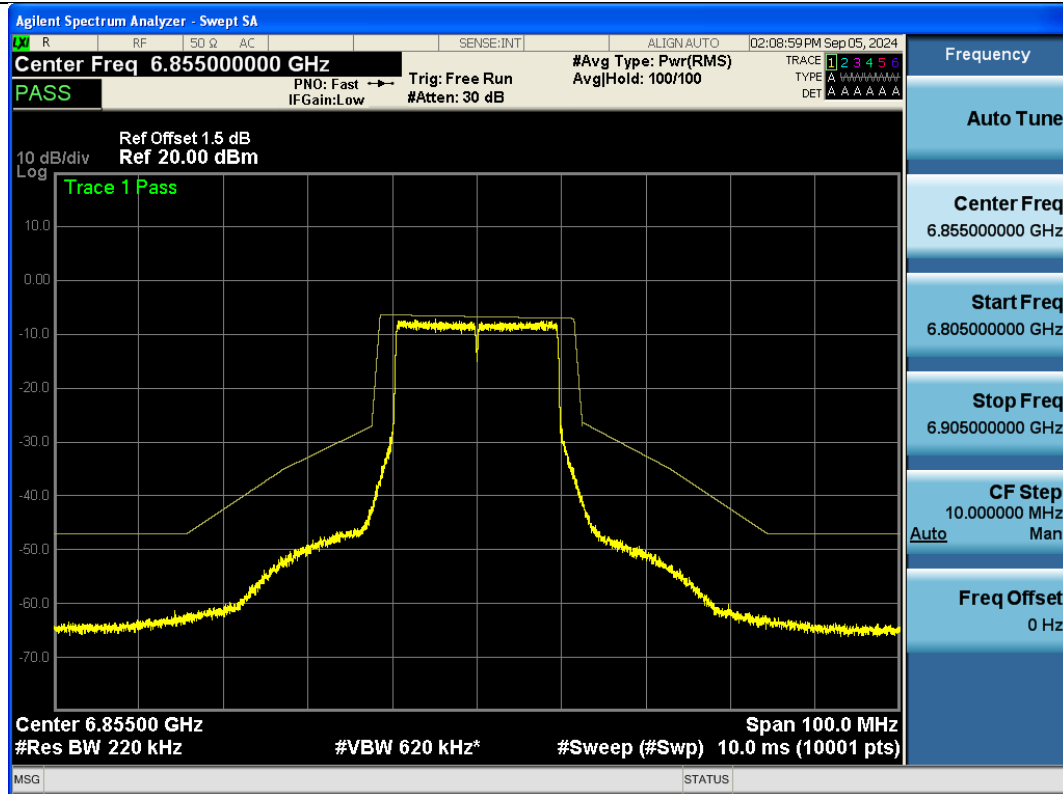


NTNV-11AX20SISO-Ant1-6855-PASS

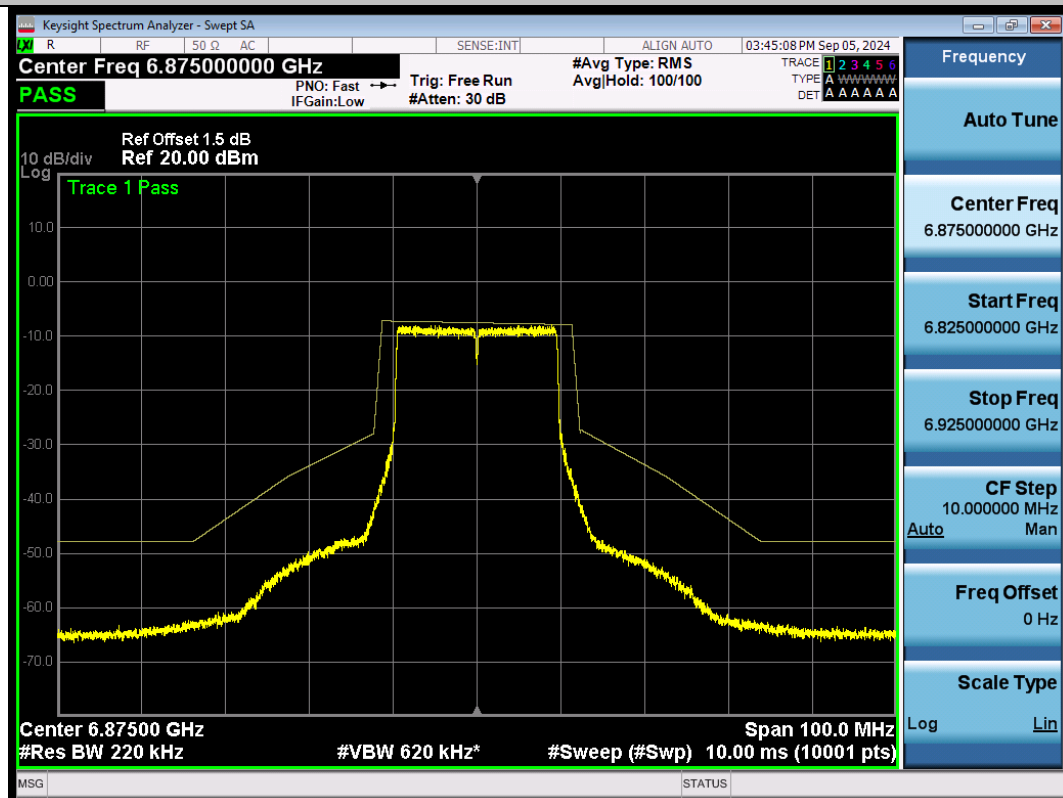


NTNV-11AX20SISO-Ant1-6875-PASS

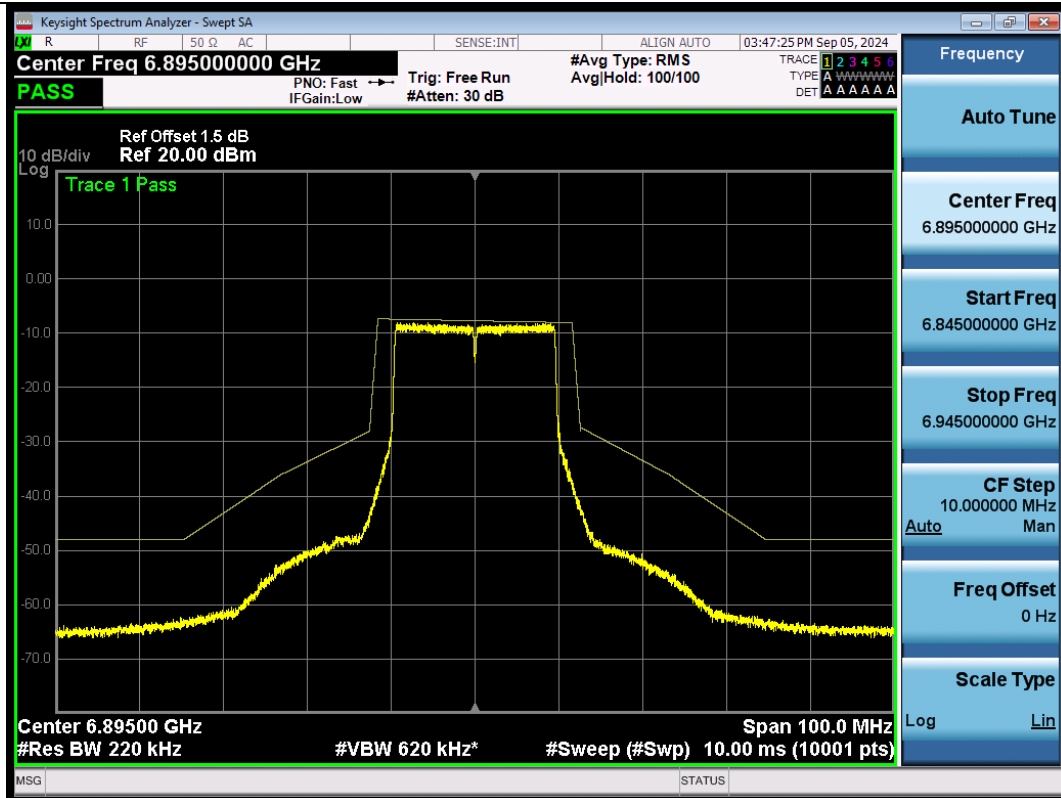


NTNV-11AX20SISO-Ant1-6895-PASS

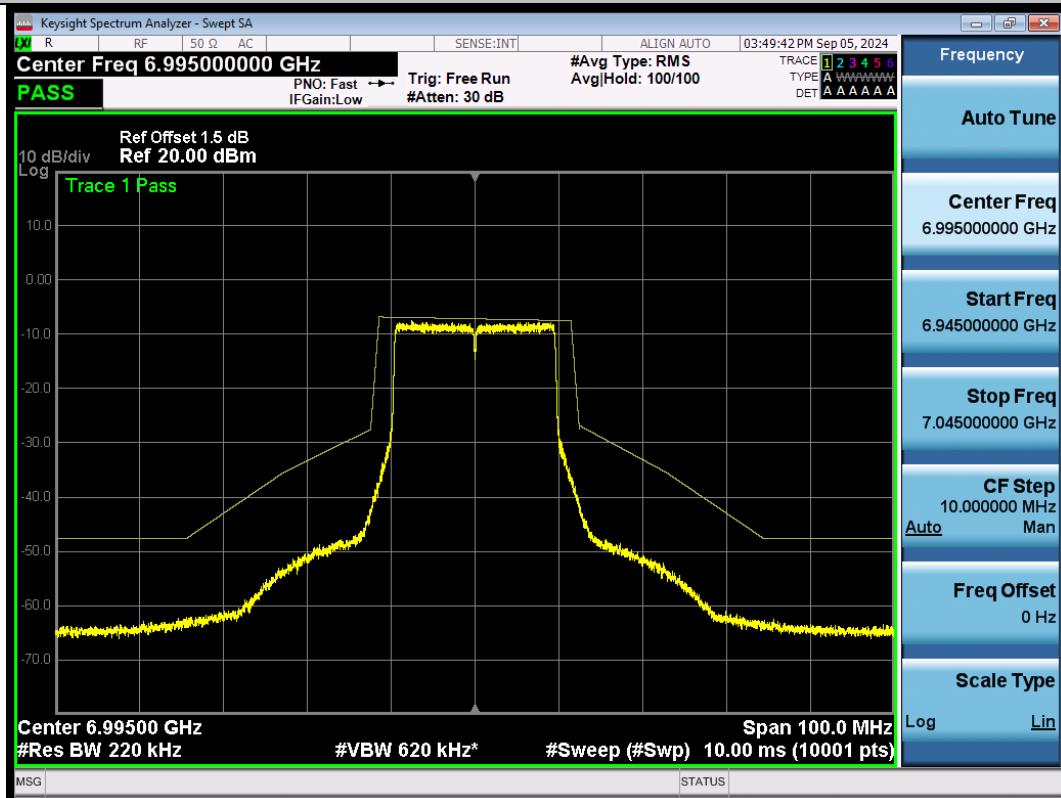

NTNV-11AX20SISO-Ant1-6995-PASS

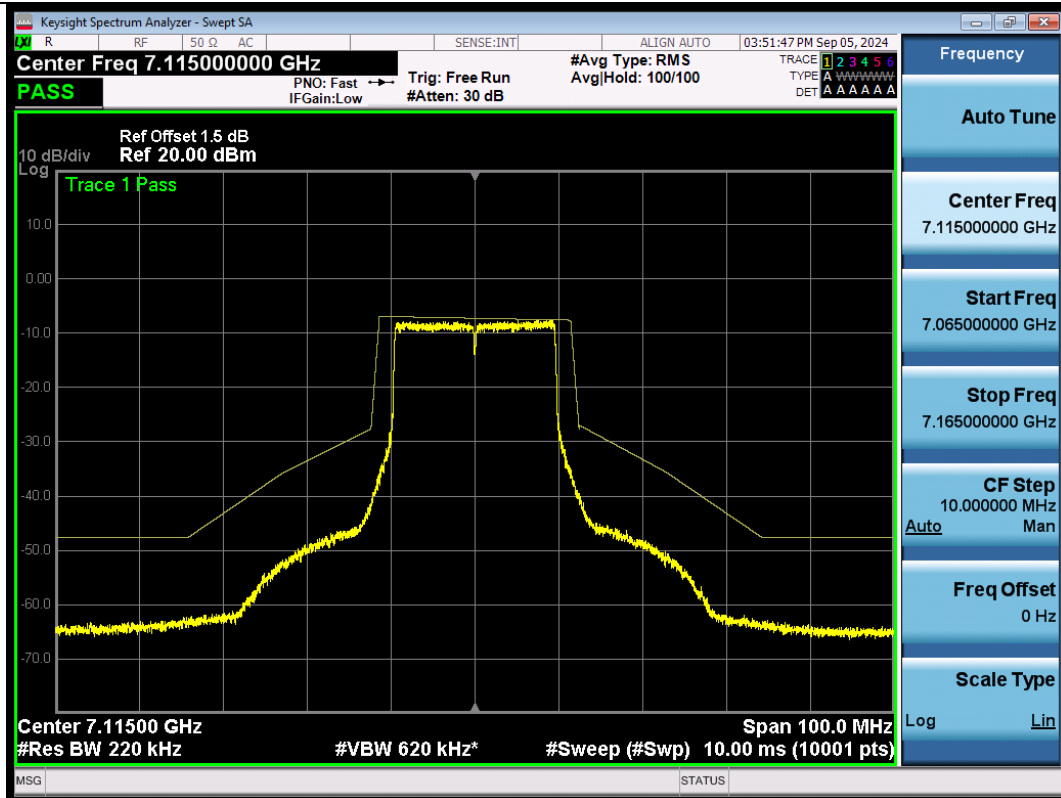

NTNV-11AX20SISO-Ant1-7115-PASS

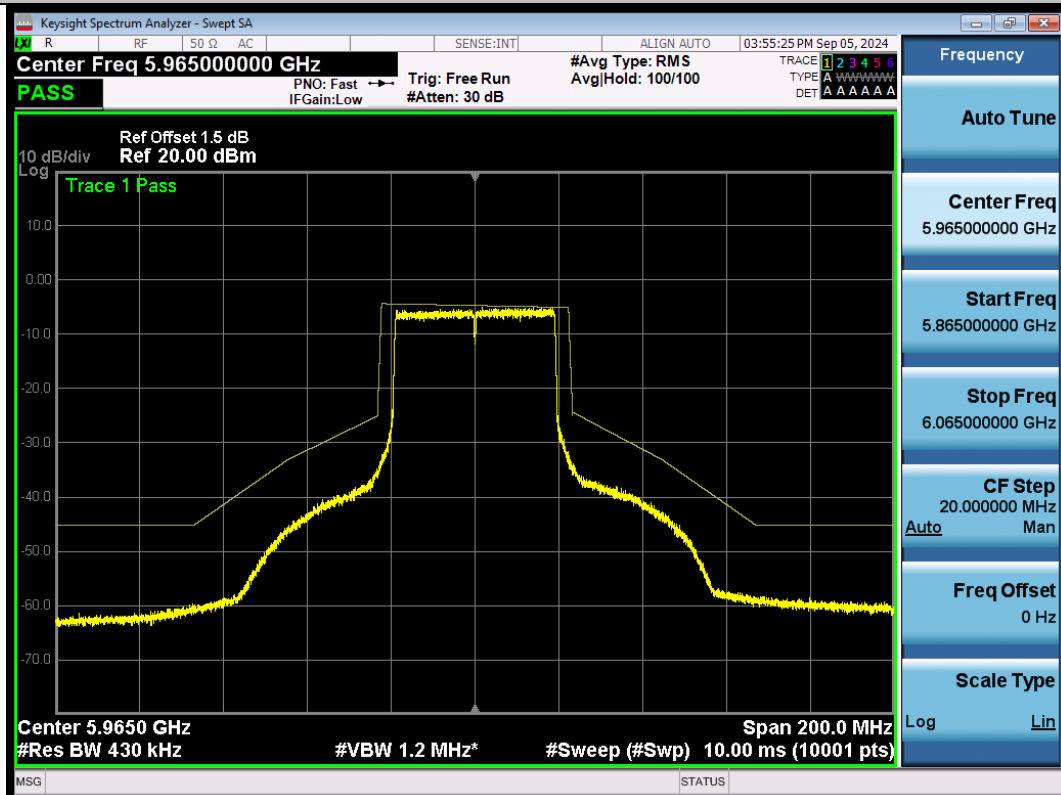

NTNV-11AX40SISO-Ant1-5965-PASS