



FCC TEST REPORT
FCC ID: 2A3MU-EBASE

On Behalf of
Shanghai EFIX Geomatics Co., Ltd
Geodetic GNSS Receiver
Model No.: eBase

Prepared for : Shanghai EFIX Geomatics Co., Ltd
Address : Room 1137, Area D, 11th Floor, Building 1, No. 158, Shuanglian
Road, Qingpu District, Shanghai

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2302256-C03-R04
Date of Receipt : March 20, 2023
Date of Test : March 20, 2023-May 15, 2023
Date of Report : May 16, 2023
Version Number : V0

ALPHA's reports is using a digital certificate that is trusted on Adobe's official server. If there is no digital certificate or the digital certificate shows damaged in your report. Please do not accept the report.

E-mail: service@a-lab.cn Tel: 4008300895 Website: <http://www.a-lab.cn>

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results-----	5
1.1. Description of Standards and Results -----	5
2. General Information -----	6
2.1. Description of Device (EUT) -----	6
2.2. Accessories of Device (EUT) -----	7
2.3. Tested Supporting System Details-----	7
2.4. Block Diagram of connection between EUT and simulators -----	7
2.5. Test Mode -----	8
2.6. Test Conditions-----	9
2.7. Test Facility-----	9
2.8. Measurement Uncertainty -----	9
2.9. Test Equipment List -----	10
3. Test Results and Measurement Data -----	12
3.1. Transmitter Power (Conducted)-----	12
3.1.1. Test Specification-----	12
3.1.2. Test Results-----	13
3.2. Occupied Bandwidth and Emission Mask -----	14
3.2.1. Test Specification-----	14
3.2.2. Test data-----	15
3.3. Spurious Emissions(conducted) -----	20
3.3.1. Test Specification-----	20
3.3.2. Test data-----	21
3.4. Radiated Spurious Emission-----	23
3.4.1. Test Specification-----	23
3.4.2. Test Data -----	25
3.5. Transient Frequency Behavior -----	28
3.5.1. Test Specification-----	28
3.5.2. Test data-----	29
3.6. Behavior Frequency Stability -----	31
3.6.1. Test Specification-----	31
3.6.2. Test data-----	32
3.7. Modulation Characteristic-----	33
3.8. Adjacent channel power -----	34
4. Test Setup Photo -----	37
4.1. Photos of Radiated emission -----	37

TEST REPORT DECLARATION

Applicant : Shanghai EFIX Geomatics Co., Ltd
Address : Room 1137, Area D, 11th Floor, Building 1, No. 158, Shuanglian Road, Qingpu District, Shanghai
Manufacturer : Shanghai EFIX Geomatics Co., Ltd
Address : Room 1137, Area D, 11th Floor, Building 1, No. 158, Shuanglian Road, Qingpu District, Shanghai
EUT Description : Geodetic GNSS Receiver
(A) Model No. : eBase
(B) Trademark : 

Measurement Standard Used:

**FCC CFR Title 47 Part 90, FCC CFR Title 47 Part 2,
ANSI TIA-603-E:2016**


The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 2, Part 90, RSS-119, RSS-Gen limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Lucas Pang
Project Engineer



Approved by (name + signature).....:

Reak Yang
Project Manager



Date of issue.....:

May 16, 2023

Revision History

Revision	Issue Date	Revisions	Revised By
V0	May 16, 2023	Initial released Issue	Lucas Pang

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Test Requirement	Standards Paragraph	Result
Transmitter Power(Conducted)	FCC PART 90	§90.205,	P
Occupied Bandwidth & Emission Mask	FCC PART 90	§90.209, §90.210	P
Spurious Emissions(conducted)	FCC PART 90	§90.210,	P
Spurious Emissions(Radiated)	FCC PART 90	§90.210,	P
Transient Frequency Behavior	FCC PART 90	§90.214,	P
Frequency Stability	FCC PART 90	§90.213,	P
Modulation Characteristics - Audio Frequency Response	FCC PART 2 FCC PART 90	§2.1047(a), §90.207	N/A
Modulation Characteristics - Modulation Limiting	FCC PART 2 FCC PART 90	§2.1047(b), §90.207	N/A
Adjacent channel power	FCC PART 90	§90.221	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.			

2. General Information

2.1. Description of Device (EUT)

Description : Geodetic GNSS Receiver
Model Number : eBase
DIFF. : N/A
Test Voltage : DC 7.4V by battery

UHF

Operation frequency : 410MHz-470MHz
Conducted Power : 0.5W(27dBm), 1W(30dBm), 5W(37dBm)
Channel spacing : 12.5KHz, 25KHz
Modulation type : GMSK
Antenna Type : Rod Antenna, Maximum Gain is 4.0dBi
Software version : 2.2.1
Hardware version : V1.2.0

Note: All Conducted Power have been tested, and recorded the worst case 5W(37dBm) results in this report.


2.2. Accessories of Device (EUT)

Accessories : /
Manufacturer : /
Model : /
Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	Notebook PC	Lenovo	ThinkPad E14	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

2.5. Test Mode

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Item	Description of operation mode	Note
1	GMSK+CS12.5KHz+TX	at maximum rated power for transmitter
2	GMSK+CS25KHz+TX	at maximum rated power for transmitter

Note: The worst case modes for all test are the item 1 and item 3.

Description Operation Frequency

GMSK		
Test Channel	Channel spacing (KHz)	Frequency(MHz)
Low	12.5	410.050
	25	410.050
Mid	12.5	440.000
	25	440.000
High	12.5	469.950
	25	469.950

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
 Registration Number: 293631

July 15, 2019 Certificated by IC
 Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List


Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last cal.	Cal. Due day
Test Receiver	ROHDE&SCHWARZ	ESCI	4.42 SP1	101165	2022.08.22	2023.08.21
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2022.08.22	2023.08.21
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2021.08.30	2023.08.29
Filter	KANGMAI	ZLPP-LDC-1000- 1959	/	1209002075	2022.08.22	2023.08.21
Filter	WAINWRIGHT	WHKX2.80 /18G- 12SS	/	SN1	2022.08.22	2023.08.21
RF Cable	Resenberger	Cable 4	/	PE1	2022.08.22	2023.08.21
CMU200	ROHDE&SCHWARZ	CMU200	V5.21	116785	2022.08.22	2023.08.21
Signal Analyzer	Agilent	N9020A	A.14.16	MY499100060	2022.08.22	2023.08.21
vector Signal	Agilent	N5182A	/	MY49060042	2022.08.22	2023.08.21
vector Signal	Agilent	E4438C	/	US44271917	2022.08.22	2023.08.21
Amplifier	HP	HP8347A	/	2834A00455	2022.08.22	2023.08.21
Amplifier	Agilent	8449B	/	3008A02664	2022.08.22	2023.08.21
Filter	SKET	HPF_1-18G-55 dB	/	N/A	2022.08.22	2023.08.21
Test Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2022.08.22	2023.08.21
Bilog Antenna	SCHWARZBECK	VULB 9168	/	9168-627	2021.08.30	2023.08.29
9*6*6 anechoic	CHENYU	9*6*6	/	N/A	2022.05.17	2025.05.16
RF Cable	Resenberger	Cable 1	/	RE1	2022.08.22	2023.08.21
RF Cable	Resenberger	Cable 2	/	RE2	2022.08.22	2023.08.21
RF Cable	Resenberger	Cable 3	/	CE1	2022.08.22	2023.08.21
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2022.08.22	2023.08.21
Power Sensor	DARE	RPR3006W	/	15100041SNO92	2022.08.22	2023.08.21
CMW500	ROHDE&SCHWARZ	CMW500	V 3.7.22	1201.0002K50-117239-sM	2022.08.22	2023.08.21
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2021.08.30	2023.08.29
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40-880	/	100631	2022.04.21	2023.04.20
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	farad	Alpha-3A1
CE	EZ-EMC	farad	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. Test Results and Measurement Data

3.1. Transmitter Power (Conducted)

3.1.1. Test Specification

Test Requirement:	Part 90.205, RSS-119(5.4)
Test Method:	FCC part 2.1046
Limits:	Please refer section FCC Part 90.205 and , RSS-119(5.4)
Test Setup:	 <pre>graph LR; PM[Power Meter] --- ATT[ATT. 20dB] --- EUT[EUT]</pre>
Test Procedure:	a) Connect the equipment as illustrated. b) Turn on the power meter c) Record value
Test Result:	PASS

3.1.2. Test Results

GMSK mode (5W):						
Channel spacing (KHz)	Frequency (MHz)	Maximum Conducted Output Power(Peak) (dBm)	Maximum ERP (dBm)	Stated ERP Power (dBm)	Conducted Output Power Limit (dBm)	Result
12.5	410.050	36.243	38.093	39	37±1	PASS
25	410.050	36.234	38.084	39	37±1	PASS
12.5	440.000	37.115	38.965	39	37±1	PASS
25	440.000	36.899	38.749	39	37±1	PASS
12.5	469.950	36.763	38.613	39	37±1	PASS
25	469.950	37.101	38.951	39	37±1	PASS

GMSK mode (1W):						
Channel spacing (KHz)	Frequency (MHz)	Maximum Conducted Output Power(Peak) (dBm)	Maximum ERP (dBm)	Stated ERP Power (dBm)	Conducted Output Power Limit (dBm)	Result
12.5	410.050	29.740	31.590	32	30±1	PASS
25	410.050	29.326	31.176	32	30±1	PASS
12.5	440.000	29.906	31.756	32	30±1	PASS
25	440.000	29.225	31.075	32	30±1	PASS
12.5	469.950	29.516	31.366	32	30±1	PASS
25	469.950	29.435	31.285	32	30±1	PASS

GMSK mode (0.5W):						
Channel spacing (KHz)	Frequency (MHz)	Maximum Conducted Output Power(Peak) (dBm)	Maximum ERP (dBm)	Stated ERP Power (dBm)	Conducted Output Power Limit (dBm)	Result
12.5	410.050	26.545	28.395	29	27±1	PASS
25	410.050	26.506	28.356	29	27±1	PASS
12.5	440.000	26.560	28.410	29	27±1	PASS
25	440.000	27.094	28.944	29	27±1	PASS
12.5	469.950	26.644	28.494	29	27±1	PASS
25	469.950	26.304	28.154	29	27±1	PASS

Note: 1. ERP= Maximum Conducted Output Power(Peak) + Antenna Gain – 2.15dB

3.2. Occupied Bandwidth and Emission Mask

3.2.1. Test Specification

Test Requirement:	FCC Part 90.209, FCC Part 90.210, RSS-119(5.5)
Test Setup:	 The diagram illustrates the test setup. On the left is a green rectangular box representing the Spectrum Analyzer, with a blue screen and two small circles representing ports. A grey cable connects this box to a small white square, which is then connected to a yellow rectangular box on the right representing the EUT (Equipment Under Test). Below the green box is the label 'Spectrum Analyzer' and below the yellow box is the label 'EUT'.
Test Procedure:	The resolution bandwidth of the spectrum analyzer was set at 300 Hz and the spectrum was recorded in the Frequency band $\pm 50\text{KHz}$ from the carrier frequency for Occupied Bandwidth, the resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the Frequency band $\pm 100\text{KHz}$ from the carrier frequency for Emission Mask.
Test Result:	PASS

3.2.2. Test data

Occupied Bandwidth:

GMSK 12.5KHz Channel Spacing:

Channel	Frequency (MHz)	26dB Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	99% Occupied Bandwidth Limit (KHz)	Result
Low	410.050	10.64	7.998	11.25	PASS
Mid	440.000	10.94	8.215	11.25	PASS
High	469.950	11.20	8.534	11.25	PASS

GMSK 25KHz Channel Spacing:

Channel	Frequency (MHz)	26dB Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	99% Occupied Bandwidth Limit (KHz)	Result
Low	410.050	18.12	14.625	20	PASS
Mid	440.000	20.12	15.226	20	PASS
High	469.950	19.74	14.421	20	PASS

Emission Mask:

GMSK 12.5KHz Channel Spacing:

Channel	Frequency (MHz)	Applicable Mask	RBW	Result
Low	410.050	D	100Hz	PASS
Mid	440.000	D	100Hz	PASS
High	469.950	D	100Hz	PASS


GMSK 25KHz Channel Spacing:

Channel	Frequency (MHz)	Applicable Mask	RBW	Result
Low	410.050	C	100Hz	PASS
Mid	440.000	C	100Hz	PASS
High	469.950	C	100Hz	PASS


Test plots as follows:

GMSK 12.5KHz Channel Spacing: Occupied Bandwidth


Low: 410.050MHz

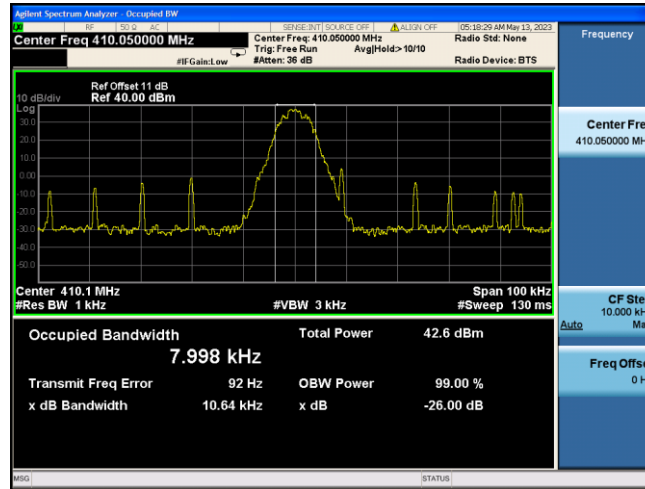

Mid: 440.000MHz

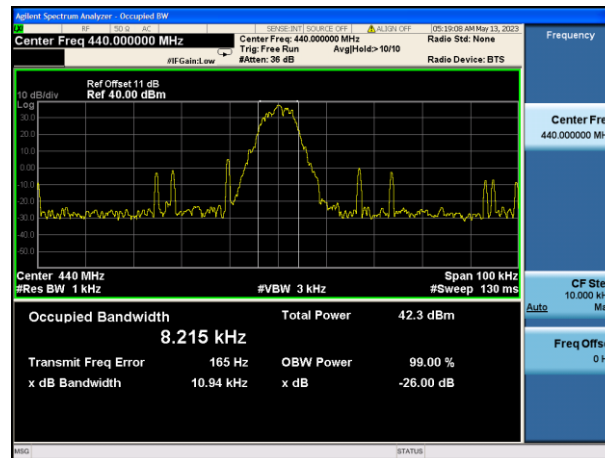


High: 470.00MHz

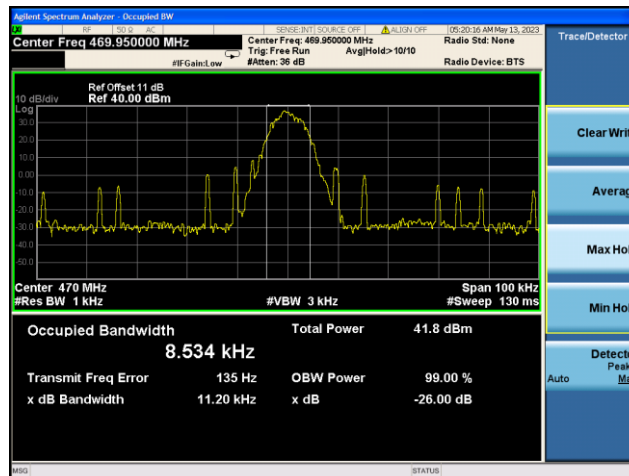


GMSK 25KHz Channel Spacing: Occupied Bandwidth


Low: 410.050MHz

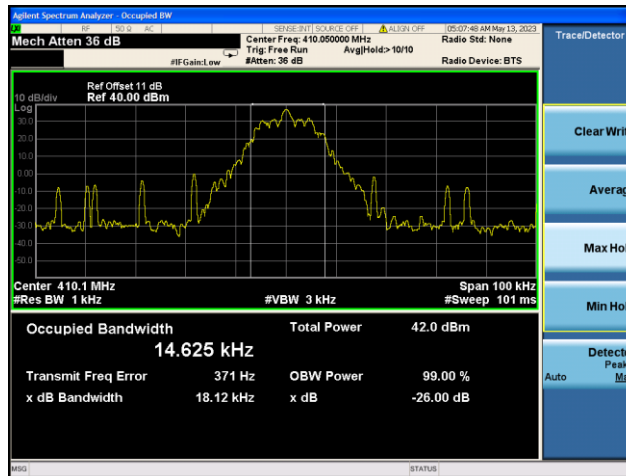

Mid: 440.000MHz

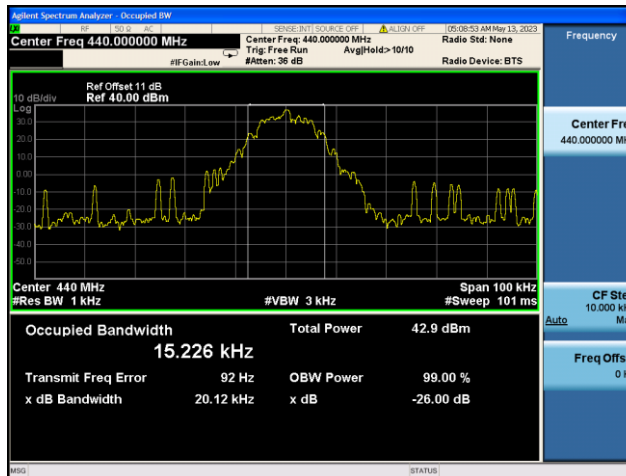


High: 469.850MHz

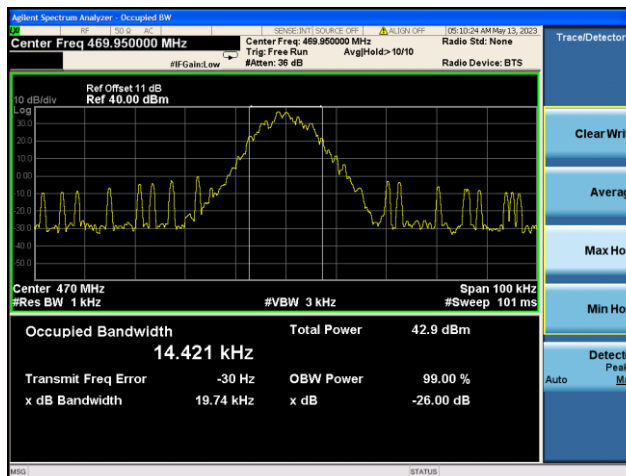


GMSK 12.5KHz Channel Spacing: Emission Mask


Low: 410.050MHz

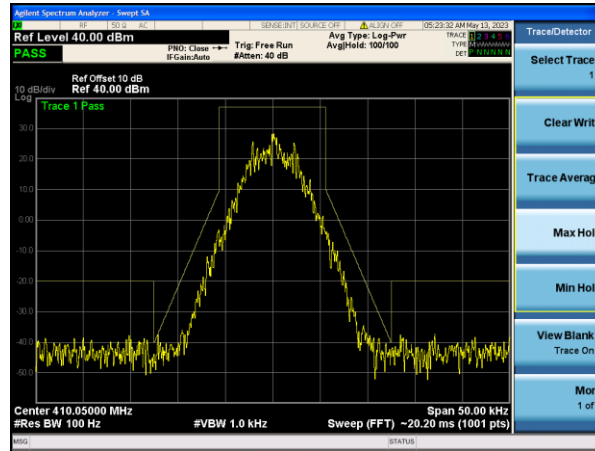

Mid: 440.000MHz

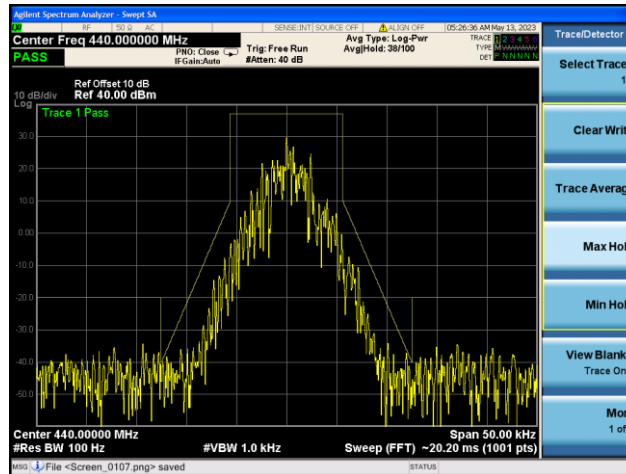


High: 469.950MHz

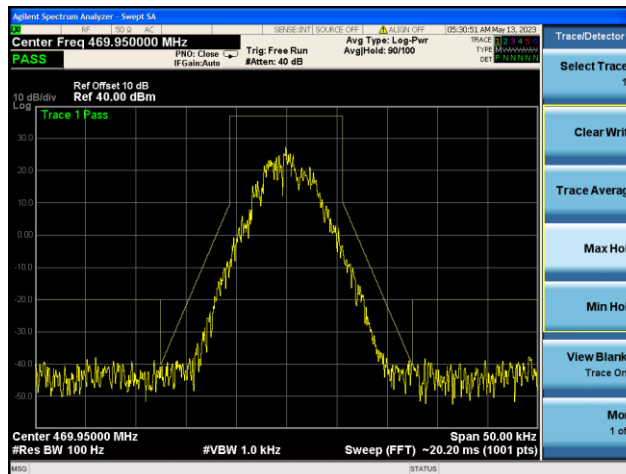


GMSK 25KHz Channel Spacing: Emission Mask


Low: 410.050MHz

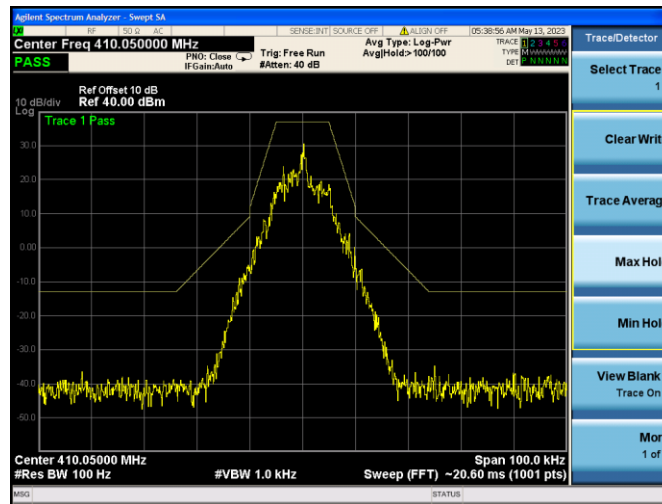

Mid: 440.000MHz

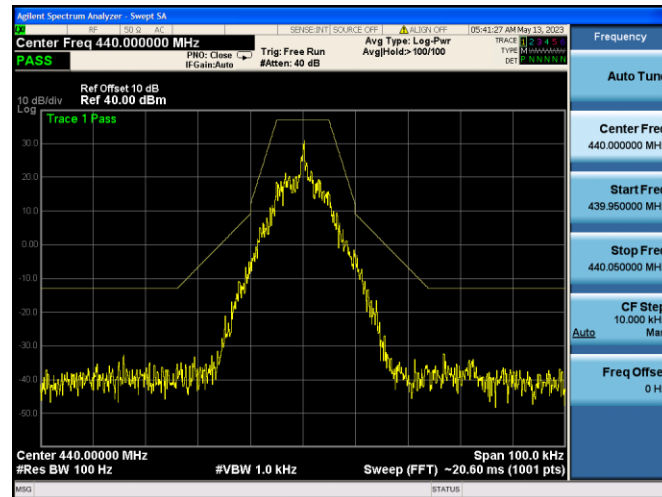


High: 469.950MHz

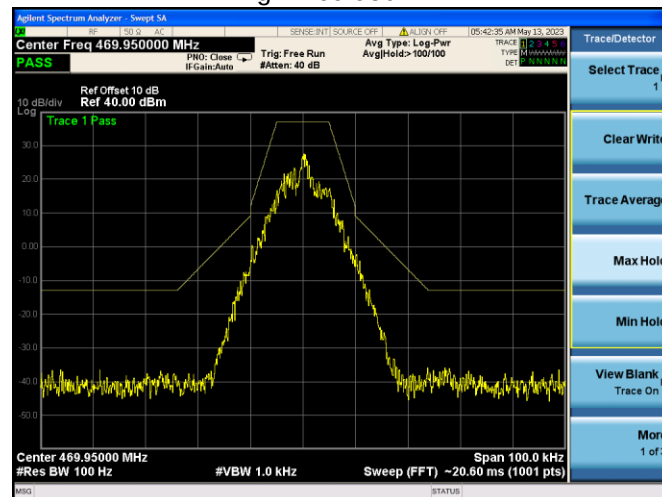

3.3. Spurious Emissions(conducted)

3.3.1. Test Specification

Test Requirement:	FCC Part 90.210, RSS-119(5.8)
Test Setup:	 Spectrum Analyzer EUT
Test Limit:	Modulation Type: GMSK FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 12: For 6.25 bandwidth: On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 6.25 kHz at least: $55 + 10 \log (P_{\text{watts}}) = 55 + 10 \log (1.0) = 55.00 \text{ dB}$ Calculation: Limit (dBm) = EL-55-10log10 (TP) Notes: EL is the emission level of the Output Power expressed in dBm, In this application, the EL is 30 dBm for High rated power. High: Limit (dBm) = $30 - 55 - 10 \log (3.0) = -25 \text{ dBm}$ For 12.5 bandwidth: On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (1.0) = 50.00 \text{ dB}$ Note: In general, the worst case attenuation requirement shown above was applied. Calculation: Limit (dBm) = EL-50-10log10 (TP) Notes: EL is the emission level of the Output Power expressed in dBm, In this application, the EL is 30 dBm for High rated power. Limit (dBm) = $30.00 - 50 - 10 \log (1.0) = -20 \text{ dBm}$ For 25 kHz bandwidth: On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 62.5 kHz at least: $43 + 10 \log (P_{\text{watts}}) = 43 + 10 \log (1.0) = 43.00 \text{ dB}$ Note: In general, the worst case attenuation requirement shown above was applied. Calculation: Limit (dBm) = EL-43-10log10 (TP) In this application, the EL is 30 dBm for High rated power. Limit (dBm) = $30.00 - 43 - 10 \log (1.0) = -13 \text{ dBm}$ Note: 1. In general, the worst case attenuation requirement shown above was applied. For emission inside from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of channel spacing, emission mask limit should be compliant. 2. The measurement frequency range from 9 KHz to 5 GHz. 3. *** means that the emission level is too low to be measured or at least 20 dB down than the limit. 4. ERP for below 1GHz and EIRP above 1GHz.


Test Result:**PASS**

3.3.2. Test data


Test plots as follows:

GMSK 12.5KHz Channel Spacing:


Low: 410.050MHz

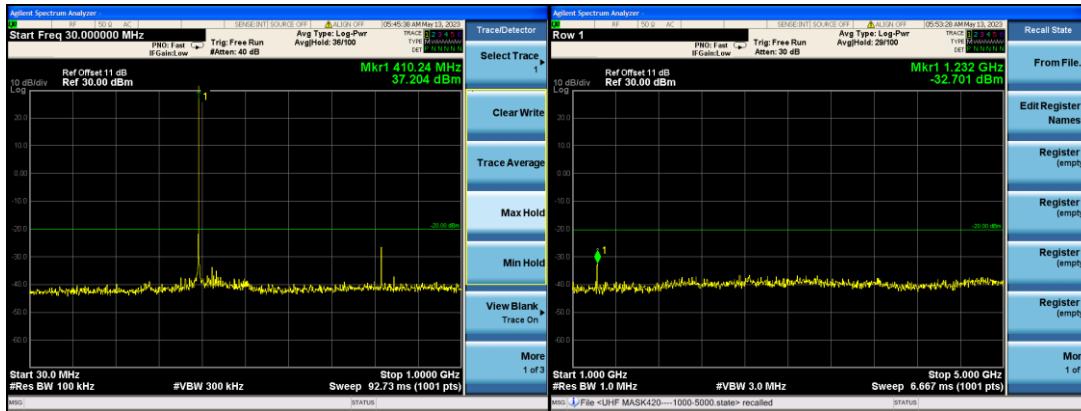

Mid: 440.000MHz

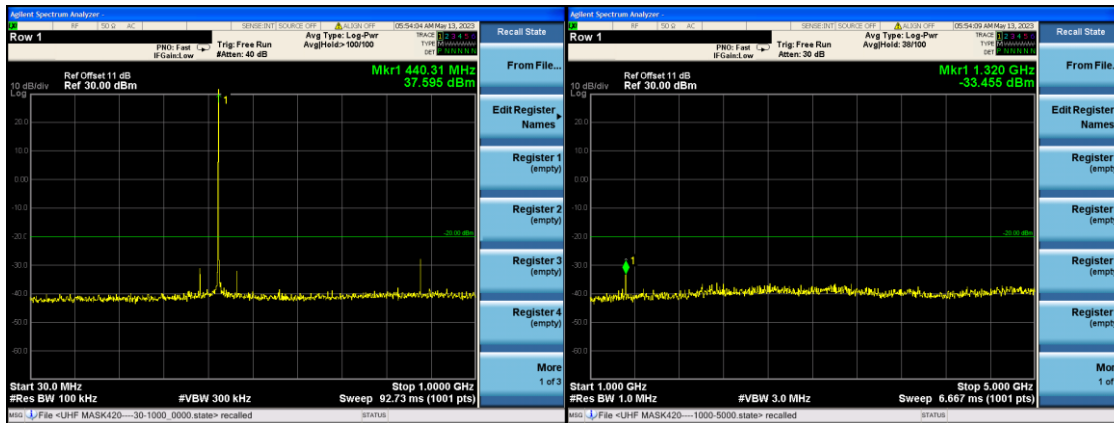


High: 469.950MHz

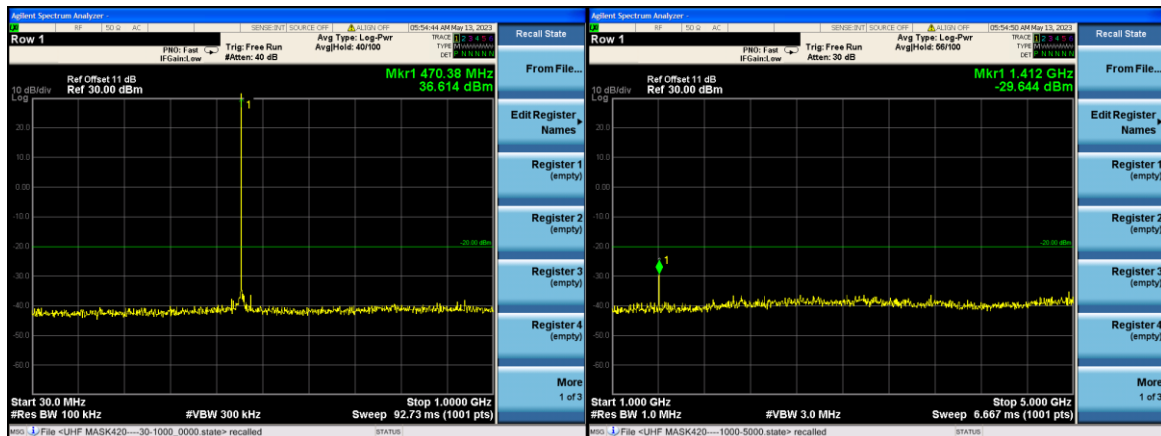


GMSK 25KHz Channel Spacing:


Low: 410.050MHz

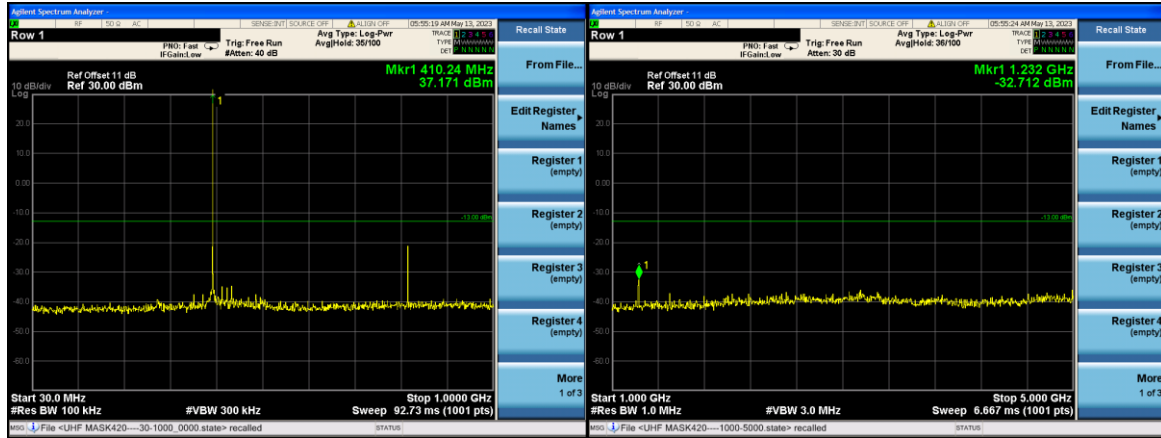

Mid: 440.000MHz

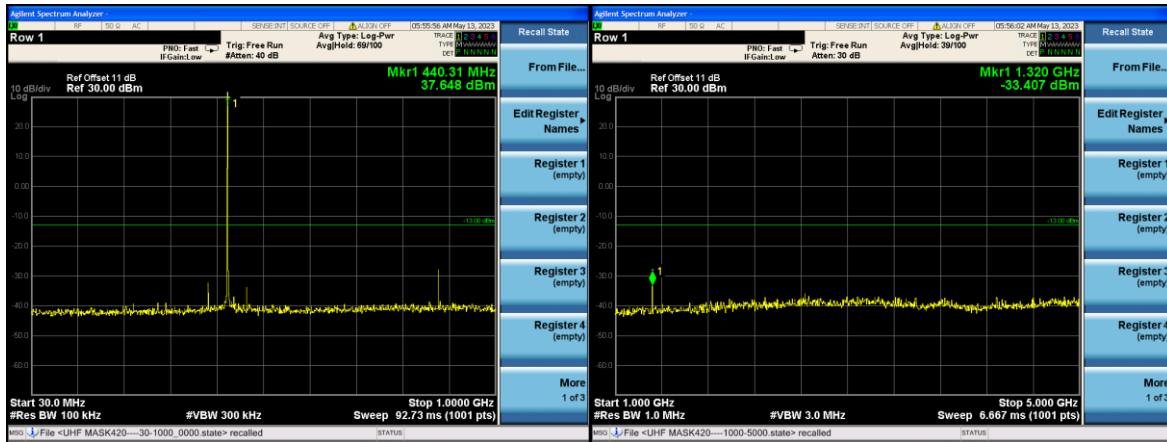


High: 469.950MHz

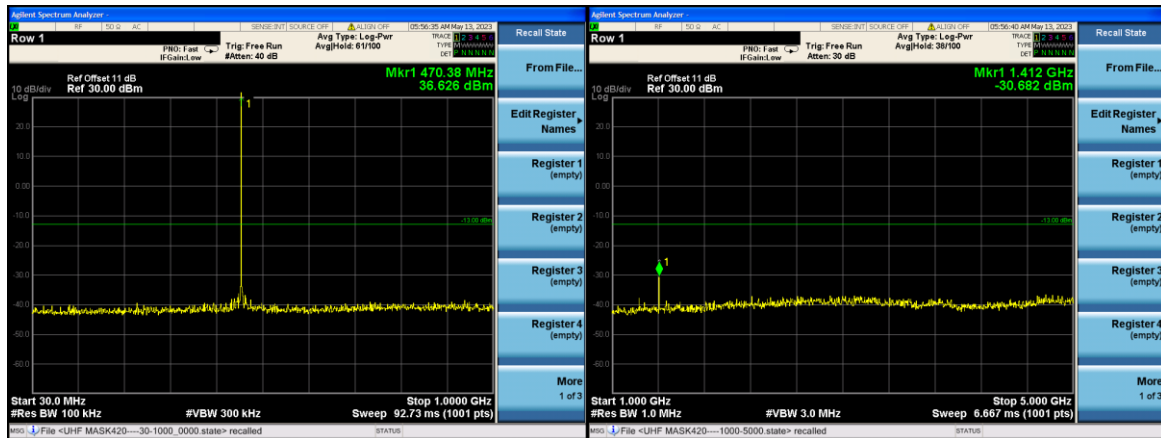

3.4. Radiated Spurious Emission

3.4.1. Test Specification

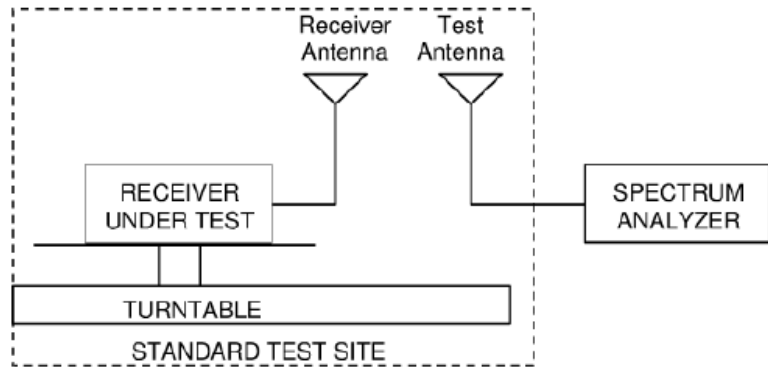Test Requirement:	FCC Part 90.210, RSS-119(5.8)															
Test Method:	ANSI C63.26															
Measurement Distance:	3 m															
Antenna Polarization:	Horizontal & Vertical															
Operation mode:	Refer to item 4.1															
Receiver Setup:	<table><tr><td>Frequency</td><td>RBW</td><td>VBW</td></tr><tr><td>9kHz- 150kHz</td><td>200Hz</td><td>1kHz</td></tr><tr><td>150kHz- 30MHz</td><td>9kHz</td><td>30kHz</td></tr><tr><td>30MHz-1GHz</td><td>100KHz</td><td>300KHz</td></tr><tr><td>Above 1GHz</td><td>1MHz</td><td>3MHz</td></tr></table>	Frequency	RBW	VBW	9kHz- 150kHz	200Hz	1kHz	150kHz- 30MHz	9kHz	30kHz	30MHz-1GHz	100KHz	300KHz	Above 1GHz	1MHz	3MHz
Frequency	RBW	VBW														
9kHz- 150kHz	200Hz	1kHz														
150kHz- 30MHz	9kHz	30kHz														
30MHz-1GHz	100KHz	300KHz														
Above 1GHz	1MHz	3MHz														
Limit:	For equipment using 25 kHz channel spacing, on any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least 43 + 10log (P) dB. For equipment using 12.5 kHz channel spacing, on any frequency removed from the center of The authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log(P) dB or 70 dB, whichever is the lesser attenuation.															
Test setup:																
Test Procedure:	The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT .The test was performed by placing the EUT on 3-orthogonal axis. The frequency range up to teeth harmonic of the fundamental frequency was investigated. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a															

	non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Spurious emissions in dB =10, 1g (TXpwr in Watts/0.001)-the absolute level Spurious attenuation limit in dB =50+10 Log10 (power out in Watts) for EUT with a 12.5 kHz and 25KHz channel bandwidth.
Test results:	PASS

3.4.2.Test Data

GMSK:**Test Mode: Low: 410.050MHz, Channel Spacing 12.5KHz**

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
150.753	-93.94	V	0.24	31.35	-62.83	-20	-42.83
359.807	-90.24	V	0.26	31.34	-59.16	-20	-39.16
671.423	-92.99	V	0.42	31.24	-62.17	-20	-42.17
862.653	-93.92	V	0.58	30.71	-63.79	-20	-43.79
1263.815	-78.77	V	1.23	26.38	-53.62	-20	-33.62
3863.073	-78.55	V	1.68	25.47	-54.76	-20	-34.76
287.133	-95.09	H	0.43	31.24	-64.28	-20	-44.28
400.204	-95.93	H	0.45	30.68	-65.70	-20	-45.70
478.017	-94.37	H	0.64	30.85	-64.16	-20	-44.16
676.575	-97.83	H	0.79	31.12	-67.50	-20	-47.50
1369.176	-82.15	H	1.29	26.12	-57.32	-20	-37.32
3258.122	-77.55	H	1.62	25.41	-53.76	-20	-33.76

Test Mode: Mid: 410.050MHz, Channel Spacing 25KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
157.911	-94.08	V	0.24	31.35	-62.97	-13	-49.97
362.588	-90.55	V	0.26	31.34	-59.47	-13	-46.47
669.972	-93.40	V	0.42	31.24	-62.58	-13	-49.58
862.586	-93.61	V	0.58	30.71	-63.48	-13	-50.48
1263.083	-78.46	V	1.23	26.38	-53.31	-13	-40.31
3857.439	-78.38	V	1.68	25.47	-54.59	-13	-41.59
292.620	-94.64	H	0.43	31.24	-63.83	-13	-50.83
397.340	-95.48	H	0.45	30.68	-65.25	-13	-52.25
477.536	-94.36	H	0.64	30.85	-64.15	-13	-51.15
682.949	-97.19	H	0.79	31.12	-66.86	-13	-53.86
1366.759	-81.91	H	1.29	26.12	-57.08	-13	-44.08
3262.627	-78.08	H	1.62	25.41	-54.29	-13	-41.29

Test Mode: Mid: 440.000MHz, Channel Spacing 12.5KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
157.911	-93.97	V	0.24	31.35	-62.86	-20	-42.86
362.588	-90.61	V	0.26	31.34	-59.53	-20	-39.53
669.972	-93.17	V	0.42	31.24	-62.35	-20	-42.35
862.586	-93.40	V	0.58	30.71	-63.27	-20	-43.27
1263.083	-78.37	V	1.23	26.38	-53.22	-20	-33.22
3857.439	-78.52	V	1.68	25.47	-54.73	-20	-34.73
292.620	-95.18	H	0.43	31.24	-64.37	-20	-44.37
397.340	-95.95	H	0.45	30.68	-65.72	-20	-45.72
477.536	-94.10	H	0.64	30.85	-63.89	-20	-43.89
682.949	-97.69	H	0.79	31.12	-67.36	-20	-47.36
1366.759	-82.50	H	1.29	26.12	-57.67	-20	-37.67
3262.627	-77.97	H	1.62	25.41	-54.18	-20	-34.18

Test Mode: Mid: 440.000MHz, Channel Spacing 25KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
146.884	-94.27	V	0.24	31.35	-63.16	-13	-50.16
361.661	-90.58	V	0.26	31.34	-59.50	-13	-46.50
672.403	-93.44	V	0.42	31.24	-62.62	-13	-49.62
869.253	-93.54	V	0.58	30.71	-63.41	-13	-50.41
1260.906	-78.38	V	1.23	26.38	-53.23	-13	-40.23
3859.099	-78.28	V	1.68	25.47	-54.49	-13	-41.49
289.522	-95.32	H	0.43	31.24	-64.51	-13	-51.51
400.914	-96.16	H	0.45	30.68	-65.93	-13	-52.93
476.804	-94.50	H	0.64	30.85	-64.29	-13	-51.29
681.363	-97.50	H	0.79	31.12	-67.17	-13	-54.17
1370.675	-81.99	H	1.29	26.12	-57.16	-13	-44.16
3261.429	-77.46	H	1.62	25.41	-53.67	-13	-40.67

Test Mode: High: 469.950MHz, Channel Spacing 12.5KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
149.819	-94.09	V	0.24	31.35	-62.98	-20	-42.98
366.378	-90.47	V	0.26	31.34	-59.39	-20	-39.39
671.133	-92.76	V	0.42	31.24	-61.94	-20	-41.94
866.455	-93.79	V	0.58	30.71	-63.66	-20	-43.66
1259.762	-78.47	V	1.23	26.38	-53.32	-20	-33.32
3860.704	-78.09	V	1.68	25.47	-54.30	-20	-34.30
292.127	-94.91	H	0.43	31.24	-64.10	-20	-44.10
407.252	-95.84	H	0.45	30.68	-65.61	-20	-45.61
476.193	-94.49	H	0.64	30.85	-64.28	-20	-44.28
679.120	-97.96	H	0.79	31.12	-67.63	-20	-47.63
1371.936	-81.95	H	1.29	26.12	-57.12	-20	-37.12
3265.395	-77.84	H	1.62	25.41	-54.05	-20	-34.05

Test Mode: High: 469.950MHz, Channel Spacing 25KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
150.444	-94.03	V	0.24	31.35	-62.92	-13	-49.92
360.103	-90.48	V	0.26	31.34	-59.40	-13	-46.40
671.514	-93.05	V	0.42	31.24	-62.23	-13	-49.23
863.778	-93.42	V	0.58	30.71	-63.29	-13	-50.29
1256.913	-78.90	V	1.23	26.38	-53.75	-13	-40.75
3854.891	-78.20	V	1.68	25.47	-54.41	-13	-41.41
288.493	-94.74	H	0.43	31.24	-63.93	-13	-50.93
398.954	-95.60	H	0.45	30.68	-65.37	-13	-52.37
474.968	-94.21	H	0.64	30.85	-64.00	-13	-51.00
681.111	-97.93	H	0.79	31.12	-67.60	-13	-54.60
1372.828	-82.43	H	1.29	26.12	-57.60	-13	-44.60
3265.247	-78.11	H	1.62	25.41	-54.32	-13	-41.32

3.5. Transient Frequency Behavior


3.5.1. Test Specification

Test Requirement:	FCC Part 90.214, RSS-119(5.9)				
Test Setup:	 Oscilloscope EUT				
Test Limit	Channel Bandwidth (kHz)	Time Intervals (Notes 1, 2)	Maximum Frequency Difference (kHz)	Transient Duration Limit (ms)	
				138-174 MHz	406.1-512 MHz
	25	t ₁	±25	5	10
		t ₂	±12.5	20	25
		t ₃	±25	5	10
	12.5	t ₁	±12.5	5	10
		t ₂	±6.25	20	25
		t ₃	±12.5	5	10
	6.25	t ₁	±6.25	5	10
		t ₂	±3.125	20	25
		t ₃	±6.25	5	10
Test Procedure:	The EUT was set in the climate chamber and connected to an external DC power supply and AC power supply. The RF output was directly connected to Oscilloscope. The coupling loss of the additional cables was recorded and taken in account for all the measurements. The result was recorded.				
Test Result:	PASS				


3.5.2. Test data

Test Plots for channel spacing 12.5KHz, EUT power setting: Maximum.

Power On

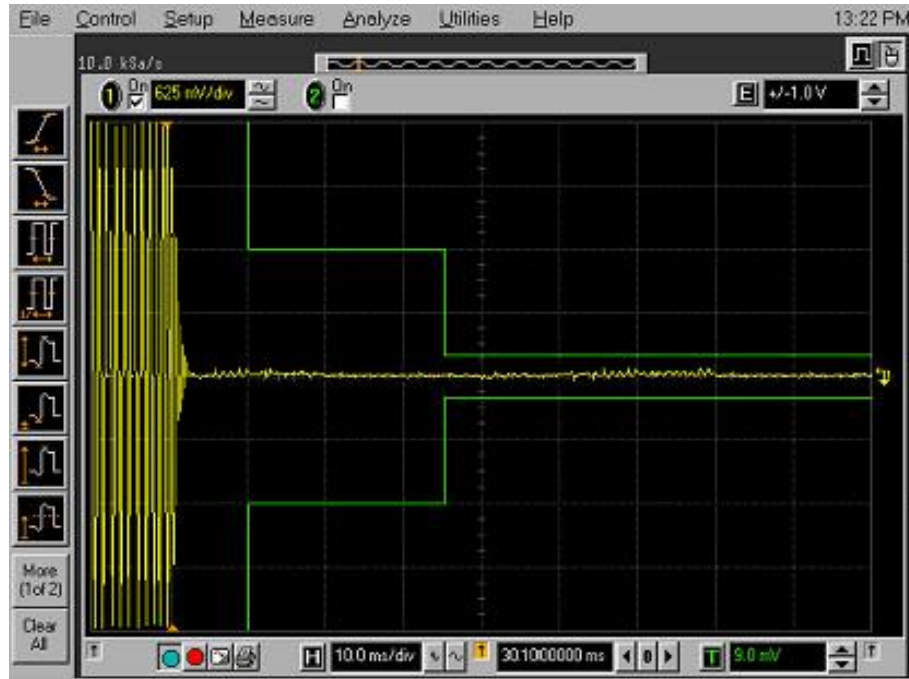


Power Off

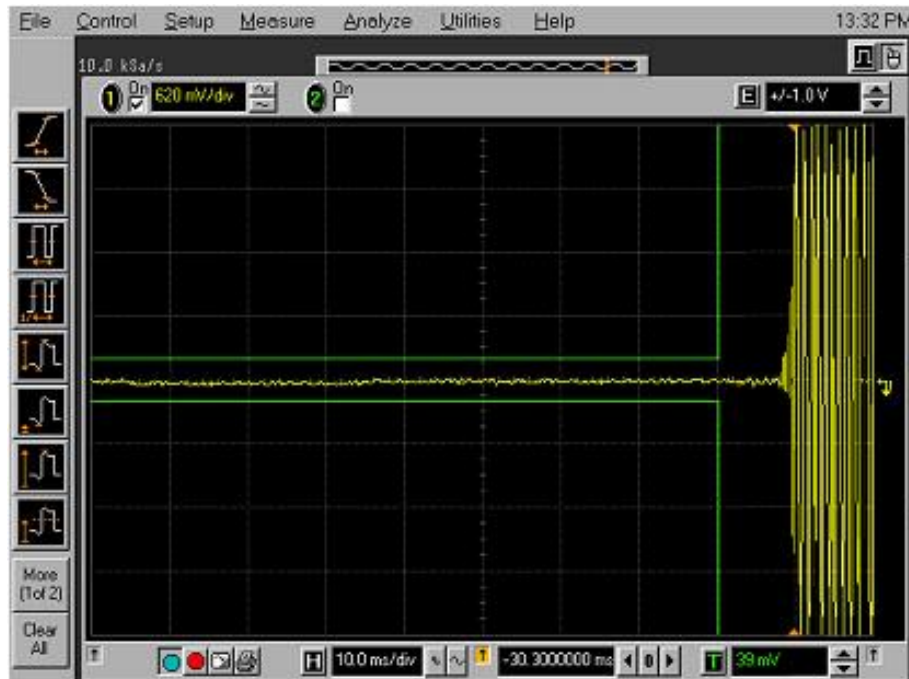


Test Plots for channel spacing 25KHz, EUT power setting: Maximum.

Power On

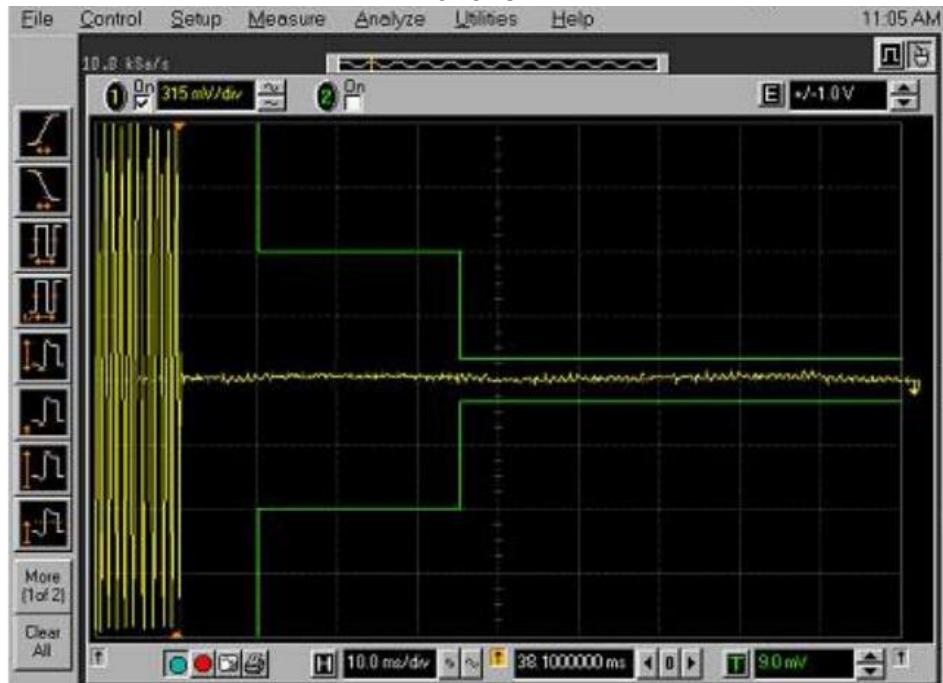

Power Off

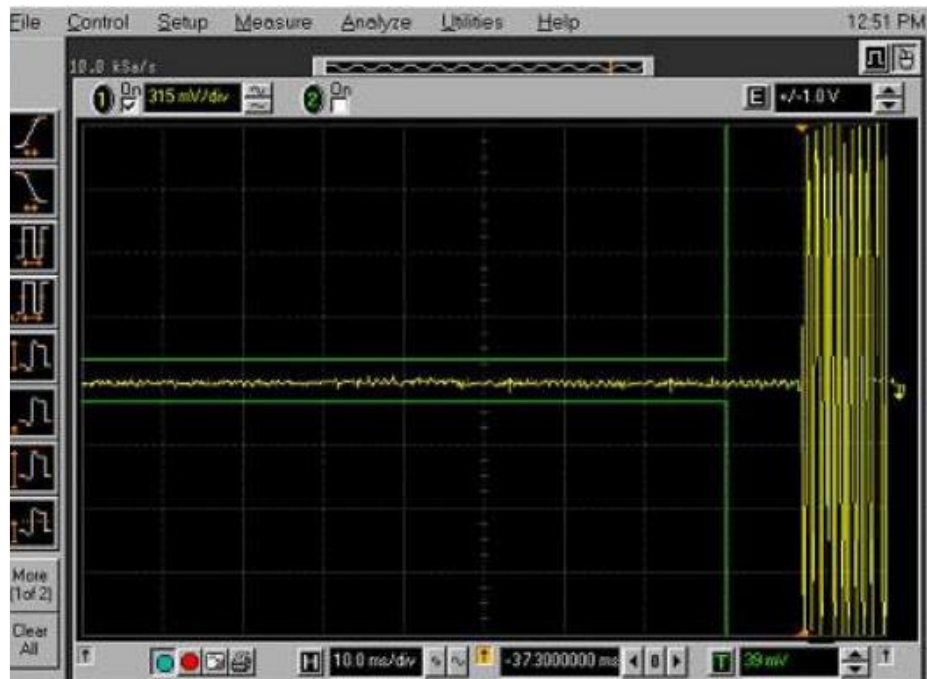

3.6. Behavior Frequency Stability

3.6.1. Test Specification

Test Requirement:	FCC Part 90.213, RSS-119(5.3)
Test Method:	ANSI C63.26, RSS-Gen
Test Setup:	<pre> graph LR Laptop[Laptop] --- EUT[Equipment Under Test] EUT --- ACDC[AC/DC Adapter] EUT --- Att[Attenuator(s)] Att --- MC[Mini-Circuit Combiner] RFCT[RF Communication Test Set] --- MC MC --- Mod[Modulation Analyzer] MC --- RF[RF Detector] RF --- HPO[Hewlett Packard Infinium Digitizing Oscilloscope] </pre>
Test Procedure:	Method of Measurement: After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply or AC power supply and the voltage was adjusted in the required ranges.
Test Result:	PASS

3.6.2. Test data

Conclusion: PASS			
Mode	Voltage (V)	Frequency error (Hz)	frequency error (ppm)
Middle Channel 12.5KHz Channel Spacing	7.6	-35	-0.0028
	7.5	-26	-0.0315
	7.4	-52	-0.0622
	7.3	-30	-0.0355
	7.2	-32	-0.0385
	7.1	-47	-0.0559
Limit	2.5ppm		
Middle Channel 25KHz Channel Spacing	7.6	-33	-0.0026
	7.5	-31	-0.0365
	7.4	-57	-0.0678
	7.3	-26	-0.0306
	7.2	-34	-0.0410
	7.1	-43	-0.0513
Limit	5ppm		

Mode	Temperature (°C)	Frequency error (Hz)	frequency error (ppm)
Middle Channel 12.5KHz Channel Spacing	-20	-33	-0.0027
	-10	-26	-0.0021
	0	-56	-0.0044
	10	-27	-0.0022
	20	-29	-0.0023
	30	-40	-0.0032
	40	-24	-0.0019
	50	-18	-0.0015
Limit	2.5ppm		
Middle Channel 25KHz Channel Spacing	-20	-28	-0.0011
	-10	-35	-0.0014
	0	-29	-0.0012
	10	-33	-0.0013
	20	-29	-0.0012
	30	-35	-0.0014
	40	-25	-0.0010
	50	-30	-0.0012
Limit	5ppm		

3.7. Modulation Characteristic

Test Requirement:	FCC Part 90.207
Test Result:	According to FCC § 2.1047(d), Part 22, 74, 90 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


3.8. Adjacent channel power


Test Requirement:	FCC Part 90.221												
Test Setup:	 Spectrum AnalyzerEUT												
Test Limit:	Maximum adjacent power levels for frequencies in the 450–470 MHz band, no need compliance with below -36dBm: <table><thead><tr><th>Frequency offset</th><th>Maximum ACP (dBc) for devices 1 watt and less</th><th>Maximum ACP (dBc) for devices above 1 watt</th></tr></thead><tbody><tr><td>25 kHz</td><td>– 55 dBc</td><td>– 60 dBc</td></tr><tr><td>50 kHz</td><td>– 70 dBc</td><td>– 70 dBc</td></tr><tr><td>75 kHz</td><td>– 70 dBc</td><td>– 70 dBc</td></tr></tbody></table>	Frequency offset	Maximum ACP (dBc) for devices 1 watt and less	Maximum ACP (dBc) for devices above 1 watt	25 kHz	– 55 dBc	– 60 dBc	50 kHz	– 70 dBc	– 70 dBc	75 kHz	– 70 dBc	– 70 dBc
Frequency offset	Maximum ACP (dBc) for devices 1 watt and less	Maximum ACP (dBc) for devices above 1 watt											
25 kHz	– 55 dBc	– 60 dBc											
50 kHz	– 70 dBc	– 70 dBc											
75 kHz	– 70 dBc	– 70 dBc											
Test method:	The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the Frequency band 0Kz from the wanted frequency												
Test result:	Pass.												

GMSK 25KHz spacing 450MHz-470MHz

Carrier frequency (MHz)	Test Frequency (MHz)	Test Value (dBm)	Limit (dBm)	Result
450.000	449.925	-60.220	30-70=-40	PASS
	449.95	-61.455	30-70=-40	PASS
	449.975	-61.208	30-55=-25	PASS
	450.025	-60.997	30-55=-25	PASS
	450.05	-60.989	30-70=-40	PASS
	450.075	-60.850	30-70=-40	PASS
469.950	469.875	-60.768	30-70=-40	PASS
	469.900	-61.168	30-70=-40	PASS
	469.925	-60.781	30-55=-25	PASS
	469.975	-60.477	30-55=-25	PASS
	470.000	-60.911	30-70=-40	PASS
	470.025	-60.931	30-70=-40	PASS



GMSK 25KHz spacing 450MHz-470MHz

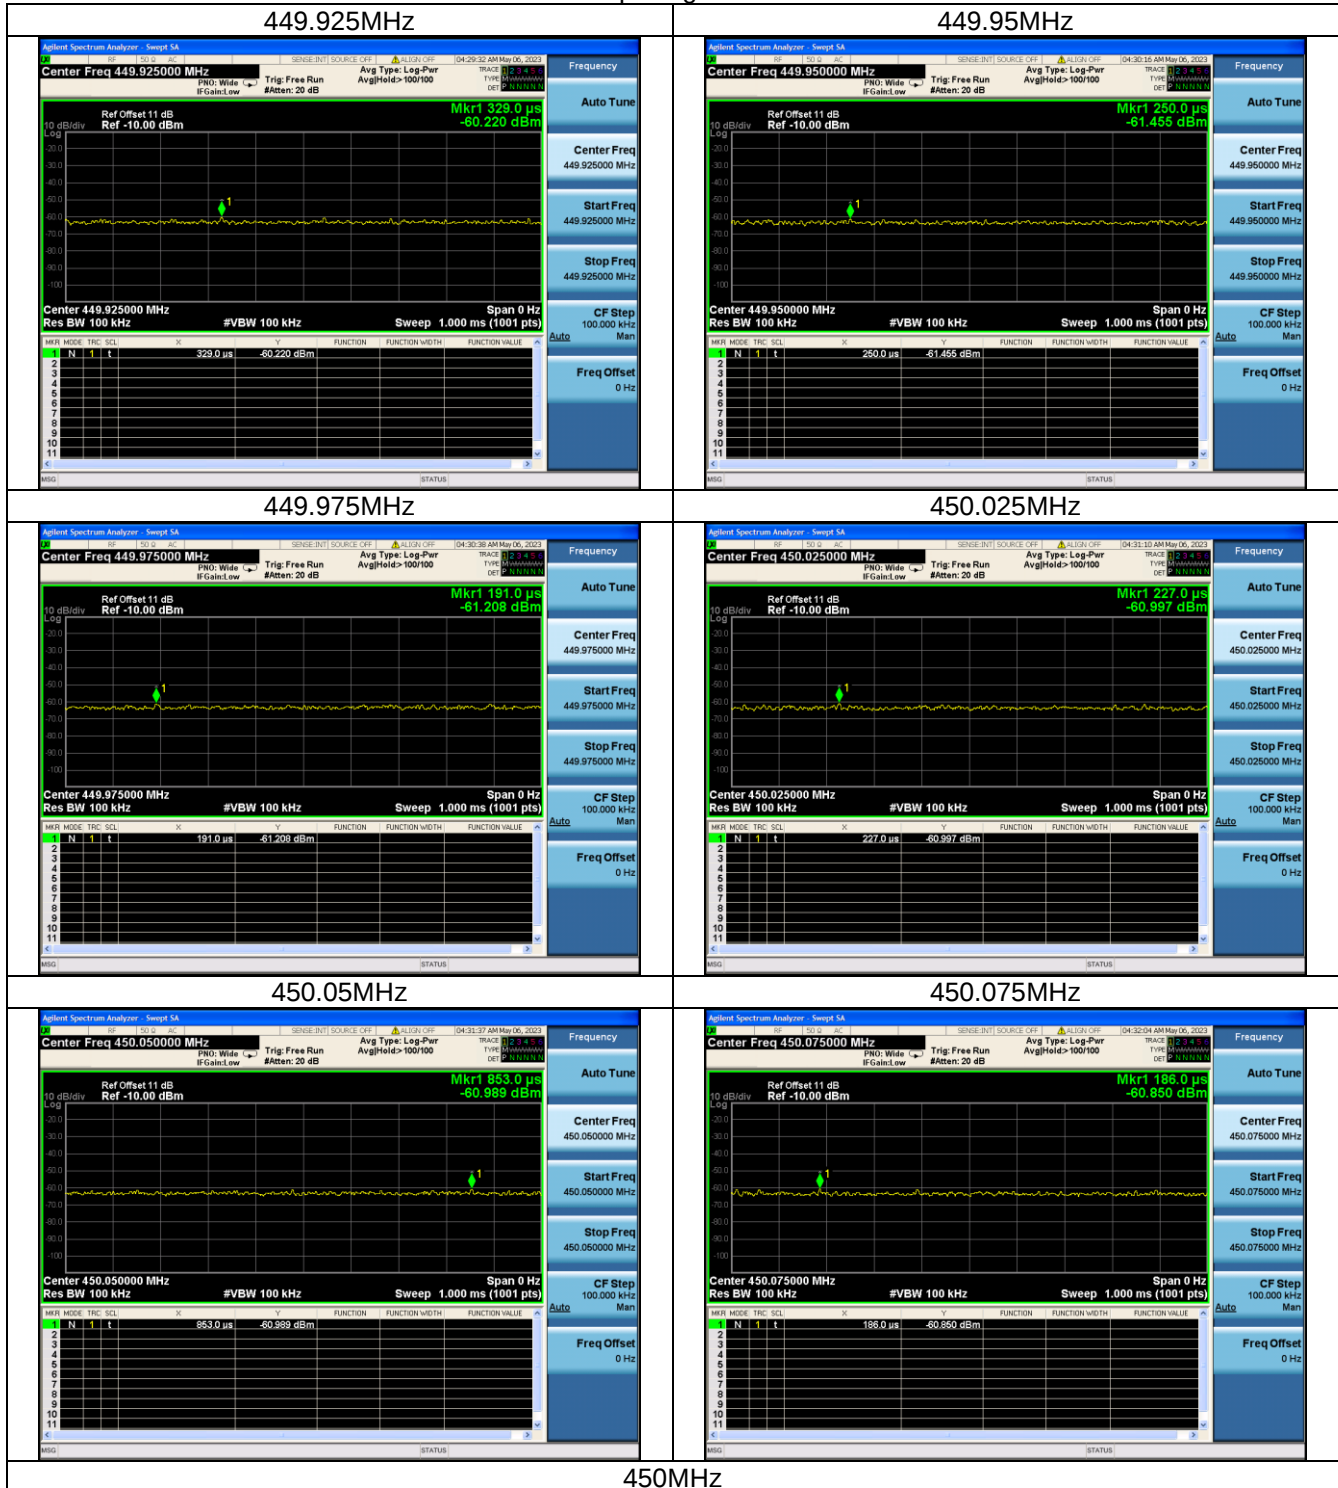

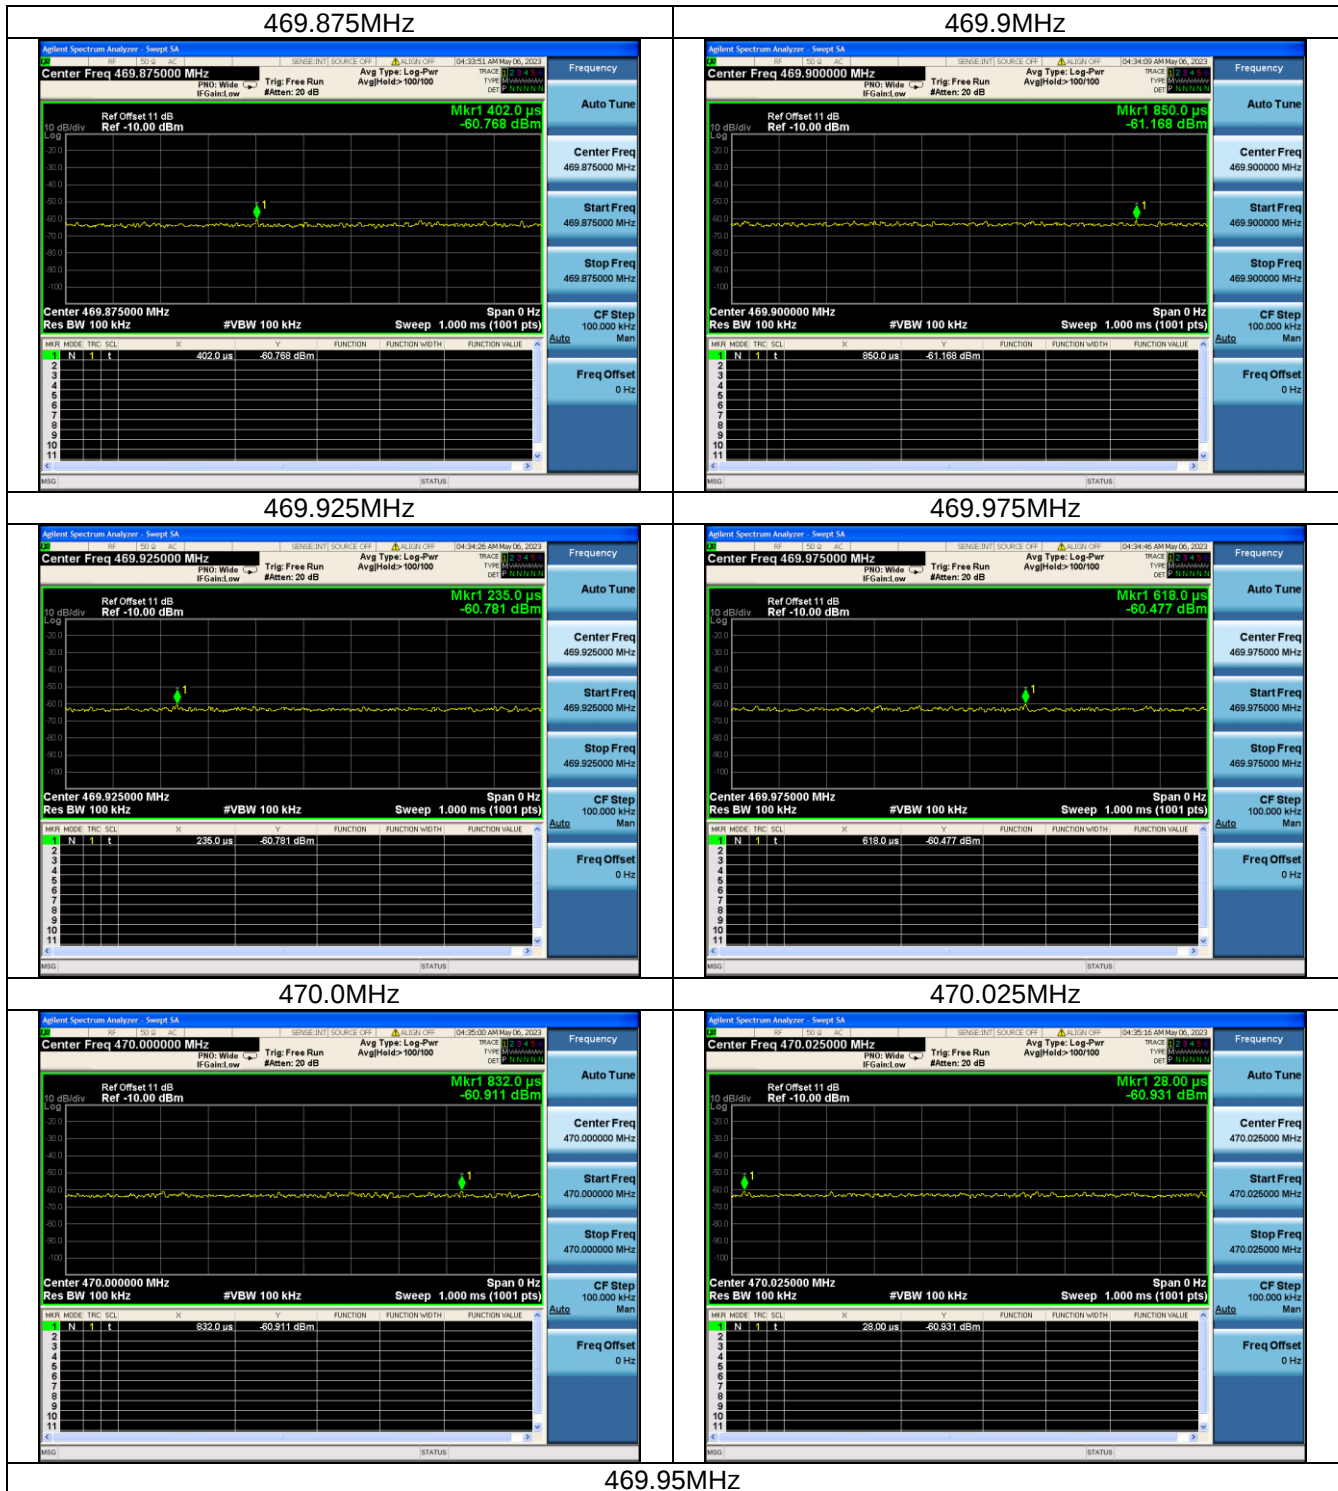

4. Test Setup Photo

4.1. Photos of Radiated emission

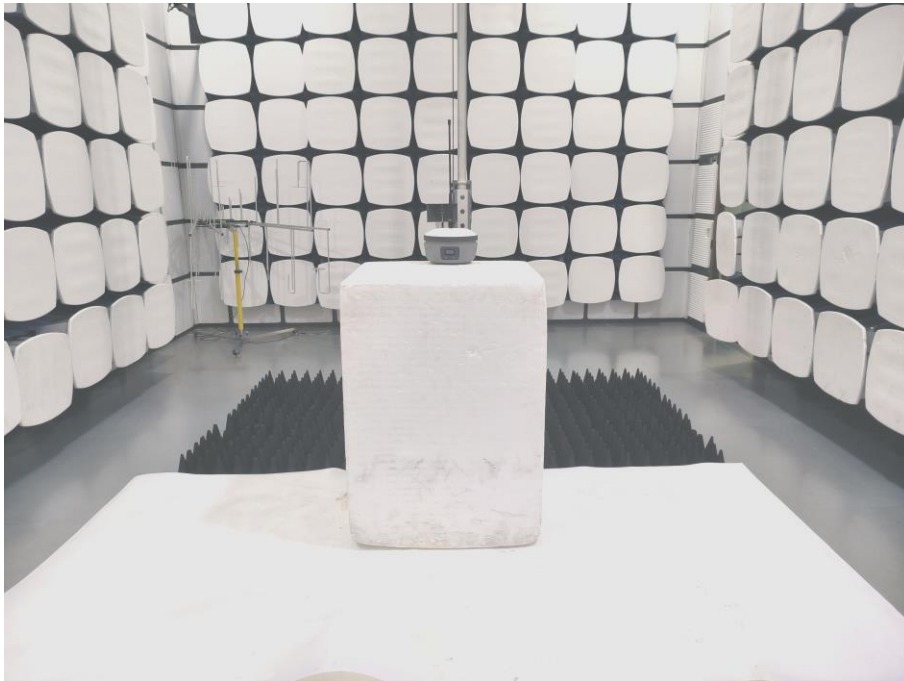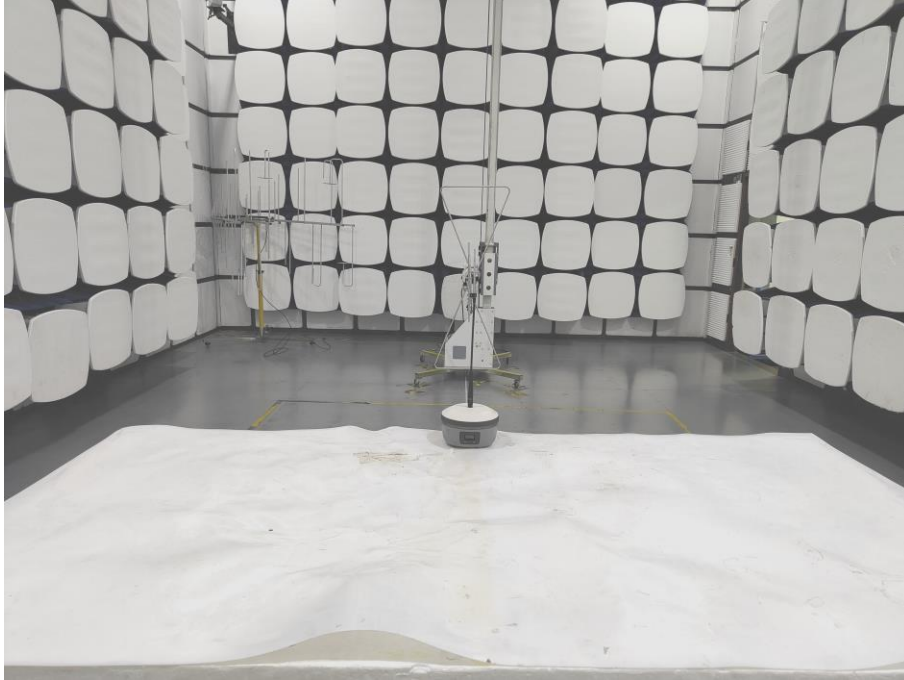

----- END OF REPORT-----