


Plot 7-88. Ant3-n261 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 98 of 210

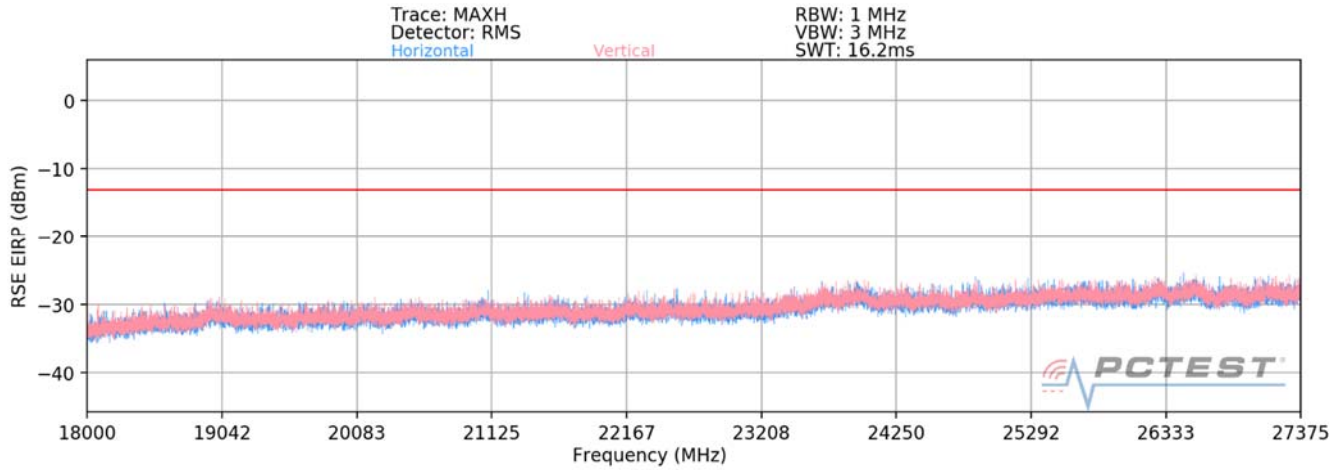

Plot 7-89. Ant3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 99 of 210	

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
26619.50	Low	100	H	QPSK	V	-	-	-28.38	-13.00	-15.38
26796.00	Low	100	V	QPSK	V	-	-	-29.13	-13.00	-16.13
26346.00	Mid	100	H	QPSK	V	-	-	-29.66	-13.00	-16.66
26567.00	Mid	100	V	QPSK	V	-	-	-28.61	-13.00	-15.61
26546.50	High	100	H	QPSK	V	-	-	-27.43	-13.00	-14.43
26486.50	High	100	V	QPSK	V	-	-	-28.64	-13.00	-15.64

Table 7-53. Ant3 - SISO -Spurious Emissions Table (18GHz - 27.375GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	100	QPSK	-25.73	-13.00	-12.73
Mid	100	QPSK	-26.09	-13.00	-13.09
High	100	QPSK	-24.98	-13.00	-11.98


Table 7-54. Ant3 - MIMO -Spurious Emissions Table (18GHz - 27.375GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 100 of 210	

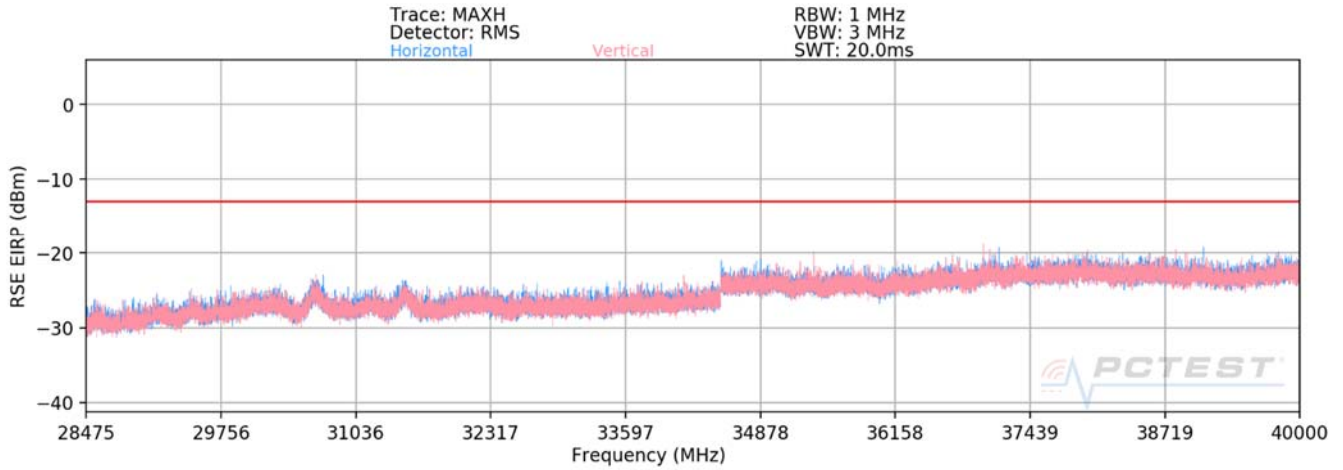

Plot 7-90. Ant3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 101 of 210	

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
39241.50	Low	100	H	QPSK	V	-	-	-24.38	-13.00	-11.38
38712.00	Low	100	V	QPSK	V	-	-	-21.35	-13.00	-8.35
36635.00	Mid	100	H	QPSK	V	-	-	-23.71	-13.00	-10.71
39003.50	Mid	100	V	QPSK	V	-	-	-24.46	-13.00	-11.46
39634.50	High	100	H	QPSK	V	-	-	-23.42	-13.00	-10.42
38685.00	High	100	V	QPSK	V	-	-	-23.53	-13.00	-10.53

Table 7-55. Ant3 - SISO -Spurious Emissions Table (28.475GHz - 40GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	100	QPSK	-19.60	-13.00	-6.60
Mid	100	QPSK	-21.06	-13.00	-8.06
High	100	QPSK	-20.46	-13.00	-7.46


Table 7-56. Ant3 - MIMO -Spurious Emissions Table (28.475GHz - 40GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 102 of 210	

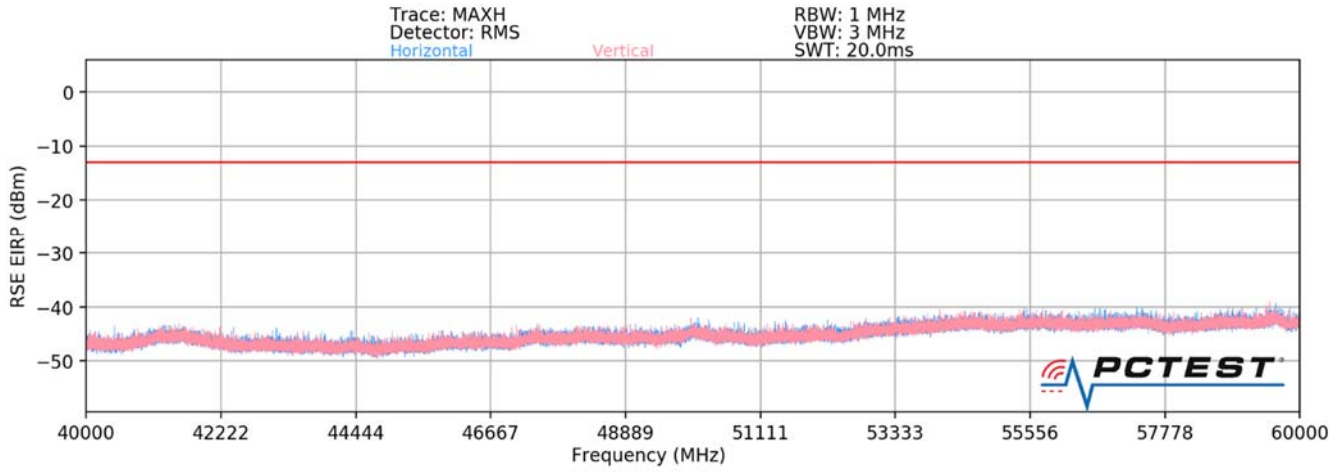

Plot 7-91. Ant3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 103 of 210

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss[dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55069.68	Low	100	H	QPSK	H	45	358	-44.13	-13.00	-31.13
55069.68	Low	100	V	QPSK	H	63	117	-44.35	-13.00	-31.35
55844.16	Mid	100	H	QPSK	H	41	144	-41.71	-13.00	-28.71
55844.16	Mid	100	V	QPSK	H	67	107	-42.16	-13.00	-29.16
56640.50	High	100	H	QPSK	H	23	110	-43.51	-13.00	-30.51
56640.50	High	100	V	QPSK	H	49	112	-40.75	-13.00	-27.75

Table 7-57. Ant3 - SISO -Spurious Emissions Table (40GHz - 60GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	100	QPSK	-41.22	-13.00	-28.22
Mid	100	QPSK	-38.92	-13.00	-25.92
High	100	QPSK	-38.90	-13.00	-25.90


Table 7-58. Ant3 - MIMO -Spurious Emissions Table (40GHz - 60GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 104 of 210	

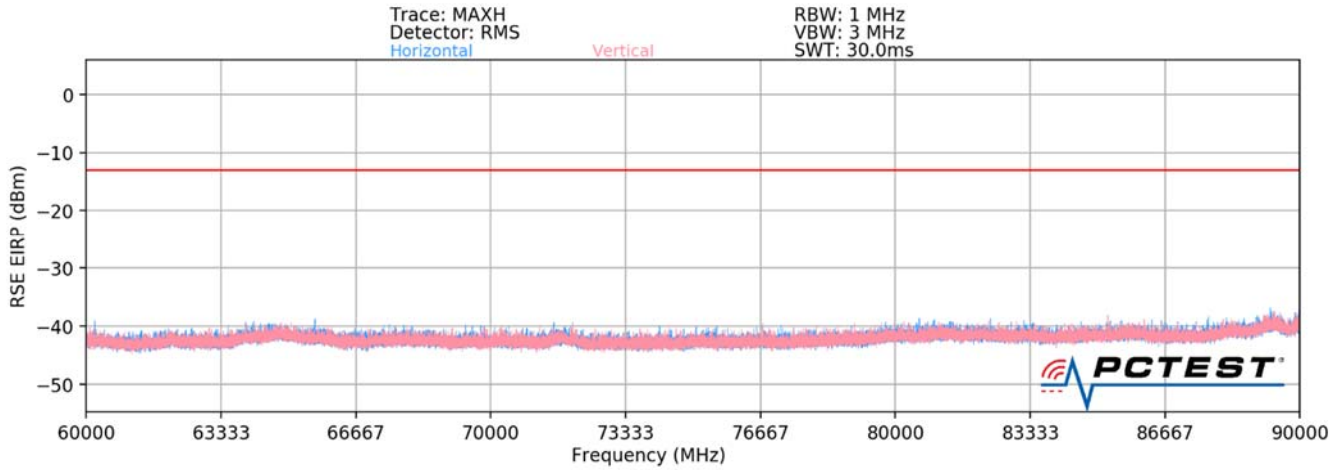

Plot 7-92. Ant3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 105 of 210	

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
82677.96	Low	100	H	QPSK	V	-	-	-37.74	-13.00	-24.74
82677.96	Low	100	V	QPSK	V	-	-	-38.22	-13.00	-25.22
83770.56	Mid	100	H	QPSK	V	-	-	-38.74	-13.00	-25.74
83770.56	Mid	100	V	QPSK	V	-	-	-38.29	-13.00	-25.29
84876.48	High	100	H	QPSK	V	-	-	-38.64	-13.00	-25.64
84876.48	High	100	V	QPSK	V	-	-	-37.89	-13.00	-24.89

Table 7-59. Ant3 - SISO -Spurious Emissions Table (60GHz - 90GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	100	QPSK	-34.96	-13.00	-21.96
Mid	100	QPSK	-35.50	-13.00	-22.50
High	100	QPSK	-35.24	-13.00	-22.24


Table 7-60. Ant3 - MIMO -Spurious Emissions Table (60GHz - 90GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 106 of 210	

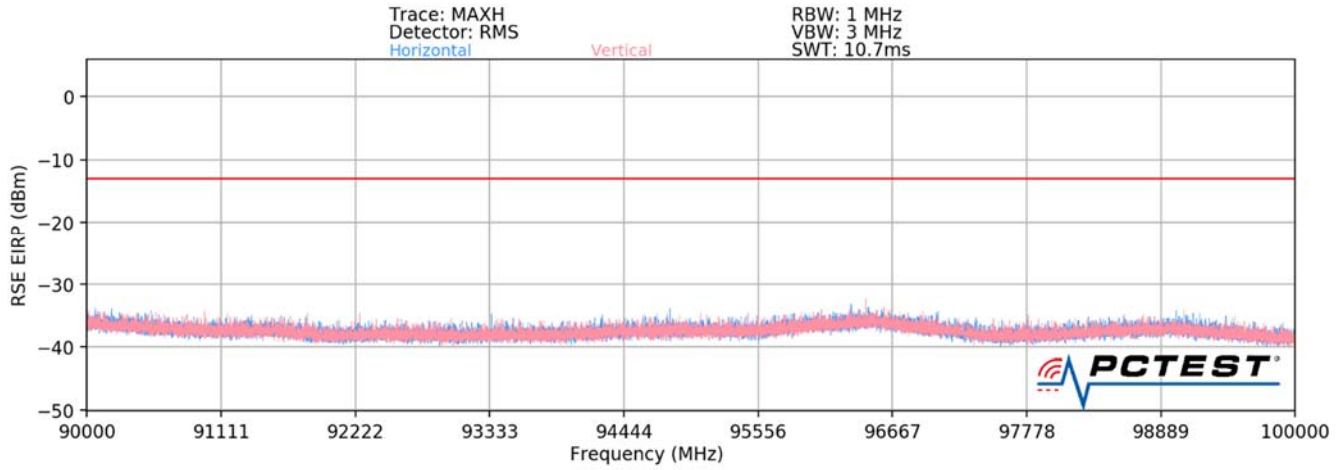

Plot 7-93. Ant3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 107 of 210

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
94315.31	Low	100	H	QPSK	H	-	-	-38.61	-13.00	-25.61
92394.67	Low	100	V	QPSK	V	-	-	-37.08	-13.00	-24.08
93617.34	Mid	100	H	QPSK	H	-	-	-39.61	-13.00	-26.61
96672.65	Mid	100	V	QPSK	V	-	-	-38.48	-13.00	-25.48
96476.30	High	100	H	QPSK	H	-	-	-39.61	-13.00	-25.61
92037.64	High	100	V	QPSK	V	-	-	-38.18	-13.00	-25.18

Table 7-61. Ant3 - SISO -Spurious Emissions Table (90GHz - 100GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	100	QPSK	-34.77	-13.00	-21.77
Mid	100	QPSK	-36.00	-13.00	-23.00
High	100	QPSK	-35.83	-13.00	-22.83

Table 7-62. Ant3 - MIMO -Spurious Emissions Table (90GHz - 100GHz)


Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$


FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 108 of 210	

**Band n260 – QTM#0 / Ant1
30MHz - 1GHz**

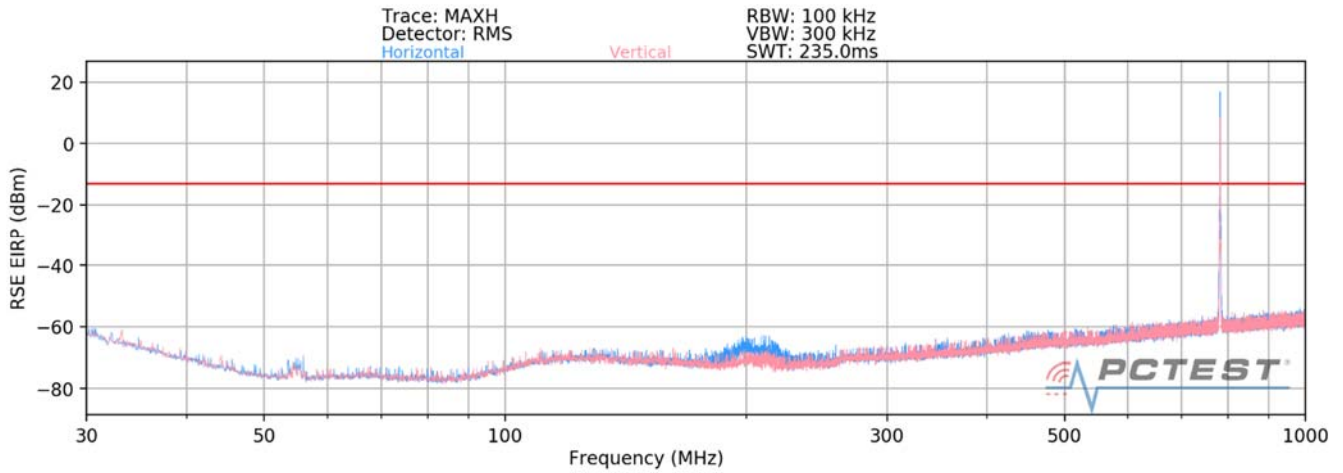


Plot 7-94. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 109 of 210	

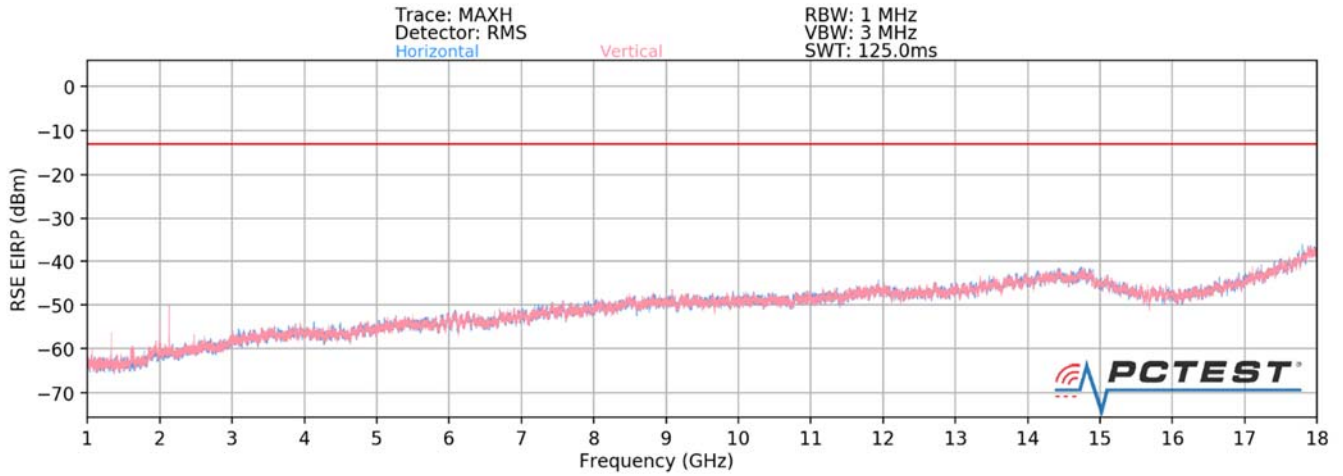

Plot 7-95. Ant1-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 110 of 210

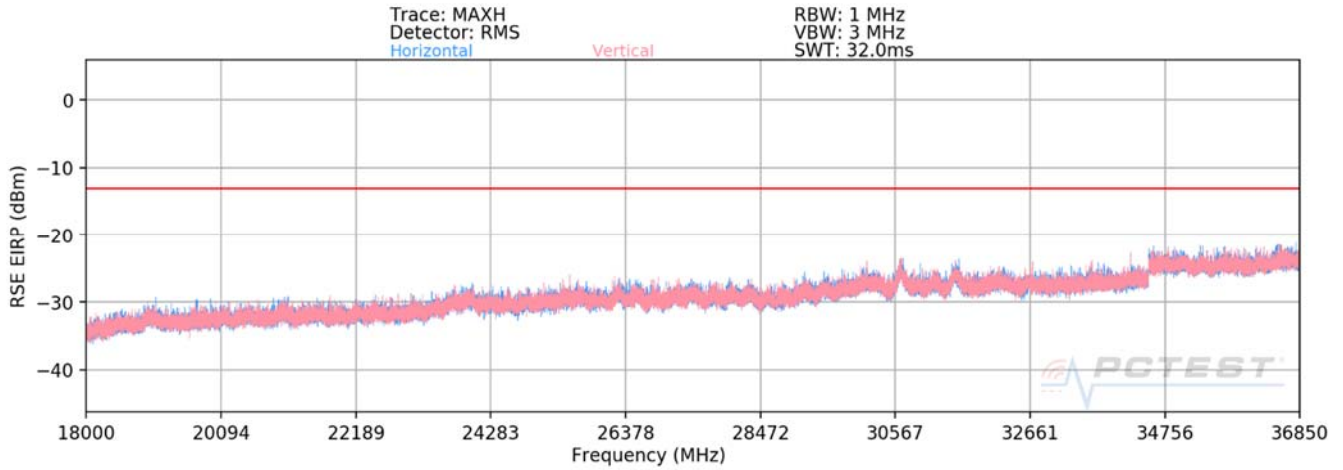

Plot 7-96. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 111 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36603.60	Low	50	H	QPSK	V	-	-	-25.42	-13.00	-12.42
36186.30	Low	50	V	QPSK	V	-	-	-25.35	-13.00	-12.35
36563.80	Mid	50	H	QPSK	V	-	-	-23.91	-13.00	-10.91
36359.30	Mid	50	V	QPSK	V	-	-	-23.24	-13.00	-10.24
36729.20	High	50	H	QPSK	V	-	-	-23.90	-13.00	-10.90
36197.00	High	50	V	QPSK	V	-	-	-24.74	-13.00	-11.74

Table 7-63. Ant1 - SISO -Spurious Emissions Table (18GHz - 36.85GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-22.37	-13.00	-9.37
Mid	50	QPSK	-20.55	-13.00	-7.55
High	50	QPSK	-21.29	-13.00	-8.29


Table 7-64. Ant1 - MIMO -Spurious Emissions Table (18GHz - 36.85GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 112 of 210	

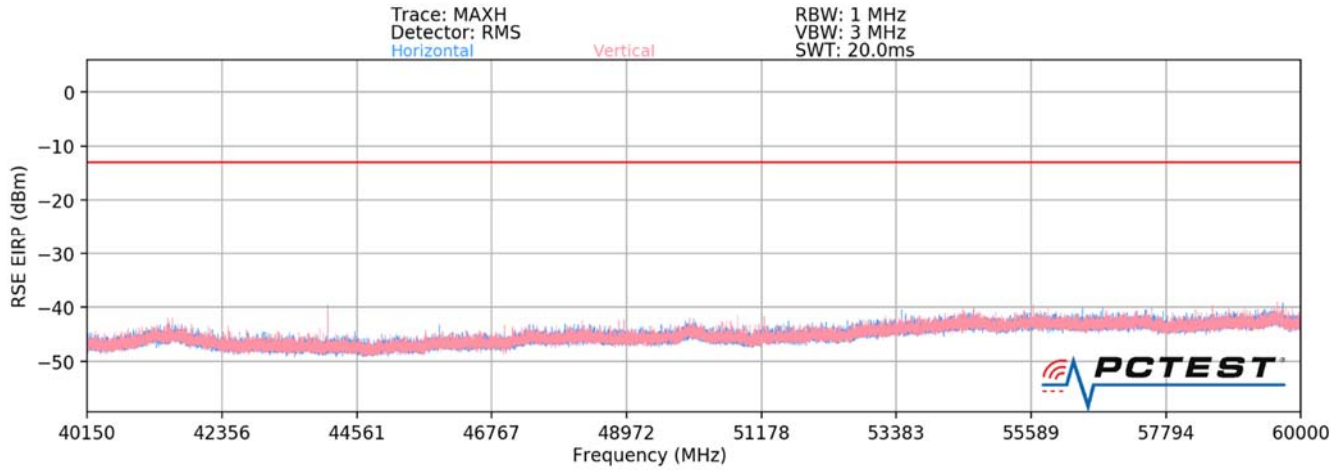

Plot 7-97. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 113 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42931.00	Low	50	H	QPSK	H	47	130	-31.35	-13.00	-18.35
42931.00	Low	50	V	QPSK	H	53	34	-30.35	-13.00	-17.35
44083.00	Mid	50	H	QPSK	H	60	85	-29.82	-13.00	-16.82
44083.00	Mid	50	V	QPSK	H	95	124	-34.83	-13.00	-21.83
46233.50	High	50	H	QPSK	H	348	343	-42.46	-13.00	-29.46
46233.50	High	50	V	QPSK	H	90	143	-40.03	-13.00	-27.03

Table 7-65. Ant1 - SISO -Spurious Emissions Table (40.15GHz - 60GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-27.81	-13.00	-14.81
Mid	50	QPSK	-28.63	-13.00	-15.63
High	50	QPSK	-38.07	-13.00	-25.07


Table 7-66. Ant1 - MIMO -Spurious Emissions Table (40.15GHz - 60GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 114 of 210	

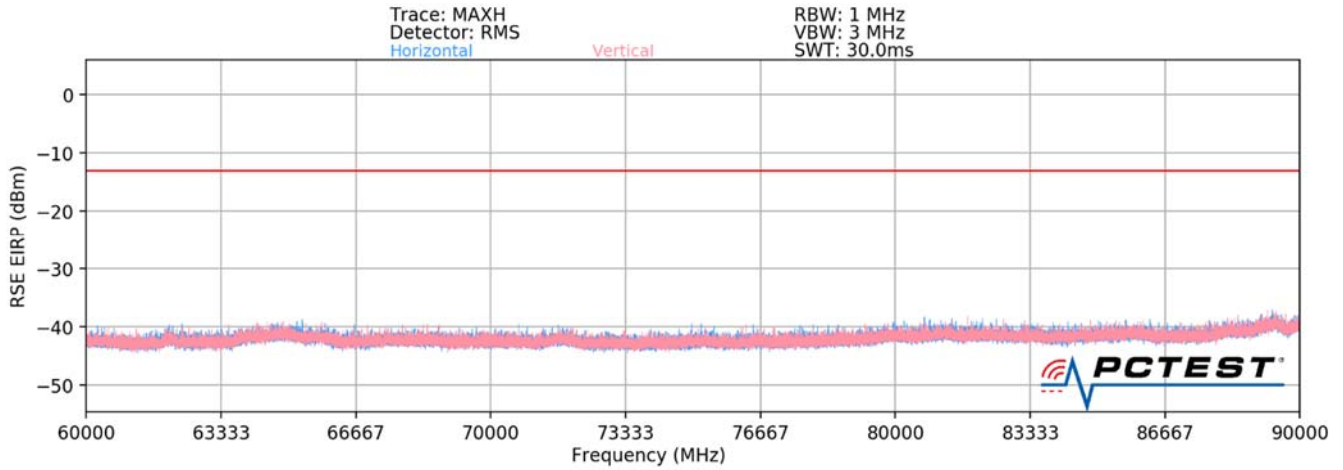

Plot 7-98. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 115 of 210

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74054.64	Low	50	H	QPSK	V	258	254	-38.58	-13.00	-25.58
74054.64	Low	50	V	QPSK	V	45	36	-39.80	-13.00	-26.80
76994.88	Mid	50	H	QPSK	V	233	141	-39.79	-13.00	-26.79
76994.88	Mid	50	V	QPSK	V	35	173	-38.30	-13.00	-25.30
79932.48	High	50	H	QPSK	V	88	318	-37.94	-13.00	-24.94
79932.48	High	50	V	QPSK	V	43	97	-38.23	-13.00	-25.23

Table 7-67. Ant1 - SISO -Spurious Emissions Table (60GHz - 90GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-36.14	-13.00	-23.14
Mid	50	QPSK	-35.97	-13.00	-22.97
High	50	QPSK	-35.07	-13.00	-22.07


Table 7-68. Ant1 - MIMO -Spurious Emissions Table (60GHz - 90GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 116 of 210	

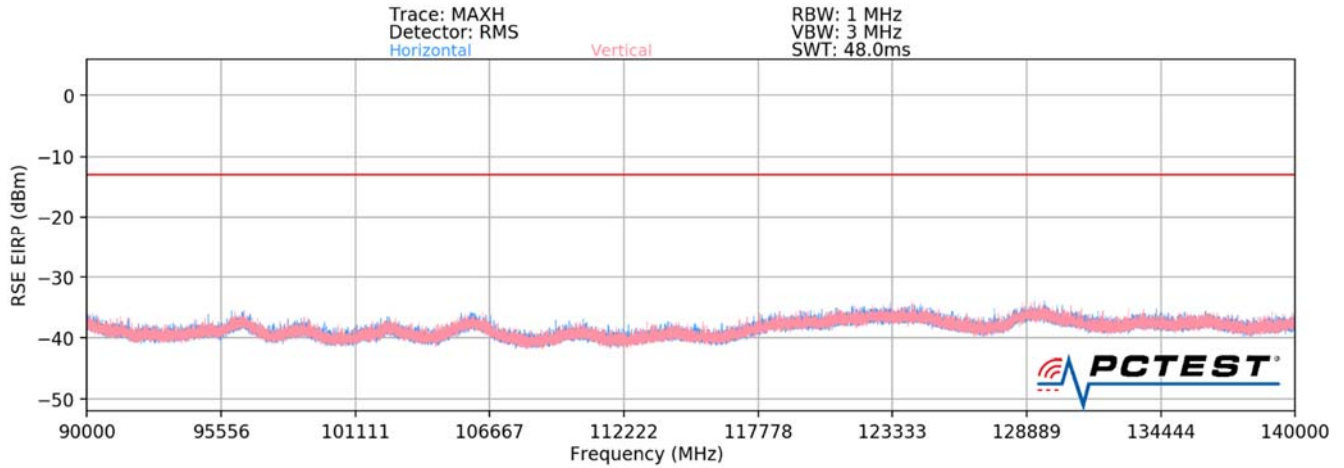

Plot 7-99. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 117 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss[dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
118257.13	Low	50	H	QPSK	H	-	-	-37.59	-13.00	-24.59
118342.94	Low	50	V	QPSK	V	-	-	-38.61	-13.00	-25.61
119312.65	Mid	50	H	QPSK	H	-	-	-37.02	-13.00	-24.02
119534.48	Mid	50	V	QPSK	V	-	-	-36.56	-13.00	-23.56
118986.64	High	50	H	QPSK	H	-	-	-37.08	-13.00	-24.08
118567.61	High	50	V	QPSK	V	-	-	-38.61	-13.00	-25.61

Table 7-69. Ant1 - SISO -Spurious Emissions Table (90GHz - 140GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-35.06	-13.00	-22.06
Mid	50	QPSK	-33.77	-13.00	-20.77
High	50	QPSK	-34.77	-13.00	-21.77


Table 7-70. Ant1 - MIMO -Spurious Emissions Table (90GHz - 140GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 118 of 210	

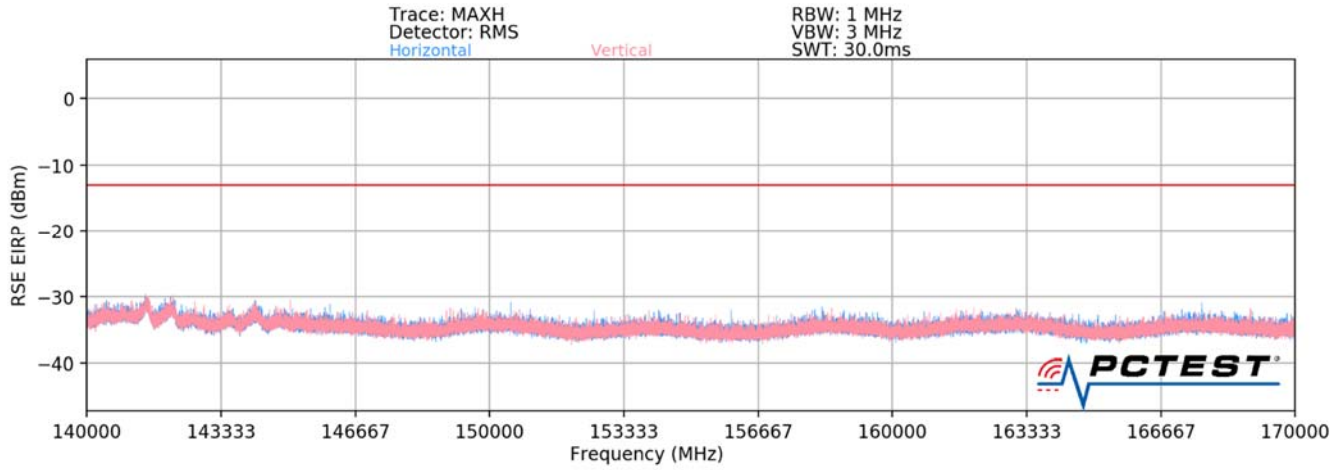

Plot 7-100. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 119 of 210

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
140253.24	Low	50	H	QPSK	H	-	-	-36.58	-13.00	-23.58
140264.97	Low	50	V	QPSK	V	-	-	-36.47	-13.00	-23.47
140341.38	Mid	50	H	QPSK	H	-	-	-36.20	-13.00	-23.20
140647.61	Mid	50	V	QPSK	V	-	-	-35.97	-13.00	-22.97
141236.24	High	50	H	QPSK	H	-	-	-36.02	-13.00	-23.02
140236.67	High	50	V	QPSK	V	-	-	-36.64	-13.00	-23.64

Table 7-71. Ant1 - SISO -Spurious Emissions Table (140GHz - 170GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-33.51	-13.00	-20.51
Mid	50	QPSK	-33.07	-13.00	-20.07
High	50	QPSK	-33.31	-13.00	-20.31

Table 7-72. Ant1 - MIMO -Spurious Emissions Table (140GHz - 170GHz)


Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 120 of 210	

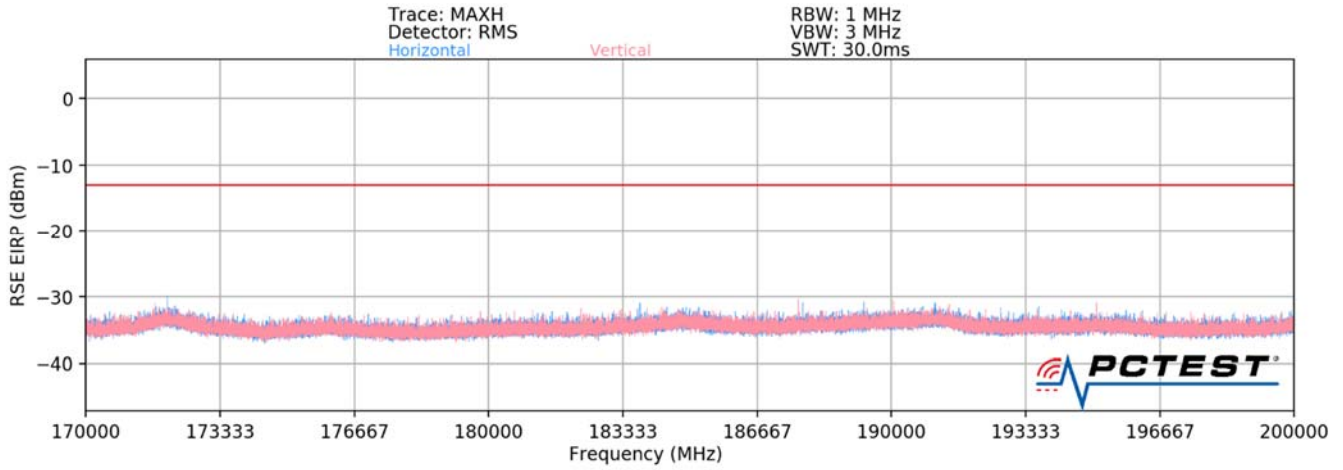

Plot 7-101. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 121 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
189216.38	Low	50	H	QPSK	H	-	-	-35.61	-13.00	-22.61
189689.21	Low	50	V	QPSK	V	-	-	-35.30	-13.00	-22.30
190671.30	Mid	50	H	QPSK	H	-	-	-35.93	-13.00	-22.93
190293.71	Mid	50	V	QPSK	V	-	-	-36.21	-13.00	-23.21
191456.20	High	50	H	QPSK	H	-	-	-35.07	-13.00	-22.07
190463.84	High	50	V	QPSK	V	-	-	-36.84	-13.00	-23.84

Table 7-73. Ant1 - SISO -Spurious Emissions Table (170GHz - 200GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-32.44	-13.00	-19.44
Mid	50	QPSK	-33.06	-13.00	-20.06
High	50	QPSK	-32.86	-13.00	-19.86

Table 7-74. Ant1 - MIMO -Spurious Emissions Table (170GHz - 200GHz)

Notes


1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$


FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 122 of 210	

**Band n260 – QTM#1 / Ant2
30MHz - 1GHz**

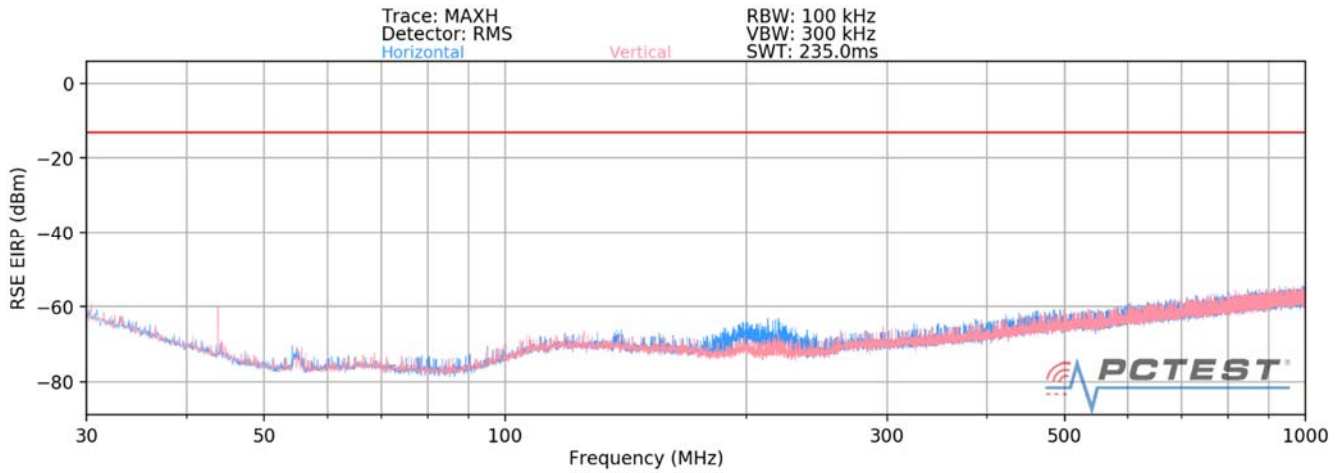


Plot 7-102. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 123 of 210	

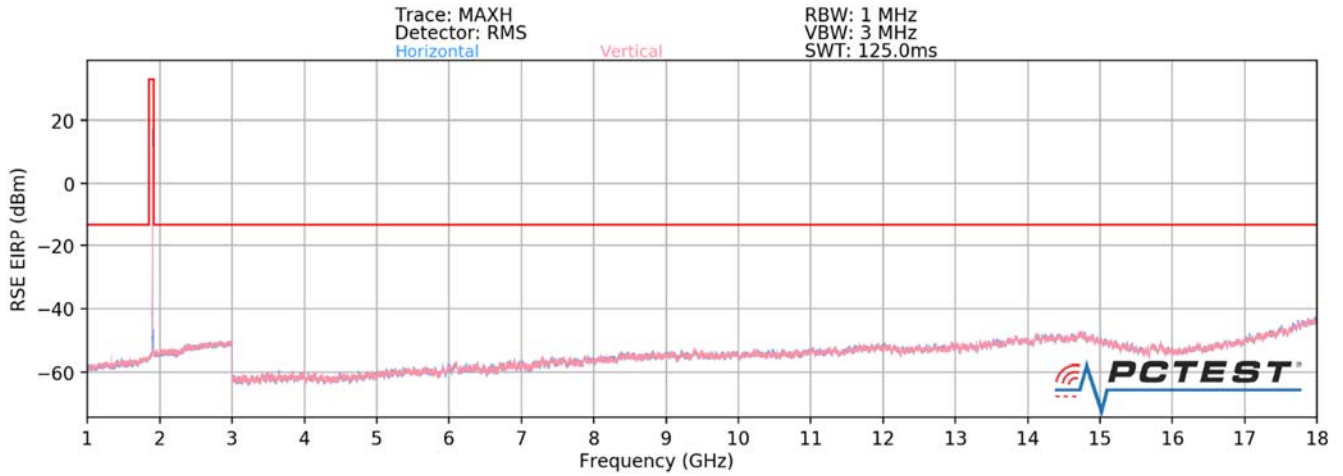

Plot 7-103. Ant2-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 124 of 210

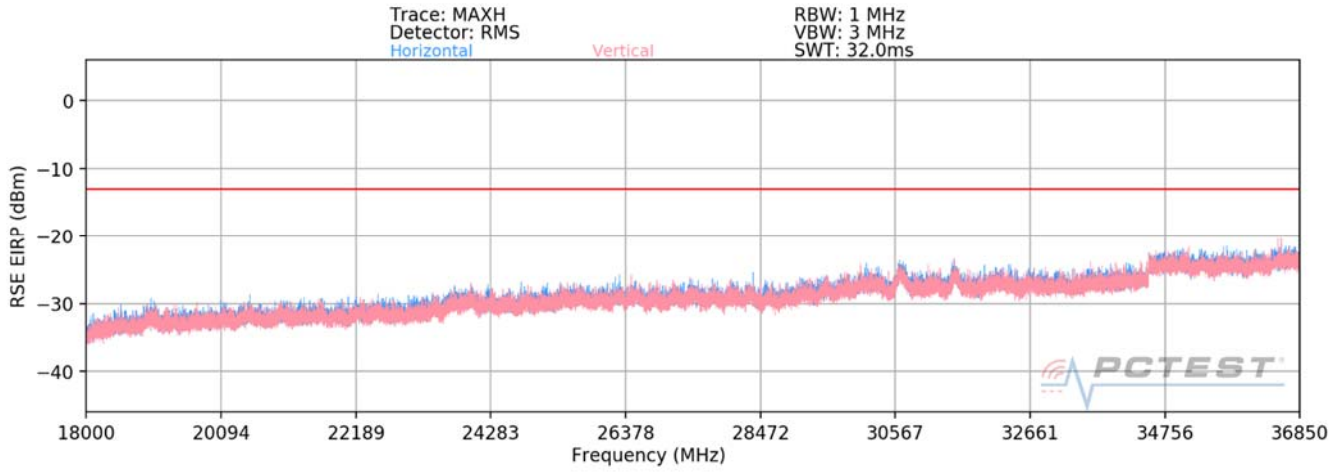

Plot 7-104. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 125 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36166.70	Low	50	H	QPSK	H	-	-	-23.32	-13.00	-10.32
36549.30	Low	50	V	QPSK	V	-	-	-24.73	-13.00	-11.73
36580.20	Mid	50	H	QPSK	H	-	-	-23.15	-13.00	-10.15
36471.60	Mid	50	V	QPSK	V	-	-	-23.98	-13.00	-10.98
36506.40	High	50	H	QPSK	H	-	-	-22.71	-13.00	-9.71
36030.40	High	50	V	QPSK	V	-	-	-25.87	-13.00	-12.87

Table 7-75. Ant2 - SISO -Spurious Emissions Table (18GHz - 36.85GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-20.96	-13.00	-7.96
Mid	50	QPSK	-20.53	-13.00	-7.53
High	50	QPSK	-21.00	-13.00	-8.00


Table 7-76. Ant2 - MIMO -Spurious Emissions Table (18GHz - 36.85GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 126 of 210	

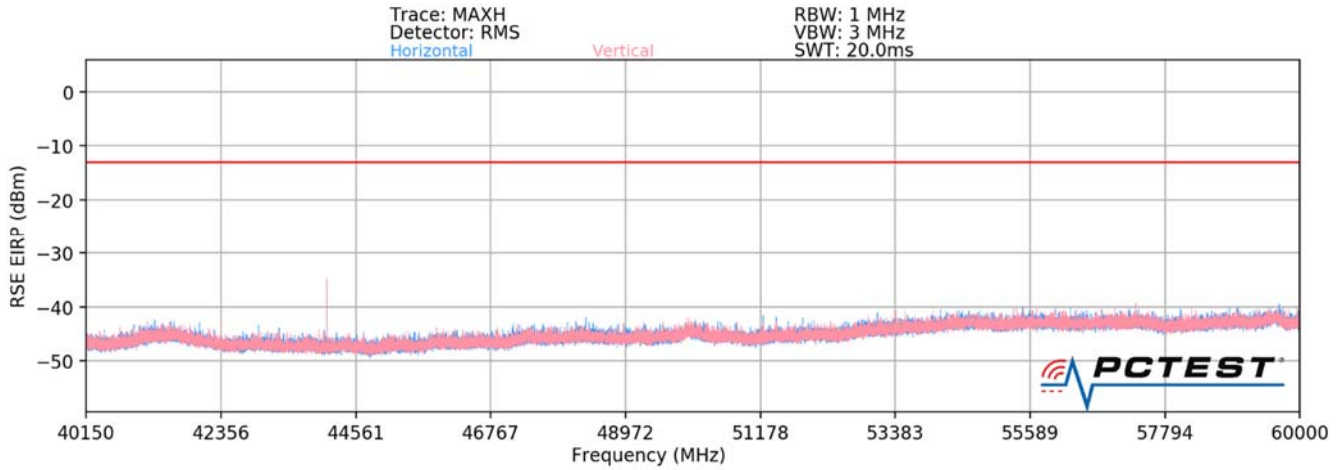

Plot 7-105. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 127 of 210

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42931.00	Low	50	H	QPSK	V	26	193	-28.35	-13.00	-15.35
42931.00	Low	50	V	QPSK	V	8	30	-27.95	-13.00	-14.95
44083.00	Mid	50	H	QPSK	V	38	224	-28.72	-13.00	-15.72
44083.00	Mid	50	V	QPSK	V	6	41	-28.05	-13.00	-15.05
46233.50	High	50	H	QPSK	V	29	244	-28.99	-13.00	-15.99
46233.50	High	50	V	QPSK	V	6	26	-28.34	-13.00	-15.34

Table 7-77. Ant2 - SISO -Spurious Emissions Table (40.15GHz - 60GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-25.14	-13.00	-12.14
Mid	50	QPSK	-25.36	-13.00	-12.36
High	50	QPSK	-25.64	-13.00	-12.64

Table 7-78. Ant2 - MIMO -Spurious Emissions Table (40.15GHz - 60GHz)


Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 128 of 210	

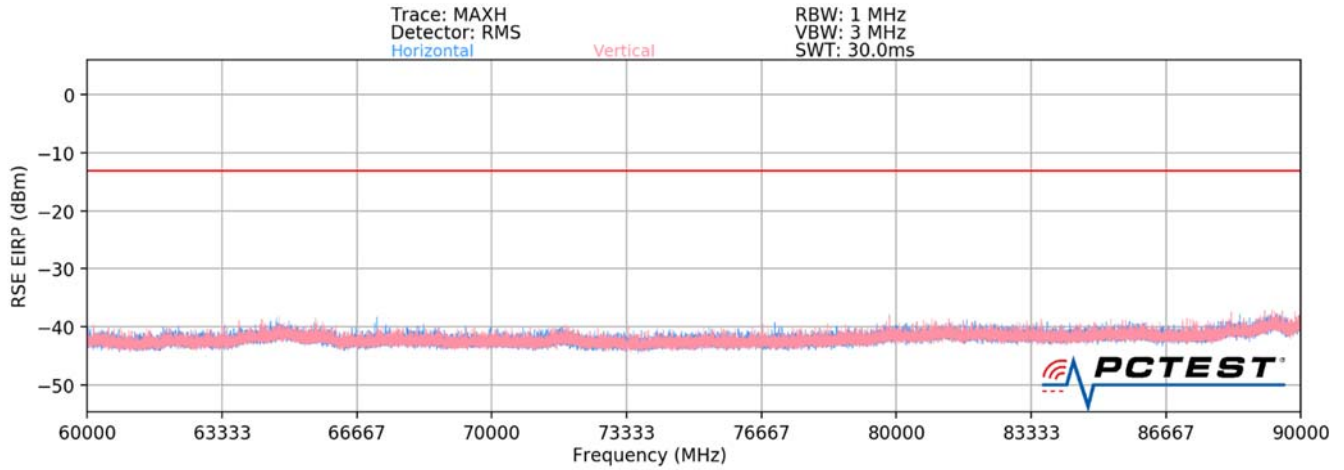

Plot 7-106. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 129 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74054.64	Low	50	H	QPSK	V	55	24	-39.21	-13.00	-26.21
74054.64	Low	50	V	QPSK	V	358	2	-37.20	-13.00	-24.20
76994.88	Mid	50	H	QPSK	V	14	38	-38.69	-13.00	-25.69
76994.88	Mid	50	V	QPSK	V	15	17	-33.47	-13.00	-20.47
79932.48	High	50	H	QPSK	V	90	348	-38.07	-13.00	-25.07
79932.48	High	50	V	QPSK	V	135	331	-38.41	-13.00	-25.41

Table 7-79. Ant2 - SISO -Spurious Emissions Table (60GHz - 90GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-35.08	-13.00	-22.08
Mid	50	QPSK	-32.33	-13.00	-19.33
High	50	QPSK	-35.23	-13.00	-22.23


Table 7-80. Ant2 - MIMO -Spurious Emissions Table (60GHz - 90GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 130 of 210	

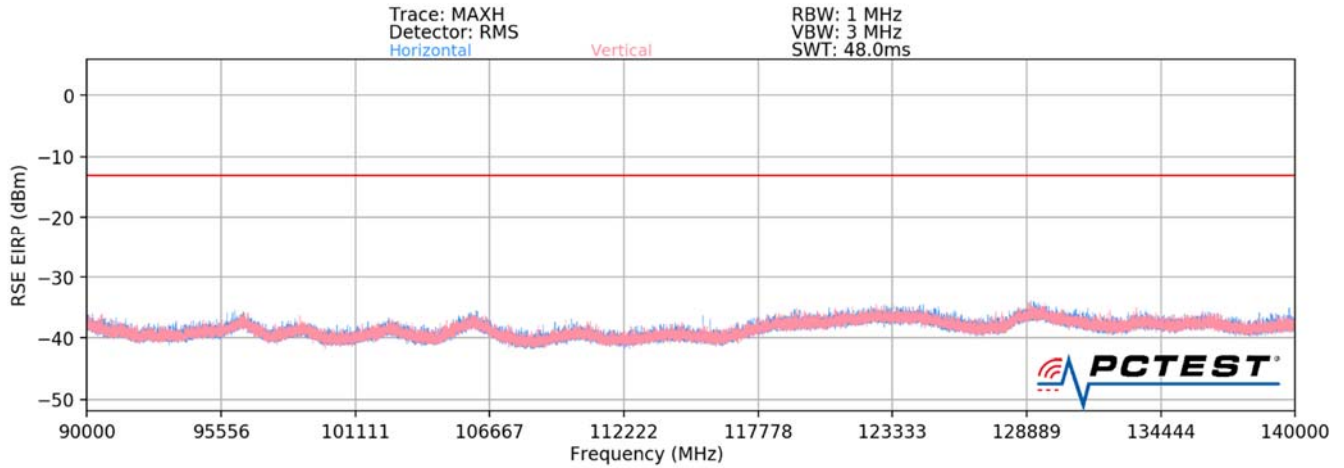

Plot 7-107. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 131 of 210

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
119328.64	Low	50	H	QPSK	H	-	-	-37.61	-13.00	-24.61
118328.46	Low	50	V	QPSK	V	-	-	-38.31	-13.00	-25.31
118618.61	Mid	50	H	QPSK	H	-	-	-37.69	-13.00	-24.69
119647.37	Mid	50	V	QPSK	V	-	-	-37.08	-13.00	-24.08
121395.60	High	50	H	QPSK	H	-	-	-37.68	-13.00	-24.68
118343.34	High	50	V	QPSK	V	-	-	-36.47	-13.00	-23.47

Table 7-81. Ant2 - SISO -Spurious Emissions Table (90GHz - 140GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-34.94	-13.00	-21.94
Mid	50	QPSK	-34.36	-13.00	-21.36
High	50	QPSK	-34.02	-13.00	-21.02


Table 7-82. Ant2 - MIMO -Spurious Emissions Table (90GHz - 140GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 132 of 210	

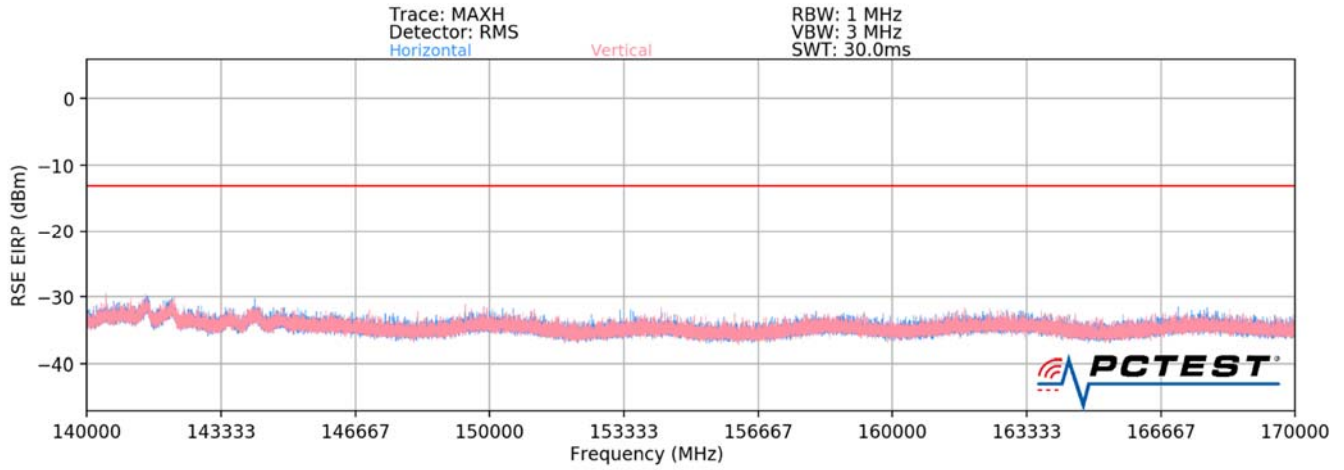

Plot 7-108. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 133 of 210

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
140283.58	Low	50	H	QPSK	H	-	-	-35.18	-13.00	-22.18
140684.30	Low	50	V	QPSK	V	-	-	-35.60	-13.00	-22.60
141637.48	Mid	50	H	QPSK	H	-	-	-36.84	-13.00	-23.84
140238.36	Mid	50	V	QPSK	V	-	-	-34.87	-13.00	-21.87
141310.84	High	50	H	QPSK	H	-	-	-36.20	-13.00	-23.20
141796.28	High	50	V	QPSK	V	-	-	-35.97	-13.00	-22.97

Table 7-83. Ant2 - SISO -Spurious Emissions Table (140GHz - 170GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-32.37	-13.00	-19.37
Mid	50	QPSK	-32.73	-13.00	-19.73
High	50	QPSK	-33.07	-13.00	-20.07

Table 7-84. Ant2 - MIMO -Spurious Emissions Table (140GHz - 170GHz)


Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 134 of 210	

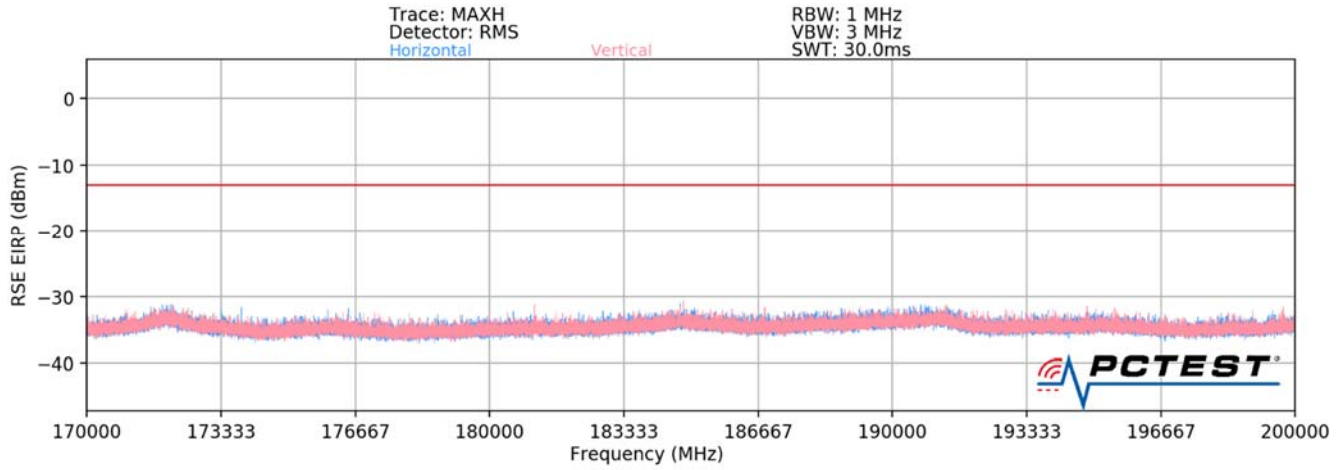

Plot 7-109. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 135 of 210

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
189238.21	Low	50	H	QPSK	H	-	-	-36.52	-13.00	-23.52
190627.31	Low	50	V	QPSK	V	-	-	-37.19	-13.00	-24.19
189613.28	Mid	50	H	QPSK	H	-	-	-36.18	-13.00	-23.18
189876.34	Mid	50	V	QPSK	V	-	-	-36.10	-13.00	-23.10
191135.31	High	50	H	QPSK	H	-	-	-35.97	-13.00	-22.97
192318.35	High	50	V	QPSK	V	-	-	-36.64	-13.00	-23.64

Table 7-85. Ant2 - SISO -Spurious Emissions Table (170GHz - 200GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-33.83	-13.00	-20.83
Mid	50	QPSK	-33.13	-13.00	-20.13
High	50	QPSK	-33.28	-13.00	-20.28

Table 7-86. Ant2 - MIMO -Spurious Emissions Table (170GHz - 200GHz)


Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$


FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 136 of 210	

**Band n260 QTM#2 / Ant3
30MHz - 1GHz**

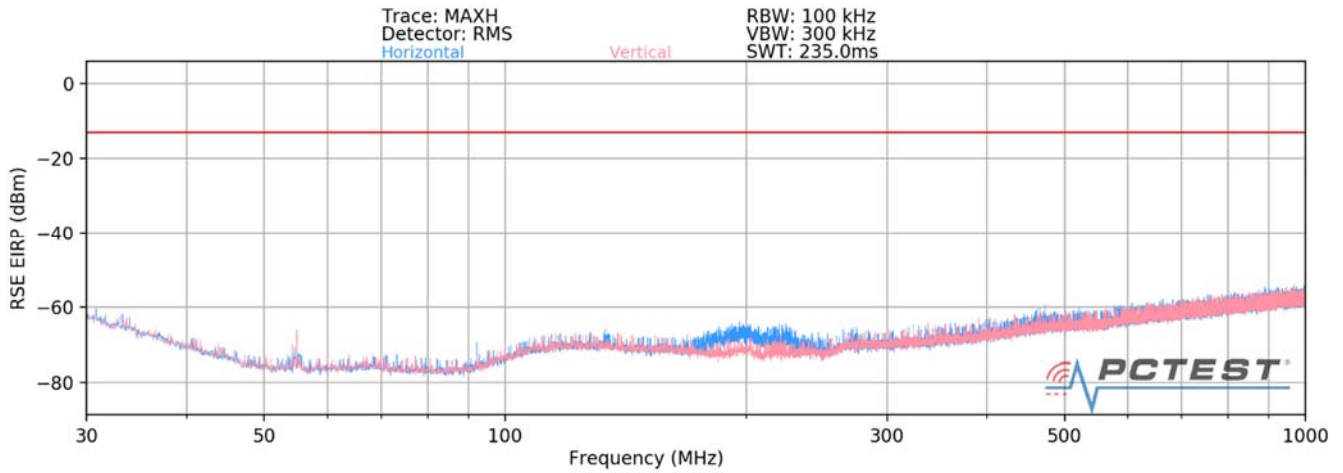


Plot 7-110. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	 MEASUREMENT REPORT (CERTIFICATION)		 Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 137 of 210

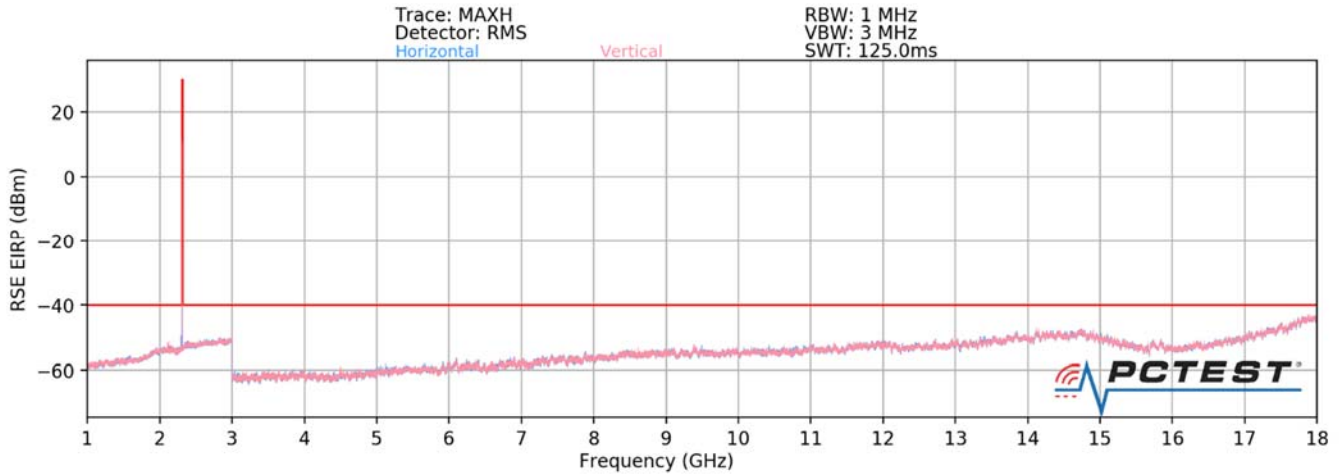

Plot 7-111. Ant3-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 138 of 210

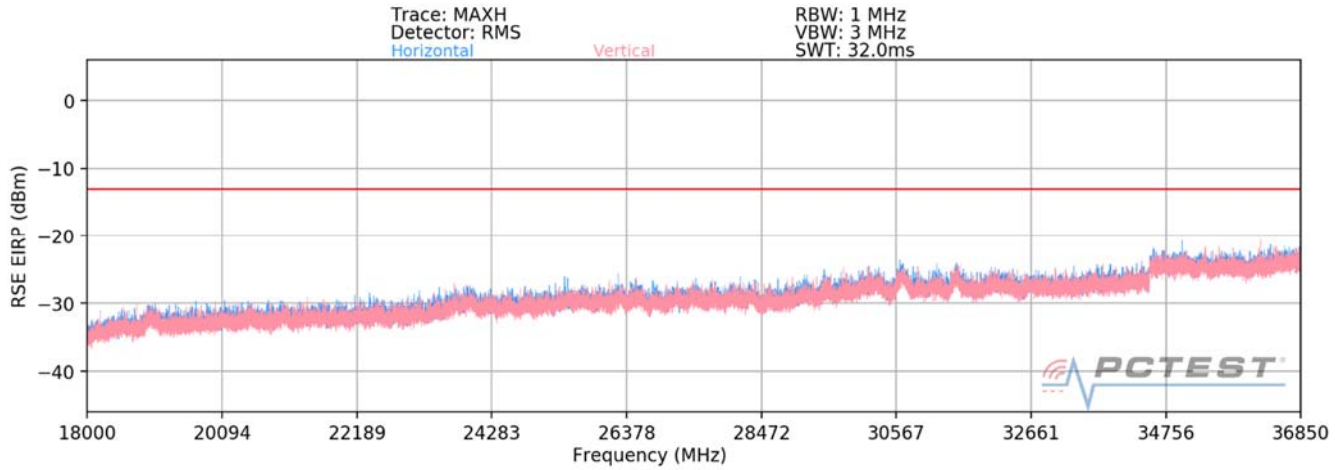

Plot 7-112. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 139 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36342.90	Low	50	H	QPSK	V	-	-	-24.48	-13.00	-11.48
36599.20	Low	50	V	QPSK	V	-	-	-24.76	-13.00	-11.76
36372.50	Mid	50	H	QPSK	V	-	-	-24.82	-13.00	-11.82
36457.80	Mid	50	V	QPSK	V	-	-	-24.37	-13.00	-11.37
36621.20	High	50	H	QPSK	V	-	-	-22.95	-13.00	-9.95
36705.20	High	50	V	QPSK	V	-	-	-24.43	-13.00	-11.43

Table 7-87. Ant3 - SISO -Spurious Emissions Table (18GHz - 36.85GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-21.61	-13.00	-8.61
Mid	50	QPSK	-21.58	-13.00	-8.58
High	50	QPSK	-20.62	-13.00	-7.62


Table 7-88. Ant3 - MIMO -Spurious Emissions Table (18GHz - 36.85GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 140 of 210	

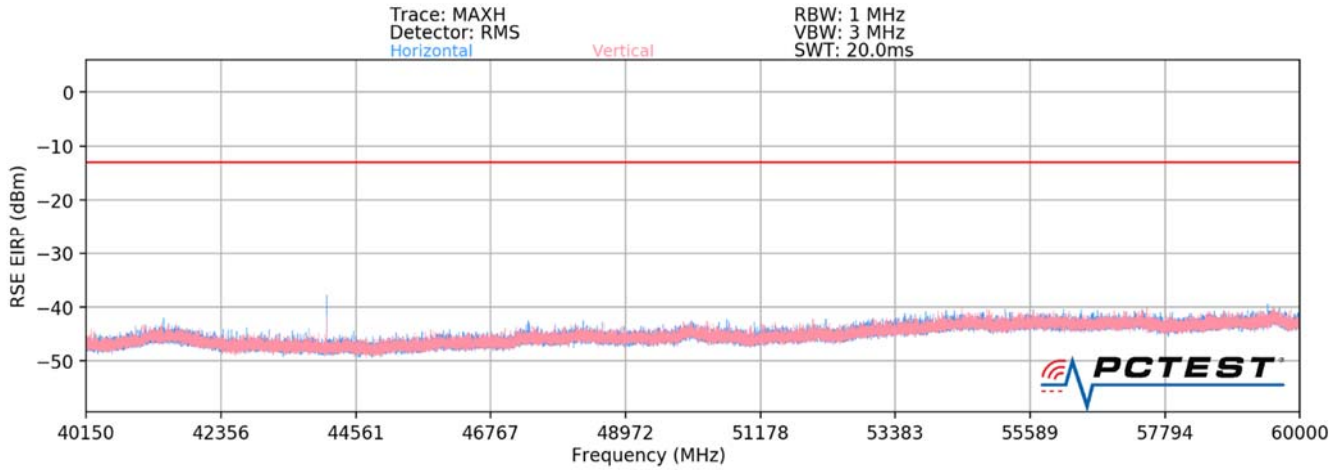

Plot 7-113. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 141 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42931.00	Low	50	H	QPSK	V	137	59	-35.36	-13.00	-22.36
42931.00	Low	50	V	QPSK	V	188	336	-33.18	-13.00	-20.18
44083.00	Mid	50	H	QPSK	V	122	227	-38.61	-13.00	-25.61
44083.00	Mid	50	V	QPSK	V	188	355	-36.35	-13.00	-23.35
46233.50	High	50	H	QPSK	V	289	341	-40.39	-13.00	-27.39
46233.50	High	50	V	QPSK	V	303	211	-41.35	-13.00	-28.35

Table 7-89. Ant3 - SISO -Spurious Emissions Table (40.15GHz - 60GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-31.12	-13.00	-18.12
Mid	50	QPSK	-34.32	-13.00	-21.32
High	50	QPSK	-37.83	-13.00	-24.83


Table 7-90. Ant3 - MIMO -Spurious Emissions Table (40.15GHz - 60GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 142 of 210	

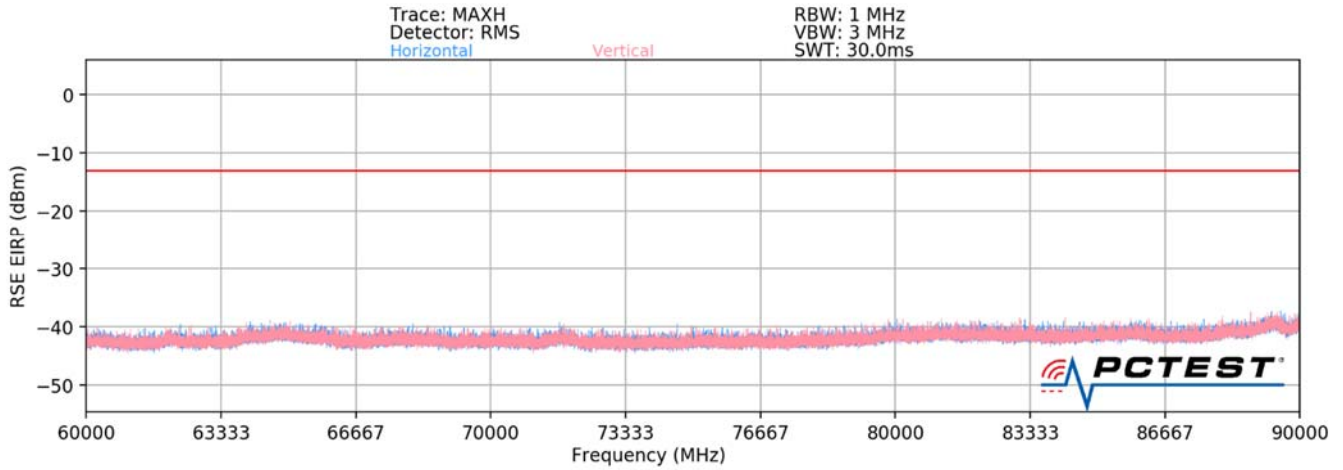

Plot 7-114. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 143 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74054.64	Low	50	H	QPSK	V	-	-	-39.24	-13.00	-26.24
74054.64	Low	50	V	QPSK	V	-	-	-38.25	-13.00	-25.25
76994.88	Mid	50	H	QPSK	V	-	-	-39.71	-13.00	-26.71
76994.88	Mid	50	V	QPSK	V	-	-	-39.11	-13.00	-26.11
79932.48	High	50	H	QPSK	V	-	-	-38.51	-13.00	-25.51
79932.48	High	50	V	QPSK	V	-	-	-38.16	-13.00	-25.16

Table 7-91. Ant3 - SISO -Spurious Emissions Table (60GHz - 90GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-35.71	-13.00	-22.71
Mid	50	QPSK	-36.39	-13.00	-23.39
High	50	QPSK	-35.32	-13.00	-22.32


Table 7-92. Ant3 - MIMO -Spurious Emissions Table (60GHz - 90GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 144 of 210	

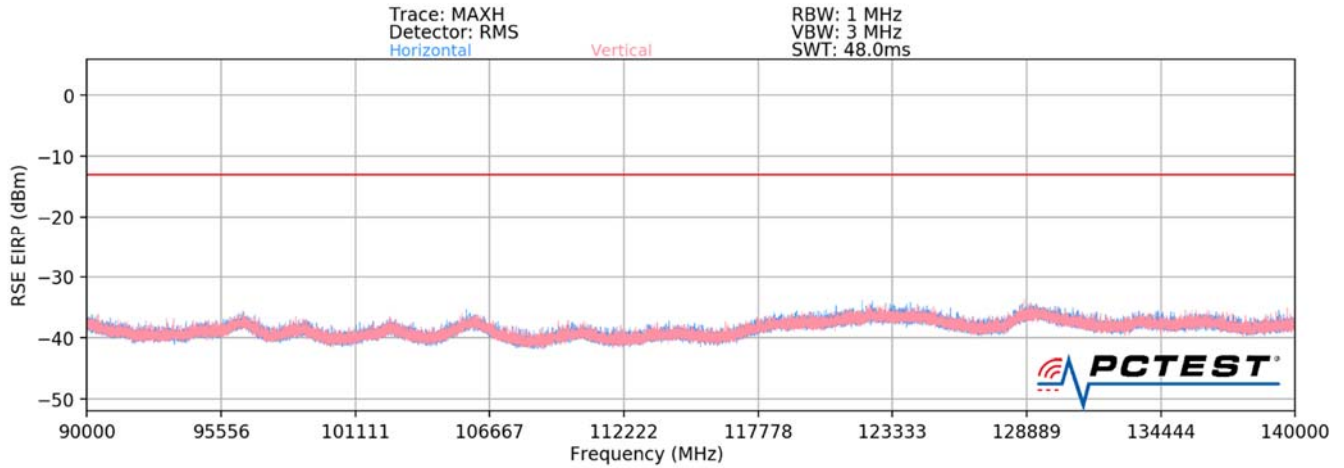

Plot 7-115. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 145 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
115328.61	Low	50	H	QPSK	H	-	-	-38.37	-13.00	-25.37
115687.36	Low	50	V	QPSK	V	-	-	-37.36	-13.00	-24.36
118308.48	Mid	50	H	QPSK	H	-	-	-36.48	-13.00	-23.48
119316.67	Mid	50	V	QPSK	V	-	-	-37.61	-13.00	-24.61
116673.87	High	50	H	QPSK	H	-	-	-36.74	-13.00	-23.74
1193764.48	High	50	V	QPSK	V	-	-	-30.00	-13.00	-17.00

Table 7-93. Ant3 - SISO -Spurious Emissions Table (90GHz - 140GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-34.83	-13.00	-21.83
Mid	50	QPSK	-34.00	-13.00	-21.00
High	50	QPSK	-29.17	-13.00	-16.17


Table 7-94. Ant3 - MIMO -Spurious Emissions Table (90GHz - 140GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 146 of 210	

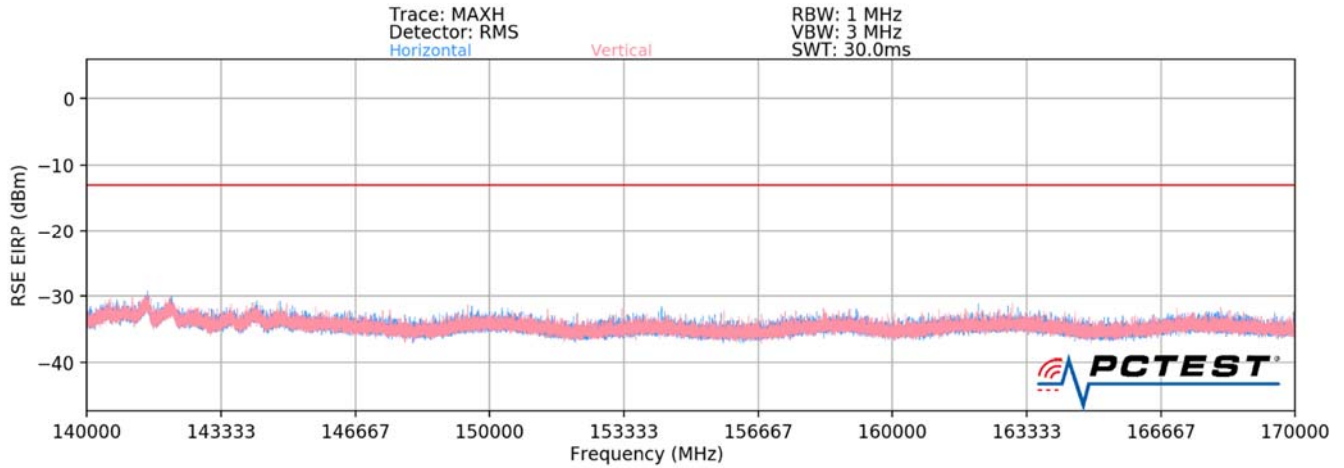

Plot 7-116. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 147 of 210

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
141318.00	Low	50	H	QPSK	H	-	-	-35.18	-13.00	-22.18
140383.10	Low	50	V	QPSK	V	-	-	-35.61	-13.00	-22.61
140361.68	Mid	50	H	QPSK	H	-	-	-36.10	-13.00	-23.10
140964.31	Mid	50	V	QPSK	V	-	-	-35.64	-13.00	-22.64
141383.38	High	50	H	QPSK	H	-	-	-36.76	-13.00	-23.76
140643.37	High	50	V	QPSK	V	-	-	-35.89	-13.00	-22.89

Table 7-95. Ant3 - SISO -Spurious Emissions Table (140GHz - 170GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-32.38	-13.00	-19.38
Mid	50	QPSK	-32.85	-13.00	-19.85
High	50	QPSK	-33.29	-13.00	-20.29


Table 7-96. Ant3 - MIMO -Spurious Emissions Table (140GHz - 170GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 148 of 210	

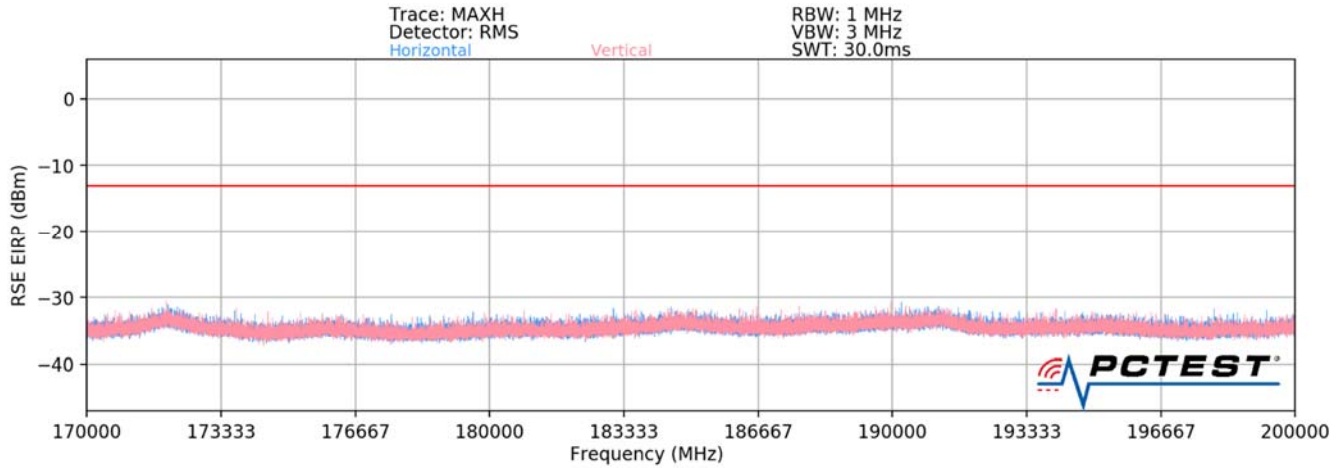

Plot 7-117. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 149 of 210	

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + \text{Harmonic Mixer Conversion Loss [dB]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
189209.80	Low	50	H	QPSK	H	-	-	-37.29	-13.00	-24.29
190163.14	Low	50	V	QPSK	V	-	-	-38.08	-13.00	-25.08
189310.38	Mid	50	H	QPSK	H	-	-	-37.61	-13.00	-24.61
190243.18	Mid	50	V	QPSK	V	-	-	-38.18	-13.00	-25.18
190679.94	High	50	H	QPSK	H	-	-	-37.39	-13.00	-24.39
189364.08	High	50	V	QPSK	V	-	-	-37.18	-13.00	-24.18

Table 7-97. Ant3 - SISO -Spurious Emissions Table (170GHz - 200GHz)

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-34.66	-13.00	-21.66
Mid	50	QPSK	-34.88	-13.00	-21.88
High	50	QPSK	-34.27	-13.00	-21.27

Table 7-98. Ant3 - MIMO -Spurious Emissions Table (170GHz - 200GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 150 of 210	

7.5 Band Edge Emissions

§2.1051, §30.203

Test Overview

All out of band emissions are measured in a radiated setup while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All modulations were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is -13dBm/1MHz. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

Test Procedure Used

ANSI C63.26-2015 Section 5 and ANSI C63.26-2015 Section 6.4
KDB 842590 D01 v01 Section 4.4.2.5

Test Settings

1. Start and stop frequency were set such that both upper and lower band edges are measured.
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 1MHz
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning.
- 2) Band Edge measurements in this section are shown as equivalent conductive powers for direct comparison to the 30.203 limit. The conductive power at the band edge is calculated by subtracting the gain of the EUT's antenna from the measured EIRP level. Antenna Gain information is shown on the following page.
- 3) Band Edge emissions were measured at a 1 meter distance.
- 4) The spectrum analyzer for each measurement shows an offset value that was determined using the measurement antenna factor, cable loss, far field measurement distance, and EUT antenna gain. A sample calculation is shown on the following page.
- 5) MIMO Band Edge plots shown below are mathematically summed conductive powers between spectrum analyzer measurements on H Beam and V Beam. This MIMO bandedge plot was produced by summing the following two spectrum analyzer traces: (1) the first trace is maximized while the EUT is transmitting in H-beam and (2) the second trace is maximized while the EUT is transmitting in V-beam.
- 6) The MIMO Band Edges were calculated by using the "measure and sum the spectra across the outputs" technique specified in Section 6.4.3.2.2 of ANSI C63.26-2015. The spectra were summed linearly and converted to dBm for comparison with the limit.

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 151 of 210	

Antenna Gain Information at the Band Edge

The following antenna gain information is provided to demonstrate the antenna performance of the 27.5 – 28.35GHz and 37 – 40GHz band. These antenna gains were subtracted from the measured EIRP levels at the lower and upper band edge frequencies to determine an equivalent conductive power that was compared directly with the §30.203 limits.

Antenna	Gain (dBi)
Ant1	9.0
Ant2	9.0
Ant3	9.0

Table 7-99. Antenna Gains at the Band Edges(n261)

Antenna	Gain (dBi)
Ant1	8.0
Ant2	8.0
Ant3	8.0

Table 7-100. Antenna Gains at the Band Edges(n260)

Sample Analyzer Offset Calculation (at 27.5GHz)

Measurement Antenna Factor = 40.70dB/m

Cable Loss = 8.26dB

EUT Antenna Gain = 9.0dBi


$$\begin{aligned} \text{Analyzer Offset (dB)} &= \text{AF (dB/m)} + \text{CL (dB)} + 107 + 20\log_{10}(D) - 104.8\text{dB} - \text{Gain (dBi)}, \text{ where } D = 1\text{m} \\ &= 40.70\text{dB/m} + 8.26\text{dB} + 107 + 20\log_{10}(1\text{m}) - 104.8\text{dB} - 9.0\text{dBi} \\ &= 42.16\text{dB} \end{aligned}$$

Note:


While it is allowed to use the antenna gain subtraction method in the band edge as it is defined in Part 30, the device meets the requirements via early exit condition as specified in KDB publication 842590 D01.

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 152 of 210	

Band n261 – QTM#0 / Ant1 - MIMO

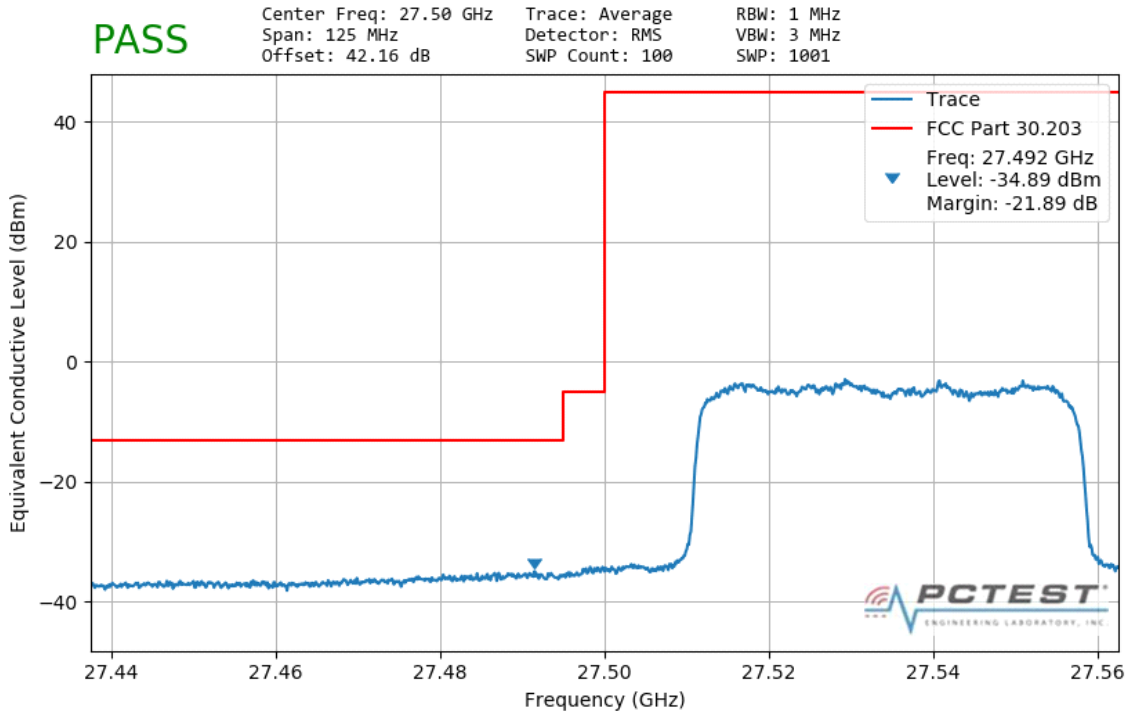


Plot 7-118. Ant1 Lower Band Edge (50MHz-1CC – QPSK Full RB)

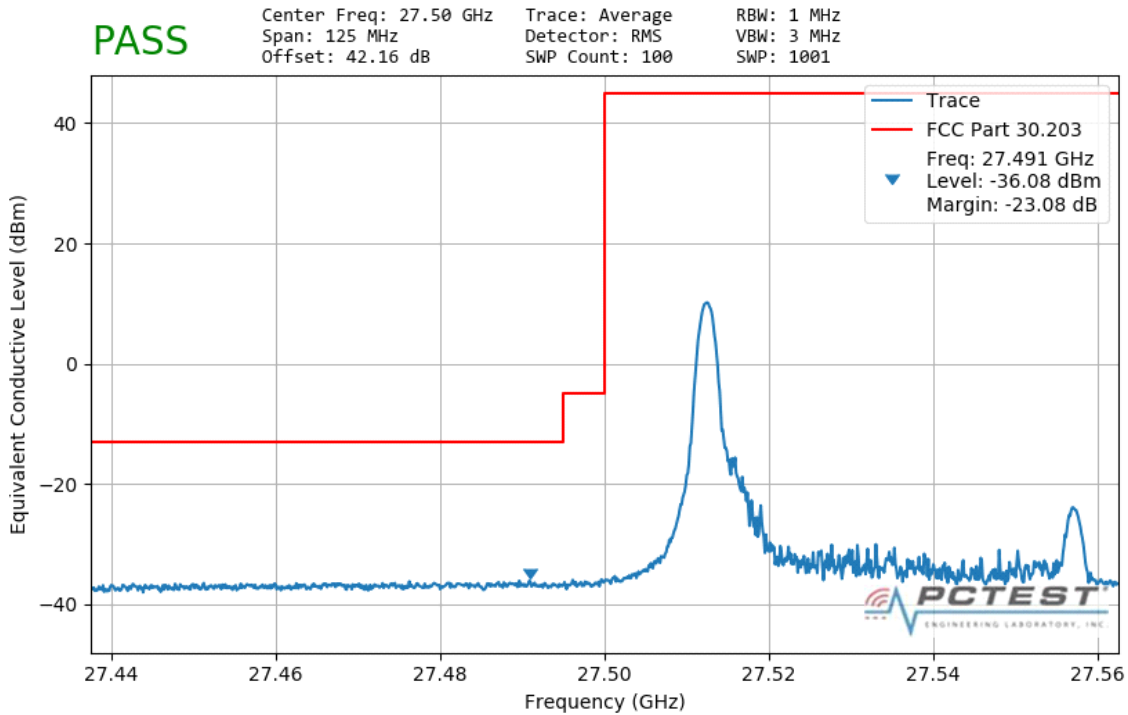


Plot 7-119. Ant1 Lower Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 153 of 210

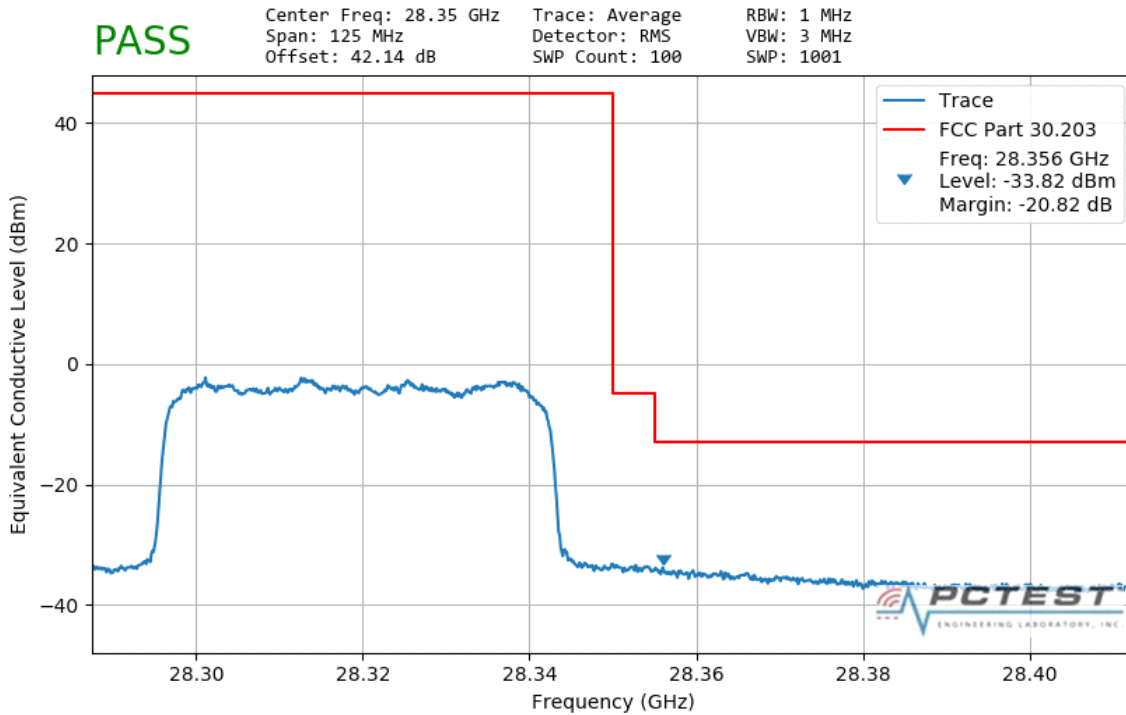


Plot 7-120. Ant1 Upper Band Edge (50MHz-1CC – QPSK Full RB)

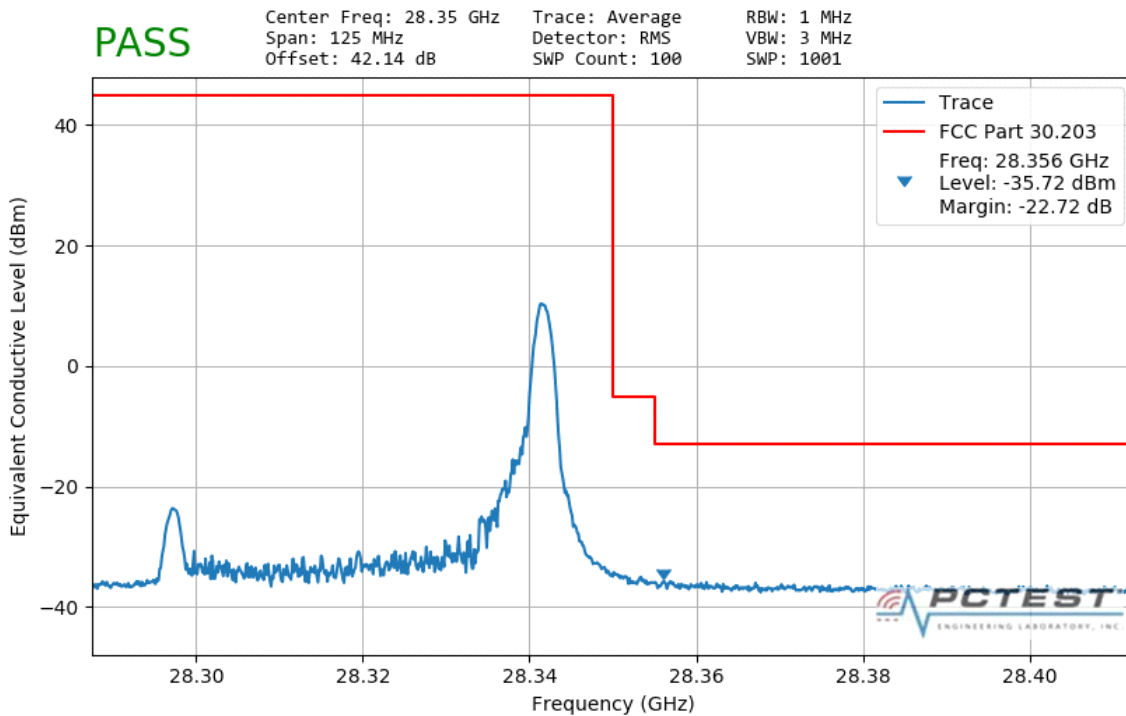


Plot 7-121. Ant1 Upper Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 154 of 210

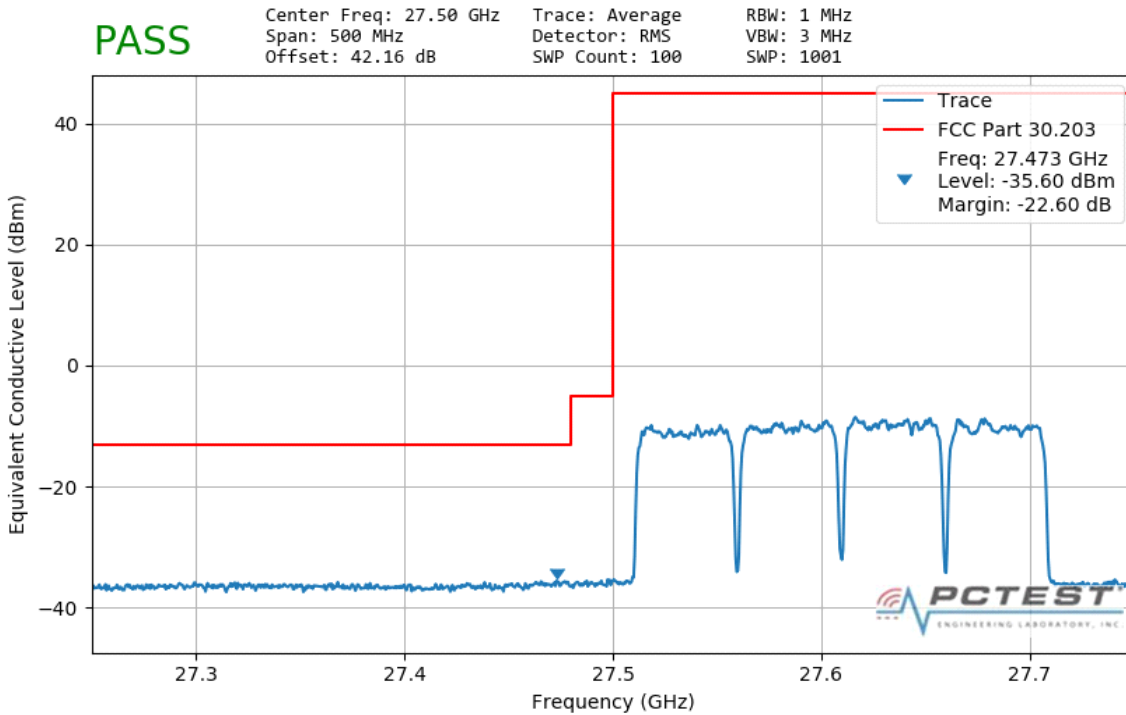


Plot 7-122. Ant1 Lower Band Edge (50MHz-4CC – QPSK Full RB)

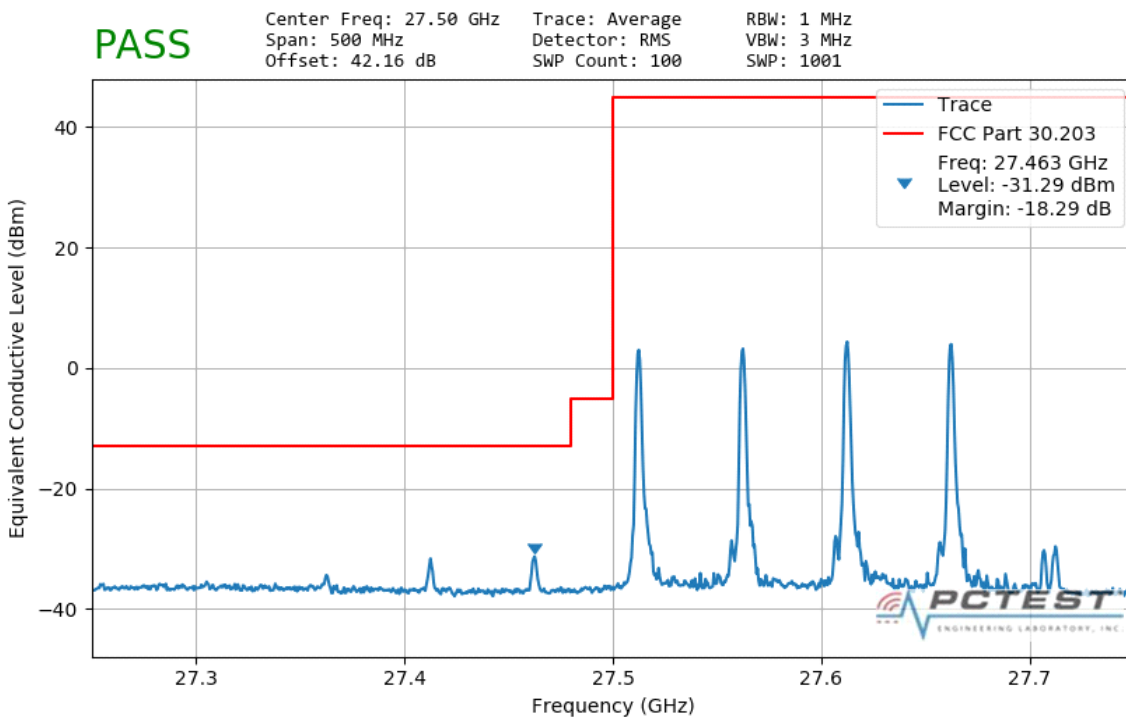


Plot 7-123. Ant1 Lower Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 155 of 210

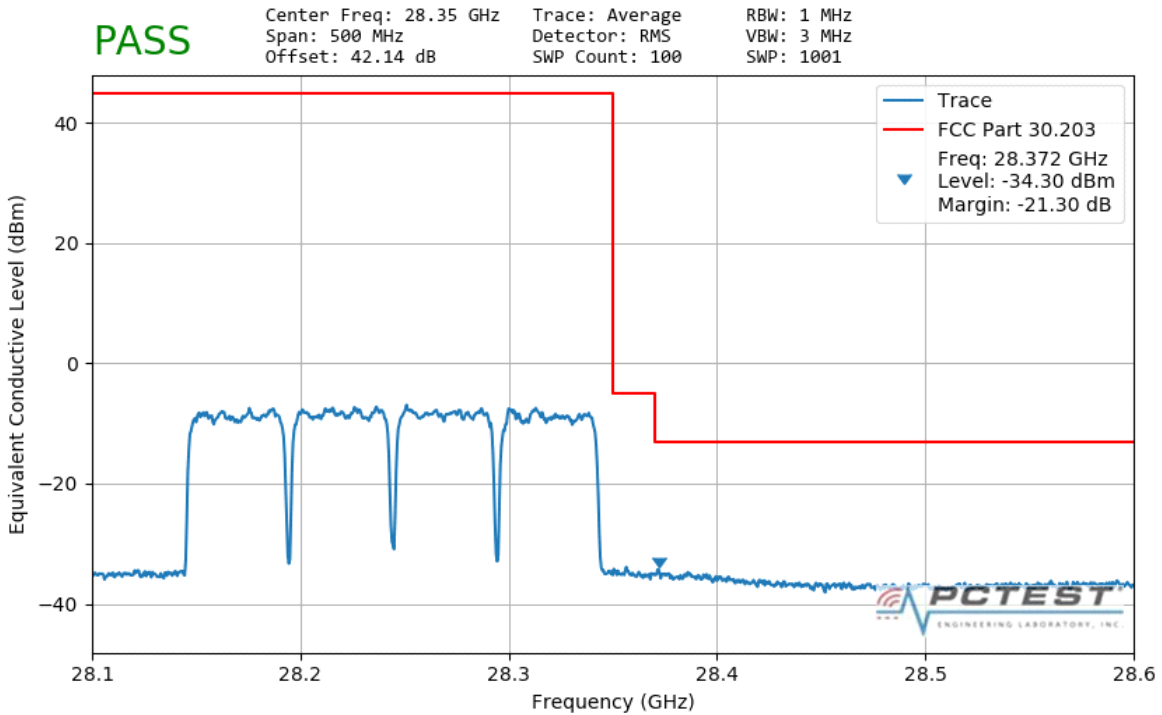


Plot 7-124. Ant1 Upper Band Edge (50MHz-4CC – QPSK Full RB)

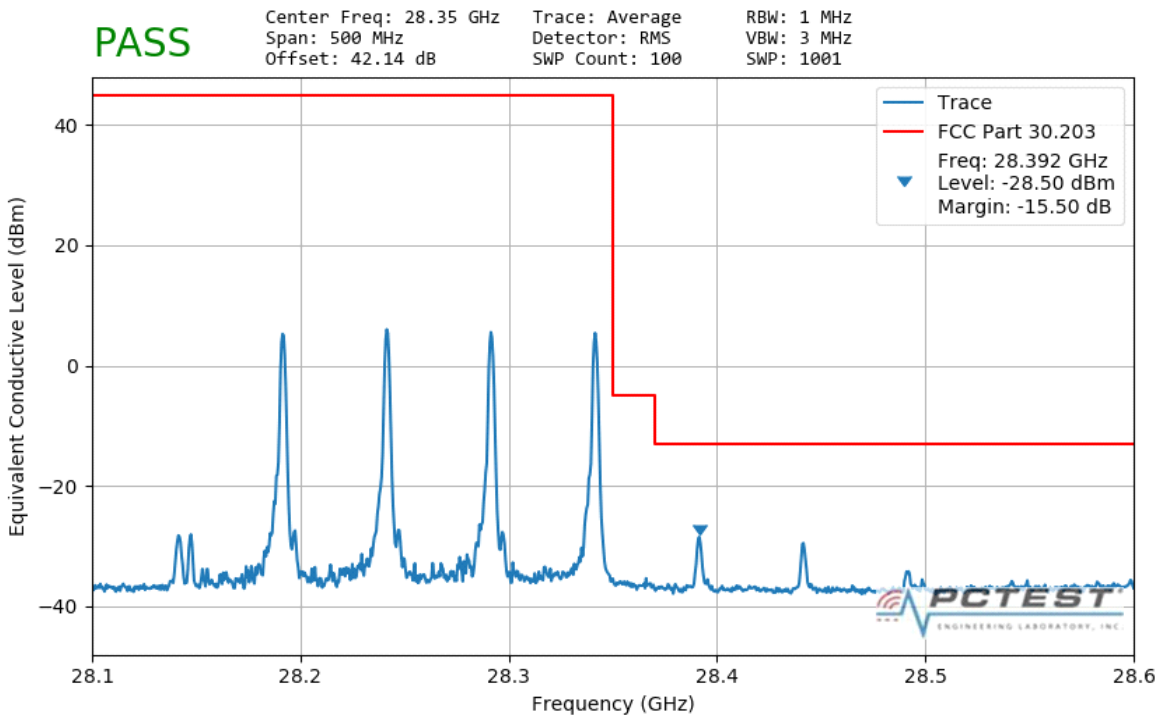


Plot 7-125. Ant1 Upper Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 156 of 210

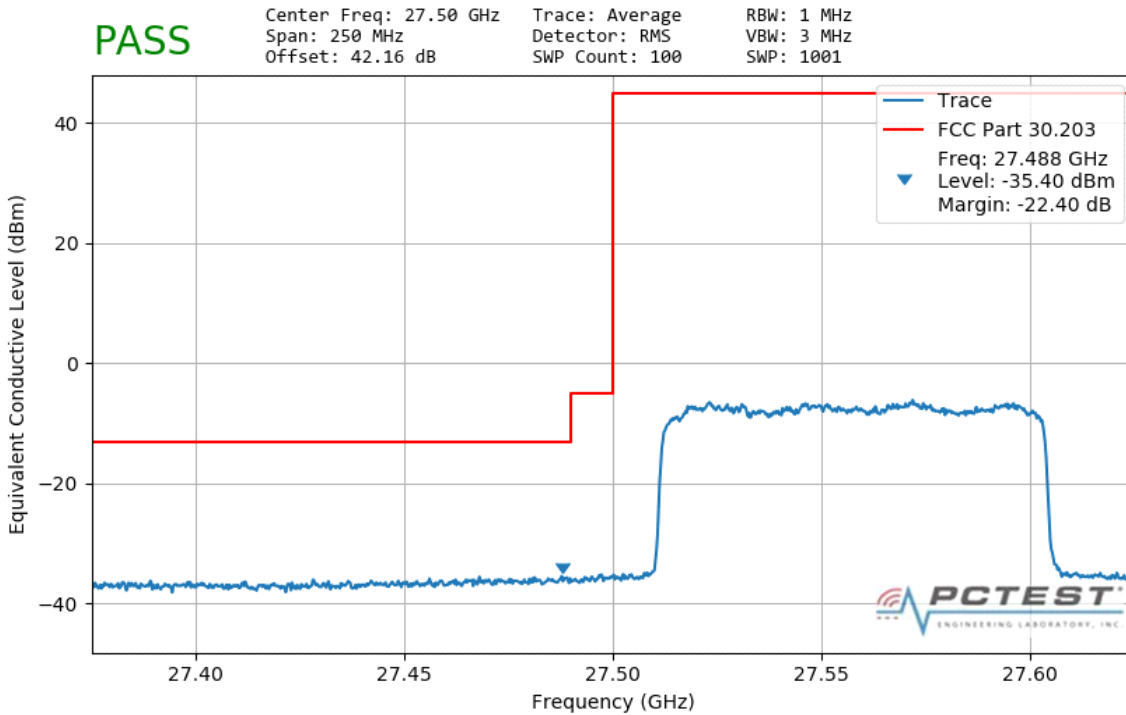


Plot 7-126. Ant1 Lower Band Edge (100MHz-1CC – QPSK Full RB)

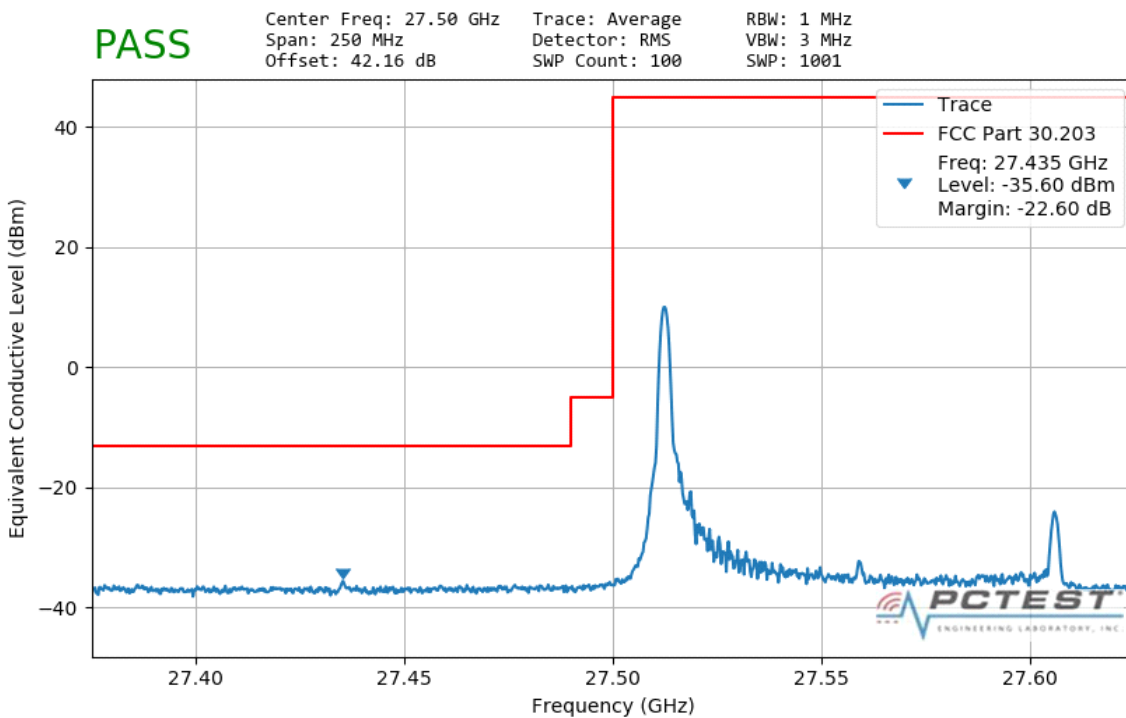


Plot 7-127. Ant1 Lower Band Edge (100MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 157 of 210

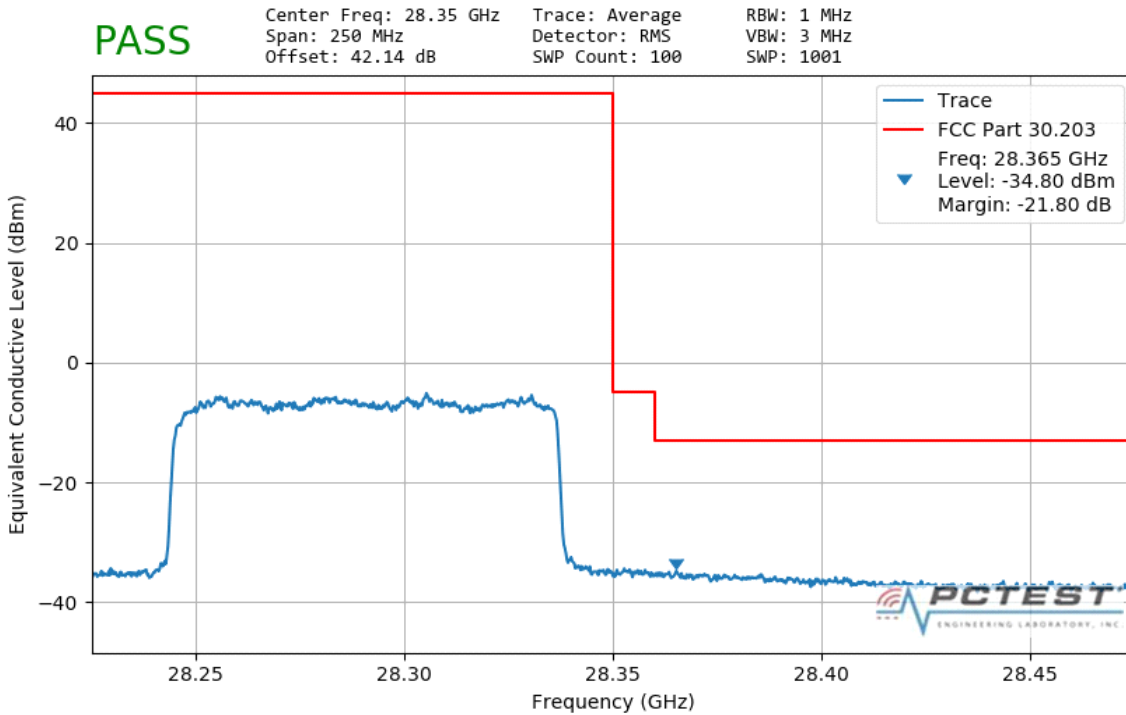


Plot 7-128. Ant1 Upper Band Edge (100MHz-1CC – QPSK Full RB)

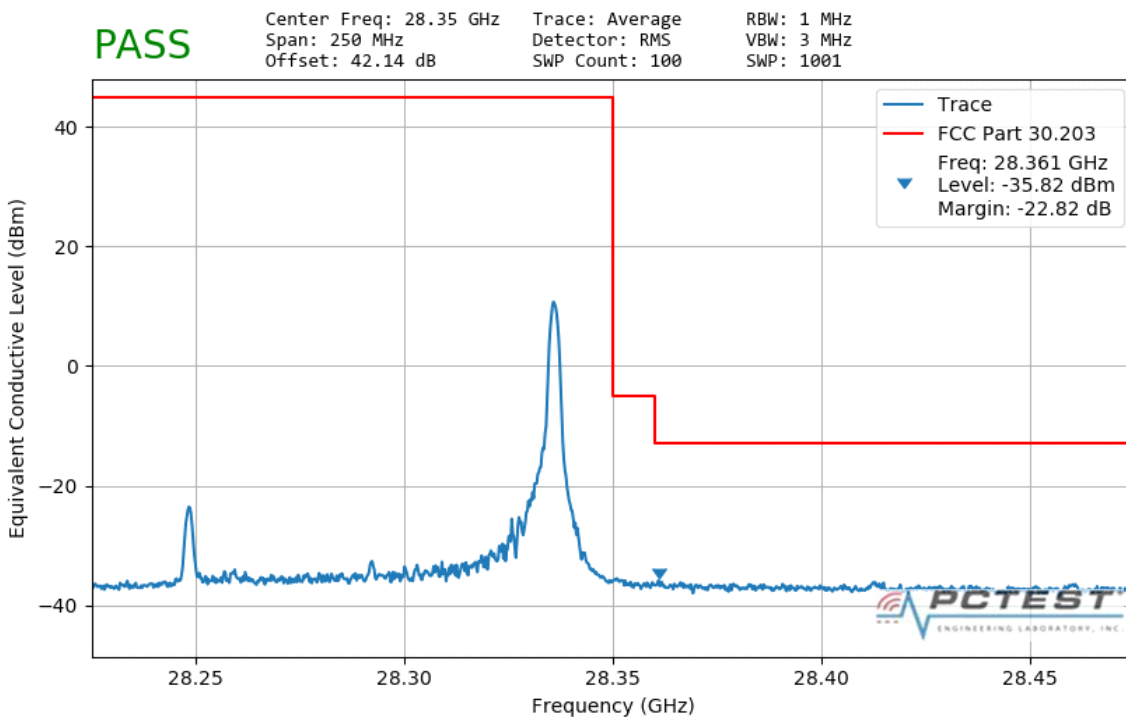


Plot 7-129. Ant1 Upper Band Edge (100MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 158 of 210

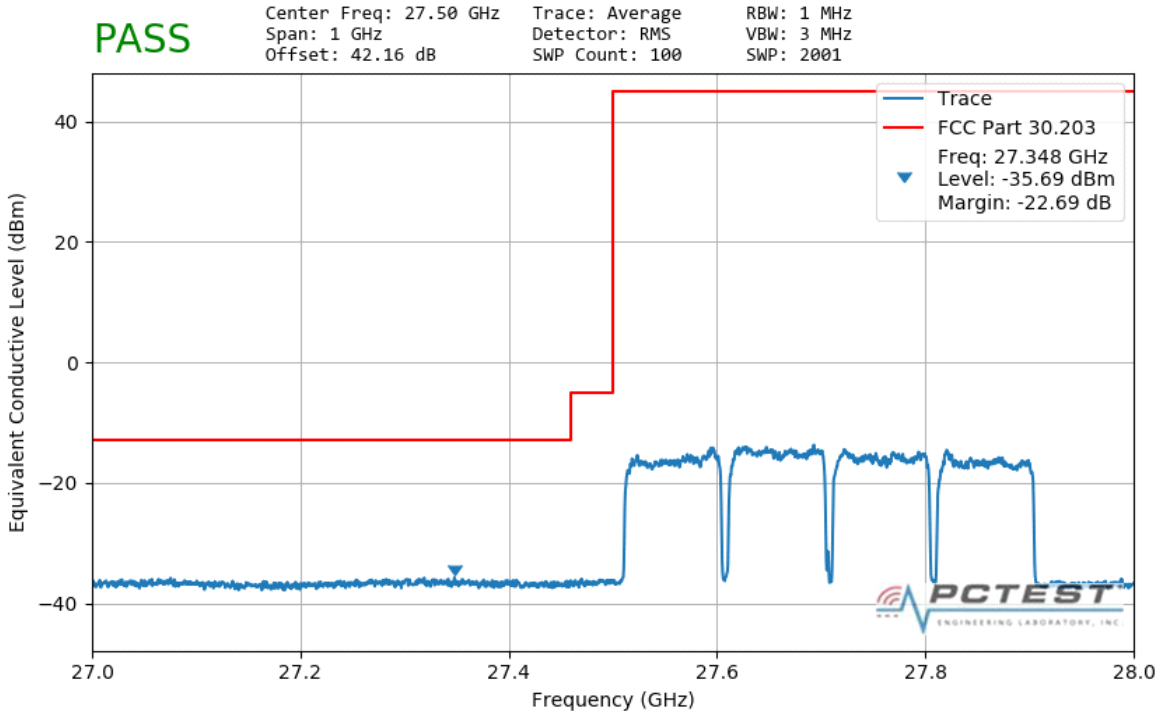


Plot 7-130. Ant1 Lower Band Edge (100MHz-4CC – QPSK Full RB)

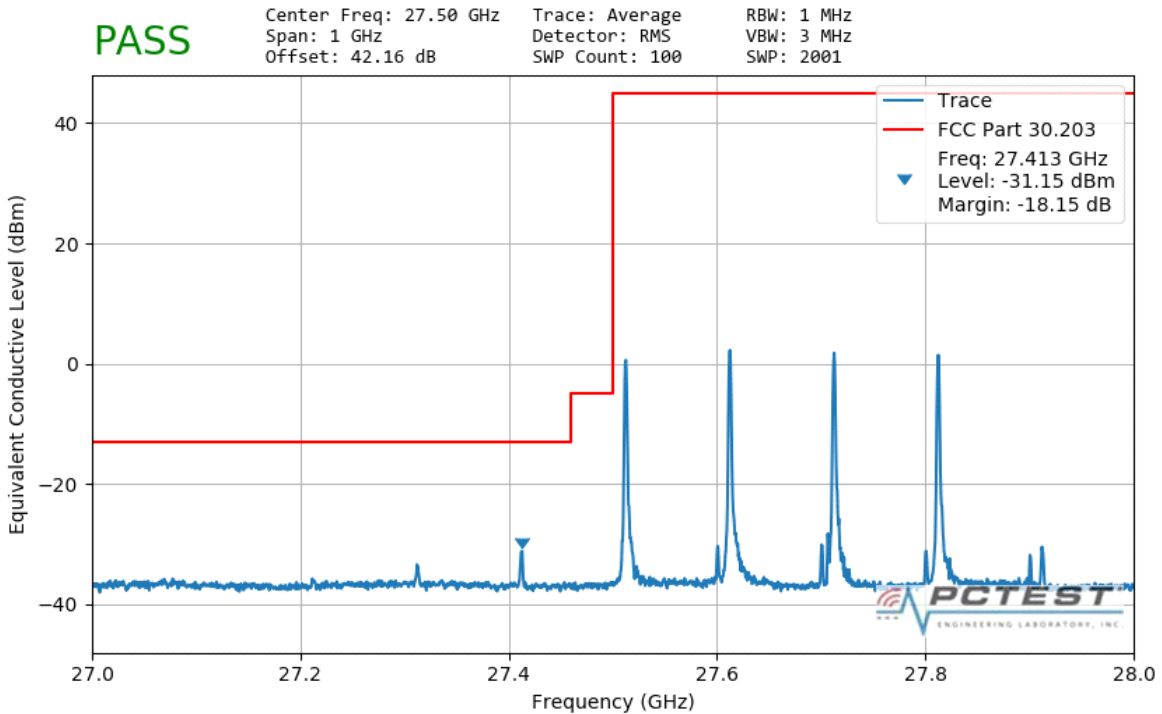


Plot 7-131. Ant1 Lower Band Edge (100MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 159 of 210

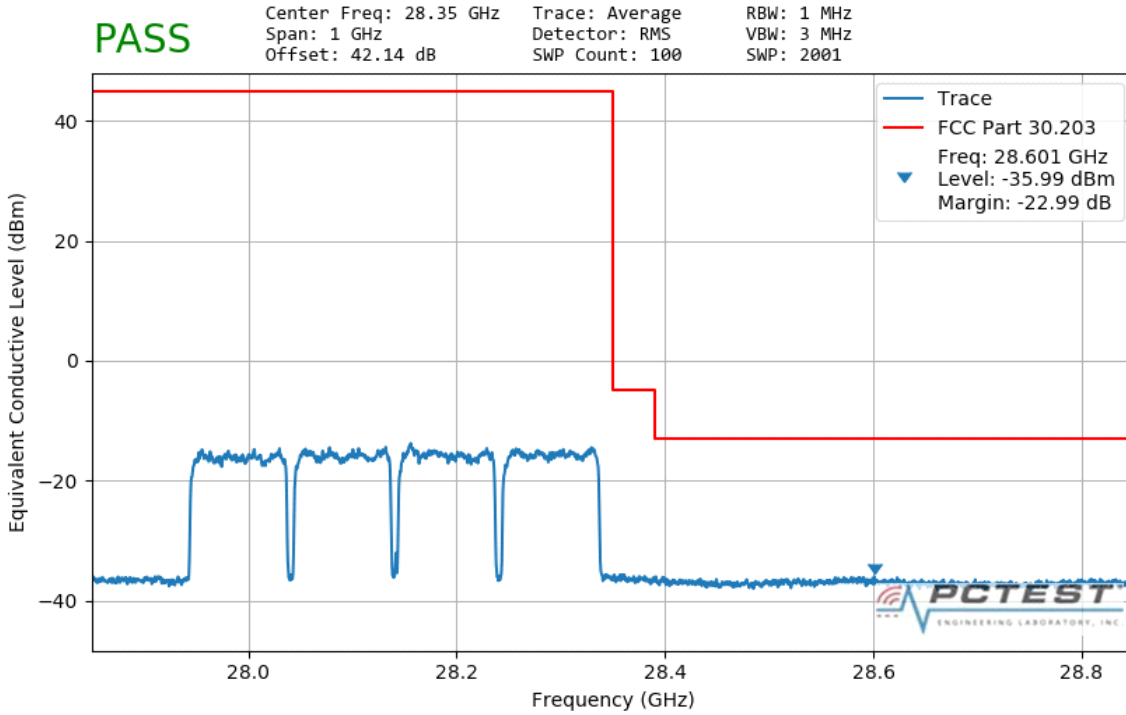


Plot 7-132. Ant1 Upper Band Edge (100MHz-4CC – QPSK Full RB)

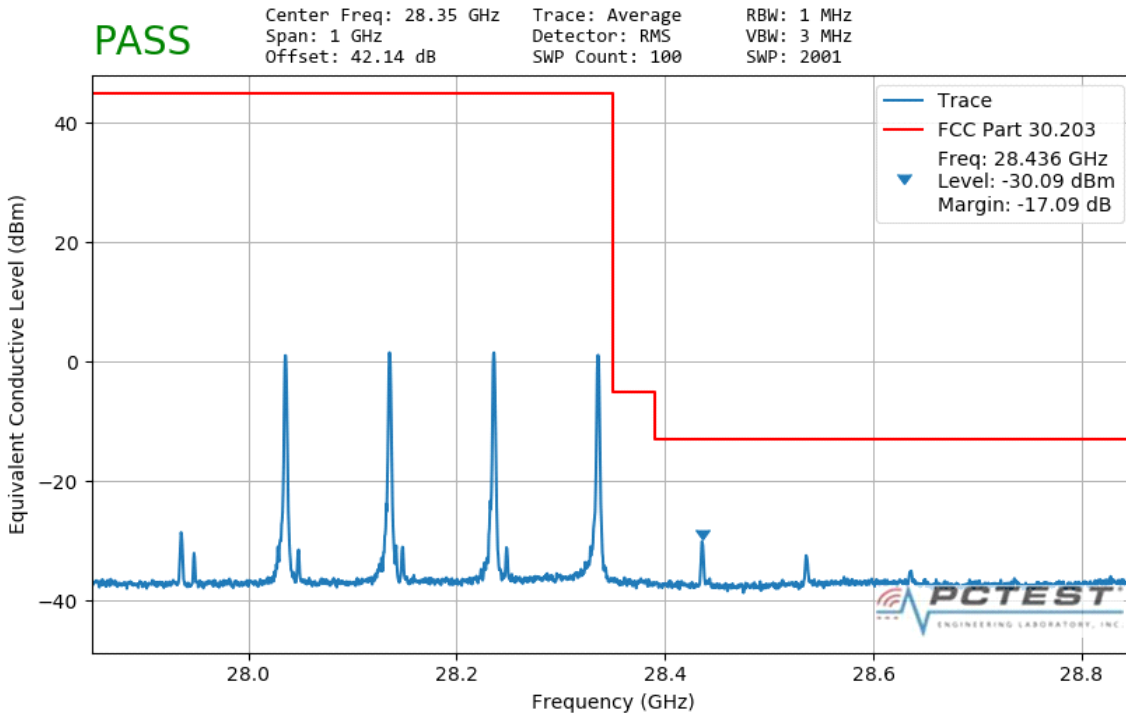


Plot 7-133. Ant1 Upper Band Edge (100MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 160 of 210

Band n261 – QTM#1 / Ant2 - MIMO

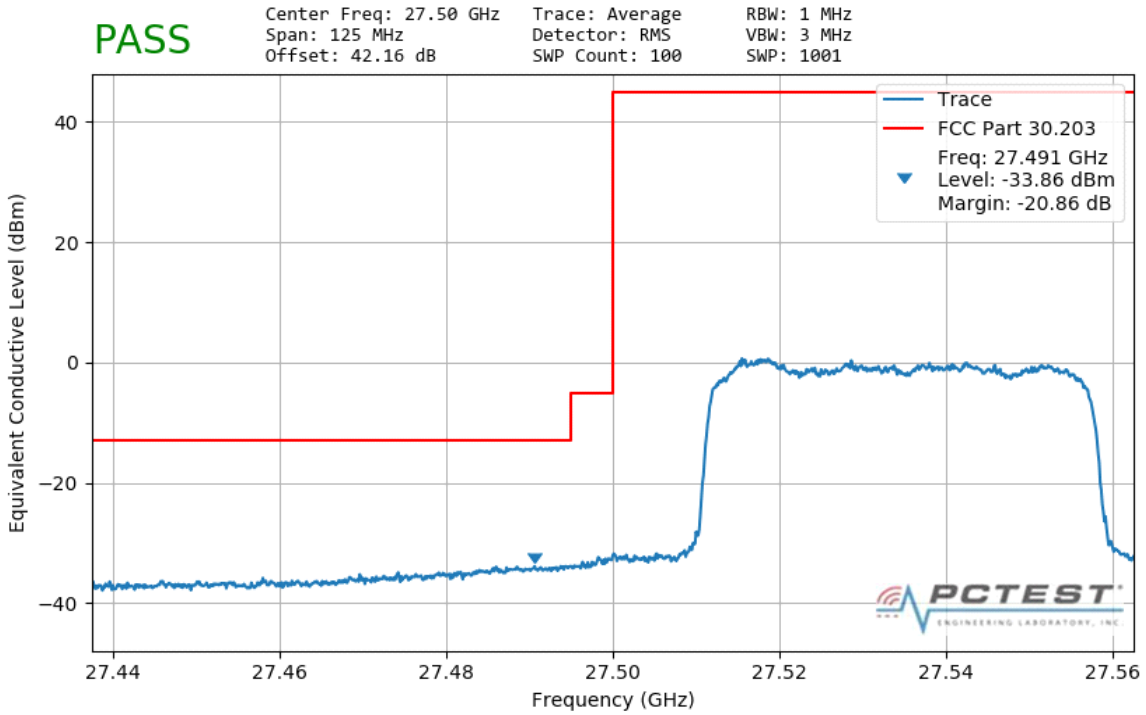


Plot 7-134. Ant2 Lower Band Edge (50MHz-1CC – QPSK Full RB)

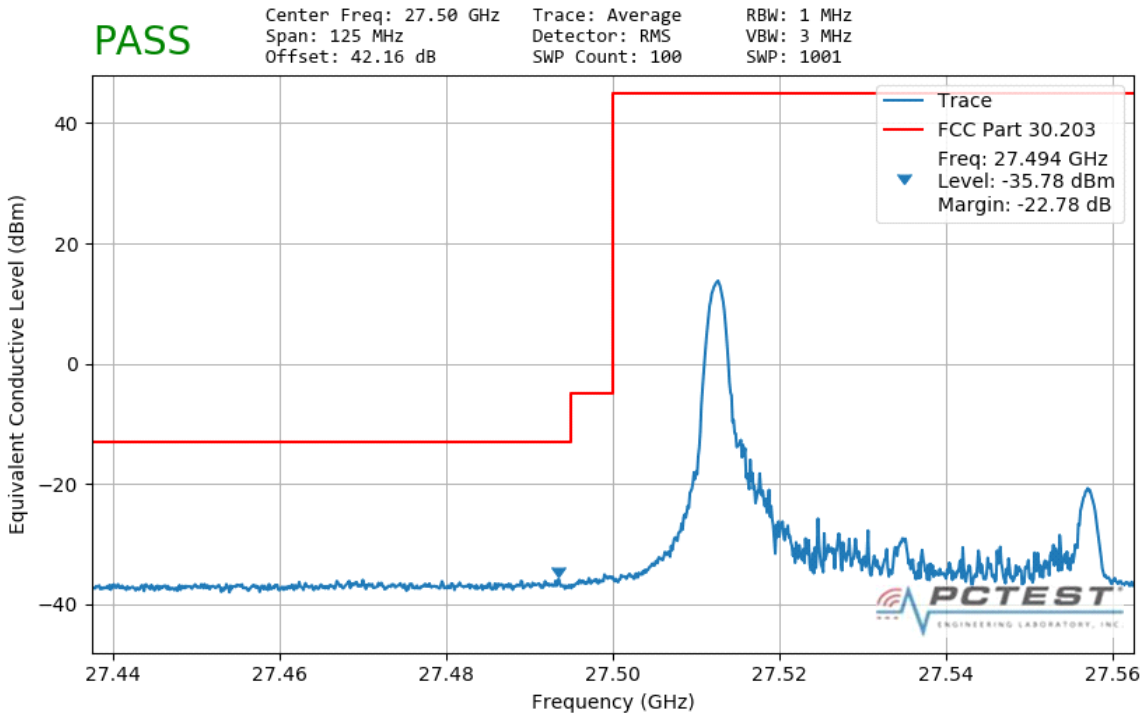


Plot 7-135. Ant2 Lower Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 161 of 210

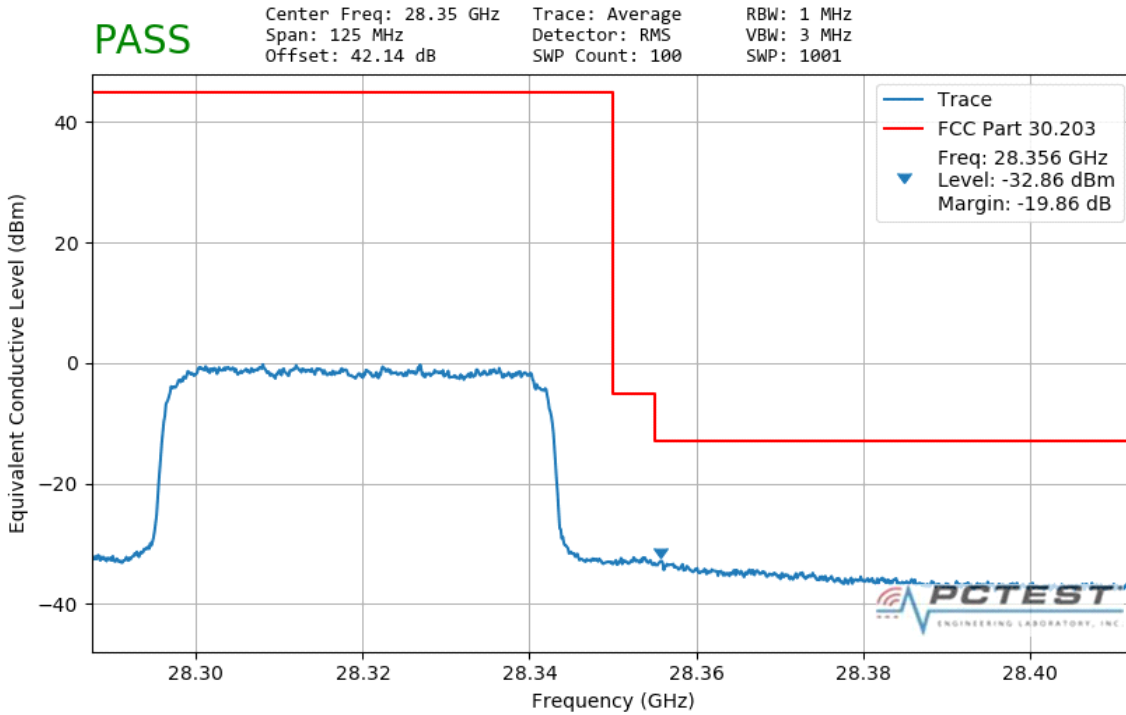


Plot 7-136. Ant2 Upper Band Edge (50MHz-1CC – QPSK Full RB)

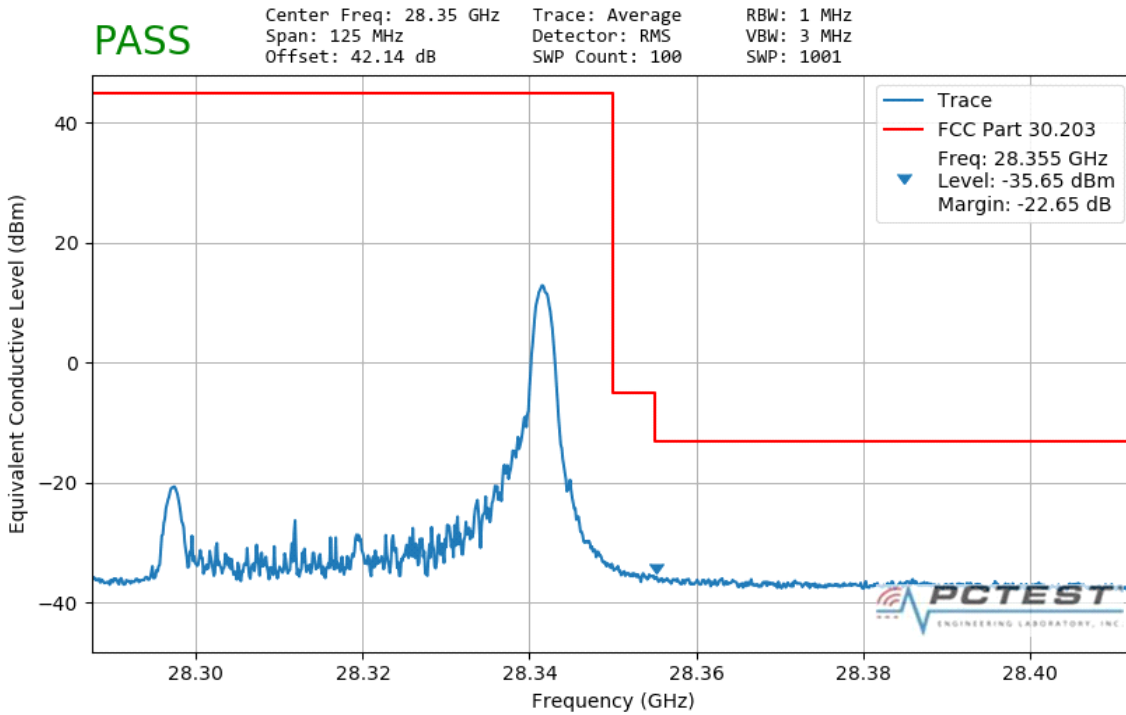


Plot 7-137. Ant2 Upper Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 162 of 210

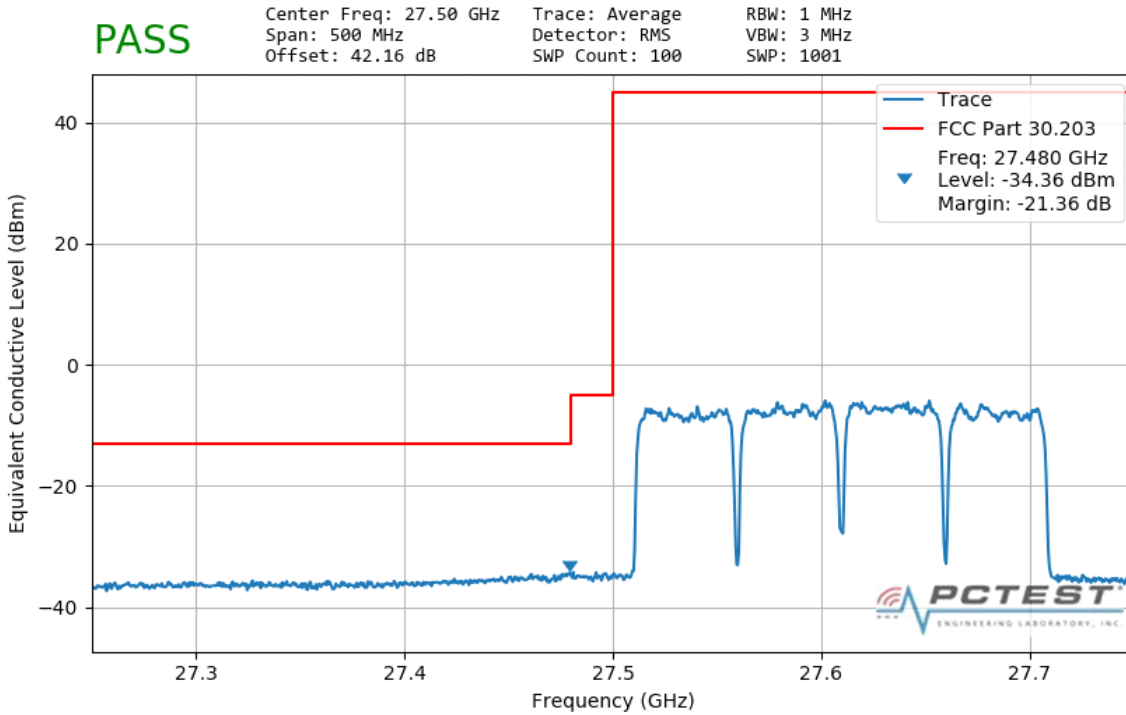


Plot 7-138. Ant2 Lower Band Edge (50MHz-4CC – QPSK Full RB)

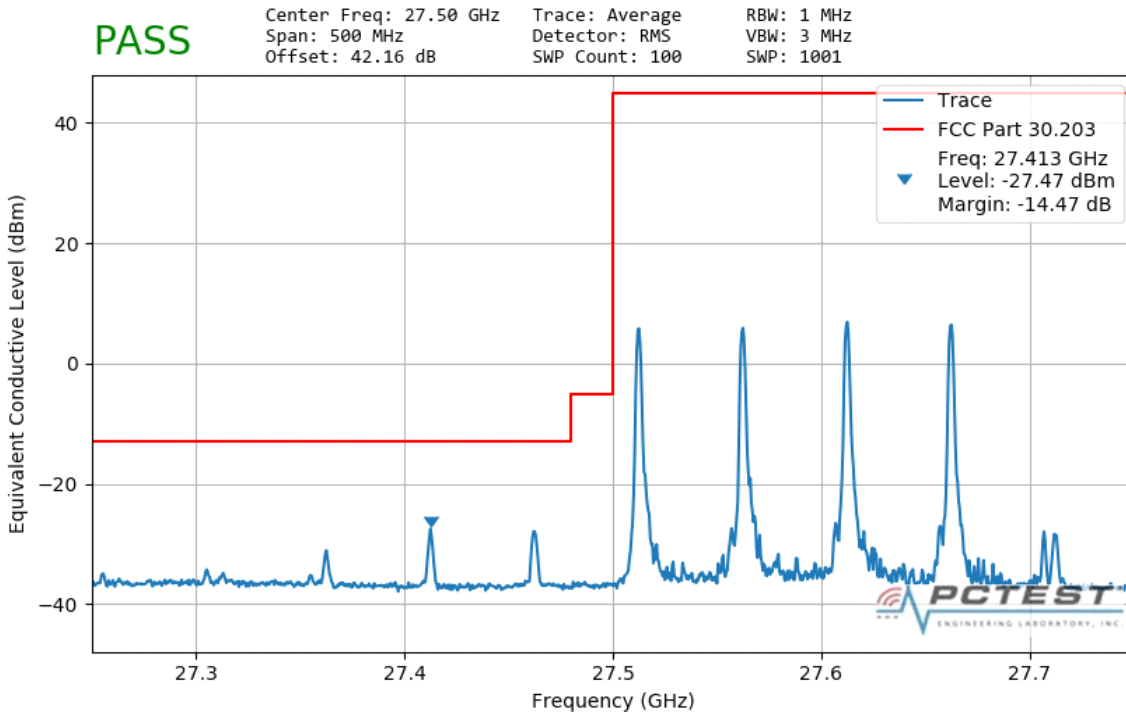


Plot 7-139. Ant2 Lower Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 163 of 210

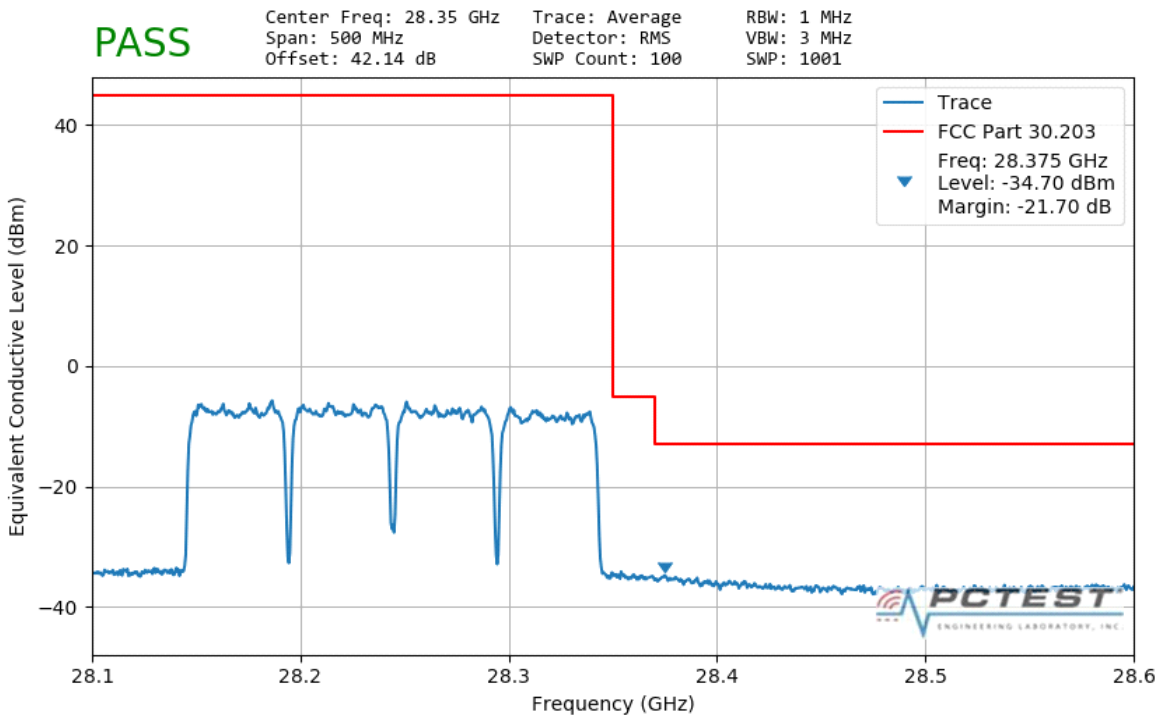


Plot 7-140. Ant2 Upper Band Edge (50MHz-4CC – QPSK Full RB)

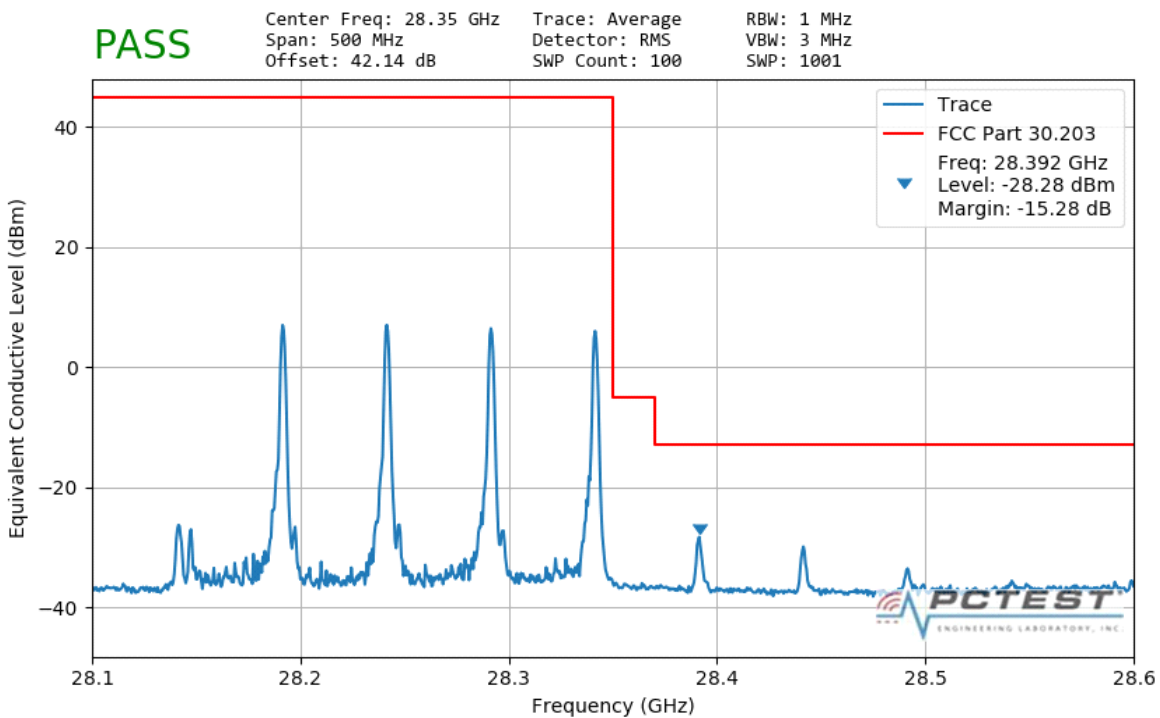


Plot 7-141. Ant2 Upper Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 164 of 210

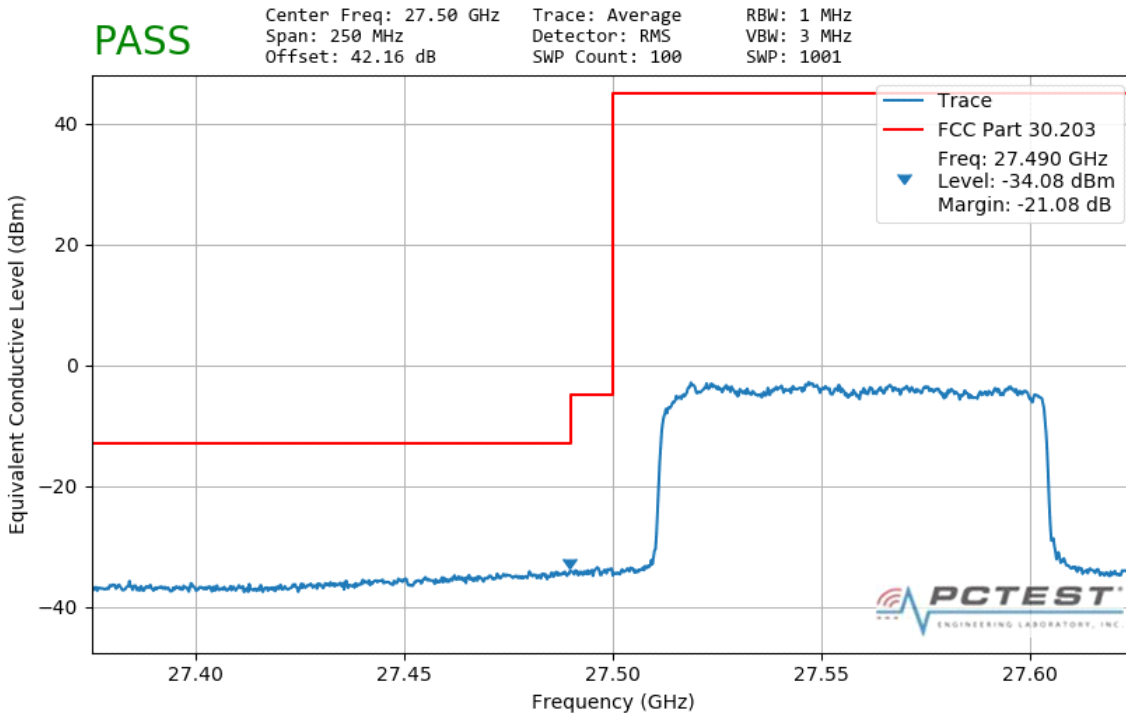


Plot 7-142. Ant2 Lower Band Edge (100MHz-1CC – QPSK Full RB)

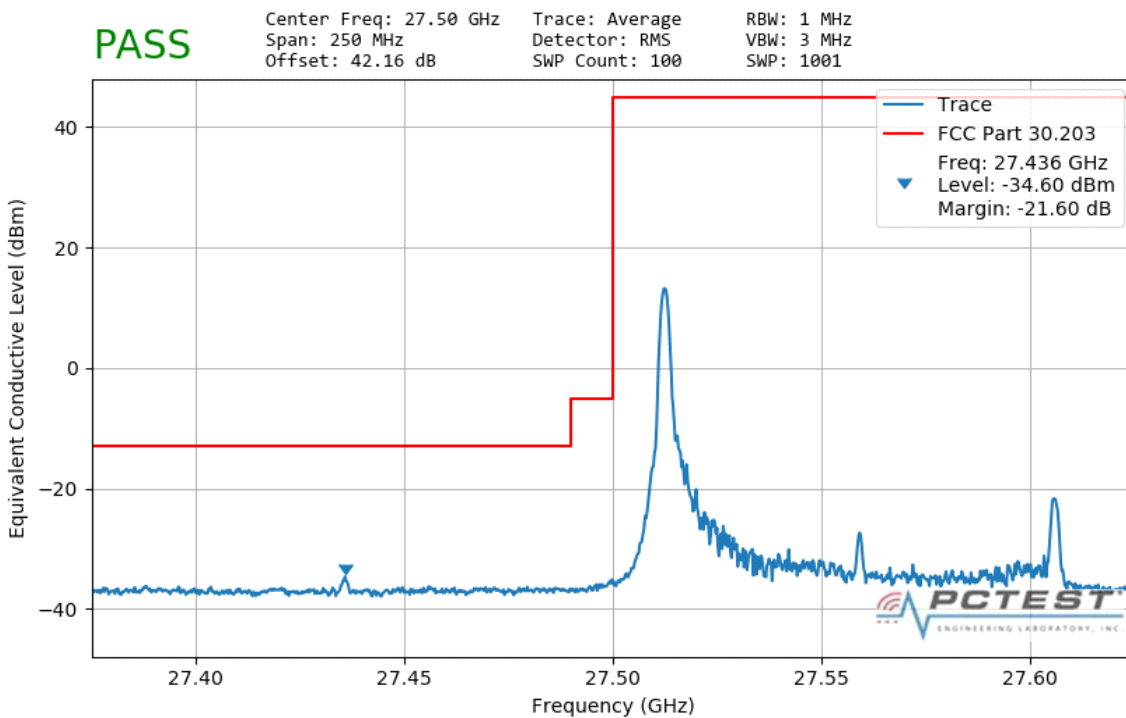


Plot 7-143. Ant2 Lower Band Edge (100MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 165 of 210

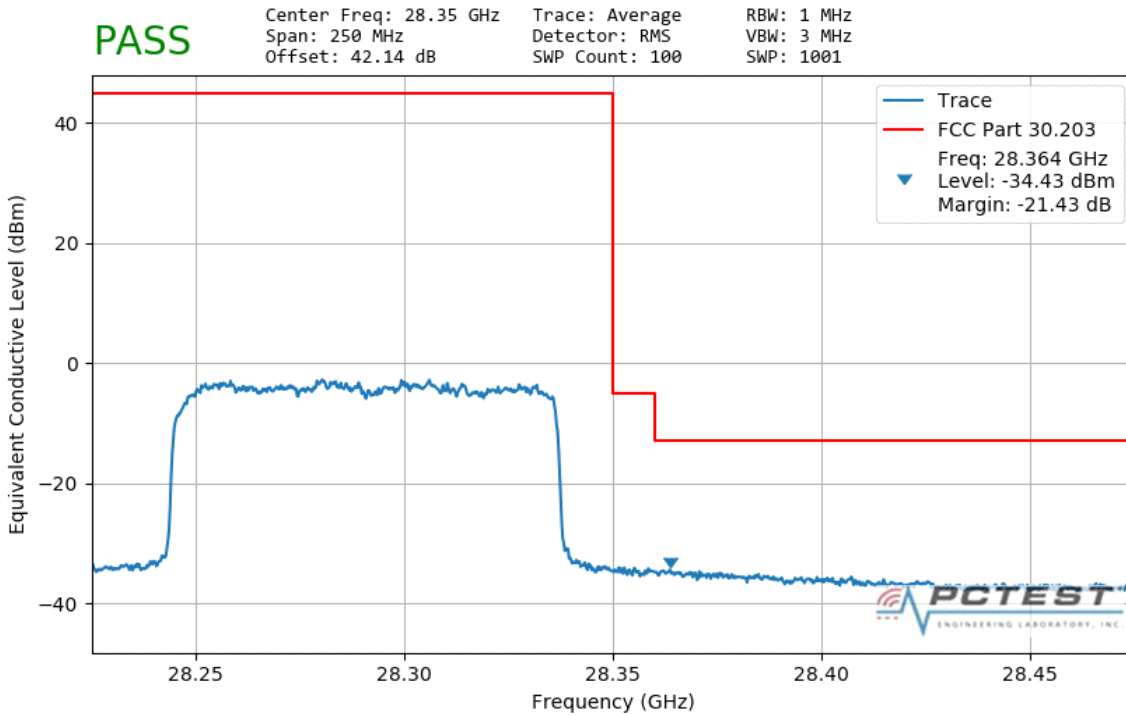


Plot 7-144. Ant2 Upper Band Edge (100MHz-1CC – QPSK Full RB)

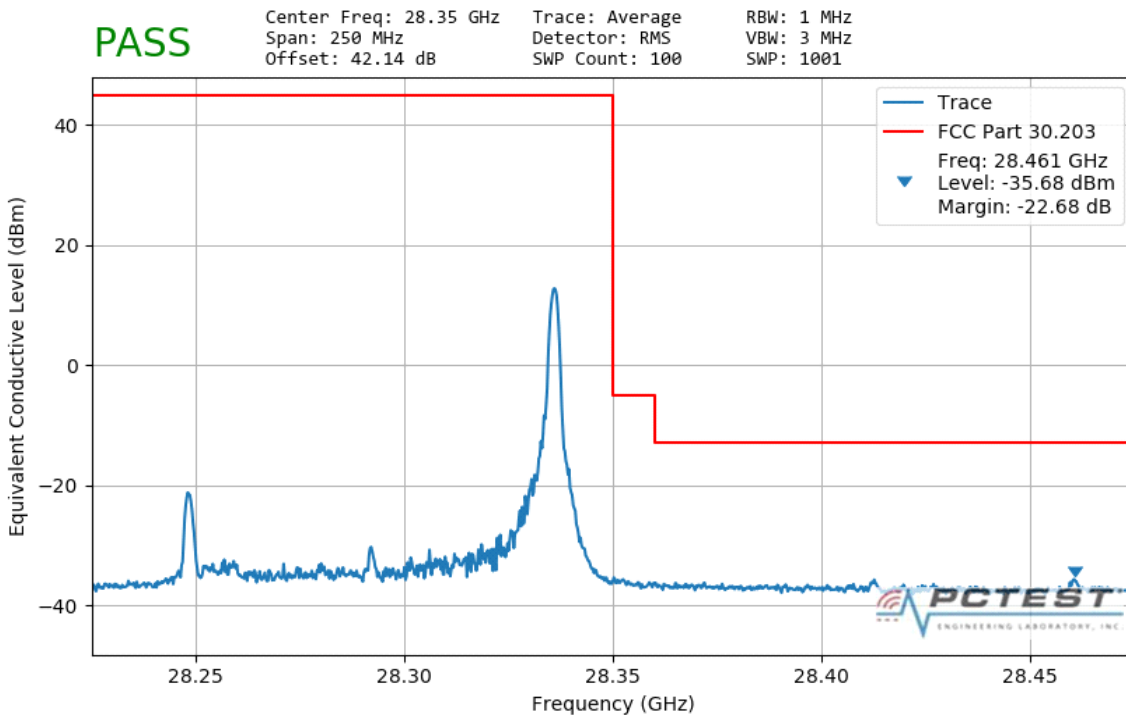


Plot 7-145. Ant2 Upper Band Edge (100MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 166 of 210

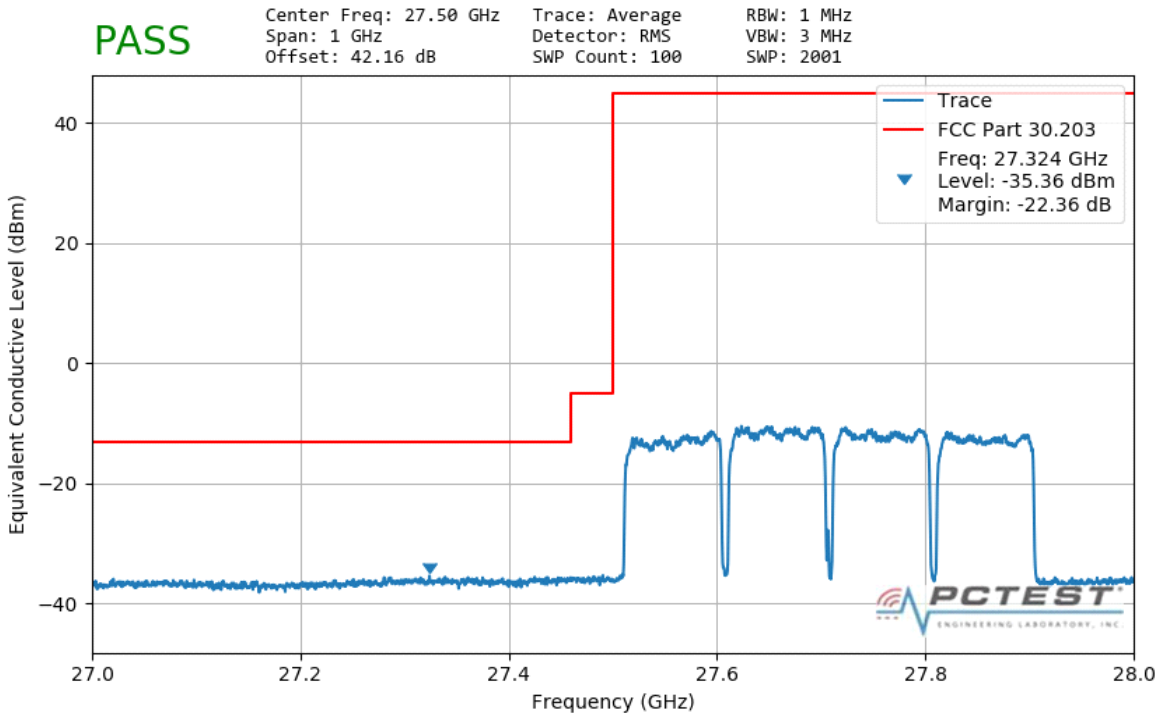


Plot 7-146. Ant2 Lower Band Edge (100MHz-4CC – QPSK Full RB)

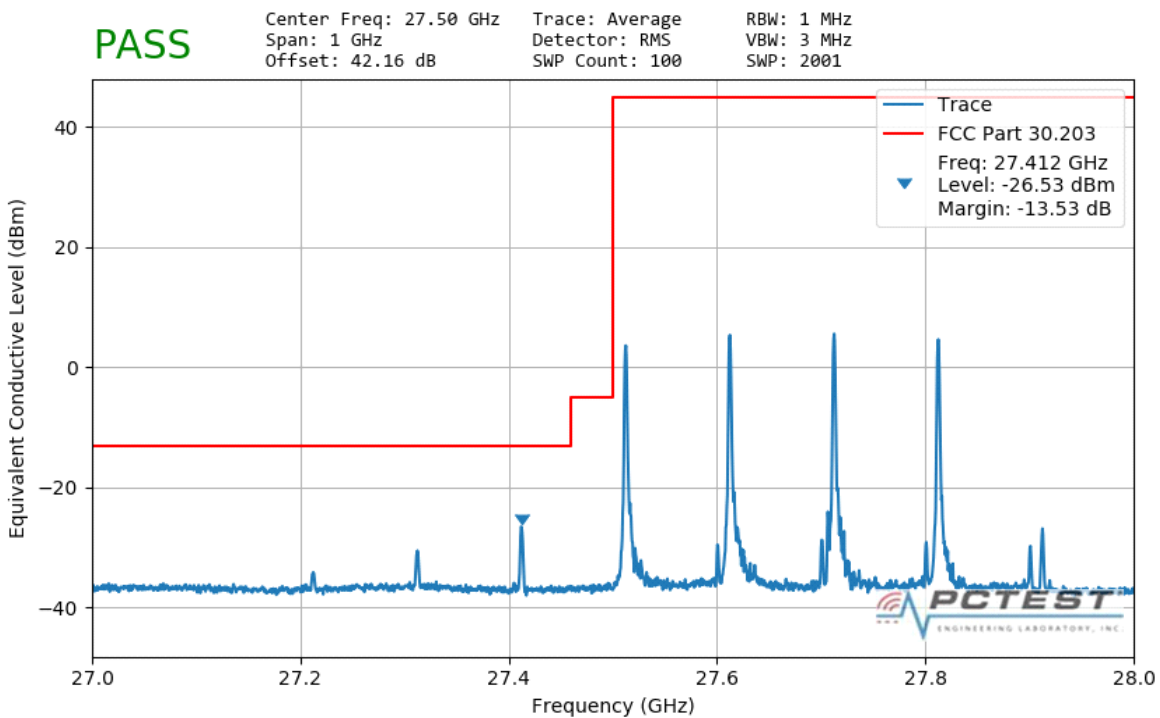


Plot 7-147. Ant2 Lower Band Edge (100MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 167 of 210

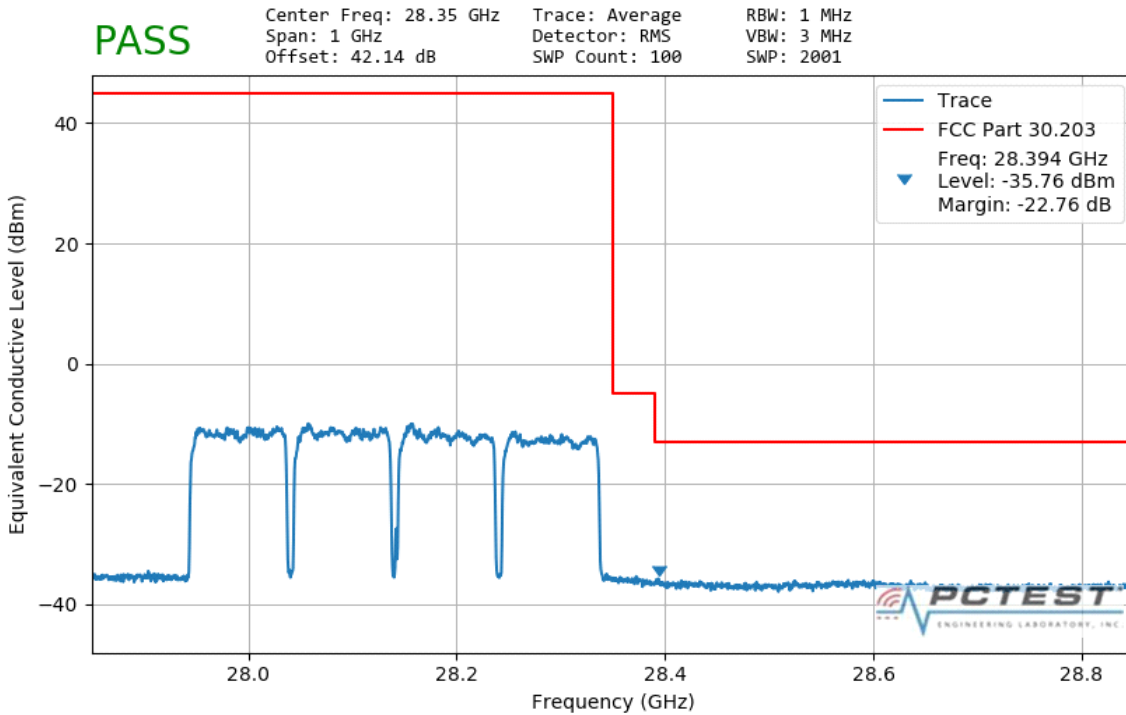


Plot 7-148. Ant2 Upper Band Edge (100MHz-4CC – QPSK Full RB)

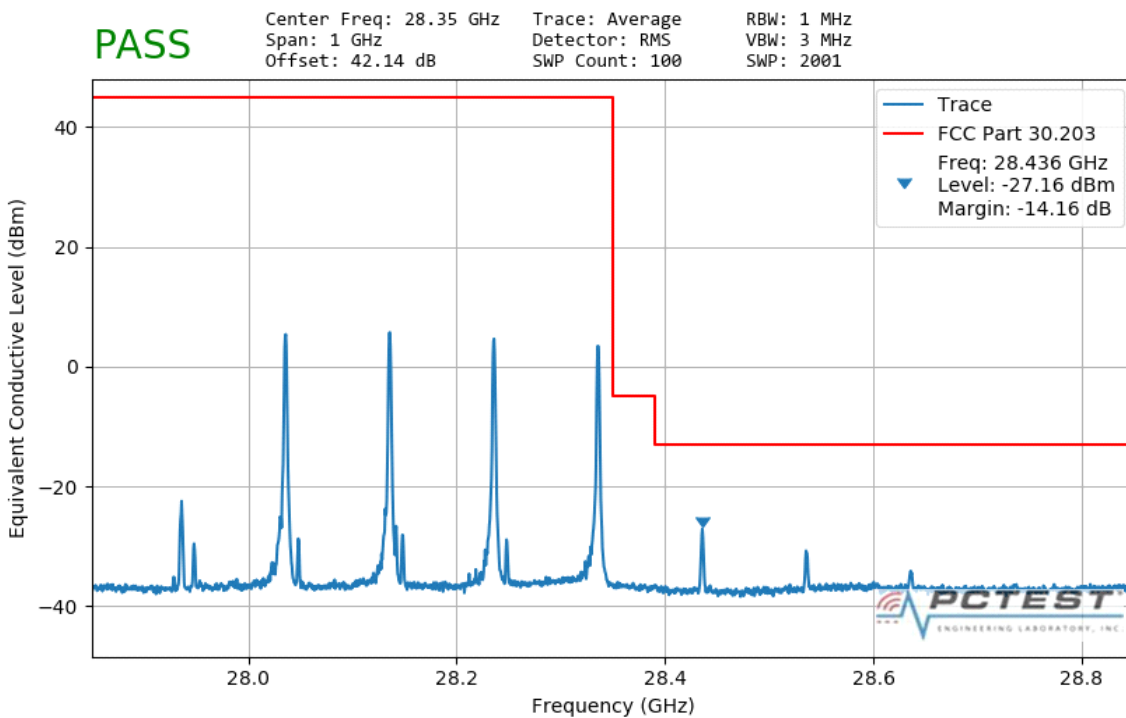


Plot 7-149. Ant2 Upper Band Edge (100MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 168 of 210

Band n261 – QTM#2 / Ant3 - MIMO

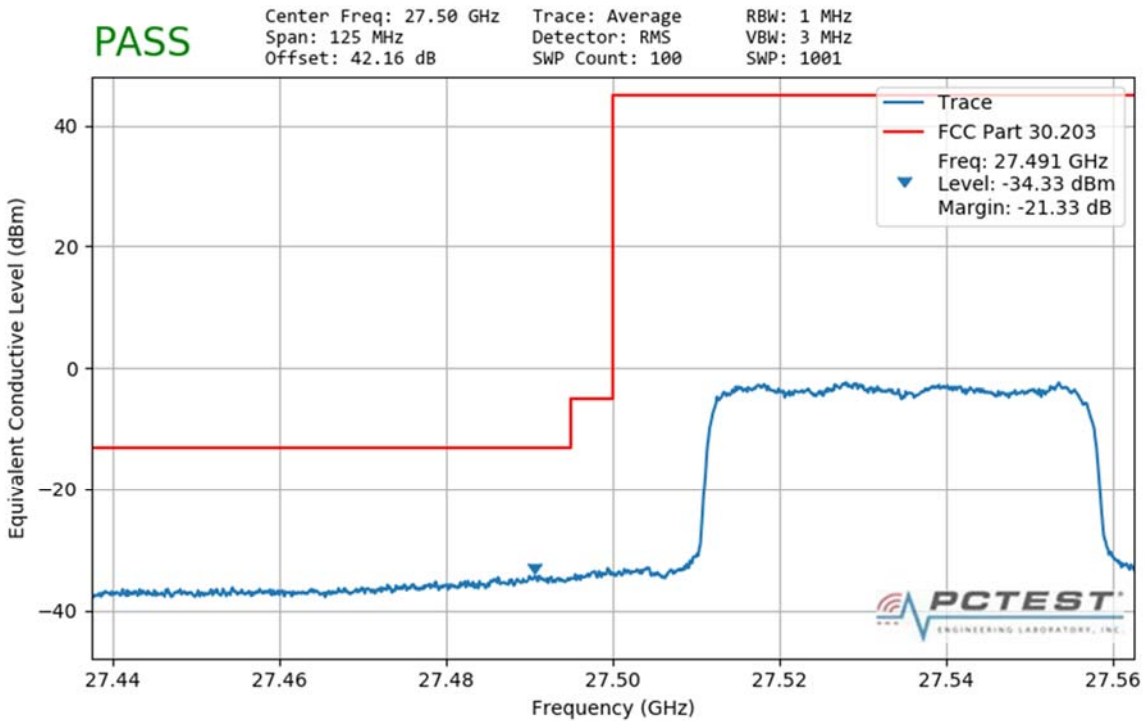


Plot 7-150. Ant3 Lower Band Edge (50MHz-1CC – QPSK Full RB)

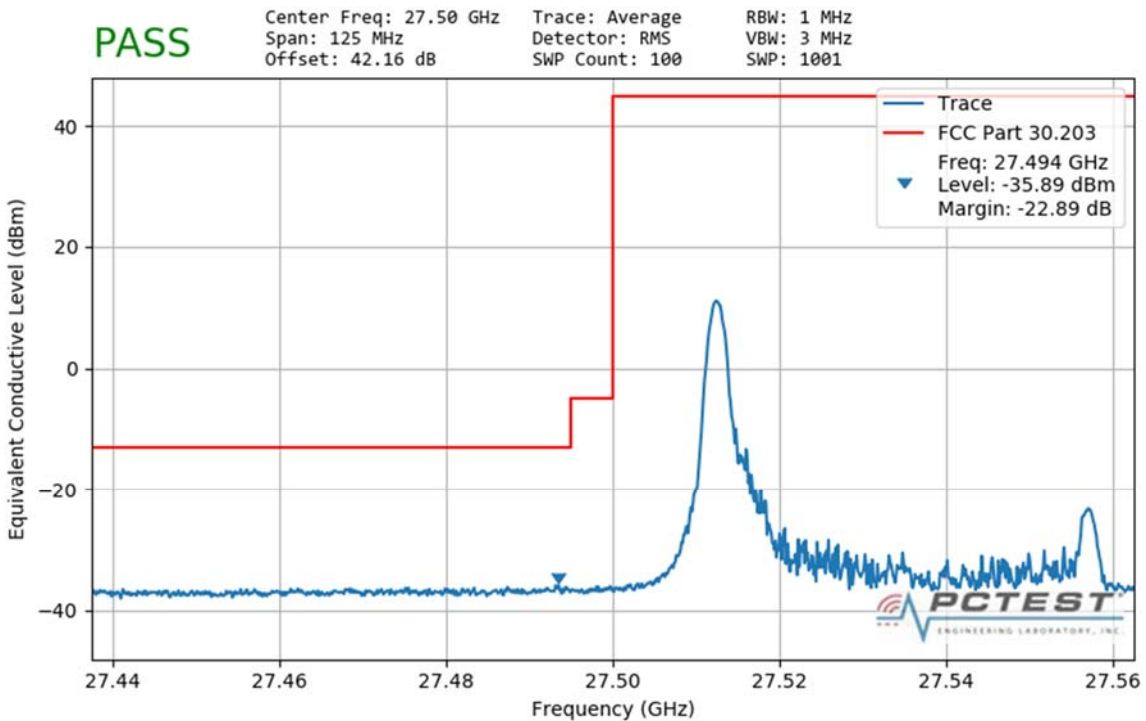


Plot 7-151. Ant3 Lower Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 169 of 210

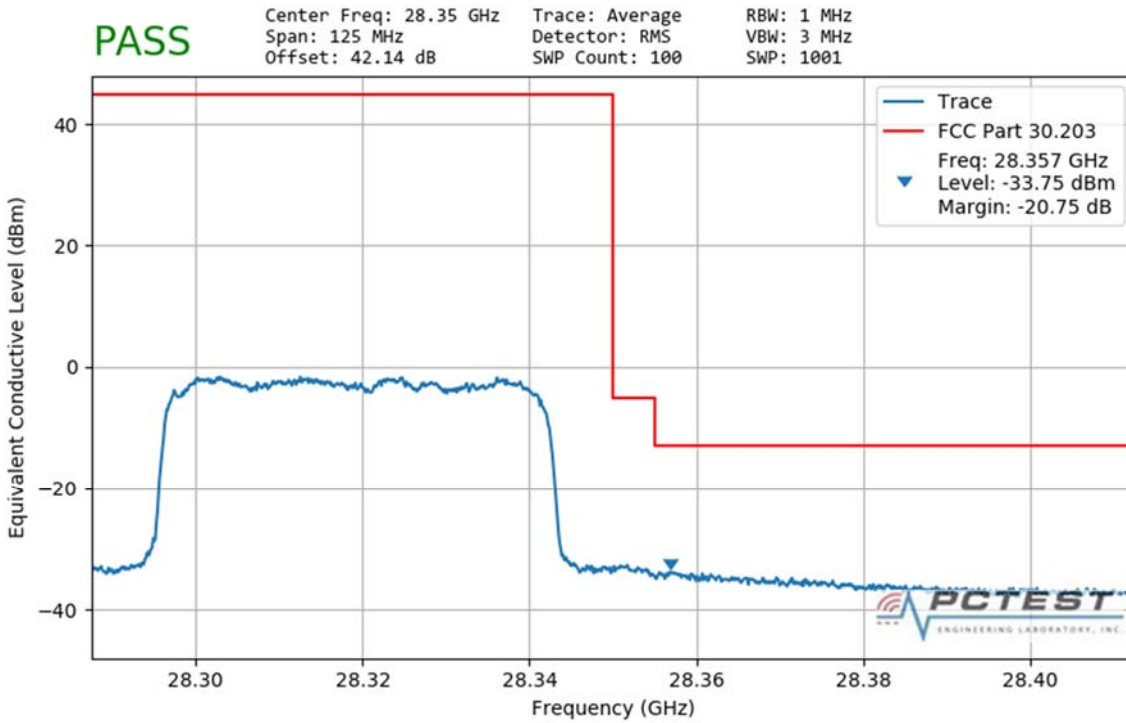


Plot 7-152. Ant3 Upper Band Edge (50MHz-1CC – QPSK Full RB)

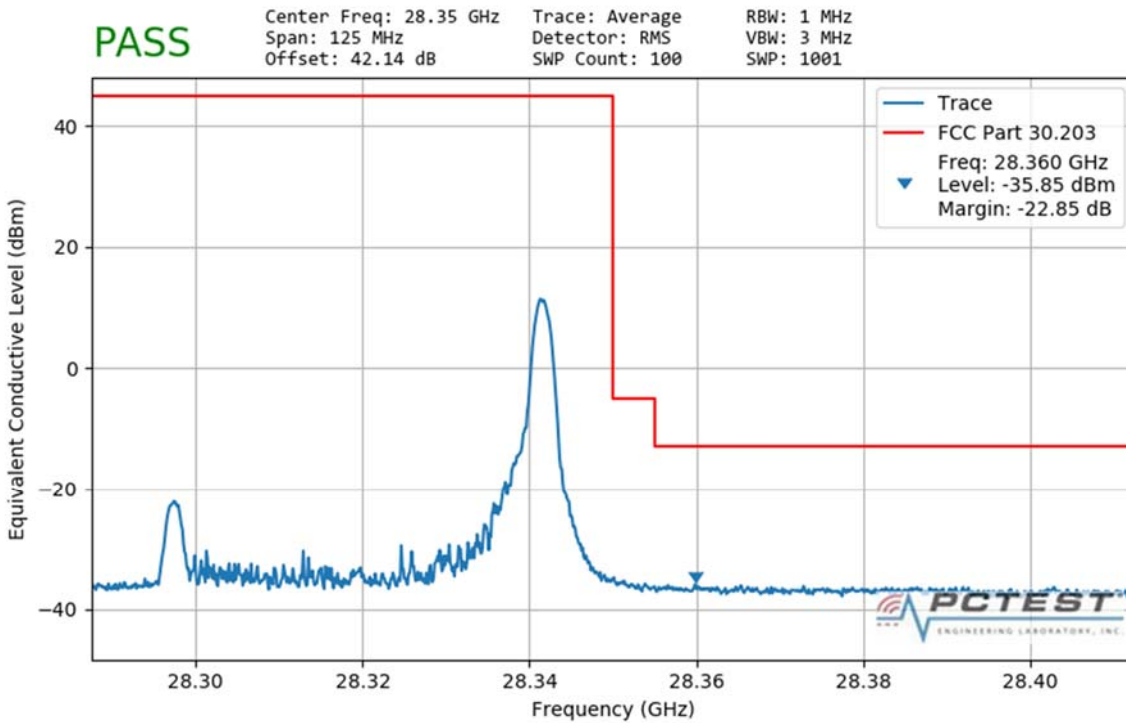


Plot 7-153. Ant3 Upper Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 170 of 210

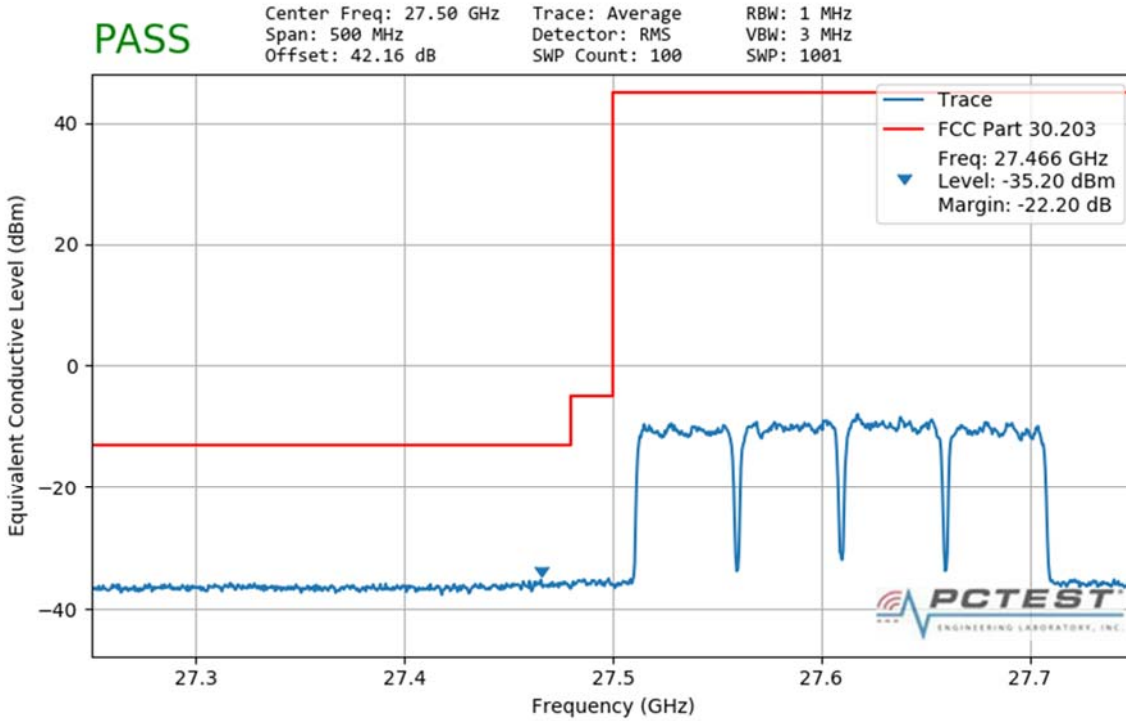


Plot 7-154. Ant3 Lower Band Edge (50MHz-4CC – QPSK Full RB)

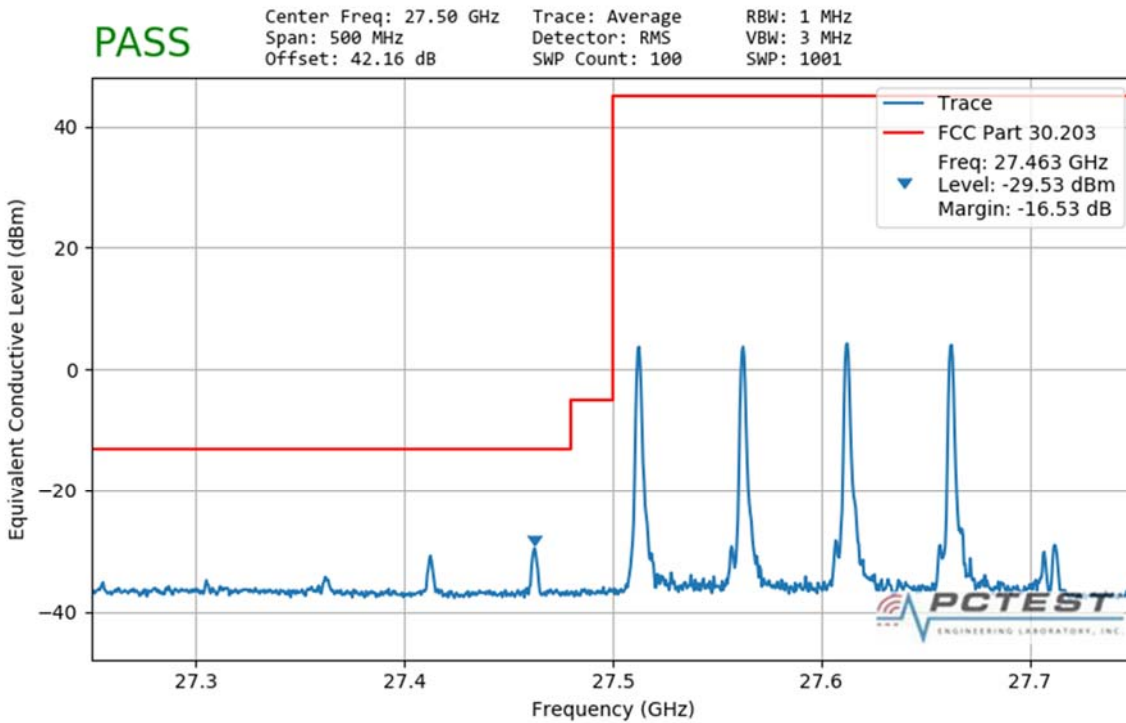


Plot 7-155. Ant3 Lower Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 171 of 210

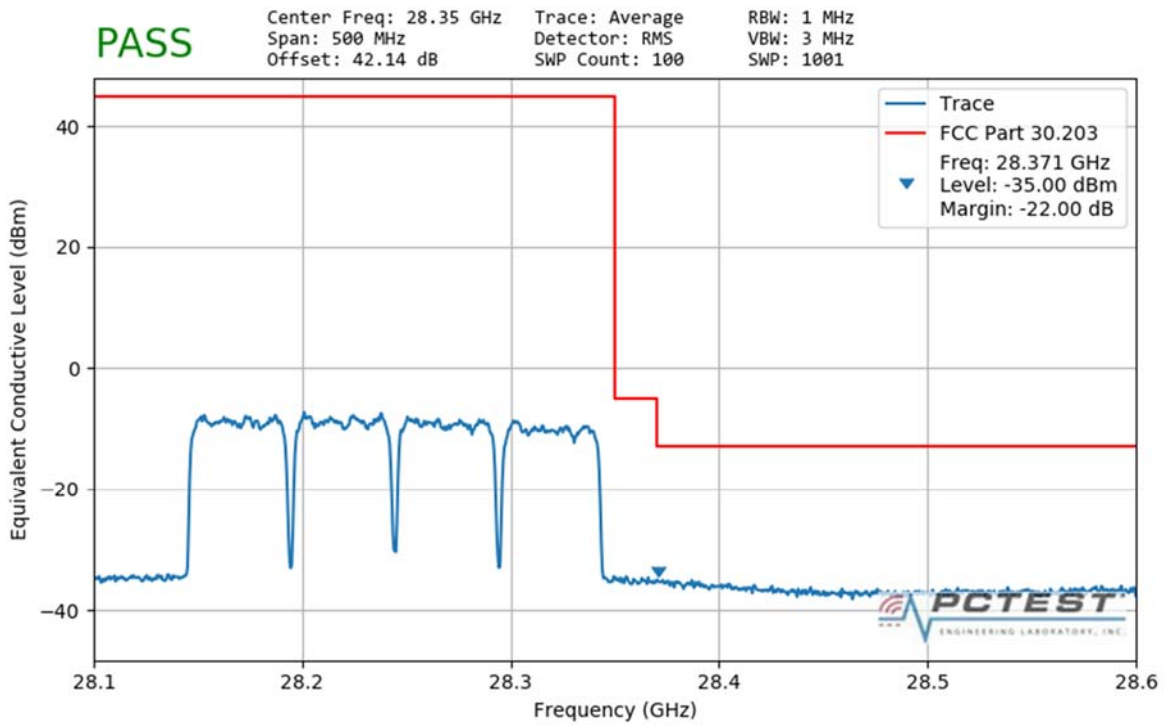


Plot 7-156. Ant3 Upper Band Edge (50MHz-4CC – QPSK Full RB)

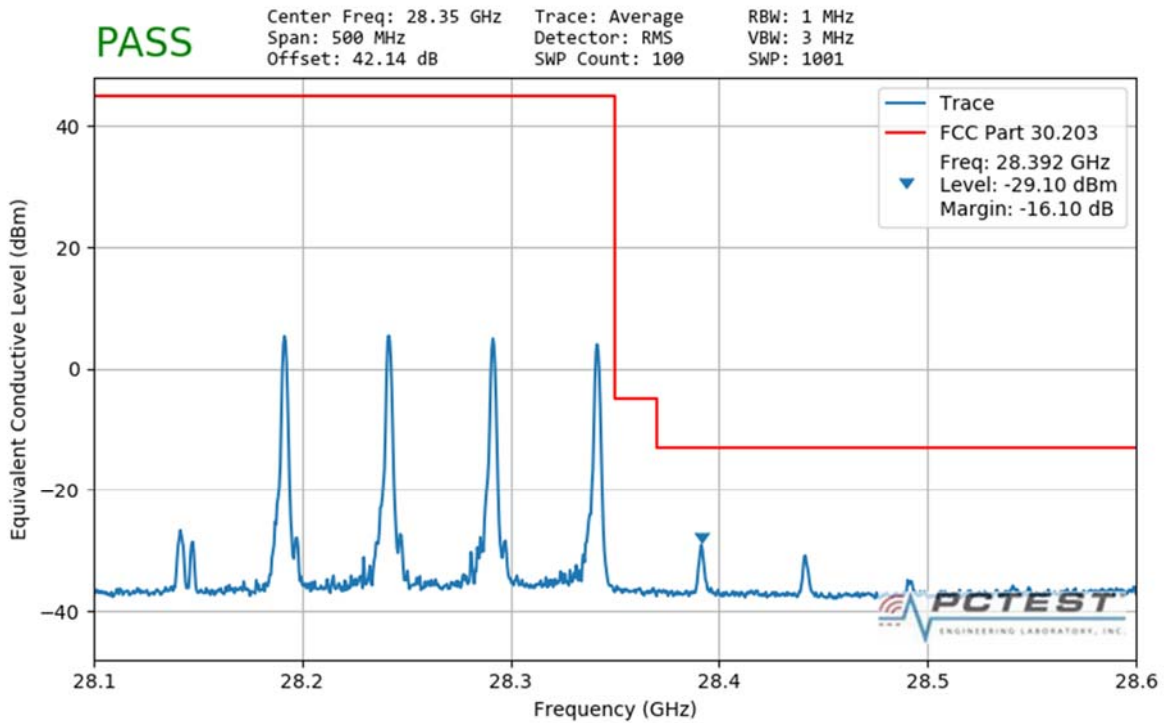


Plot 7-157. Ant3 Upper Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 172 of 210

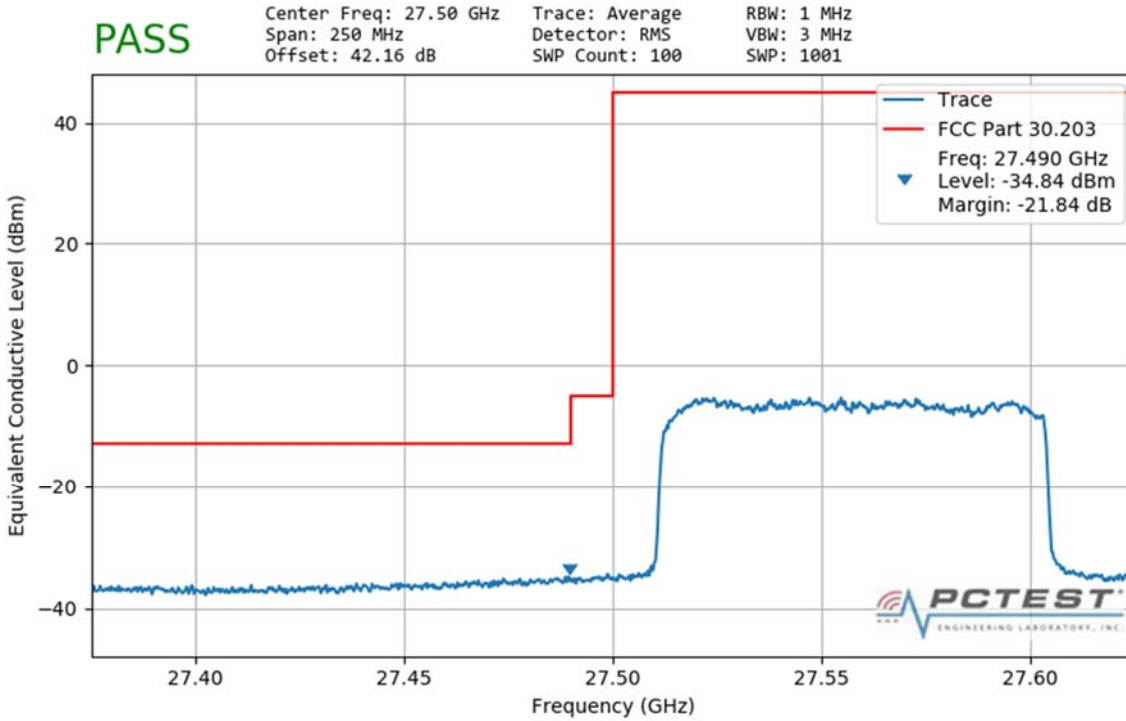


Plot 7-158. Ant3 Lower Band Edge (100MHz-1CC – QPSK Full RB)

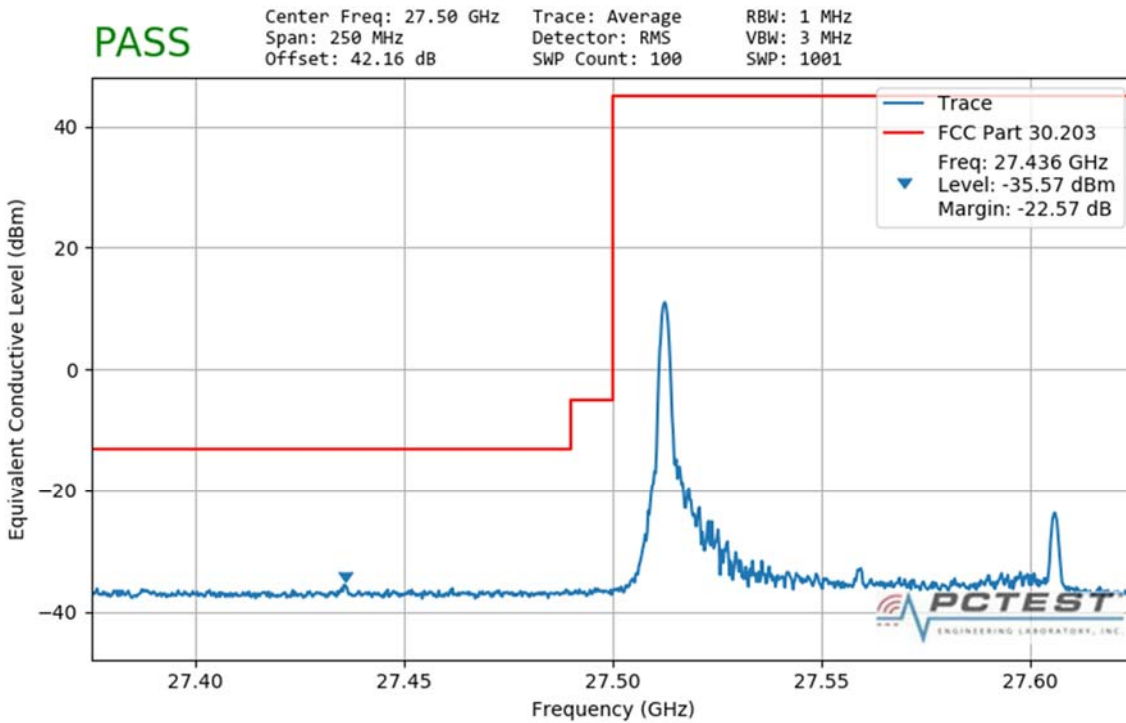


Plot 7-159. Ant3 Lower Band Edge (100MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 173 of 210

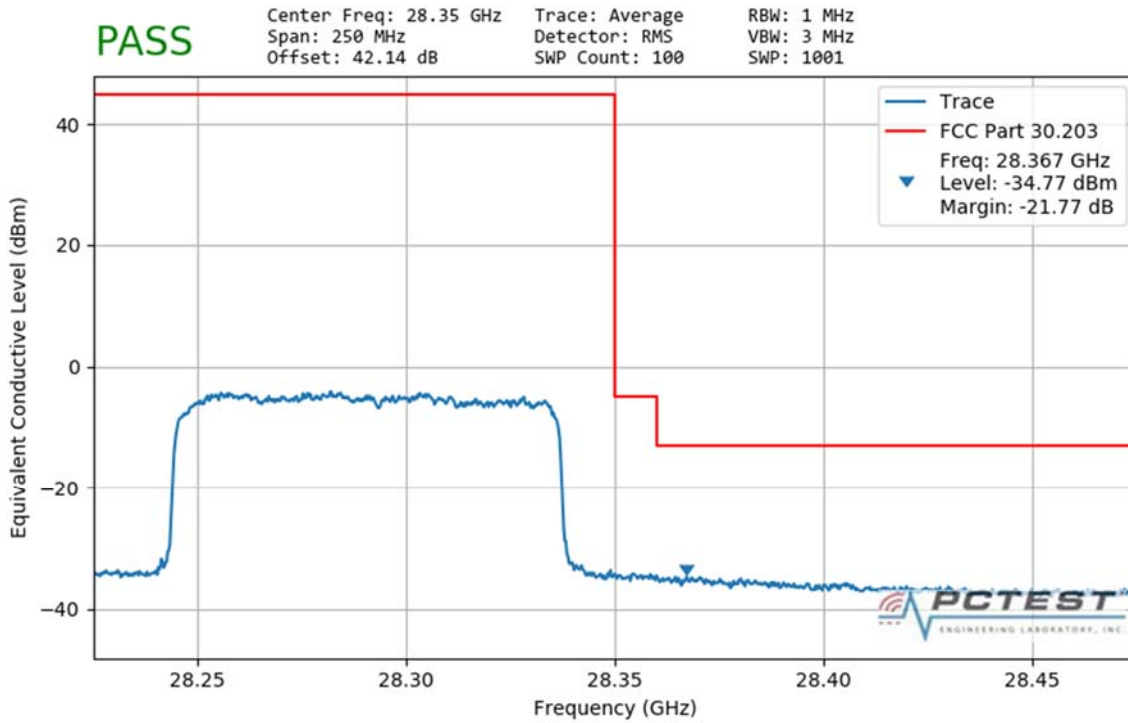


Plot 7-160. Ant3 Upper Band Edge (100MHz-1CC – QPSK Full RB)

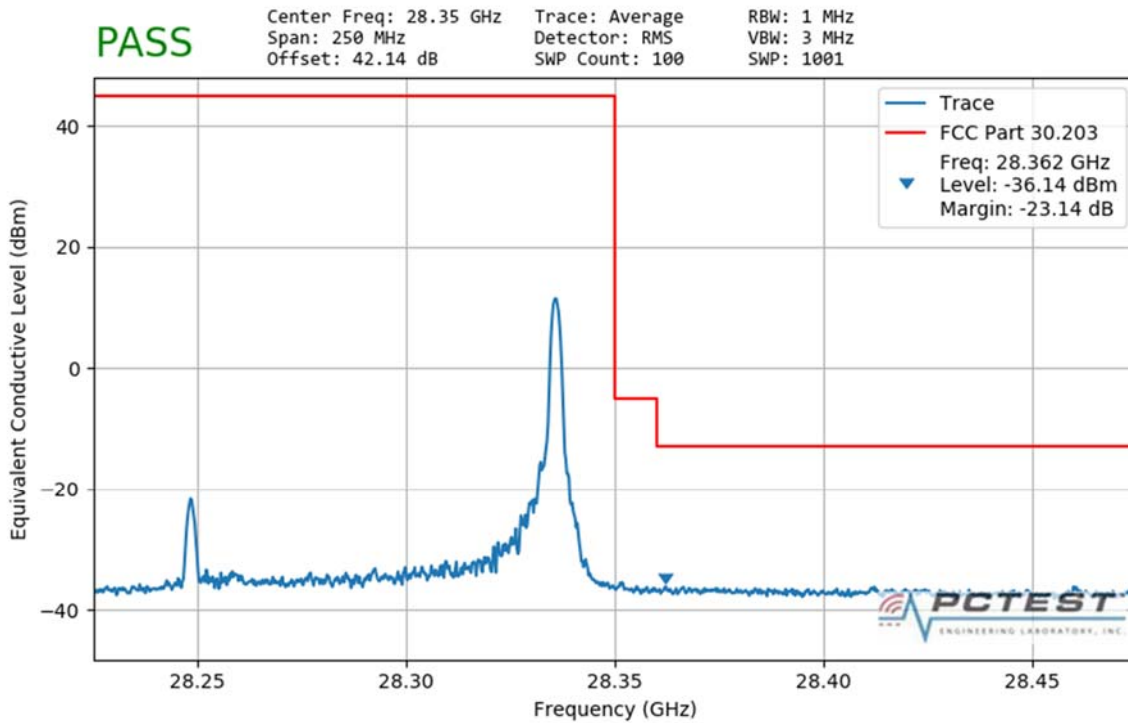


Plot 7-161. Ant3 Upper Band Edge (100MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 174 of 210

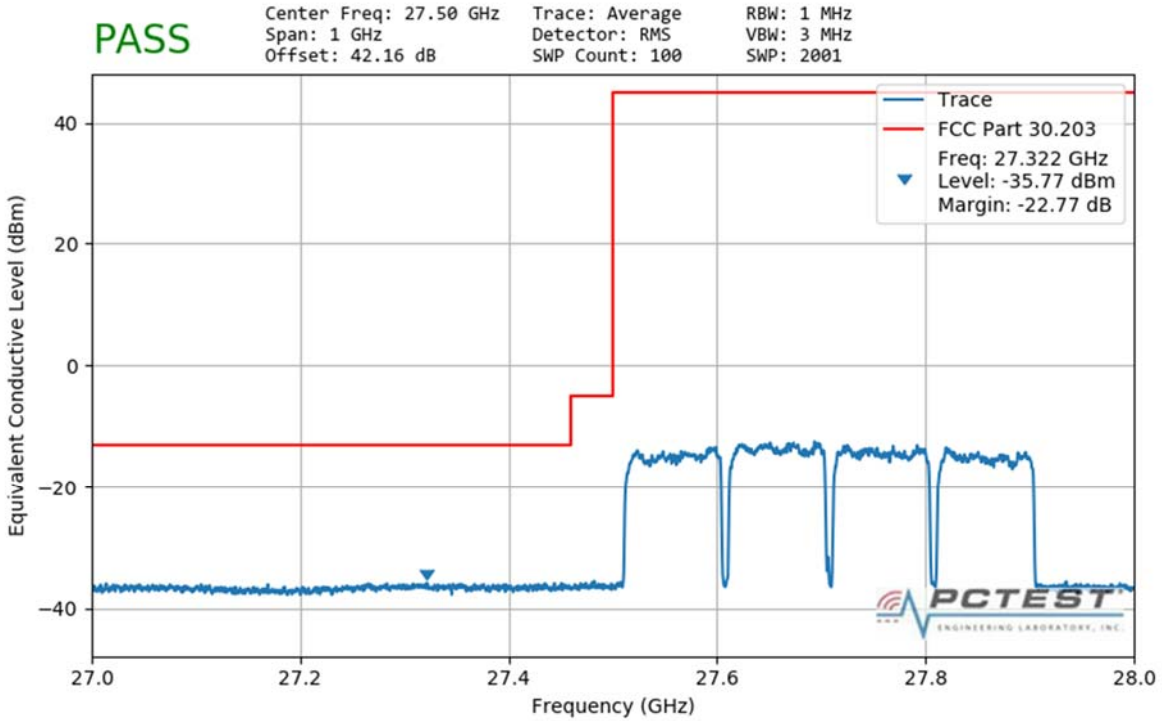


Plot 7-162. Ant3 Lower Band Edge (100MHz-4CC – QPSK Full RB)

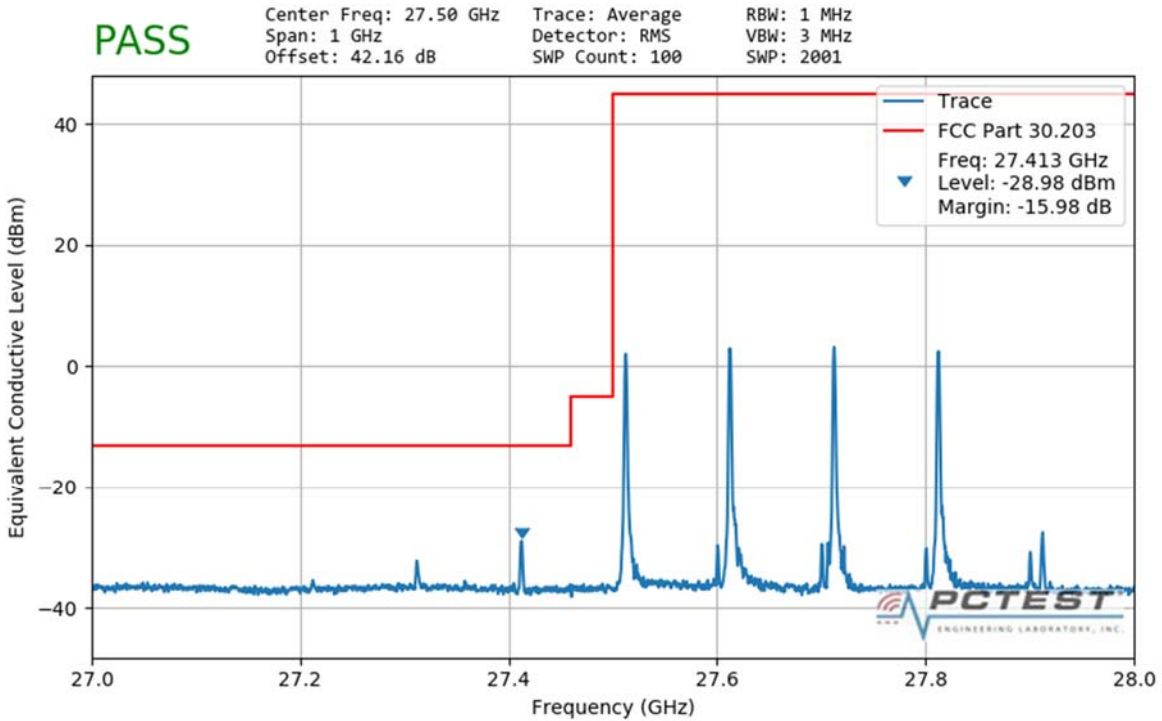


Plot 7-163. Ant3 Lower Band Edge (100MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 175 of 210

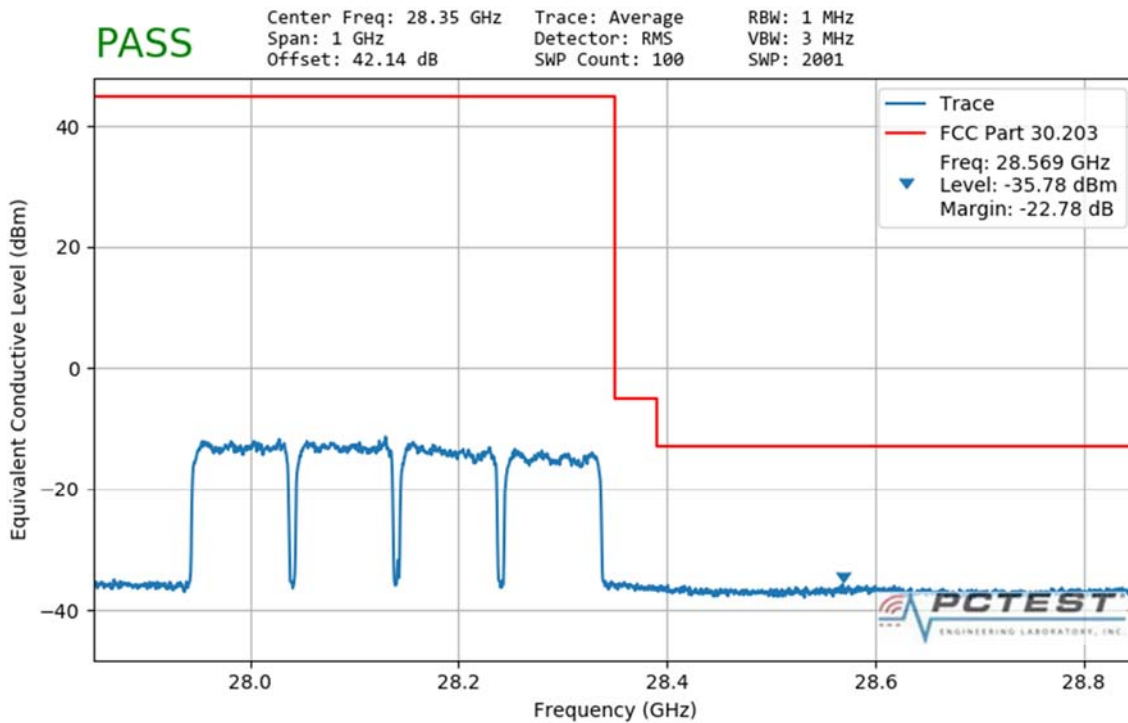


Plot 7-164. Ant3 Upper Band Edge (100MHz-4CC – QPSK Full RB)

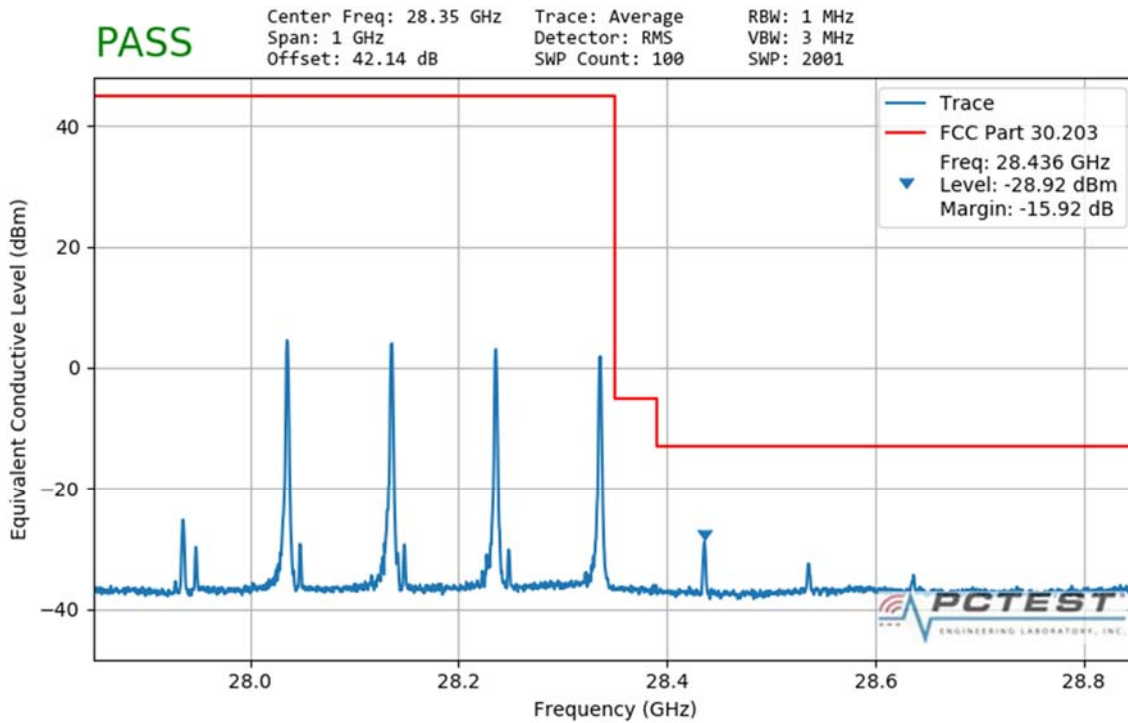


Plot 7-165. Ant3 Upper Band Edge (100MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 176 of 210

Band n260 - QTM#0 / Ant1 - MIMO

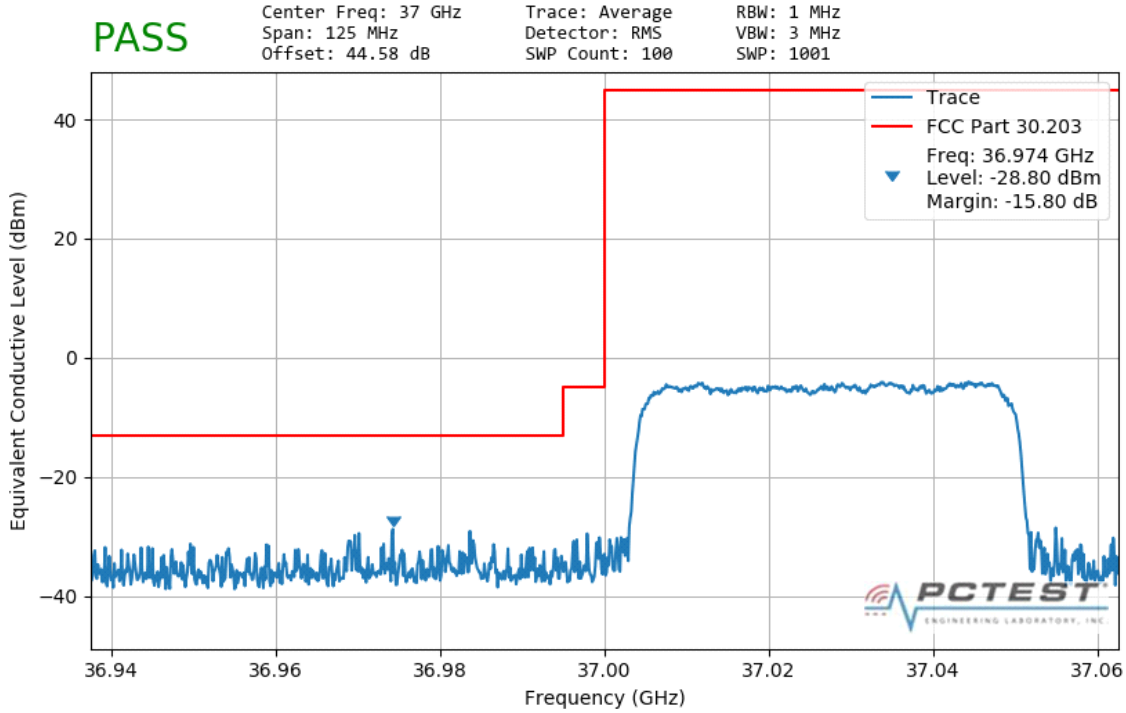


Plot 7-166. Ant1 Lower Band Edge (50MHz-1CC – QPSK Full RB)

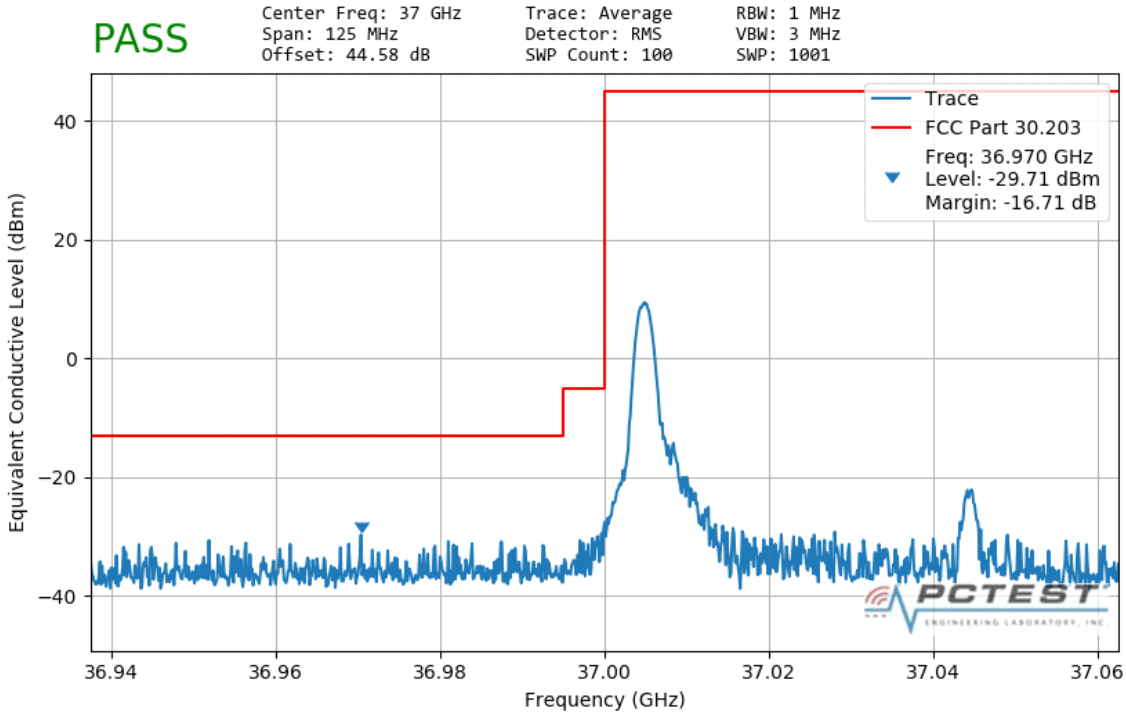


Plot 7-167. Ant1 Lower Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 177 of 210

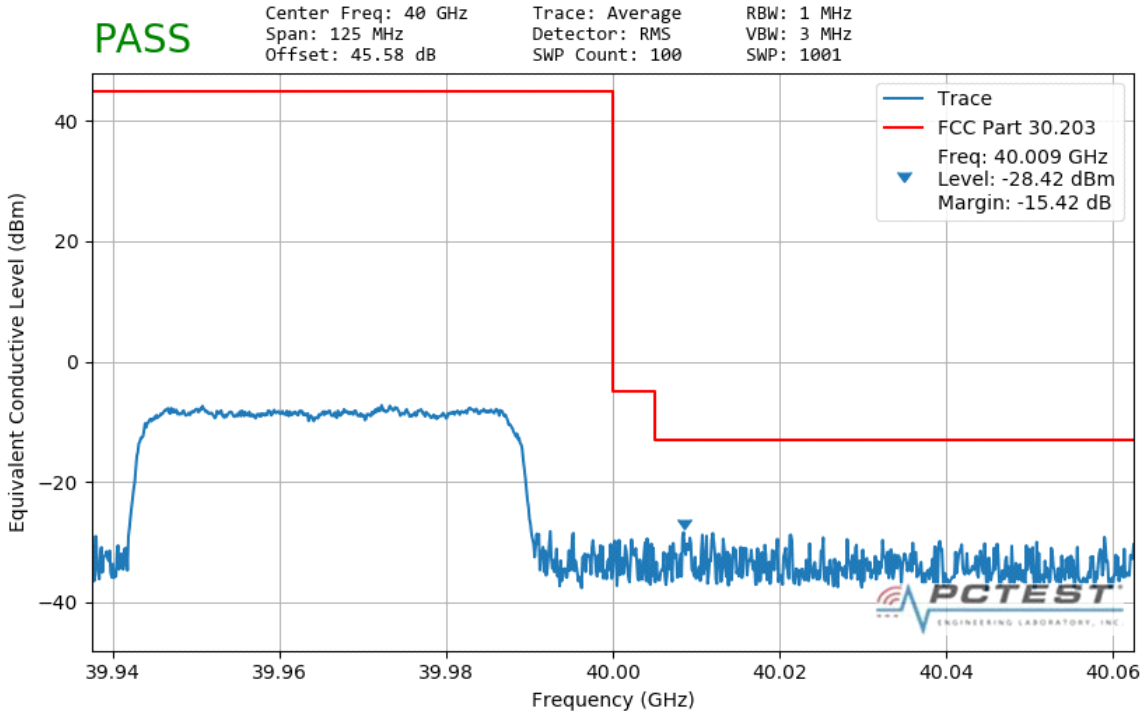


Plot 7-168. Ant1 Upper Band Edge (50MHz-1CC – QPSK Full RB)

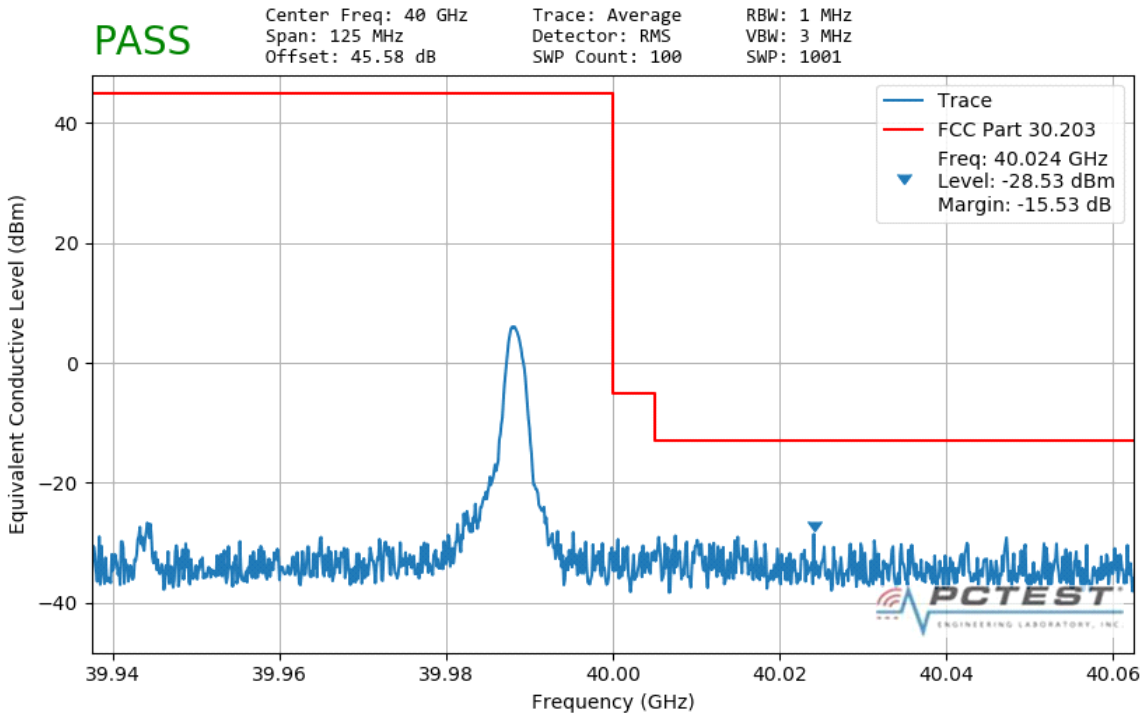


Plot 7-169. Ant1 Upper Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset	Page 178 of 210

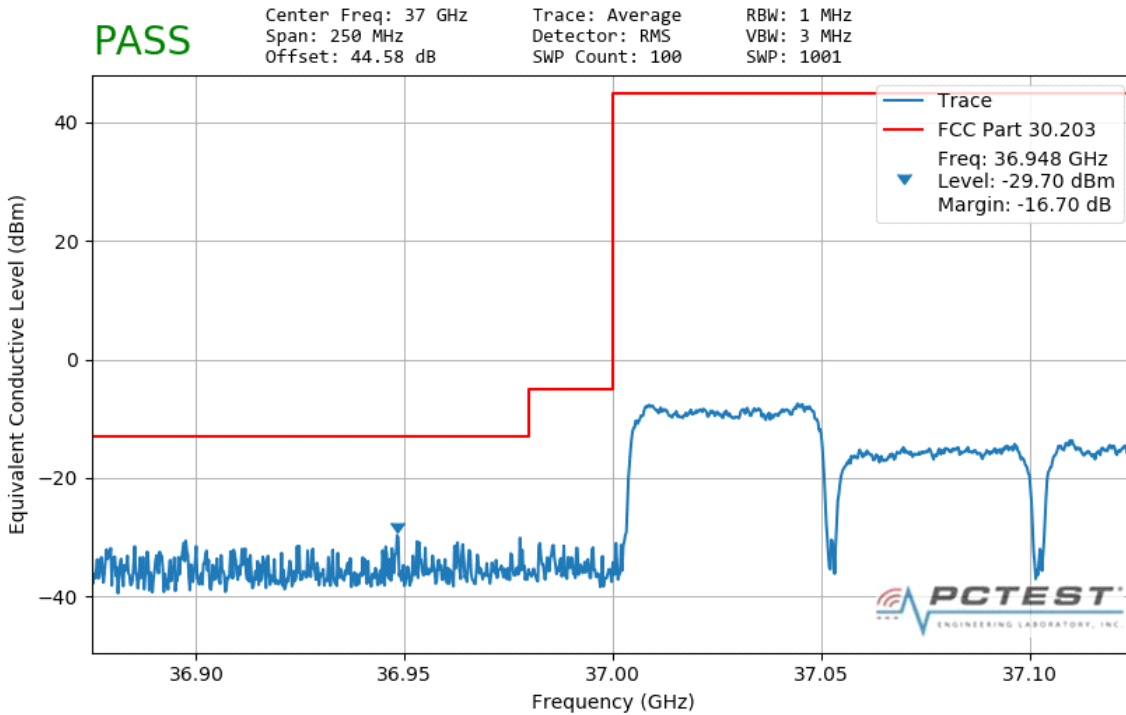


Plot 7-170. Ant1 Lower Band Edge (50MHz-4CC – QPSK Full RB)

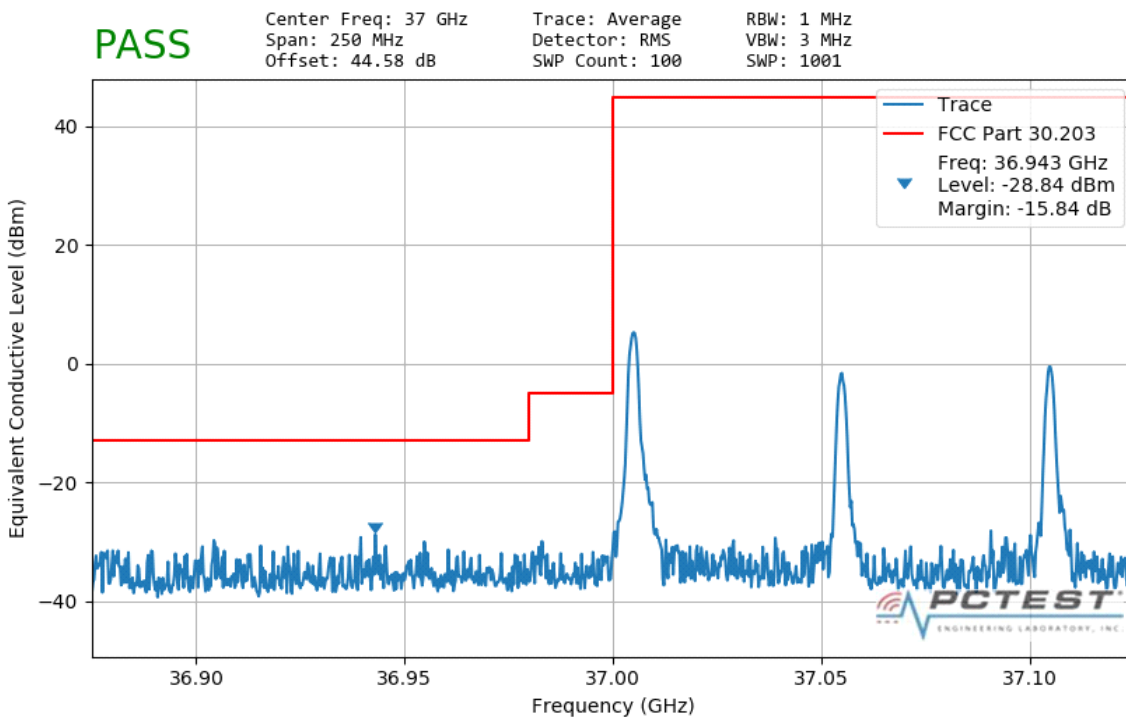


Plot 7-171. Ant1 Lower Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 179 of 210

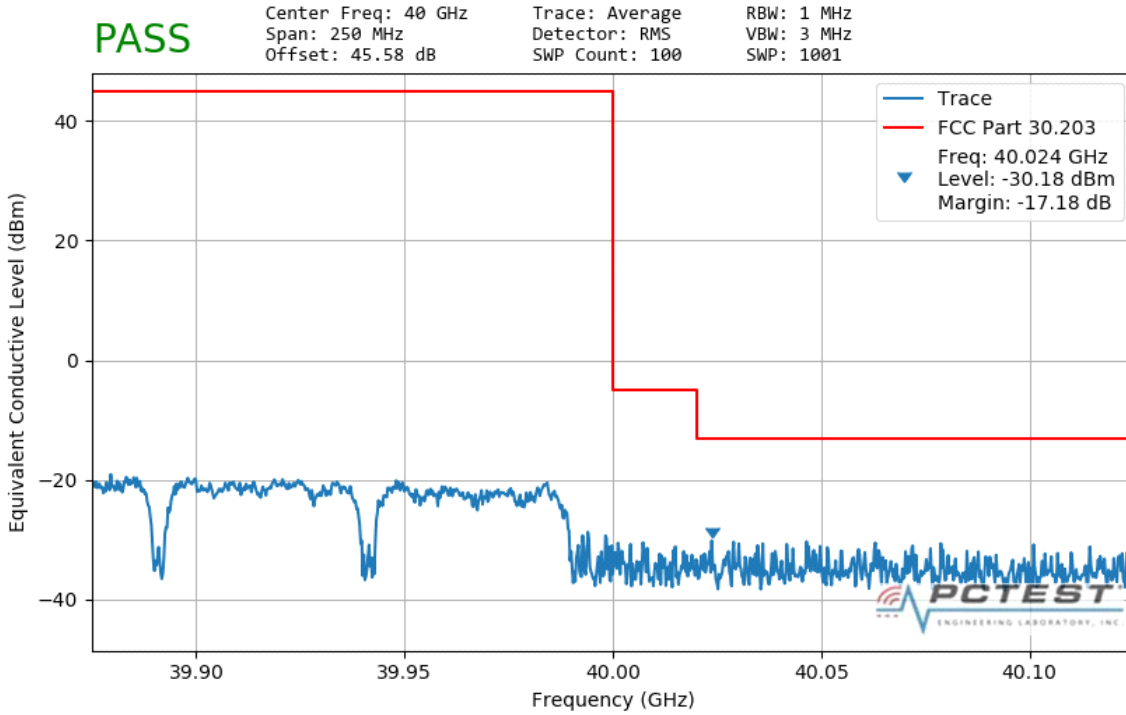


Plot 7-172. Ant1 Upper Band Edge (50MHz-4CC – QPSK Full RB)

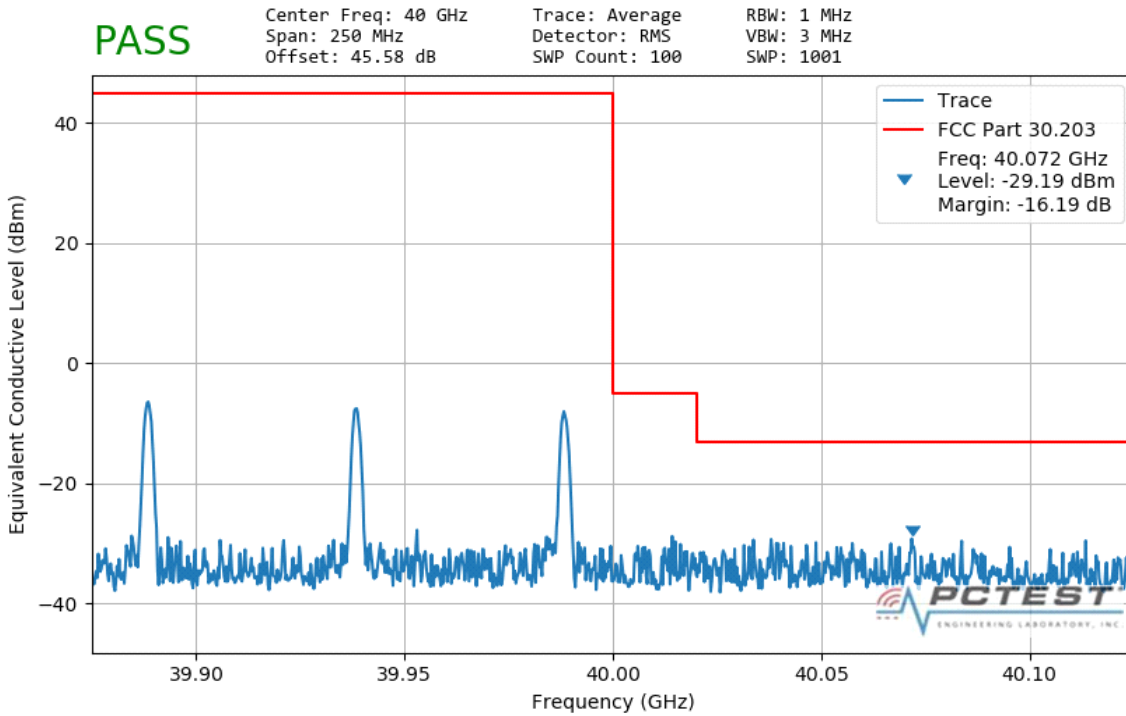


Plot 7-173. Ant1 Upper Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 180 of 210

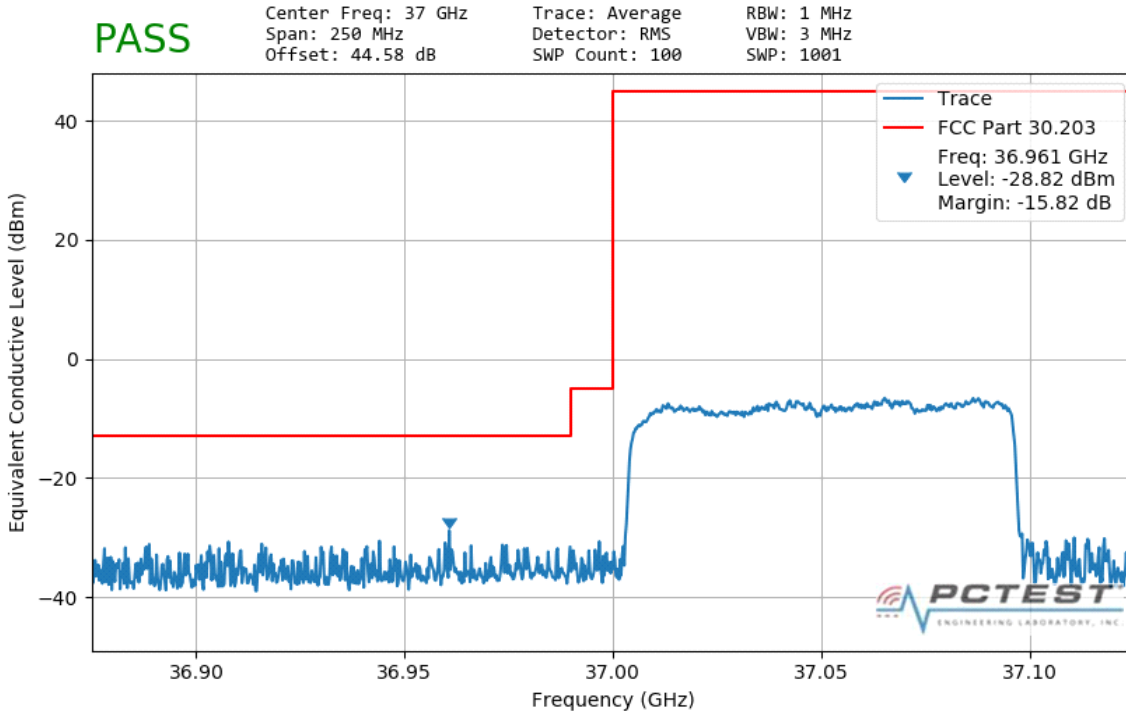


Plot 7-174. Ant1 Lower Band Edge (100MHz-1CC – QPSK Full RB)

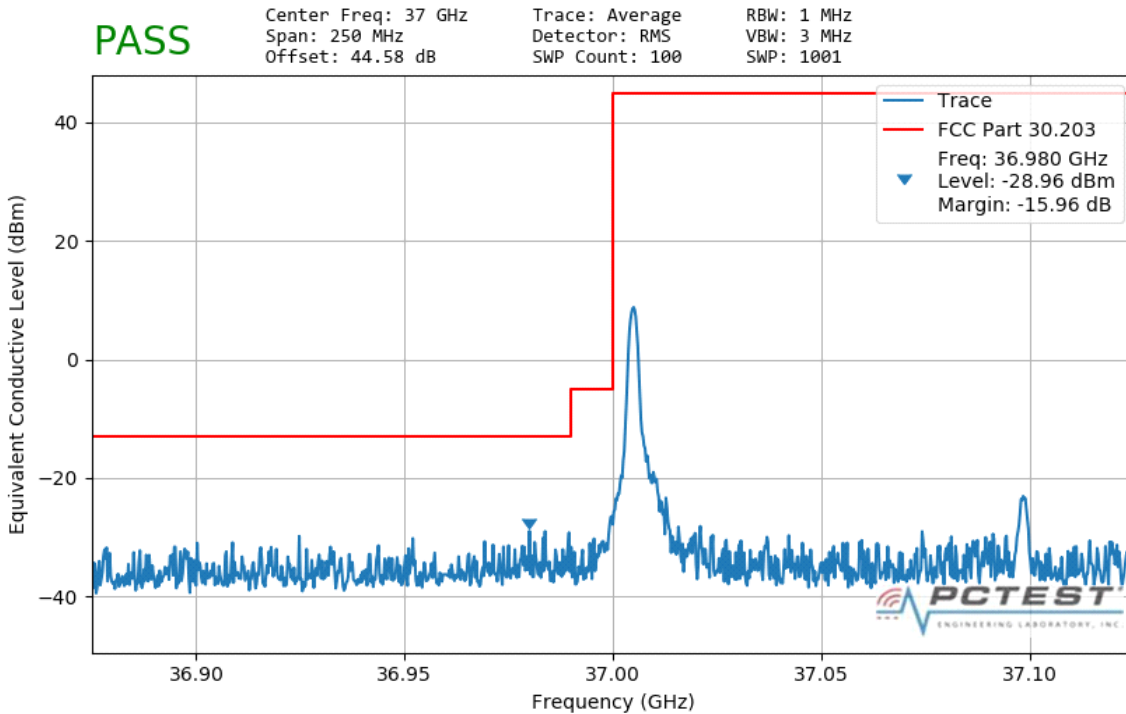


Plot 7-175. Ant1 Lower Band Edge (100MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 181 of 210

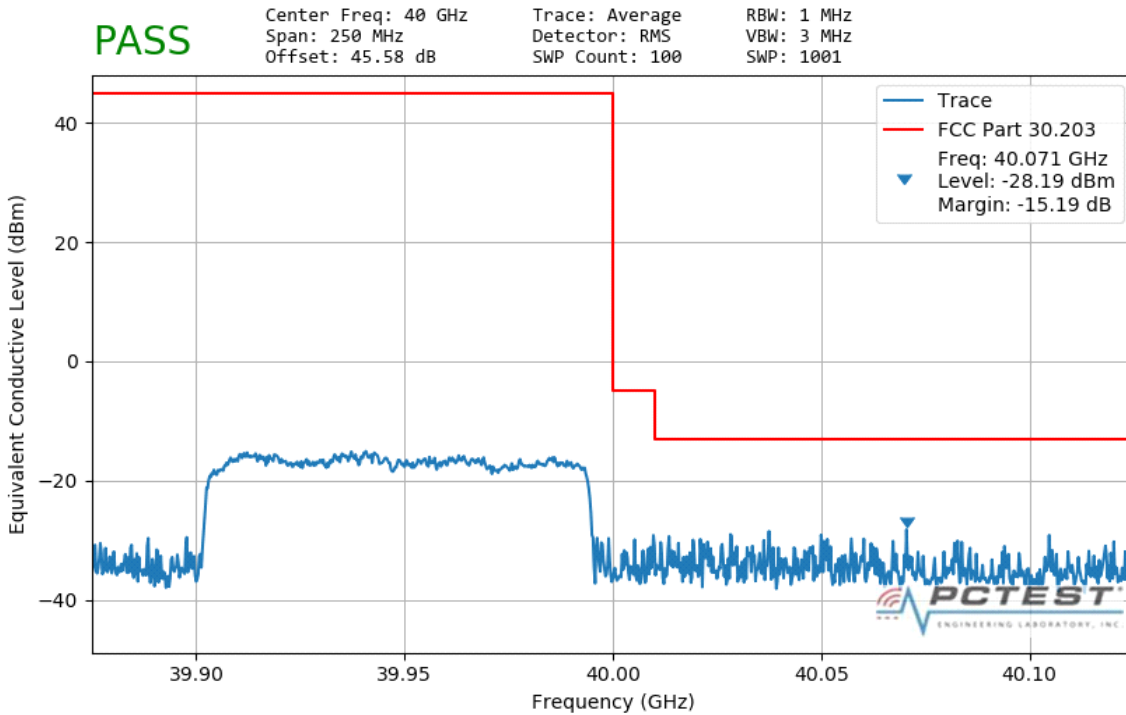


Plot 7-176. Ant1 Upper Band Edge (100MHz-1CC – QPSK Full RB)

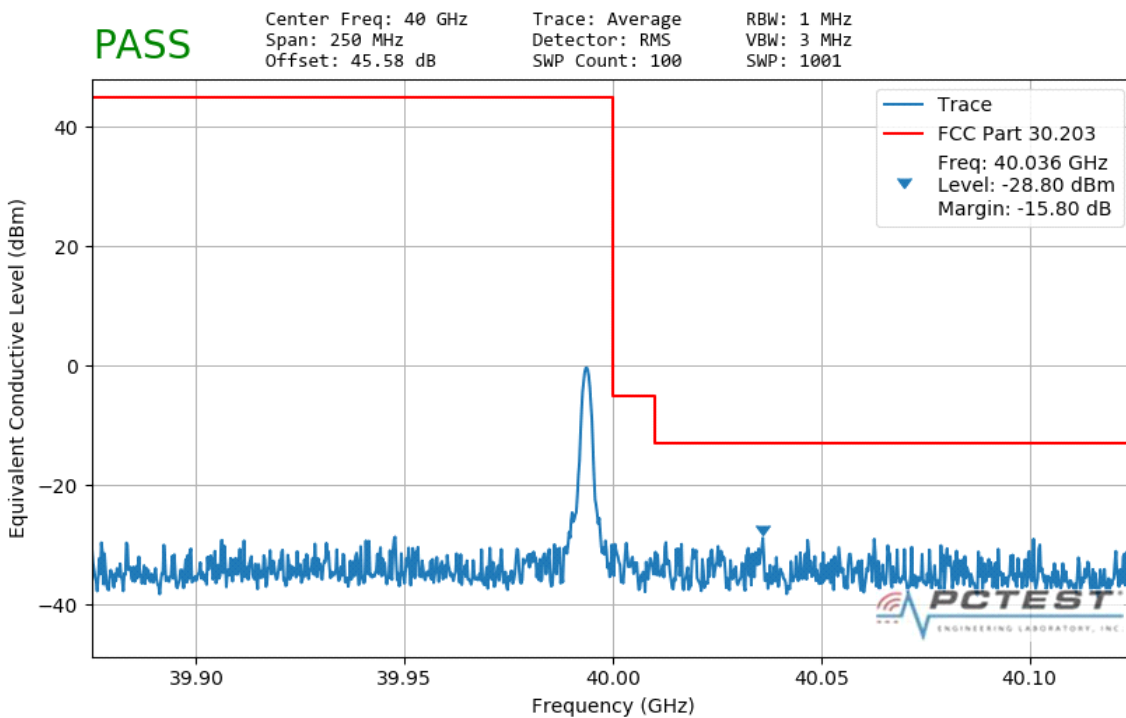


Plot 7-177. Ant1 Upper Band Edge (100MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 182 of 210

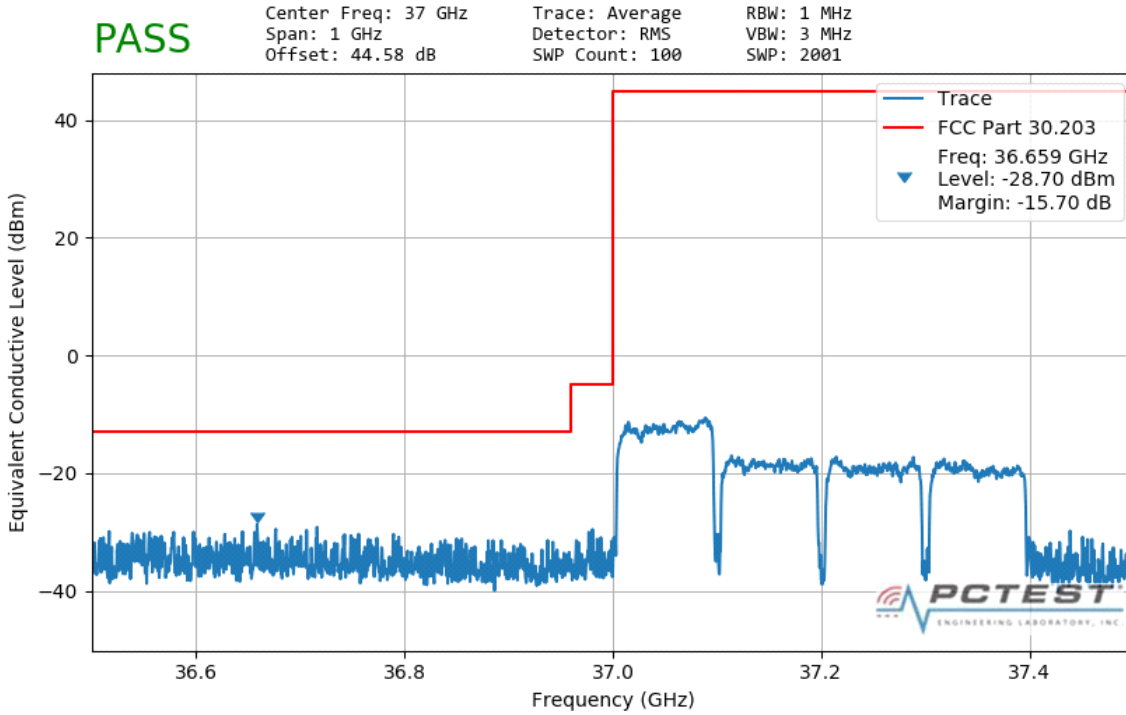


Plot 7-178. Ant1 Lower Band Edge (100MHz-4CC – QPSK Full RB)

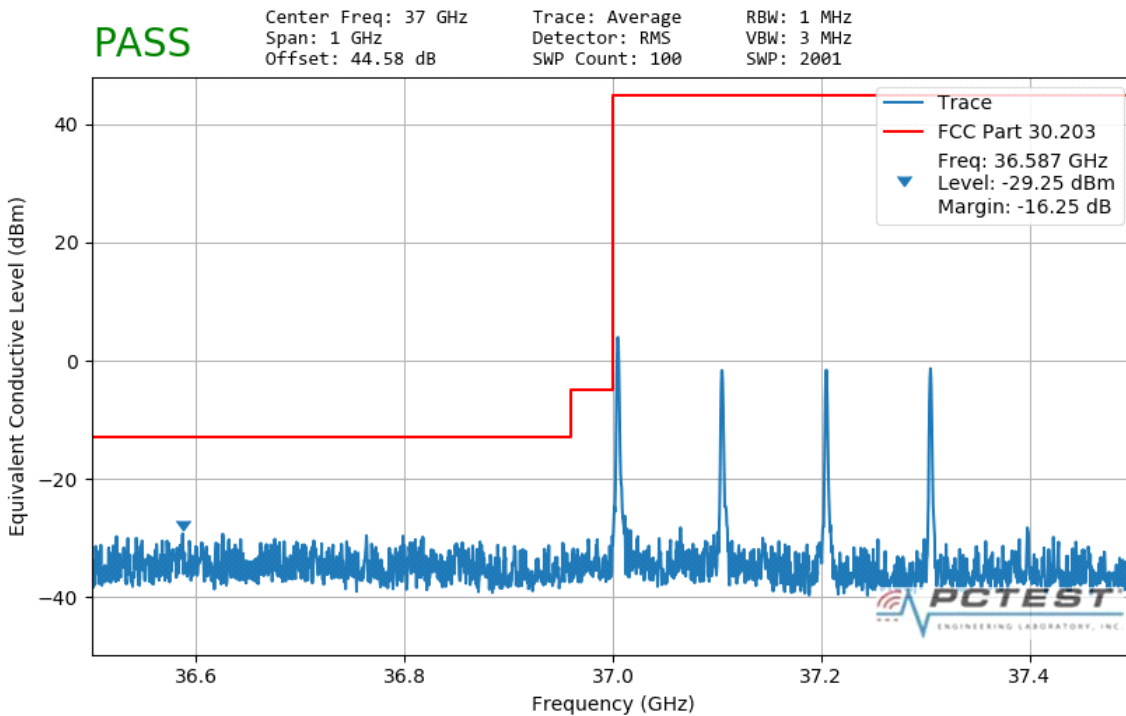


Plot 7-179. Ant1 Lower Band Edge (100MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 183 of 210

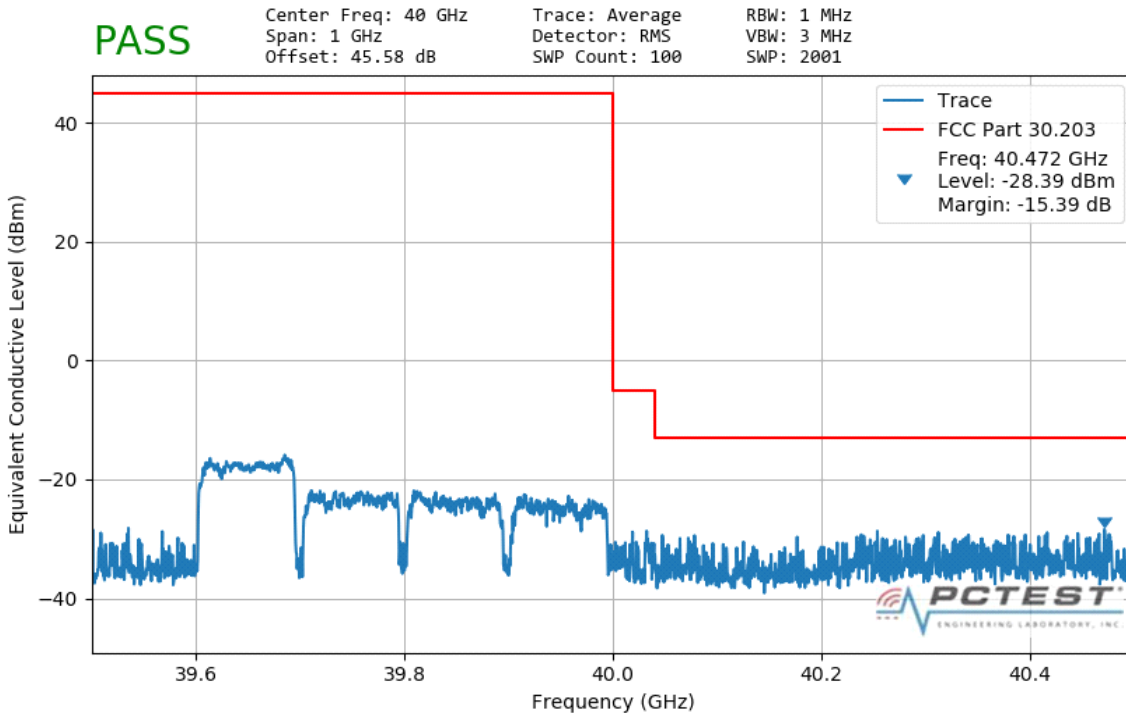


Plot 7-180. Ant1 Upper Band Edge (100MHz-4CC – QPSK Full RB)

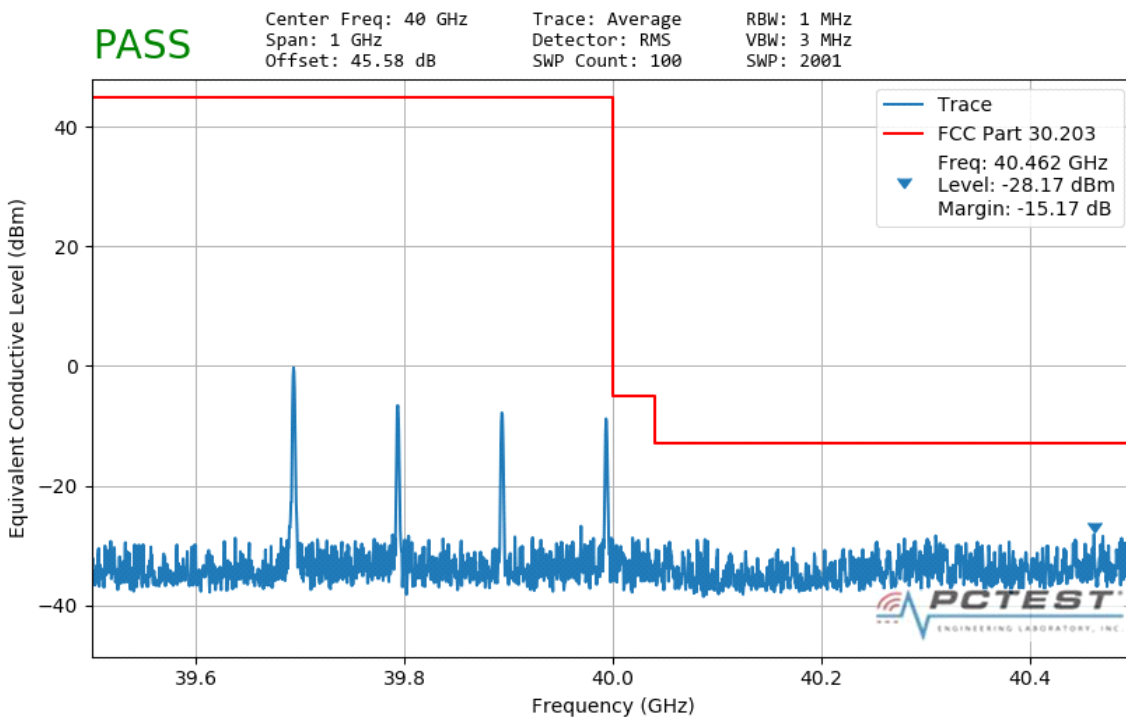


Plot 7-181. Ant1 Upper Band Edge (100MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 184 of 210

Band n260 - QTM#1 / Ant2 - MIMO

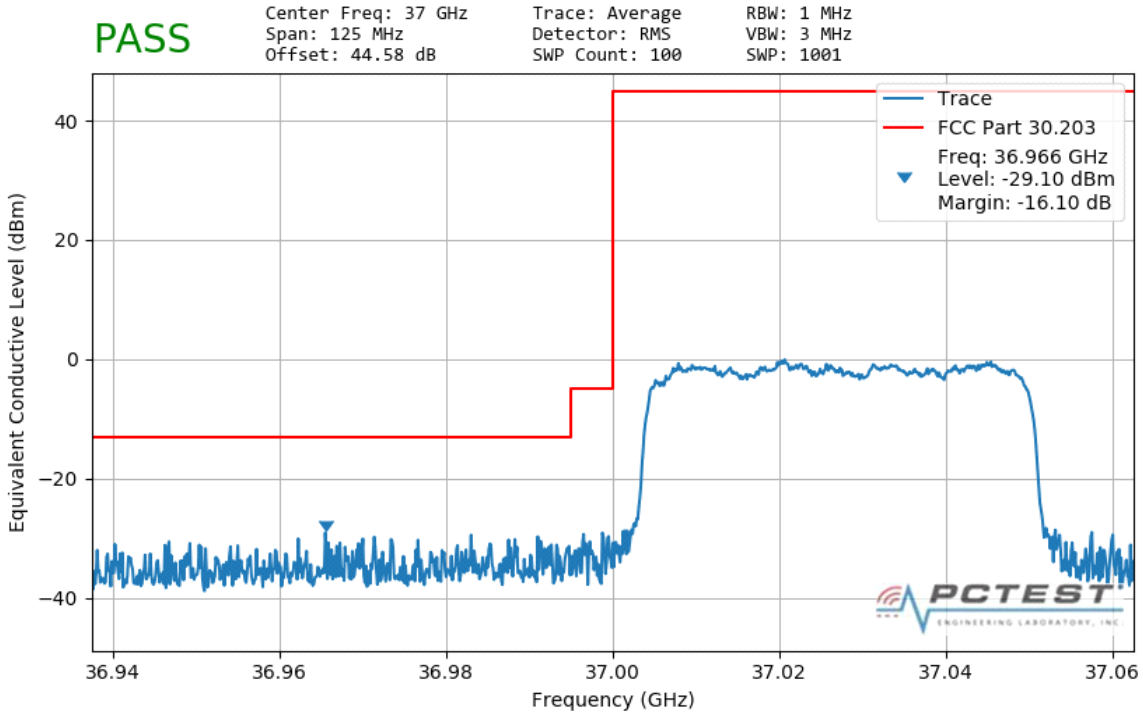


Plot 7-182. Ant2 Lower Band Edge (50MHz-1CC – QPSK Full RB)

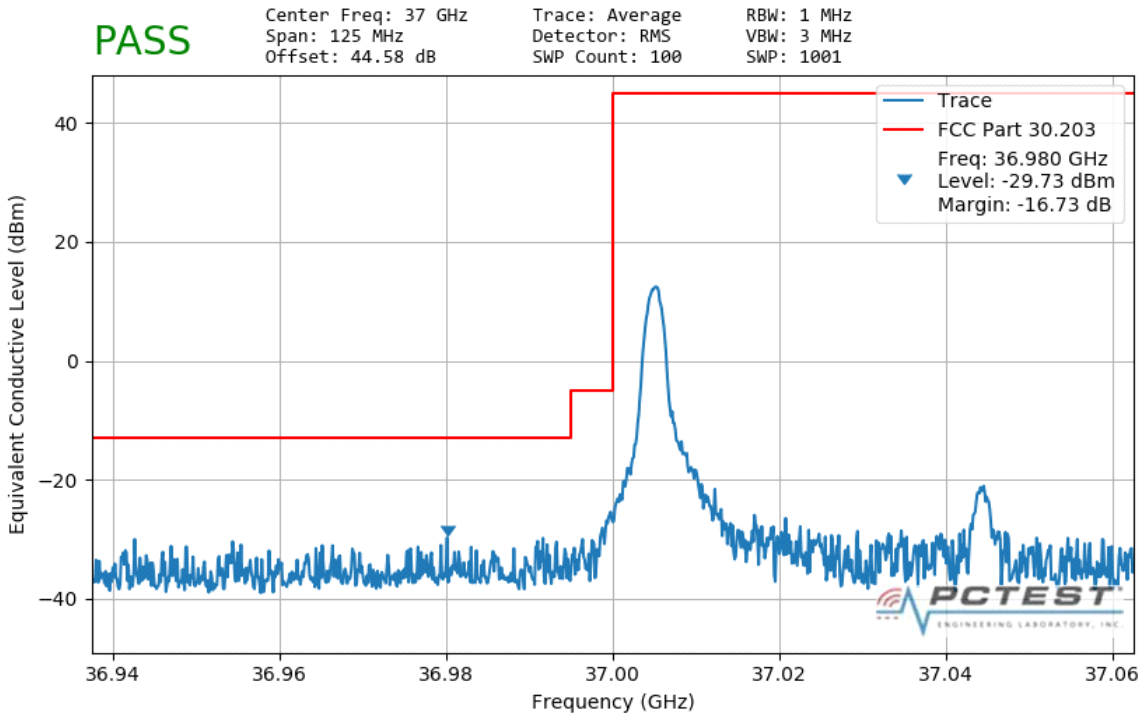


Plot 7-183. Ant2 Lower Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 185 of 210

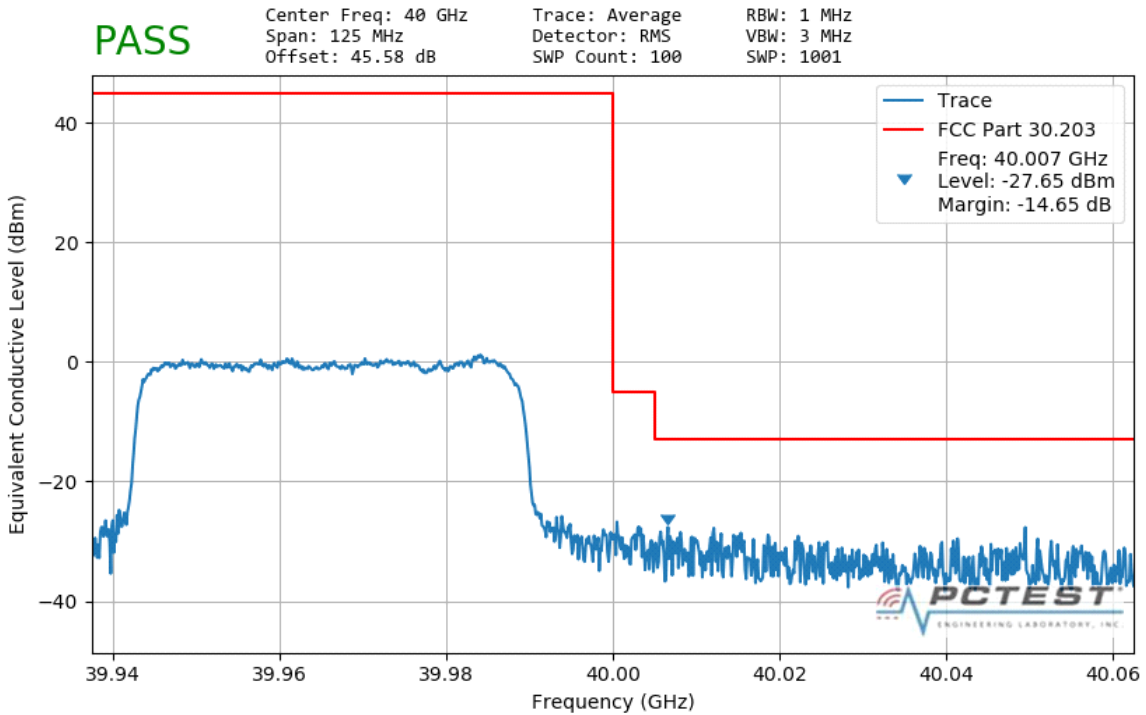


Plot 7-184. Ant2 Upper Band Edge (50MHz-1CC – QPSK Full RB)

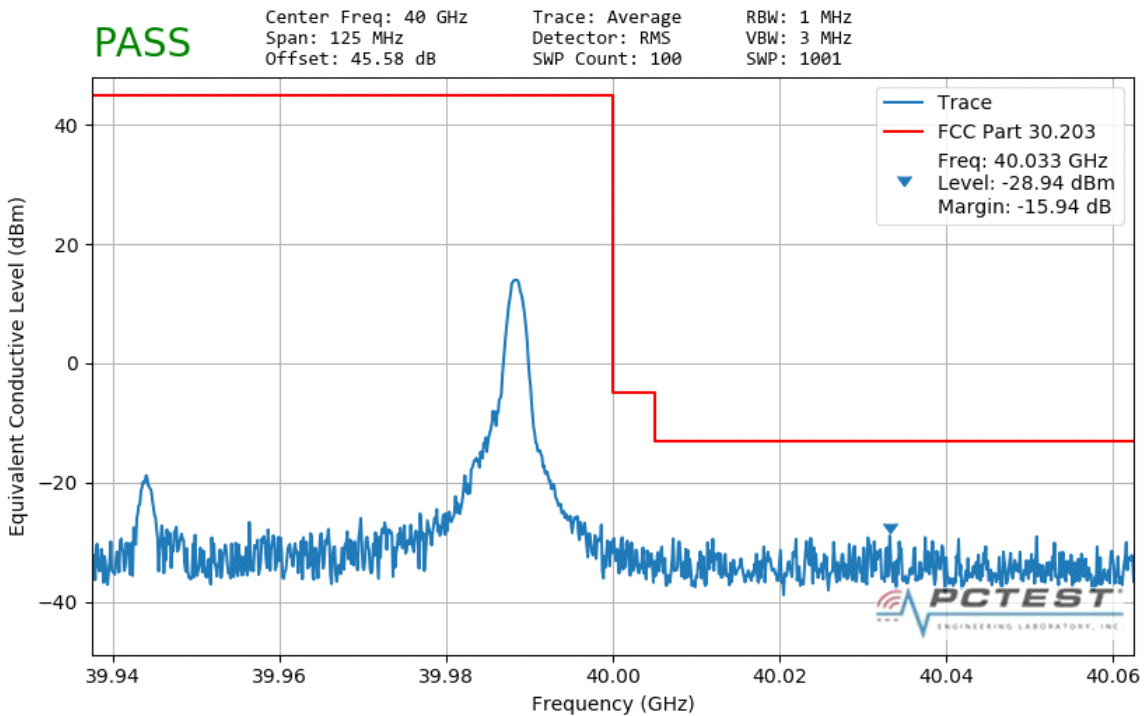


Plot 7-185. Ant2 Upper Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 186 of 210

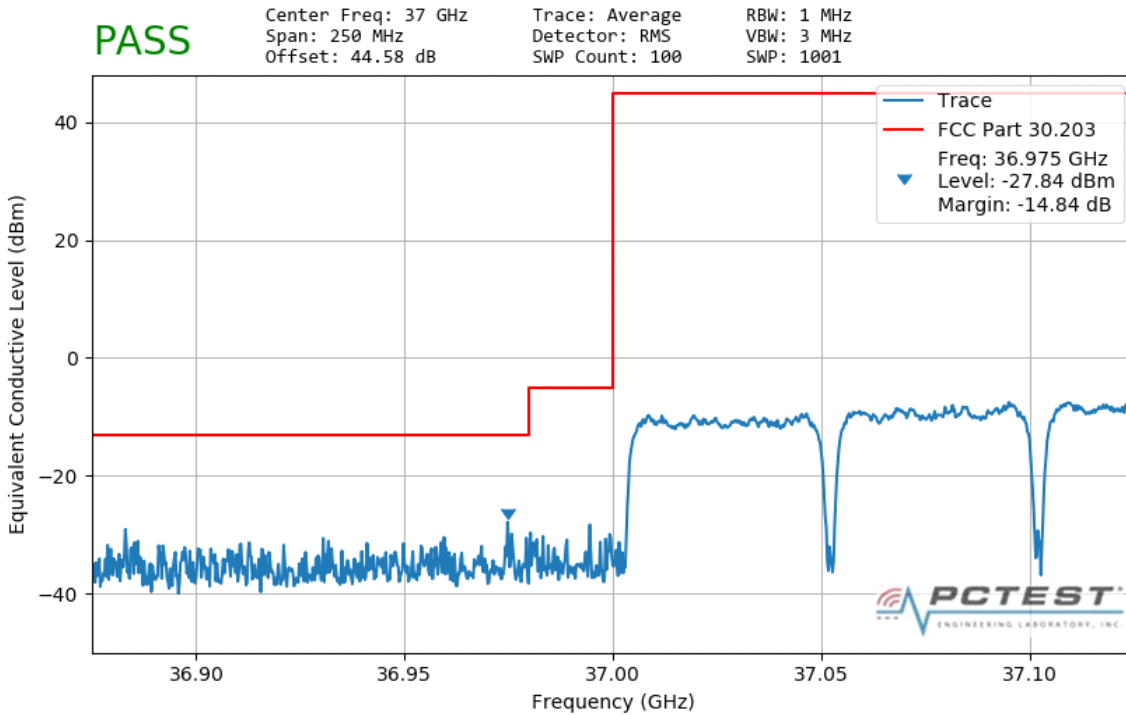


Plot 7-186. Ant2 Lower Band Edge (50MHz-4CC – QPSK Full RB)

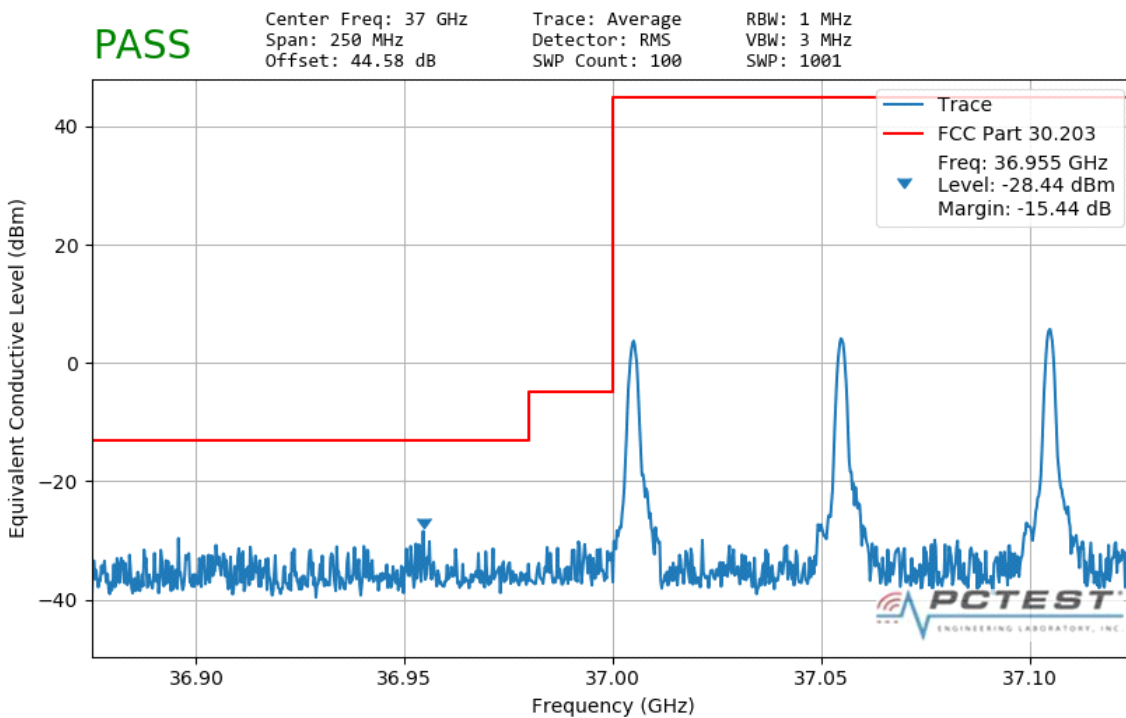


Plot 7-187. Ant2 Lower Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 187 of 210

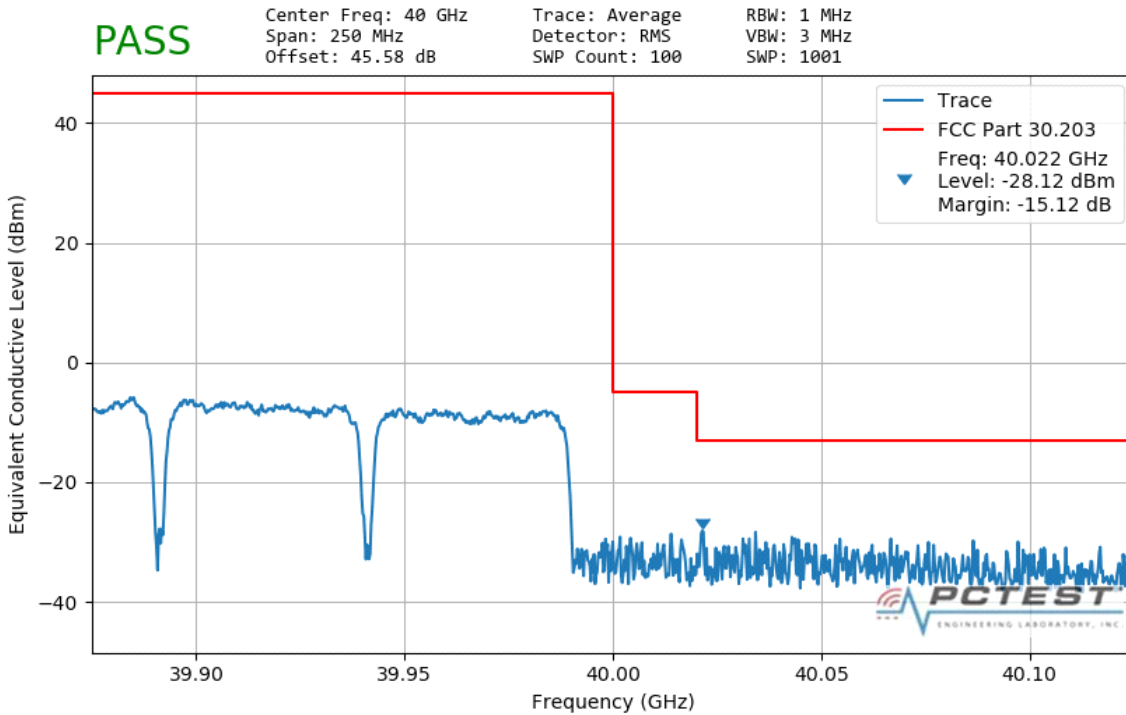


Plot 7-188. Ant2 Upper Band Edge (50MHz-4CC – QPSK Full RB)

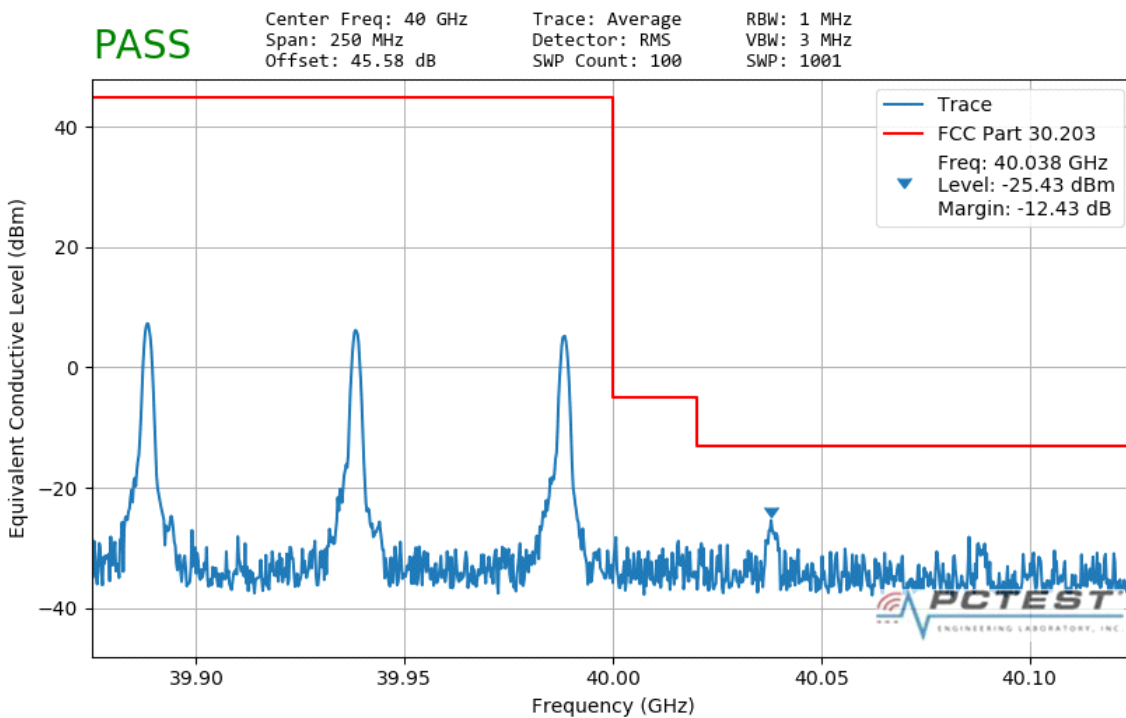


Plot 7-189. Ant2 Upper Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 188 of 210

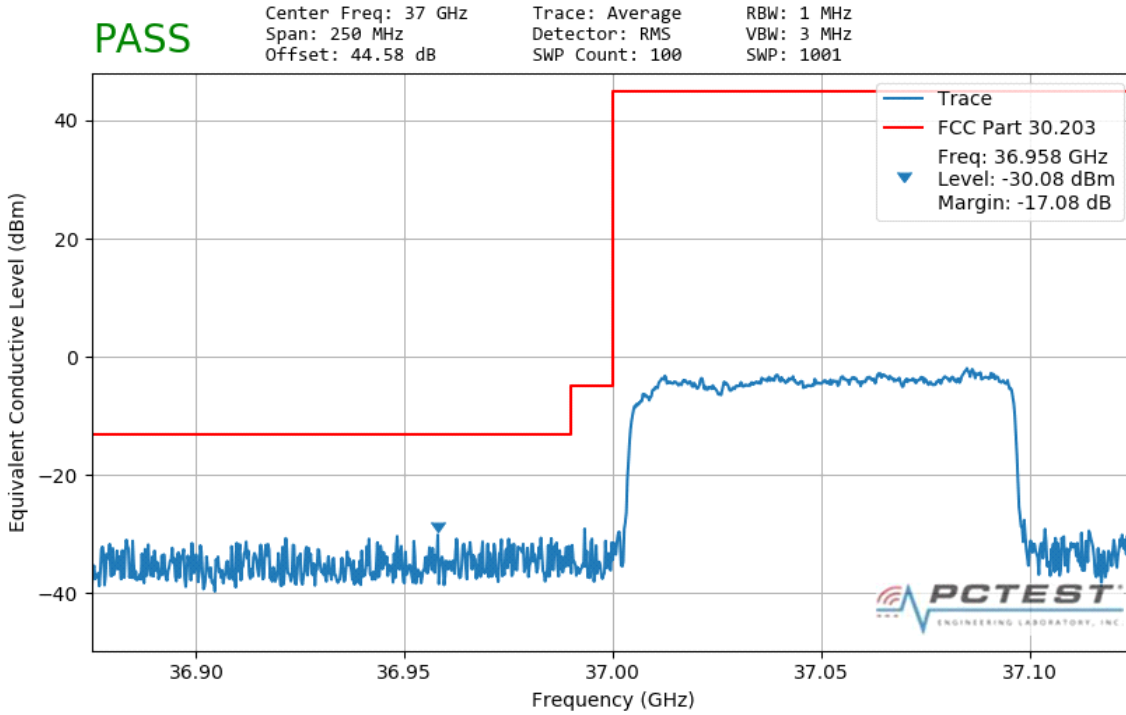


Plot 7-190. Ant2 Lower Band Edge (100MHz-1CC – QPSK Full RB)

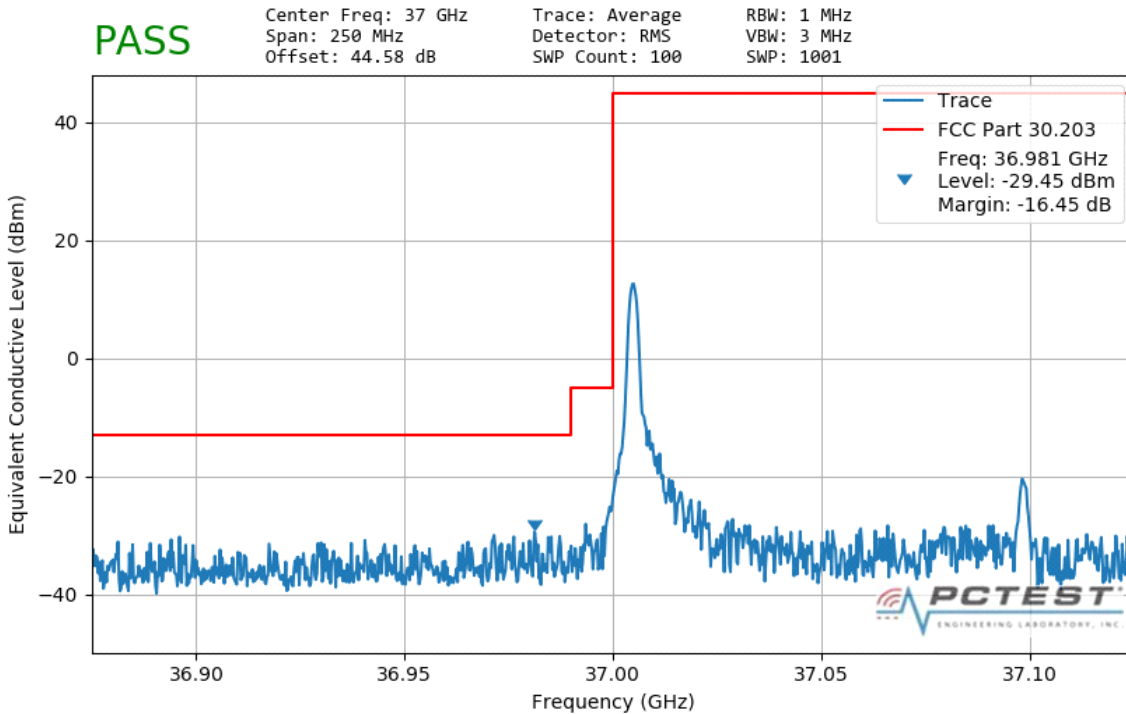


Plot 7-191. Ant2 Lower Band Edge (100MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 189 of 210

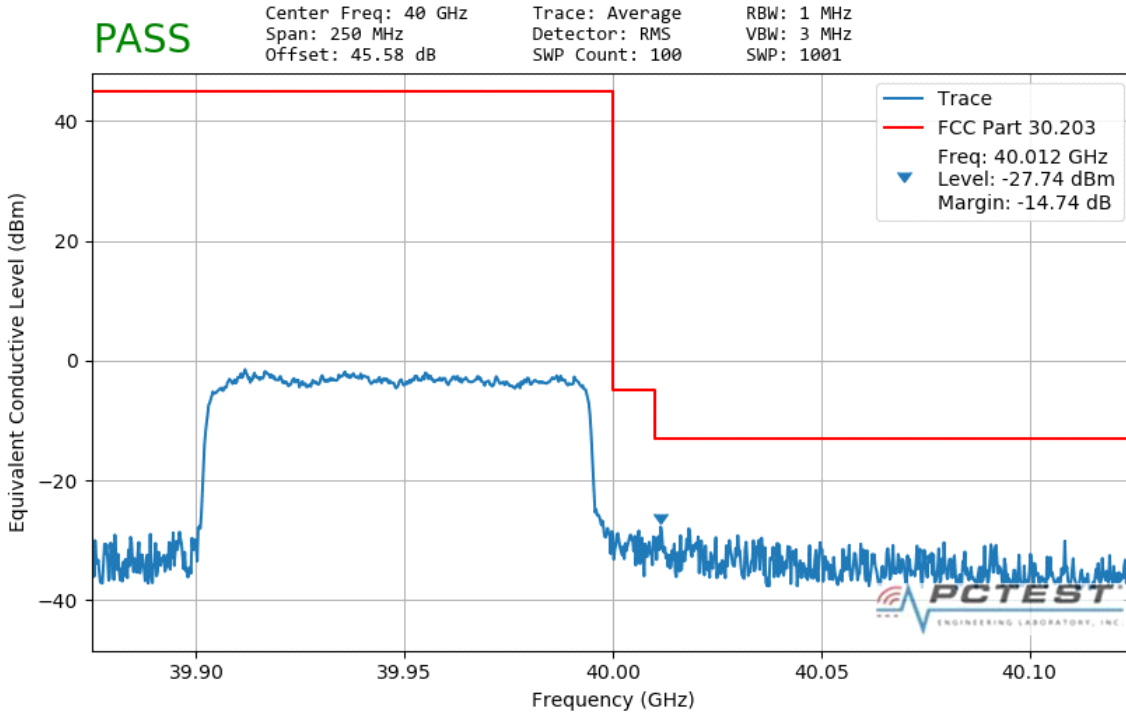


Plot 7-192. Ant2 Upper Band Edge (100MHz-1CC – QPSK Full RB)

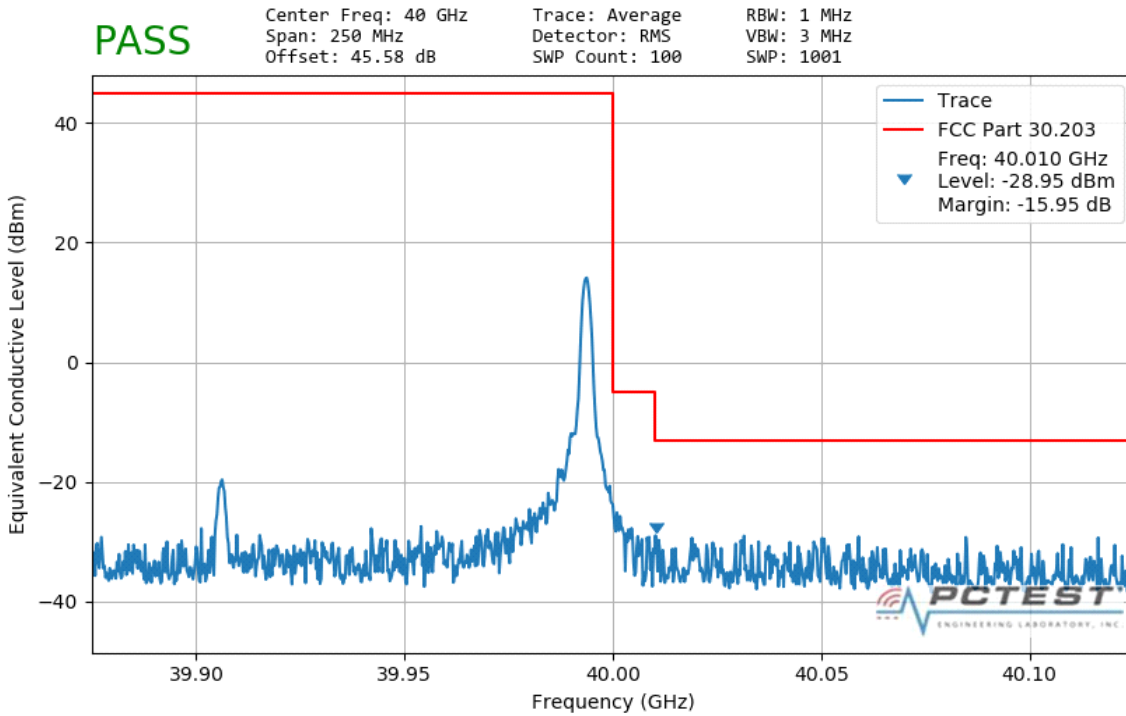


Plot 7-193. Ant2 Upper Band Edge (100MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 190 of 210

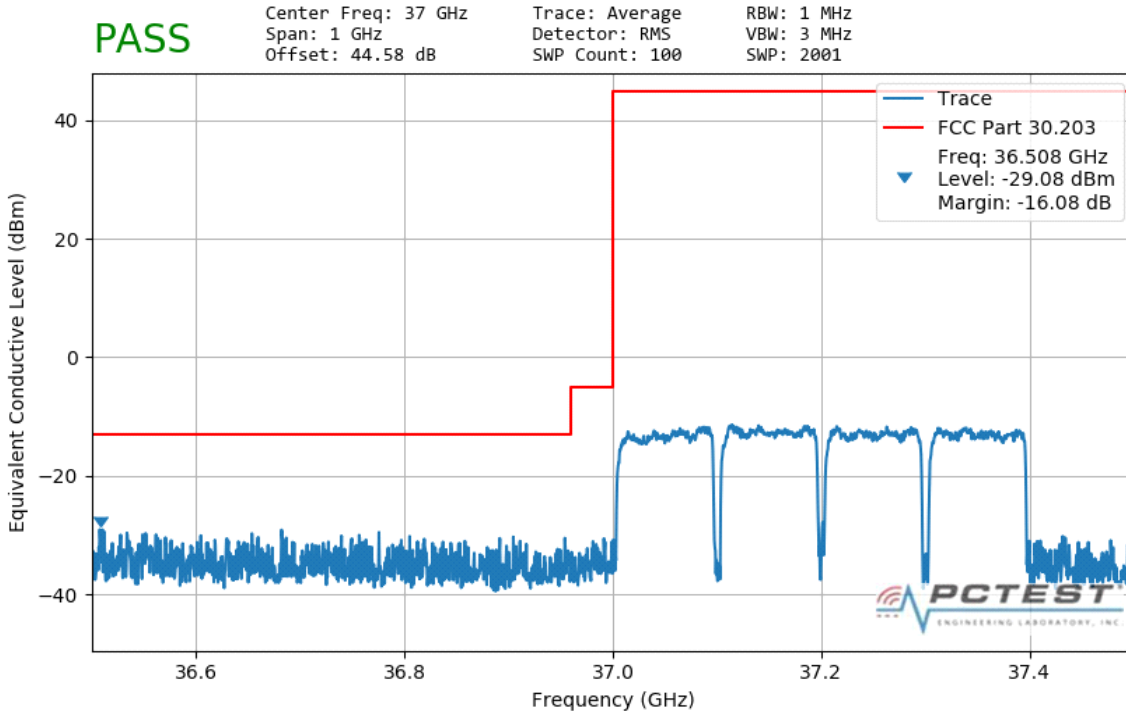


Plot 7-194. Ant2 Lower Band Edge (100MHz-4CC – QPSK Full RB)

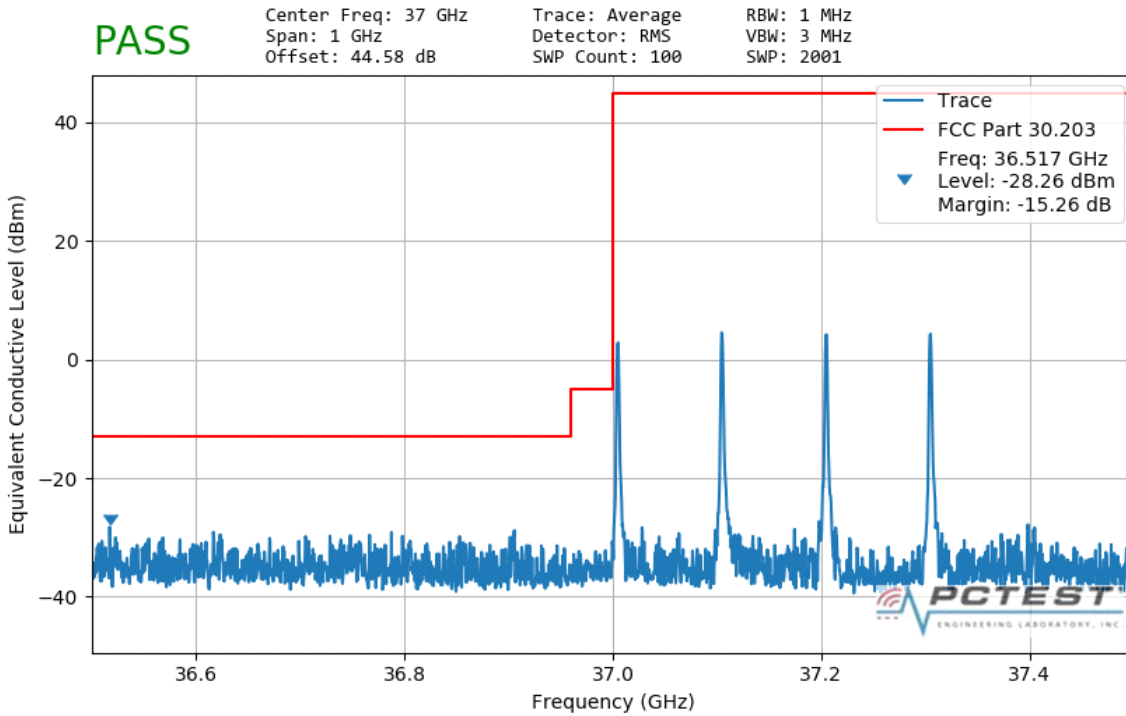


Plot 7-195. Ant2 Lower Band Edge (100MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 191 of 210

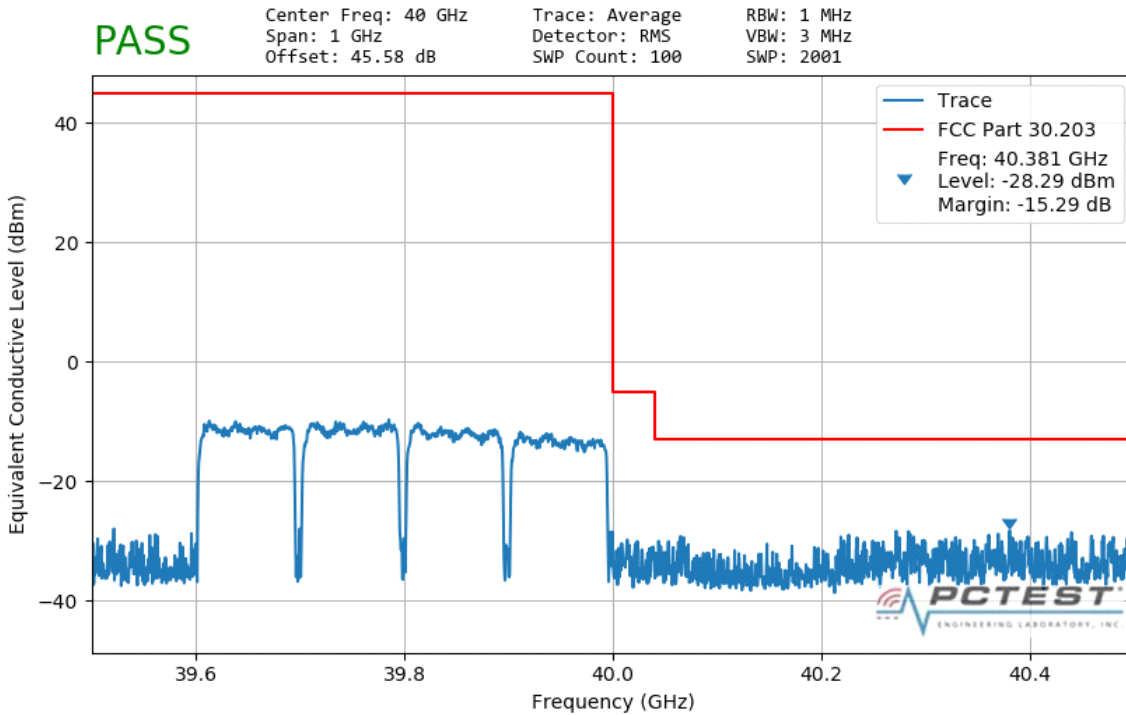


Plot 7-196. Ant2 Upper Band Edge (100MHz-4CC – QPSK Full RB)

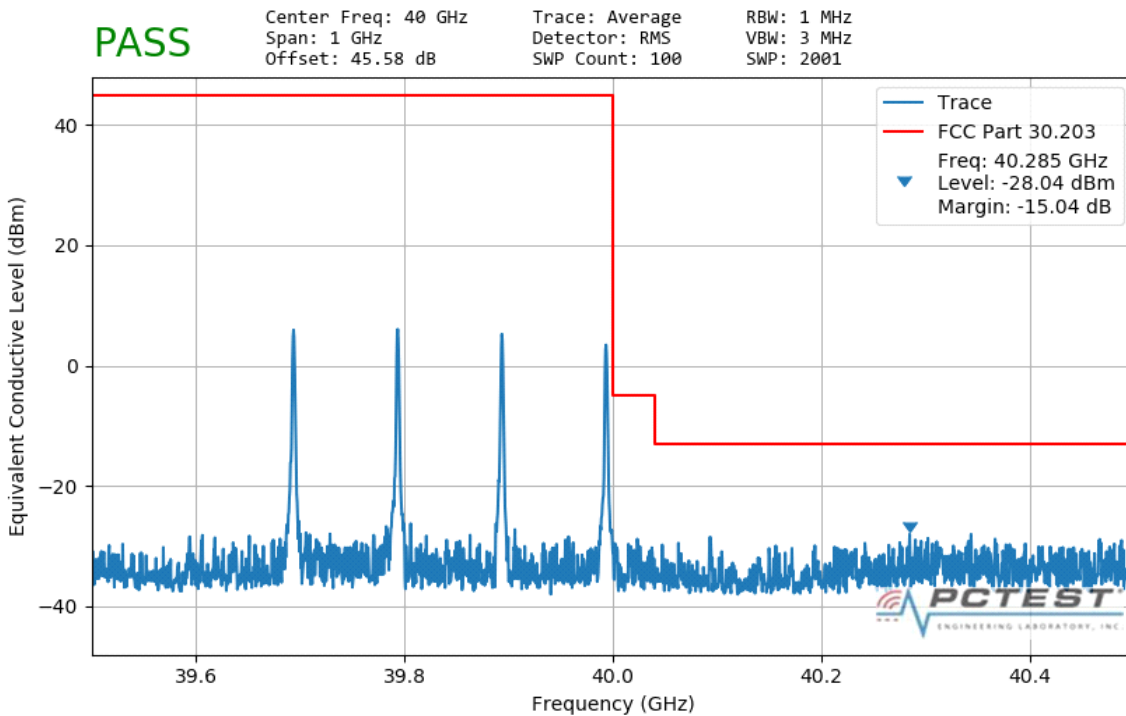


Plot 7-197. Ant2 Upper Band Edge (100MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 192 of 210

Band n260 - QTM#2 / Ant3 - MIMO

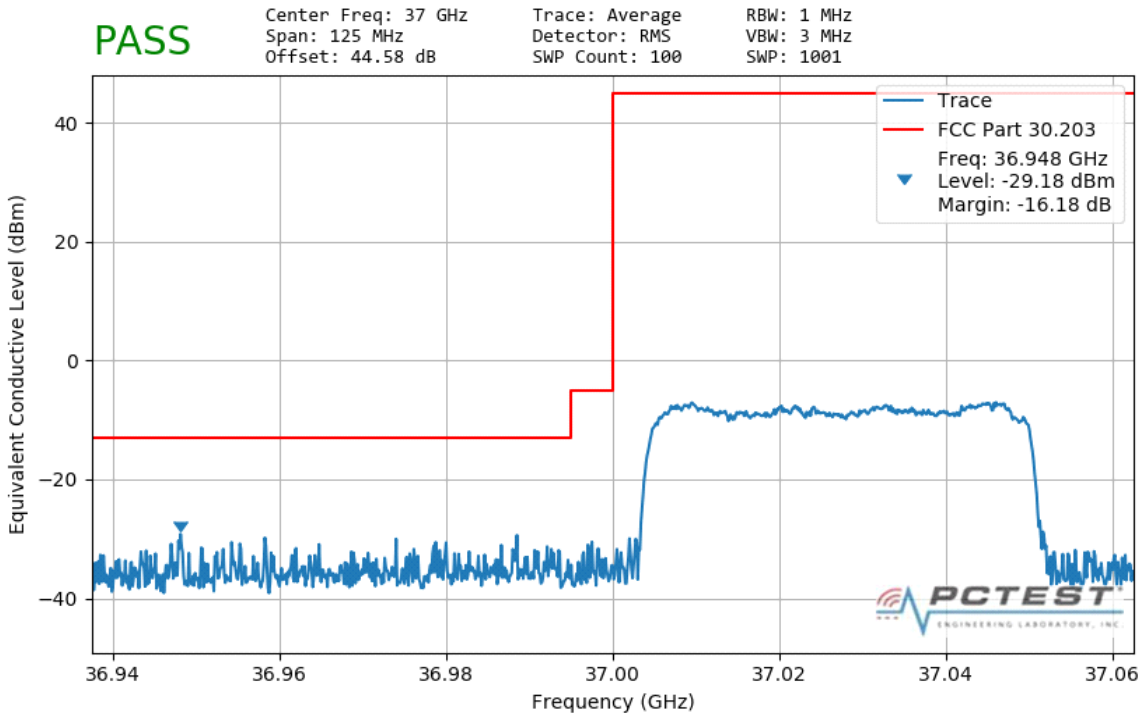


Plot 7-198. Ant3 Lower Band Edge (50MHz-1CC – QPSK Full RB)

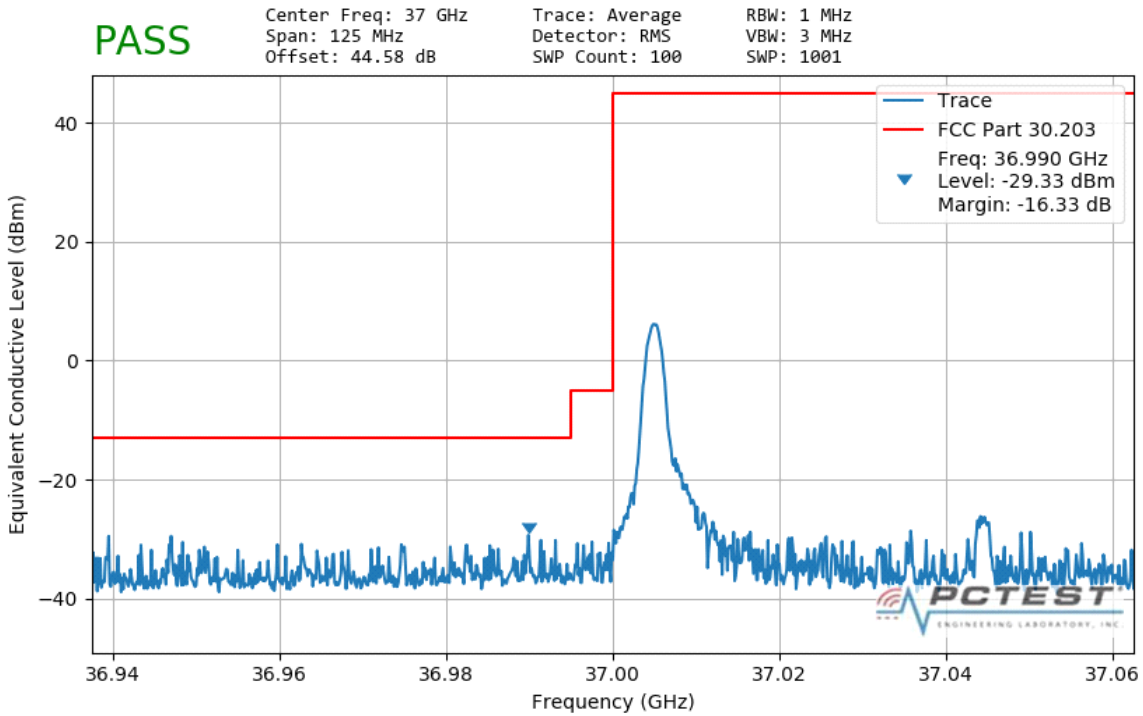


Plot 7-199. Ant3 Lower Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 193 of 210

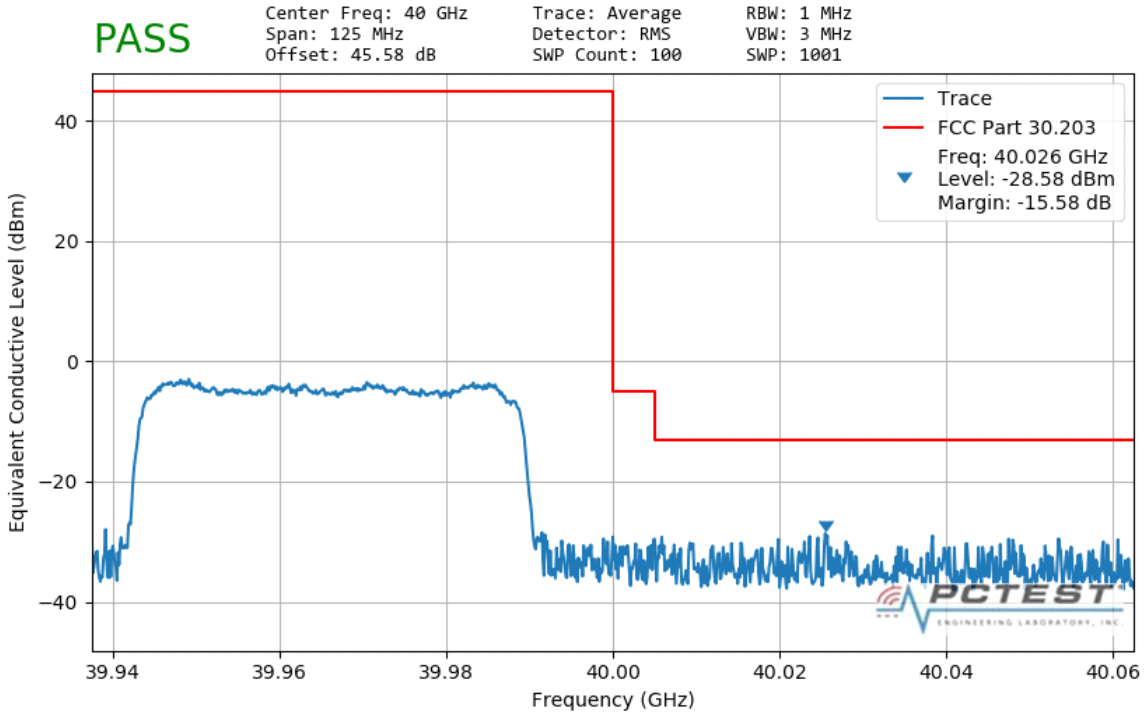


Plot 7-200. Ant3 Upper Band Edge (50MHz-1CC – QPSK Full RB)

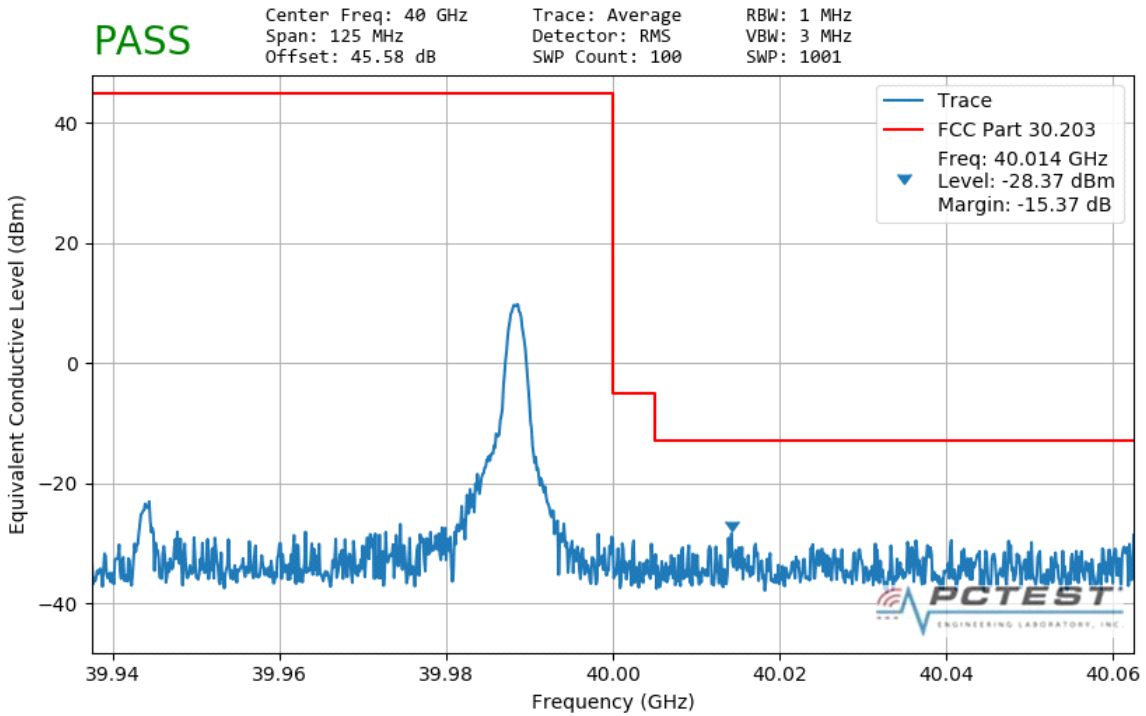


Plot 7-201. Ant3 Upper Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 194 of 210

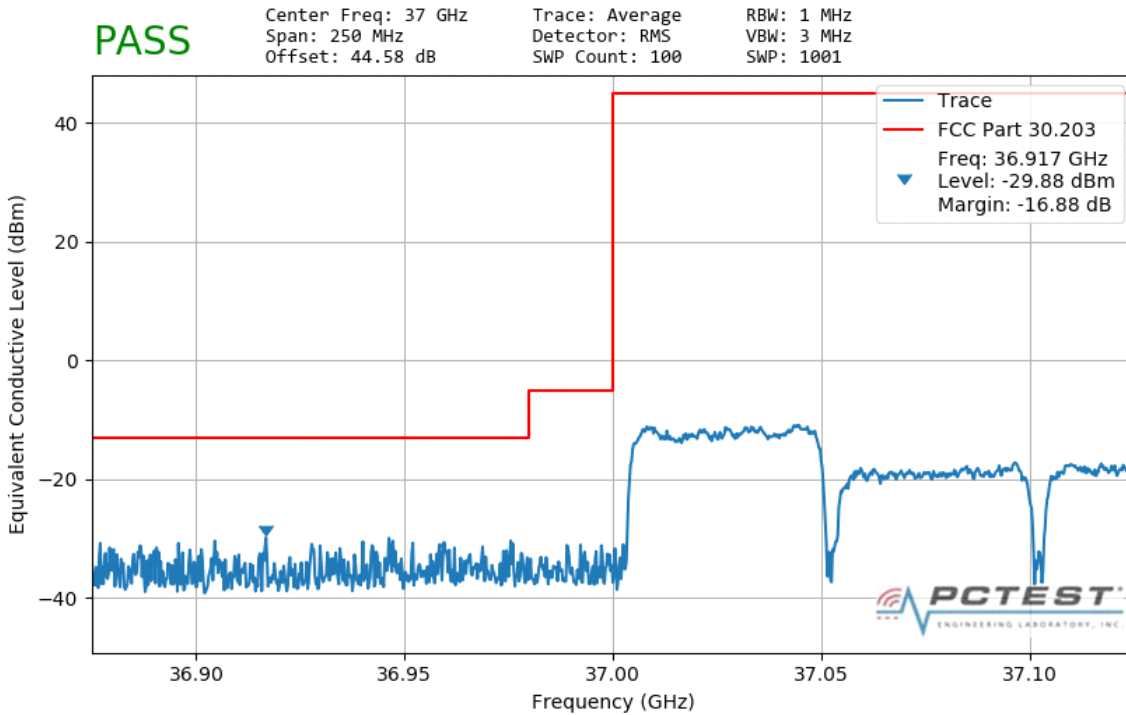


Plot 7-202. Ant3 Lower Band Edge (50MHz-4CC – QPSK Full RB)

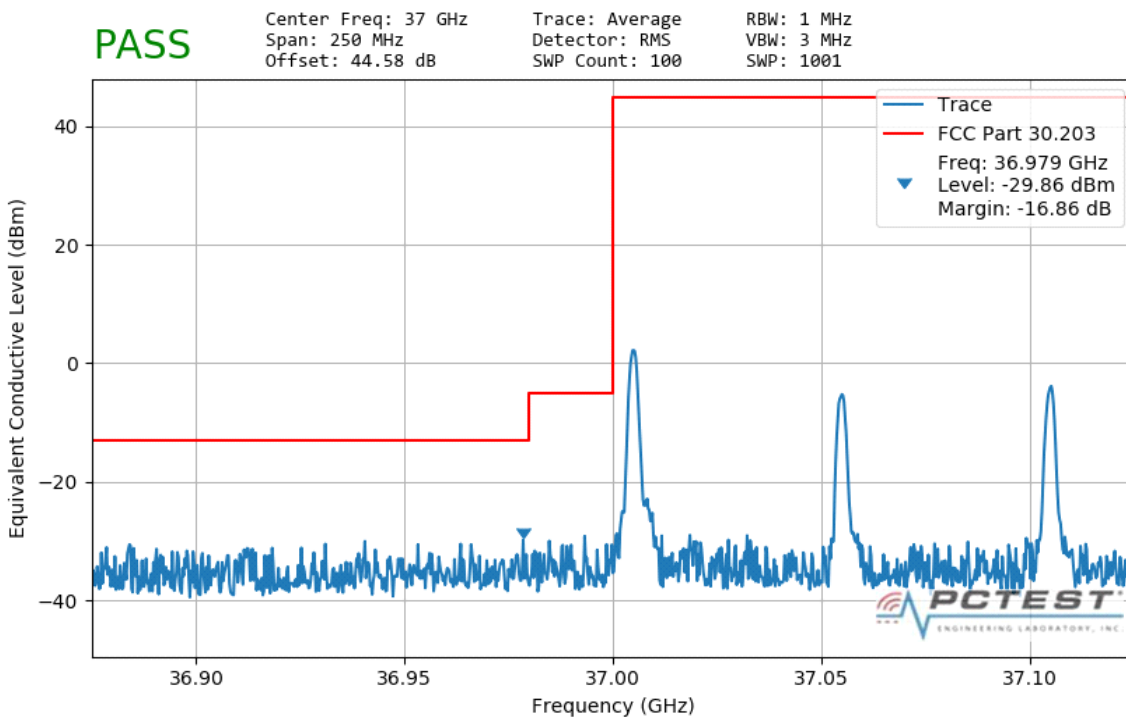


Plot 7-203. Ant3 Lower Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 195 of 210

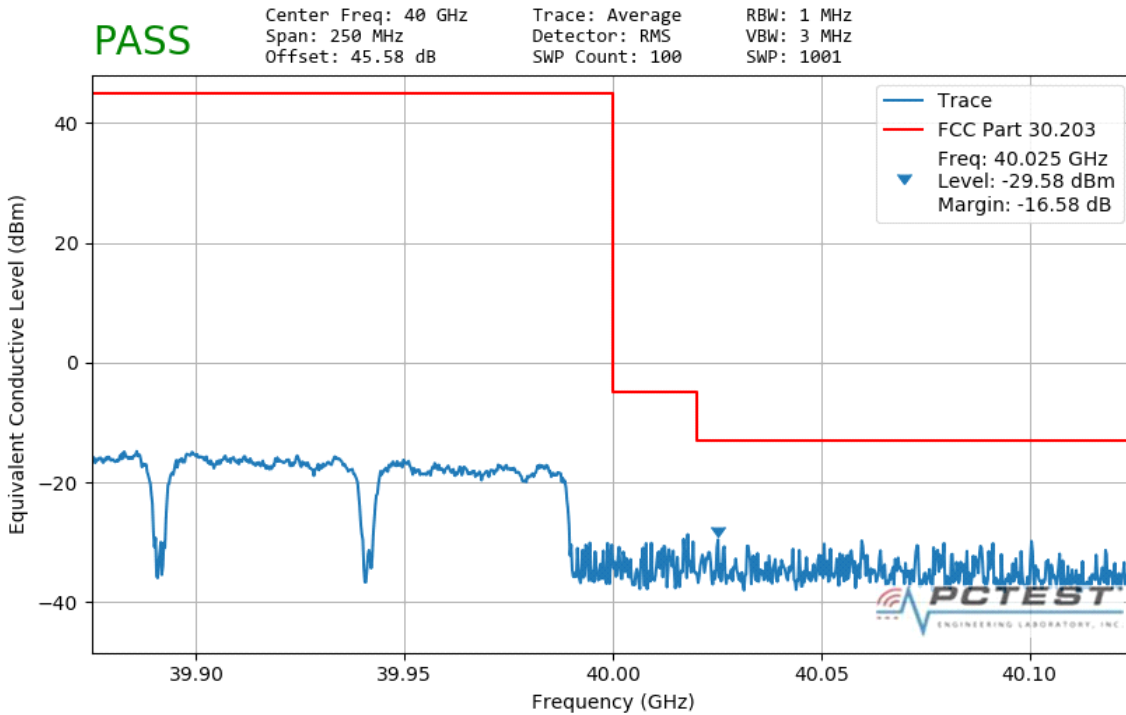

Plot 7-204. Ant3 Upper Band Edge (50MHz-4CC – QPSK Full RB)

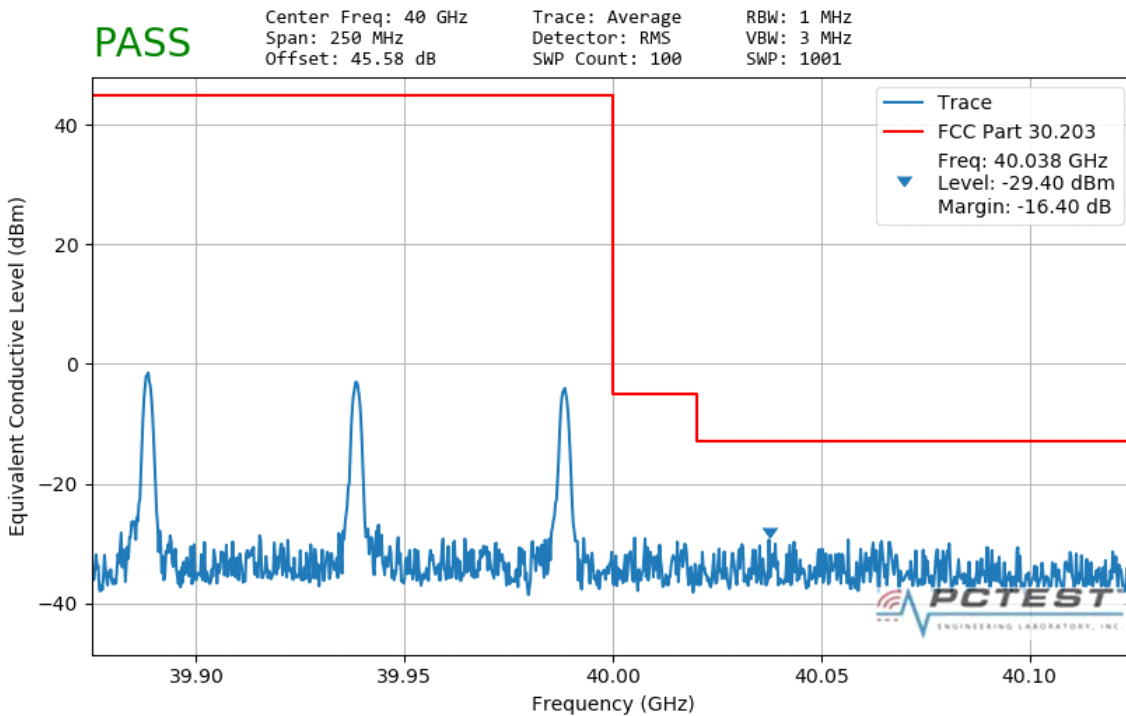

Plot 7-205. Ant3 Upper Band Edge (50MHz-4CC – QPSK 1 RB)

FCC ID: ZNFV600VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250199-06.ZNF	Test Dates: 11/25/2019-1/17/2020	EUT Type: Portable Handset		Page 196 of 210