


Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

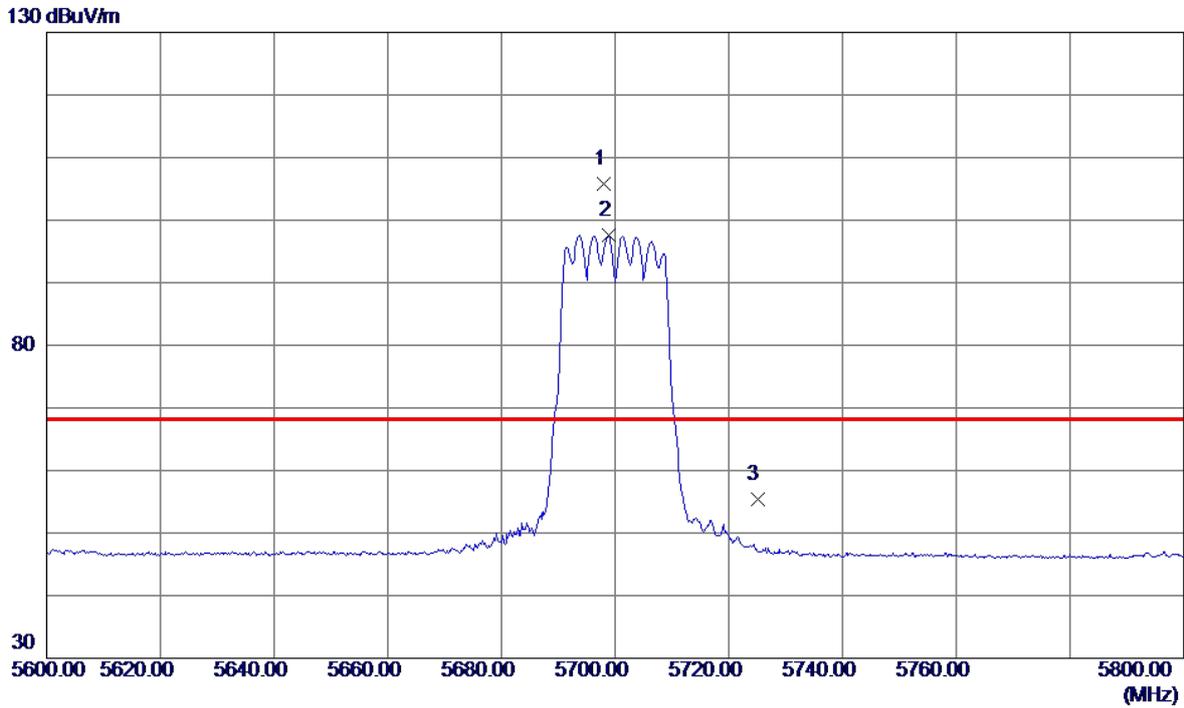


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5698.0000	89.01	16.78	105.79	68.20	37.59	Peak	No Limit
2	5698.8000	80.86	16.78	97.64	999.00	-901.36	AVG	No Limit
3	5725.0000	38.58	16.80	55.38	68.20	-12.82	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

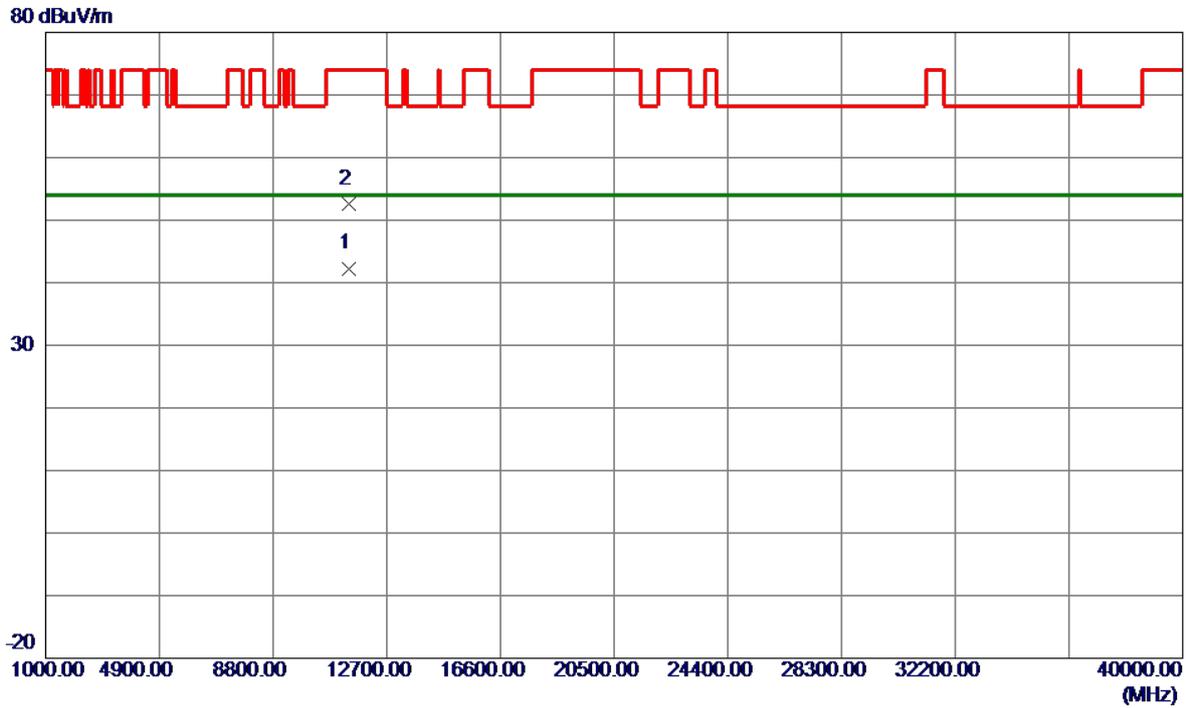


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0900	27.82	14.48	42.30	54.00	-11.70	AVG	
2	11400.2600	38.12	14.48	52.60	74.00	-21.40	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

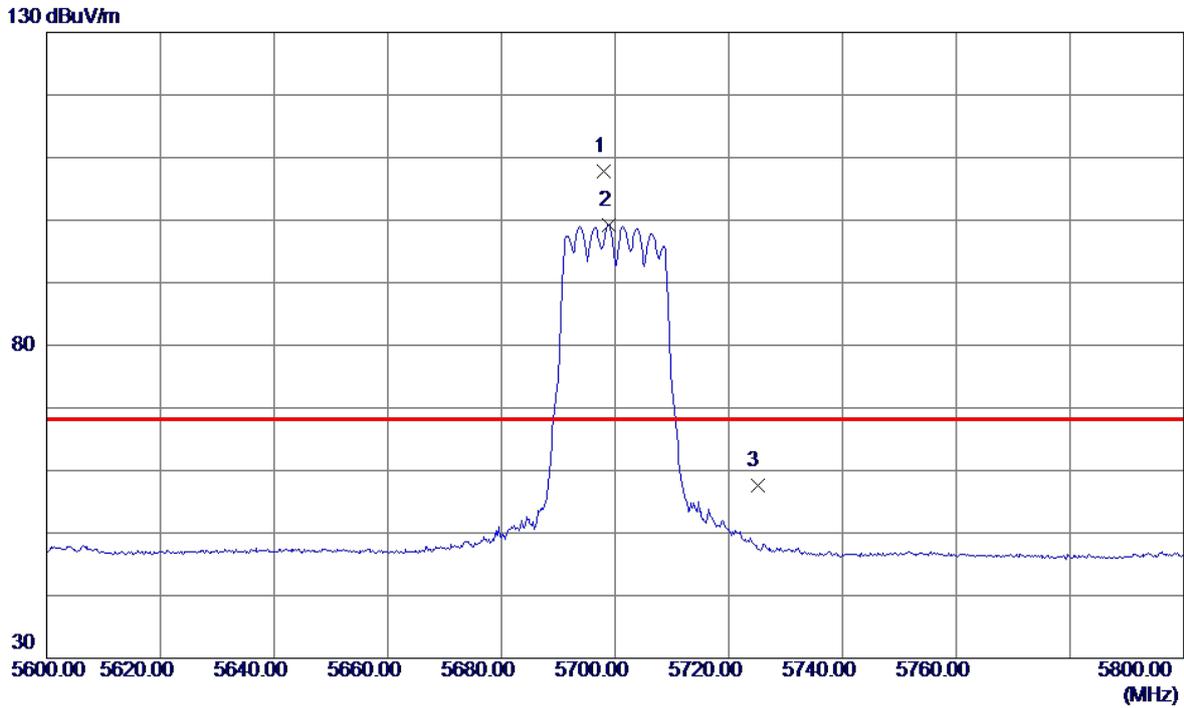

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5698.0000	90.99	16.78	107.77	68.20	39.57	Peak	No Limit
2	5698.8000	82.46	16.78	99.24	999.00	-899.76	AVG	No Limit
3	5725.0000	40.81	16.80	57.61	68.20	-10.59	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.5400	25.92	14.48	40.40	54.00	-13.60	AVG	
2	11400.6900	36.55	14.48	51.03	74.00	-22.97	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

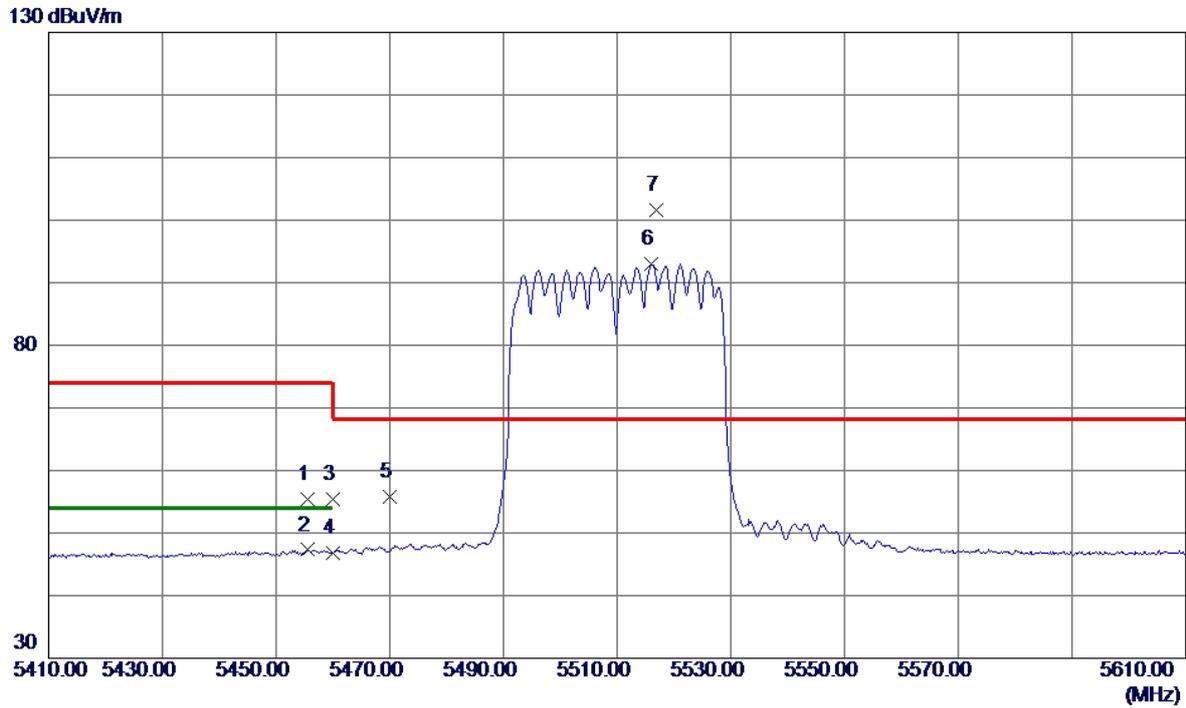


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5455.6000	38.80	16.62	55.42	74.00	-18.58	Peak	
2	5455.6000	30.68	16.62	47.30	54.00	-6.70	AVG	
3	5460.0000	38.82	16.62	55.44	74.00	-18.56	Peak	
4	5460.0000	30.09	16.62	46.71	54.00	-7.29	AVG	
5	5470.0000	39.11	16.63	55.74	68.20	-12.46	Peak	
6	5516.0000	76.28	16.67	92.95	999.00	-906.05	AVG	No Limit
7 *	5516.8000	84.85	16.67	101.52	68.20	33.32	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

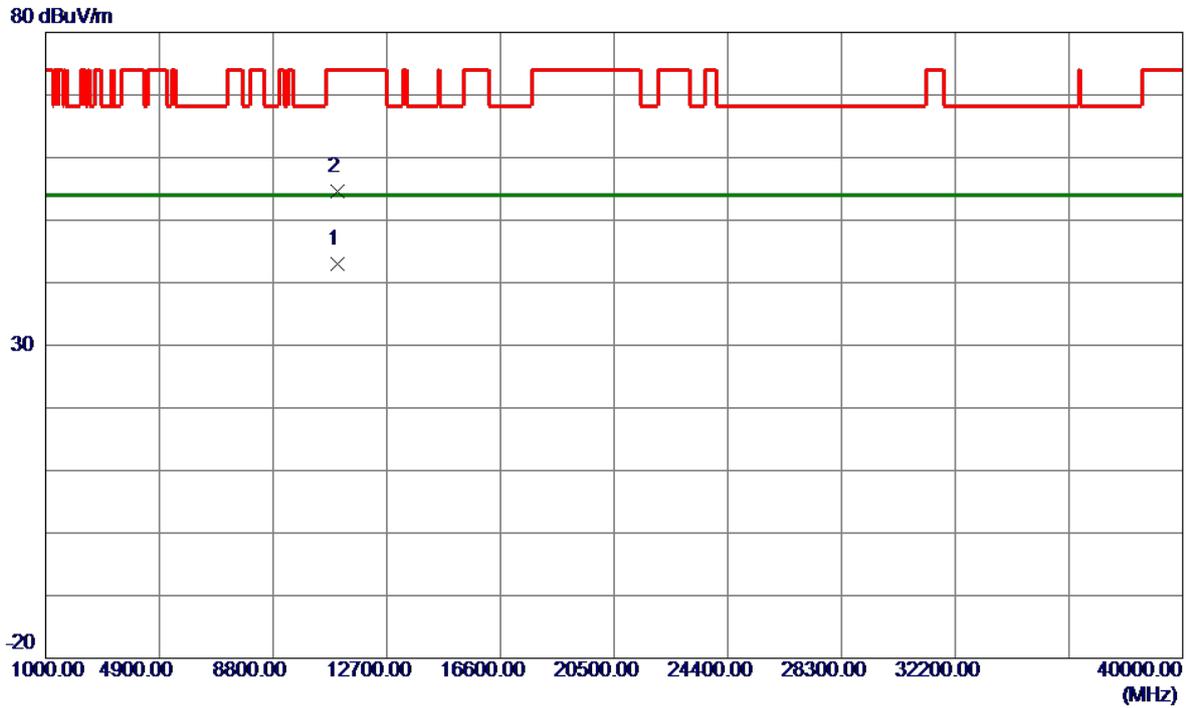


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.4300	29.17	13.82	42.99	54.00	-11.01	AVG	
2	11020.7650	40.76	13.82	54.58	74.00	-19.42	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

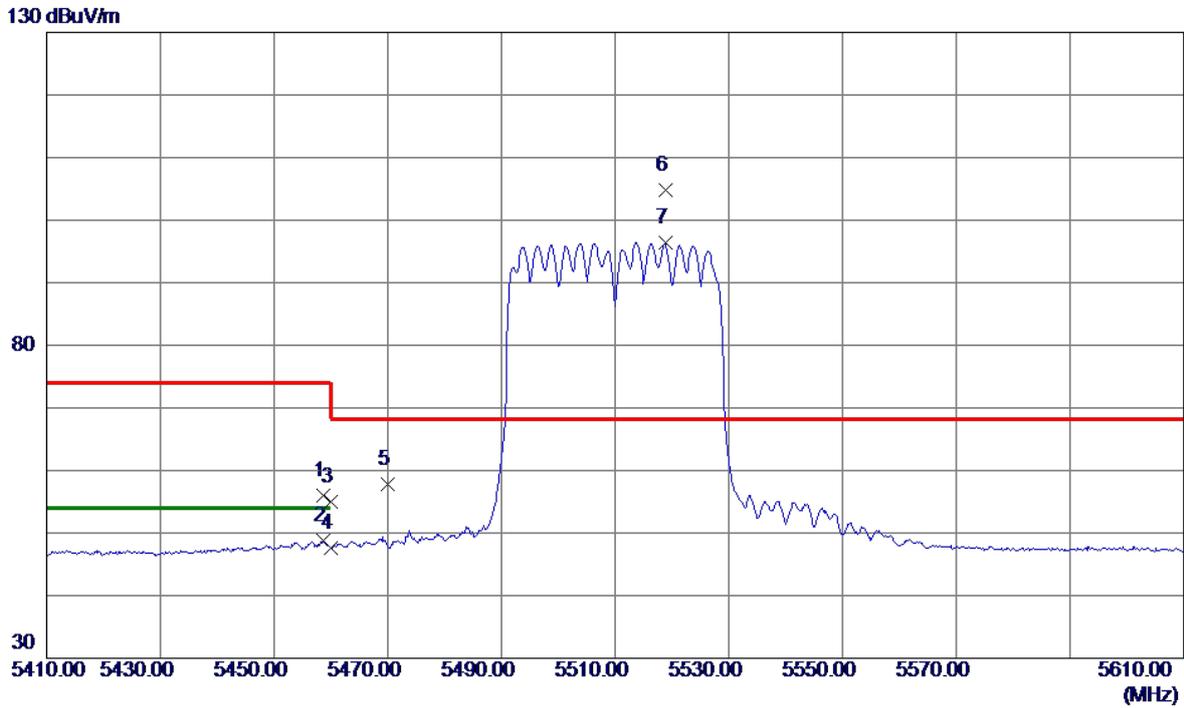

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.6000	39.44	16.62	56.06	74.00	-17.94	Peak	
2	5458.6000	32.11	16.62	48.73	54.00	-5.27	AVG	
3	5460.0000	38.30	16.62	54.92	74.00	-19.08	Peak	
4	5460.0000	30.94	16.62	47.56	54.00	-6.44	AVG	
5	5470.0000	41.12	16.63	57.75	68.20	-10.45	Peak	
6 *	5518.8000	88.13	16.68	104.81	68.20	36.61	Peak	No Limit
7	5518.8000	79.67	16.68	96.35	999.00	-902.65	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.6700	39.32	13.82	53.14	74.00	-20.86	Peak	
2 *	11020.9450	27.11	13.82	40.93	54.00	-13.07	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

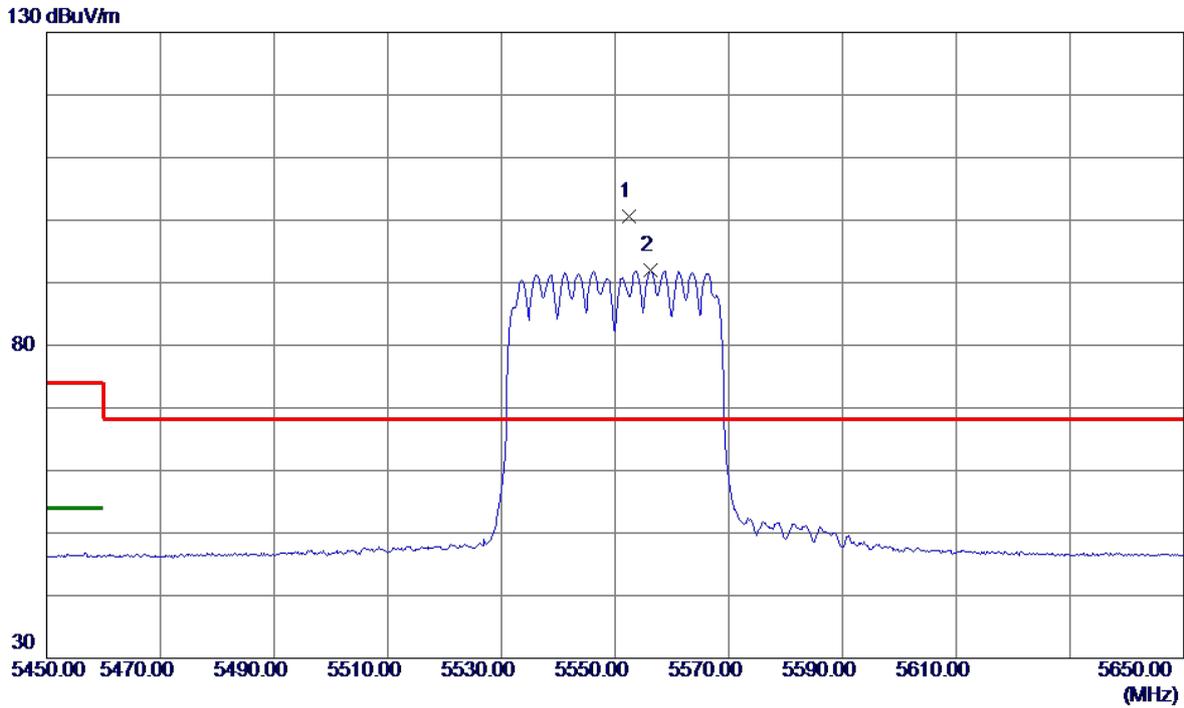


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5552.4000	83.99	16.70	100.69	68.20	32.49	Peak	No Limit
2	5556.2000	75.20	16.70	91.90	999.00	-907.10	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

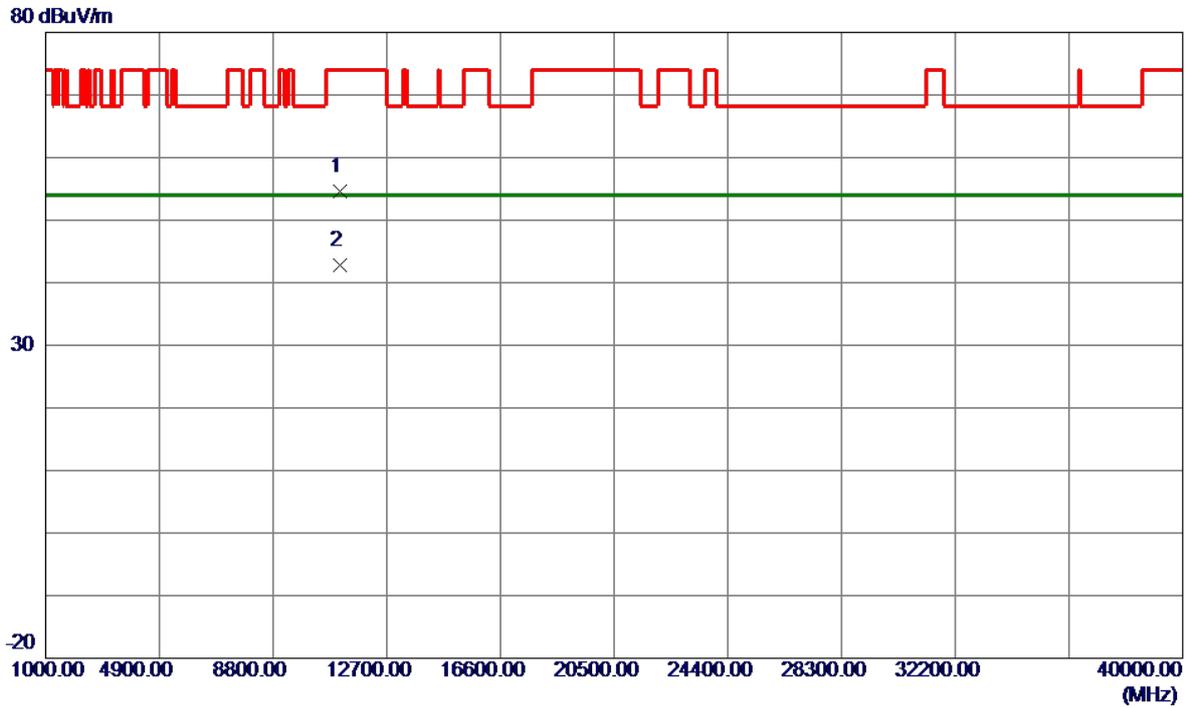


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.3250	40.69	13.96	54.65	74.00	-19.35	Peak	
2 *	11100.4150	28.86	13.96	42.82	54.00	-11.18	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

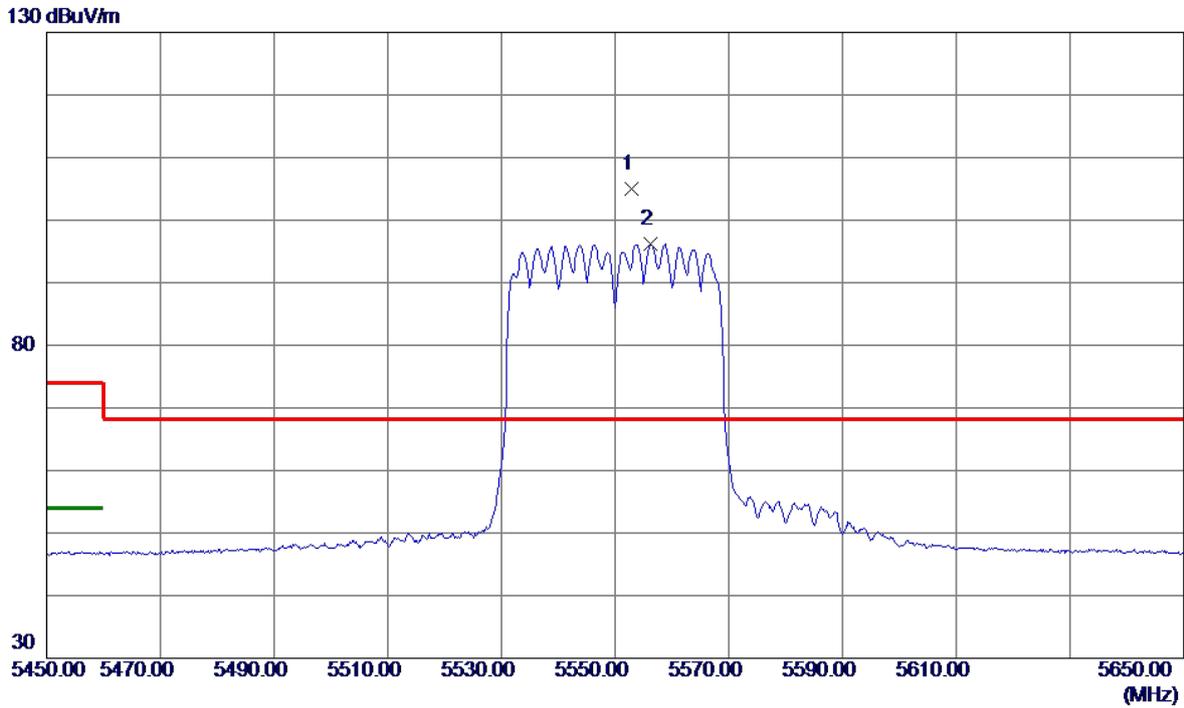


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5552.8000	88.28	16.70	104.98	68.20	36.78	Peak	No Limit
2	5556.2000	79.56	16.70	96.26	999.00	-902.74	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

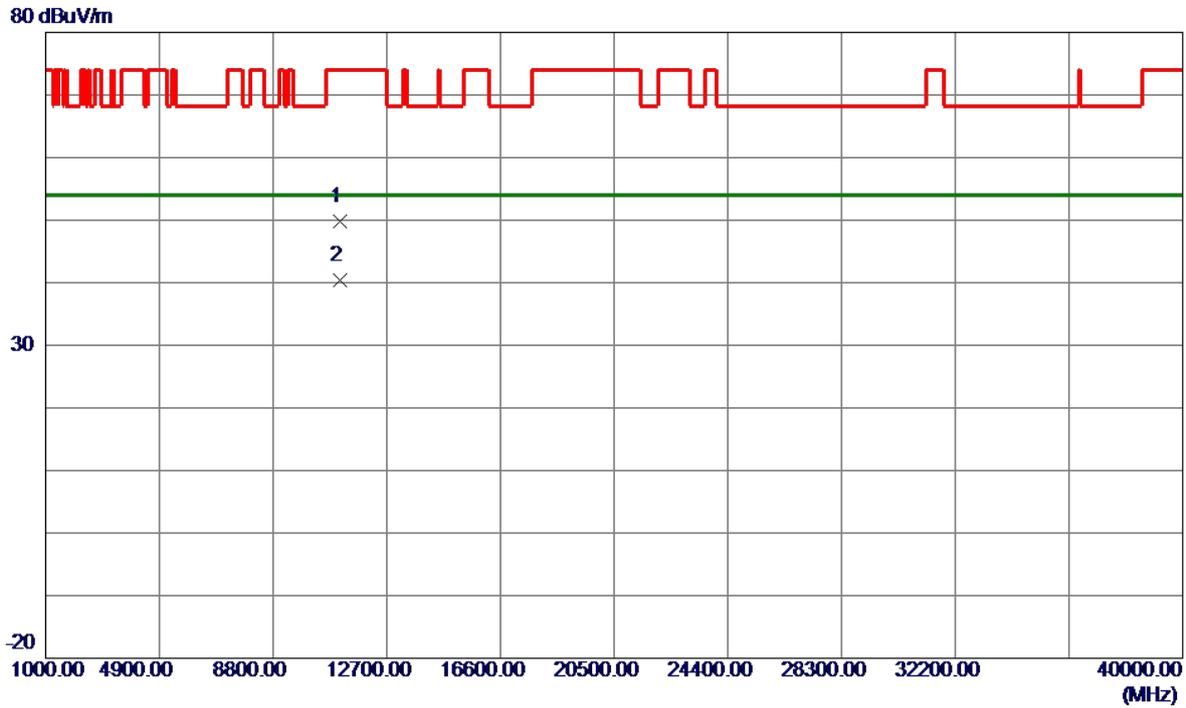


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.1750	35.86	13.96	49.82	74.00	-24.18	Peak	
2 *	11100.9150	26.52	13.96	40.48	54.00	-13.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

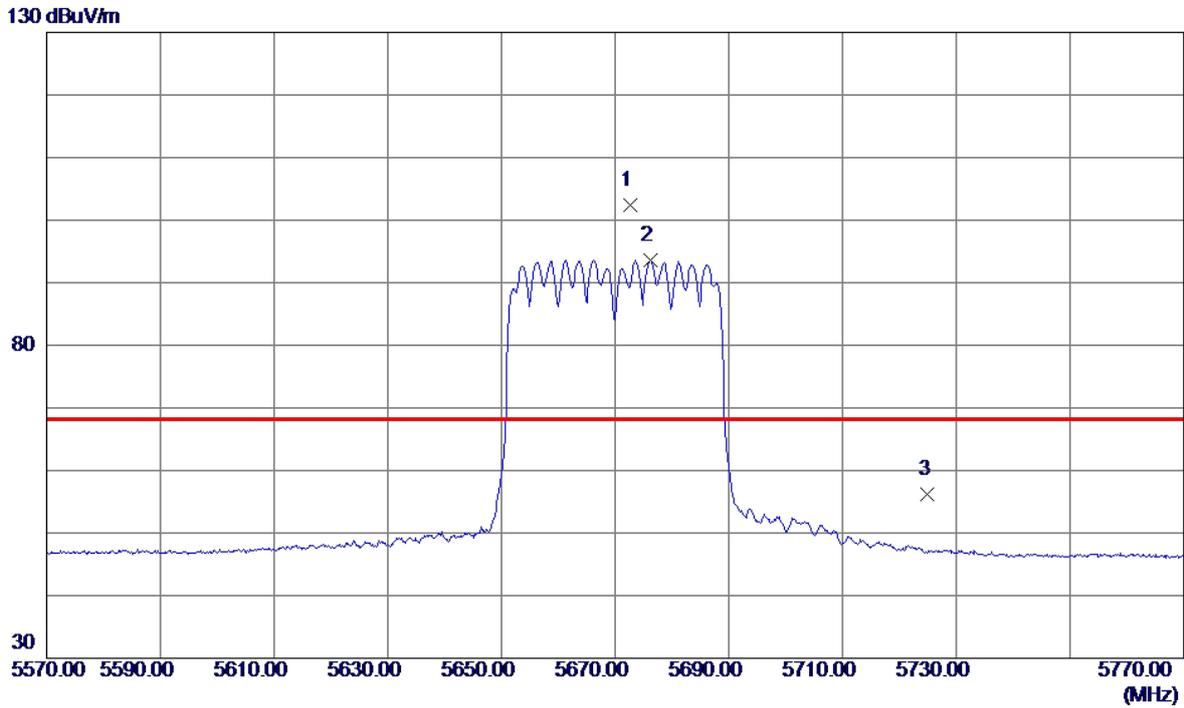


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5672.6000	85.65	16.77	102.42	68.20	34.22	Peak	No Limit
2	5676.2000	76.84	16.77	93.61	999.00	-905.39	AVG	No Limit
3	5725.0000	39.41	16.80	56.21	68.20	-11.99	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

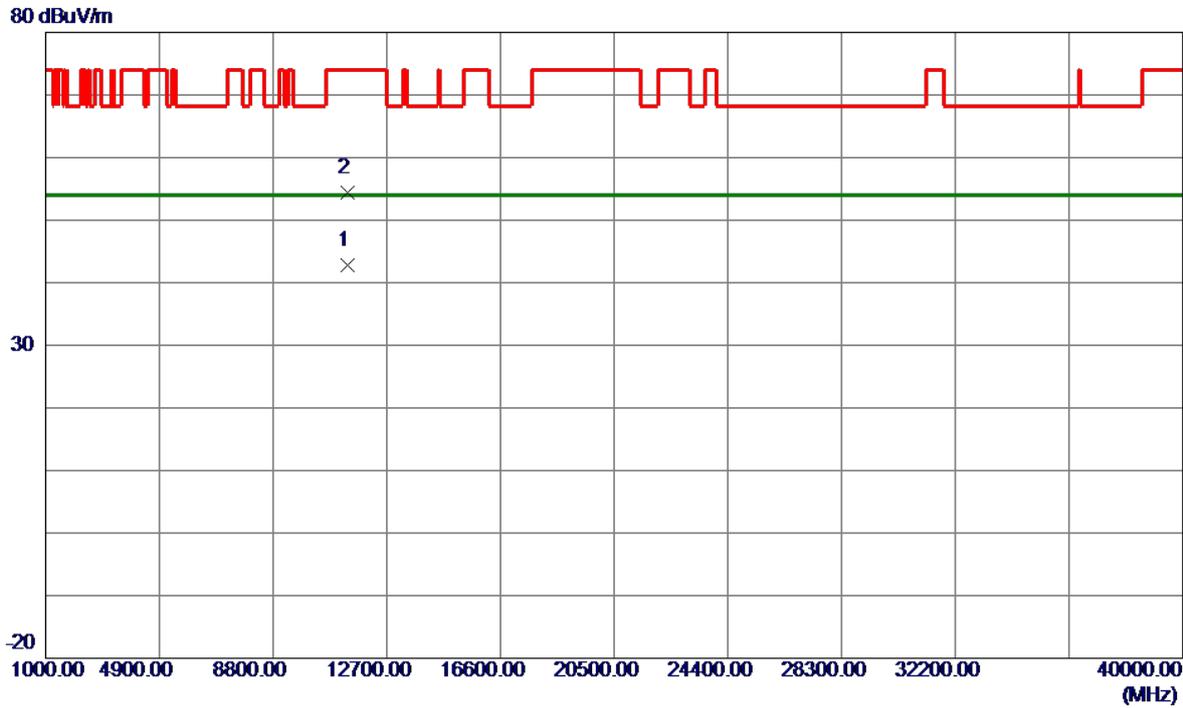


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.2100	28.39	14.38	42.77	54.00	-11.23	AVG	
2	11340.4250	39.99	14.38	54.37	74.00	-19.63	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

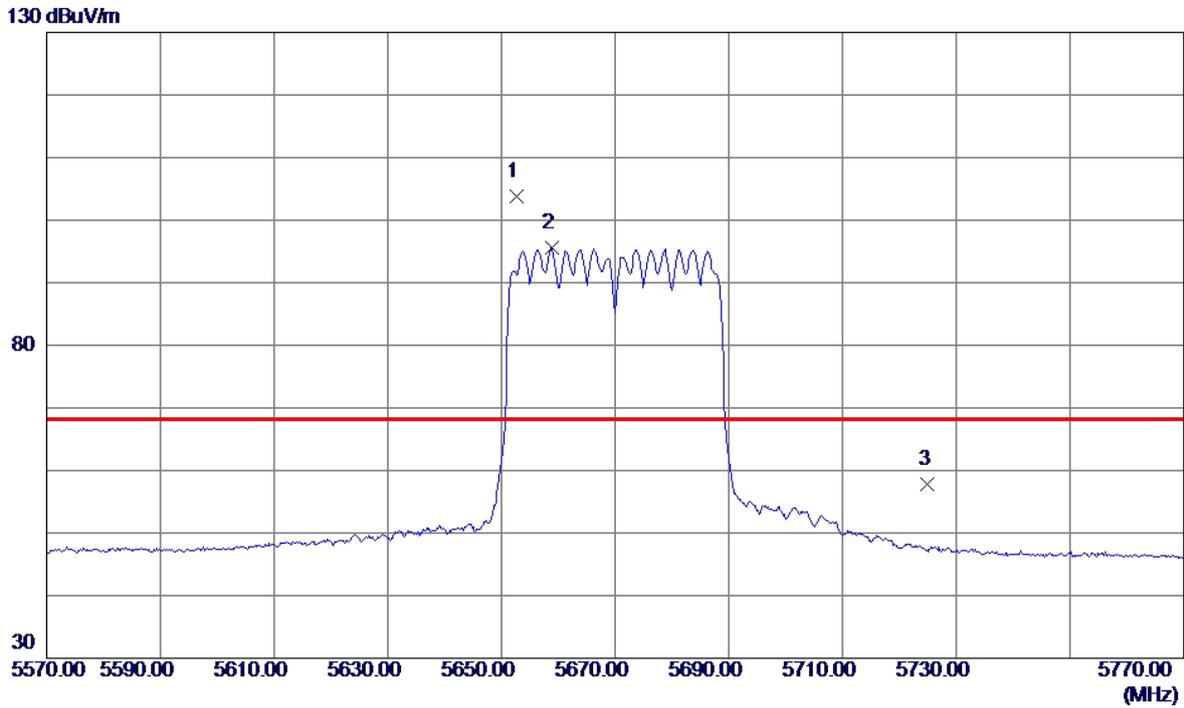


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5652.6000	87.04	16.76	103.80	68.20	35.60	Peak	No Limit
2	5658.8000	78.78	16.76	95.54	999.00	-903.46	AVG	No Limit
3	5725.0000	40.99	16.80	57.79	68.20	-10.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

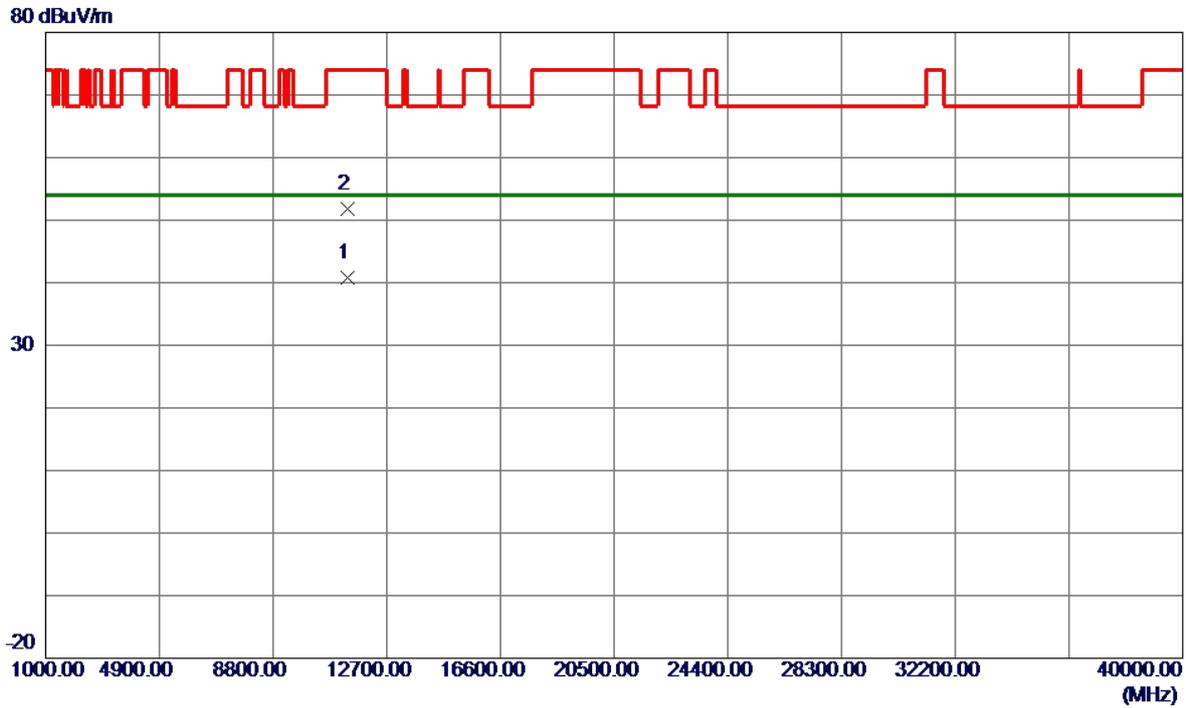


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.4050	26.37	14.38	40.75	54.00	-13.25	AVG	
2	11340.7600	37.37	14.38	51.75	74.00	-22.25	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

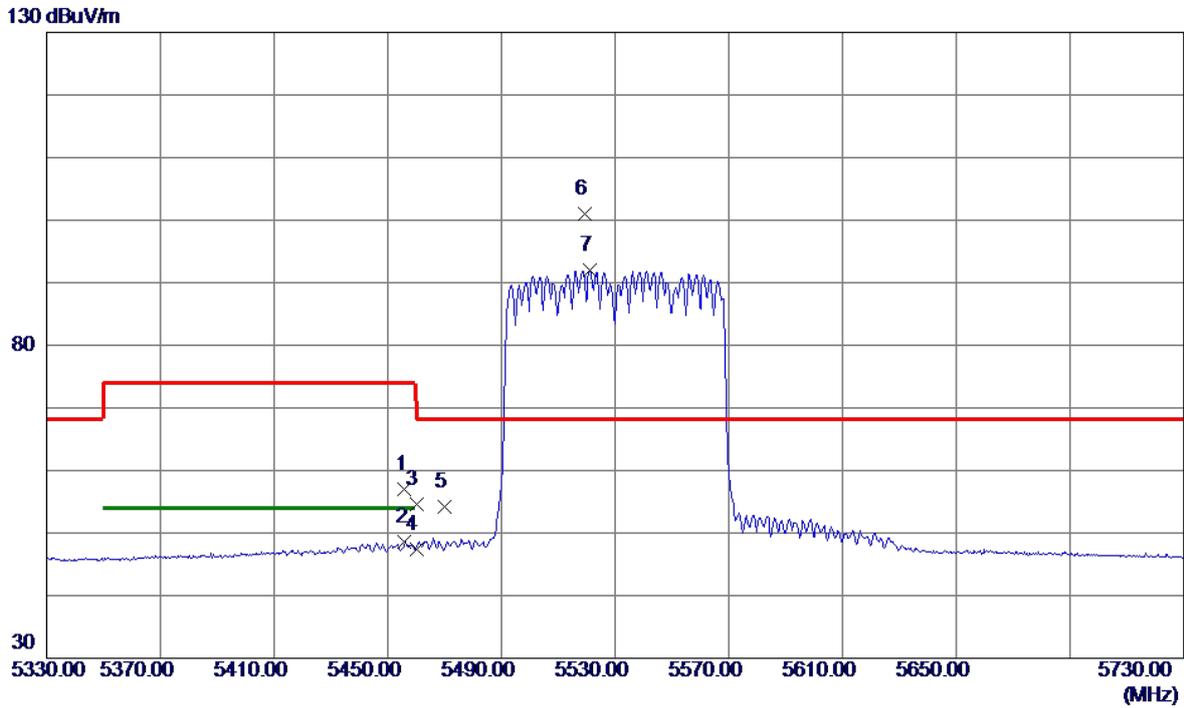


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.0000	40.43	16.62	57.05	74.00	-16.95	Peak	
2	5456.0000	32.02	16.62	48.64	54.00	-5.36	AVG	
3	5460.0000	38.07	16.62	54.69	74.00	-19.31	Peak	
4	5460.0000	30.81	16.62	47.43	54.00	-6.57	AVG	
5	5470.0000	37.53	16.63	54.16	68.20	-14.04	Peak	
6 *	5519.2000	84.33	16.68	101.01	68.20	32.81	Peak	No Limit
7	5521.2000	75.39	16.68	92.07	999.00	-906.93	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

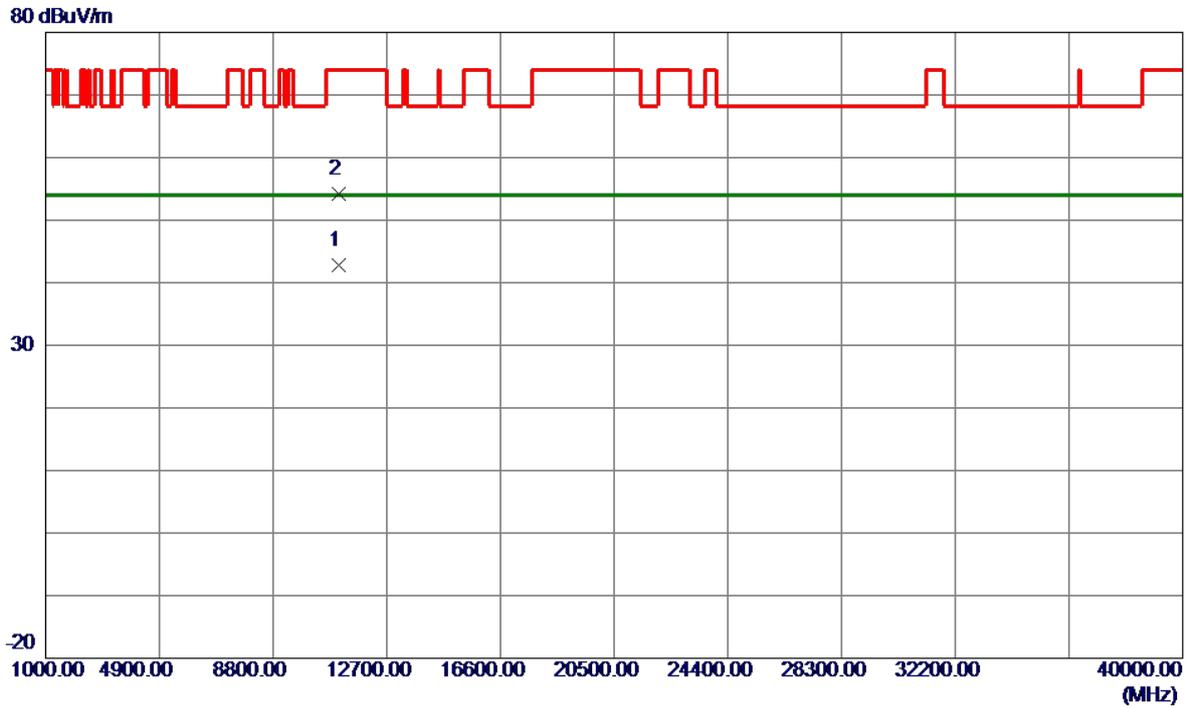


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.2500	29.00	13.89	42.89	54.00	-11.11	AVG	
2	11060.8650	40.30	13.89	54.19	74.00	-19.81	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

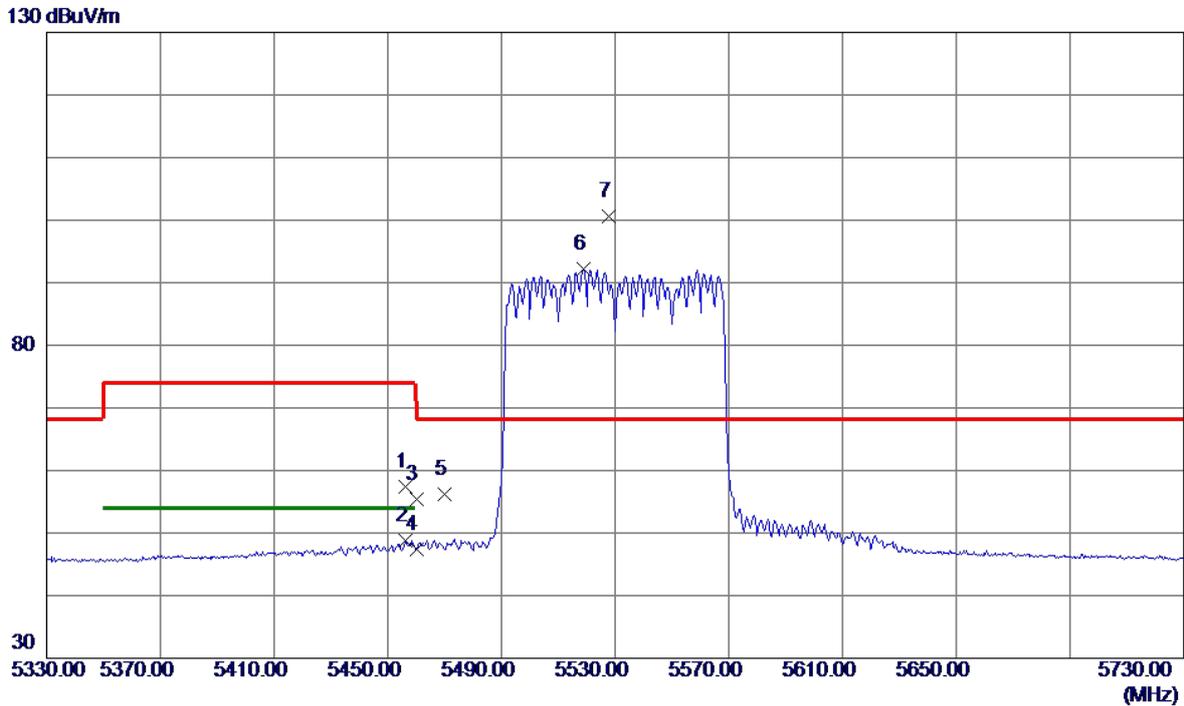


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.4000	40.70	16.62	57.32	74.00	-16.68	Peak	
2	5456.4000	32.14	16.62	48.76	54.00	-5.24	AVG	
3	5460.0000	38.71	16.62	55.33	74.00	-18.67	Peak	
4	5460.0000	30.69	16.62	47.31	54.00	-6.69	AVG	
5	5470.0000	39.62	16.63	56.25	68.20	-11.95	Peak	
6	5518.8000	75.57	16.68	92.25	999.00	-906.75	AVG	No Limit
7 *	5527.6000	83.94	16.68	100.62	68.20	32.42	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

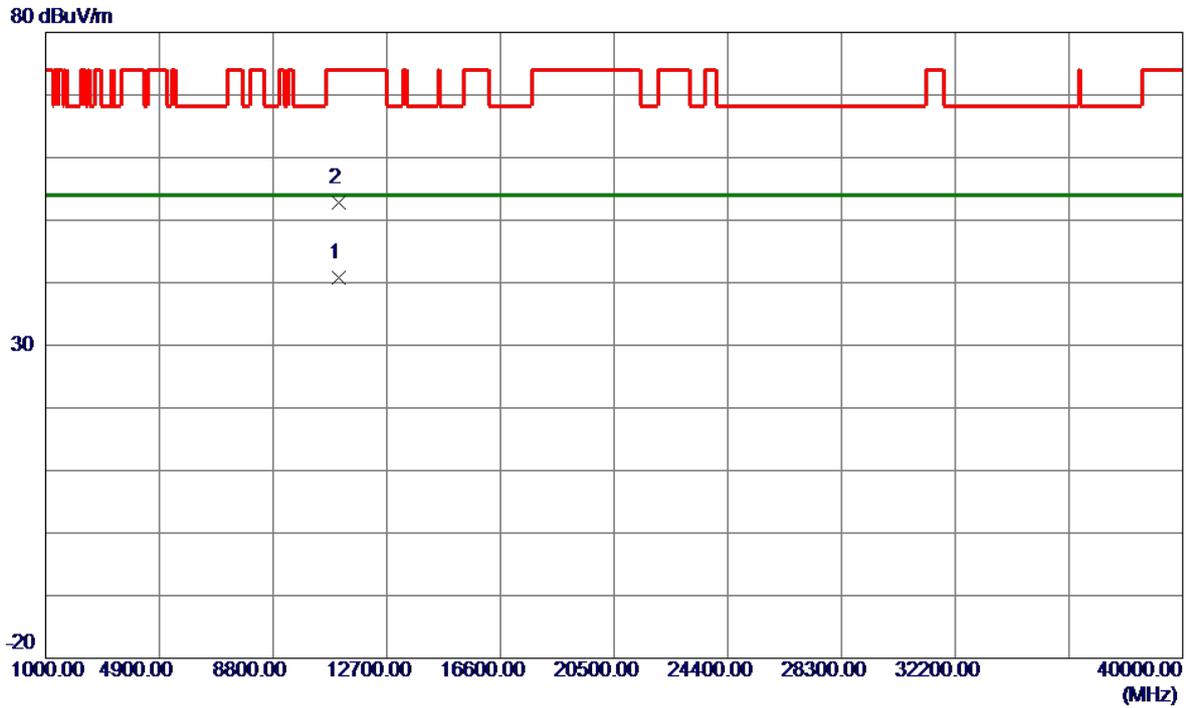


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0850	26.83	13.89	40.72	54.00	-13.28	AVG	
2	11060.1250	38.99	13.89	52.88	74.00	-21.12	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

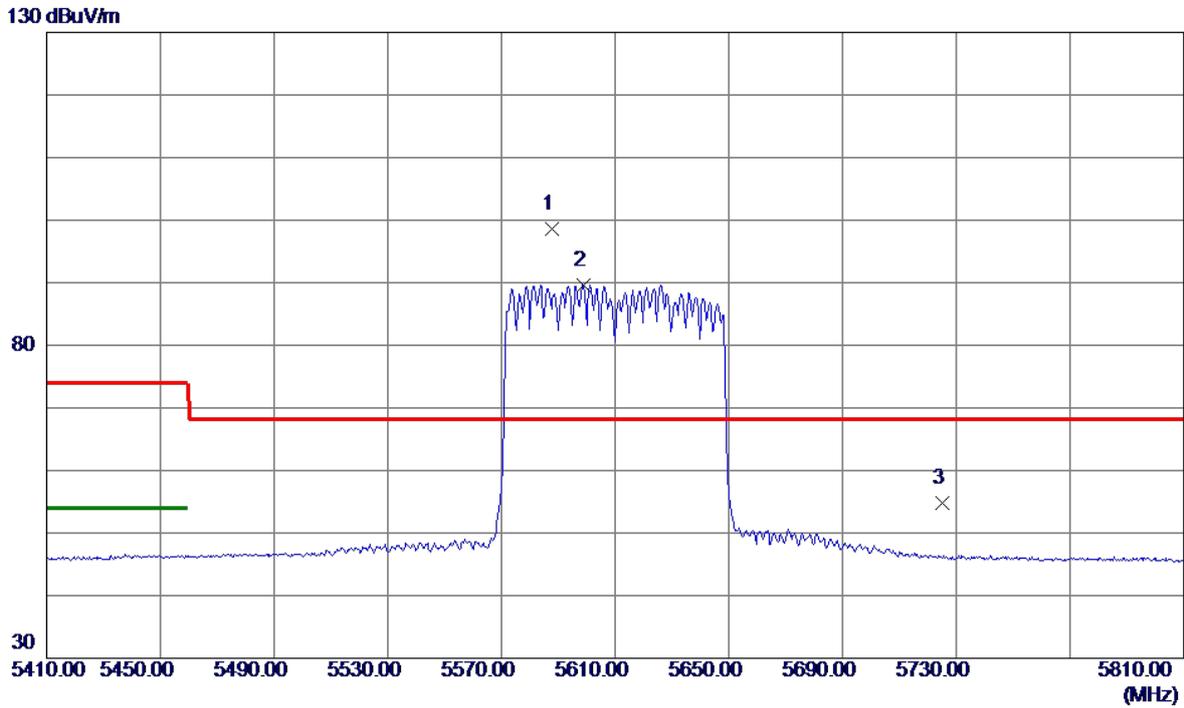


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5587.6000	81.83	16.72	98.55	68.20	30.35	Peak	No Limit
2	5598.8000	72.92	16.72	89.64	999.00	-909.36	AVG	No Limit
3	5725.0000	38.09	16.80	54.89	68.20	-13.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

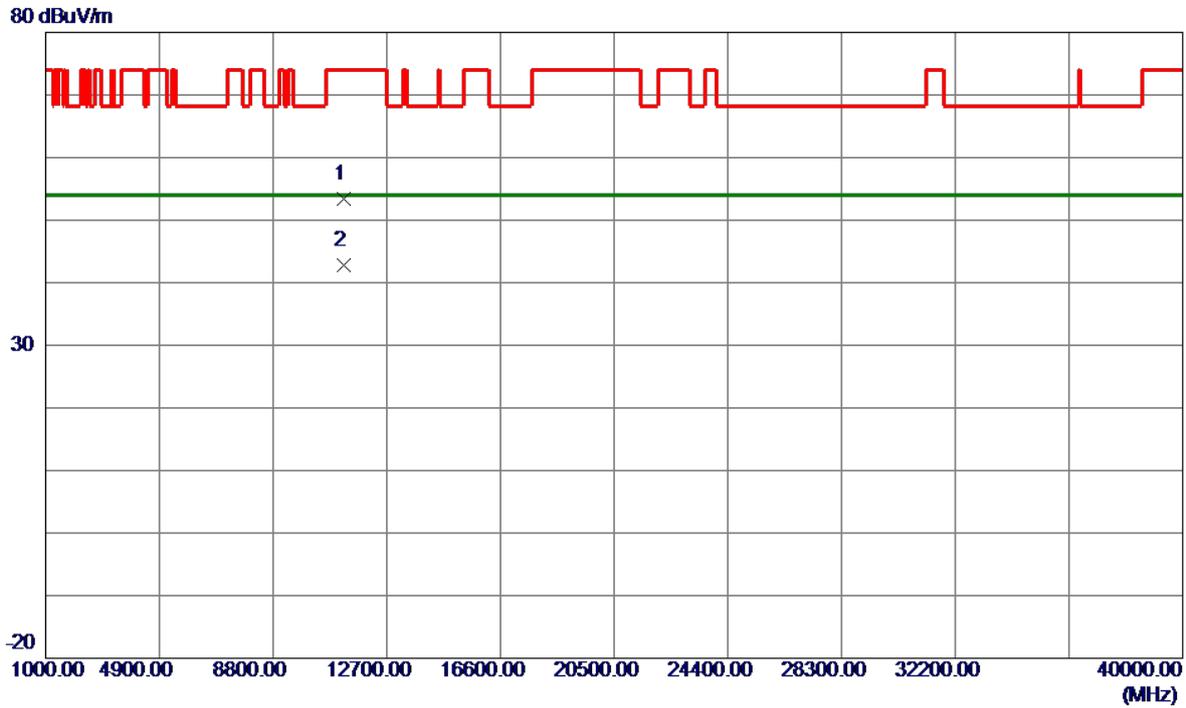


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.2200	39.28	14.17	53.45	74.00	-20.55	Peak	
2 *	11220.2250	28.64	14.17	42.81	54.00	-11.19	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

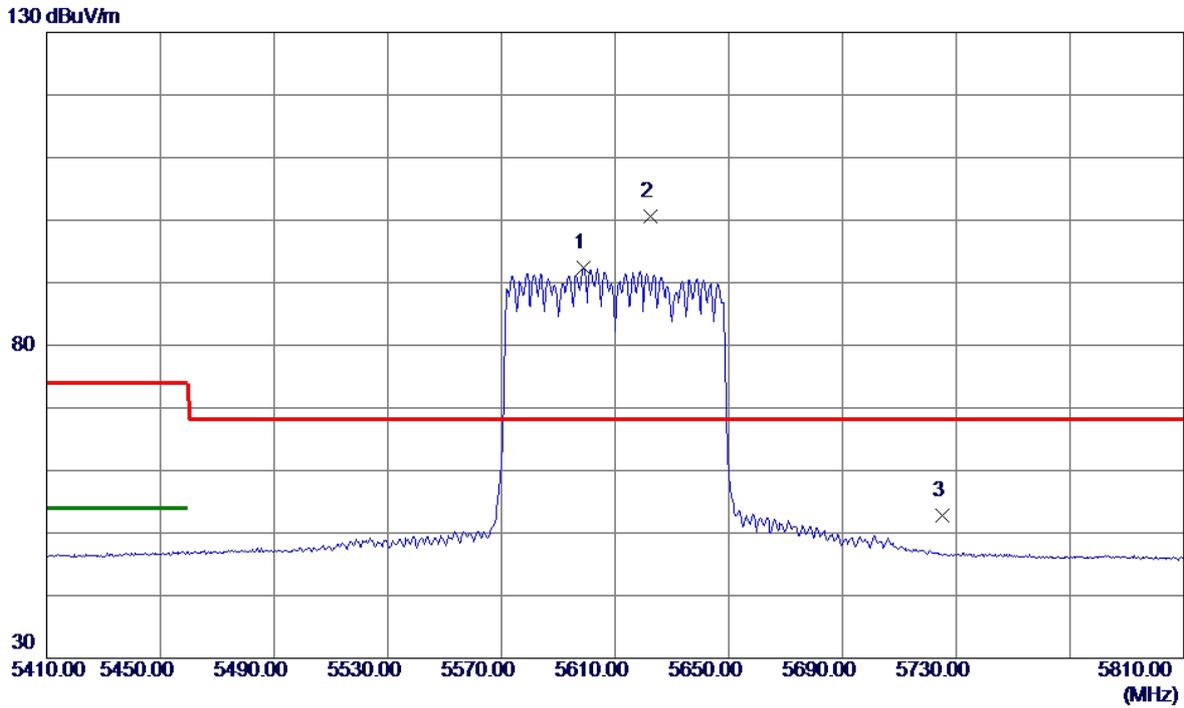


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5598.8000	75.74	16.72	92.46	999.00	-906.54	AVG	No Limit
2 *	5622.4000	83.87	16.74	100.61	68.20	32.41	Peak	No Limit
3	5725.0000	36.01	16.80	52.81	68.20	-15.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

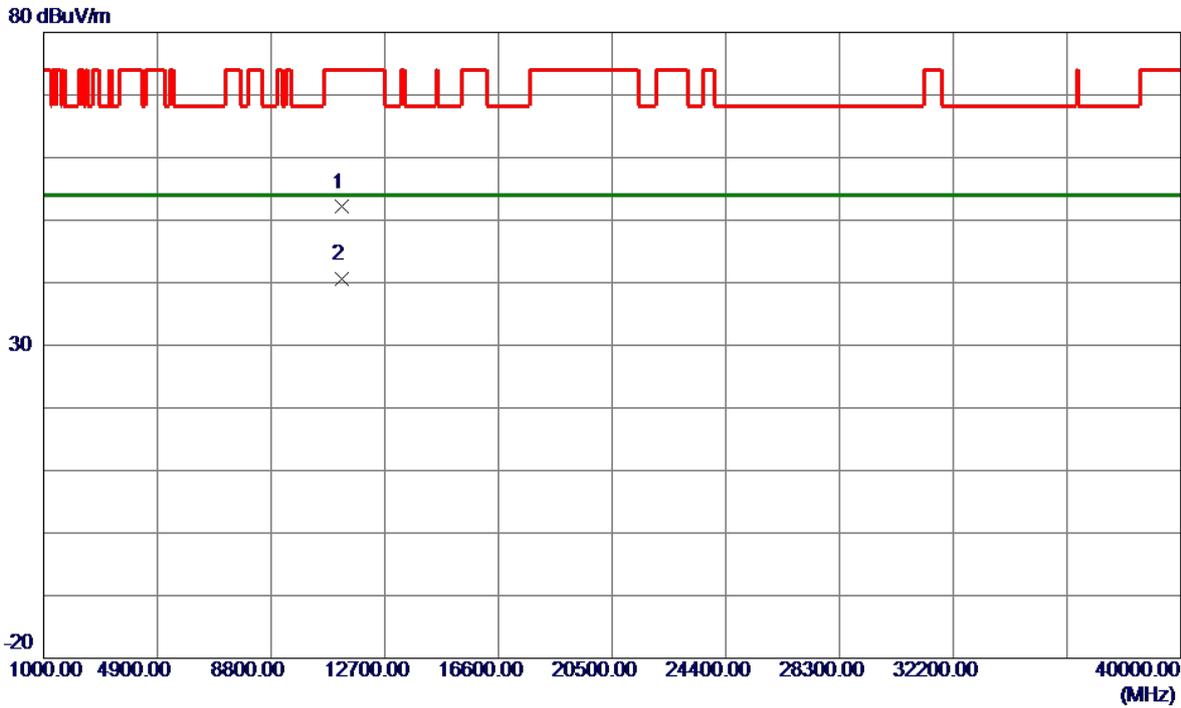


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.0900	37.93	14.17	52.10	74.00	-21.90	Peak	
2 *	11220.7150	26.48	14.17	40.65	54.00	-13.35	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

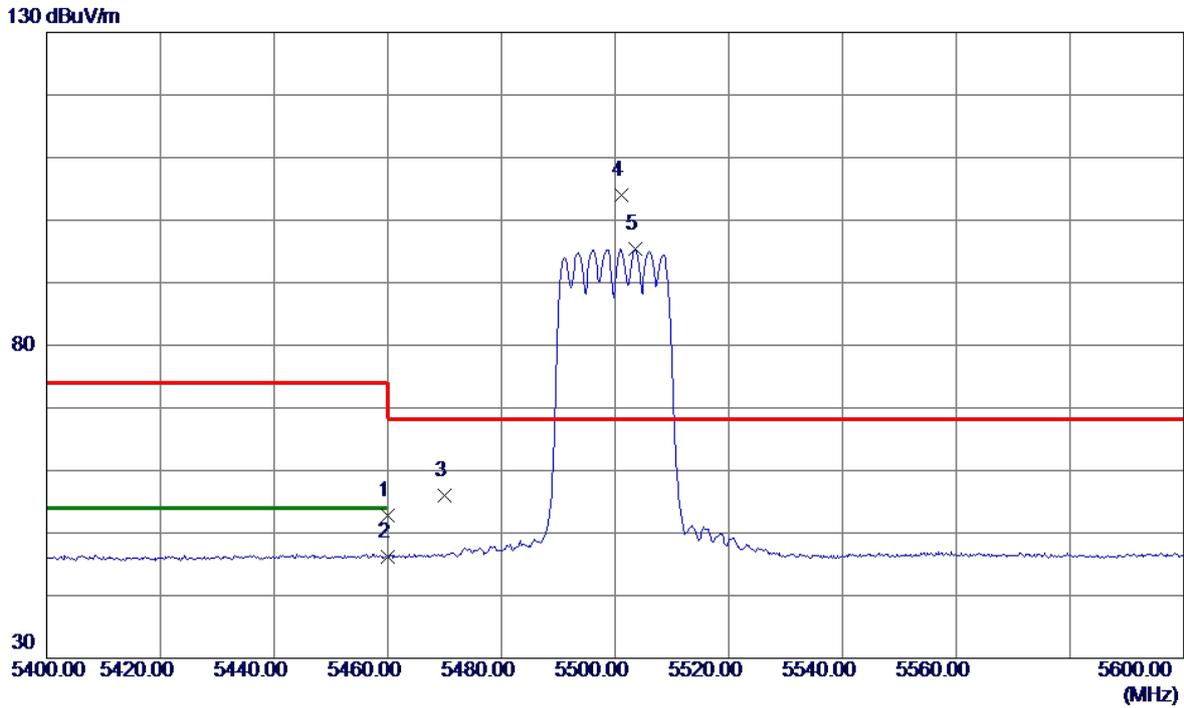


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	36.20	16.62	52.82	74.00	-21.18	Peak	
2	5460.0000	29.50	16.62	46.12	54.00	-7.88	AVG	
3	5470.0000	39.35	16.63	55.98	68.20	-12.22	Peak	
4 *	5501.2000	87.33	16.67	104.00	68.20	35.80	Peak	No Limit
5	5503.6000	78.67	16.67	95.34	999.00	-903.66	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

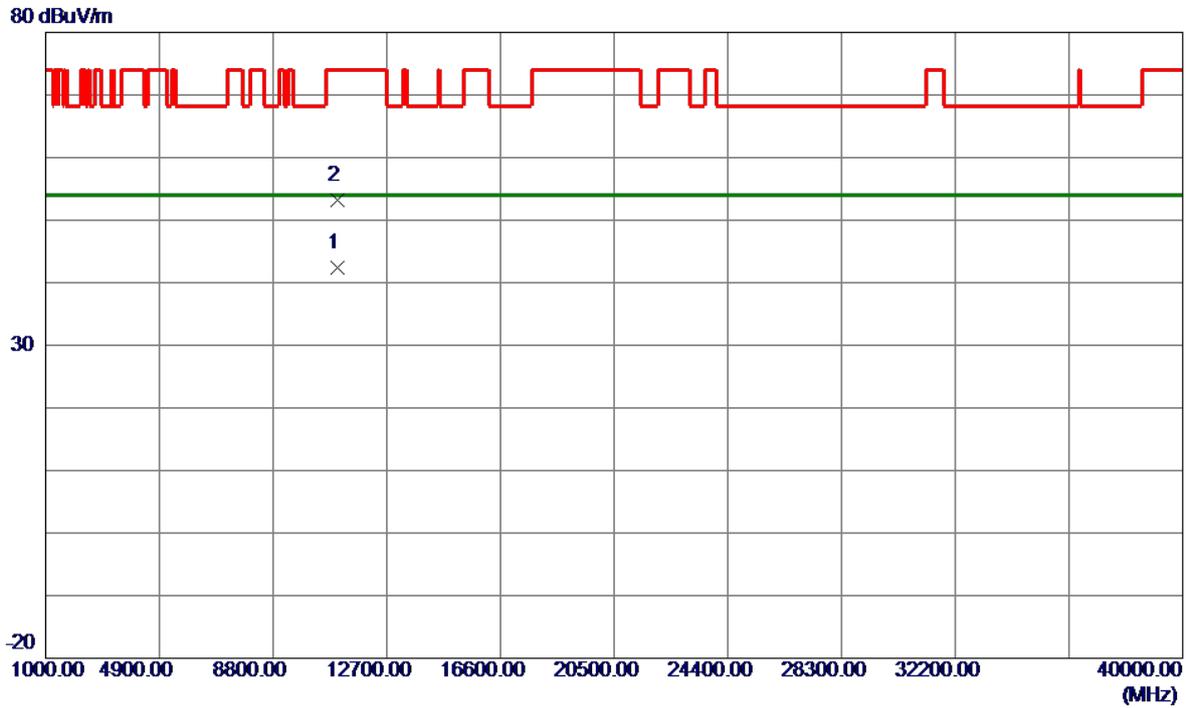


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.1300	28.60	13.78	42.38	54.00	-11.62	AVG	
2	11000.5350	39.51	13.78	53.29	74.00	-20.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

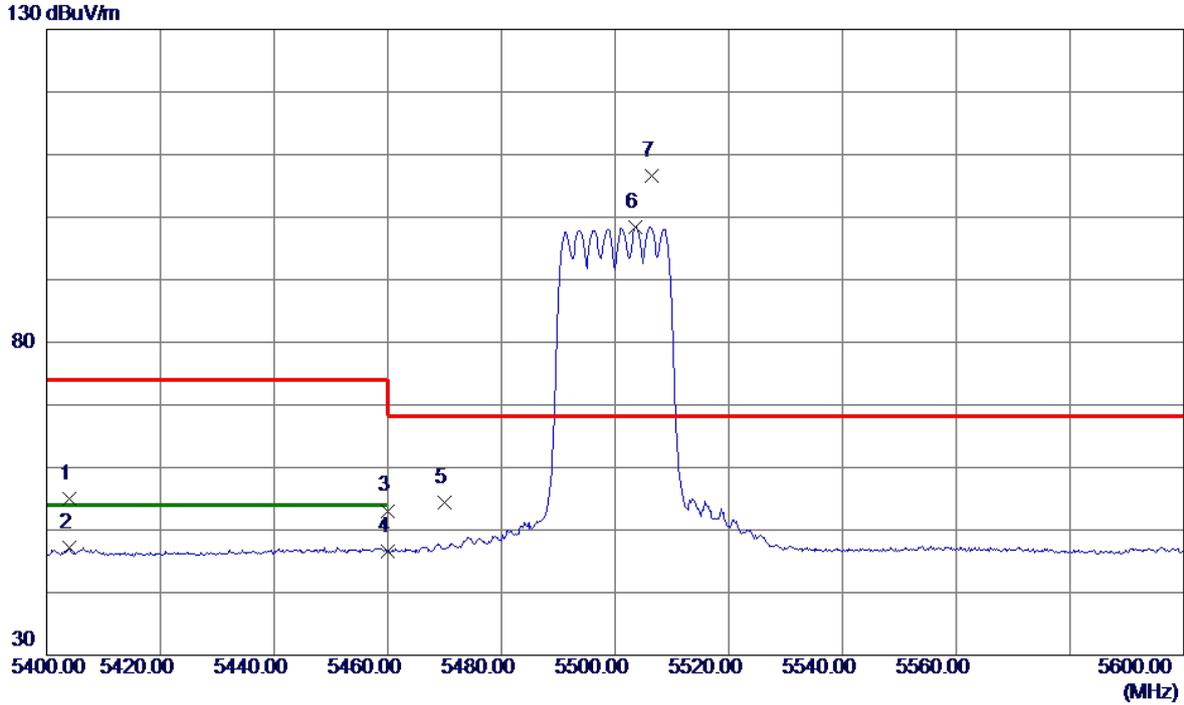


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5404.0000	38.43	16.56	54.99	74.00	-19.01	Peak	
2	5404.0000	30.63	16.56	47.19	54.00	-6.81	AVG	
3	5460.0000	36.48	16.62	53.10	74.00	-20.90	Peak	
4	5460.0000	29.95	16.62	46.57	54.00	-7.43	AVG	
5	5470.0000	37.76	16.63	54.39	68.20	-13.81	Peak	
6	5503.6000	81.80	16.67	98.47	999.00	-900.53	AVG	No Limit
7 *	5506.4000	89.92	16.67	106.59	68.20	38.39	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

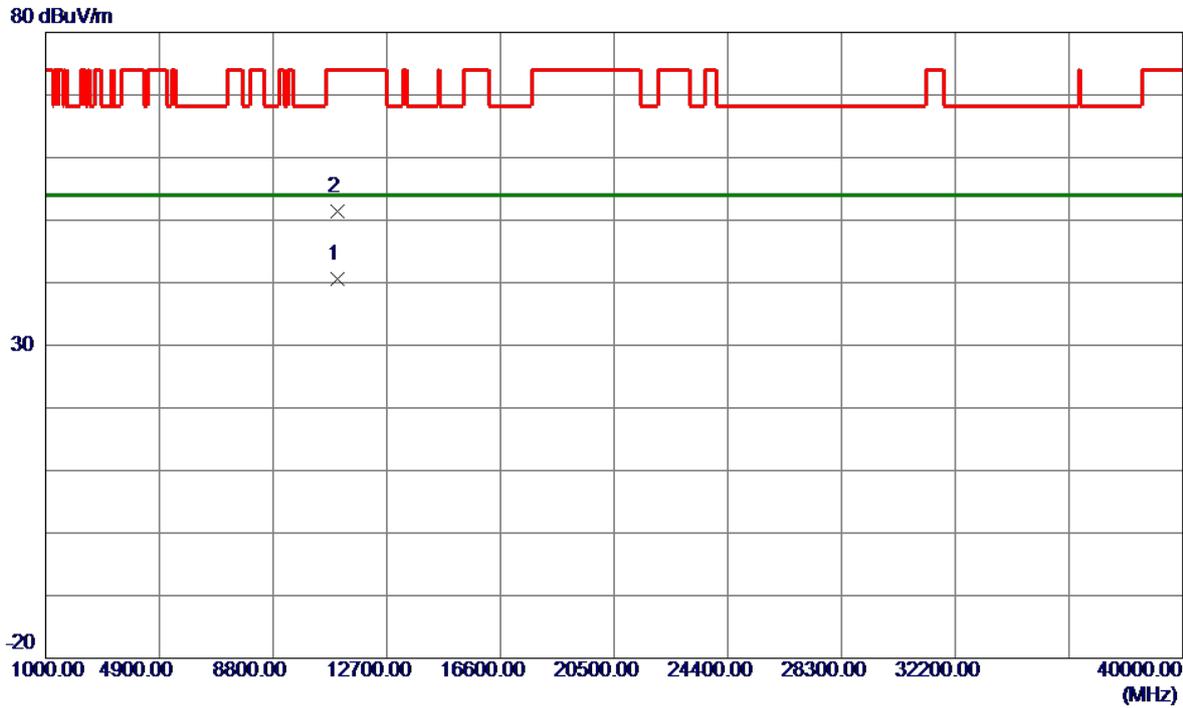


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.2350	26.78	13.78	40.56	54.00	-13.44	AVG	
2	11000.4850	37.71	13.78	51.49	74.00	-22.51	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

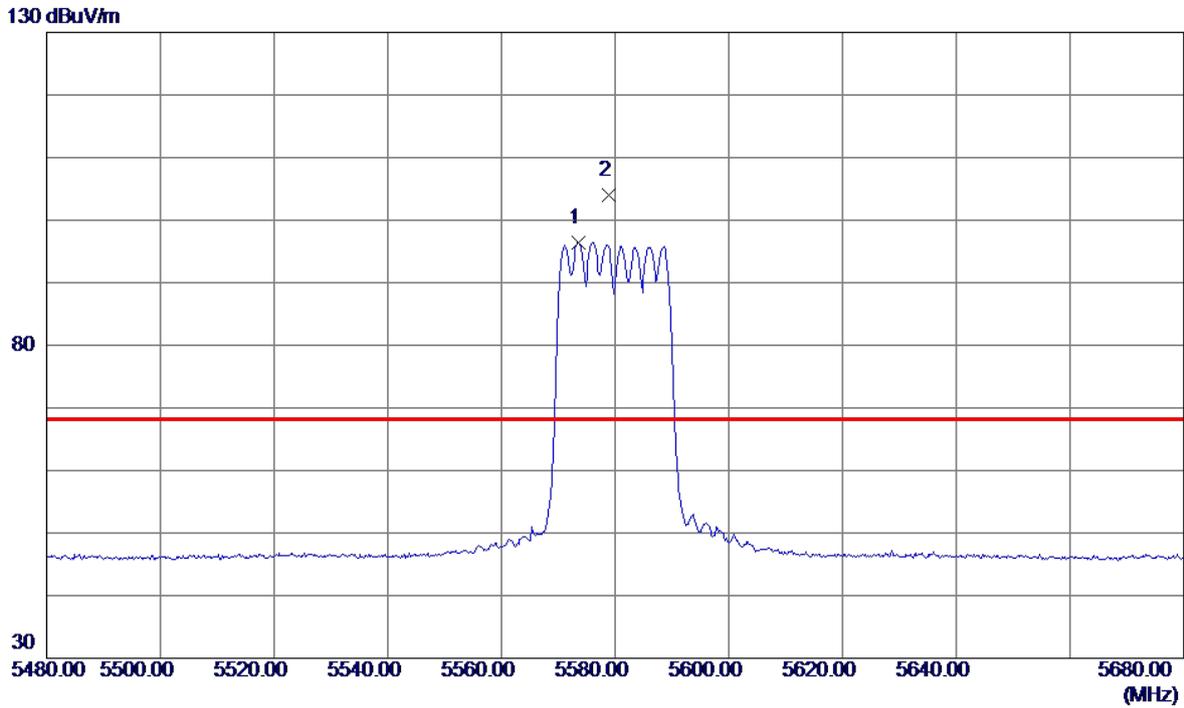


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5573.6000	79.74	16.71	96.45	999.00	-902.55	AVG	No Limit
2 *	5578.8000	87.27	16.71	103.98	68.20	35.78	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

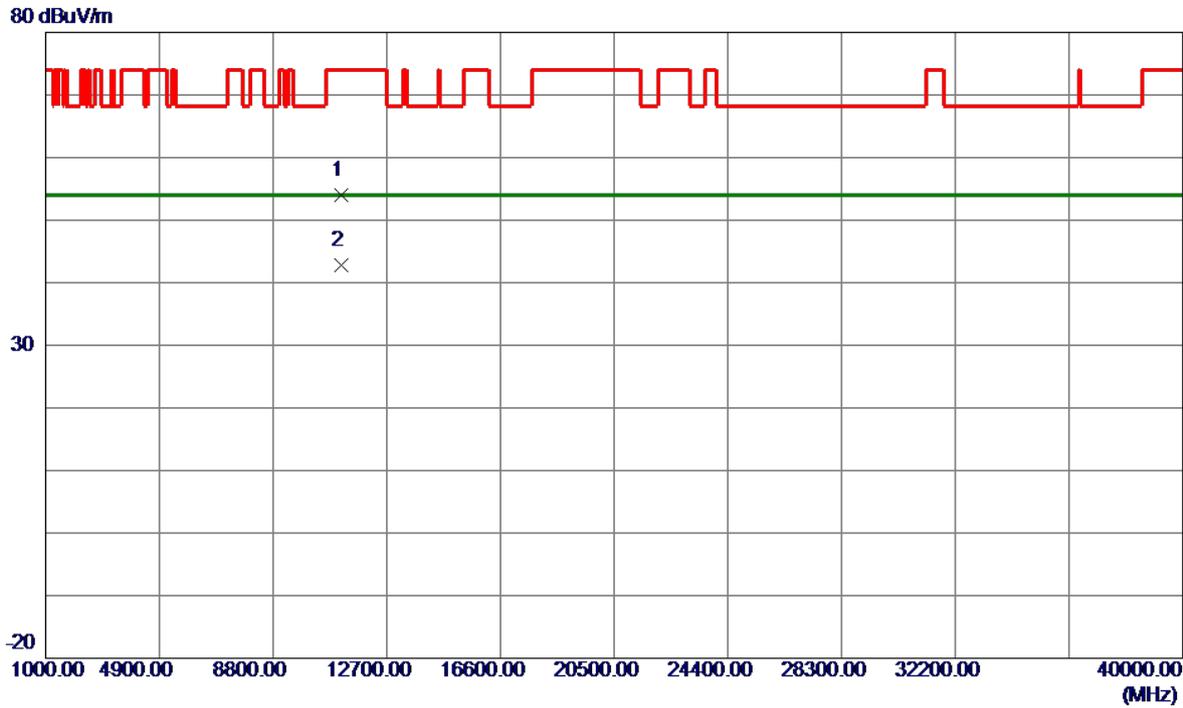


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.2699	40.03	14.06	54.09	74.00	-19.91	Peak	
2 *	11160.6050	28.73	14.06	42.79	54.00	-11.21	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

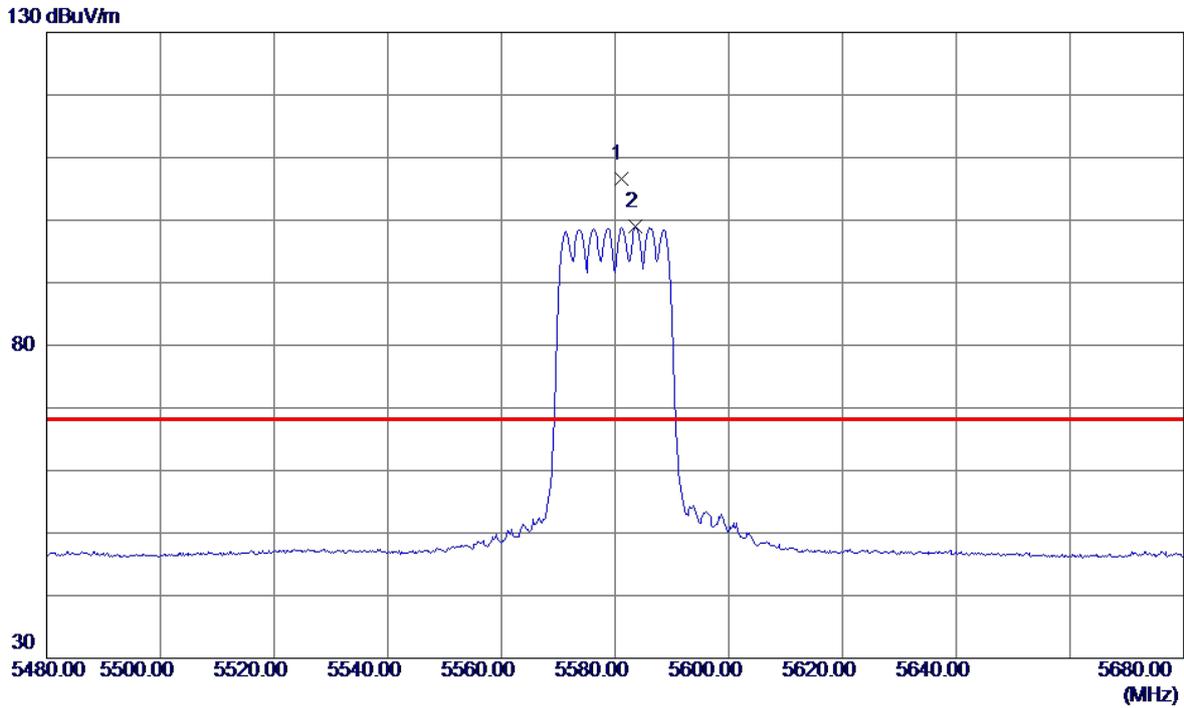


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5581.0000	89.84	16.71	106.55	68.20	38.35	Peak	No Limit
2	5583.6000	82.20	16.71	98.91	999.00	-900.09	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

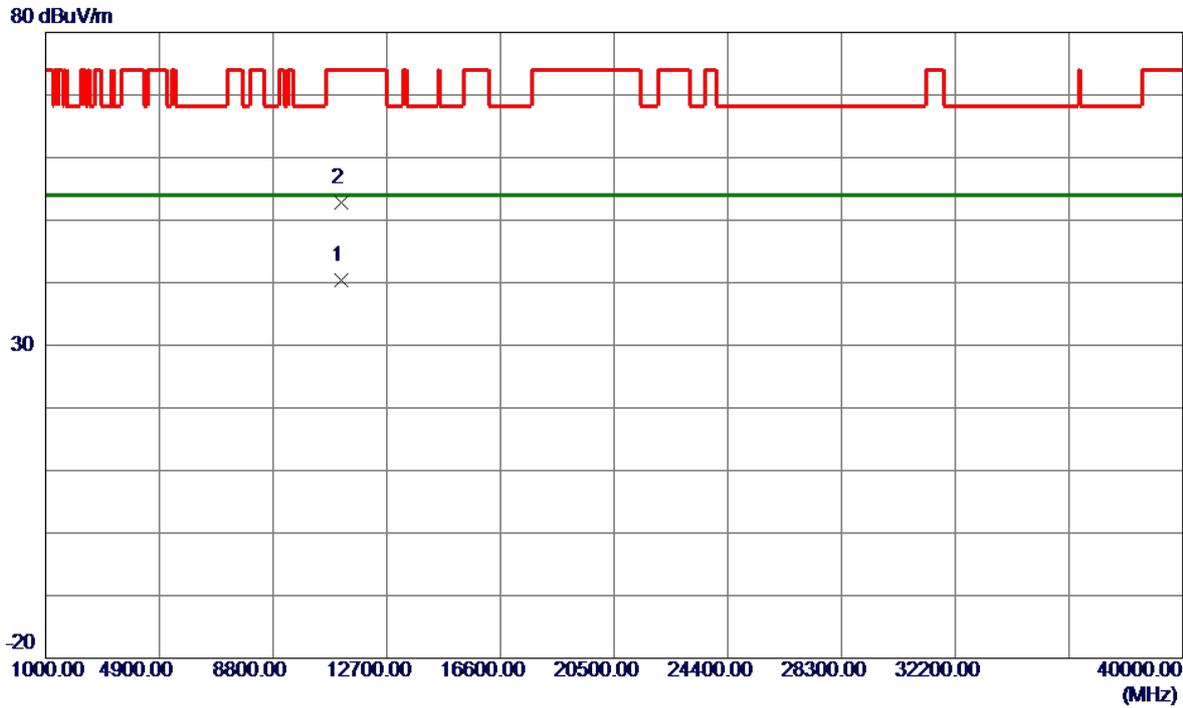


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.5050	26.42	14.06	40.48	54.00	-13.52	AVG	
2	11160.9650	38.69	14.06	52.75	74.00	-21.25	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

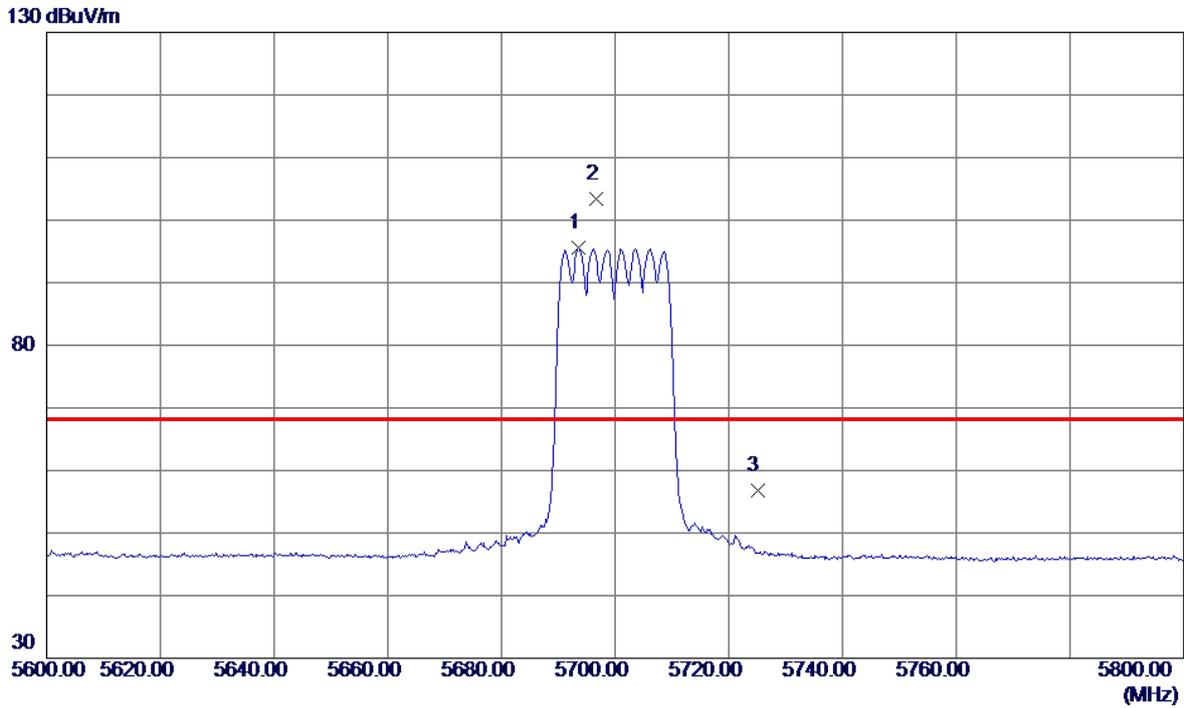


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5693.6000	78.75	16.78	95.53	999.00	-903.47	AVG	No Limit
2 *	5696.6000	86.62	16.78	103.40	68.20	35.20	Peak	No Limit
3	5725.0000	40.08	16.80	56.88	68.20	-11.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

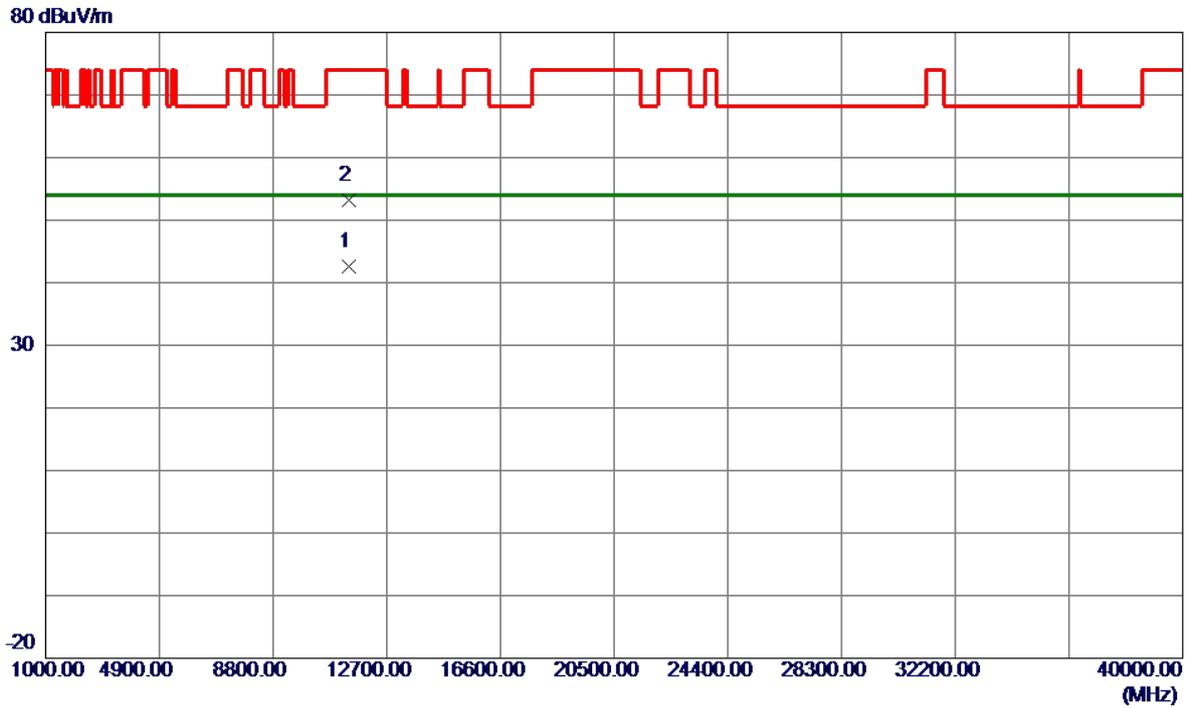


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.1000	28.14	14.48	42.62	54.00	-11.38	AVG	
2	11400.4750	38.80	14.48	53.28	74.00	-20.72	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

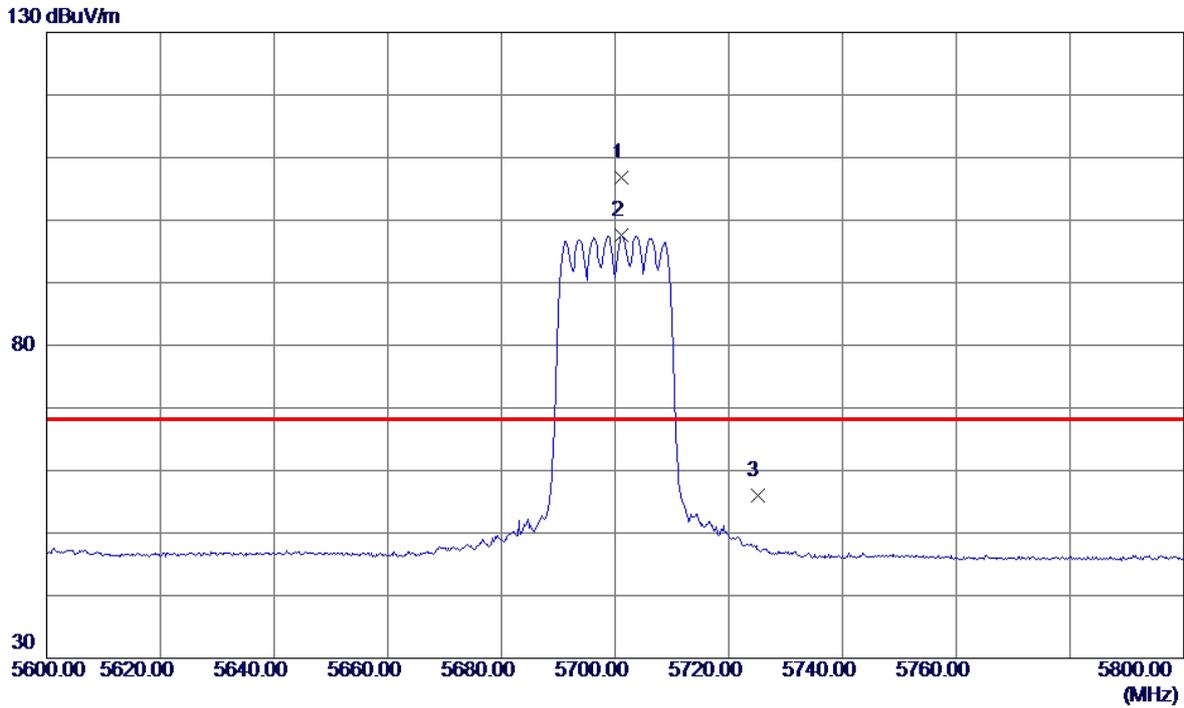


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.2000	90.03	16.78	106.81	68.20	38.61	Peak	No Limit
2	5701.2000	80.76	16.78	97.54	999.00	-901.46	AVG	No Limit
3	5725.0000	39.29	16.80	56.09	68.20	-12.11	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

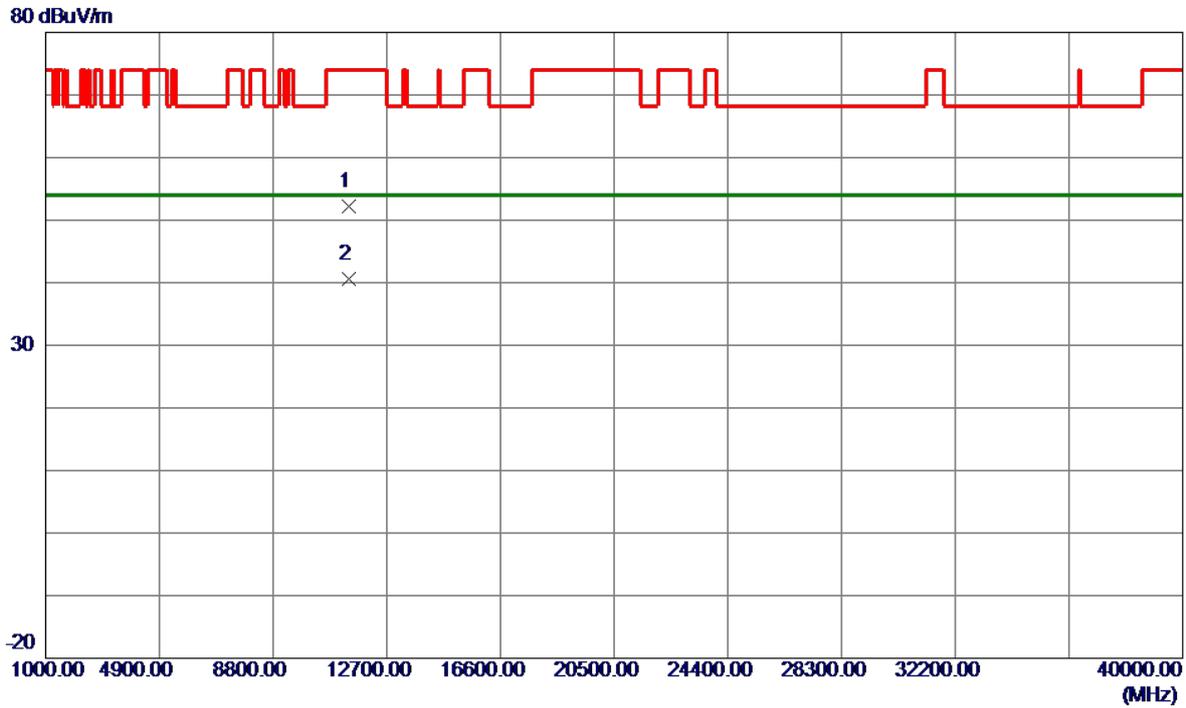


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0650	37.75	14.48	52.23	74.00	-21.77	Peak	
2 *	11400.0800	26.08	14.48	40.56	54.00	-13.44	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

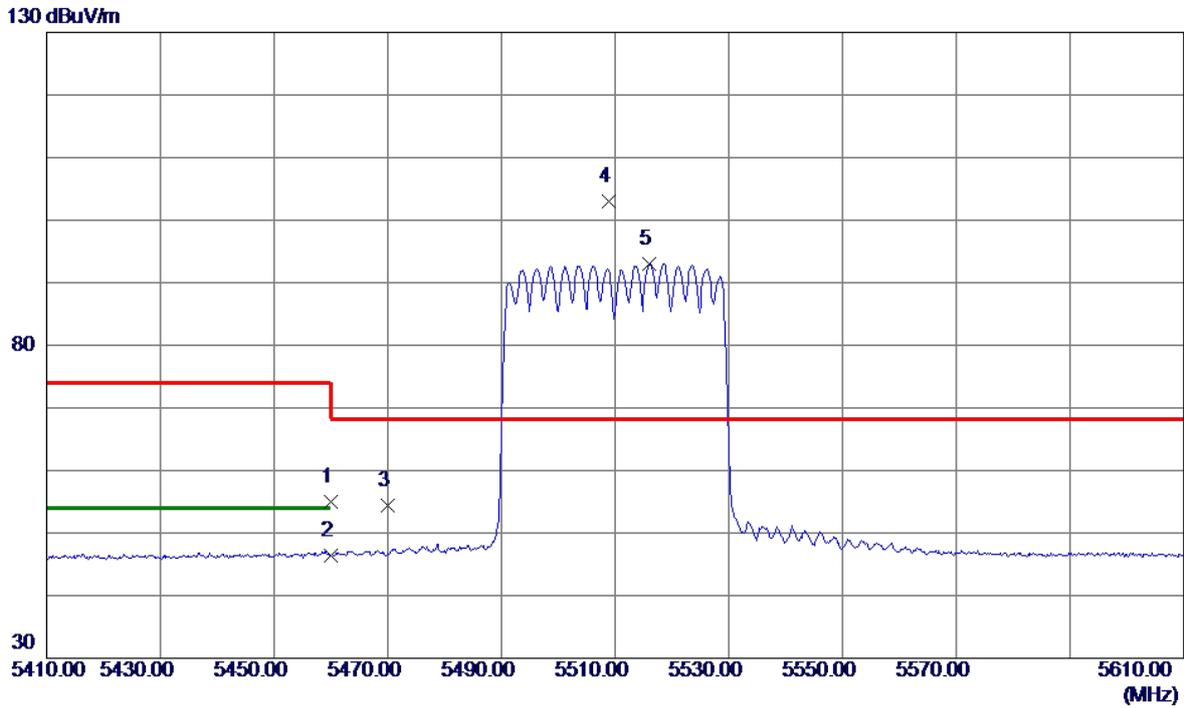


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.38	16.62	55.00	74.00	-19.00	Peak	
2	5460.0000	29.74	16.62	46.36	54.00	-7.64	AVG	
3	5470.0000	37.82	16.63	54.45	68.20	-13.75	Peak	
4 *	5508.8000	86.25	16.67	102.92	68.20	34.72	Peak	No Limit
5	5516.0000	76.37	16.67	93.04	999.00	-905.96	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

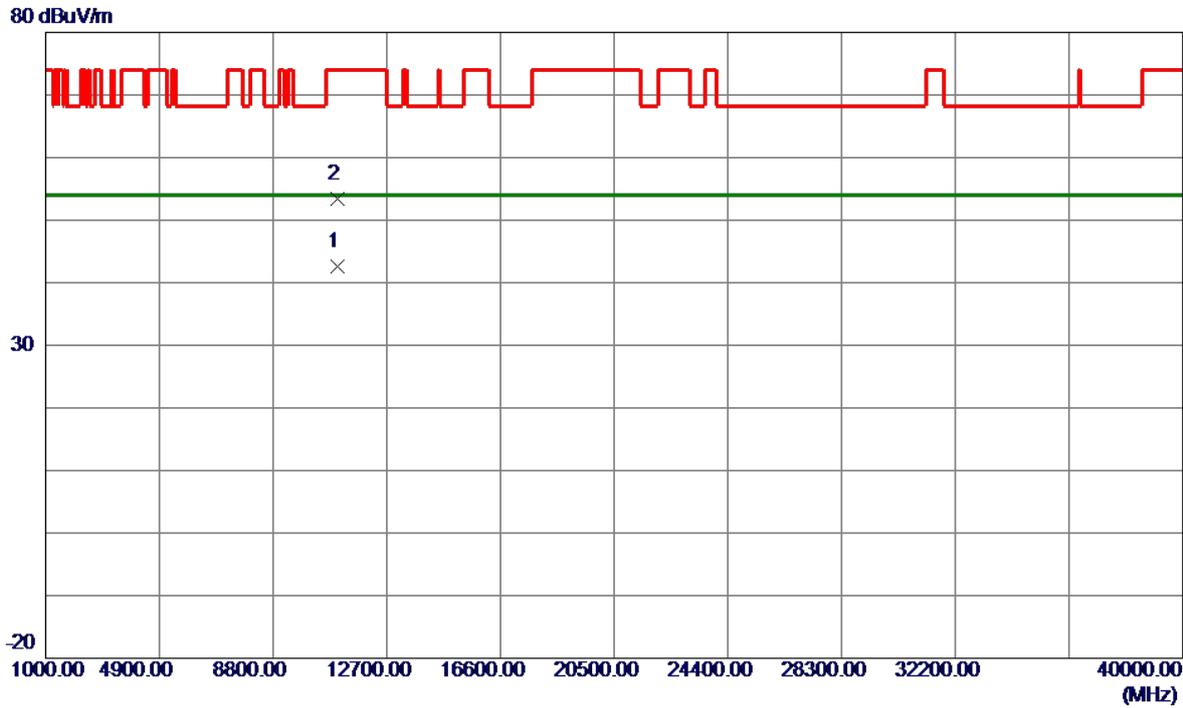


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.1449	28.87	13.82	42.69	54.00	-11.31	AVG	
2	11020.6800	39.58	13.82	53.40	74.00	-20.60	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

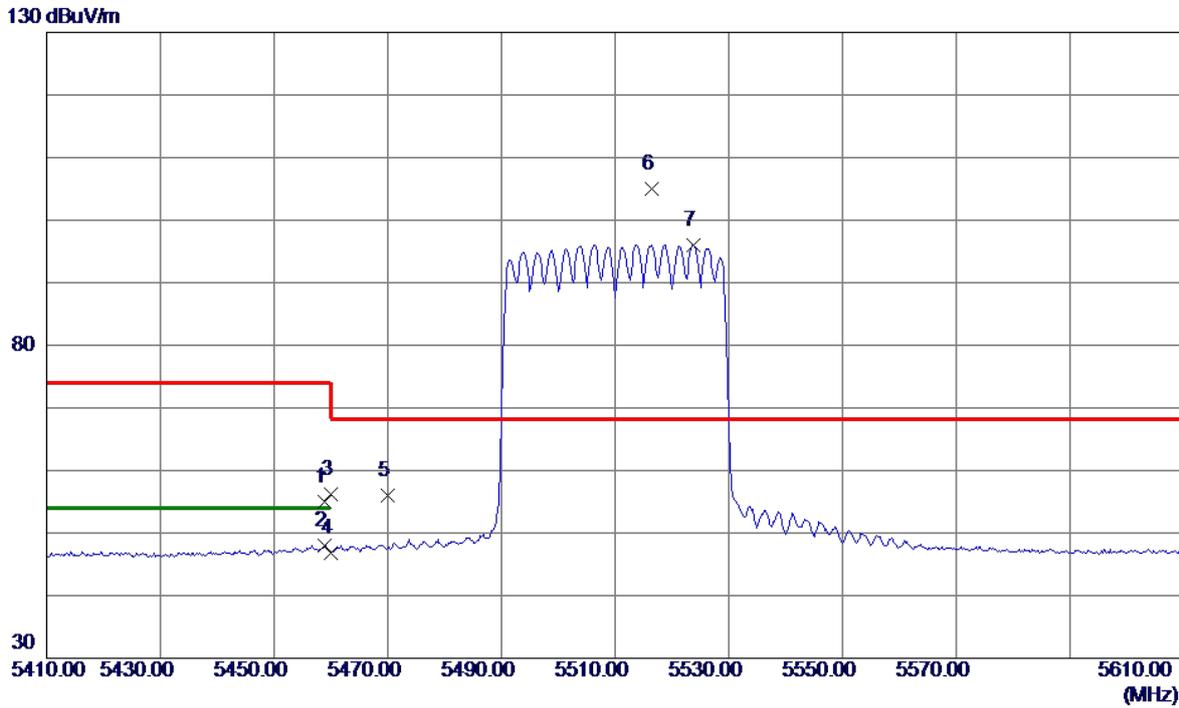

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.8000	38.36	16.62	54.98	74.00	-19.02	Peak	
2	5458.8000	31.32	16.62	47.94	54.00	-6.06	AVG	
3	5460.0000	39.49	16.62	56.11	74.00	-17.89	Peak	
4	5460.0000	30.21	16.62	46.83	54.00	-7.17	AVG	
5	5470.0000	39.30	16.63	55.93	68.20	-12.27	Peak	
6 *	5516.4000	88.33	16.67	105.00	68.20	36.80	Peak	No Limit
7	5523.8000	79.37	16.68	96.05	999.00	-902.95	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.7200	27.17	13.46	40.63	54.00	-13.37	AVG	
2	10361.0650	38.00	13.46	51.46	68.20	-16.74	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

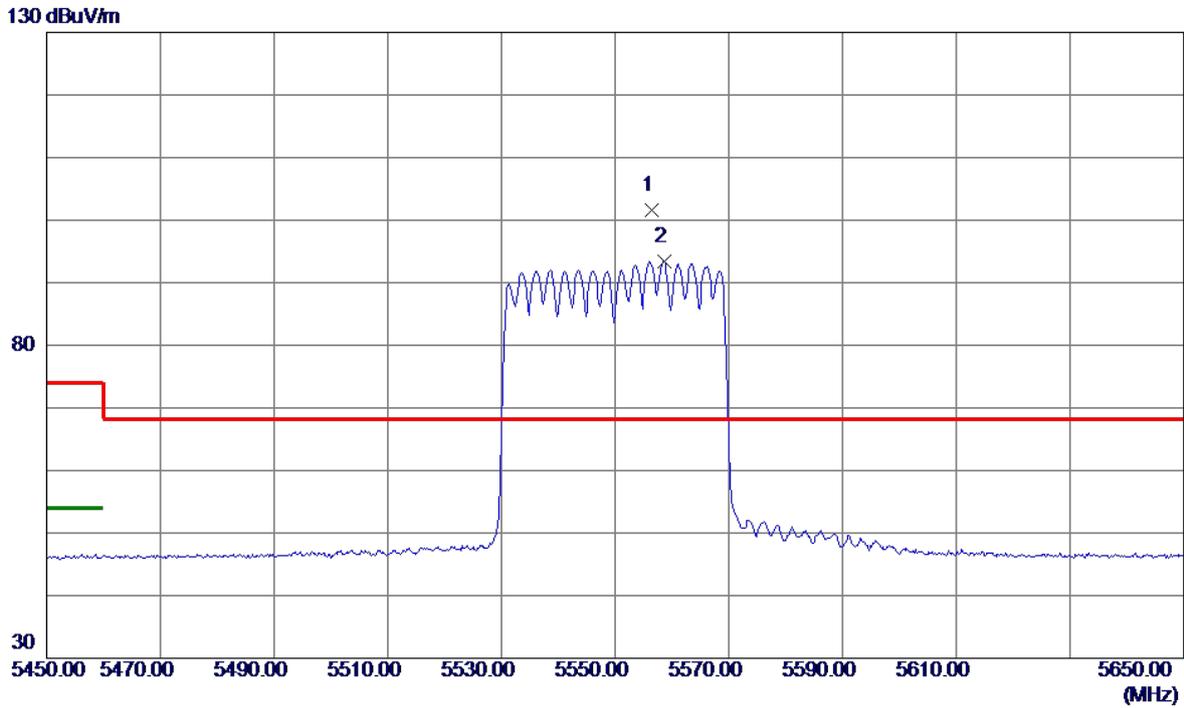


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5556.4000	84.98	16.70	101.68	68.20	33.48	Peak	No Limit
2	5558.6000	76.70	16.70	93.40	999.00	-905.60	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

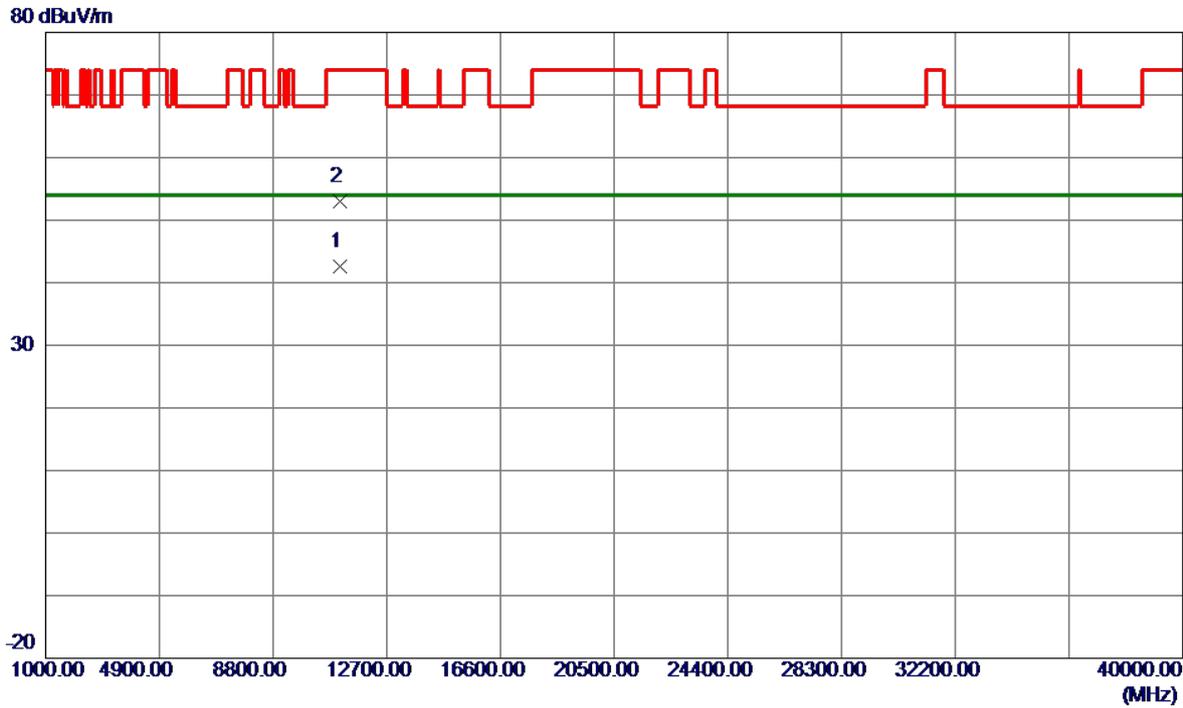


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.3200	28.62	13.96	42.58	54.00	-11.42	AVG	
2	11100.5100	39.04	13.96	53.00	74.00	-21.00	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

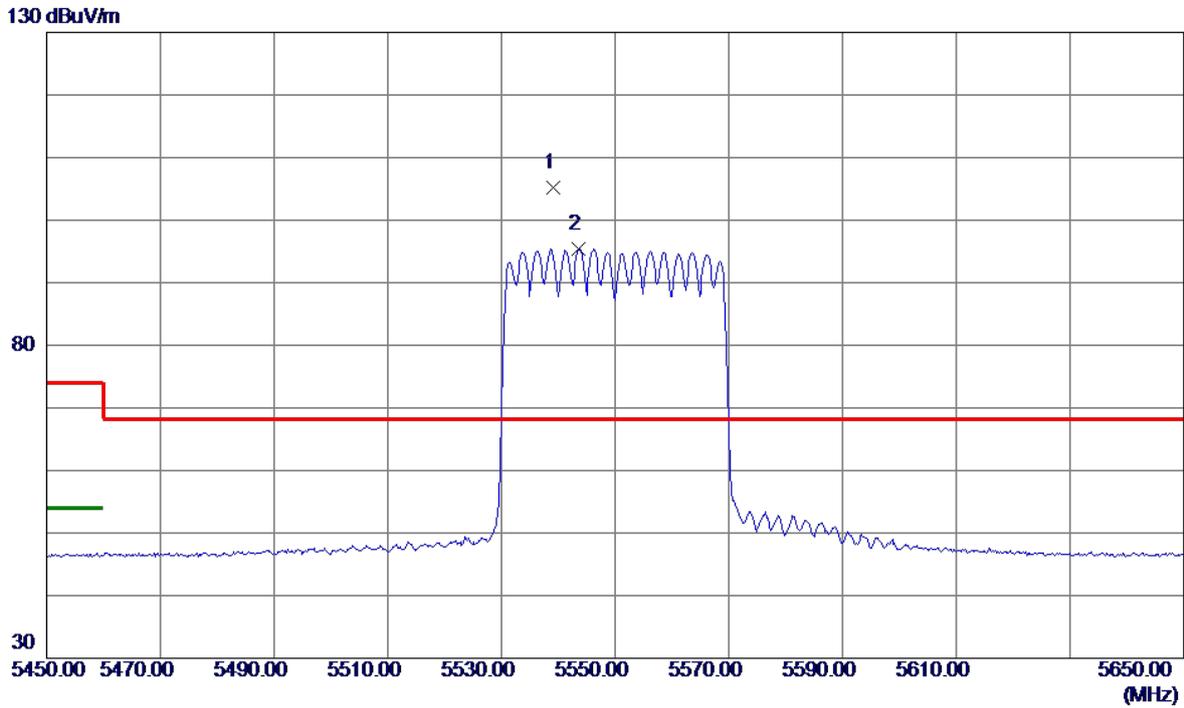


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5539.2000	88.50	16.69	105.19	68.20	36.99	Peak	No Limit
2	5543.6000	78.73	16.69	95.42	999.00	-903.58	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

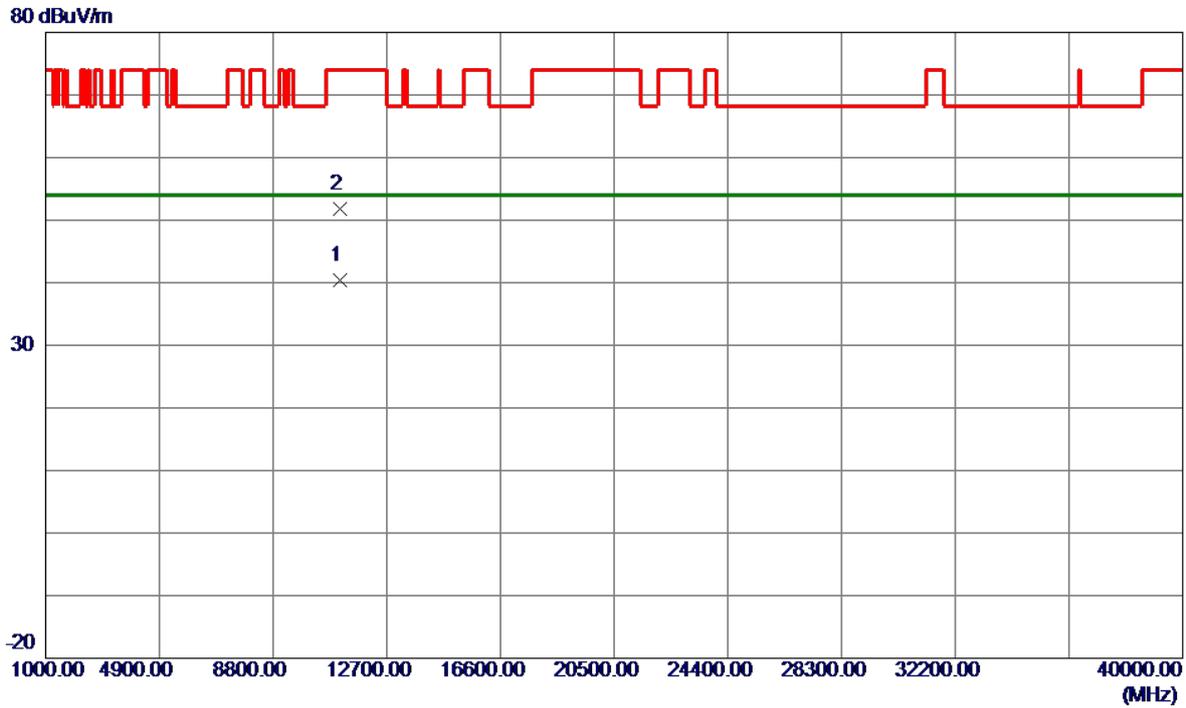


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.1250	26.52	13.96	40.48	54.00	-13.52	AVG	
2	11100.2500	37.92	13.96	51.88	74.00	-22.12	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

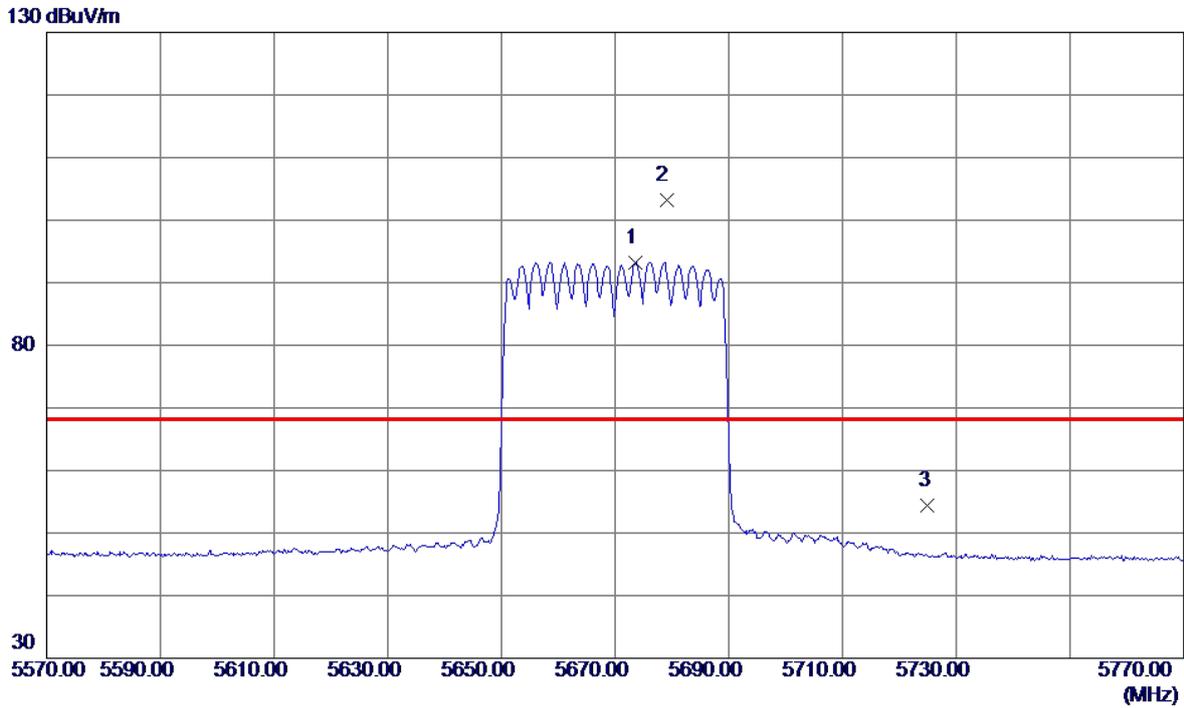


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5673.6000	76.47	16.77	93.24	999.00	-905.76	AVG	No Limit
2 *	5679.0000	86.34	16.77	103.11	68.20	34.91	Peak	No Limit
3	5725.0000	37.63	16.80	54.43	68.20	-13.77	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

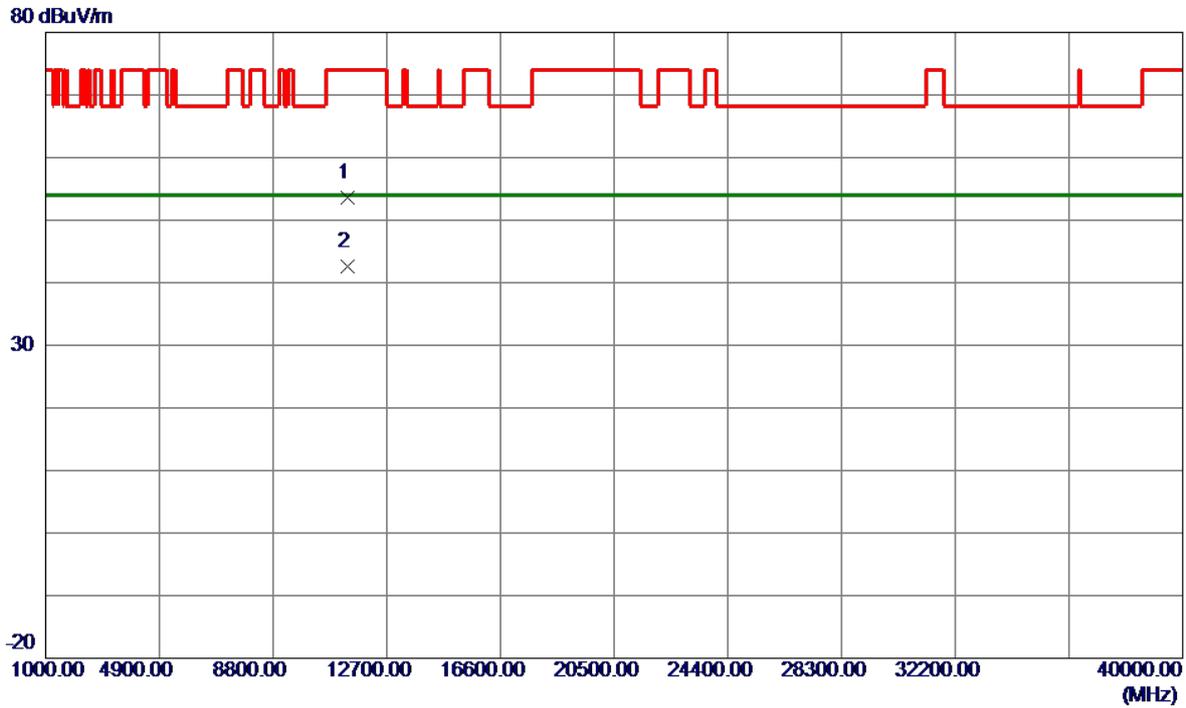


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0900	39.17	14.38	53.55	74.00	-20.45	Peak	
2 *	11340.3750	28.22	14.38	42.60	54.00	-11.40	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

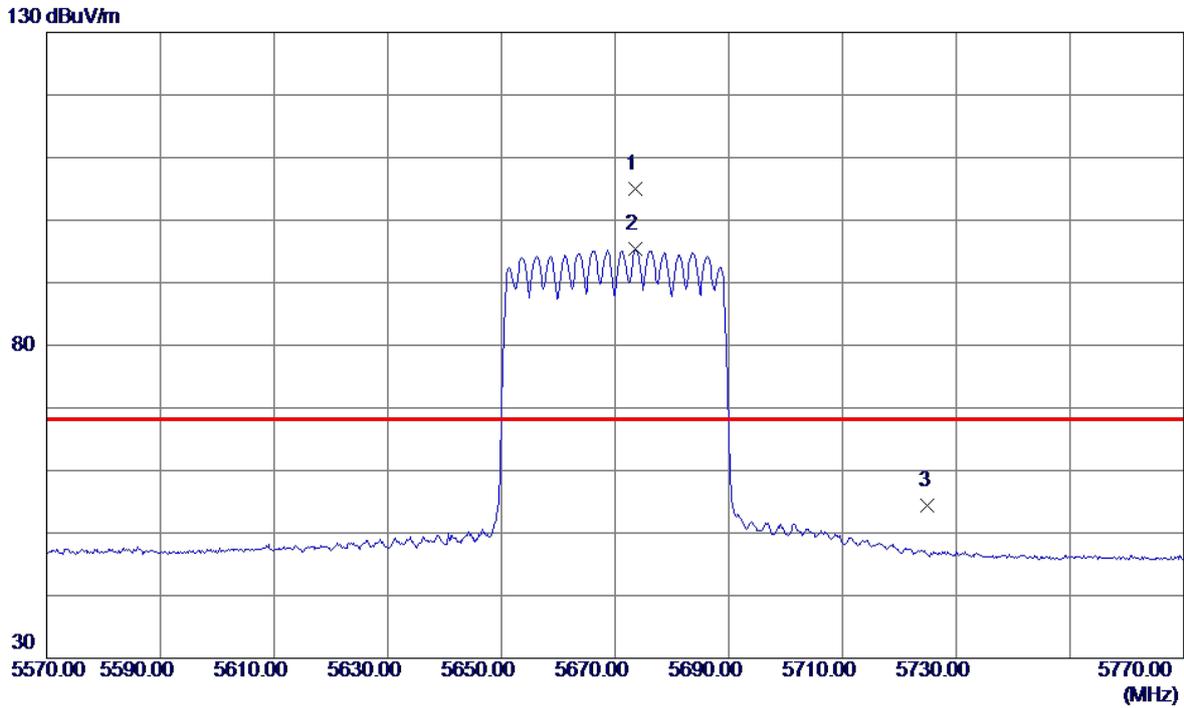


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5673.6000	88.17	16.77	104.94	68.20	36.74	Peak	No Limit
2	5673.6000	78.58	16.77	95.35	999.00	-903.65	AVG	No Limit
3	5725.0000	37.57	16.80	54.37	68.20	-13.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

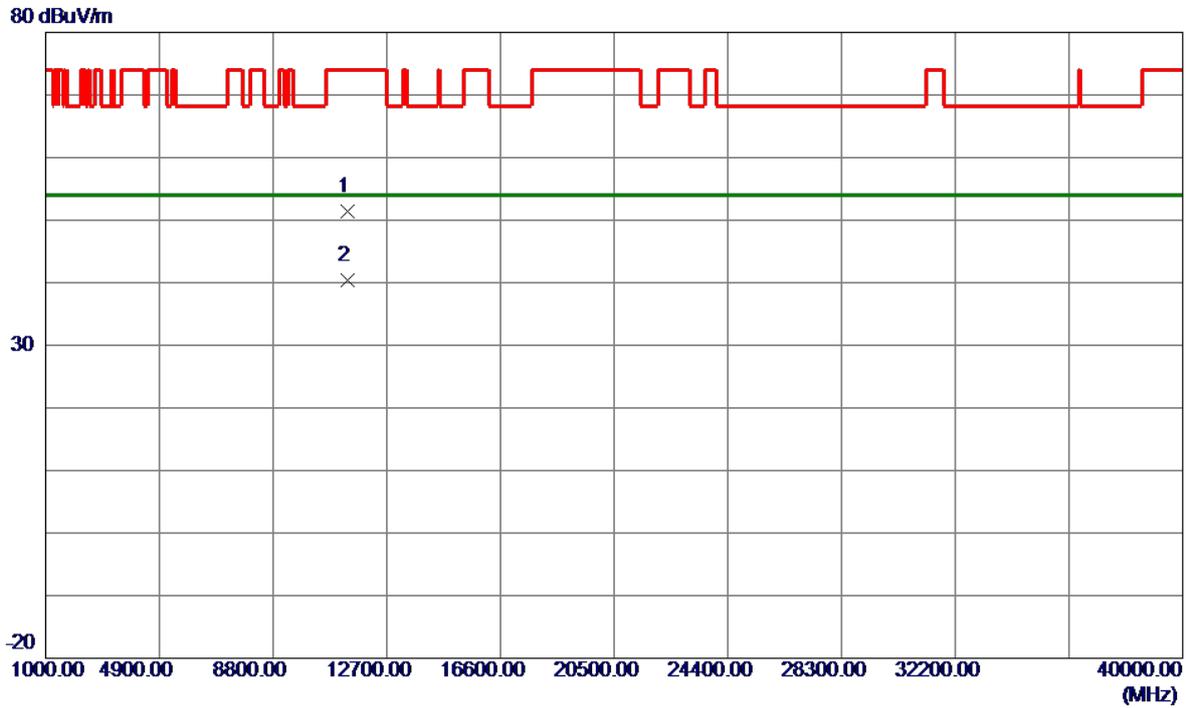


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.5400	37.00	14.38	51.38	74.00	-22.62	Peak	
2 *	11340.6849	26.10	14.38	40.48	54.00	-13.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

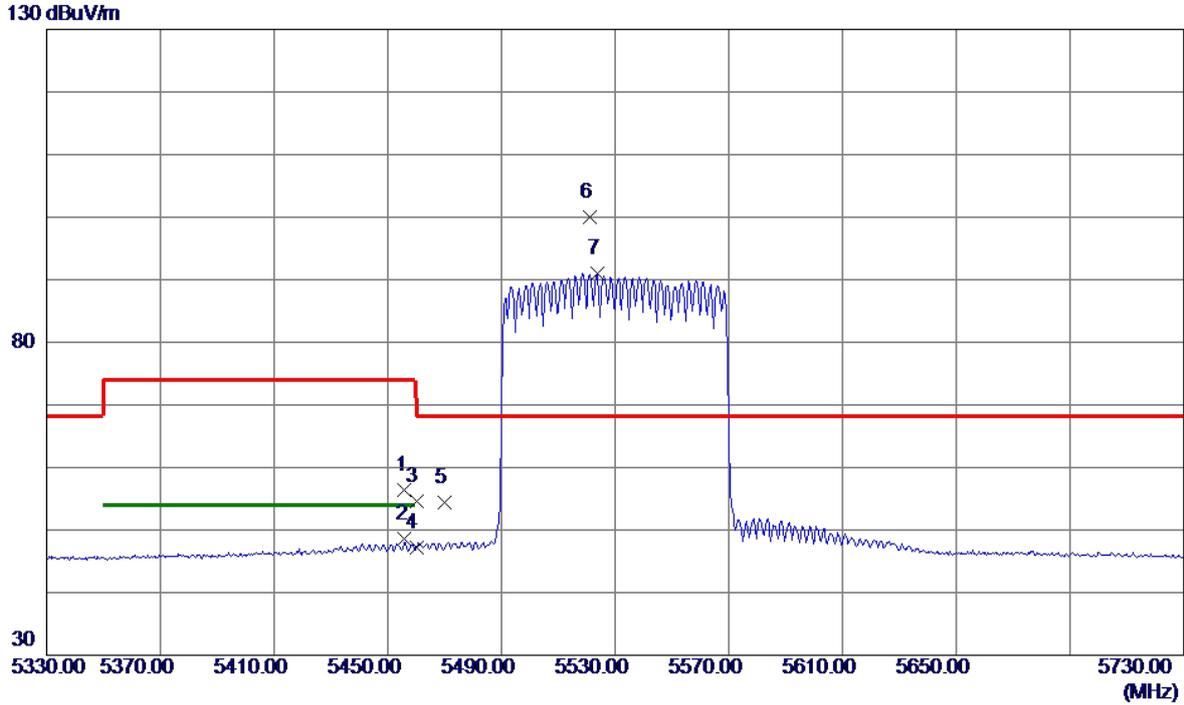


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.0000	39.79	16.62	56.41	74.00	-17.59	Peak	
2	5456.0000	31.91	16.62	48.53	54.00	-5.47	AVG	
3	5460.0000	37.94	16.62	54.56	74.00	-19.44	Peak	
4	5460.0000	30.64	16.62	47.26	54.00	-6.74	AVG	
5	5470.0000	37.75	16.63	54.38	68.20	-13.82	Peak	
6 *	5521.2000	83.23	16.68	99.91	68.20	31.71	Peak	No Limit
7	5523.6000	74.30	16.68	90.98	999.00	-908.02	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

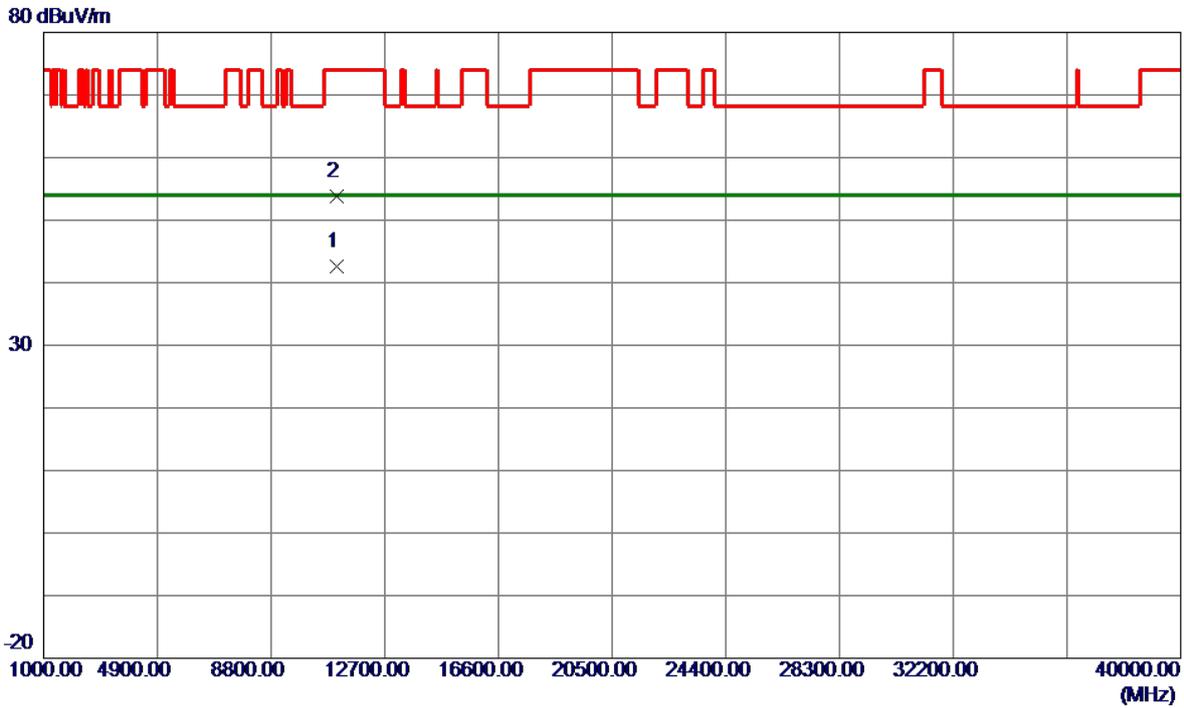


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.2550	28.79	13.89	42.68	54.00	-11.32	AVG	
2	11060.5550	39.95	13.89	53.84	74.00	-20.16	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

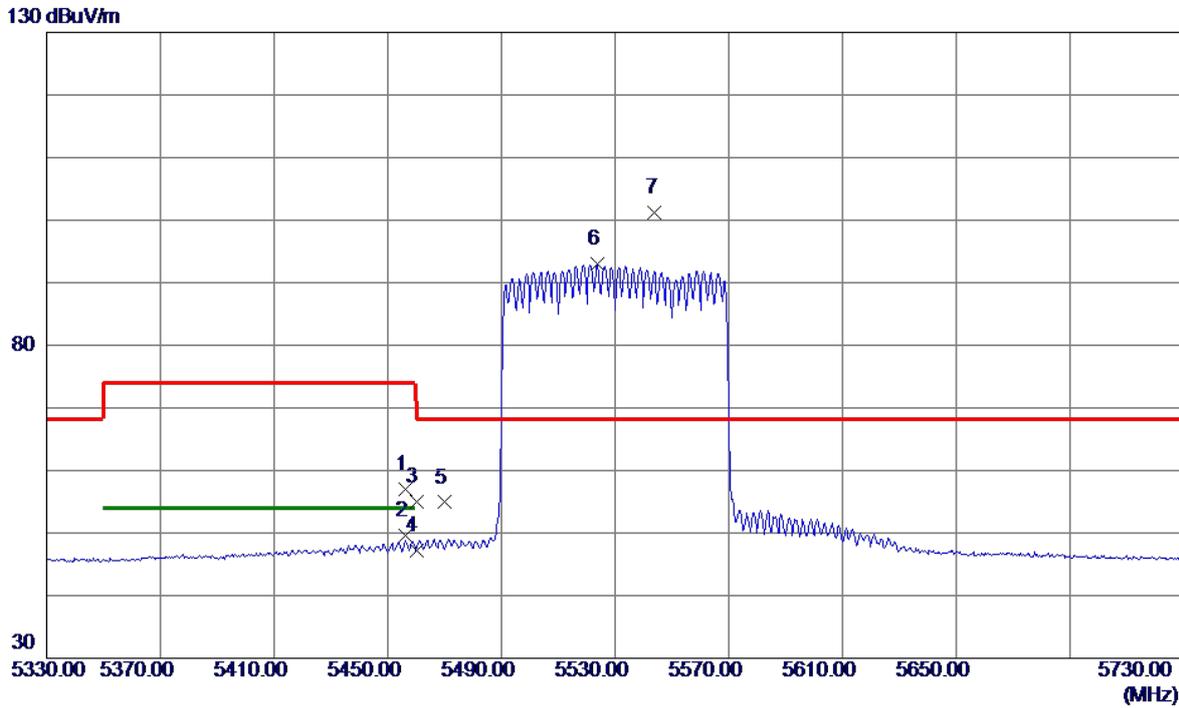


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.4000	40.41	16.62	57.03	74.00	-16.97	Peak	
2	5456.4000	32.93	16.62	49.55	54.00	-4.45	AVG	
3	5460.0000	38.44	16.62	55.06	74.00	-18.94	Peak	
4	5460.0000	30.57	16.62	47.19	54.00	-6.81	AVG	
5	5470.0000	38.27	16.63	54.90	68.20	-13.30	Peak	
6	5523.6000	76.28	16.68	92.96	999.00	-906.04	AVG	No Limit
7 *	5544.0000	84.58	16.69	101.27	68.20	33.07	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

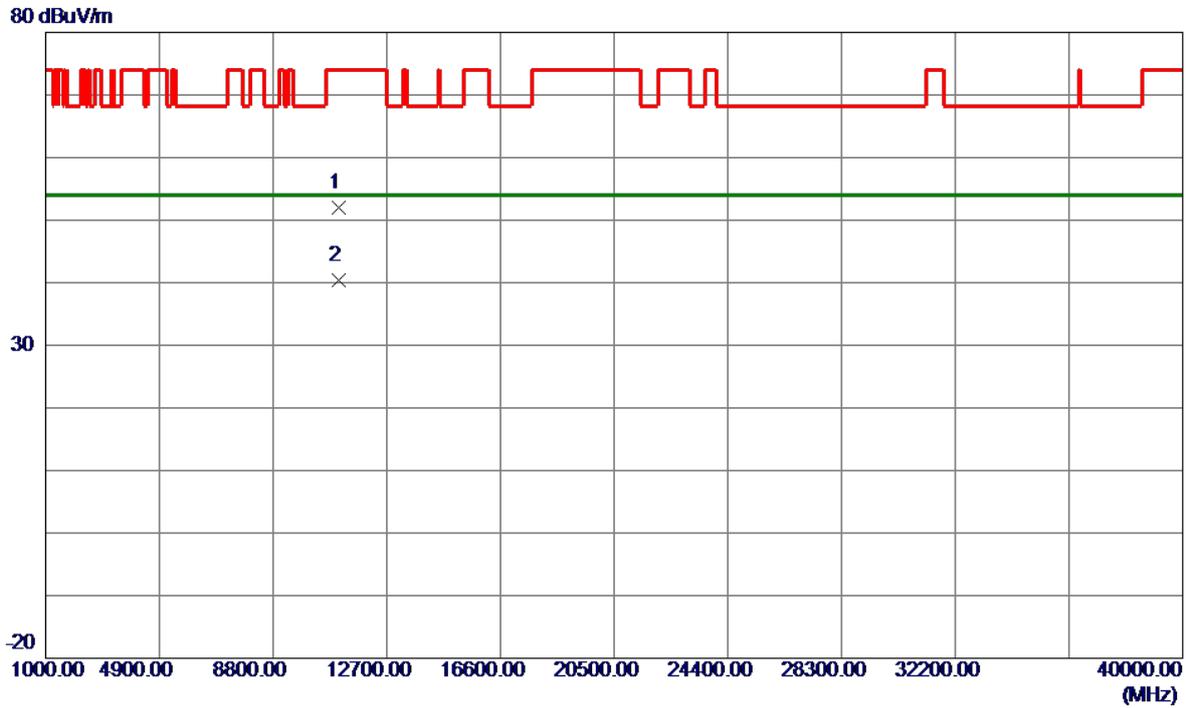


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.6250	38.02	13.89	51.91	74.00	-22.09	Peak	
2 *	11060.7650	26.59	13.89	40.48	54.00	-13.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

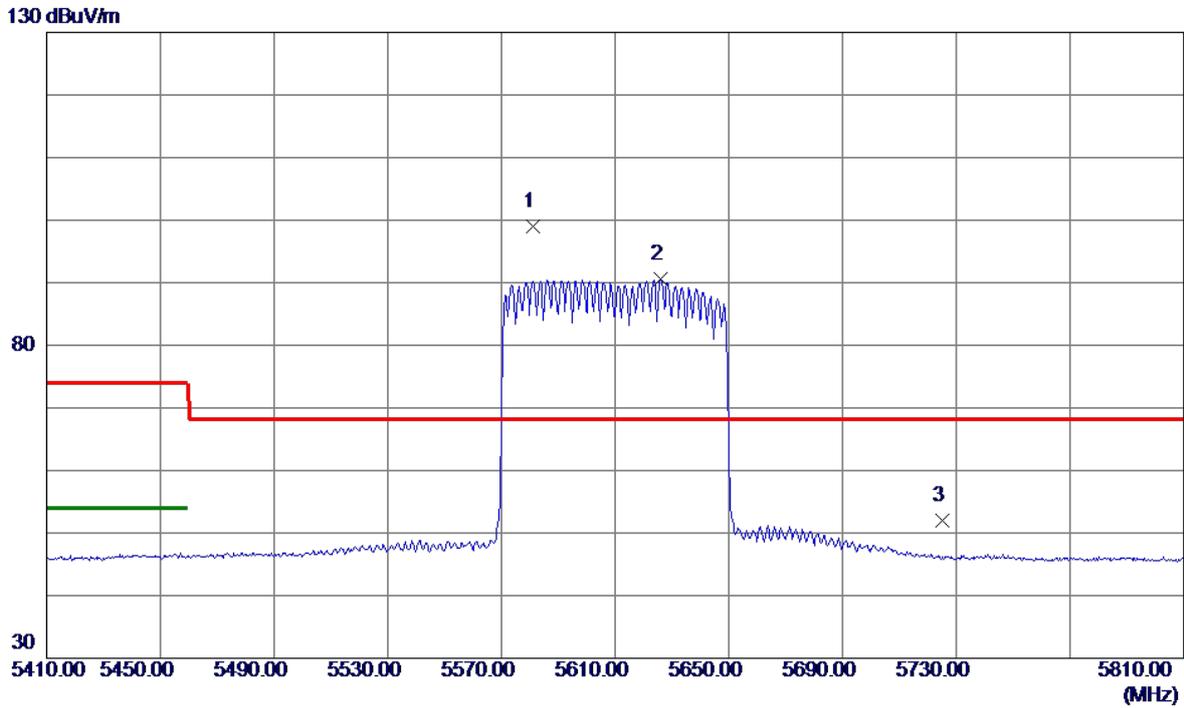


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5581.2000	82.20	16.71	98.91	68.20	30.71	Peak	No Limit
2	5626.0000	73.79	16.74	90.53	999.00	-908.47	AVG	No Limit
3	5725.0000	35.23	16.80	52.03	68.20	-16.17	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

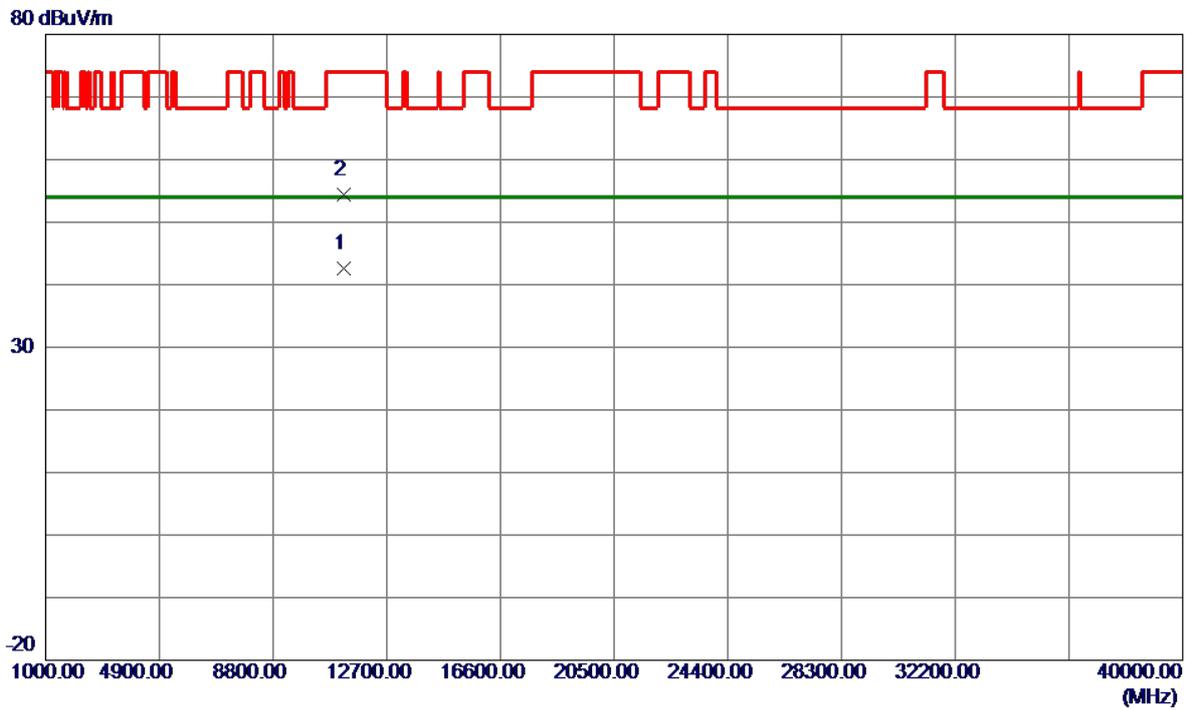


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11220.1150	28.47	14.17	42.64	54.00	-11.36	AVG	
2	11220.4850	40.31	14.17	54.48	74.00	-19.52	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

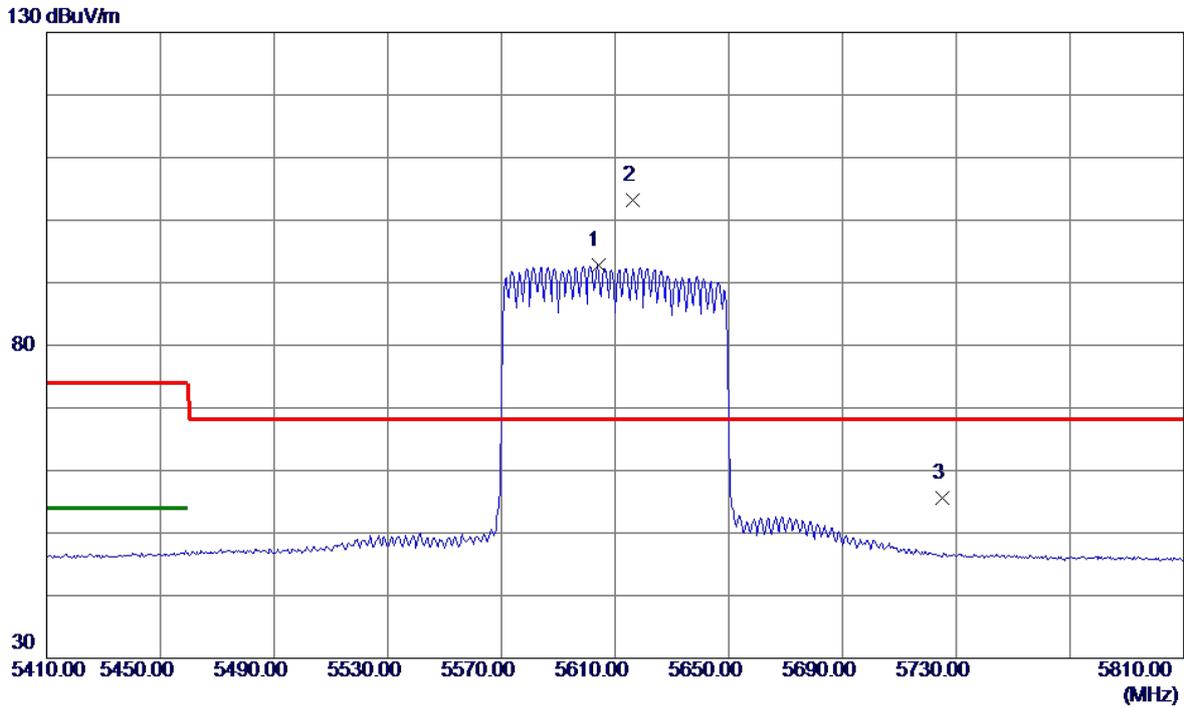


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5604.0000	76.05	16.73	92.78	999.00	-906.22	AVG	No Limit
2 *	5616.4000	86.56	16.73	103.29	68.20	35.09	Peak	No Limit
3	5725.0000	38.84	16.80	55.64	68.20	-12.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

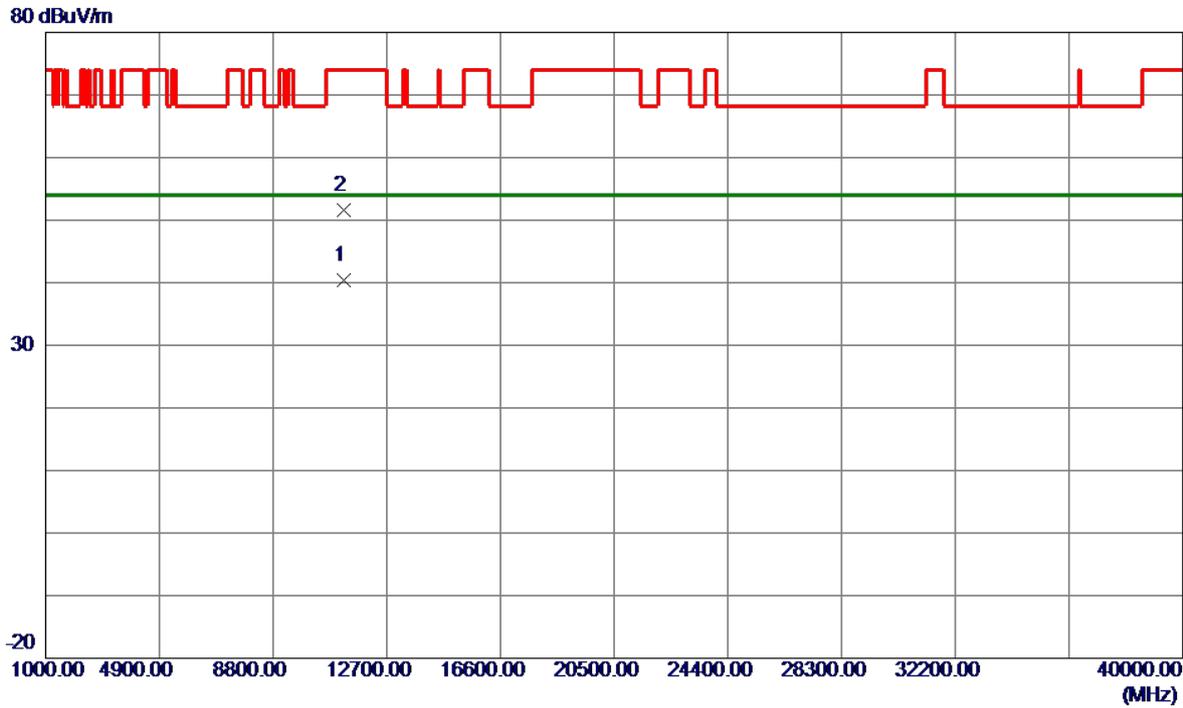


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11220.5500	26.28	14.17	40.45	54.00	-13.55	AVG	
2	11220.6600	37.43	14.17	51.60	74.00	-22.40	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

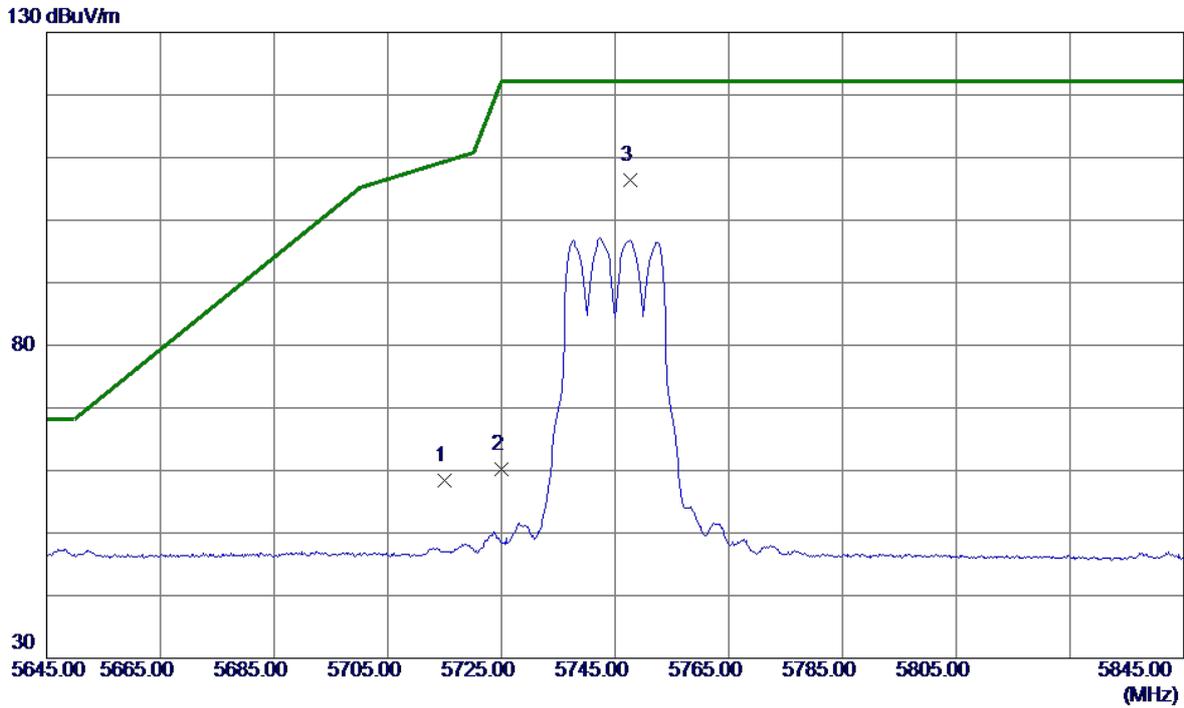


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	41.59	16.79	58.38	109.40	-51.02	Peak	
2	5725.0000	43.43	16.80	60.23	122.20	-61.97	Peak	
3 *	5747.6000	89.67	16.81	106.48	122.20	-15.72	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

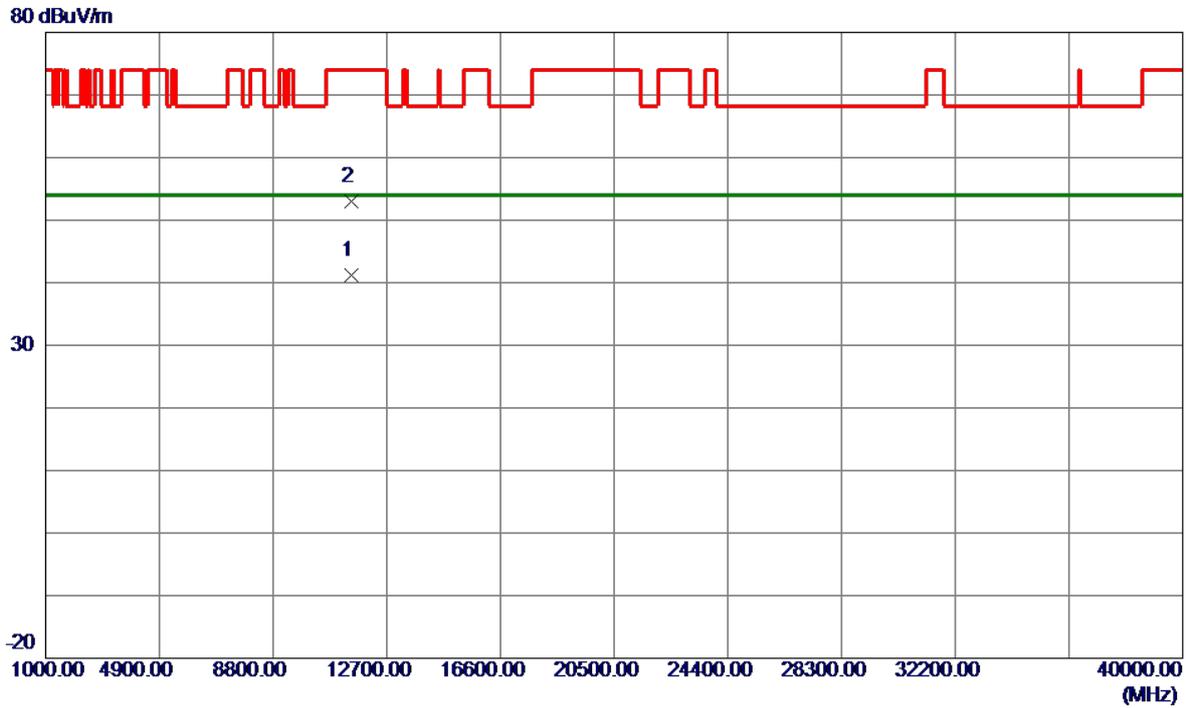


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.5700	26.57	14.64	41.21	54.00	-12.79	AVG	
2	11491.6000	38.30	14.64	52.94	74.00	-21.06	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

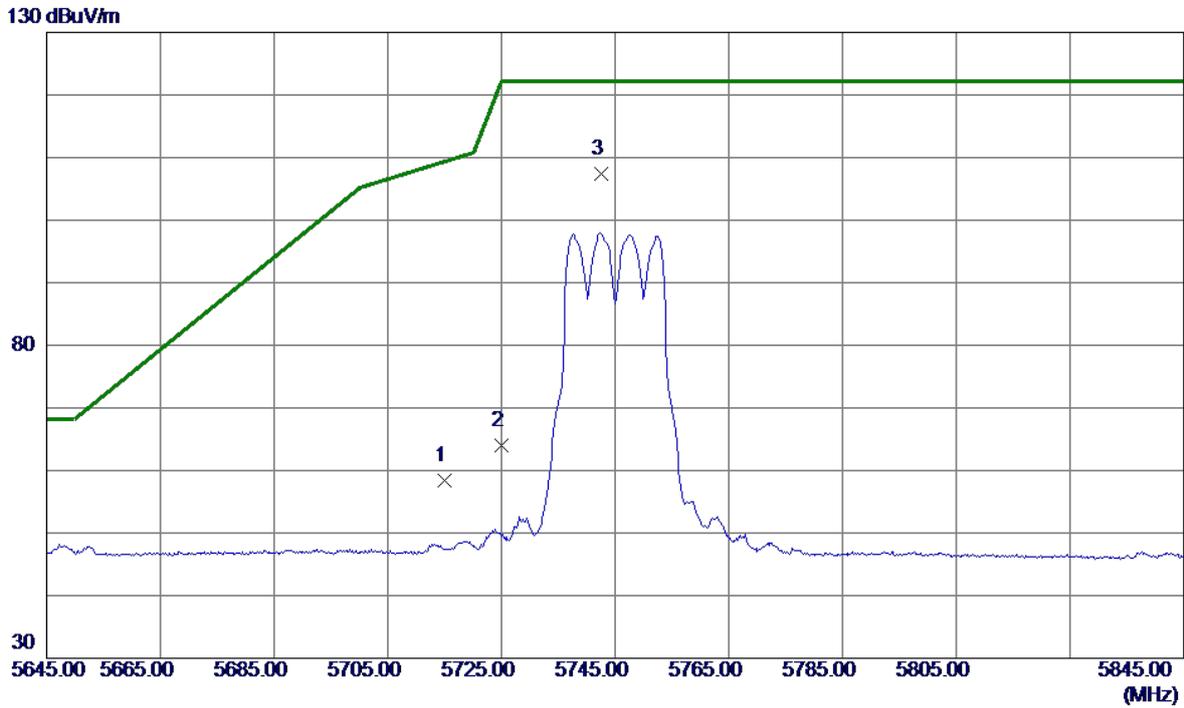


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	41.62	16.79	58.41	109.40	-50.99	Peak	
2	5725.0000	47.11	16.80	63.91	122.20	-58.29	Peak	
3 *	5742.6000	90.61	16.81	107.42	122.20	-14.78	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

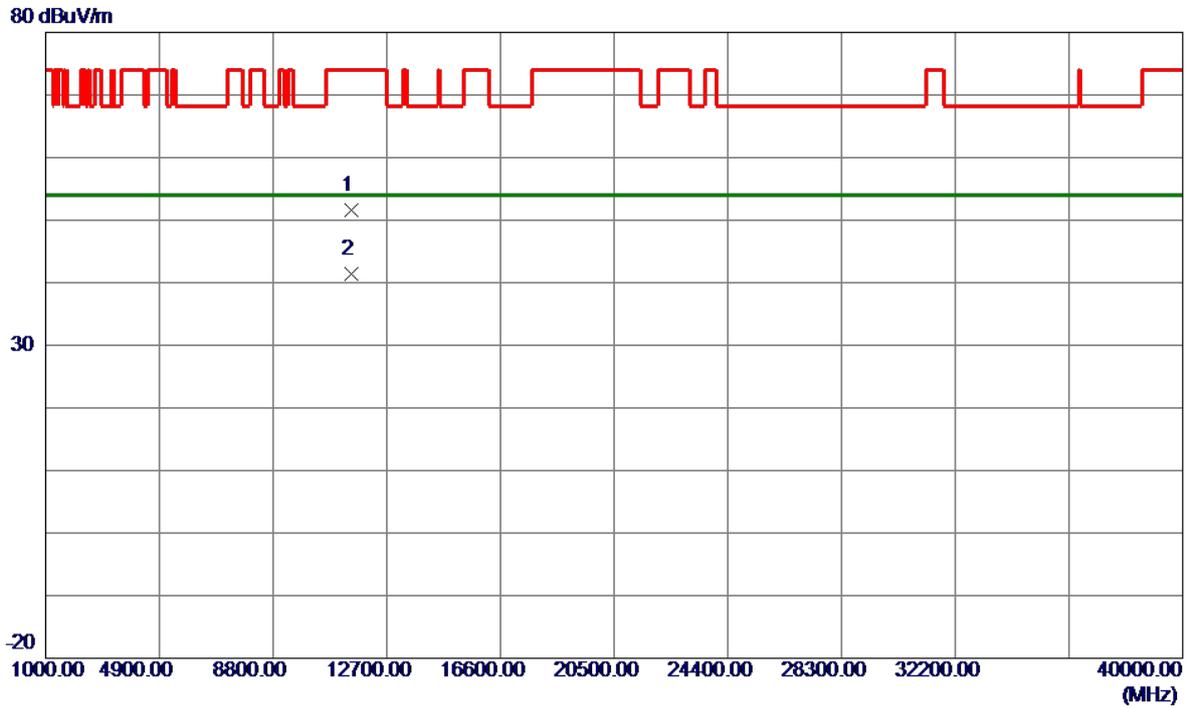


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.9100	37.00	14.64	51.64	74.00	-22.36	Peak	
2 *	11490.0800	26.76	14.64	41.40	54.00	-12.60	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

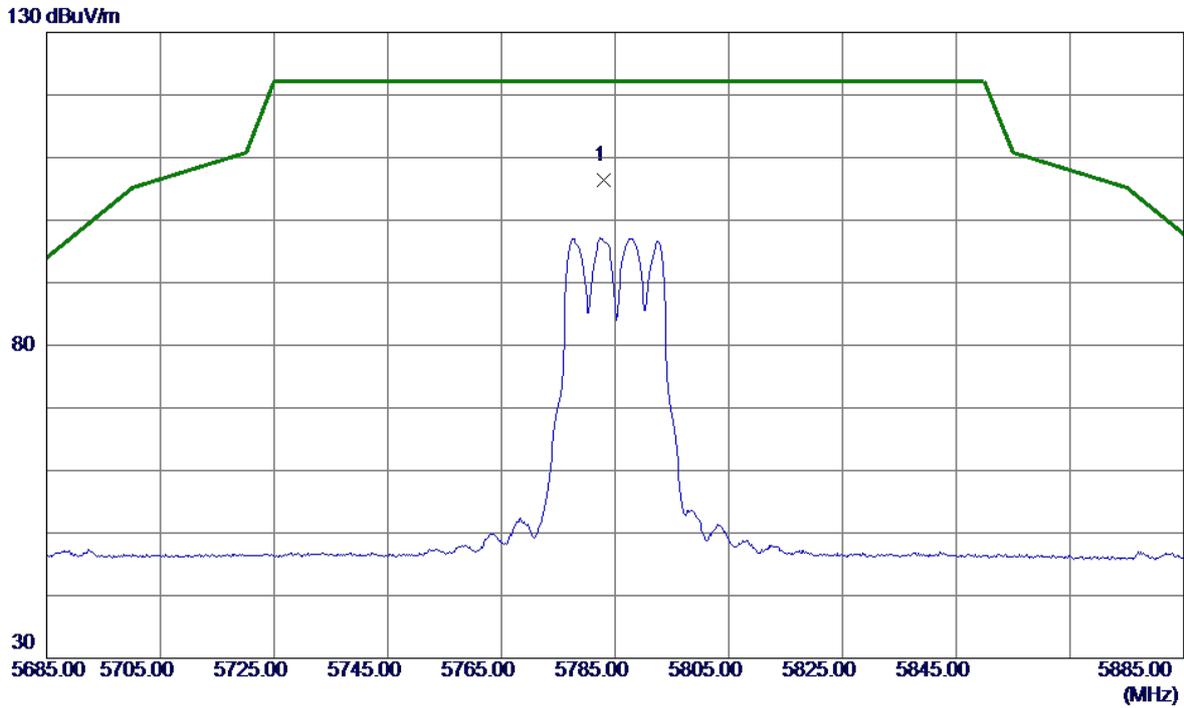


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5783.0000	89.48	16.83	106.31	122.20	-15.89	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

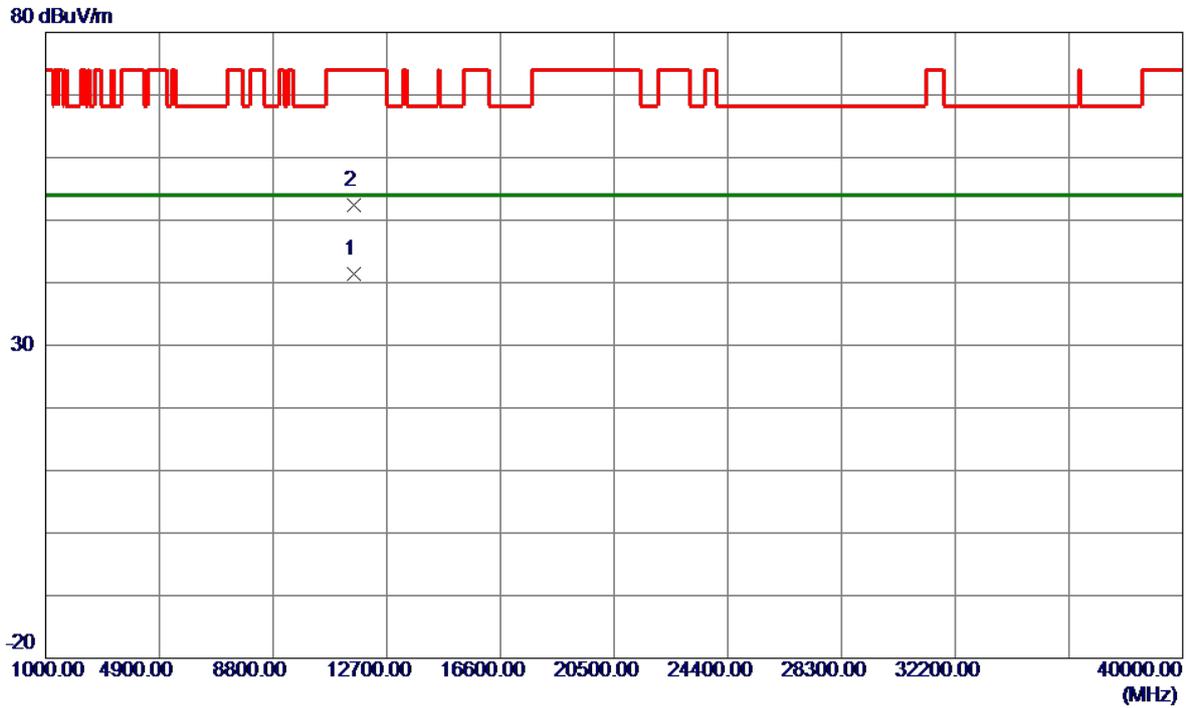


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11569.0500	26.76	14.71	41.47	54.00	-12.53	AVG	
2	11572.1100	37.67	14.71	52.38	74.00	-21.62	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

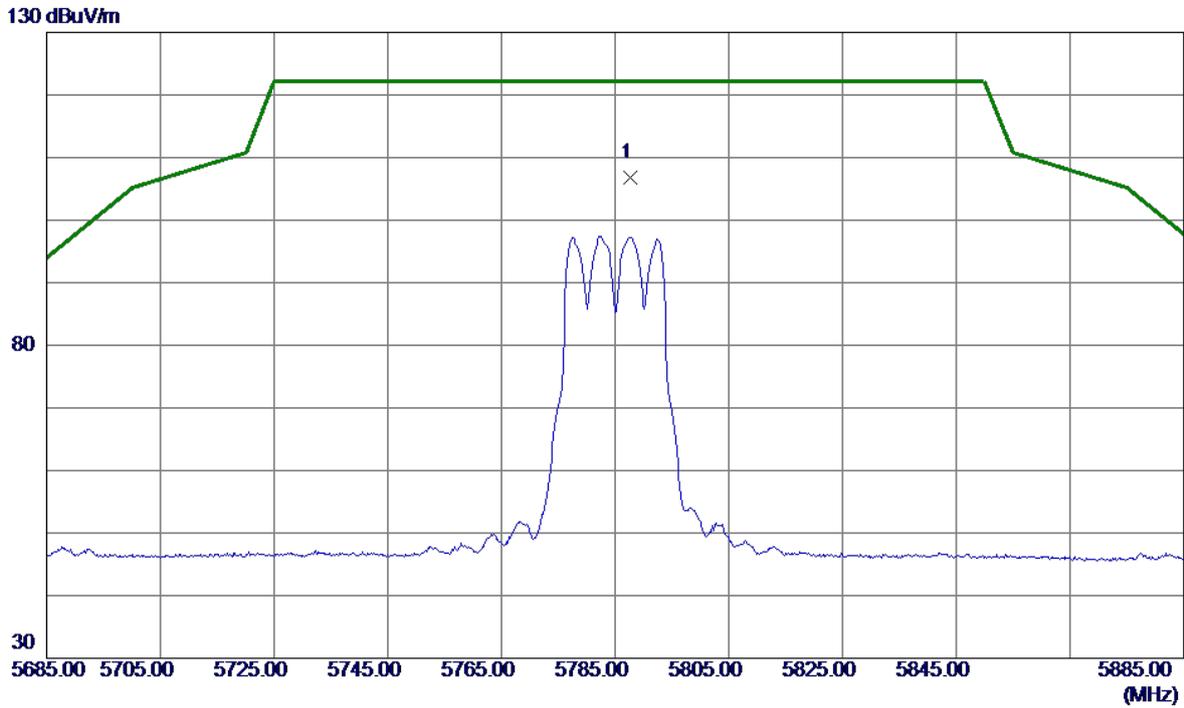


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5787.6000	89.93	16.83	106.76	122.20	-15.44	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

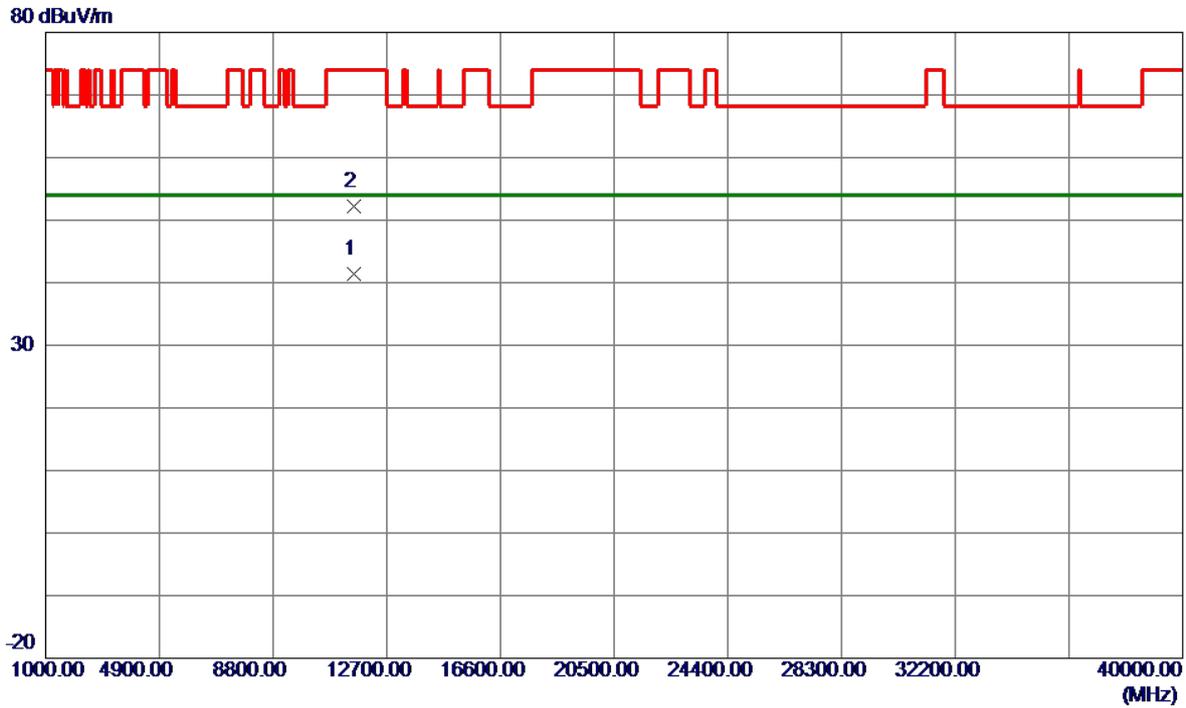


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11565.4100	26.77	14.71	41.48	54.00	-12.52	AVG	
2	11572.4000	37.55	14.72	52.27	74.00	-21.73	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

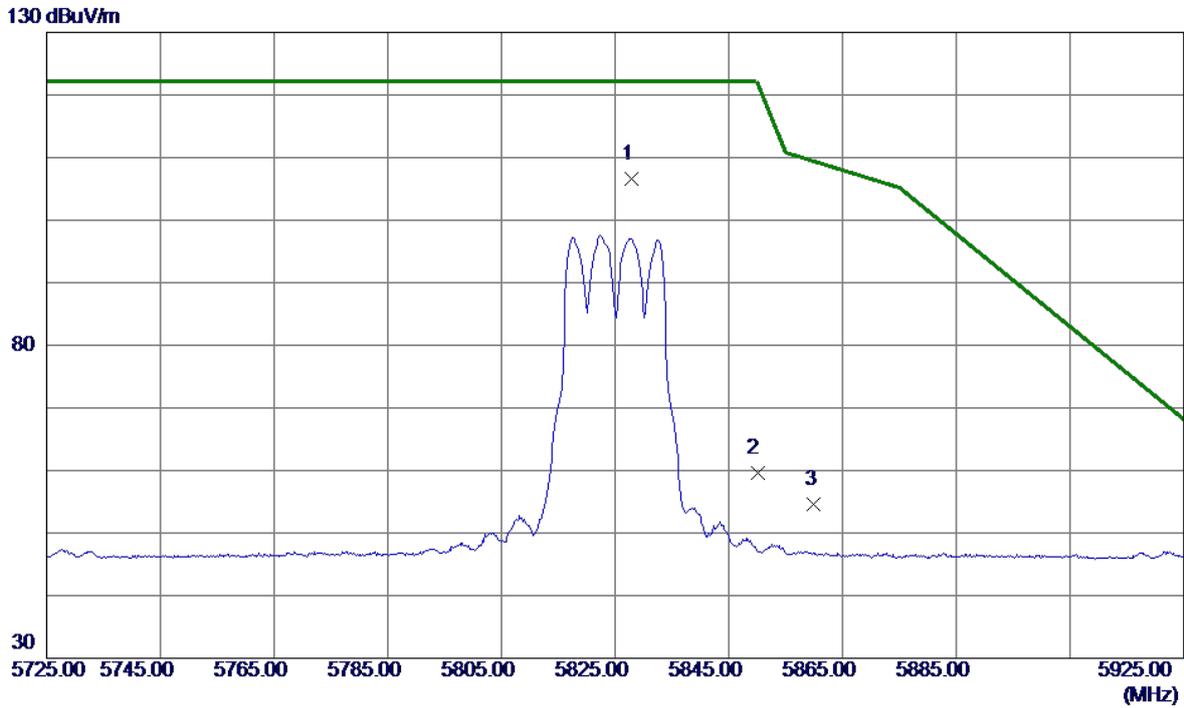


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5827.8000	89.69	16.86	106.55	122.20	-15.65	Peak	No Limit
2	5850.0000	42.80	16.87	59.67	122.20	-62.53	Peak	
3	5860.0000	37.80	16.88	54.68	109.40	-54.72	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

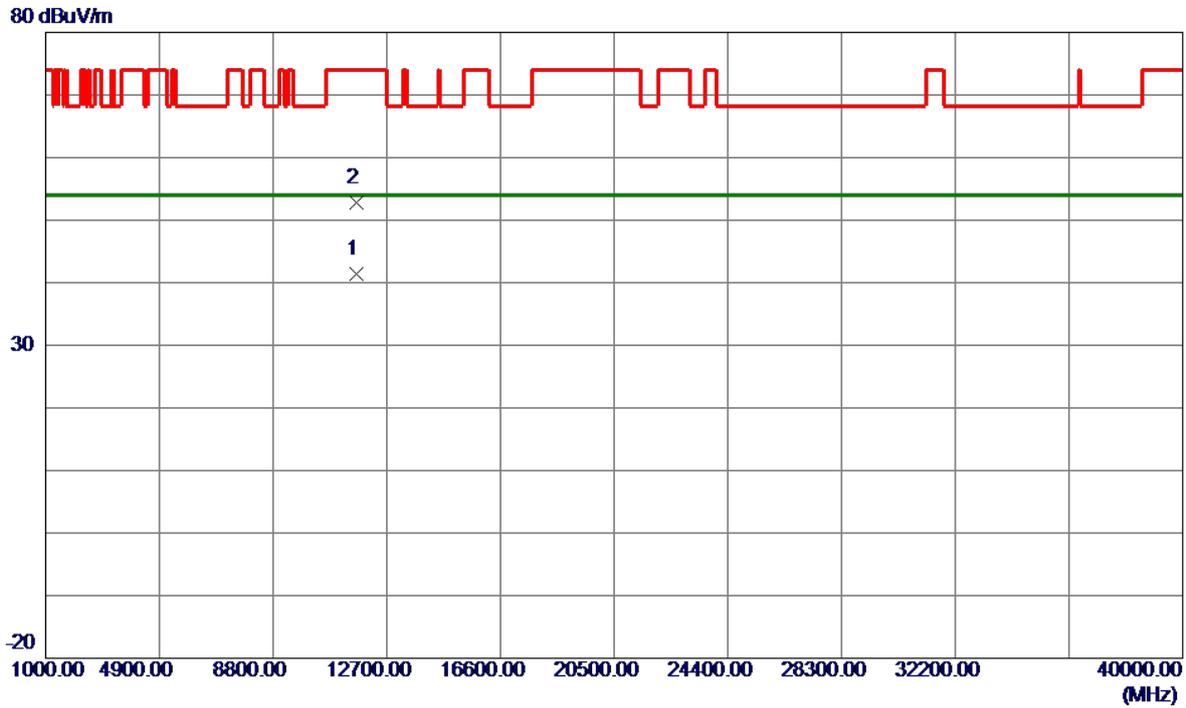


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11651.4500	26.70	14.78	41.48	54.00	-12.52	AVG	
2	11653.6000	38.06	14.78	52.84	74.00	-21.16	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

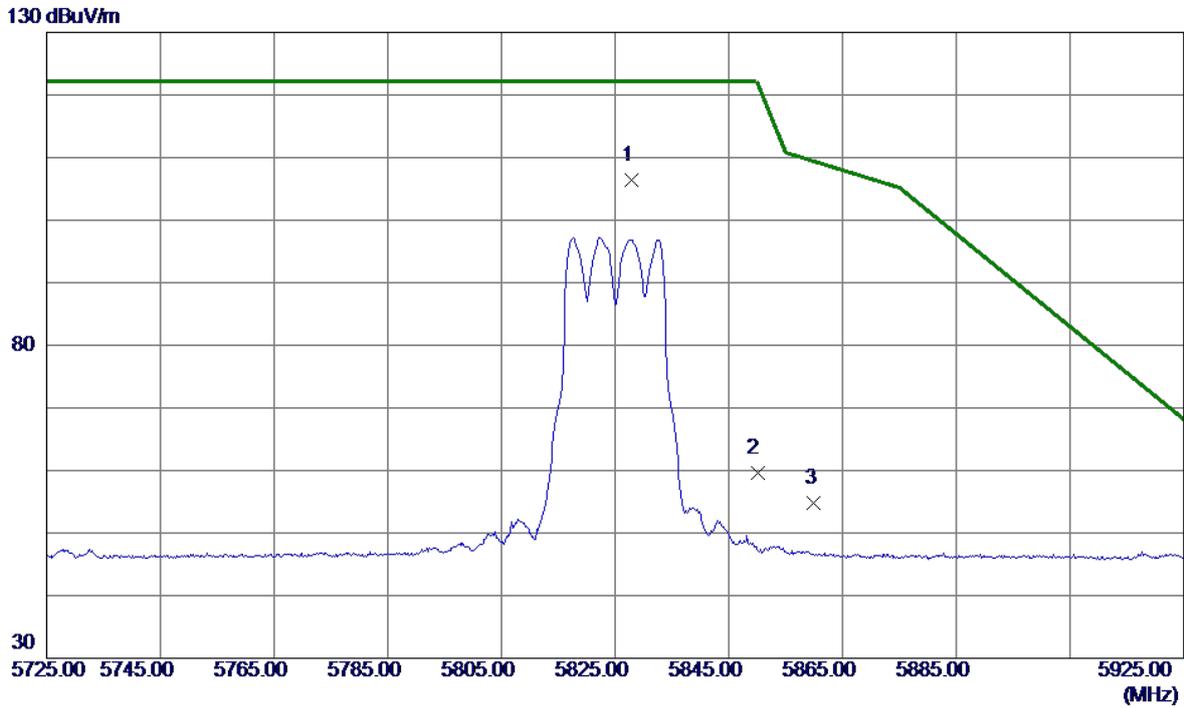


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5827.8000	89.63	16.86	106.49	122.20	-15.71	Peak	No Limit
2	5850.0000	42.74	16.87	59.61	122.20	-62.59	Peak	
3	5860.0000	37.97	16.88	54.85	109.40	-54.55	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

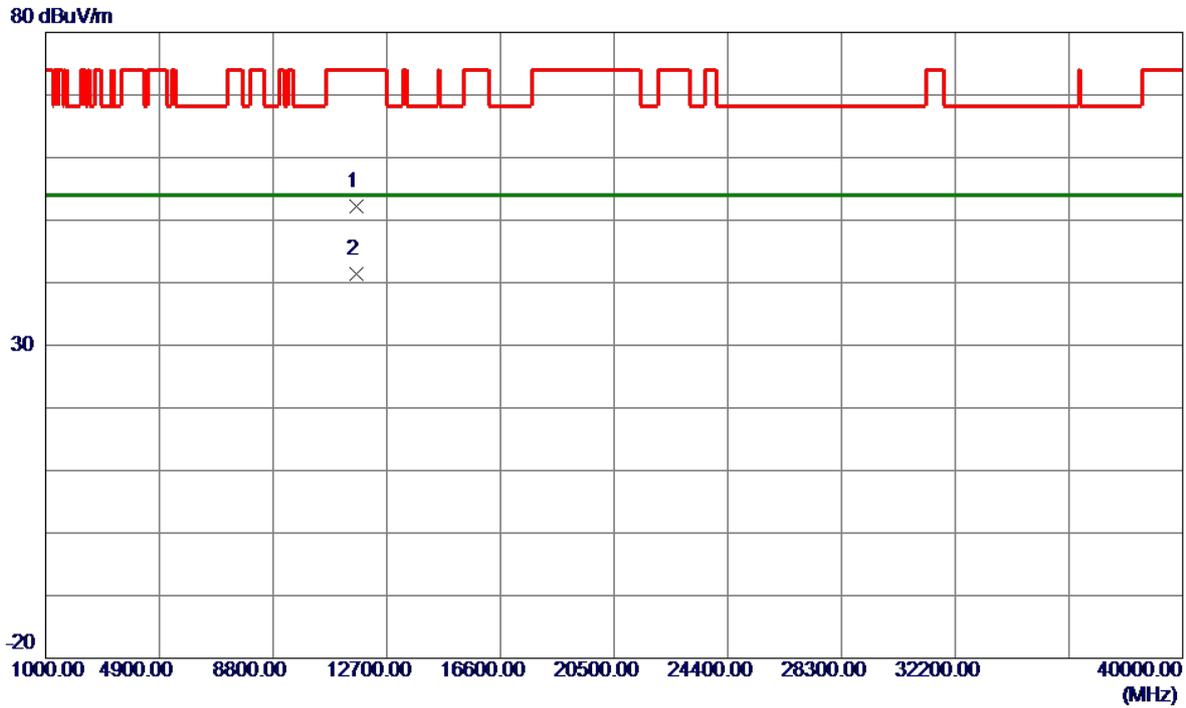


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.5900	37.48	14.78	52.26	74.00	-21.74	Peak	
2 *	11653.5800	26.68	14.78	41.46	54.00	-12.54	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

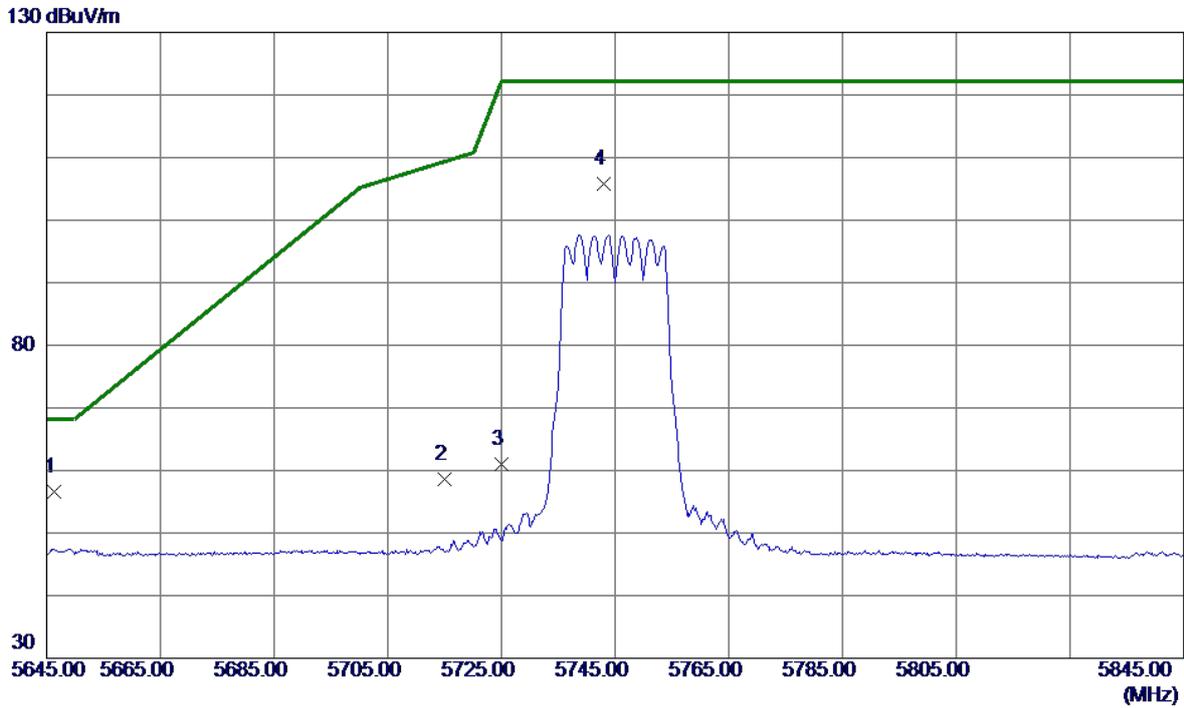


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.4000	39.85	16.75	56.60	68.20	-11.60	Peak	
2	5715.0000	41.83	16.79	58.62	109.40	-50.78	Peak	
3	5725.0000	44.25	16.80	61.05	122.20	-61.15	Peak	
4	5743.0000	89.01	16.81	105.82	122.20	-16.38	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

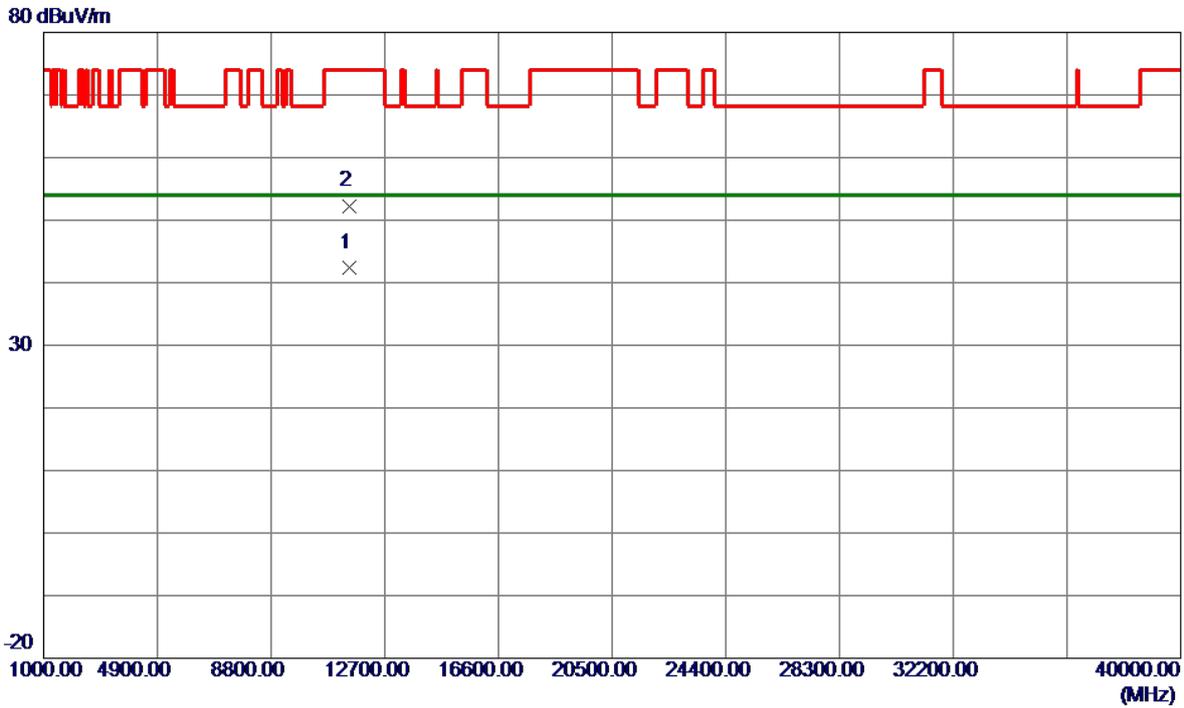


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.8500	27.77	14.64	42.41	54.00	-11.59	AVG	
2	11491.1100	37.66	14.64	52.30	74.00	-21.70	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

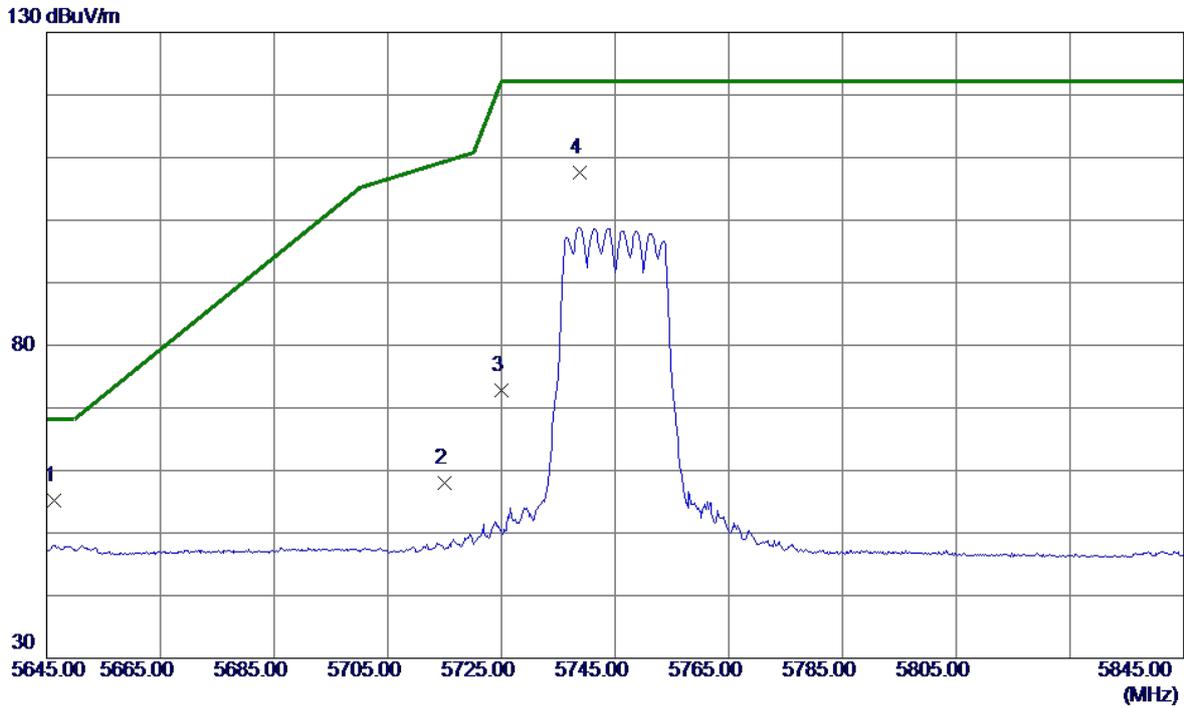


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.4000	38.40	16.75	55.15	68.20	-13.05	Peak	
2	5715.0000	41.14	16.79	57.93	109.40	-51.47	Peak	
3	5725.0000	55.96	16.80	72.76	122.20	-49.44	Peak	
4	5738.8000	90.78	16.81	107.59	122.20	-14.61	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

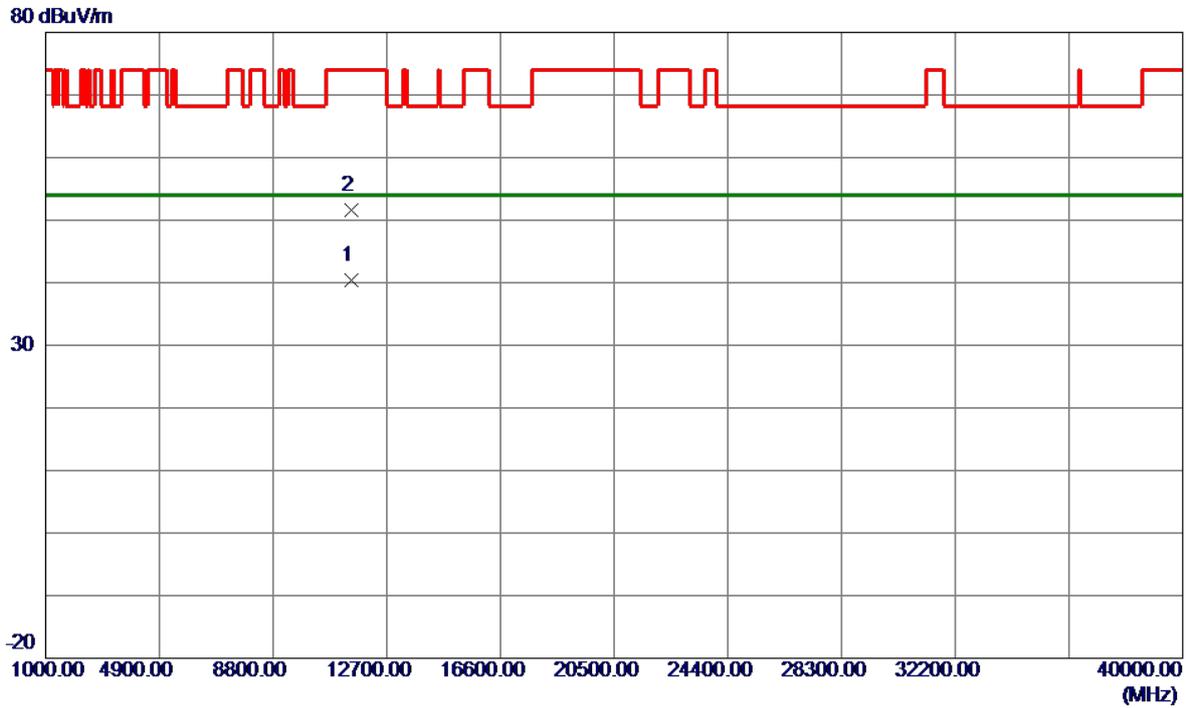


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.1200	25.78	14.64	40.42	54.00	-13.58	AVG	
2	11490.9900	37.05	14.64	51.69	74.00	-22.31	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

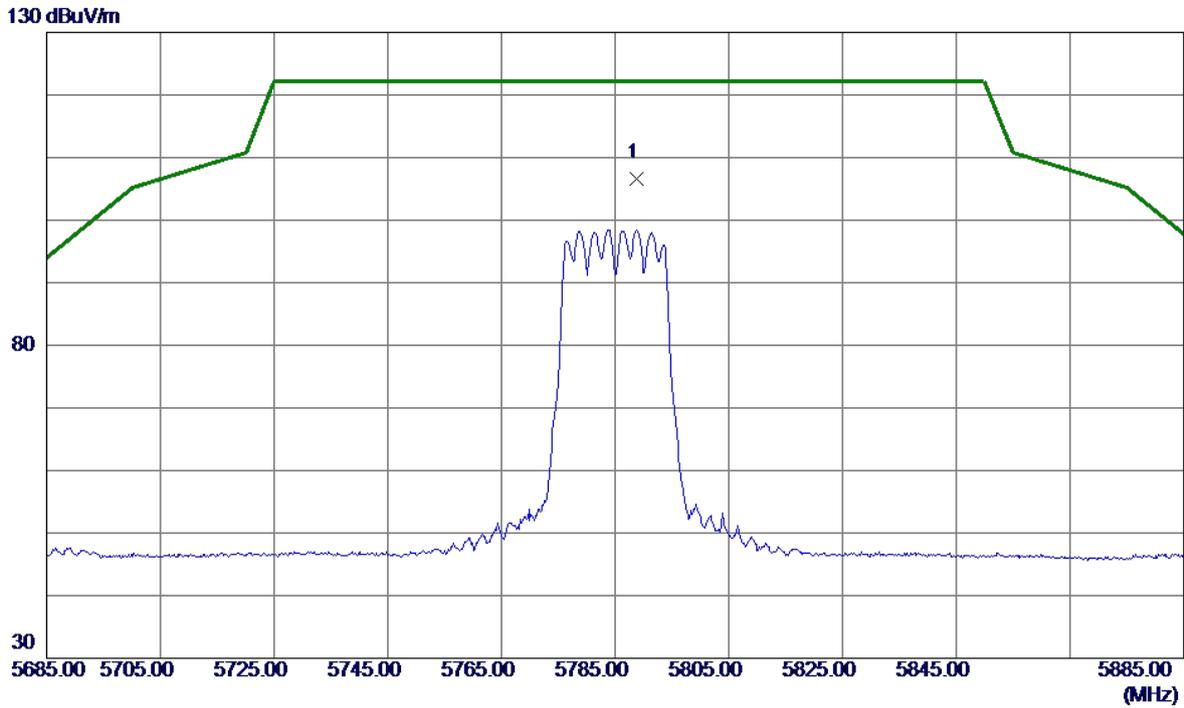


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5788.8000	89.86	16.84	106.70	122.20	-15.50	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

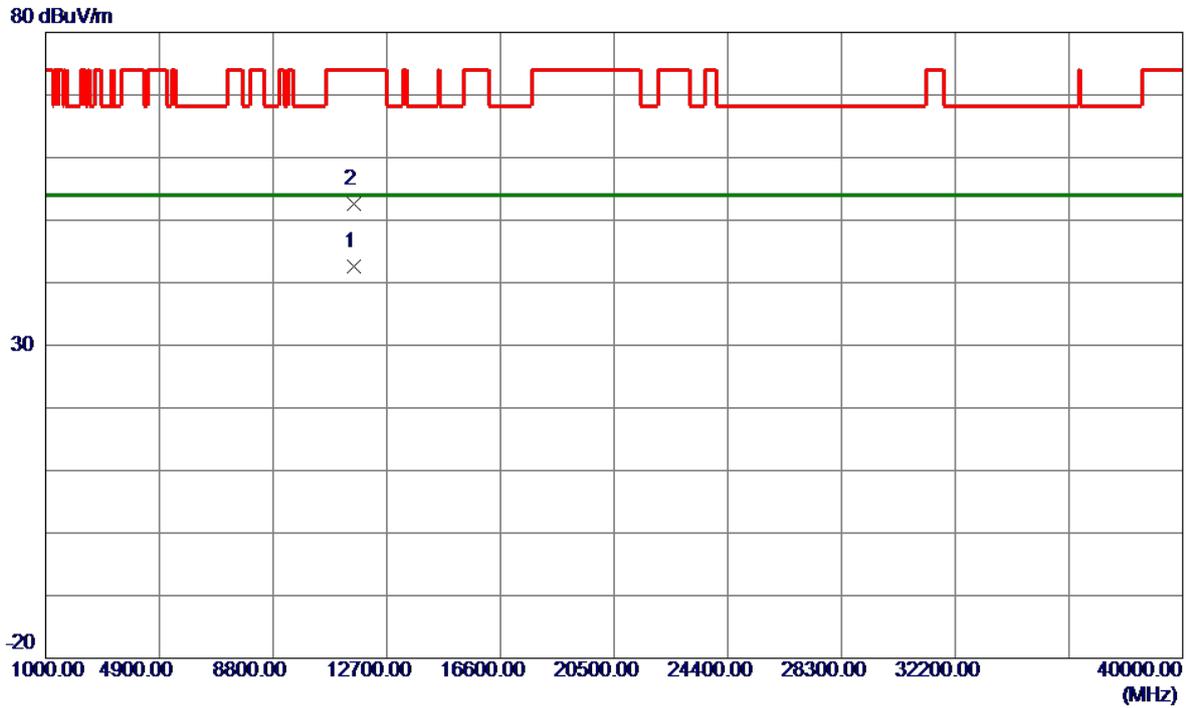


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.1700	27.94	14.71	42.65	54.00	-11.35	AVG	
2	11570.9900	37.91	14.71	52.62	74.00	-21.38	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

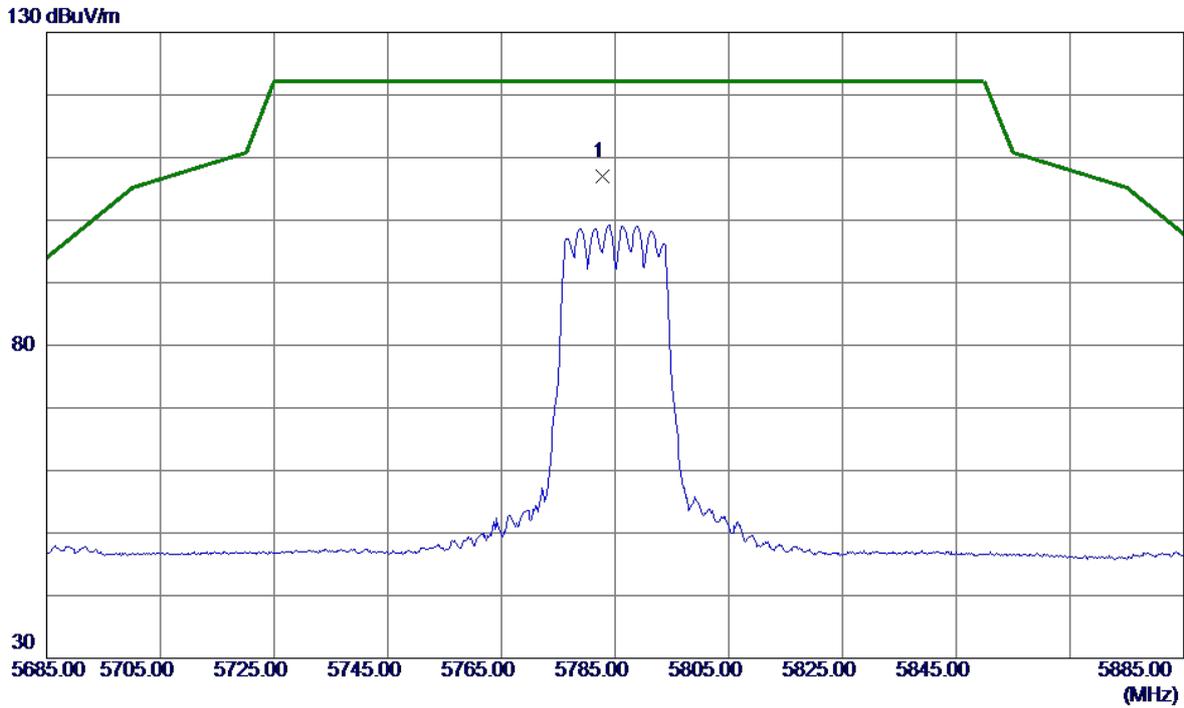


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5782.8000	90.23	16.83	107.06	122.20	-15.14	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

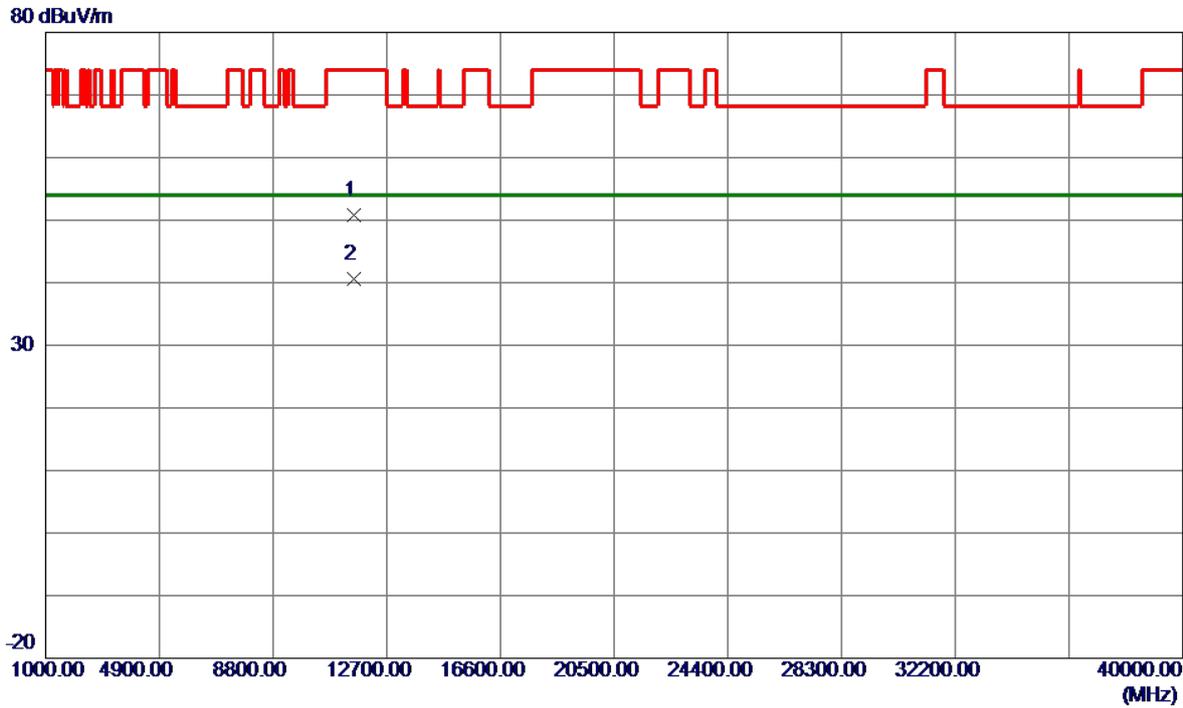


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.8000	36.08	14.71	50.79	74.00	-23.21	Peak	
2 *	11570.9500	25.86	14.71	40.57	54.00	-13.43	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

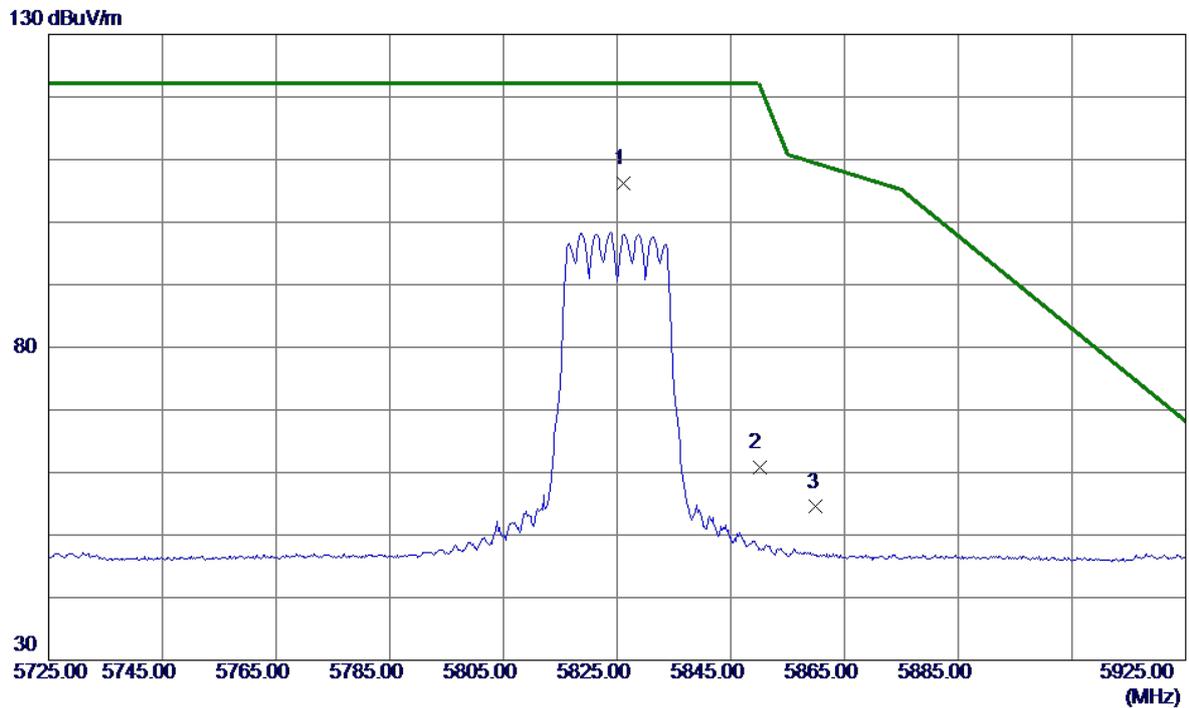


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.2000	89.37	16.86	106.23	122.20	-15.97	Peak	No Limit
2	5850.0000	43.91	16.87	60.78	122.20	-61.42	Peak	
3	5860.0000	37.62	16.88	54.50	109.40	-54.90	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

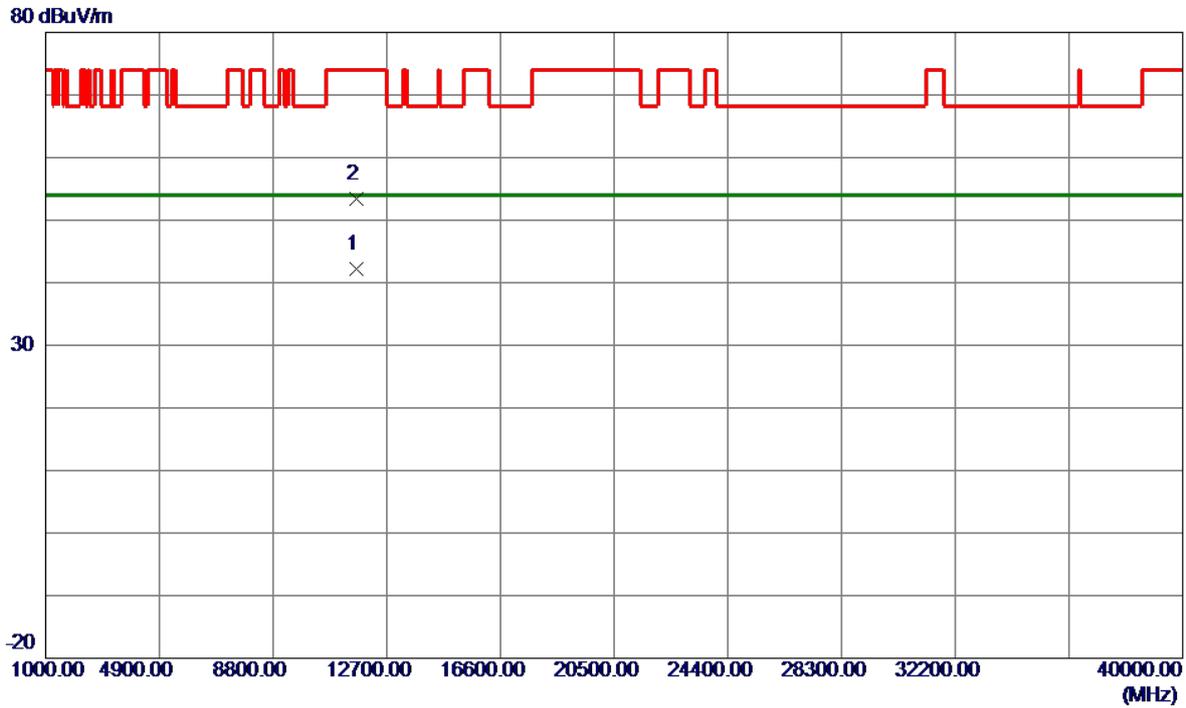


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.2200	27.49	14.78	42.27	54.00	-11.73	AVG	
2	11650.9400	38.58	14.78	53.36	74.00	-20.64	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

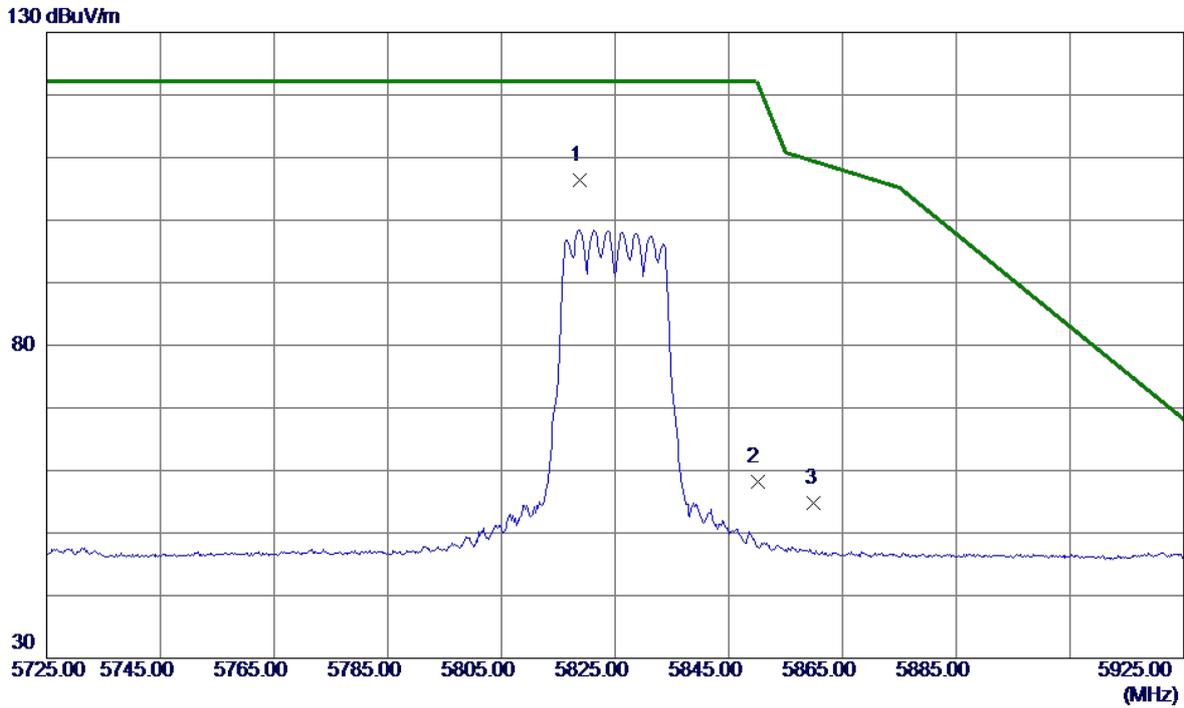


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5818.8000	89.60	16.85	106.45	122.20	-15.75	Peak	No Limit
2	5850.0000	41.39	16.87	58.26	122.20	-63.94	Peak	
3	5860.0000	37.85	16.88	54.73	109.40	-54.67	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

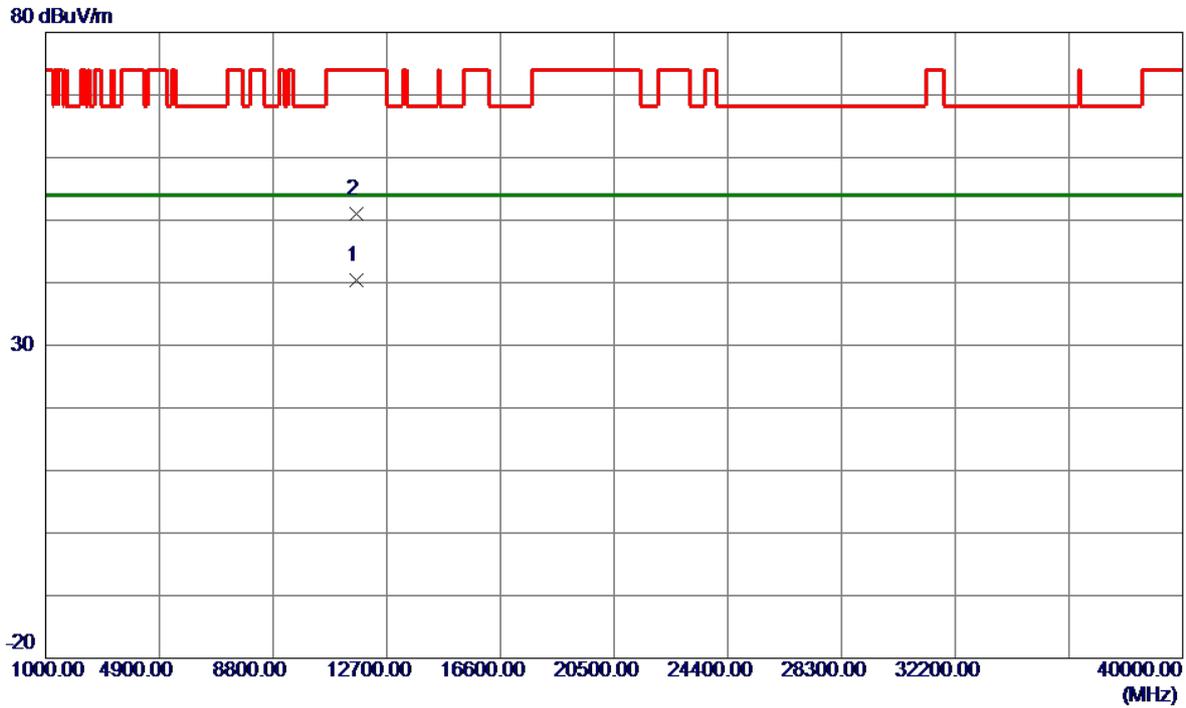


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.6700	25.61	14.78	40.39	54.00	-13.61	AVG	
2	11650.9500	36.27	14.78	51.05	74.00	-22.95	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

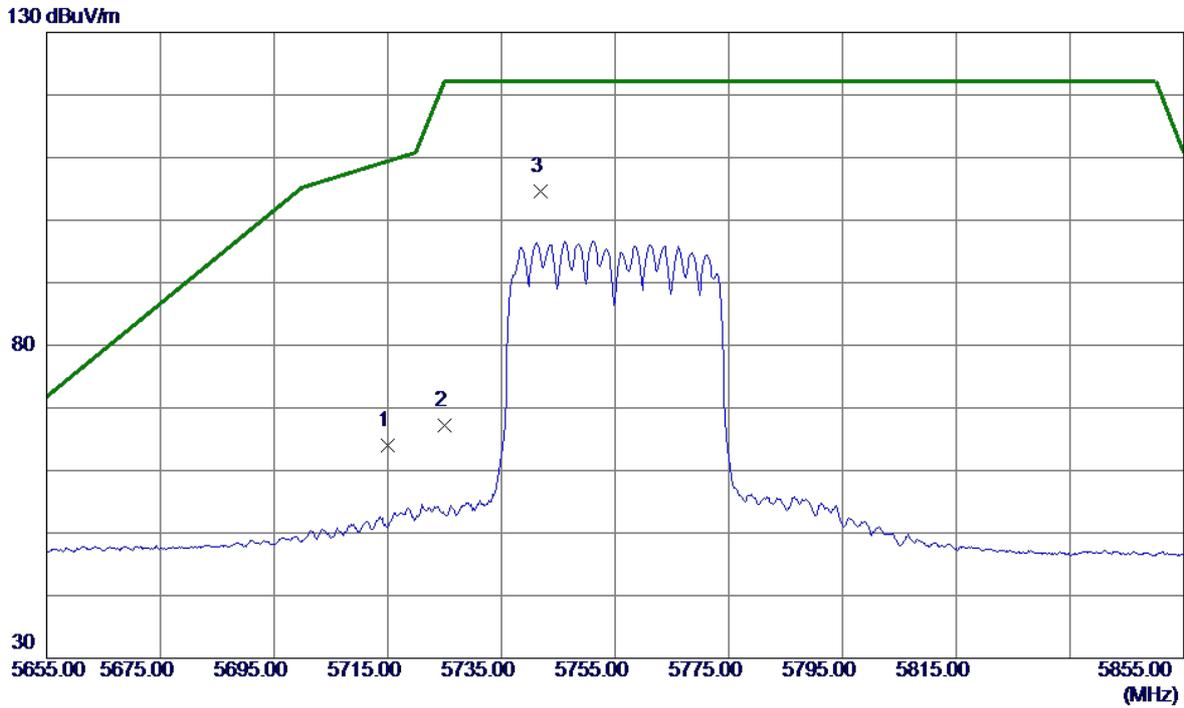


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	47.21	16.79	64.00	109.40	-45.40	Peak	
2	5725.0000	50.38	16.80	67.18	122.20	-55.02	Peak	
3 *	5741.8000	87.75	16.81	104.56	122.20	-17.64	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

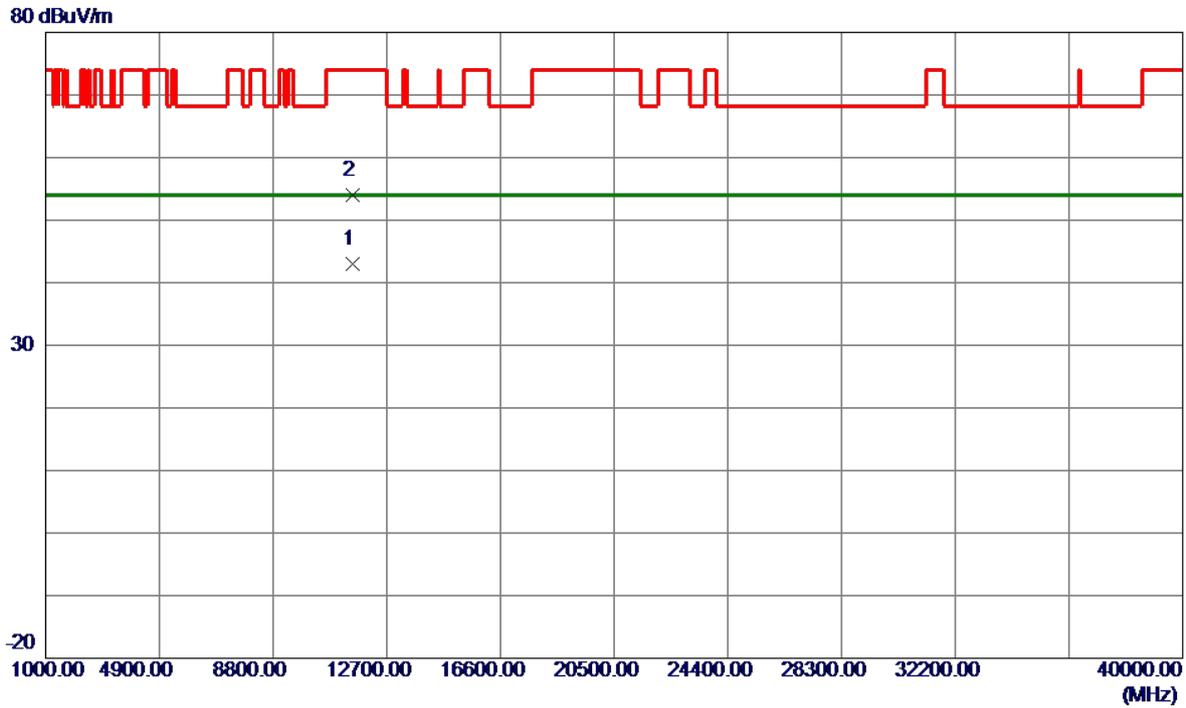


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.1250	28.33	14.66	42.99	54.00	-11.01	AVG	
2	11510.3050	39.39	14.66	54.05	74.00	-19.95	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

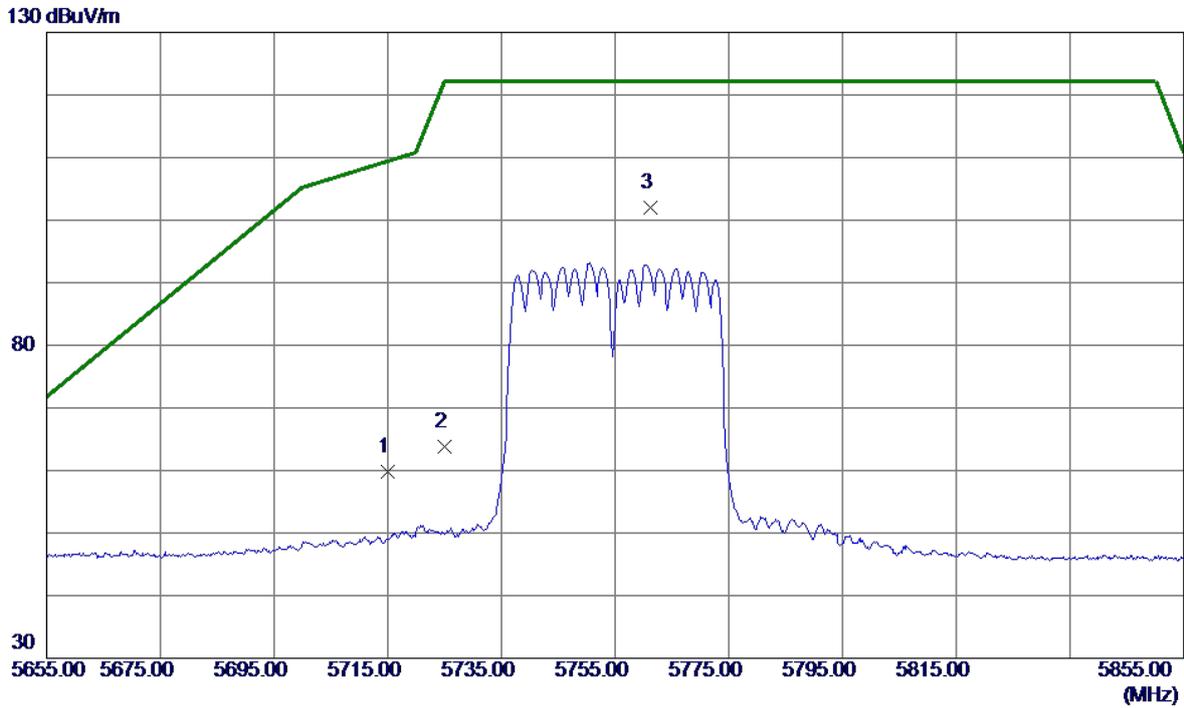


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	43.05	16.79	59.84	109.40	-49.56	Peak	
2	5725.0000	47.09	16.80	63.89	122.20	-58.31	Peak	
3 *	5761.2000	85.24	16.82	102.06	122.20	-20.14	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

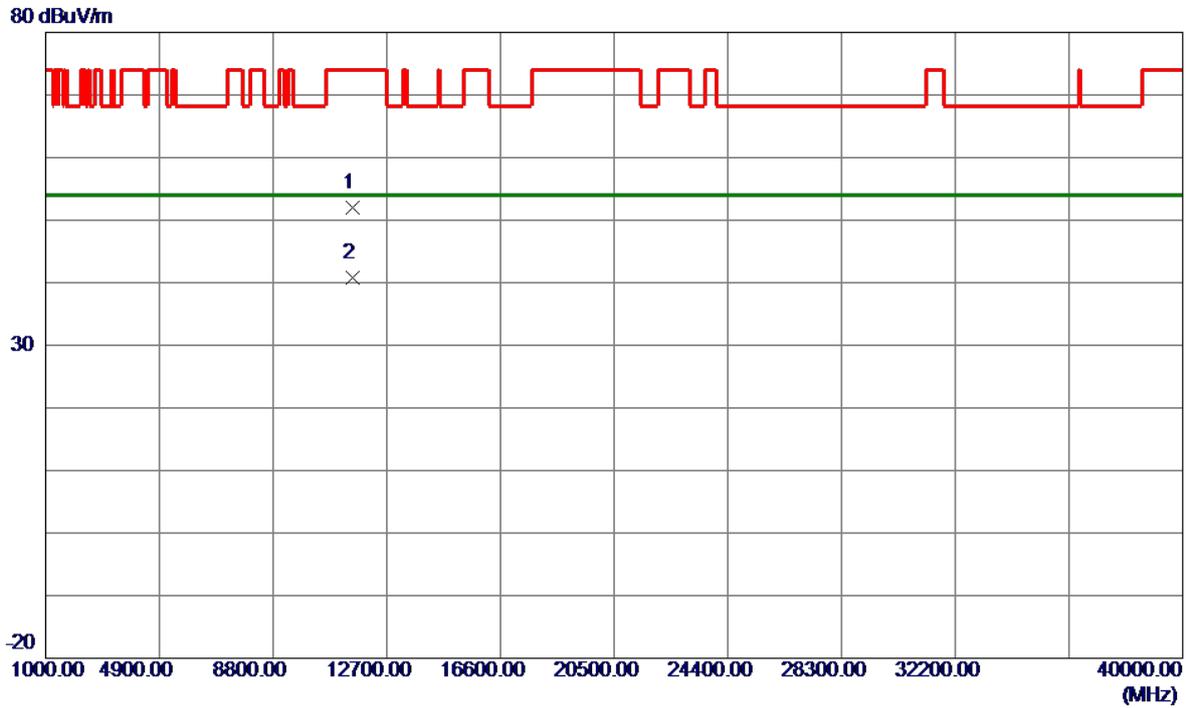


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.1650	37.36	14.66	52.02	74.00	-21.98	Peak	
2 *	11510.8200	26.23	14.66	40.89	54.00	-13.11	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

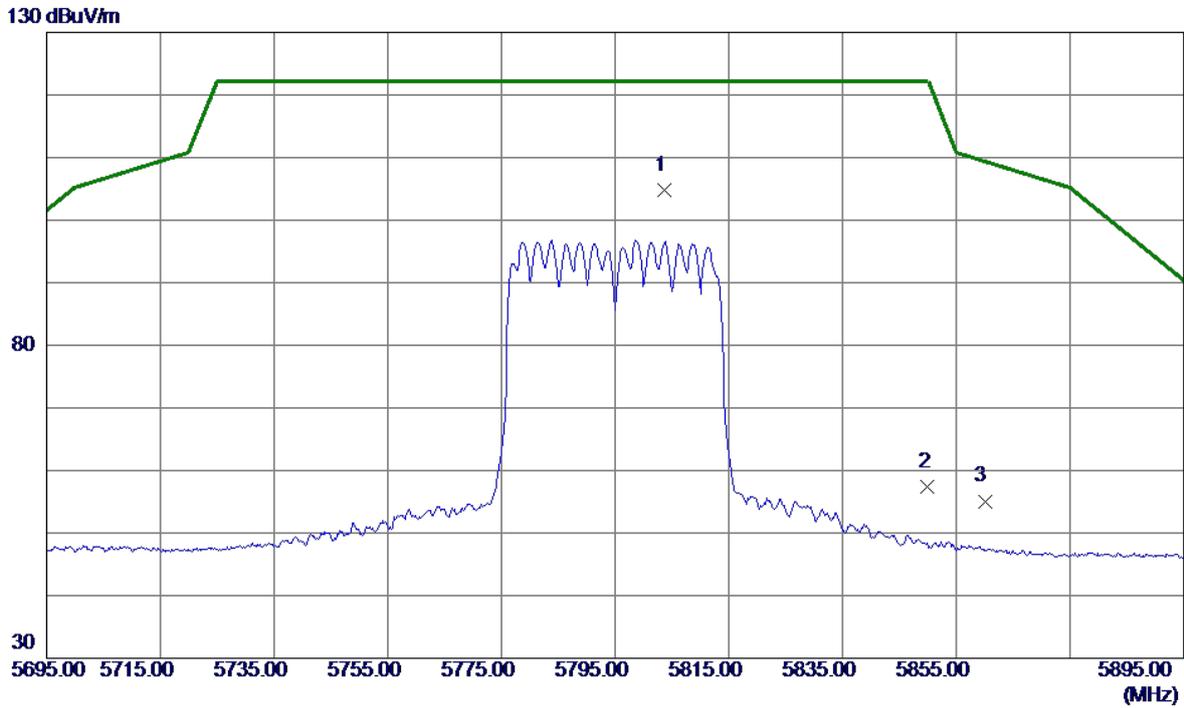


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5803.6000	88.02	16.84	104.86	122.20	-17.34	Peak	No Limit
2	5850.0000	40.58	16.87	57.45	122.20	-64.75	Peak	
3	5860.0000	38.22	16.88	55.10	109.40	-54.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

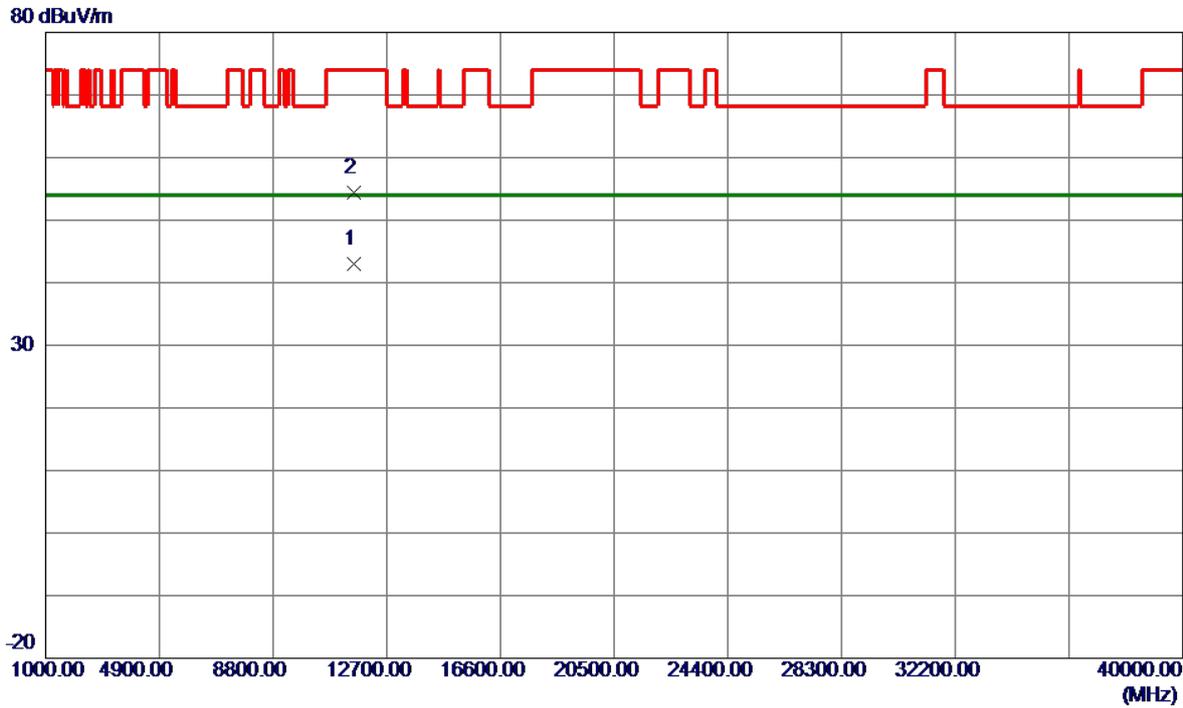


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.4100	28.21	14.73	42.94	54.00	-11.06	AVG	
2	11590.7200	39.69	14.73	54.42	74.00	-19.58	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

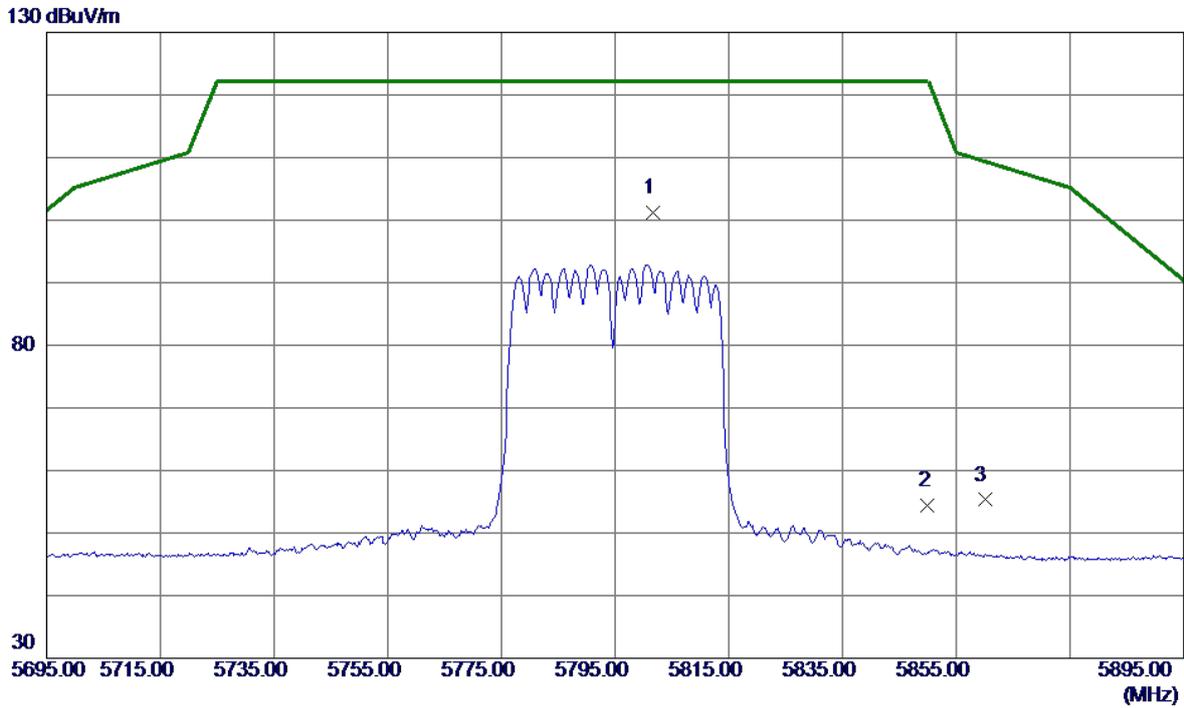


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5801.6000	84.44	16.84	101.28	122.20	-20.92	Peak	No Limit
2	5850.0000	37.61	16.87	54.48	122.20	-67.72	Peak	
3	5860.0000	38.42	16.88	55.30	109.40	-54.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

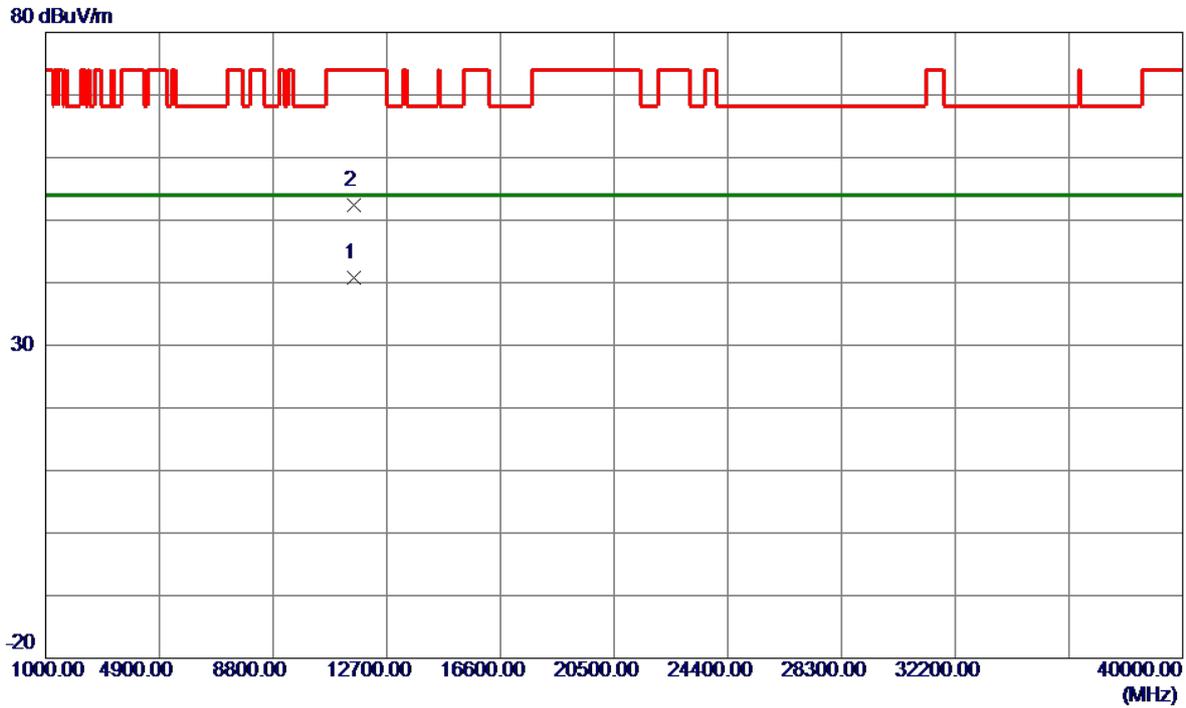


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.7900	26.05	14.73	40.78	54.00	-13.22	AVG	
2	11590.9950	37.68	14.73	52.41	74.00	-21.59	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

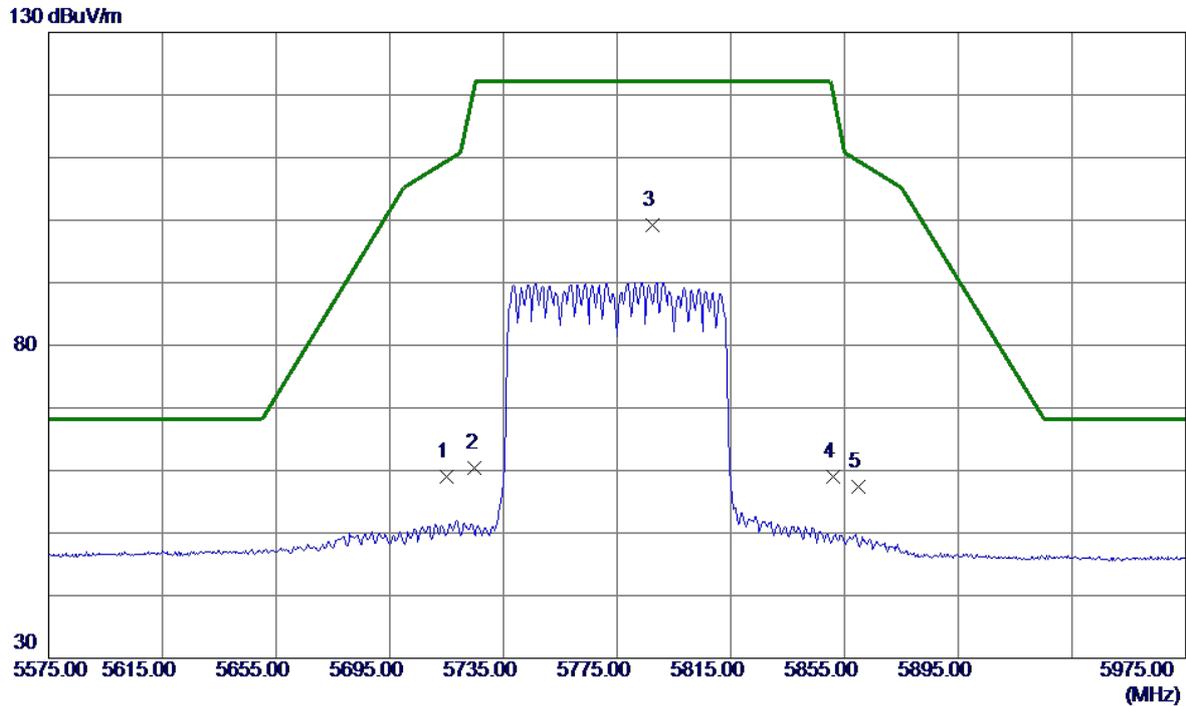


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	42.18	16.79	58.97	109.40	-50.43	Peak	
2	5725.0000	43.63	16.80	60.43	122.20	-61.77	Peak	
3 *	5787.4000	82.28	16.83	99.11	122.20	-23.09	Peak	No Limit
4	5851.0000	42.17	16.87	59.04	119.92	-60.88	Peak	
5	5860.0000	40.49	16.88	57.37	109.40	-52.03	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

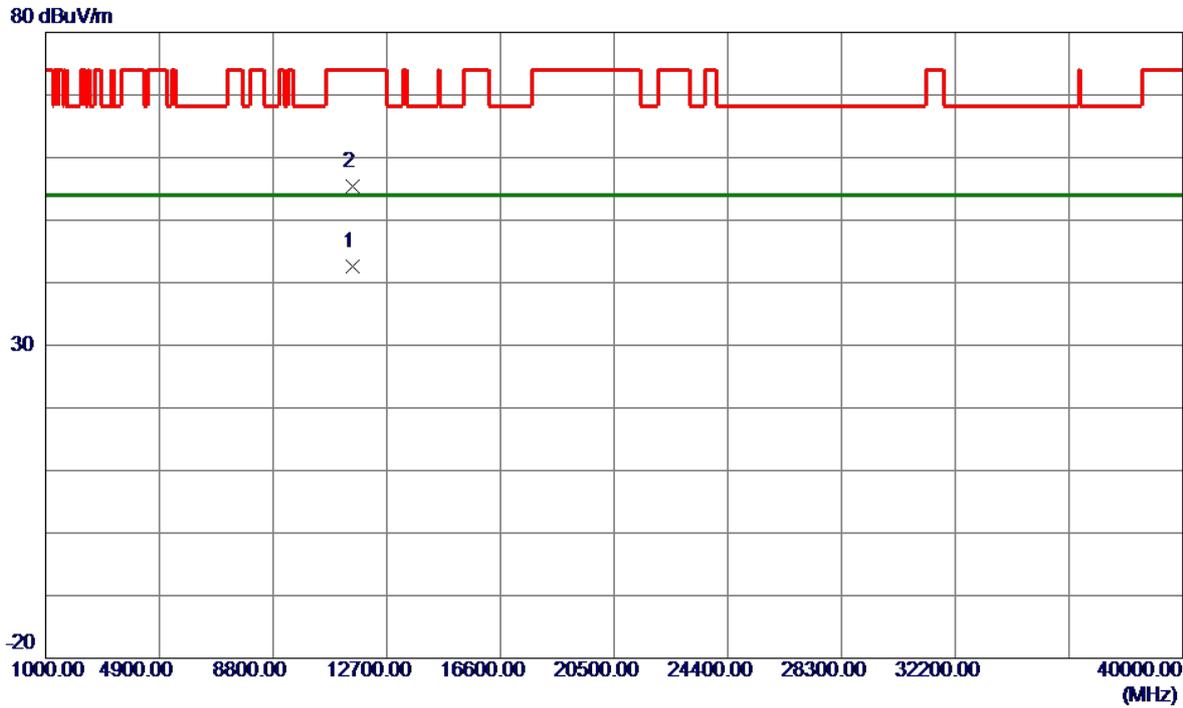


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.3300	27.98	14.70	42.68	54.00	-11.32	AVG	
2	11550.5450	40.70	14.70	55.40	74.00	-18.60	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

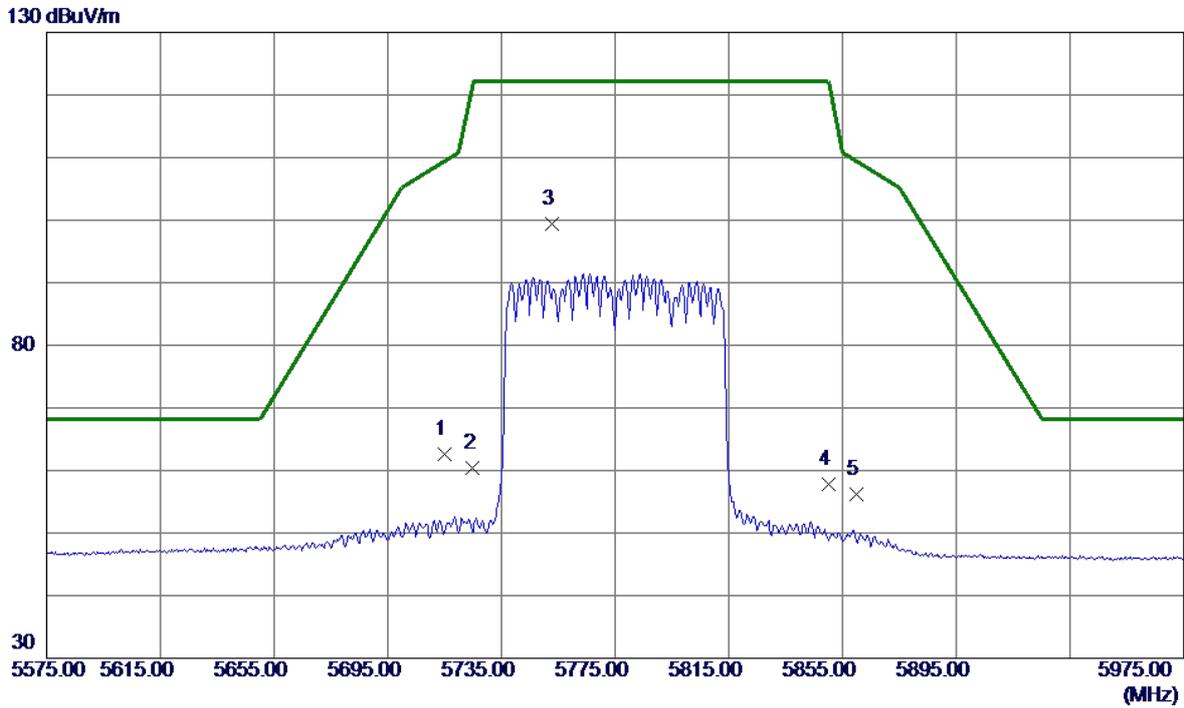


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	45.83	16.79	62.62	109.40	-46.78	Peak	
2	5725.0000	43.69	16.80	60.49	122.20	-61.71	Peak	
3 *	5752.6000	82.57	16.81	99.38	122.20	-22.82	Peak	No Limit
4	5850.0000	40.91	16.87	57.78	122.20	-64.42	Peak	
5	5860.0000	39.36	16.88	56.24	109.40	-53.16	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

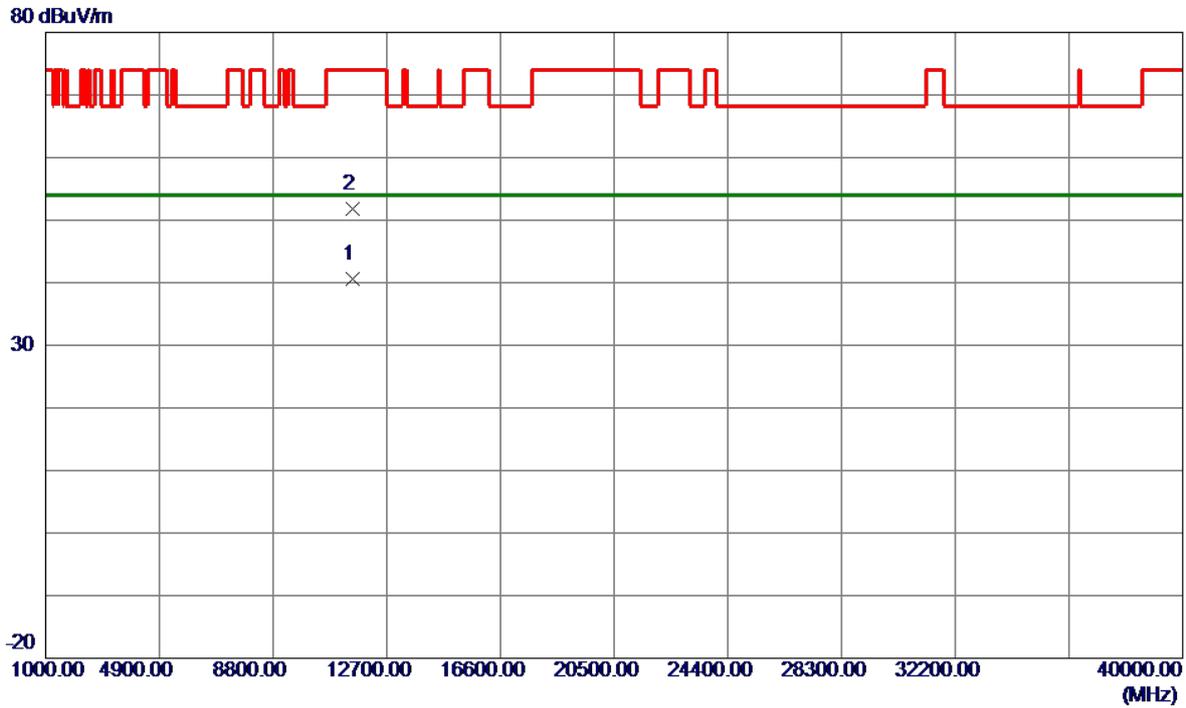


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.5300	25.92	14.70	40.62	54.00	-13.38	AVG	
2	11550.8949	37.08	14.70	51.78	74.00	-22.22	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

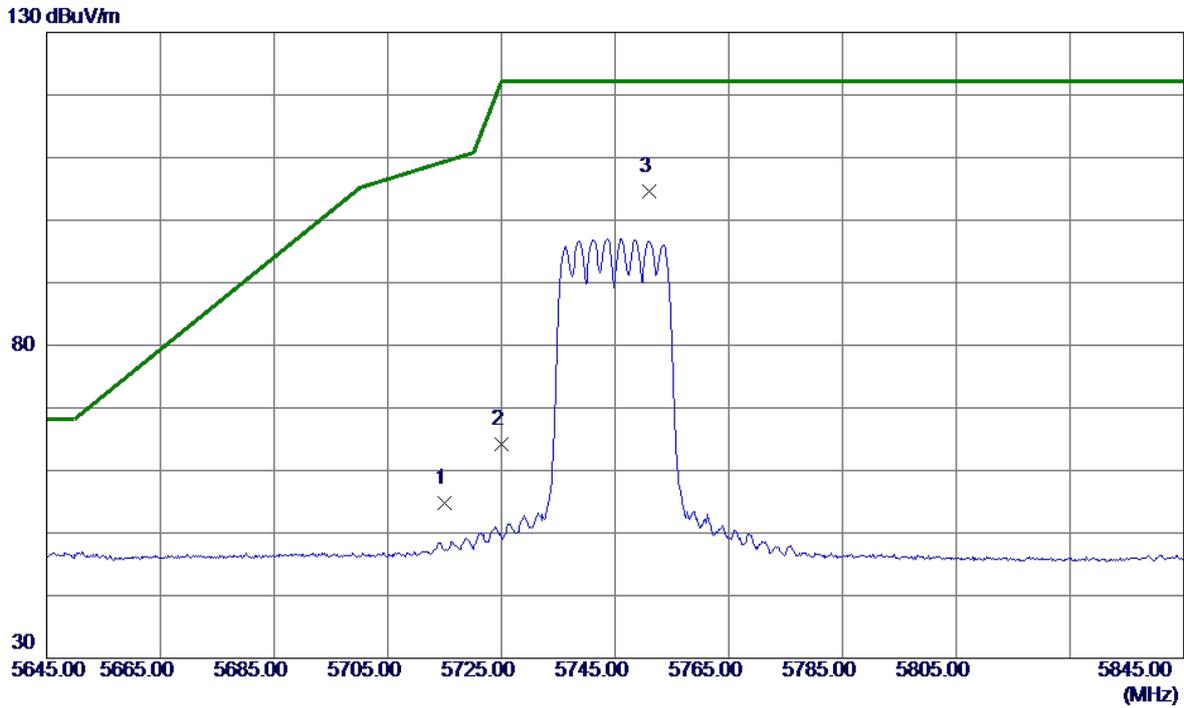


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.94	16.79	54.73	109.40	-54.67	Peak	
2	5725.0000	47.48	16.80	64.28	122.20	-57.92	Peak	
3 *	5751.0000	87.82	16.81	104.63	122.20	-17.57	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

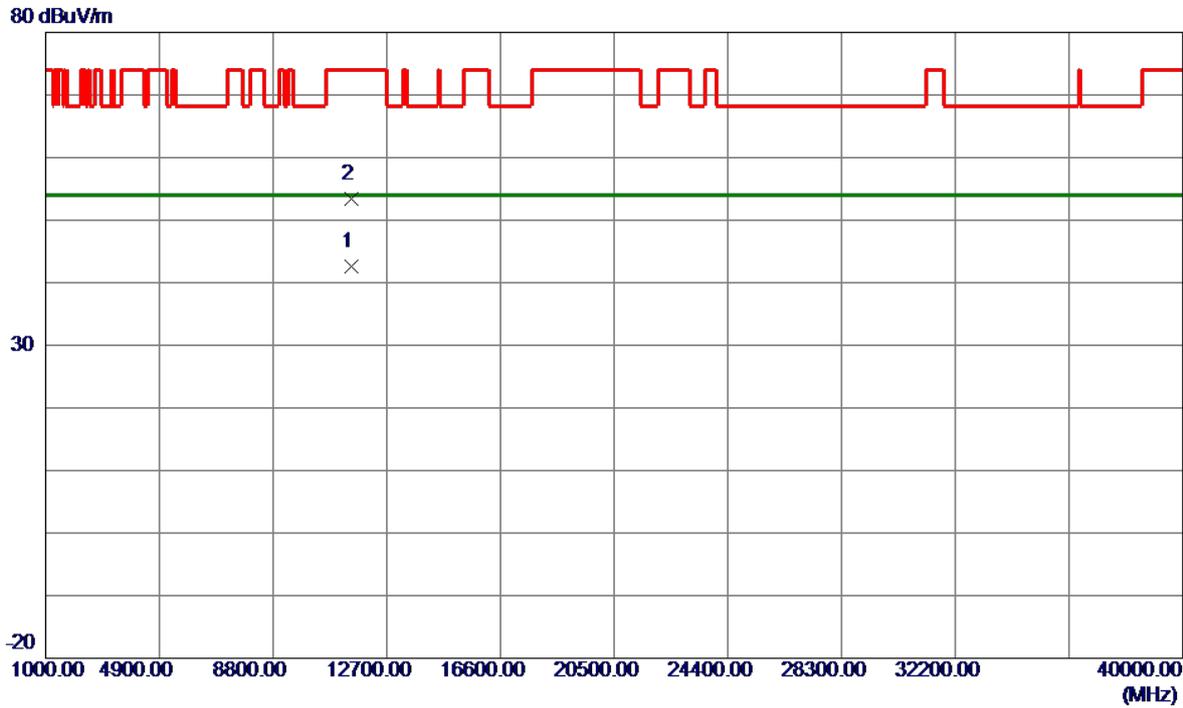


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.1650	27.95	14.64	42.59	54.00	-11.41	AVG	
2	11490.7800	38.76	14.64	53.40	74.00	-20.60	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

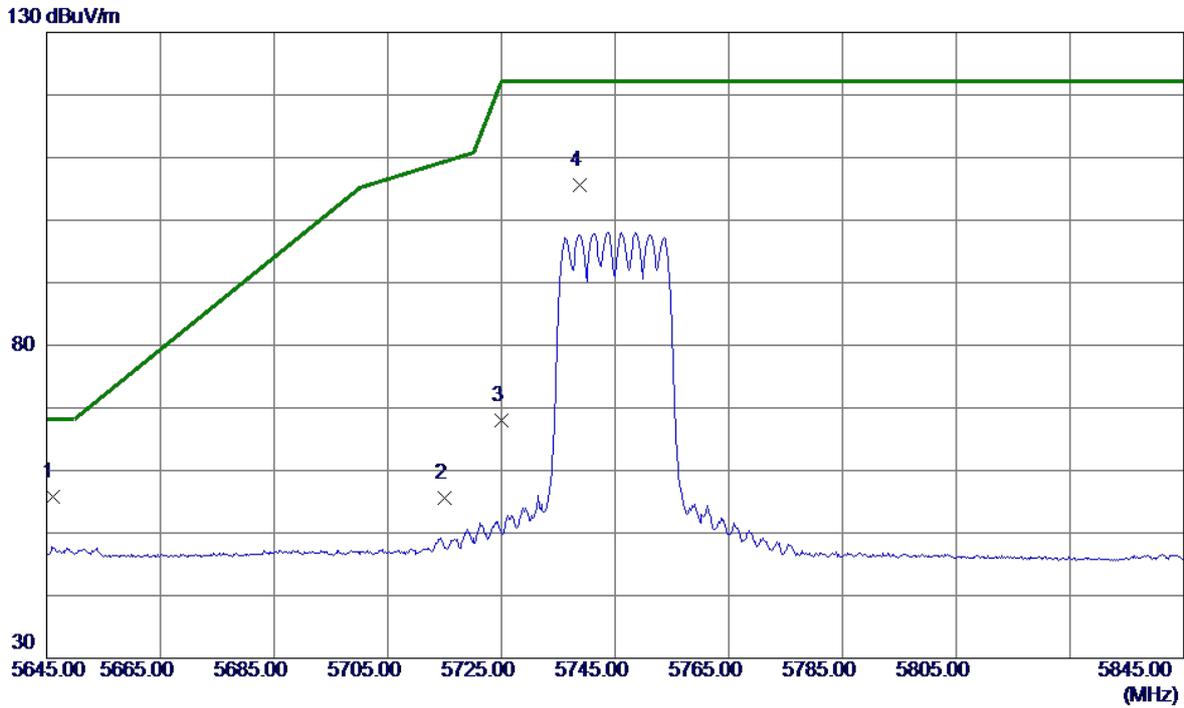


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.0000	39.05	16.75	55.80	68.20	-12.40	Peak	
2	5715.0000	38.83	16.79	55.62	109.40	-53.78	Peak	
3	5725.0000	51.15	16.80	67.95	122.20	-54.25	Peak	
4	5738.8000	88.87	16.81	105.68	122.20	-16.52	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

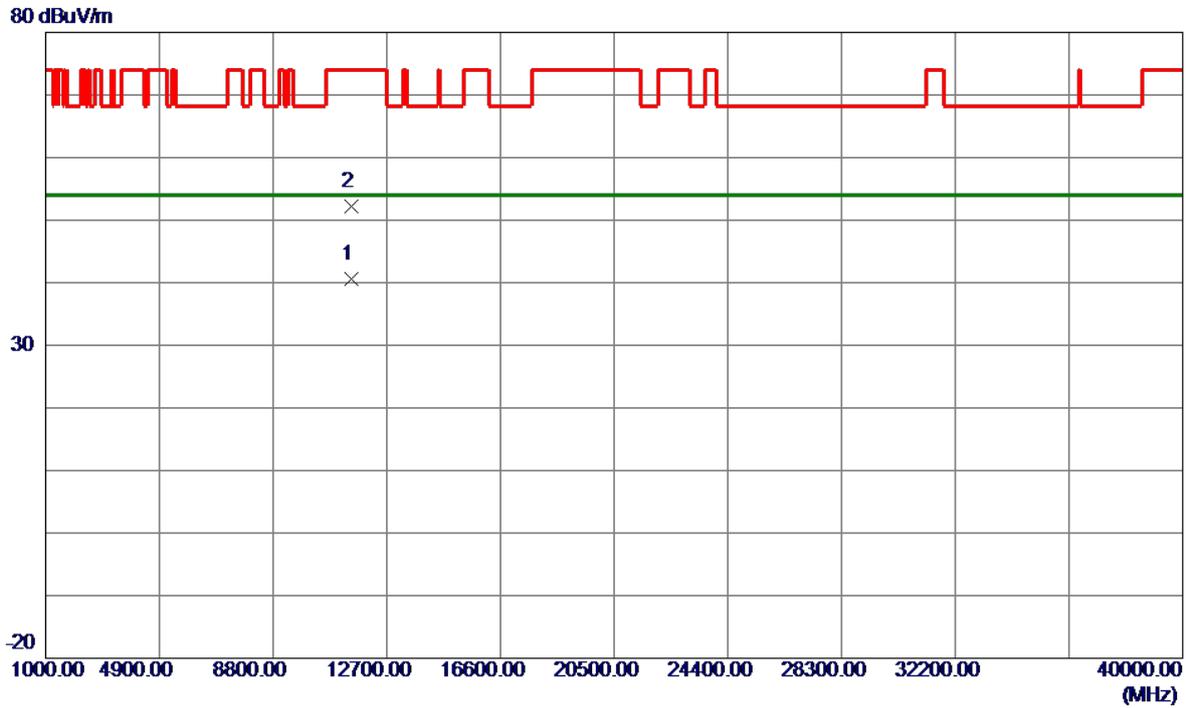


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.4500	25.92	14.64	40.56	54.00	-13.44	AVG	
2	11490.9650	37.55	14.64	52.19	74.00	-21.81	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

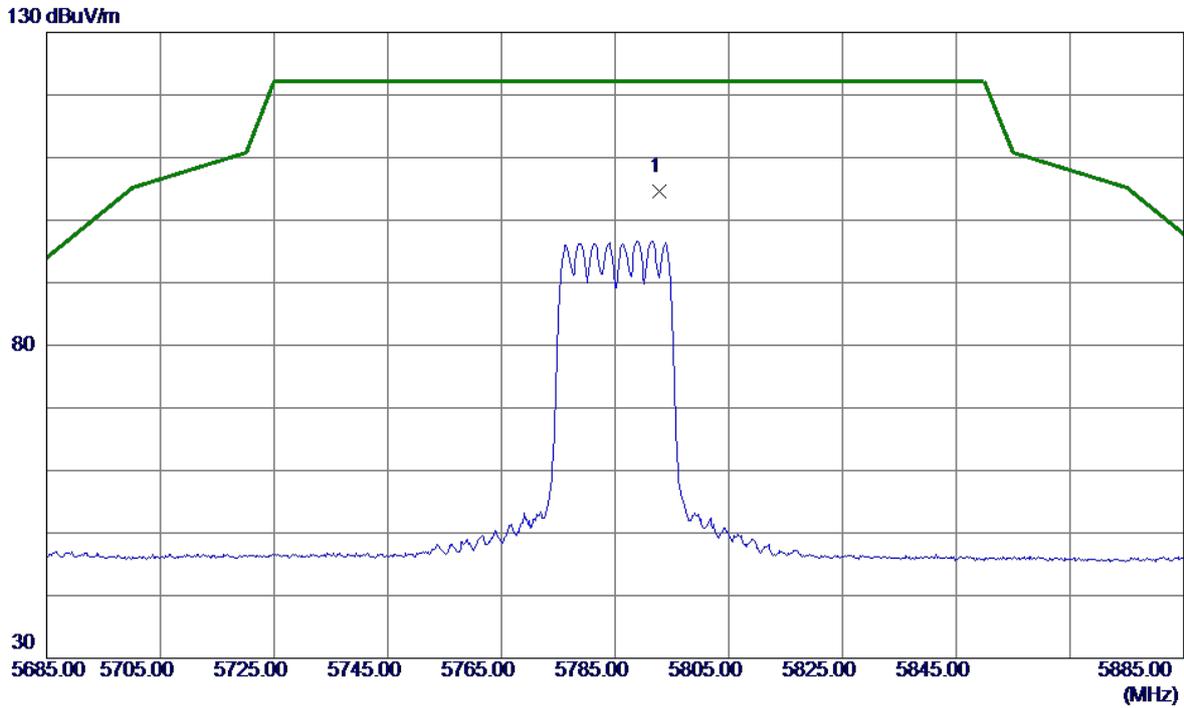


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5792.8000	87.76	16.84	104.60	122.20	-17.60	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

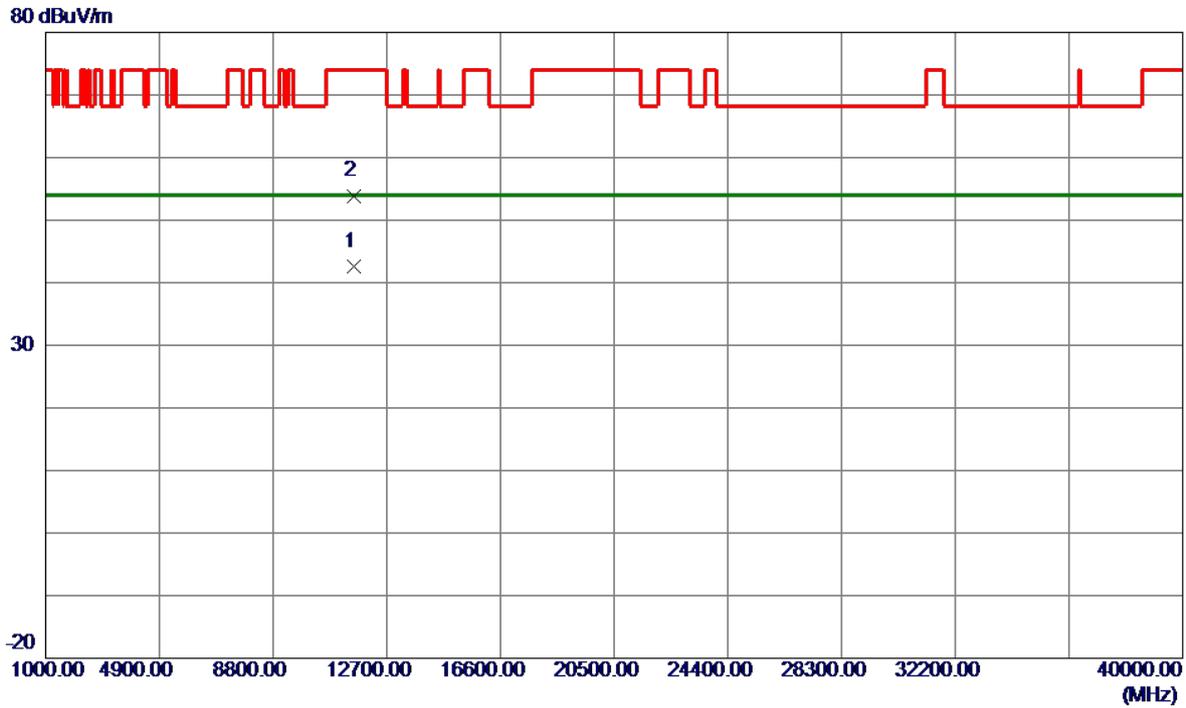


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.1650	27.82	14.71	42.53	54.00	-11.47	AVG	
2	11570.8450	39.19	14.71	53.90	74.00	-20.10	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

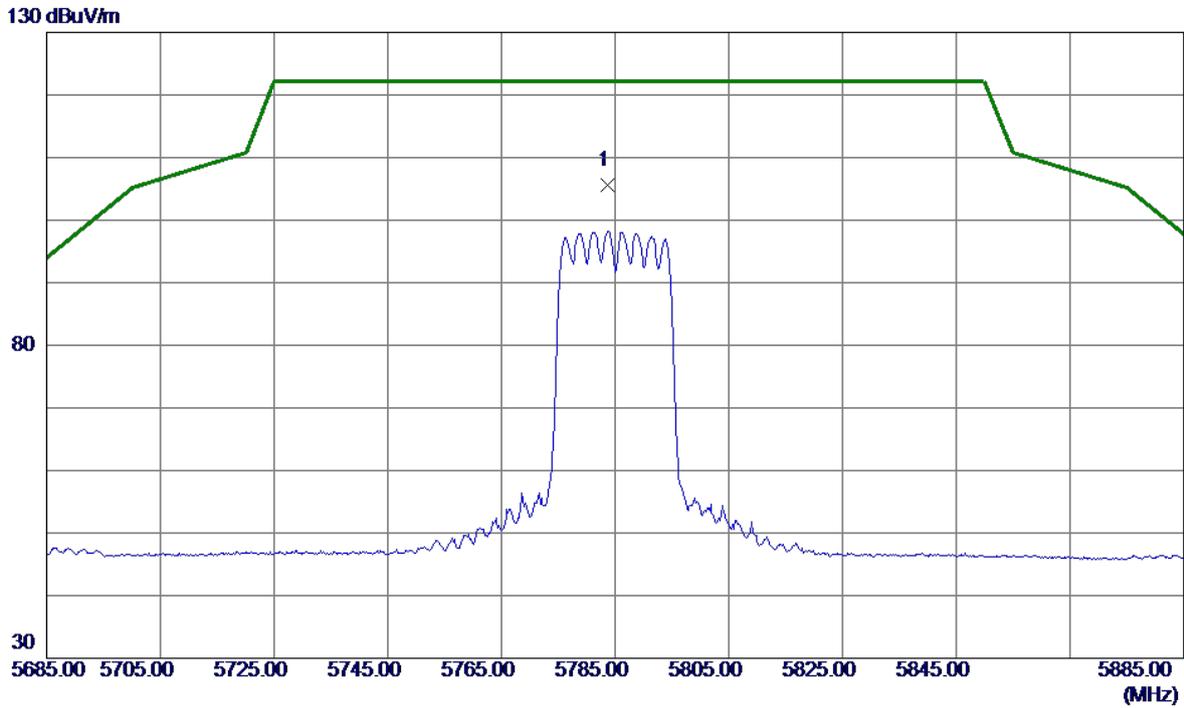


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5783.6000	88.83	16.83	105.66	122.20	-16.54	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

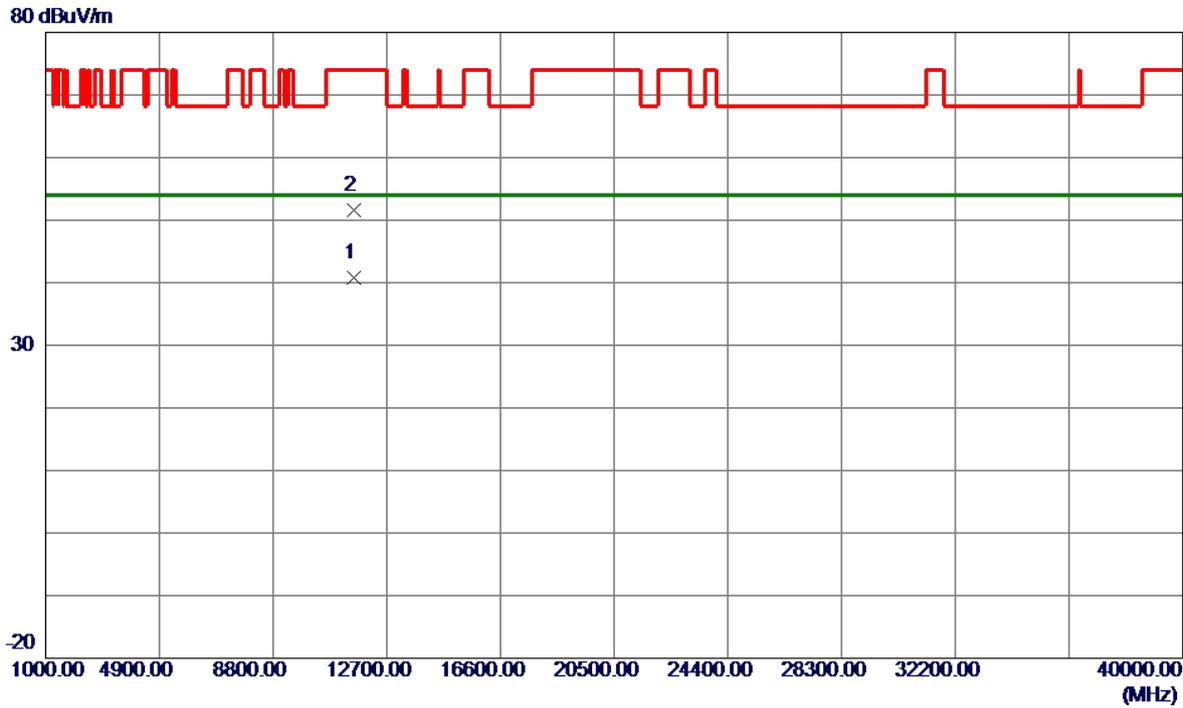


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.1650	26.04	14.71	40.75	54.00	-13.25	AVG	
2	11570.5700	36.95	14.71	51.66	74.00	-22.34	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

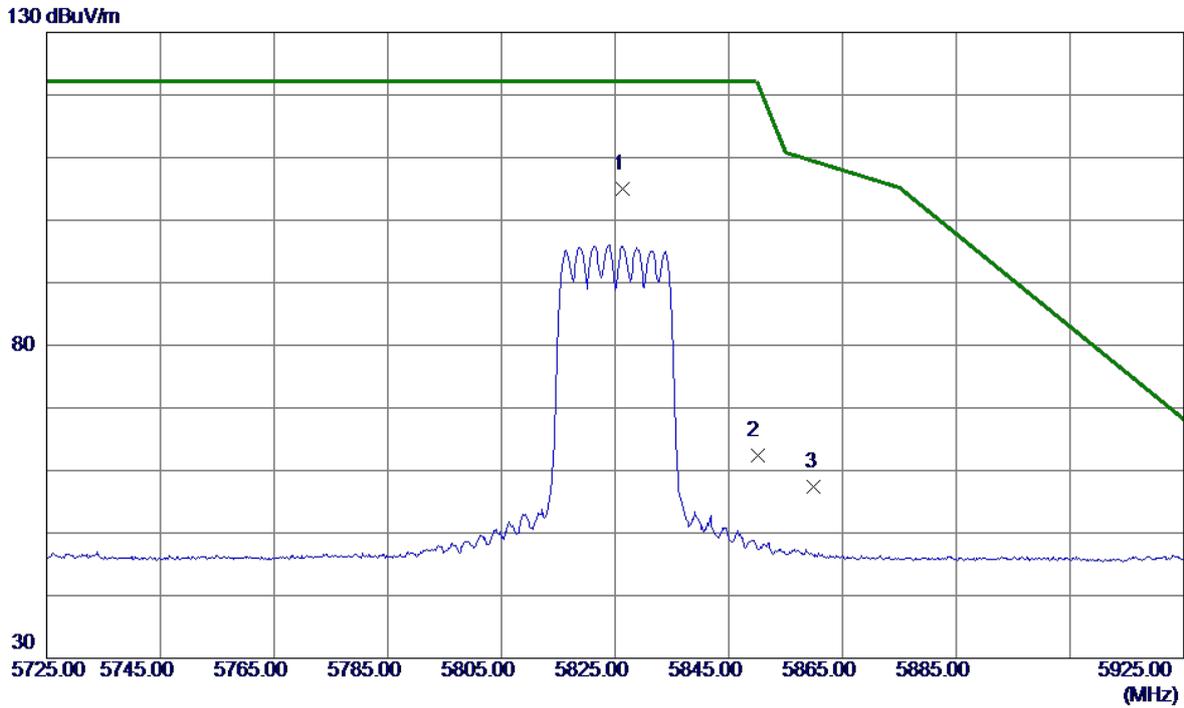


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.4000	88.13	16.86	104.99	122.20	-17.21	Peak	No Limit
2	5850.0000	45.56	16.87	62.43	122.20	-59.77	Peak	
3	5860.0000	40.50	16.88	57.38	109.40	-52.02	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

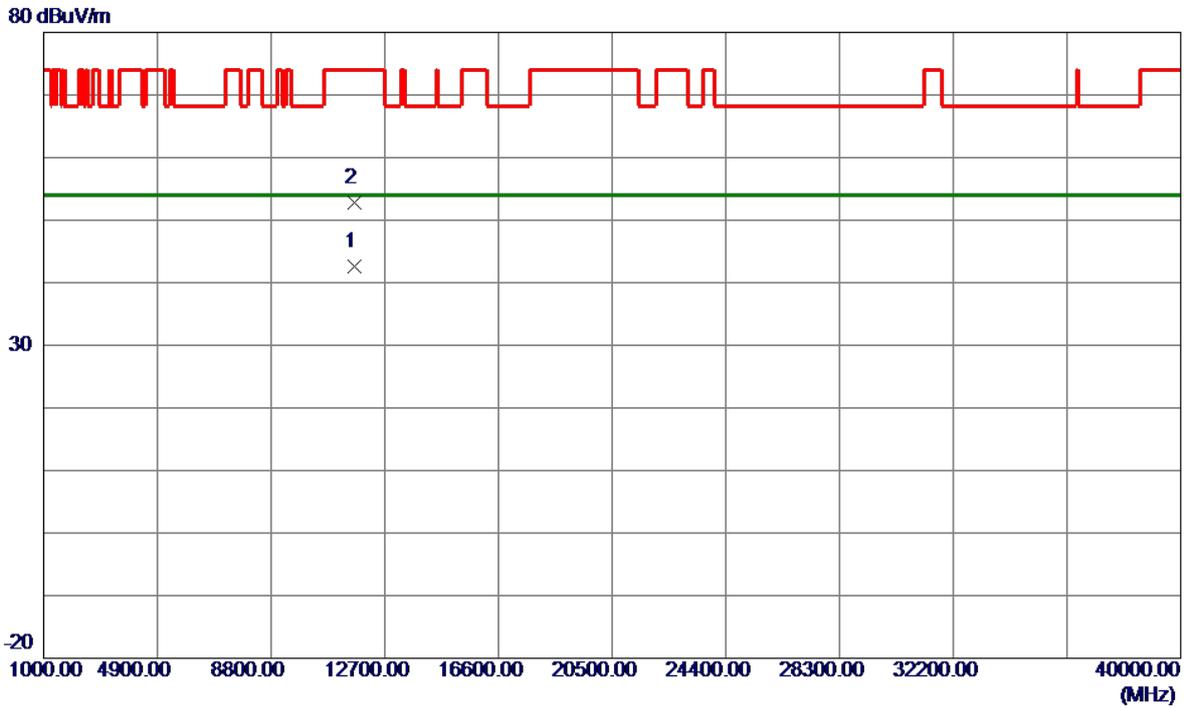


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.1750	27.83	14.78	42.61	54.00	-11.39	AVG	
2	11650.7550	38.03	14.78	52.81	74.00	-21.19	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

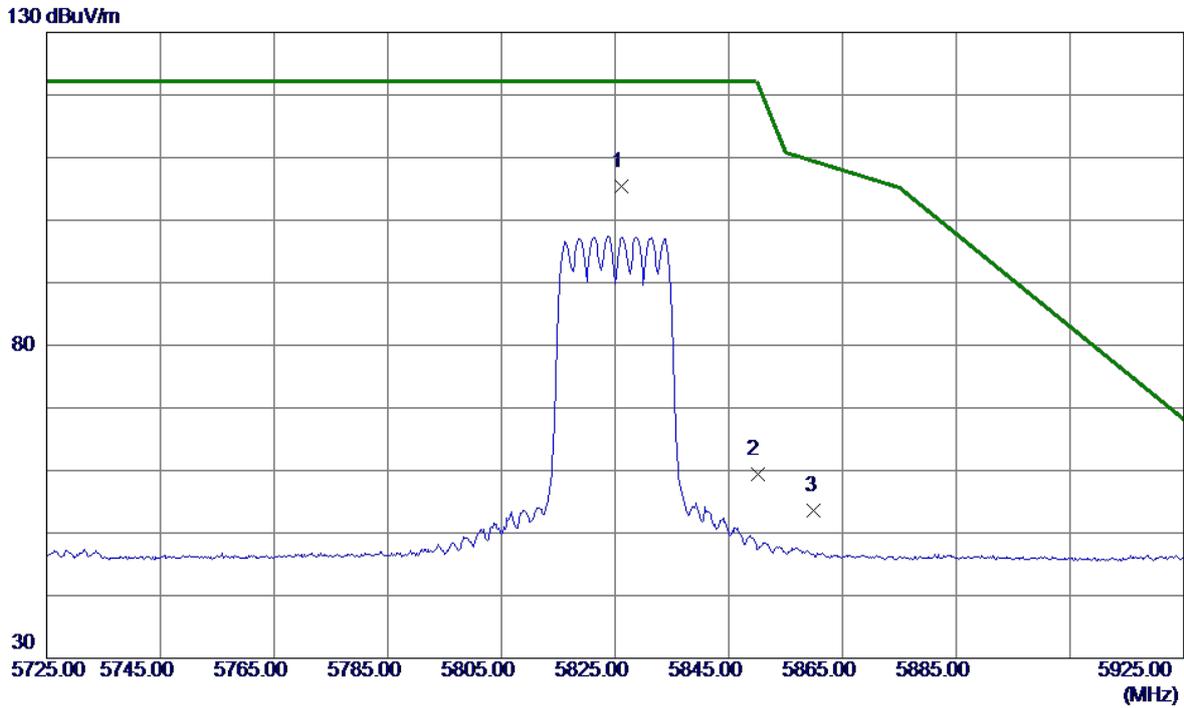


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.2000	88.54	16.86	105.40	122.20	-16.80	Peak	No Limit
2	5850.0000	42.62	16.87	59.49	122.20	-62.71	Peak	
3	5860.0000	36.65	16.88	53.53	109.40	-55.87	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

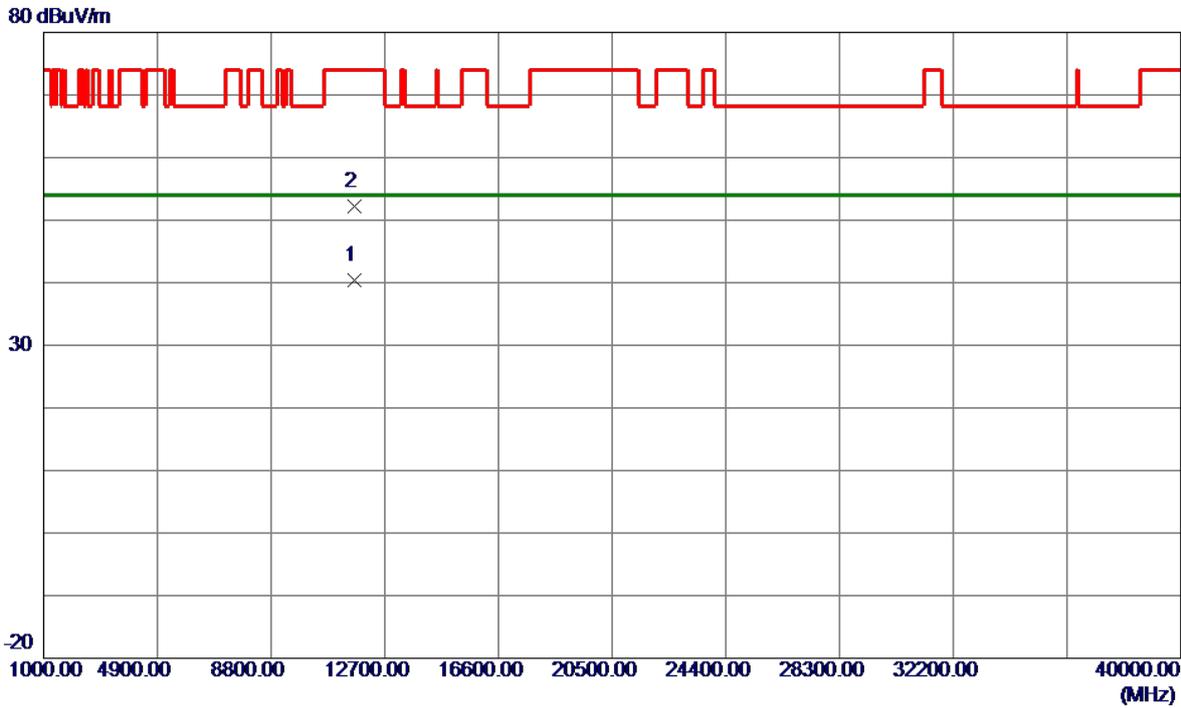


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.2550	25.71	14.78	40.49	54.00	-13.51	AVG	
2	11650.5950	37.37	14.78	52.15	74.00	-21.85	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

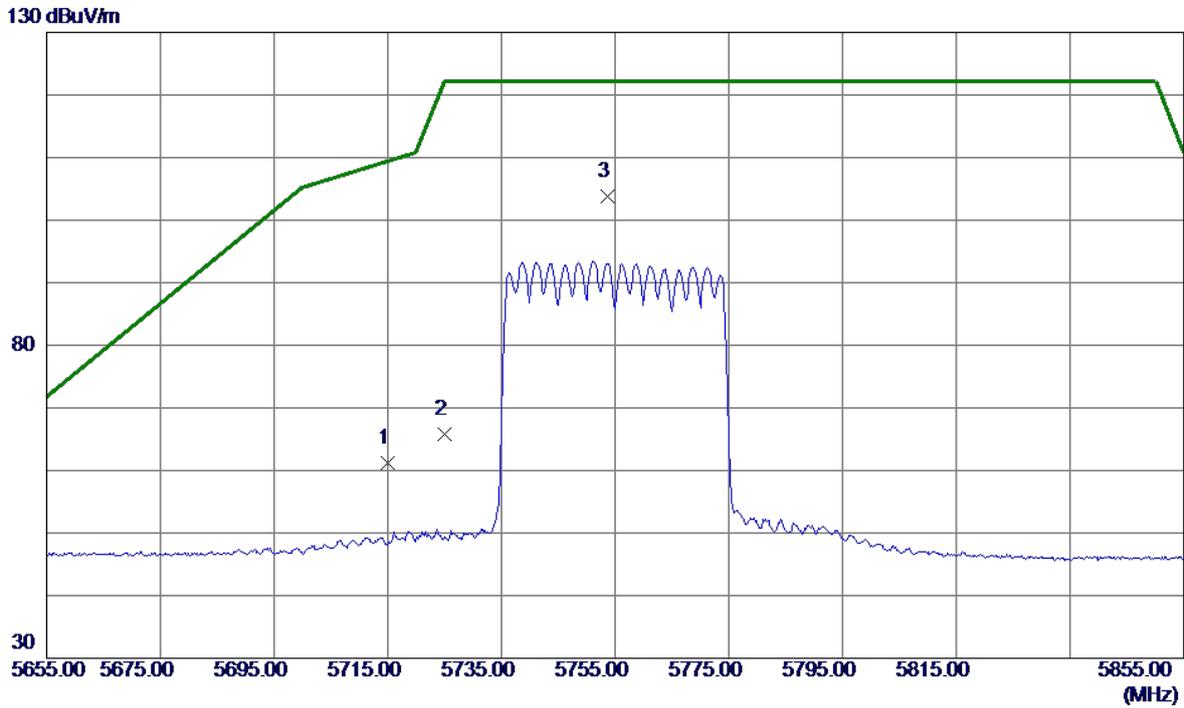

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	44.36	16.79	61.15	109.40	-48.25	Peak	
2	5725.0000	49.05	16.80	65.85	122.20	-56.35	Peak	
3 *	5753.6000	87.04	16.81	103.85	122.20	-18.35	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.2300	38.65	14.66	53.31	74.00	-20.69	Peak	
2 *	11510.2500	28.01	14.66	42.67	54.00	-11.33	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

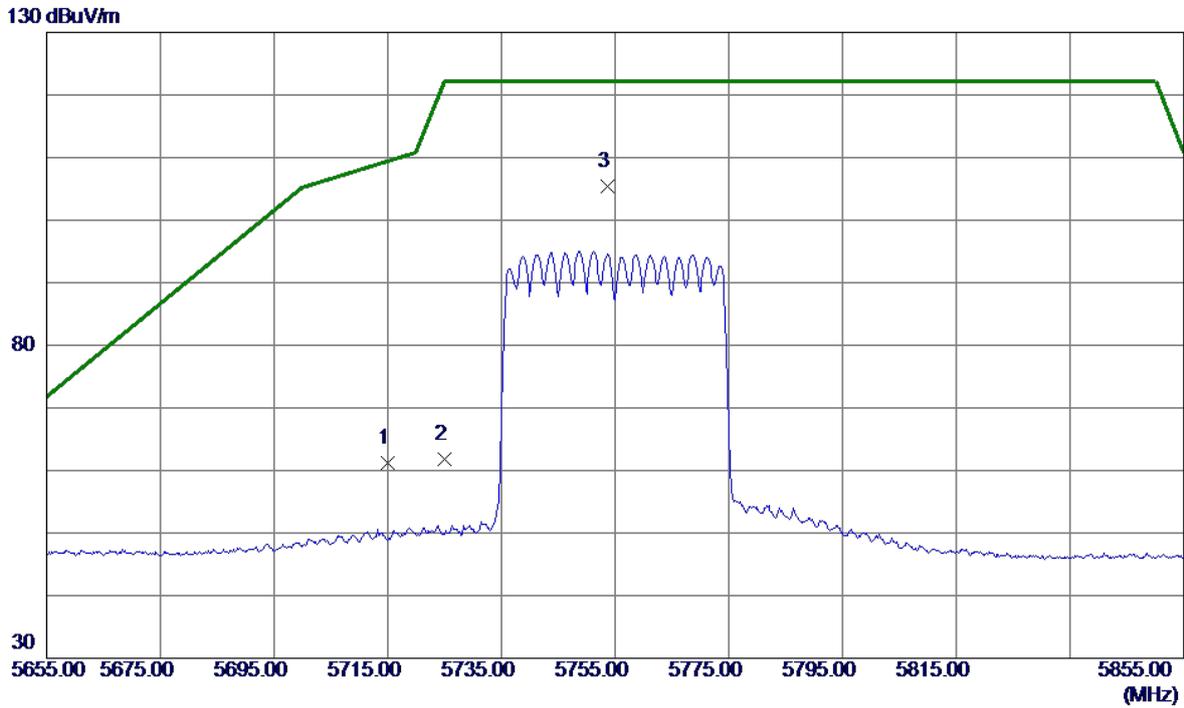


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	44.43	16.79	61.22	109.40	-48.18	Peak	
2	5725.0000	45.05	16.80	61.85	122.20	-60.35	Peak	
3 *	5753.6000	88.50	16.81	105.31	122.20	-16.89	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

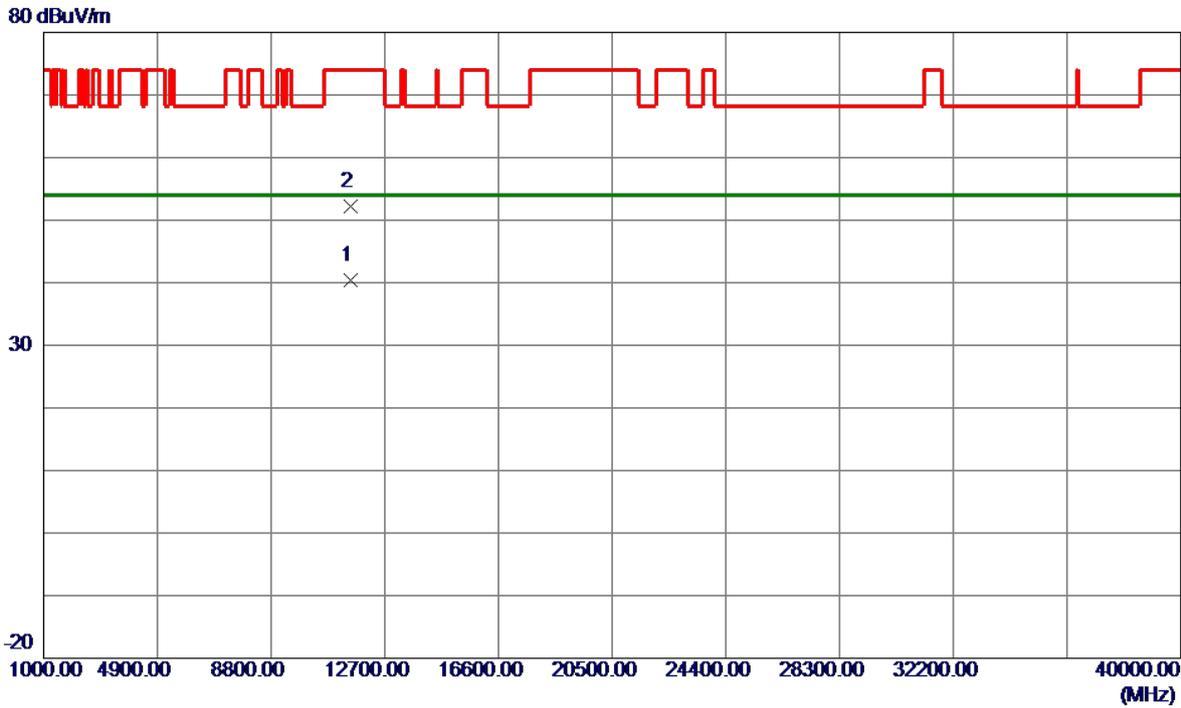


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.1200	25.79	14.66	40.45	54.00	-13.55	AVG	
2	11510.3600	37.61	14.66	52.27	74.00	-21.73	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

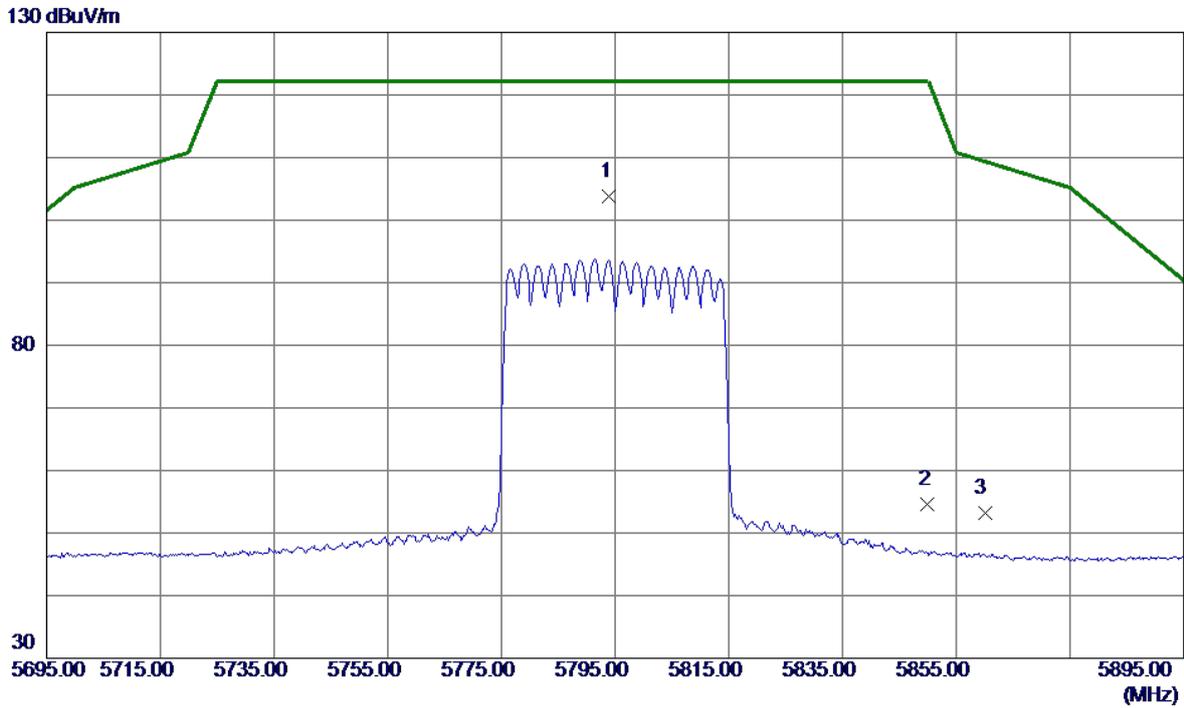


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5794.0000	86.95	16.84	103.79	122.20	-18.41	Peak	No Limit
2	5850.0000	37.65	16.87	54.52	122.20	-67.68	Peak	
3	5860.0000	36.33	16.88	53.21	109.40	-56.19	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

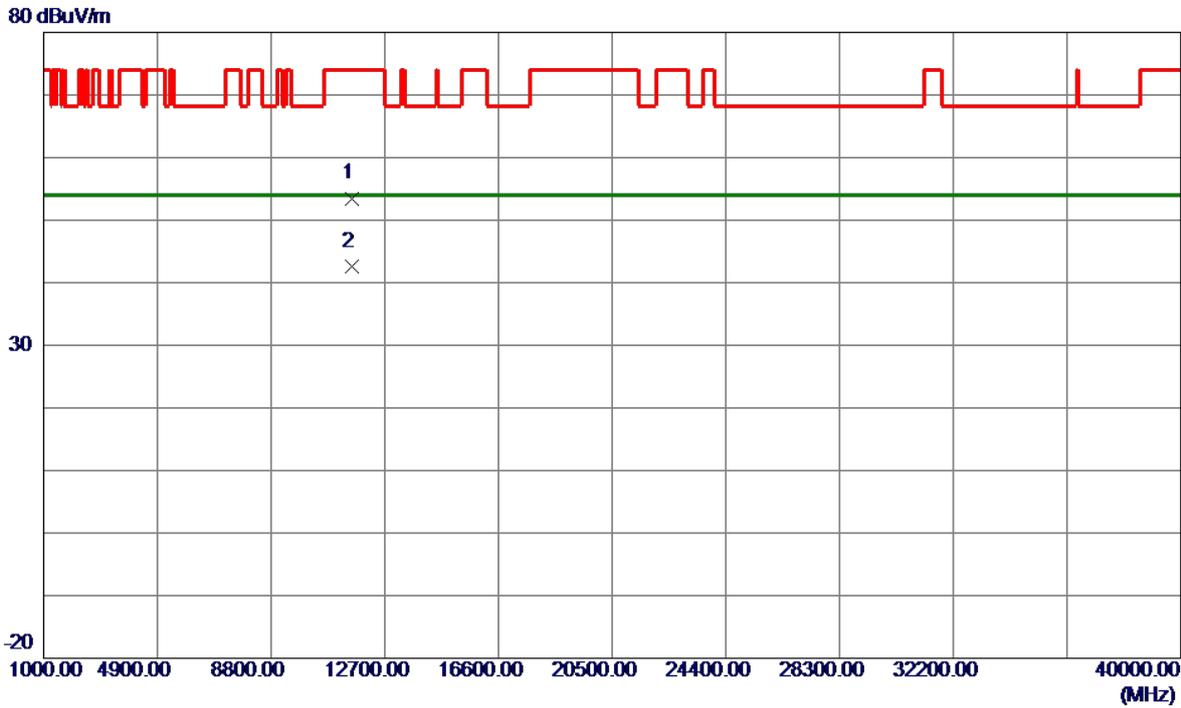


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0250	38.77	14.73	53.50	74.00	-20.50	Peak	
2 *	11590.2200	27.92	14.73	42.65	54.00	-11.35	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

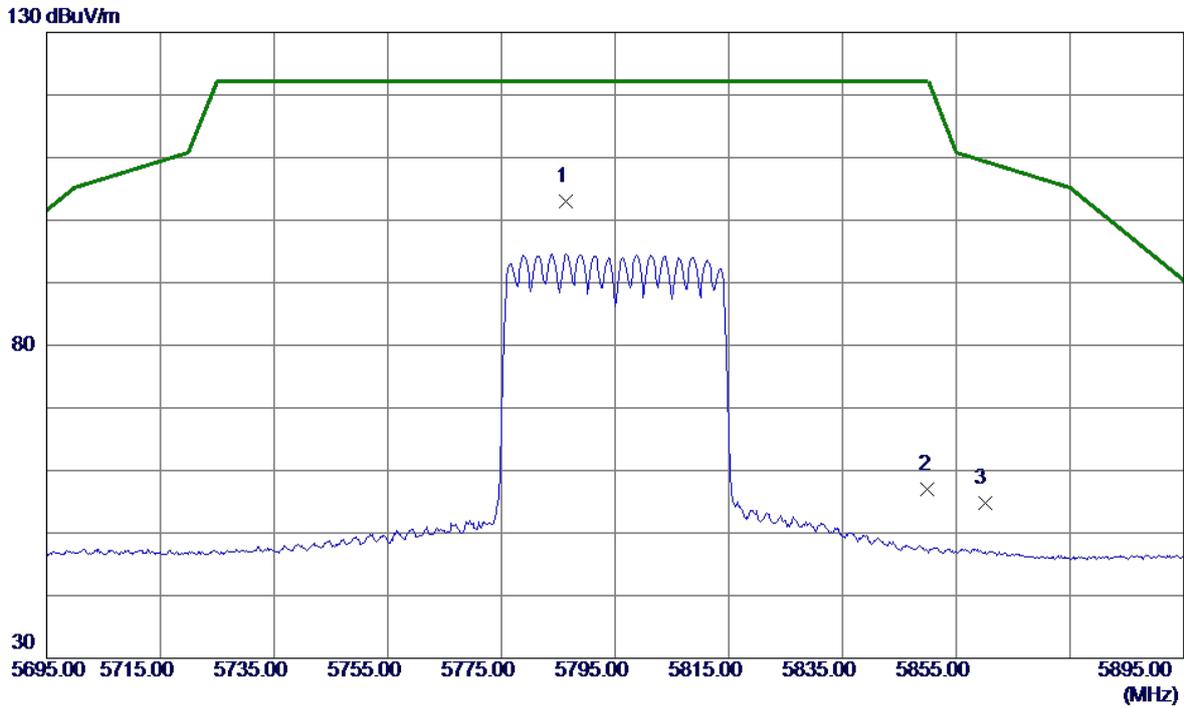


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5786.4000	86.12	16.83	102.95	122.20	-19.25	Peak	No Limit
2	5850.0000	40.04	16.87	56.91	122.20	-65.29	Peak	
3	5860.0000	37.93	16.88	54.81	109.40	-54.59	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

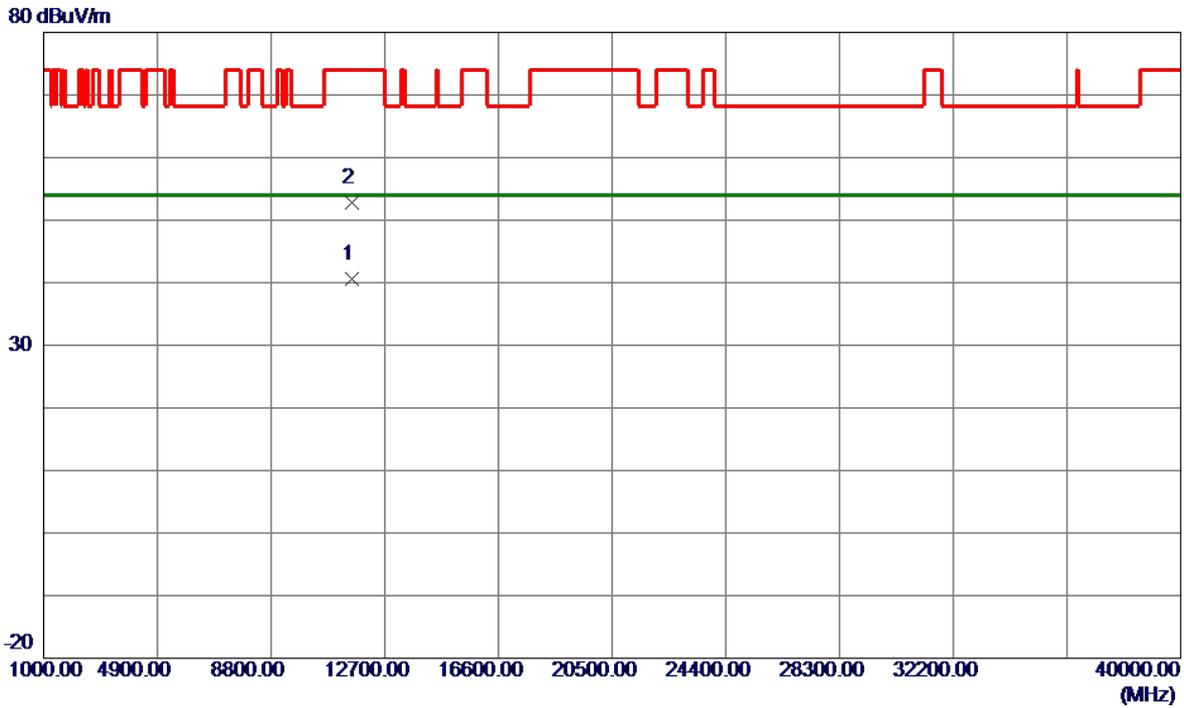


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.4450	25.84	14.73	40.57	54.00	-13.43	AVG	
2	11590.9349	38.03	14.73	52.76	74.00	-21.24	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

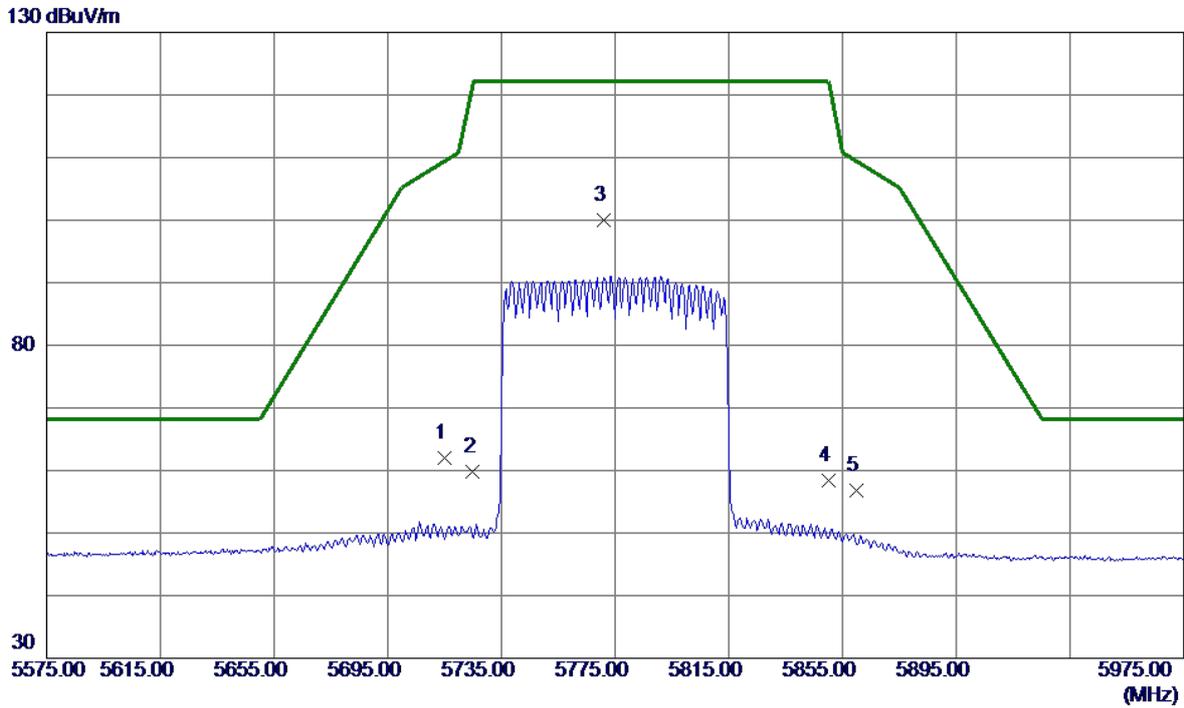


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	45.29	16.79	62.08	109.40	-47.32	Peak	
2	5725.0000	42.98	16.80	59.78	122.20	-62.42	Peak	
3 *	5771.0000	83.14	16.82	99.96	122.20	-22.24	Peak	No Limit
4	5850.0000	41.53	16.87	58.40	122.20	-63.80	Peak	
5	5860.0000	39.86	16.88	56.74	109.40	-52.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

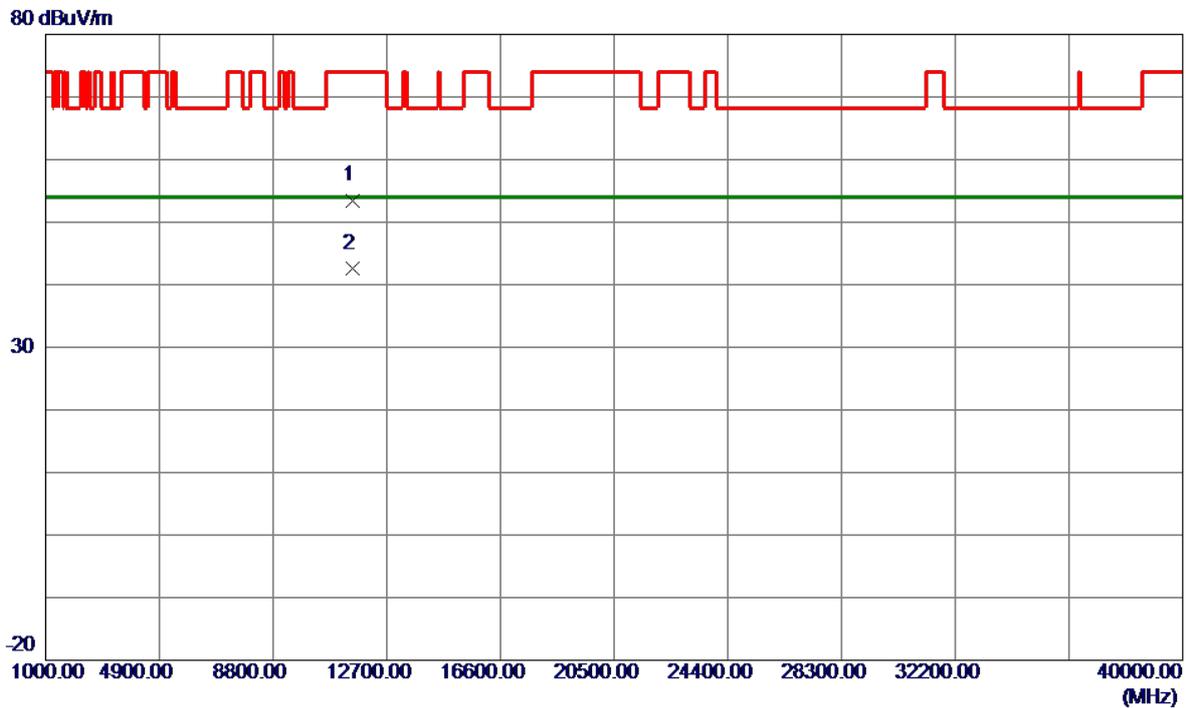


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.8250	38.80	14.70	53.50	74.00	-20.50	Peak	
2 *	11550.8350	27.99	14.70	42.69	54.00	-11.31	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

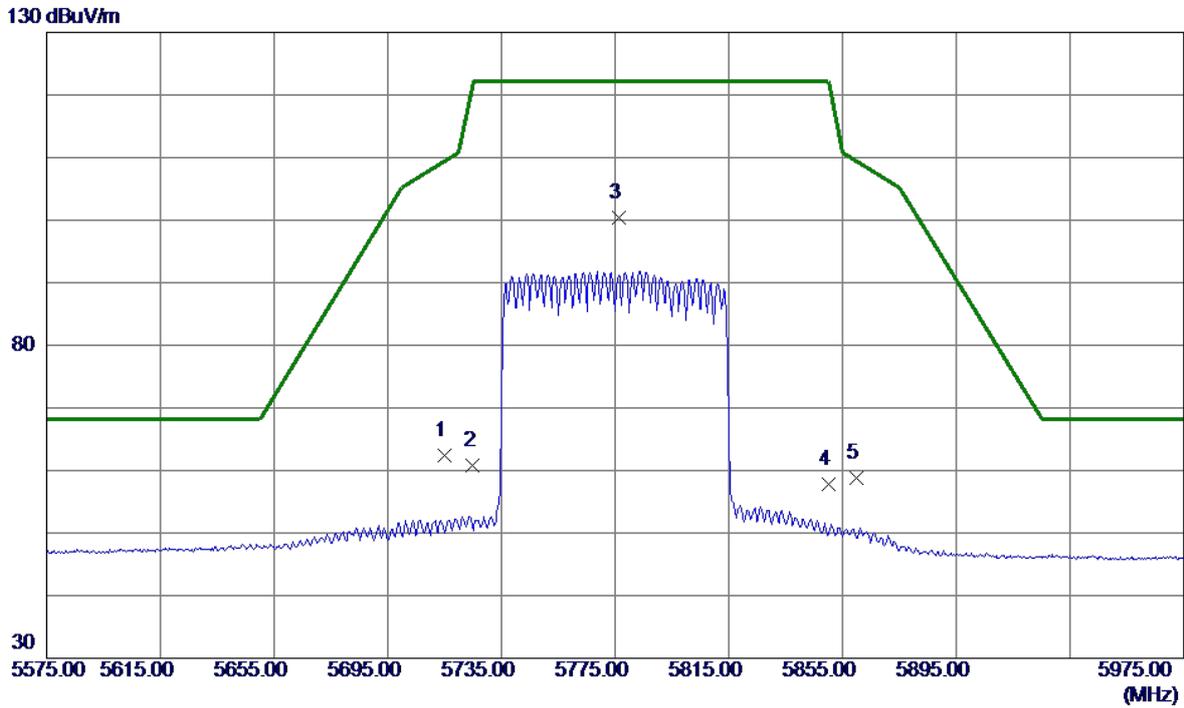

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	45.57	16.79	62.36	109.40	-47.04	Peak	
2	5725.0000	44.07	16.80	60.87	122.20	-61.33	Peak	
3 *	5776.2000	83.50	16.83	100.33	122.20	-21.87	Peak	No Limit
4	5850.0000	40.91	16.87	57.78	122.20	-64.42	Peak	
5	5860.0000	41.94	16.88	58.82	109.40	-50.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.3550	36.69	14.70	51.39	74.00	-22.61	Peak	
2 *	11550.9400	25.88	14.70	40.58	54.00	-13.42	AVG	

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.60	16.90
40	5200	21.49	16.90
48	5240	21.59	16.90

### CH36

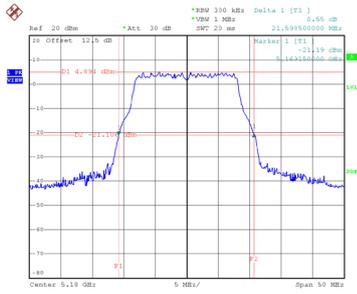


Date: 3.DEC.2021 10:14:00

### CH40 26 dB Bandwidth

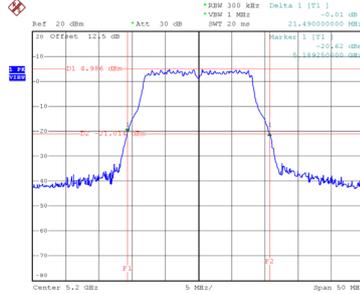


Date: 3.DEC.2021 10:15:31

### CH48

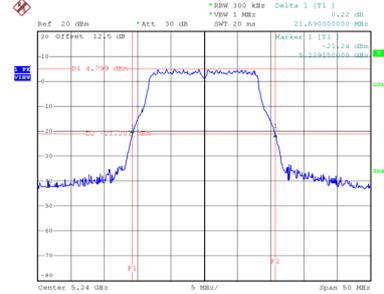


Date: 3.DEC.2021 10:17:16


### 99 % Occupied Bandwidth

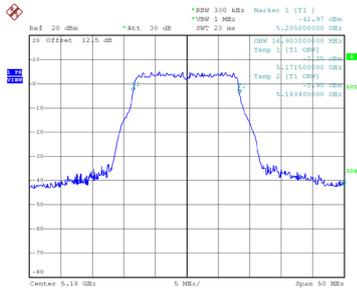

Date: 3.DEC.2021 10:13:13

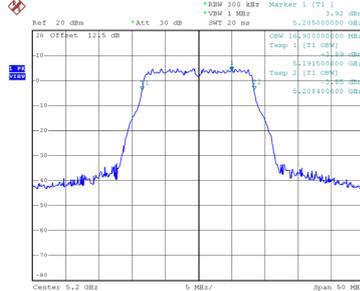

Date: 3.DEC.2021 10:14:42

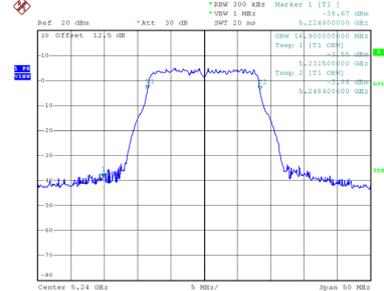


Date: 3.DEC.2021 10:16:28

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.79	18.00
40	5200	21.60	18.00
48	5240	21.75	18.00

### CH36

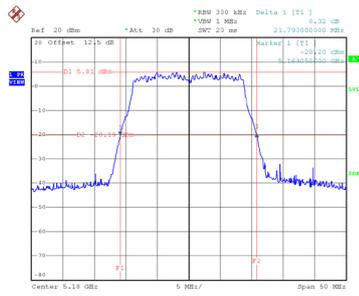


Date: 3.DEC.2021 10:56:47

### CH40 26 dB Bandwidth

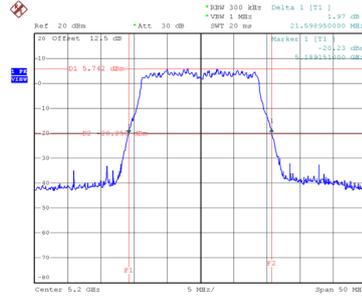


Date: 3.DEC.2021 10:58:25

### CH48

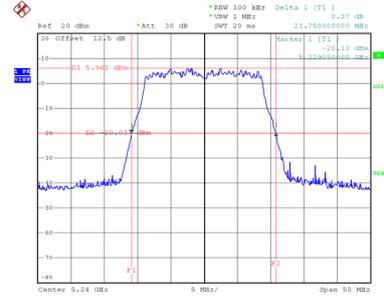


Date: 3.DEC.2021 11:00:01


### 99 % Occupied Bandwidth



Date: 3.DEC.2021 10:55:59

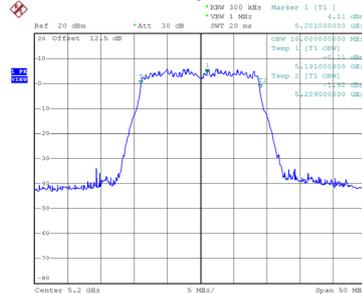

Date: 3.DEC.2021 10:57:36

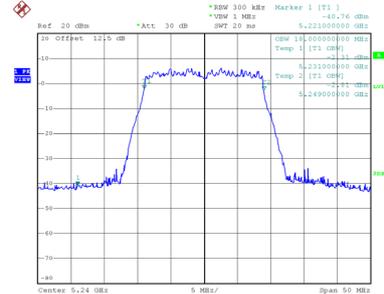


Date: 3.DEC.2021 10:59:13

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.61	36.80
46	5230	39.80	36.80

### CH38

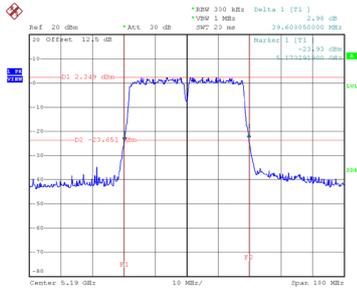


Date: 3.DEC.2021 11:19:39

### CH46 26 dB Bandwidth

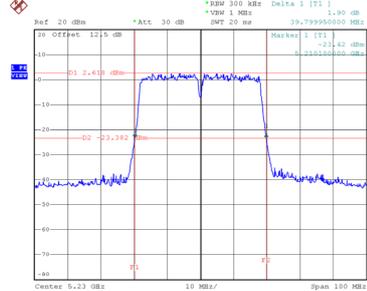


Date: 3.DEC.2021 11:21:26

### 99 % Occupied Bandwidth

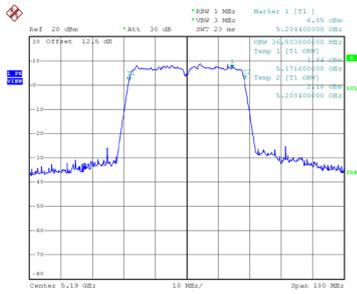

Date: 3.DEC.2021 11:18:48

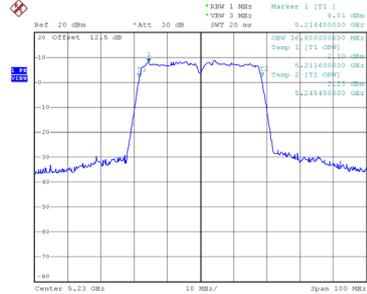


Date: 3.DEC.2021 11:20:35

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	82.20	76.00

### CH42 26 dB Bandwidth

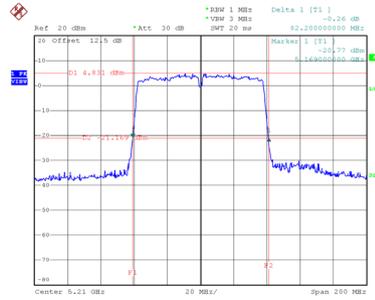

Date: 3.DEC.2021 11:40:26

### 99 % Occupied Bandwidth

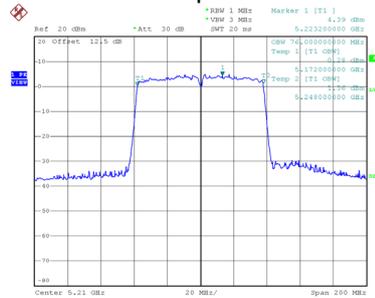


Date: 3.DEC.2021 11:39:29

Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.75	19.30
40	5200	21.65	19.30
48	5240	21.70	19.30

### CH36

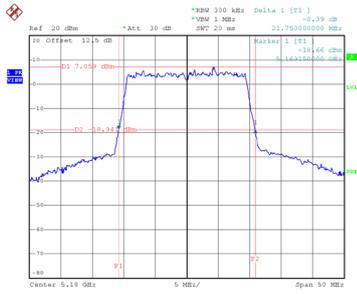


Date: 3.DEC.2021 13:35:10

### CH40 26 dB Bandwidth

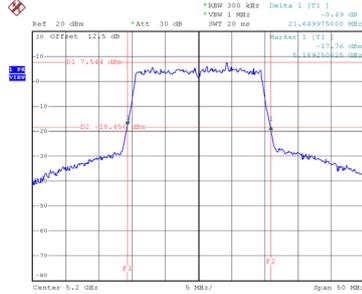


Date: 3.DEC.2021 13:37:06

### CH48

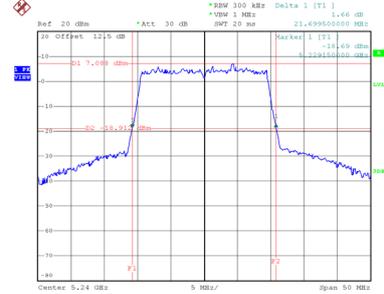


Date: 3.DEC.2021 13:38:50


### 99 % Occupied Bandwidth

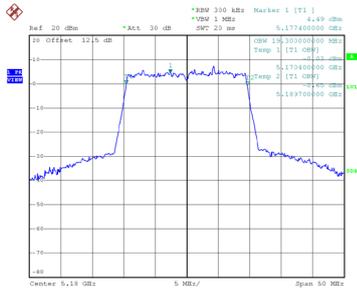

Date: 3.DEC.2021 13:34:17

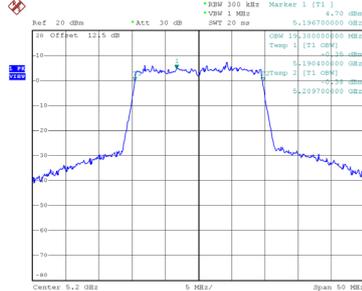

Date: 3.DEC.2021 13:36:12

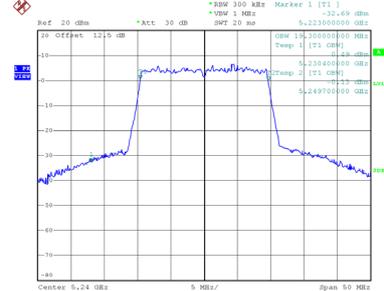


Date: 3.DEC.2021 13:37:57

Test Mode	UNII-1_TX AX(HE40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.70	37.80
46	5230	39.70	37.80

### CH38

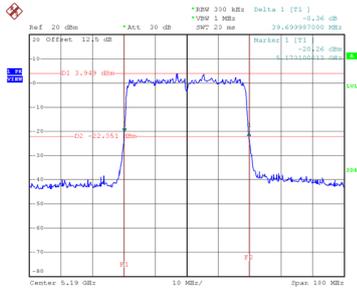


Date: 3.DEC.2021 14:01:37

### CH46 26 dB Bandwidth

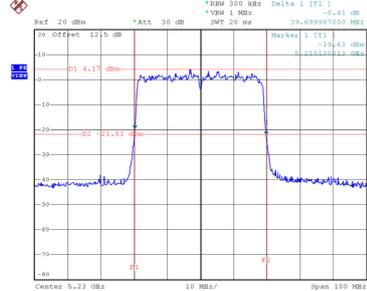


Date: 3.DEC.2021 14:03:27

### 99 % Occupied Bandwidth

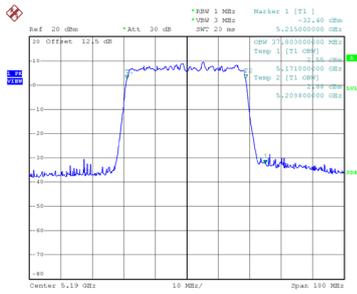

Date: 3.DEC.2021 14:00:47

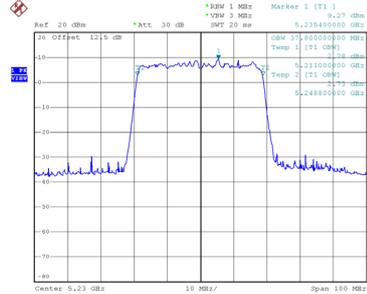


Date: 3.DEC.2021 14:02:36

Test Mode	UNII-1_TX AX(HE80) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	82.00	76.80

### CH42 26 dB Bandwidth

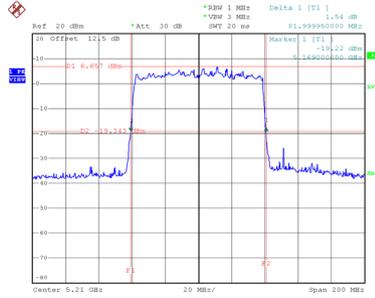

Date: 3.DEC.2021 14:20:11

### 99 % Occupied Bandwidth

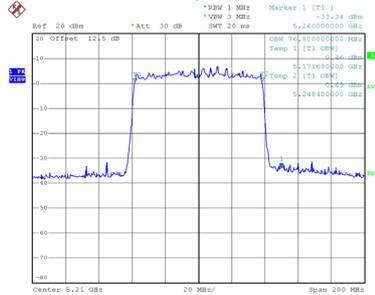


Date: 3.DEC.2021 14:19:13

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.60	16.90
60	5300	21.59	16.90
64	5320	21.65	16.90

### CH52

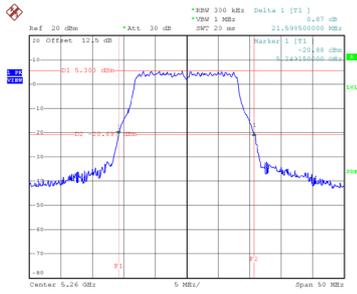


Date: 3.DEC.2021 10:19:59

### CH60 26 dB Bandwidth

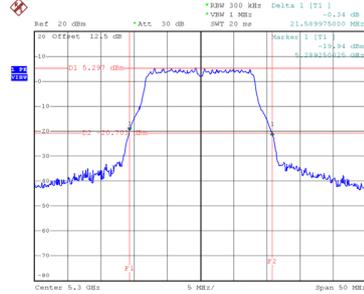


Date: 3.DEC.2021 10:21:36

### CH64

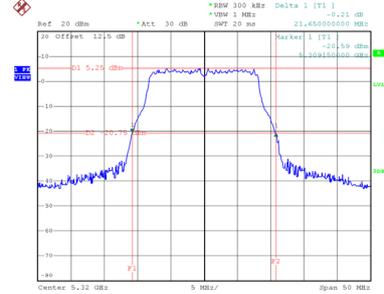


Date: 3.DEC.2021 10:23:56


### 99 % Occupied Bandwidth



Date: 3.DEC.2021 10:19:11

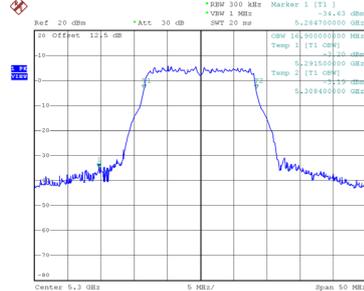

Date: 3.DEC.2021 10:20:46

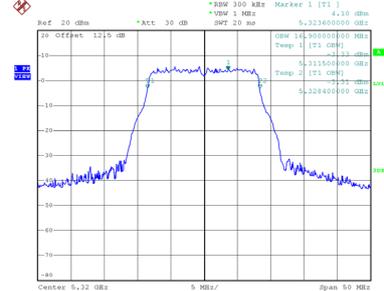


Date: 3.DEC.2021 10:23:07

Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.71	18.00
60	5300	21.60	17.90
64	5320	21.71	18.00

### CH52

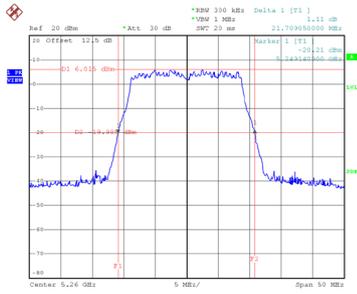


Date: 3.DEC.2021 11:01:43

### CH60 26 dB Bandwidth

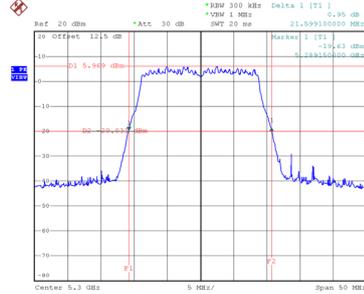


Date: 3.DEC.2021 11:03:59

### CH64

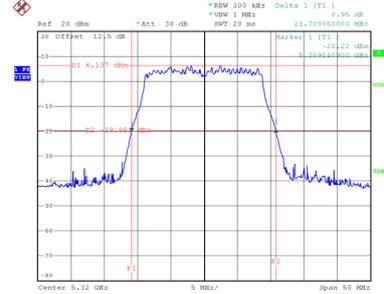


Date: 3.DEC.2021 11:05:38


### 99 % Occupied Bandwidth

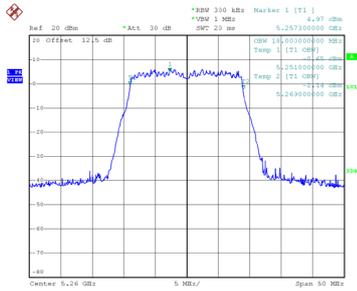

Date: 3.DEC.2021 11:00:56

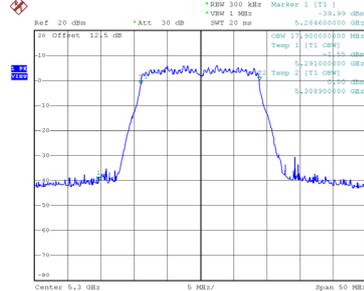

Date: 3.DEC.2021 11:03:09

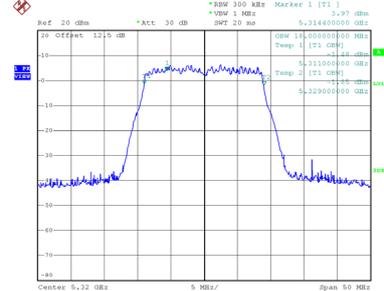


Date: 3.DEC.2021 11:04:49

Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	39.81	36.80
62	5310	39.61	36.80

### CH54

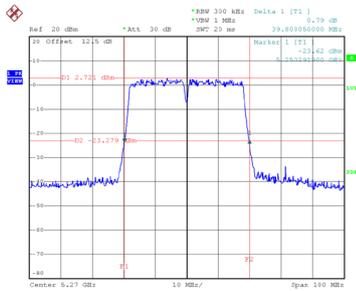


Date: 3.DEC.2021 11:23:26

### CH62 26 dB Bandwidth

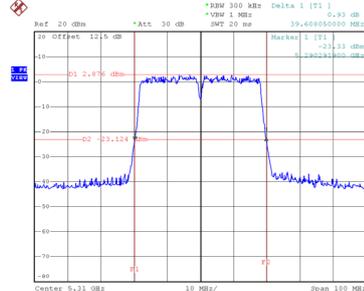


Date: 3.DEC.2021 11:25:36

### 99 % Occupied Bandwidth

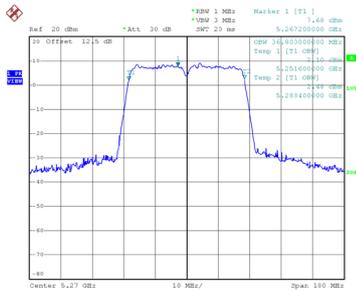

Date: 3.DEC.2021 11:22:36

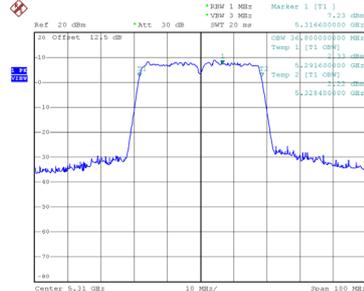


Date: 3.DEC.2021 11:24:45

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	82.00	76.00

### CH58 26 dB Bandwidth

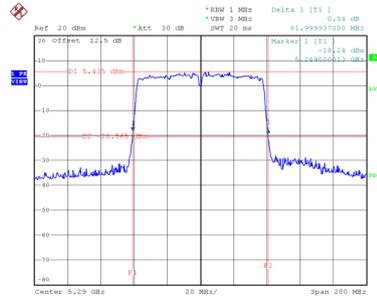

Date: 3.DEC.2021 11:42:41

### 99 % Occupied Bandwidth

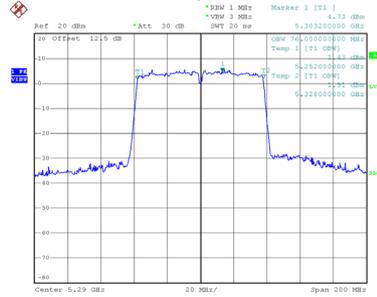


Date: 3.DEC.2021 11:41:37

Test Mode	UNII-2A_TX AX(HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.80	19.30
60	5300	21.75	19.30
64	5320	21.75	19.30

### CH52

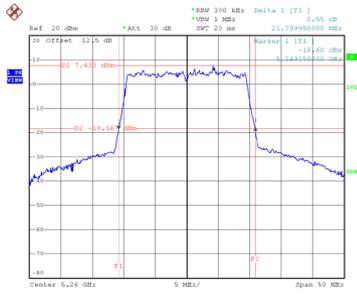


Date: 3.DEC.2021 13:40:46

### CH60 26 dB Bandwidth

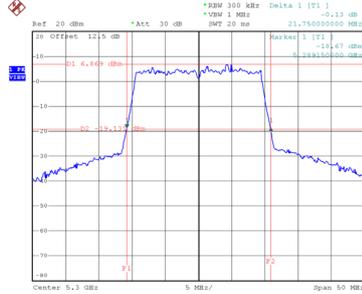


Date: 3.DEC.2021 13:42:33

### CH64

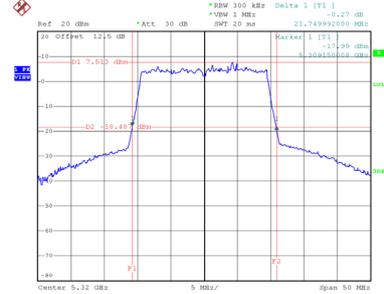


Date: 3.DEC.2021 13:45:30


### 99 % Occupied Bandwidth

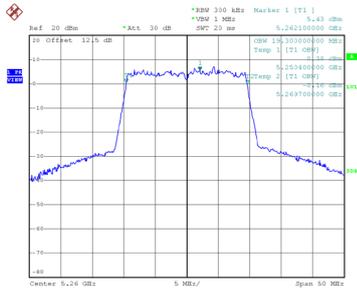

Date: 3.DEC.2021 13:39:56

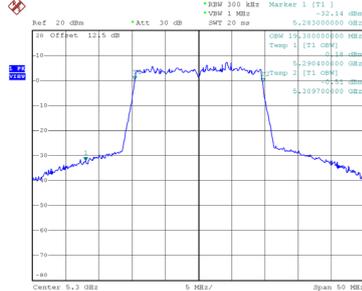

Date: 3.DEC.2021 13:41:41

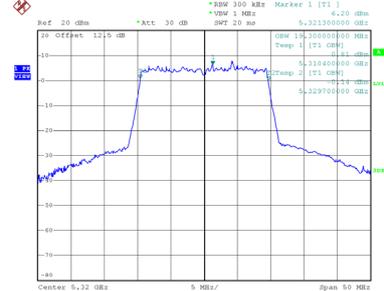

Date: 3.DEC.2021 13:44:35