


User Manual
Karaoke Machine

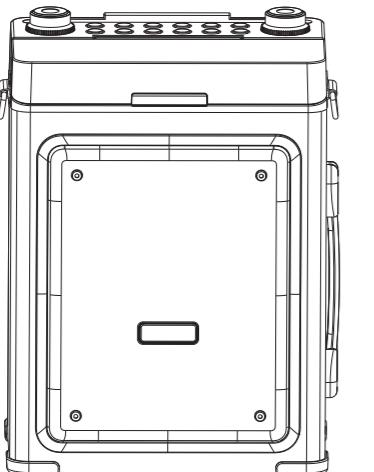

PL-003K

Caution

- a. Please do not expose this product to over-heated or wet circumstance.
- b. Please do not disassemble, repair or refit this product.
- c. Please use or store this product under ordinary temperatures.
- d. Please avoid violent impact or collision to this product.
- e. Please use rated power source to charge the product.
- f. Unauthorized disassembly of this product will invalidate the 1-year warranty.
- g. It will damage hearing ability when using high volume for a long time, please choose moderate volume.

Note:

- 1. Improper battery replacement may cause explosion, battery can be only replaced by batteries of same type.
- 2. Do not expose battery to high temperature circumstance, for example direct sunlight or close to fire.

Package Contents


Your product includes the following accessories:

 Karaoke Speaker	 USB Cable *1 & Audio Cable *1	 User Manual	 Wireless Microphone *2 Remote Control
--	--	--	---


Product Specifications

Built-in lithium battery	3.7V/9000mAh x 2
Charging voltage	DC-5V 3000mA
Charging time	About 5 hours
Audio playback time	About 8-12 hours
Output Power	Max 40W
Signal-to-noise ratio	≥90 db
Distortion (THD)	≤1%
Speaker Specification	147mm 4Ω 30W + 52mm 4Ω 10W
Sound Channel	Full-frequency mono
TF Support Music Format	MP3 WAV APE FLAC
Transmission Distance	8-10m (Depending on environmental factors and Bluetooth devices)
Bluetooth v5.3	Bluetooth protocol A2DP/AVRCP/HSP
Storage Type	TF card/USB drive (max 64G)
Maximum Sound Pressure	>113db 1KHz THB<1%
External interface	TYPE C charging port, TF/USB/AUX/MIC/GUITAR port
Product size	About 271*162*355mm


Button Descriptions

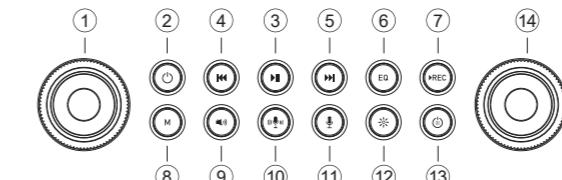

1 Treble Knob **14** Bass Knob
2 Power Button Long press to turn ON/OFF the product
3 Pause/Play Press once to pause/restore the playback
Long press to exit Bluetooth connection and enter TWS pairing
4 Previous Track **5** Next Track
6 Playback Mode Press once to shift to indoor/outdoor playback mode
7 Record Button Long press for recording, press once for playing recorded files
8 Playback Source Press once to switch to TF card/USB drive/AUX Line-in/Bluetooth playback mode
9 Vocal Remove (Press once to remove/restore the vocal sound)
10 Magic Voice (Press once to shift to/exit magic voice mode)
11 Microphone Reverb Mode (Press once to shift to/exit reverb mode)
12 Lighting Modes (Press once to shift lighting effects)
13 Light ON/OFF (Press once to turn ON/OFF the lights)

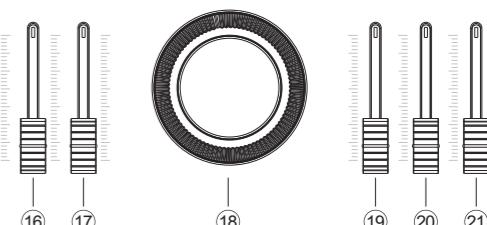

15 Mic Volume Slider **19** Guitar Volume Slider
16 Mic Tone Slider **20** Guitar Tone Slider
17 Mic Reverb Slider **21** Guitar Reverb Slider
18 Speaker Volume Knob

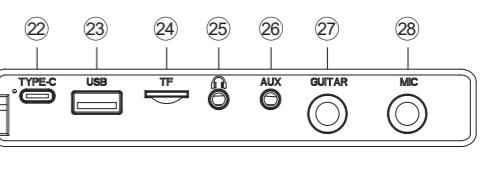

22 Type-C Charging Port **26** AUX Jack
23 USB Drive Interface **27** Guitar Jack
24 TF Card Interface **28** Microphone Jack
25 3.5mm Earphones Jack

TWS Pairing
(Connect 2 speakers via TWS pairing to enjoy a stereo sound)

Turn on 2 speakers of same model, long press the Pause/Play button of either speaker, the 2 speakers will pair to each other automatically. There will be a prompt tone while 2 speakers paired successfully.

Turn on the Bluetooth of your smartphone/tablet and connect to "PL-003K", now the sounds will be played from both speakers.

Long press the Play/Pause button again to disconnect the 2 speakers.

Please note:
Do not use your smartphone to connect any speakers before TWS pairing, otherwise the TWS pairing will be failed.

Line-in Connection

You can connect your smartphone/tablet/PC/MP3/etc to the speaker via included AUX audio cable, you can also connect your guitar to the speaker via guitar cable(sold separately). Now you can play the music directly on your connected device or guitar.

Indicator Light Status

Music Playback: Colorful LED lights flash alternately
Speaker Charging: The indicator lights in red while charging, turns off when fully charged


Product Maintenance

Usage environment: Temperature (0°C~40°C) Humidity (0%~85%RH)
Storage environment: Temperature (-30°C~60°C) Humidity (0%~90%RH)

Button Descriptions of Remote Control

 Press once to shift to magic voice	 Volume decrease
 Add/Remove reverb to the mic	 Volume increase
 Mute/Restore the sound	 Short press to turn ON/OFF the light.
 Press once to disconnect/enter Bluetooth pairing mode	 Light color shortcut key: Press the corresponding button to choose the color of the light.
 Shift to playback source of TF card/USB Drive/AUX/Bluetooth	 YL Yellow WT White MG Magenta TUR Turquoise
 Activate/deactivate vocal remove function	 RD Red GN Green BU Blue
 Long press for recording, press once for playing recorded files	 Speaker's button layout diagram
 Shift to indoor/outdoor playback mode	Features
 Press once for previous track/recorded file	1) Support TWS connection (Pair 2 speakers) 2) Bluetooth automatic reconnect function 3) Supports TF card playback (Max 64GB) 4) Support external wireless microphone 5) Support audio input 6) Changeable color & flashing mode
 Press once for next track/recorded file	
 Play/Pause, long press to enter TWS pairing mode	

Bluetooth Connection

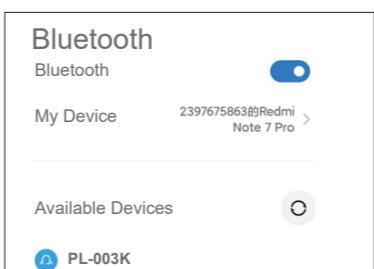

1. Long press the power button to turn on the speaker, the ambient light lights up and the speaker enters Bluetooth pairing mode.
2. Turn on the Bluetooth function of your smartphone/tablet, then connect to "PL-003K" from the available Bluetooth devices. (If password is needed, please enter "0000") When Bluetooth successfully paired, the speaker prompts "Bluetooth Connected". The speaker will reconnect to your last connected Bluetooth device automatically when using from the next time.

TF Card and USB Drive Playback

Insert a TF card/USB drive, the speaker will enter TF card/USB drive mode and then start playing downloaded songs automatically. The format of the downloaded files must be MP3 or WAV. The ambient light dances along with the rhythm of music.

Headphones Monitoring

Please press power button to mute the sound of speaker while using the headphones for monitoring

Recording Mode

Please insert a TF card or USB drive before using the recording mode, where the recorded files will be stored.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has evaluated to meet general RF exposure requirement. The device can be used in portable exposure without restriction.