




Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: Self-Cleaning Cat Litter Box

Test Model: AU01-III

Environmental Conditions

Temperature:	23.5 ° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	 Kay Hu
Supervised by:	 Li Huan





A.1 -20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant	1.029	Not Limit	Pass
NVNT	1-DH5	2441	Ant	1.030	Not Limit	Pass
NVNT	1-DH5	2480	Ant	0.991	Not Limit	Pass
NVNT	2-DH5	2402	Ant	1.307	Not Limit	Pass
NVNT	2-DH5	2441	Ant	1.277	Not Limit	Pass
NVNT	2-DH5	2480	Ant	1.283	Not Limit	Pass
NVNT	3-DH5	2402	Ant	1.295	Not Limit	Pass
NVNT	3-DH5	2441	Ant	1.284	Not Limit	Pass
NVNT	3-DH5	2480	Ant	1.277	Not Limit	Pass






Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant

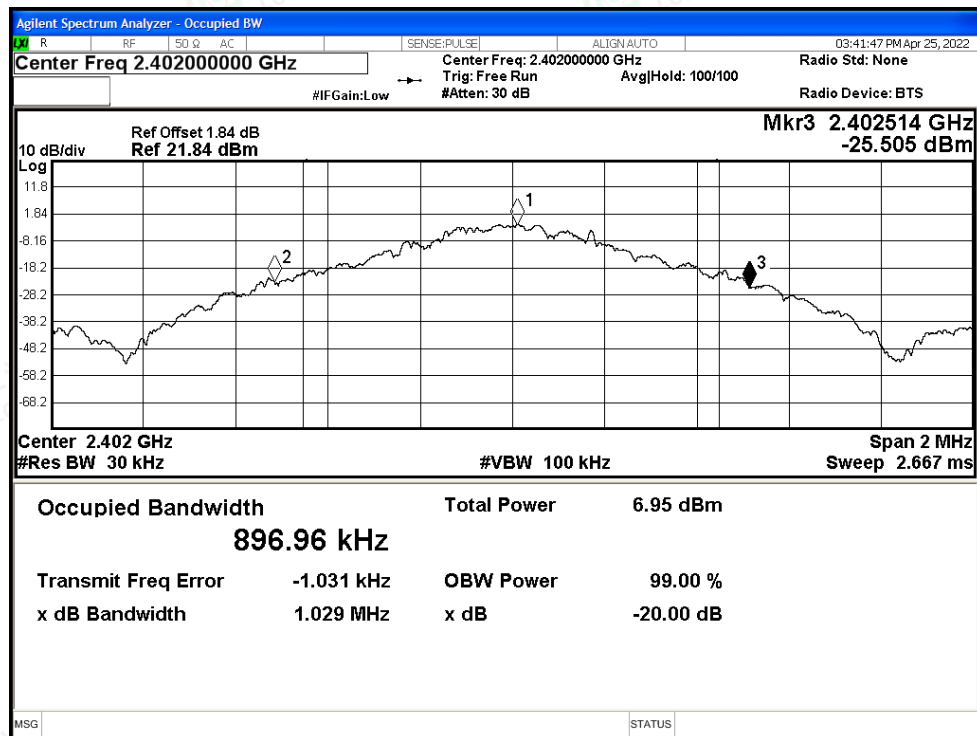

-20dB Bandwidth NVNT 1-DH5 2441MHz Ant

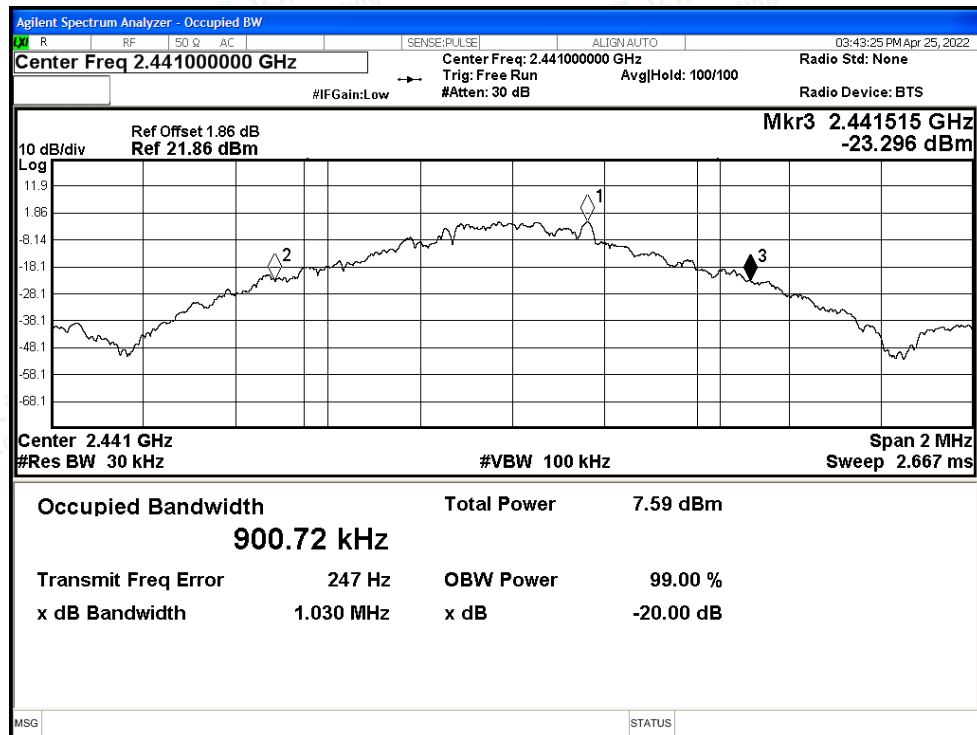




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant




-20dB Bandwidth NVNT 2-DH5 2402MHz Ant

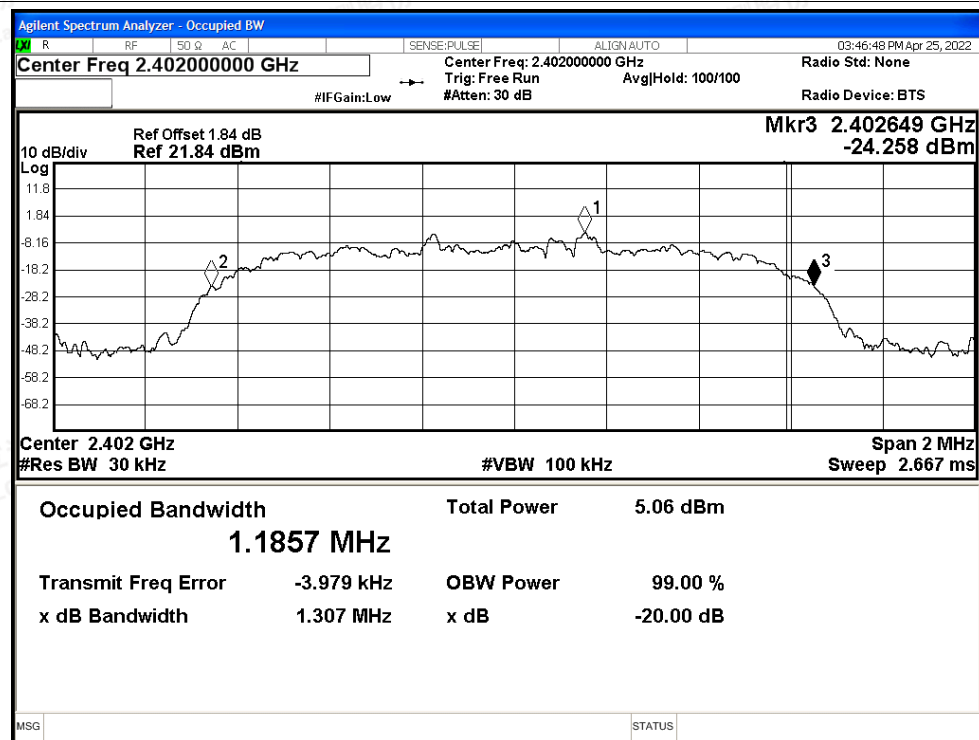




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant

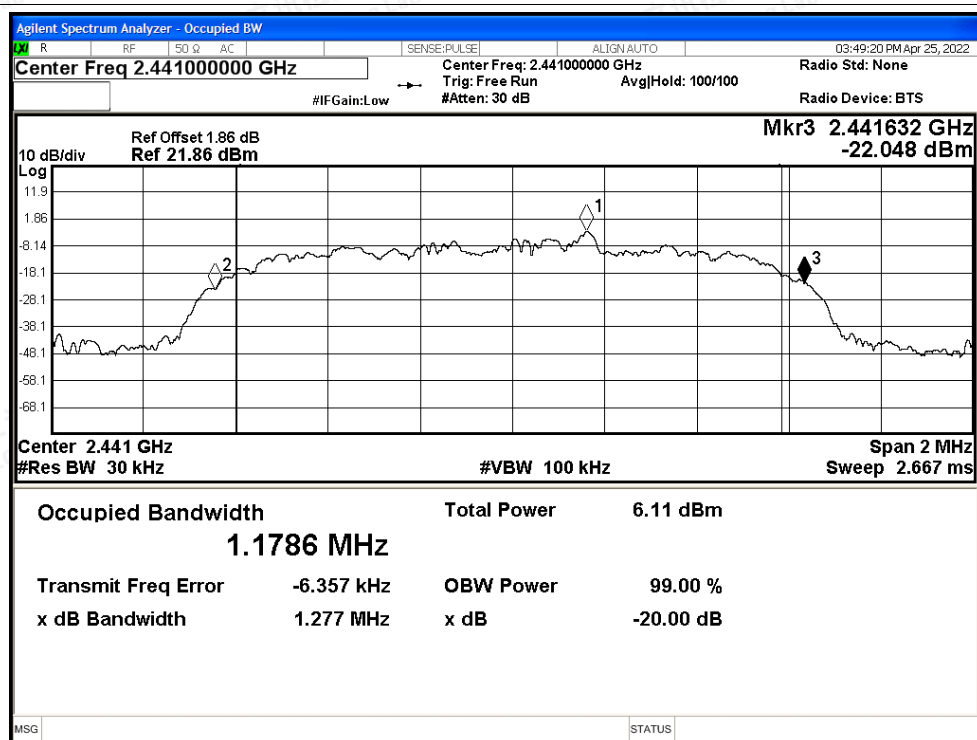


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant

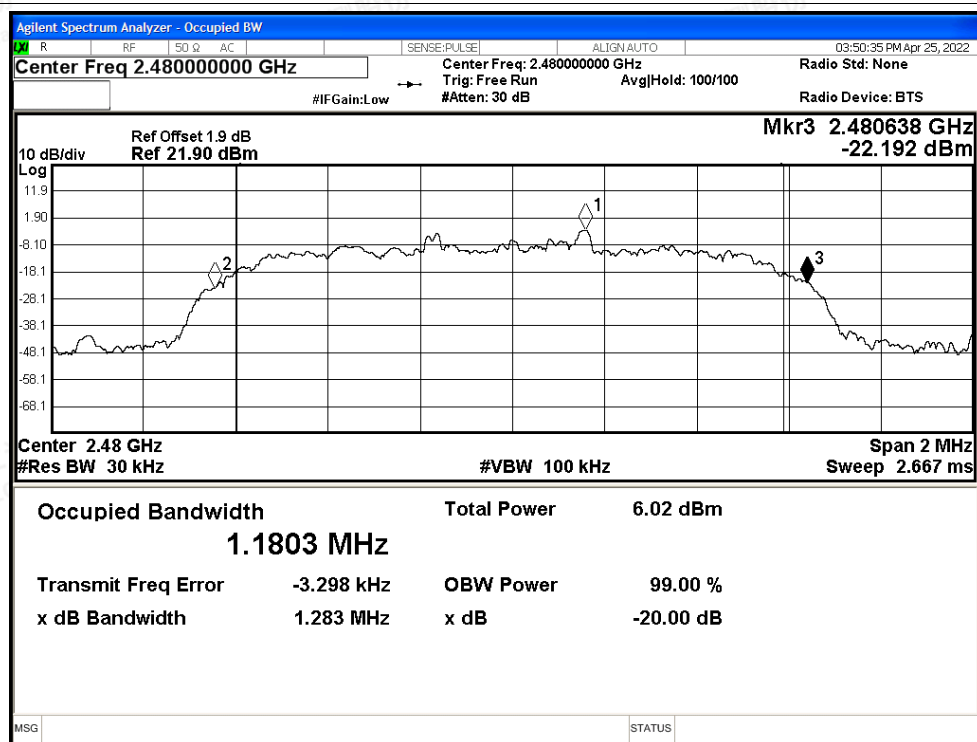





-20dB Bandwidth NVNT 3-DH5 2402MHz Ant

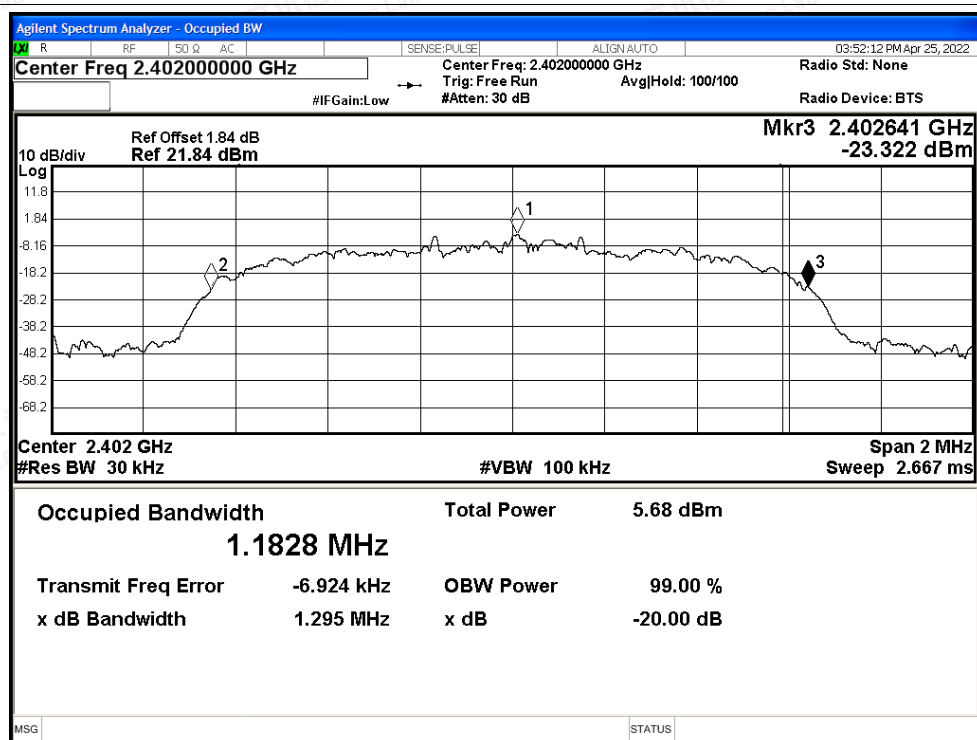

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant

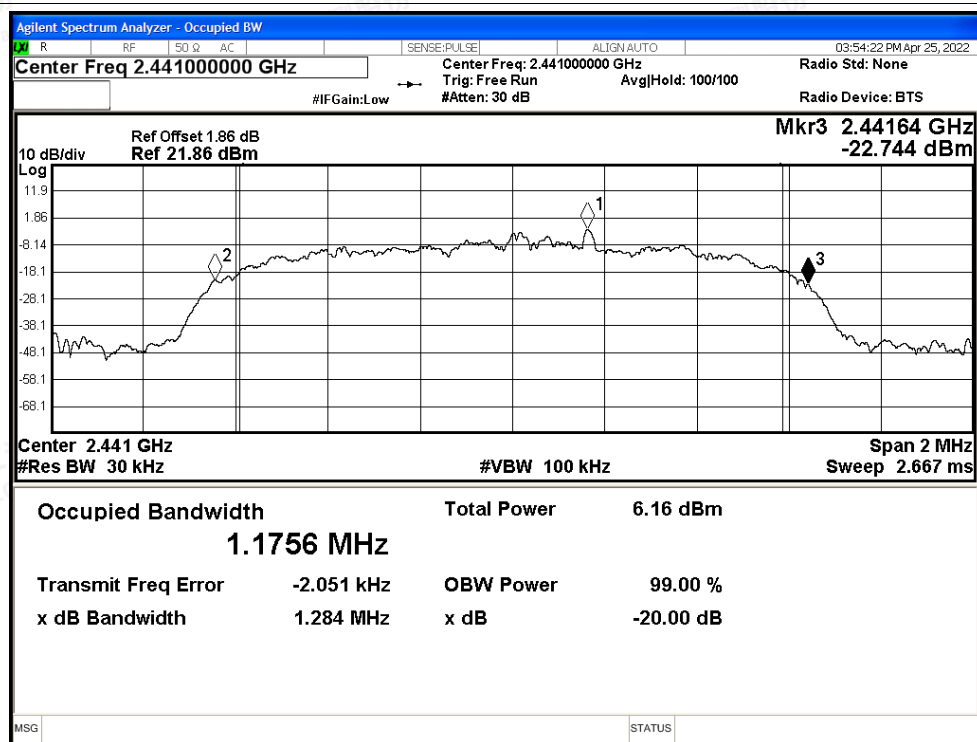

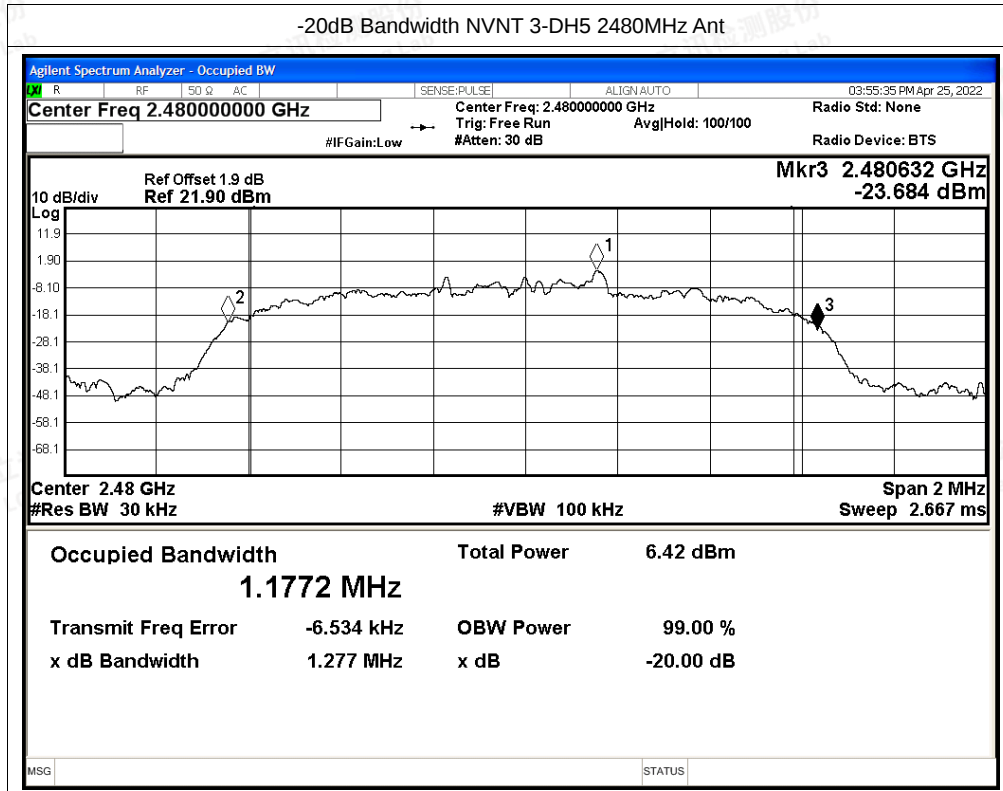



A.2 Maximum Peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant	0.77	21	Pass
NVNT	1-DH5	2441	Ant	1.41	21	Pass
NVNT	1-DH5	2480	Ant	1.41	21	Pass
NVNT	2-DH5	2402	Ant	0.69	21	Pass
NVNT	2-DH5	2441	Ant	1.55	21	Pass
NVNT	2-DH5	2480	Ant	1.53	21	Pass
NVNT	3-DH5	2402	Ant	1.12	21	Pass
NVNT	3-DH5	2441	Ant	1.64	21	Pass
NVNT	3-DH5	2480	Ant	1.63	21	Pass






Test Graphs

Power NVNT 1-DH5 2402MHz Ant

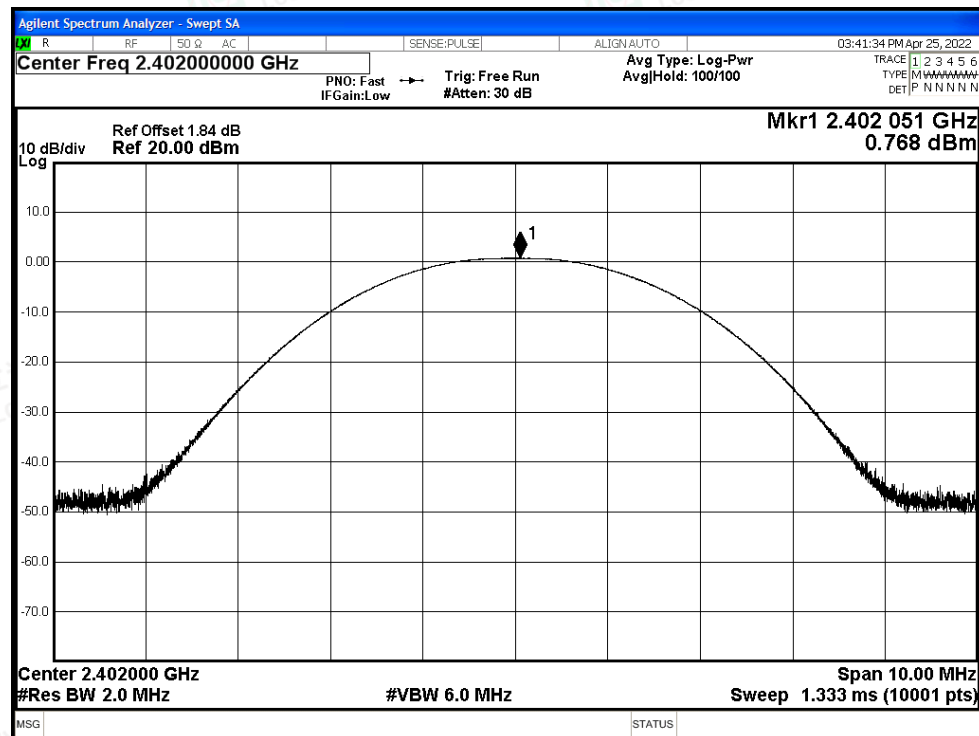


Power NVNT 1-DH5 2441MHz Ant

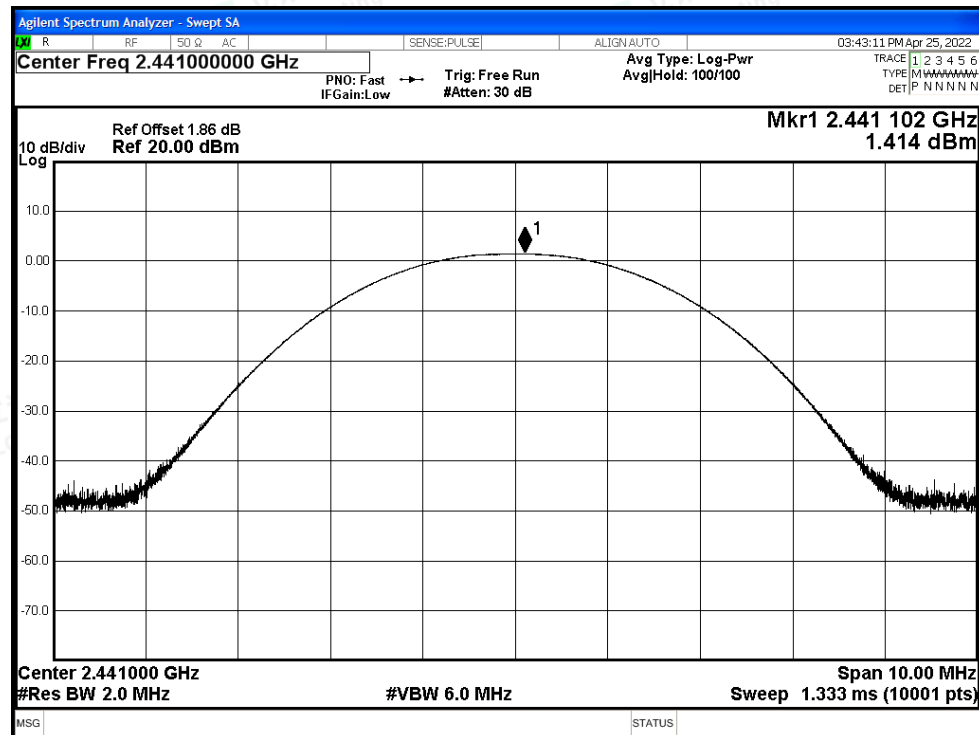




Power NVNT 1-DH5 2480MHz Ant

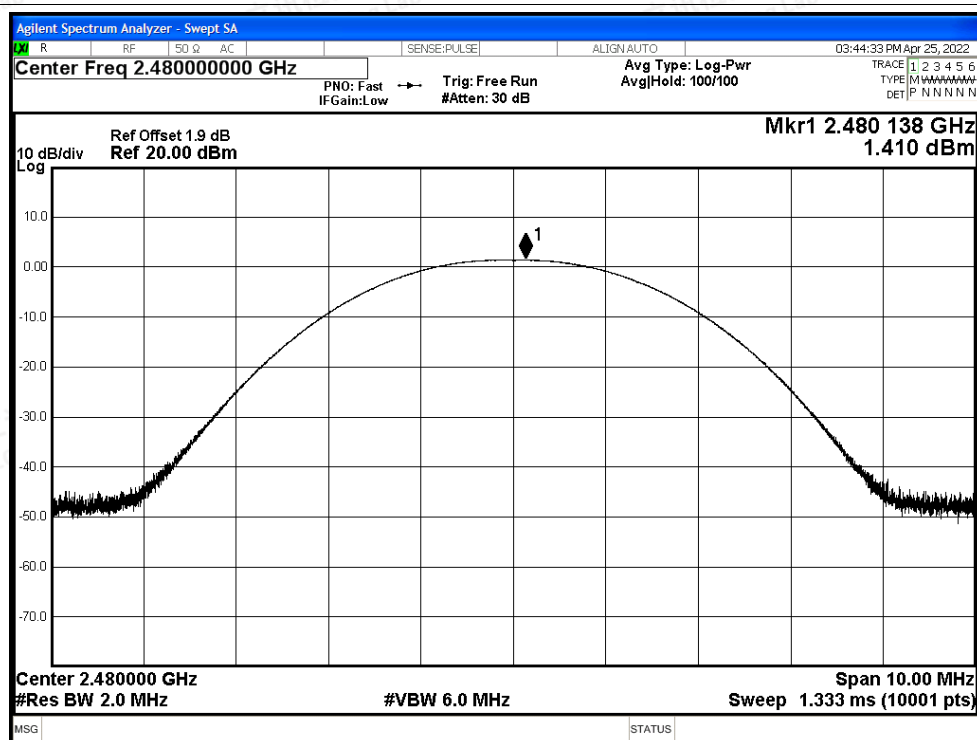


Power NVNT 2-DH5 2402MHz Ant

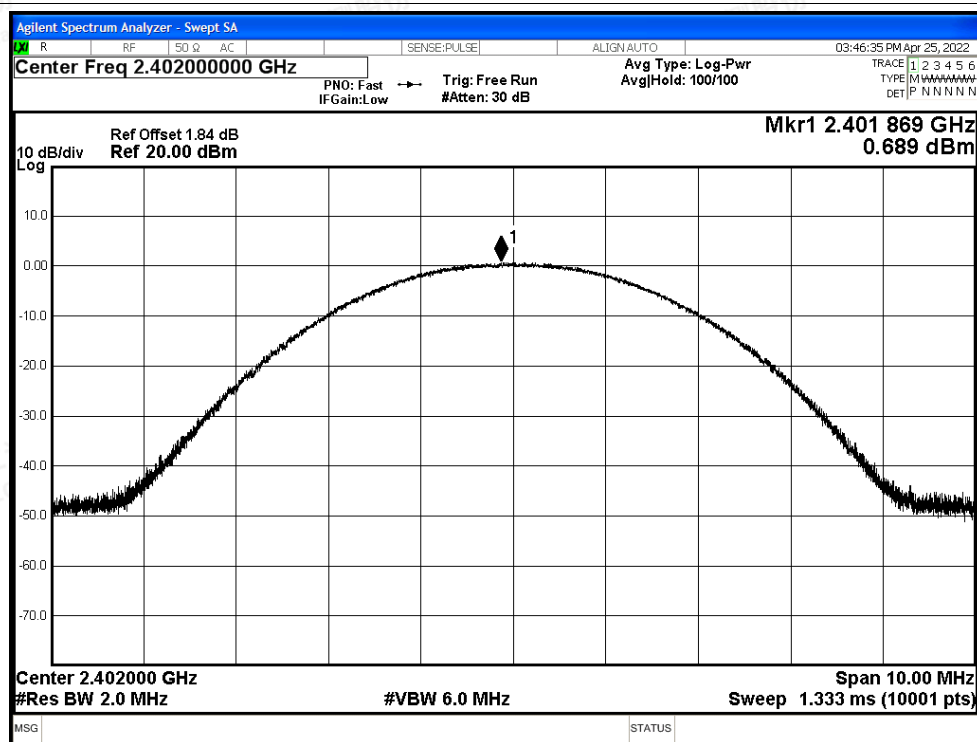




Power NVNT 2-DH5 2441MHz Ant

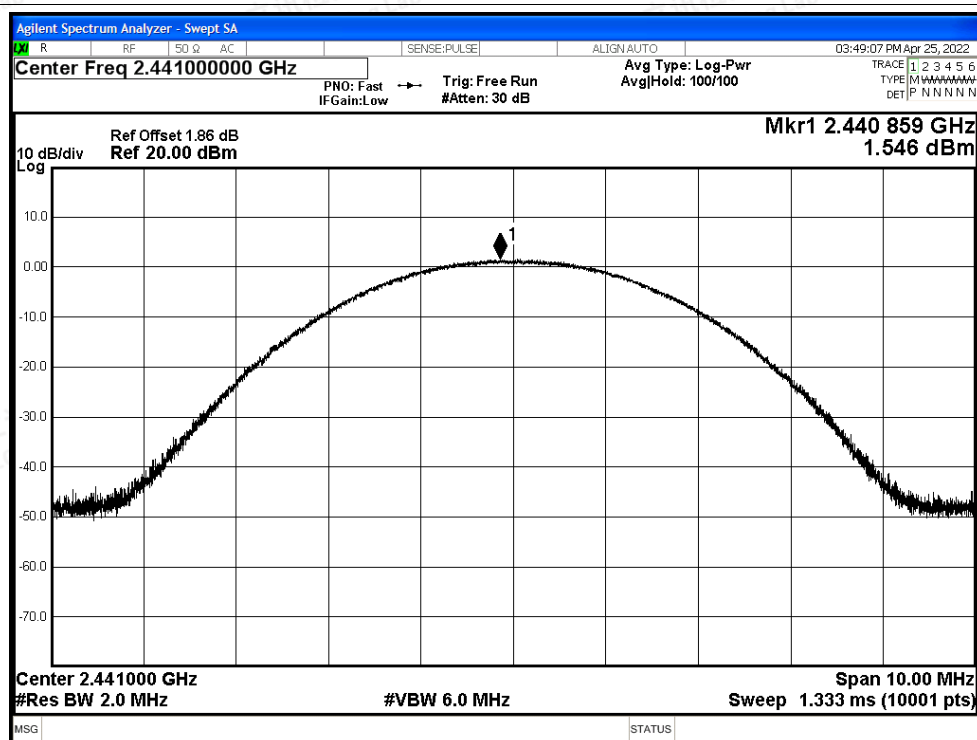


Power NVNT 2-DH5 2480MHz Ant

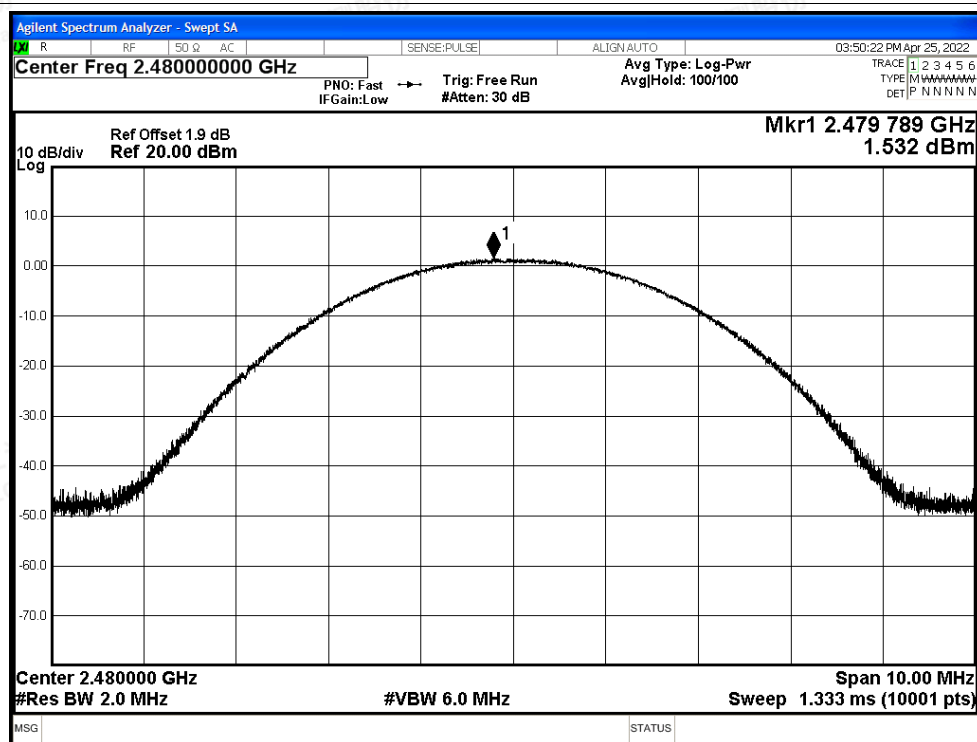





Power NVNT 3-DH5 2402MHz Ant

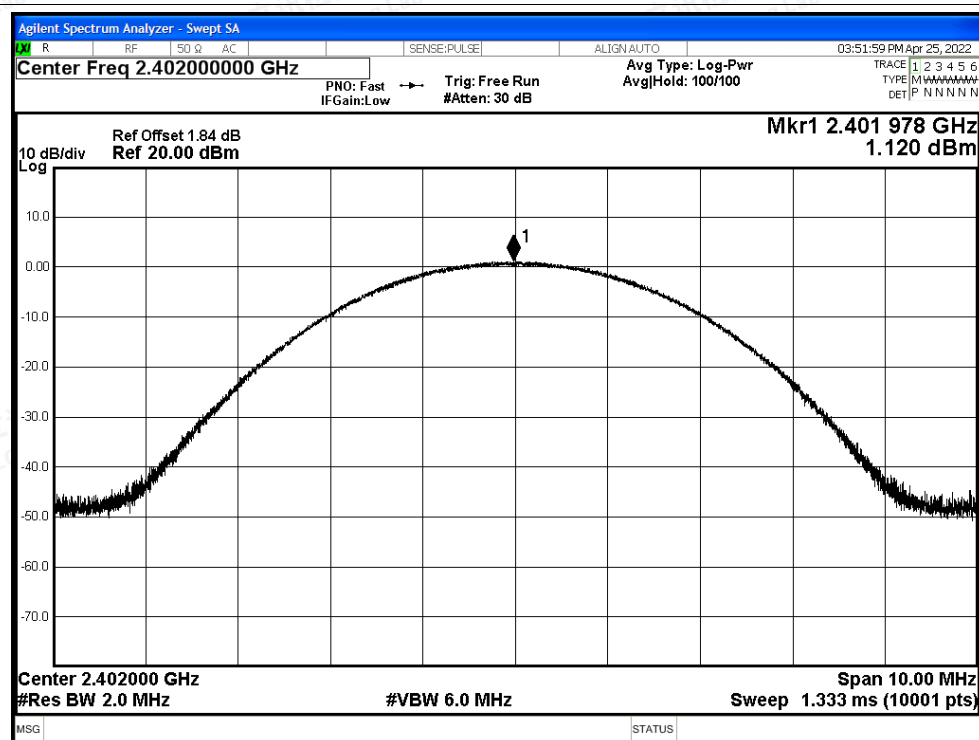

Power NVNT 3-DH5 2441MHz Ant

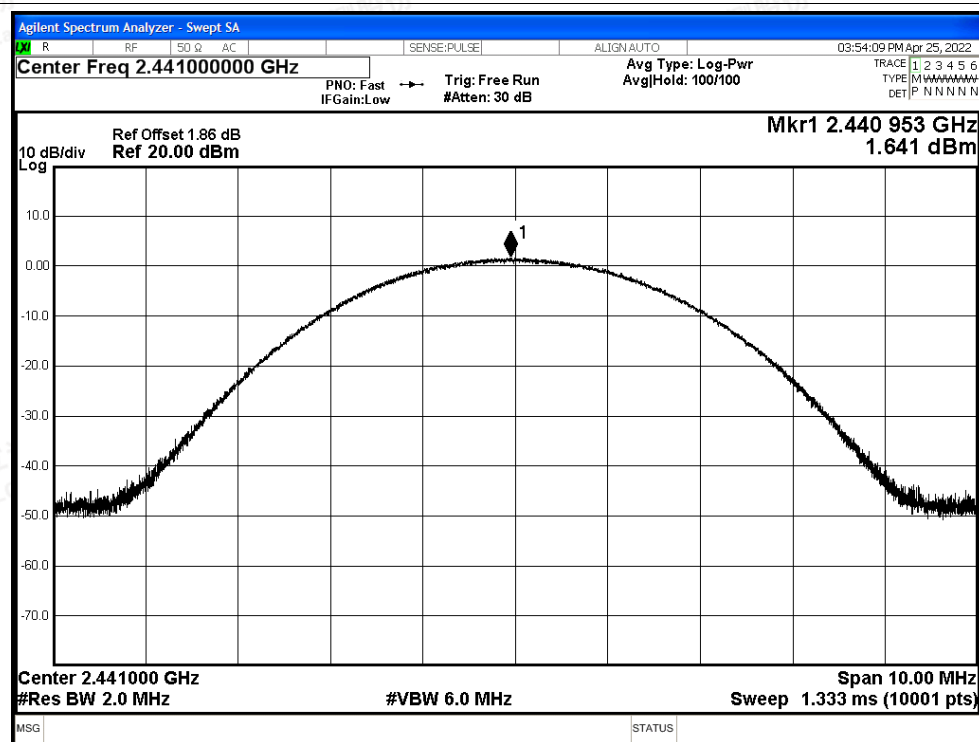

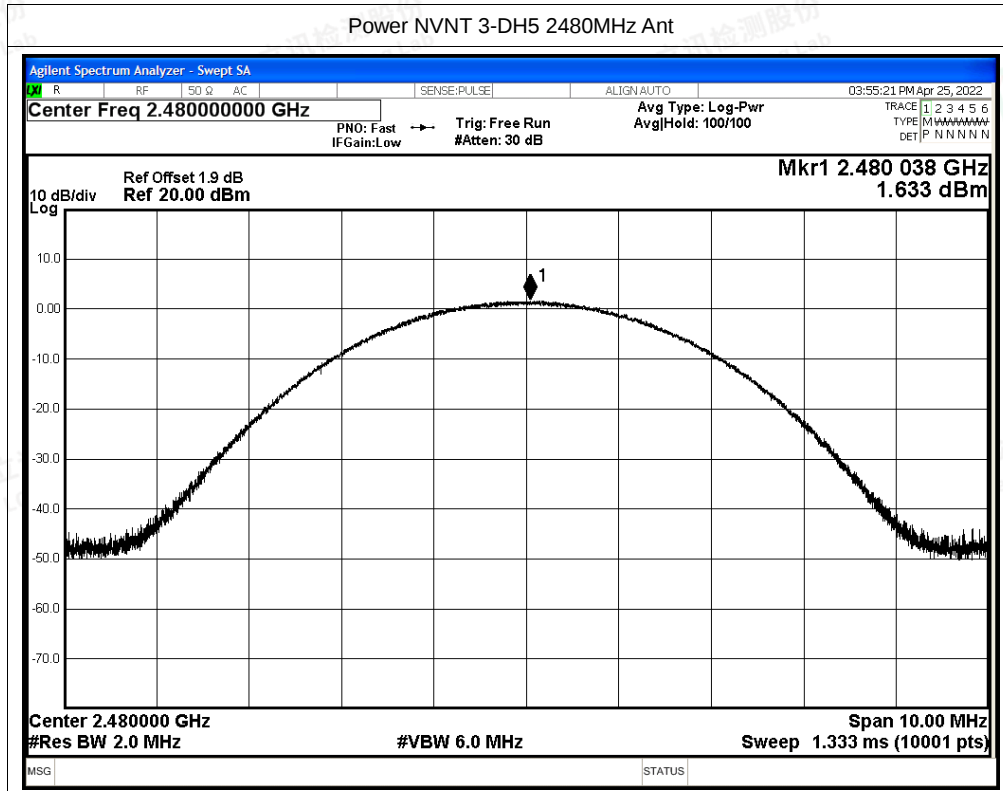



A.3 Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant	2402.004	2402.966	0.962	0.687	Pass
NVNT	2-DH5	Ant	2402.164	2403.158	0.994	0.871	Pass
NVNT	3-DH5	Ant	2402.15	2403.15	1	0.863	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

CFS NVNT 1-DH5 2402MHz Ant

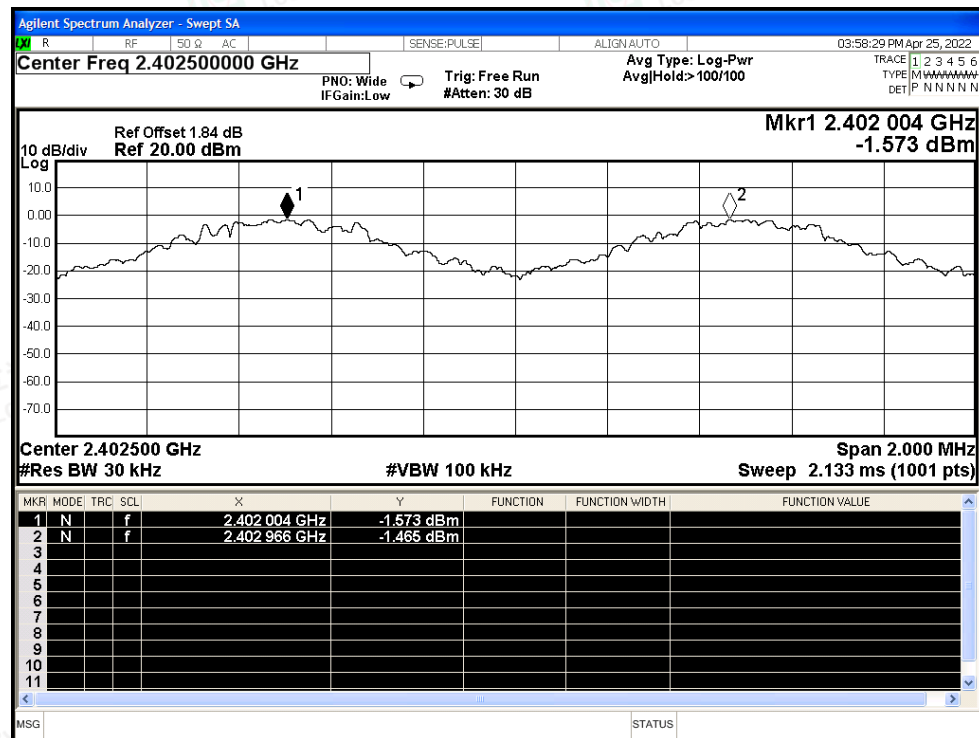

CFS NVNT 2-DH5 2402MHz Ant

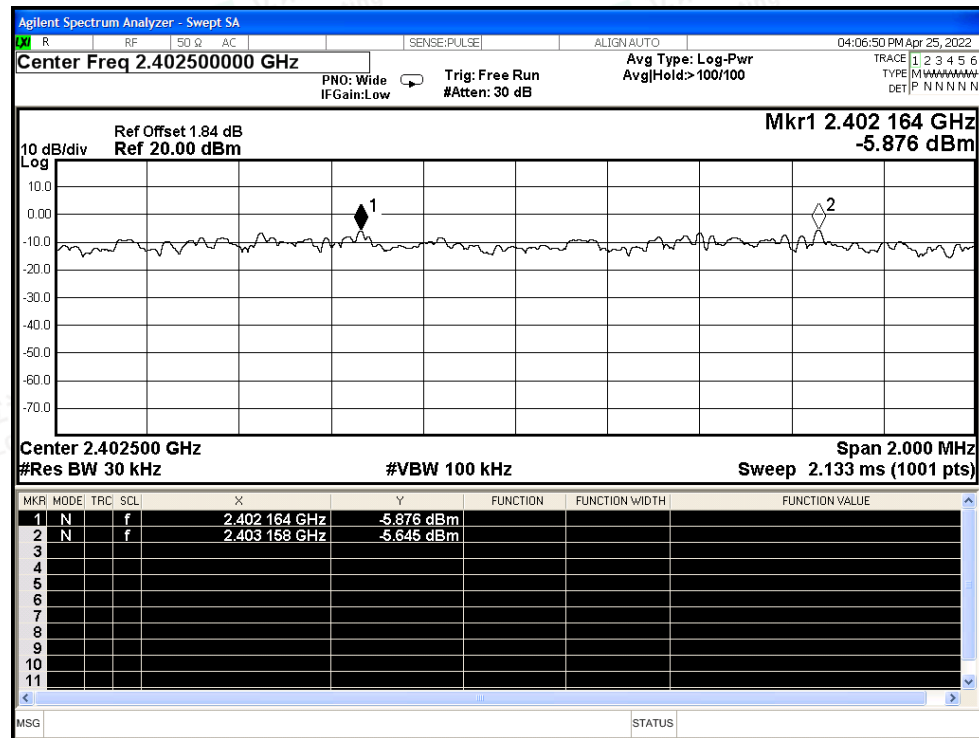

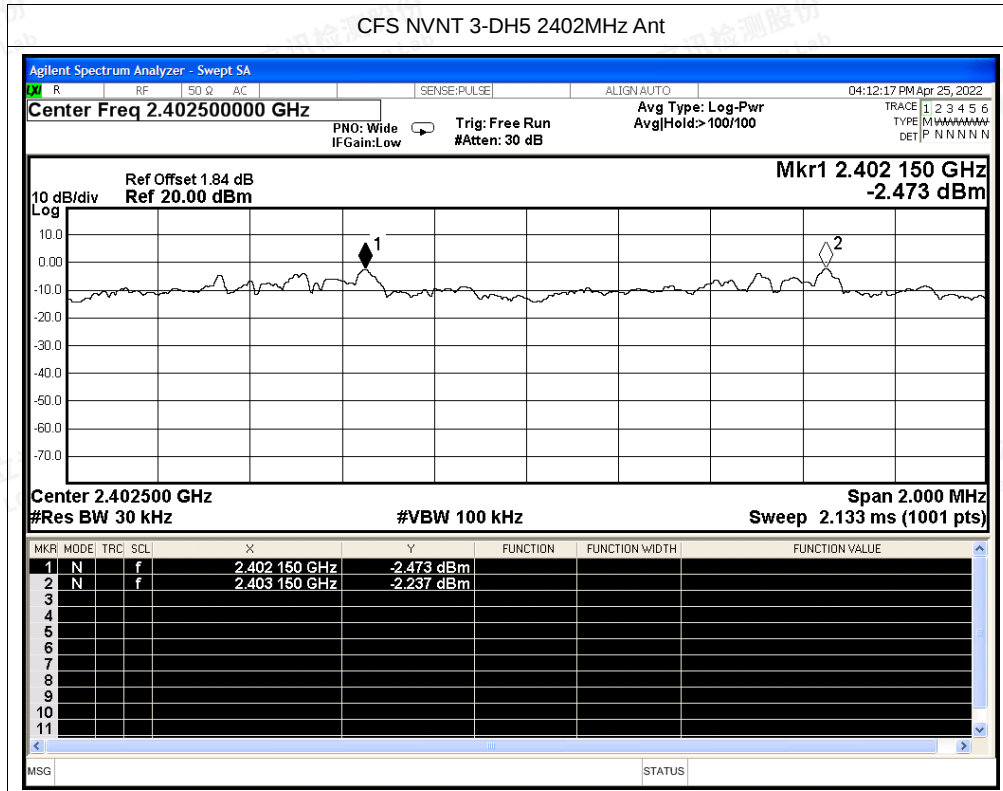



A.4 Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant	2.882	305.492	106	31600	400	Pass
NVNT	1-DH5	2441	Ant	2.881	273.695	95	31600	400	Pass
NVNT	1-DH5	2480	Ant	2.882	270.908	94	31600	400	Pass
NVNT	2-DH5	2402	Ant	2.881	316.91	110	31600	400	Pass
NVNT	2-DH5	2441	Ant	2.883	322.896	112	31600	400	Pass
NVNT	2-DH5	2480	Ant	2.883	314.247	109	31600	400	Pass
NVNT	3-DH5	2402	Ant	2.887	291.587	101	31600	400	Pass
NVNT	3-DH5	2441	Ant	2.884	308.588	107	31600	400	Pass
NVNT	3-DH5	2480	Ant	2.884	273.98	95	31600	400	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant One Burst

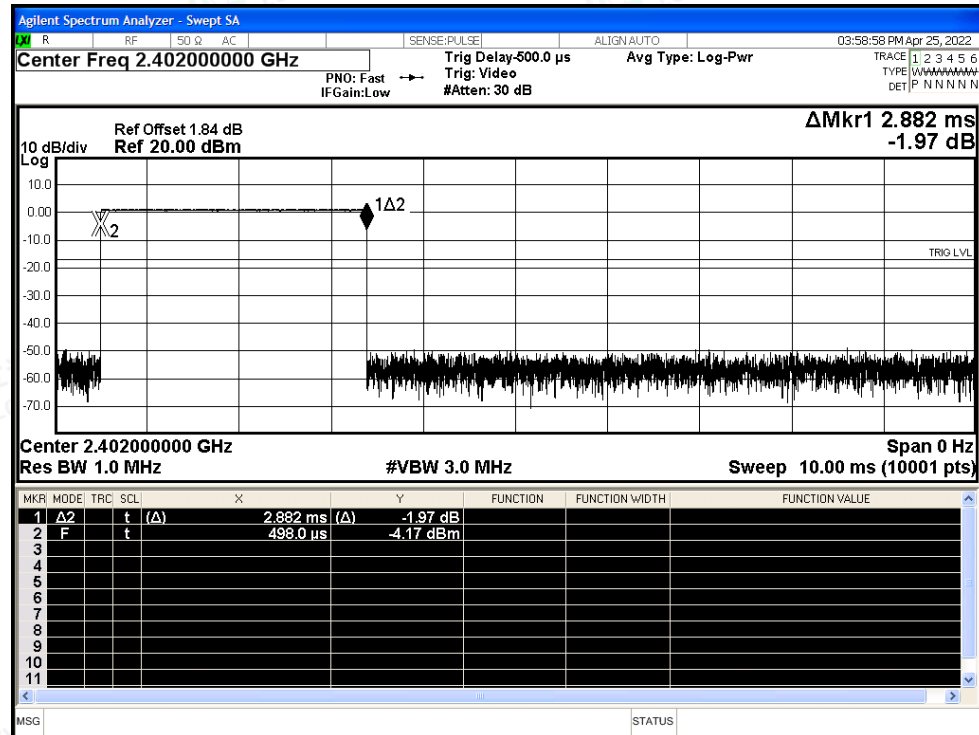


Dwell NVNT 1-DH5 2402MHz Ant Accumulated

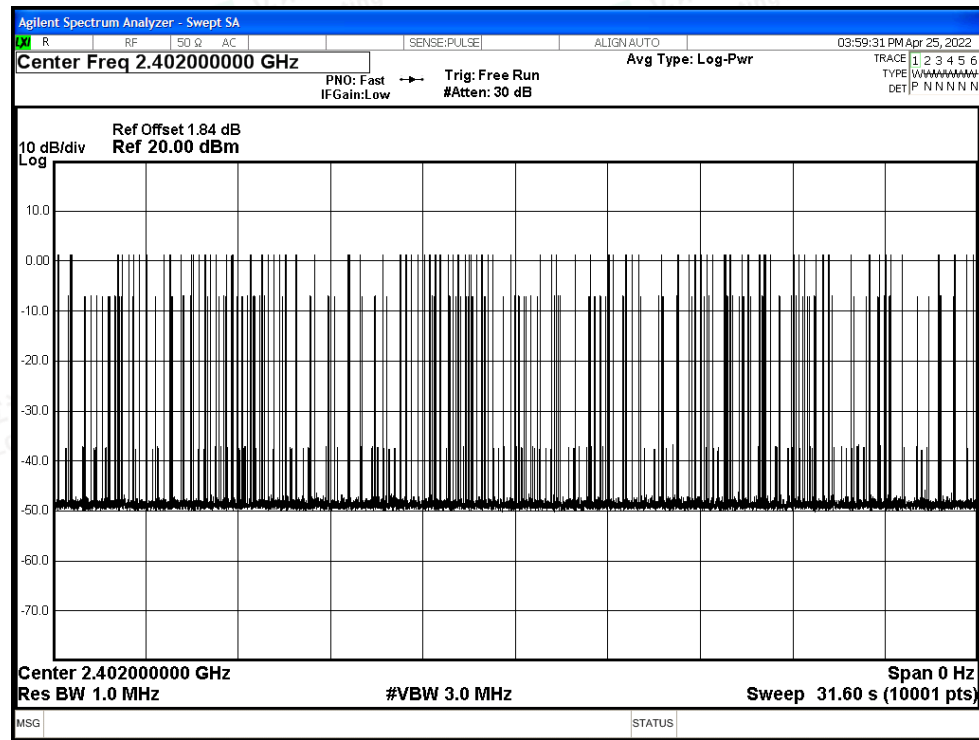




Dwell NVNT 1-DH5 2441MHz Ant One Burst

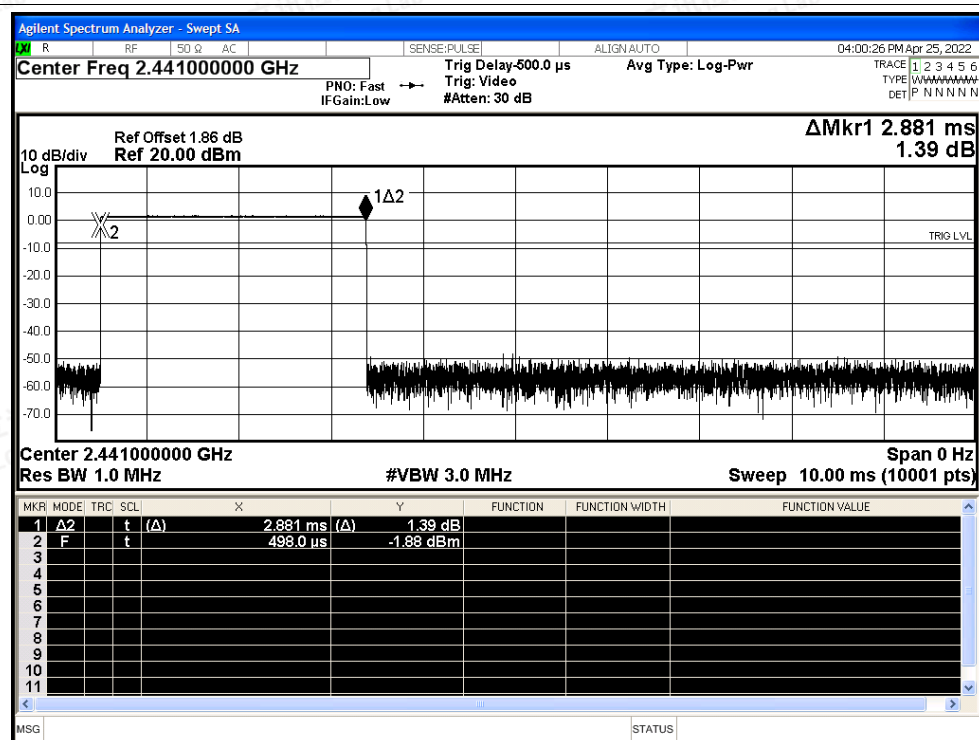


Dwell NVNT 1-DH5 2441MHz Ant Accumulated

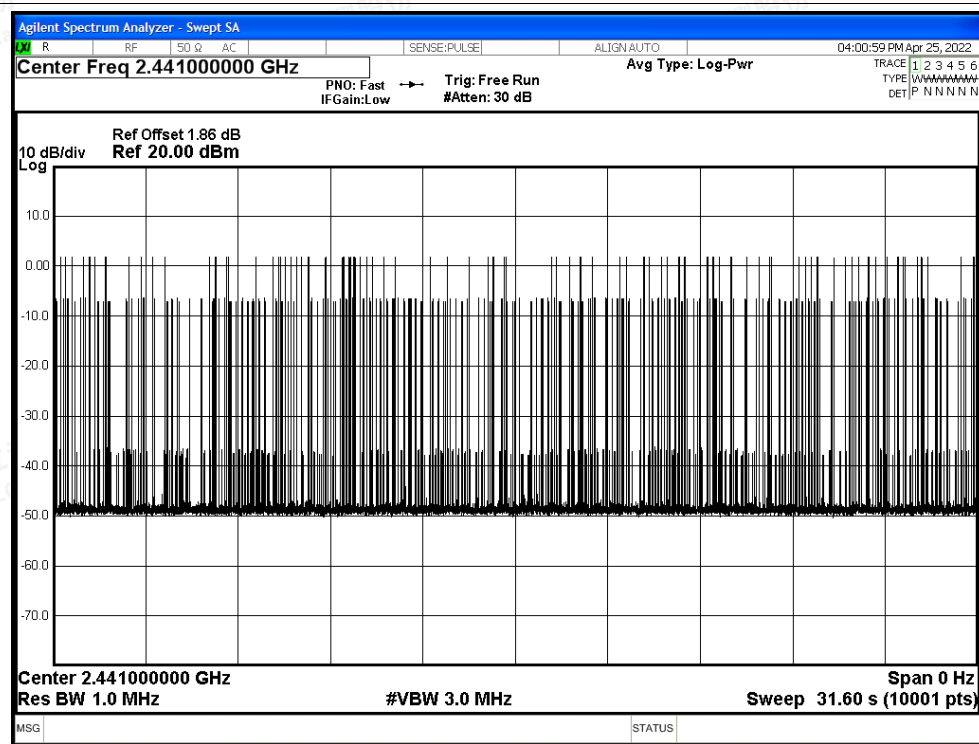




Dwell NVNT 1-DH5 2480MHz Ant One Burst

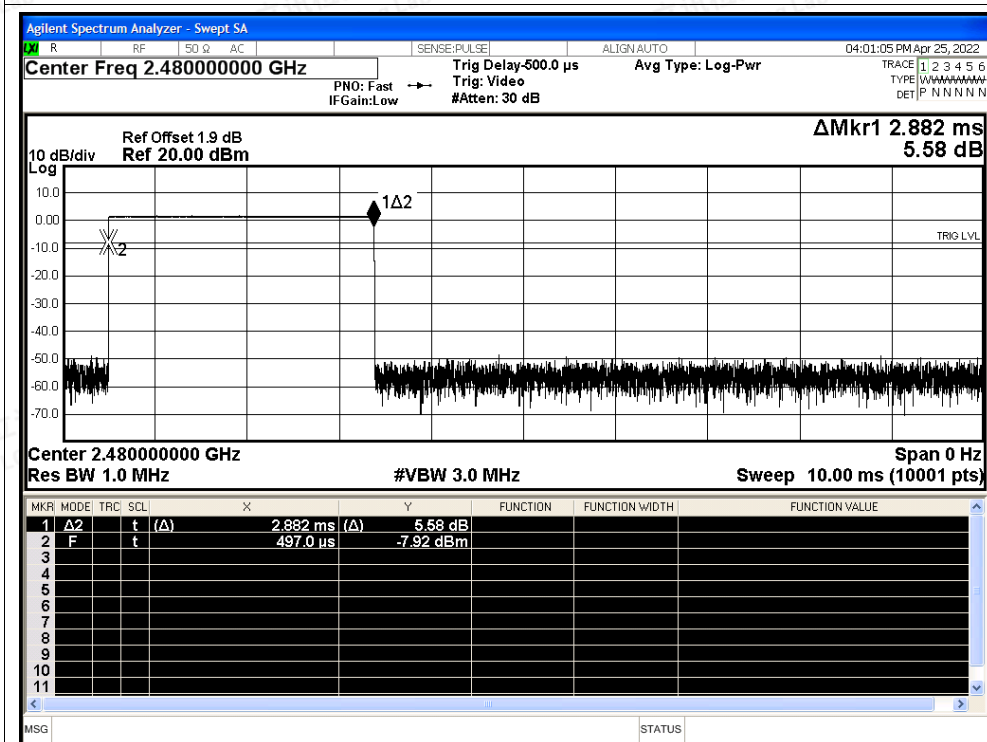


Dwell NVNT 1-DH5 2480MHz Ant Accumulated

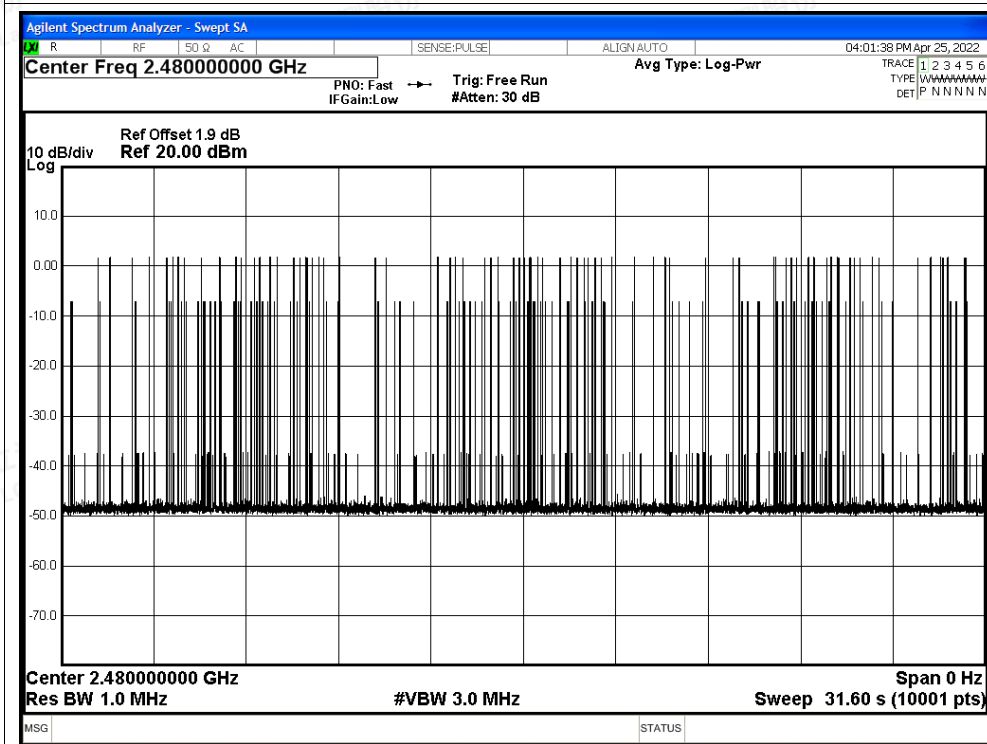




Dwell NVNT 2-DH5 2402MHz Ant One Burst

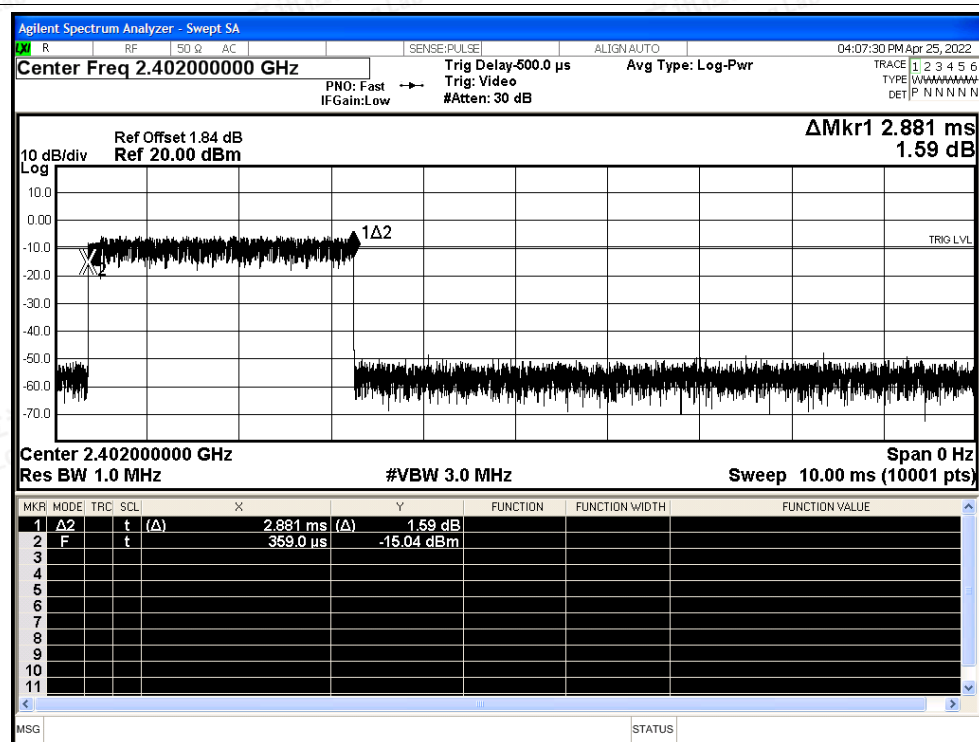


Dwell NVNT 2-DH5 2402MHz Ant Accumulated

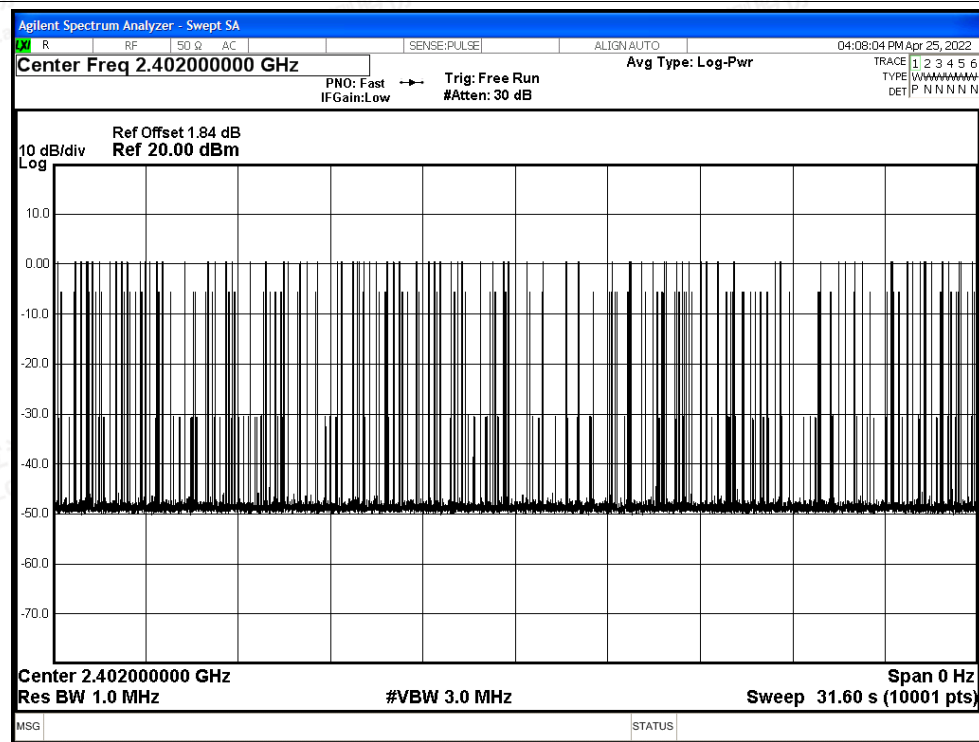




Dwell NVNT 2-DH5 2441MHz Ant One Burst

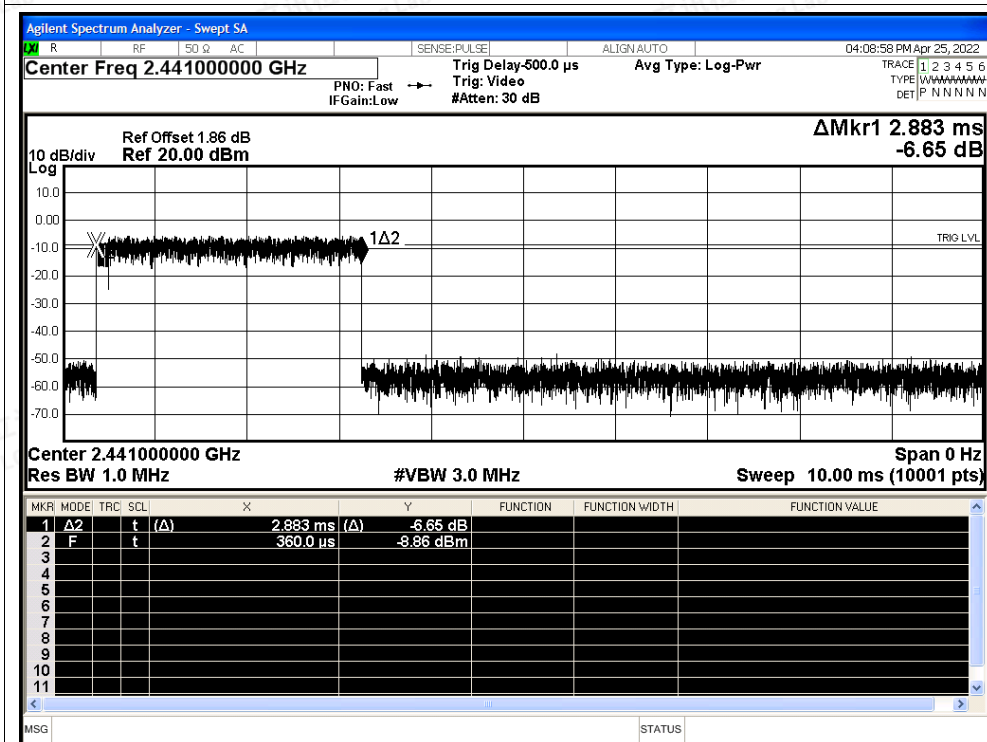


Dwell NVNT 2-DH5 2441MHz Ant Accumulated

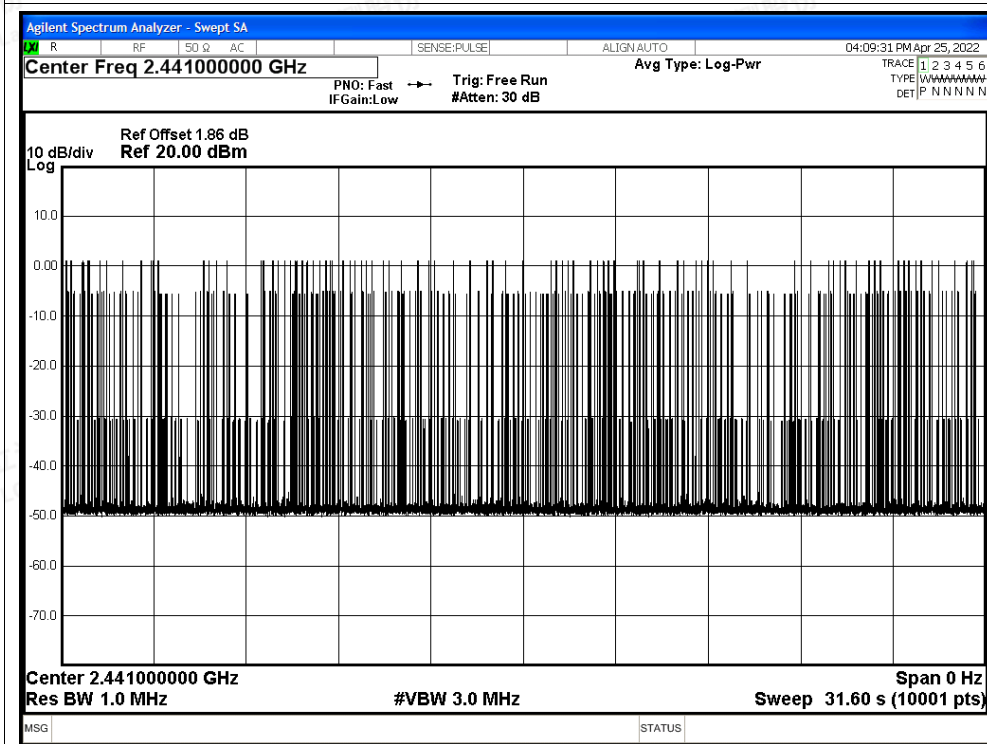




Dwell NVNT 2-DH5 2480MHz Ant One Burst

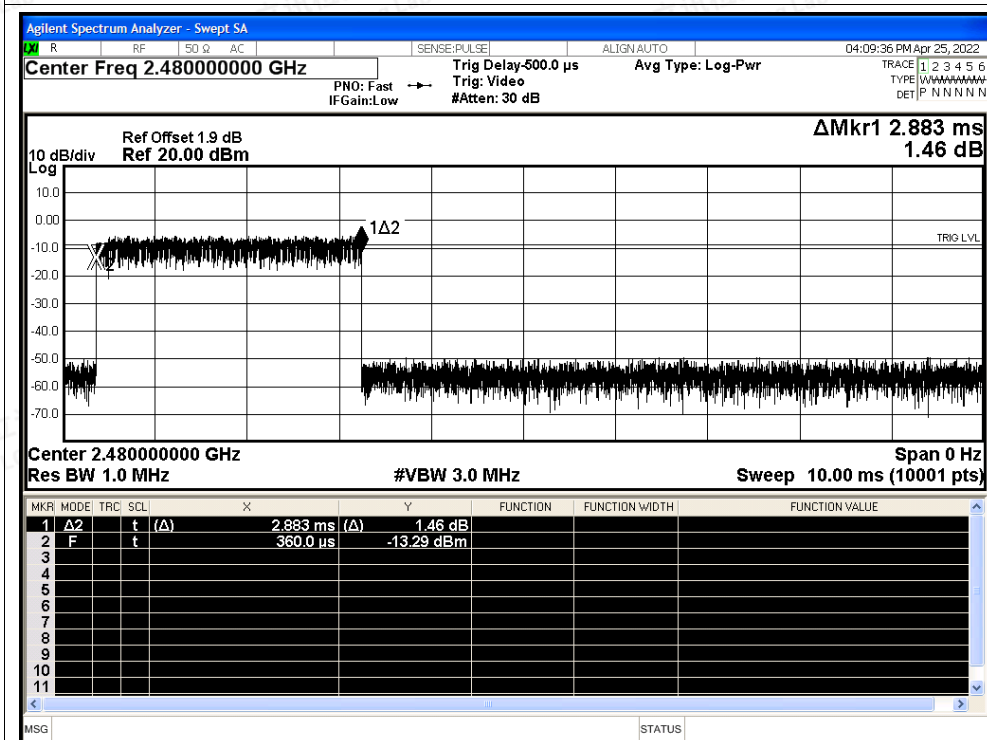


Dwell NVNT 2-DH5 2480MHz Ant Accumulated

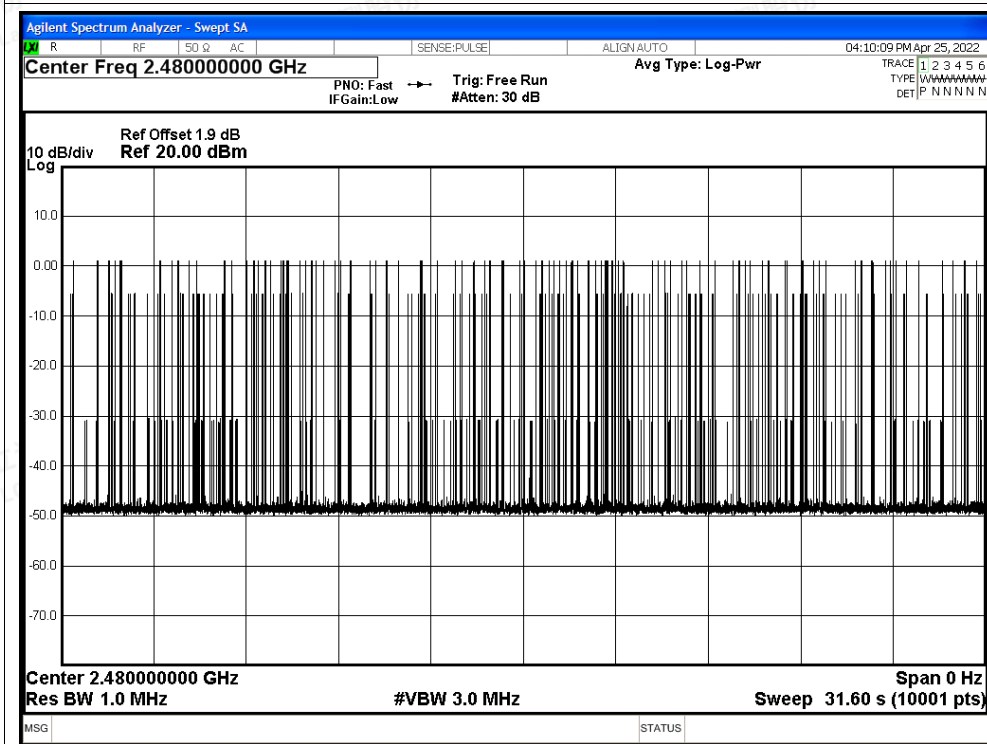




Dwell NVNT 3-DH5 2402MHz Ant One Burst

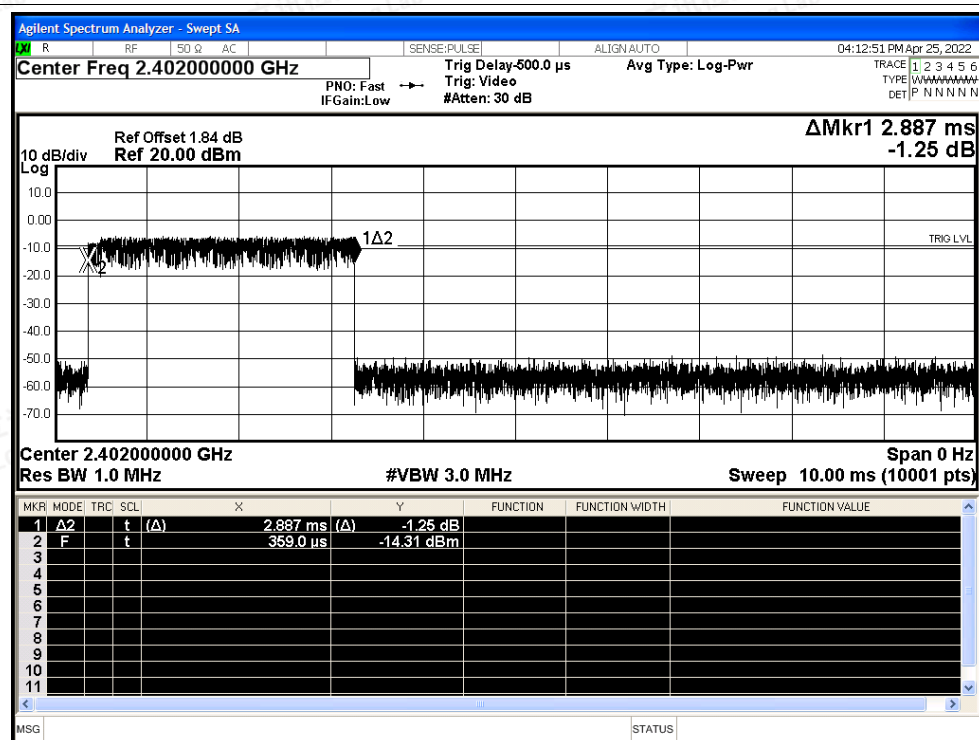


Dwell NVNT 3-DH5 2402MHz Ant Accumulated

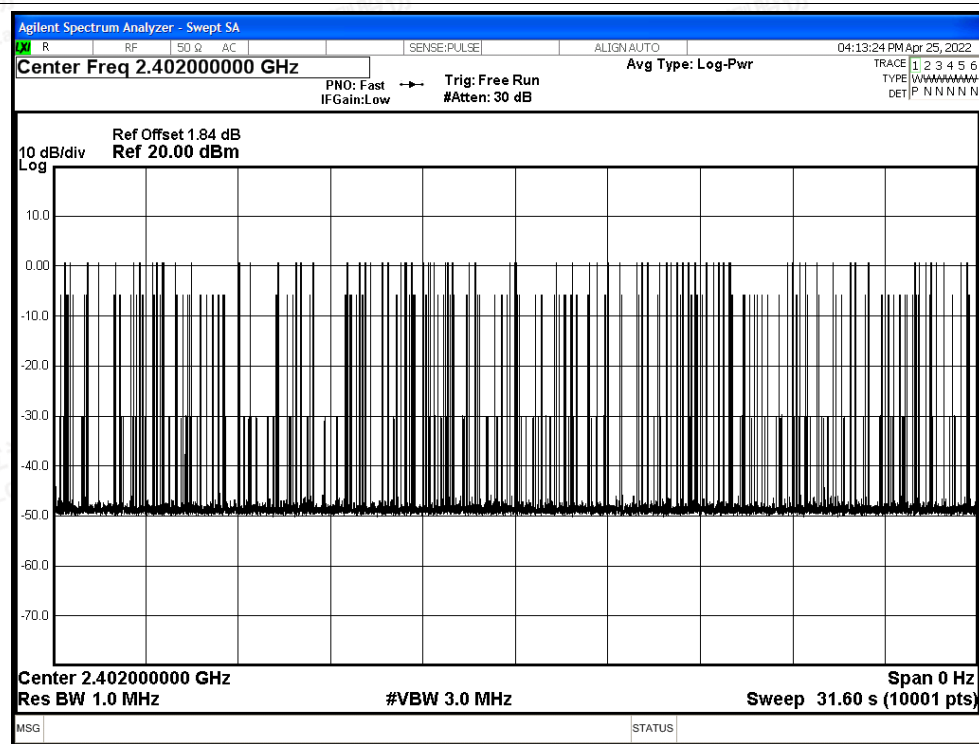




Dwell NVNT 3-DH5 2441MHz Ant One Burst

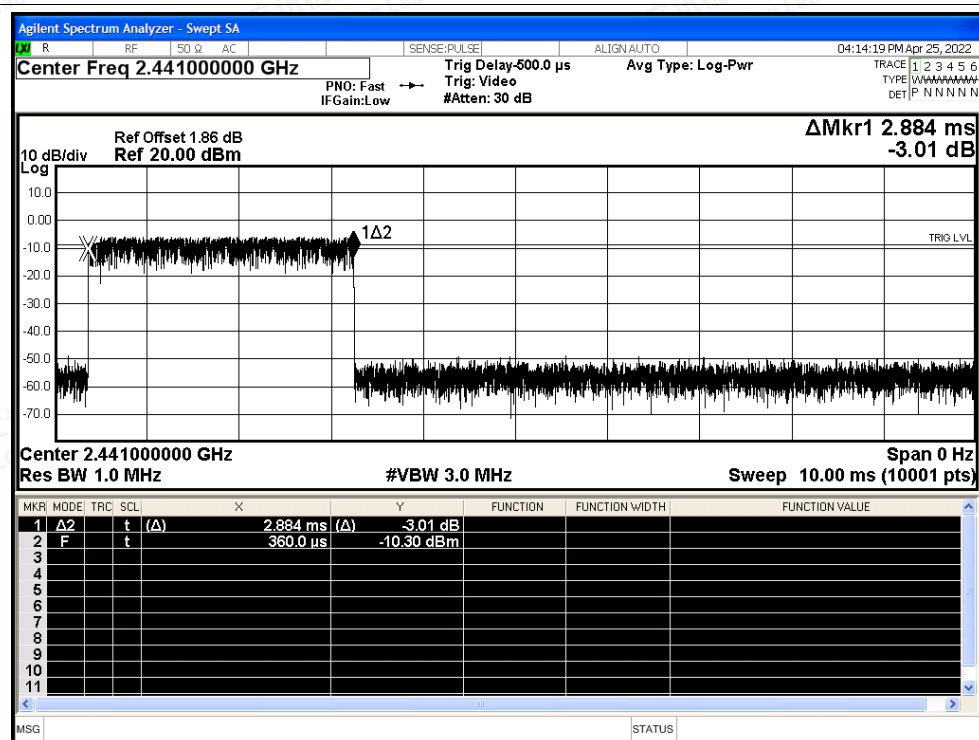


Dwell NVNT 3-DH5 2441MHz Ant Accumulated

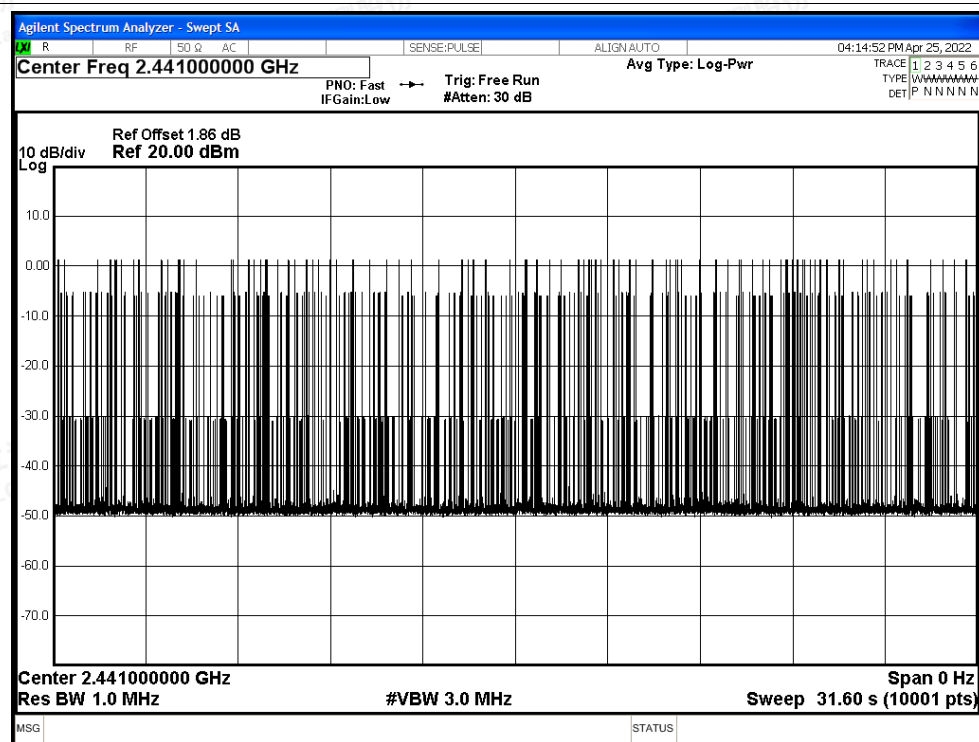




Dwell NVNT 3-DH5 2480MHz Ant One Burst

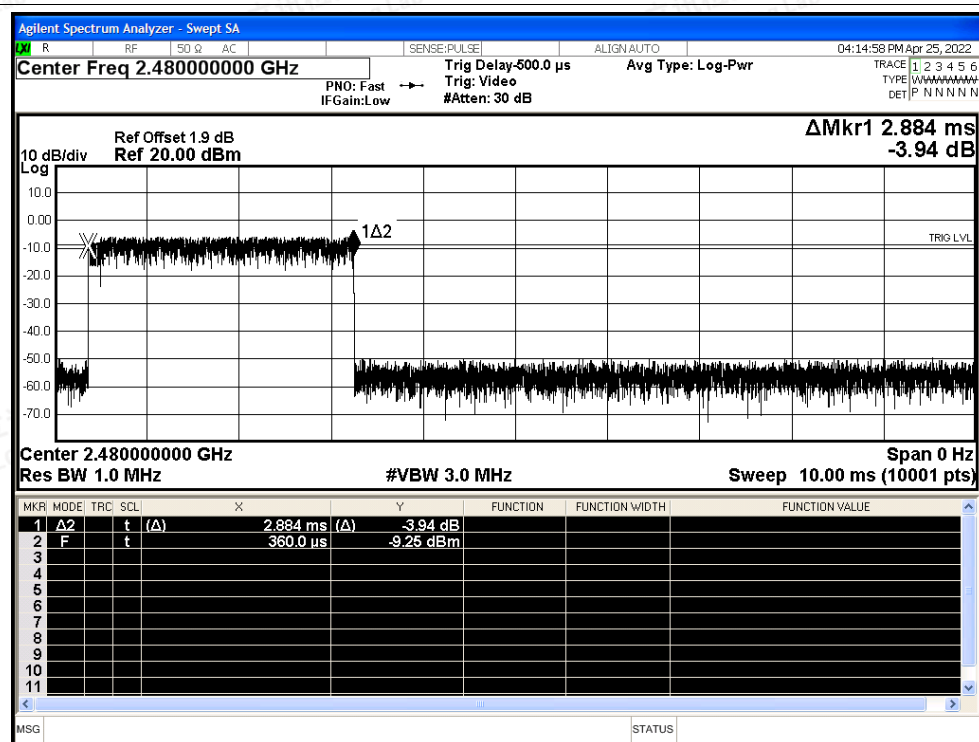

Dwell NVNT 3-DH5 2480MHz Ant Accumulated

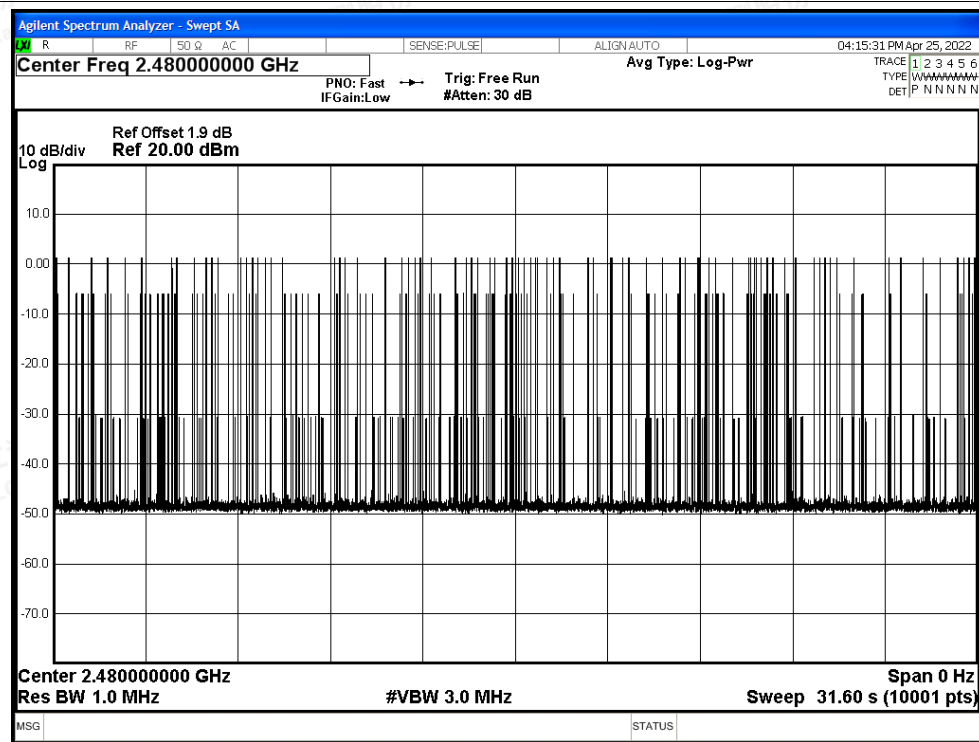



A.5 Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant	79	15	Pass
NVNT	2-DH5	Ant	79	15	Pass
NVNT	3-DH5	Ant	79	15	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant

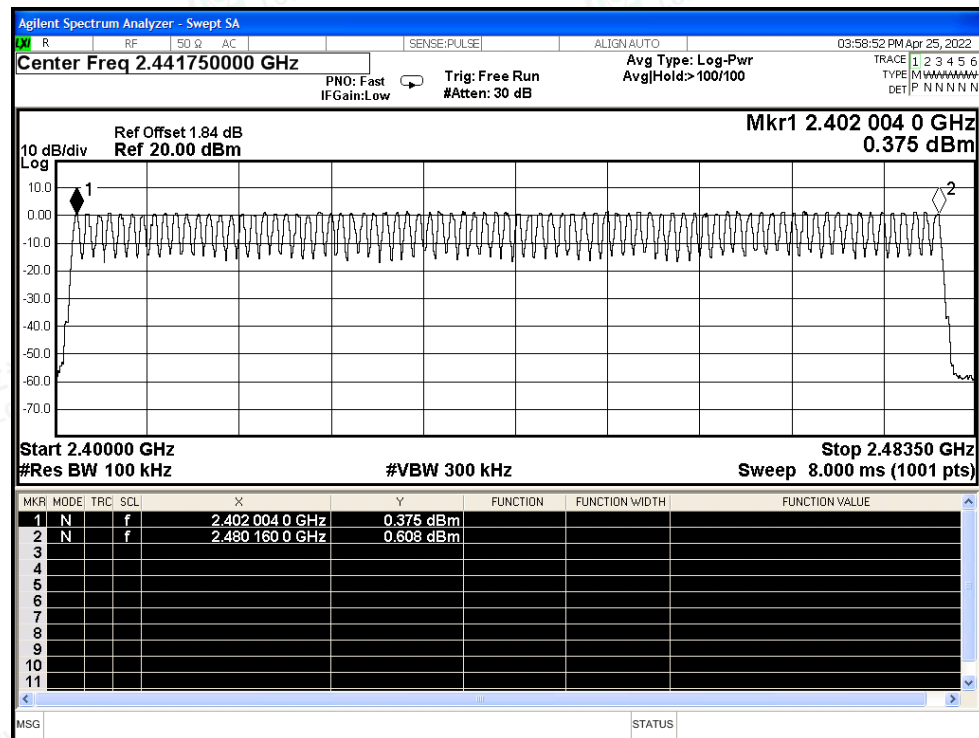

Hopping No. NVNT 2-DH5 2402MHz Ant

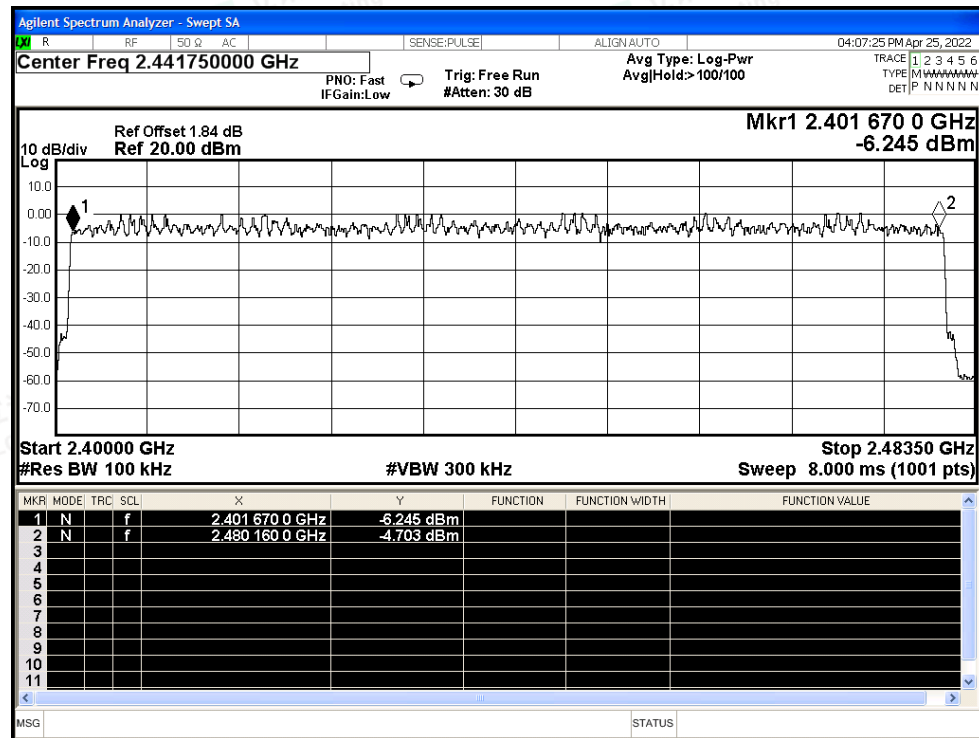

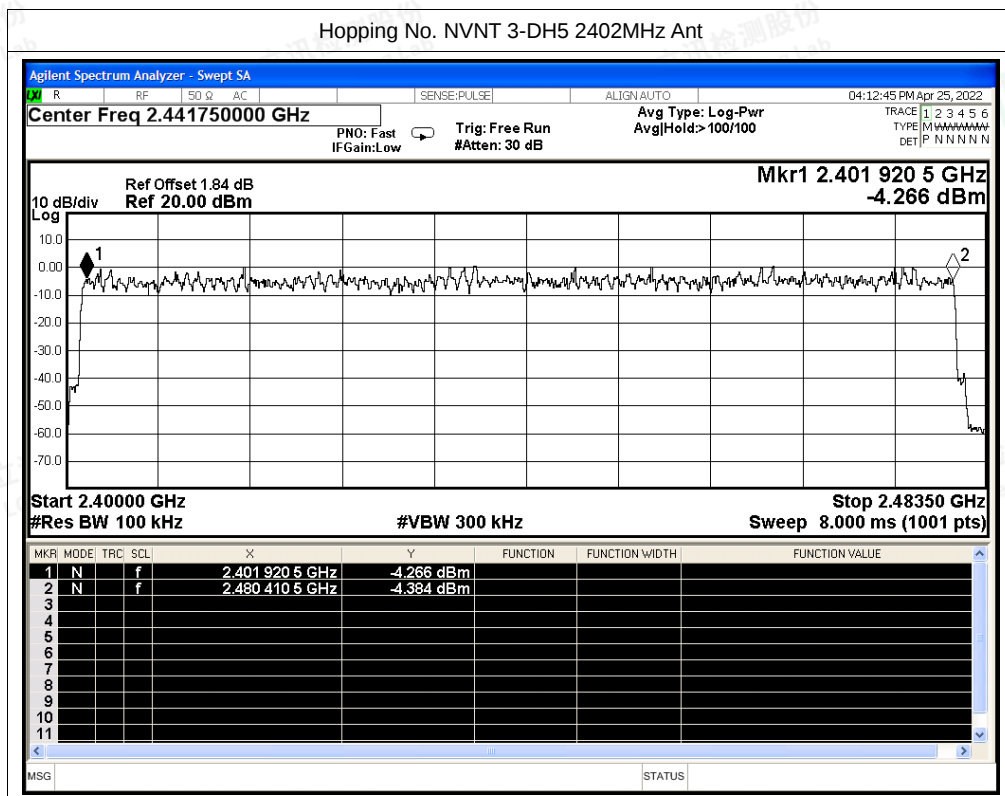



A.6 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant	No-Hopping	-57.07	-20	Pass
NVNT	1-DH5	2480	Ant	No-Hopping	-58.12	-20	Pass
NVNT	2-DH5	2402	Ant	No-Hopping	-54.36	-20	Pass
NVNT	2-DH5	2480	Ant	No-Hopping	-57.88	-20	Pass
NVNT	3-DH5	2402	Ant	No-Hopping	-53.34	-20	Pass
NVNT	3-DH5	2480	Ant	No-Hopping	-54.2	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant No-Hopping Ref

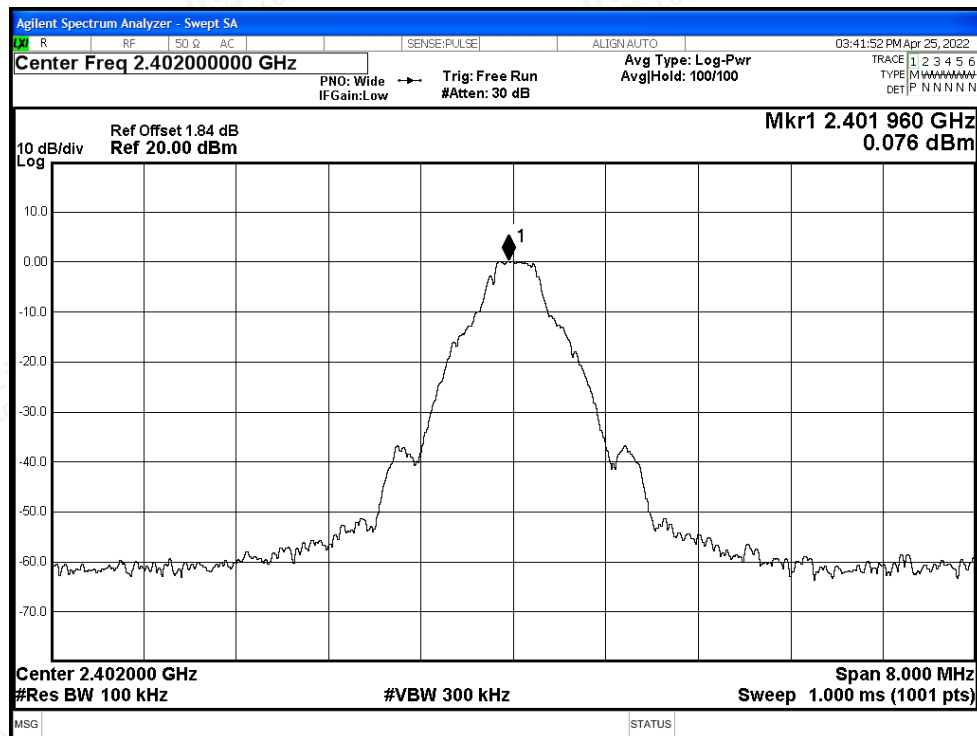

Band Edge NVNT 1-DH5 2402MHz Ant No-Hopping Emission

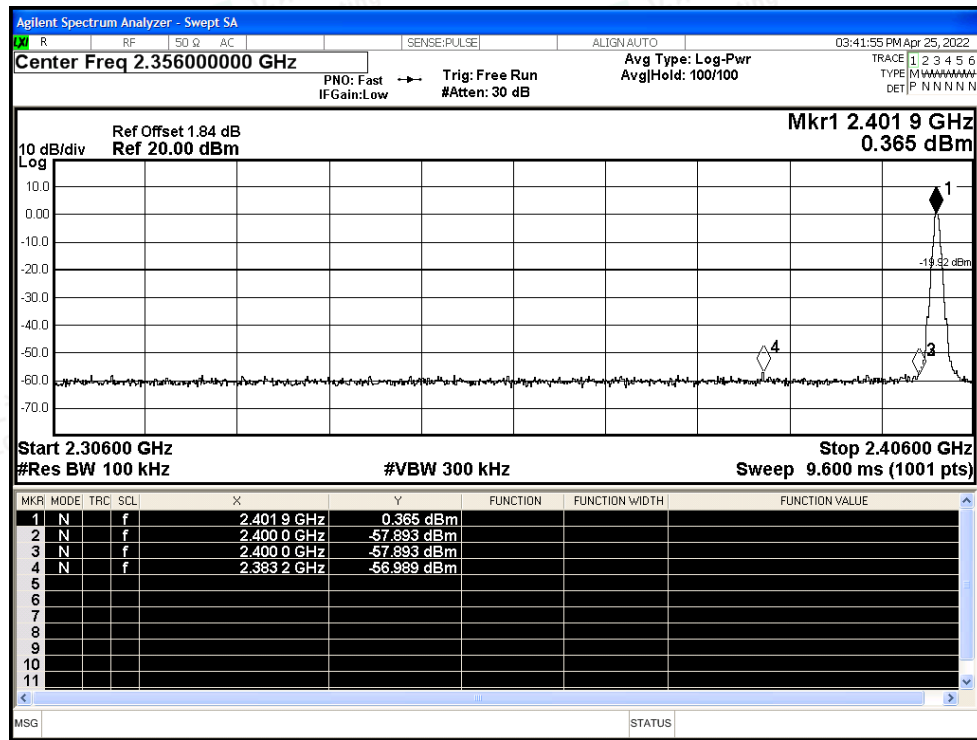

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 1-DH5 2480MHz Ant No-Hopping Ref

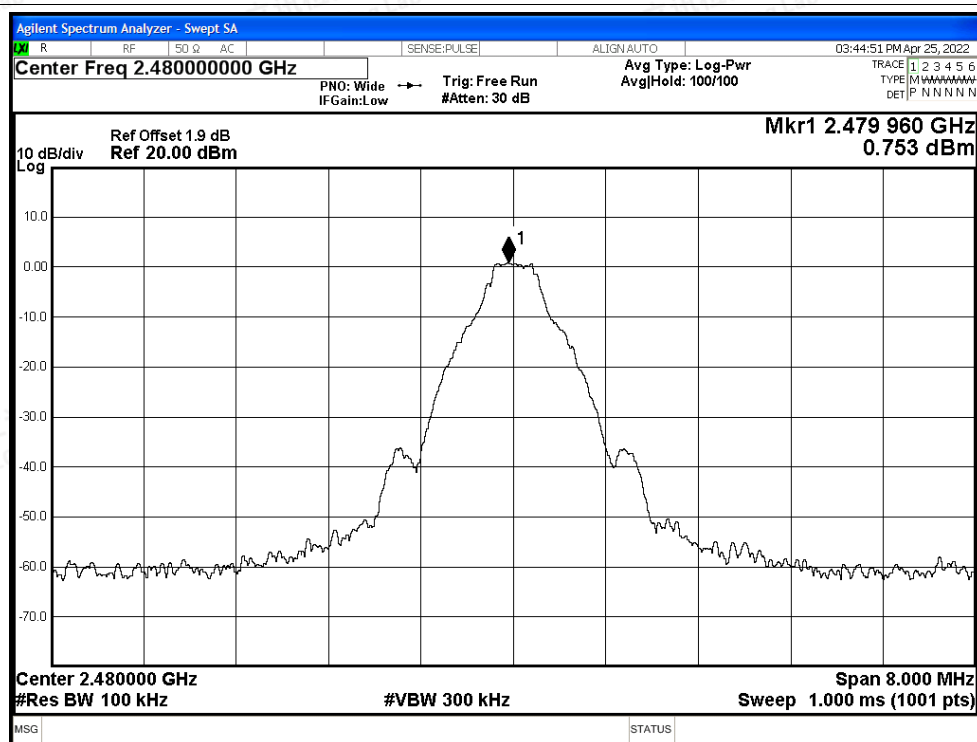


Band Edge NVNT 1-DH5 2480MHz Ant No-Hopping Emission

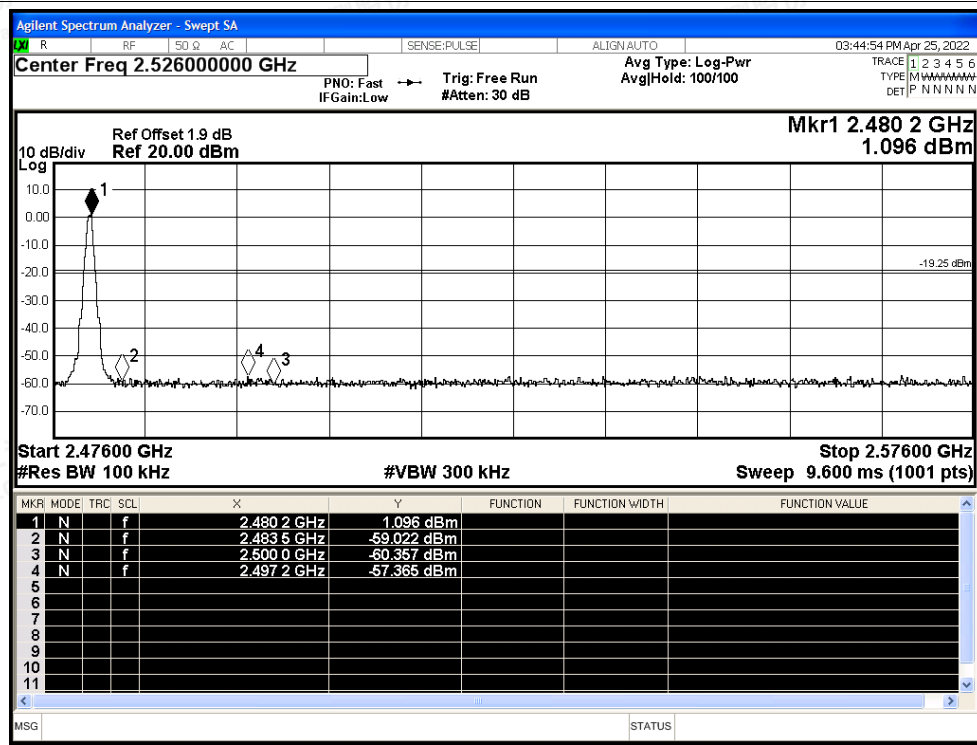




Band Edge NVNT 2-DH5 2402MHz Ant No-Hopping Ref

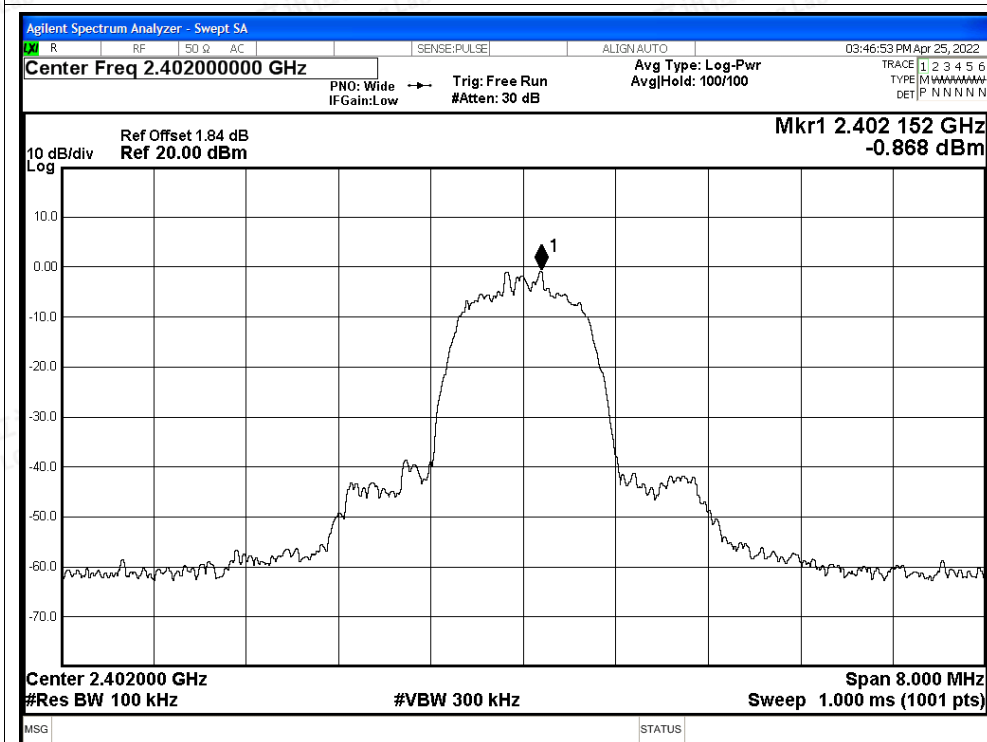


Band Edge NVNT 2-DH5 2402MHz Ant No-Hopping Emission

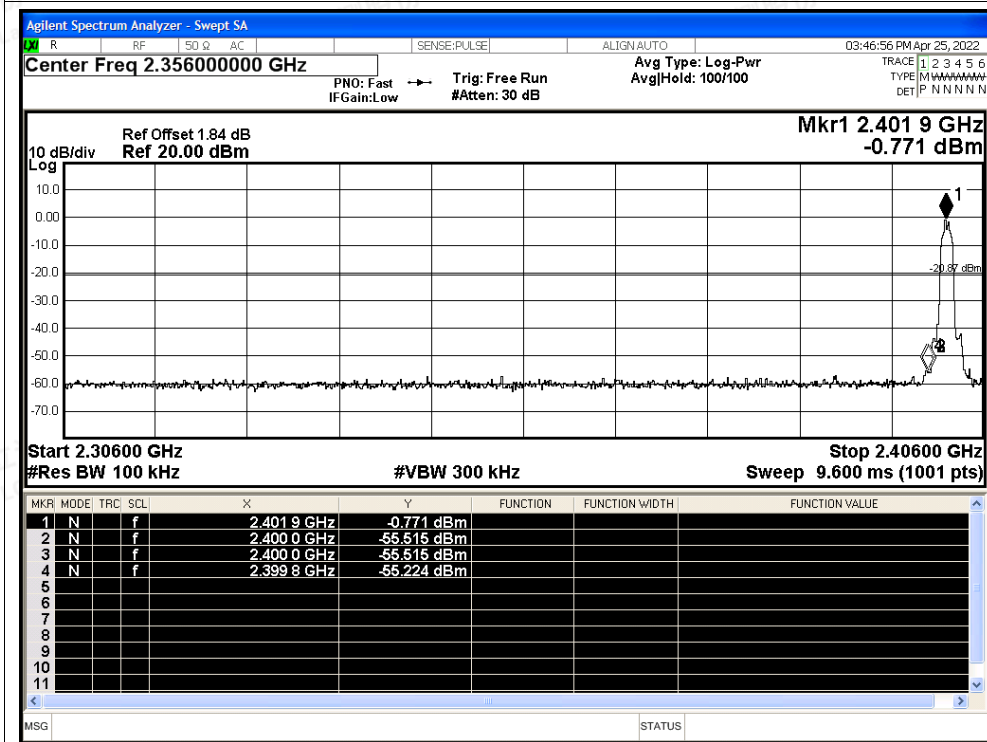




Band Edge NVNT 2-DH5 2480MHz Ant No-Hopping Ref

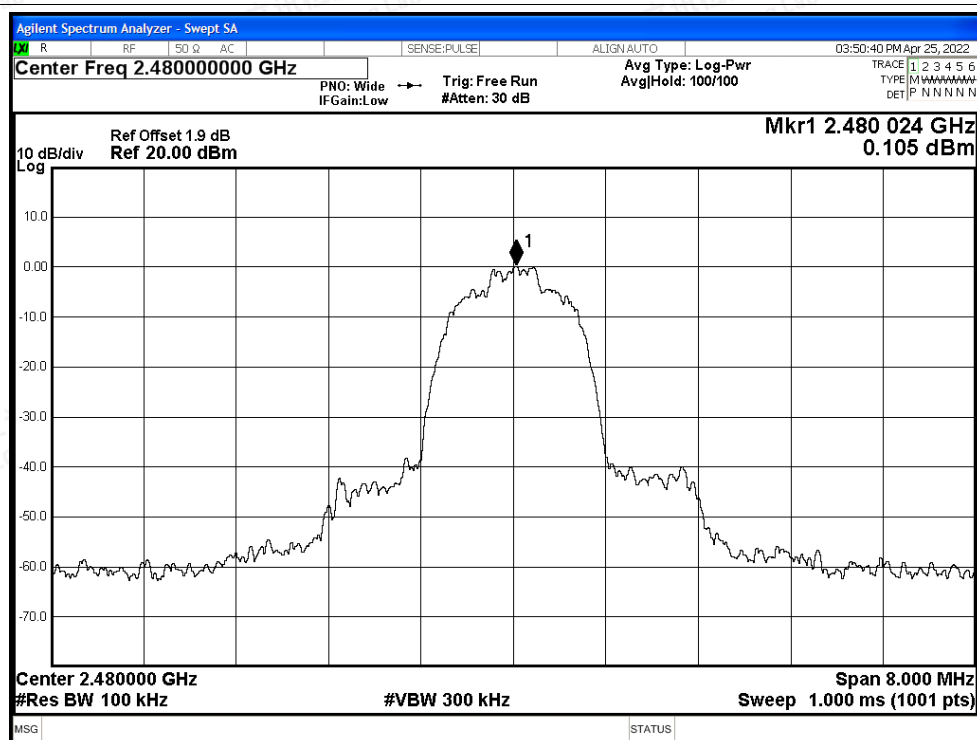


Band Edge NVNT 2-DH5 2480MHz Ant No-Hopping Emission

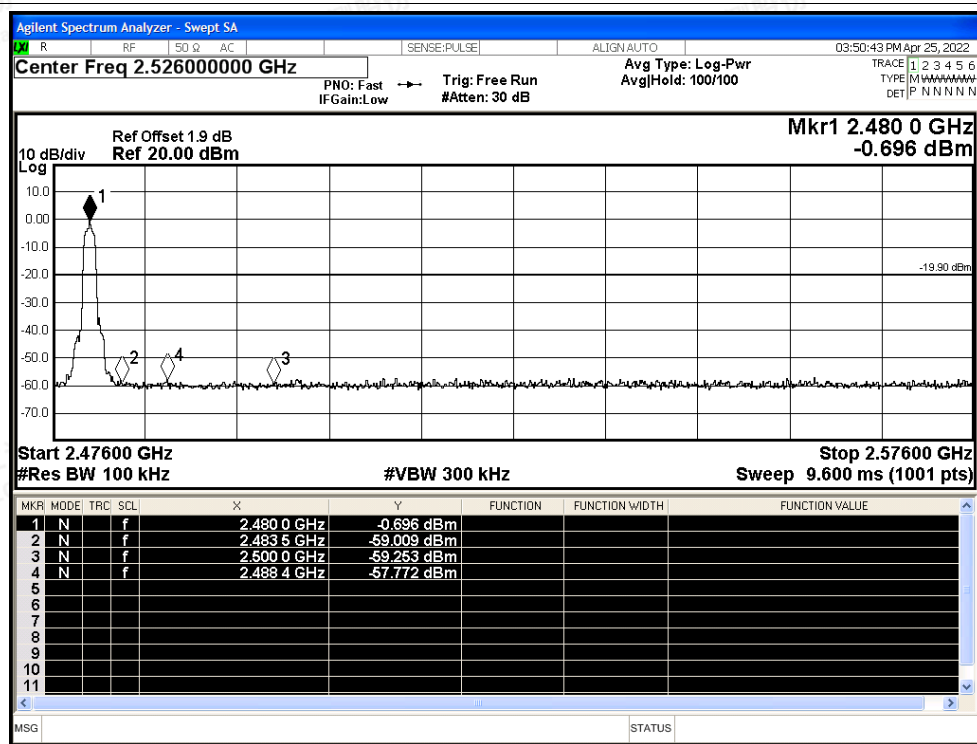




Band Edge NVNT 3-DH5 2402MHz Ant No-Hopping Ref

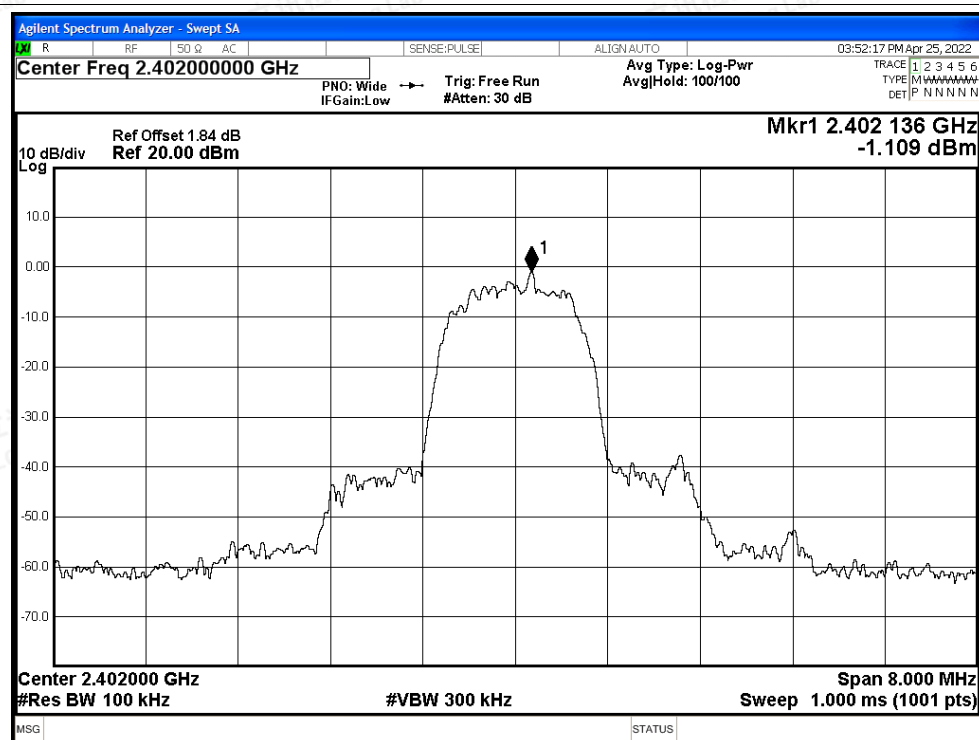


Band Edge NVNT 3-DH5 2402MHz Ant No-Hopping Emission

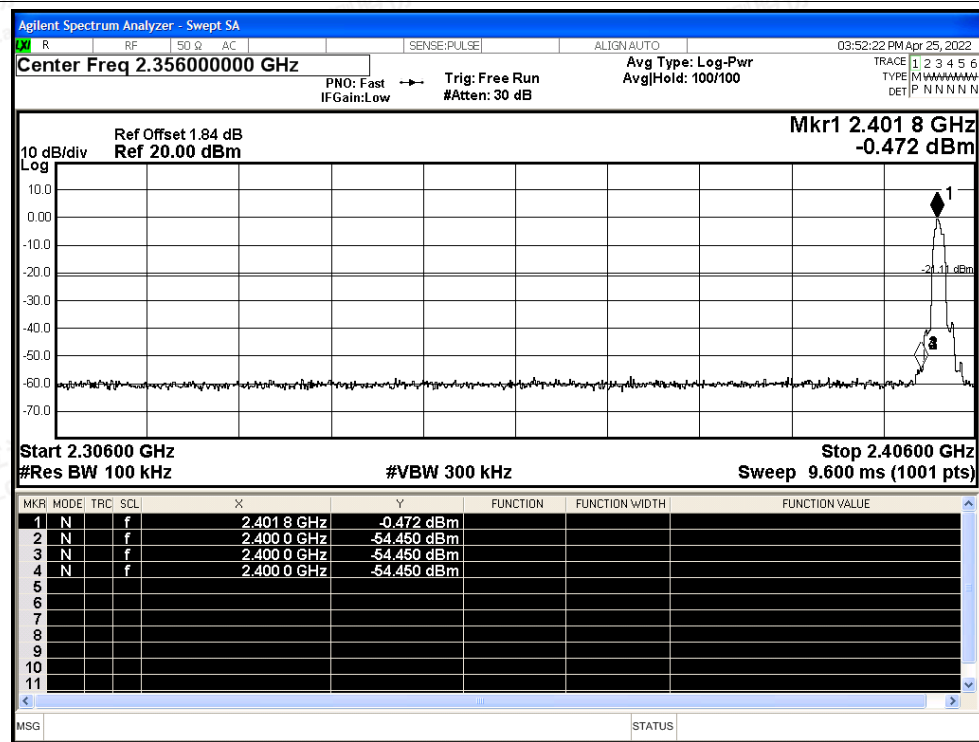




Band Edge NVNT 3-DH5 2480MHz Ant No-Hopping Ref

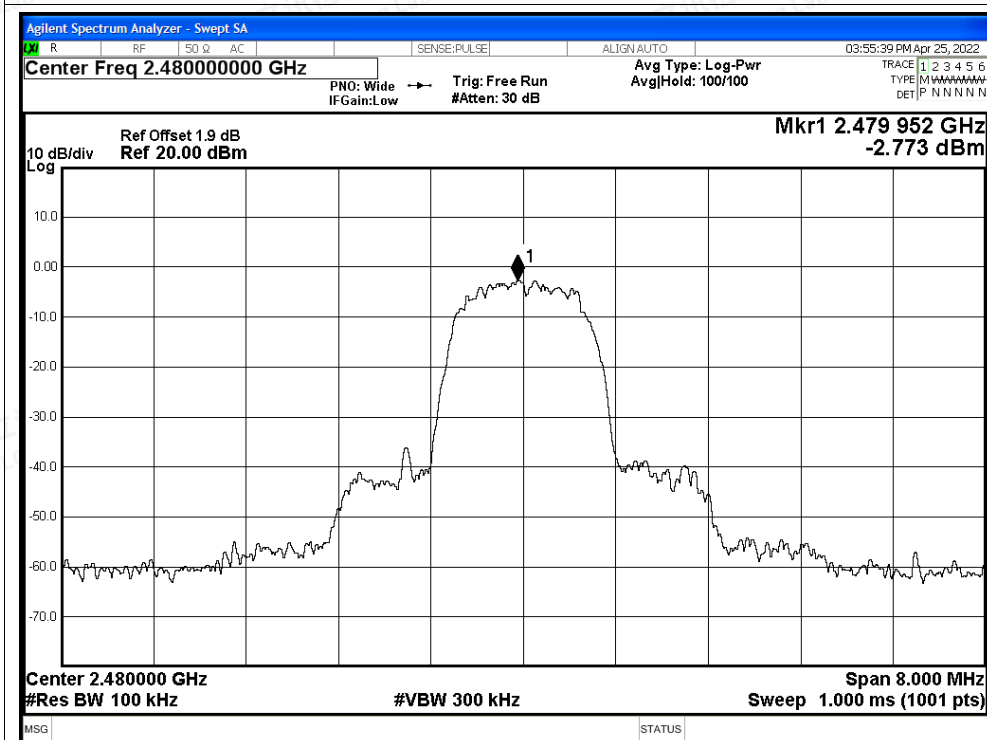

Band Edge NVNT 3-DH5 2480MHz Ant No-Hopping Emission

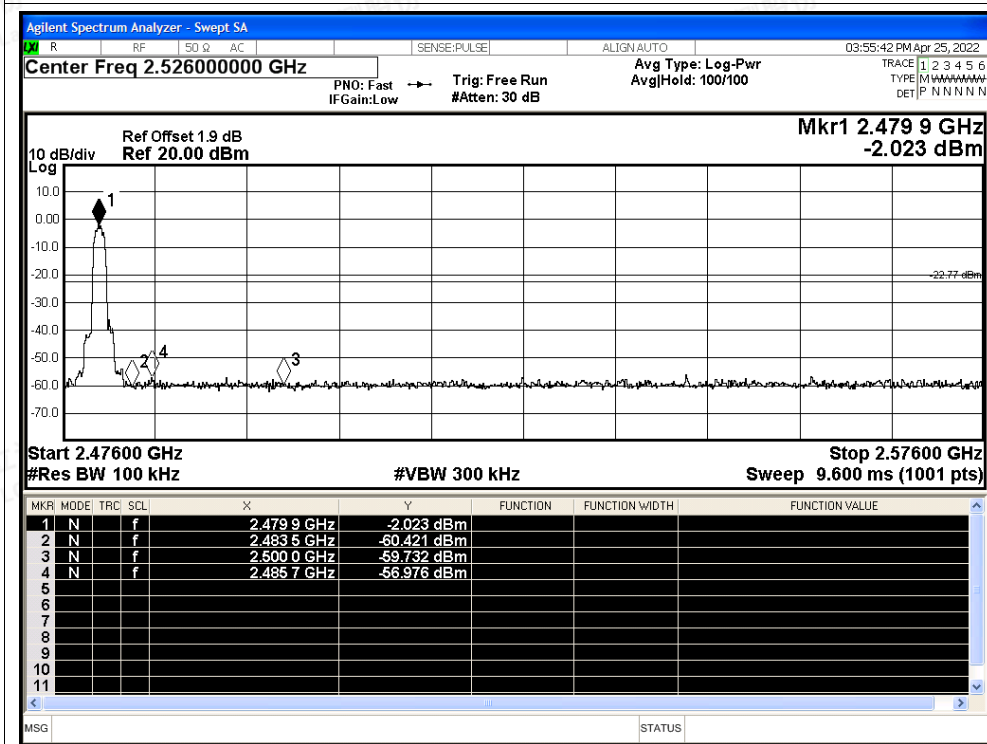



(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant	Hopping	-57.69	-20	Pass
NVNT	1-DH5	2480	Ant	Hopping	-57.74	-20	Pass
NVNT	2-DH5	2402	Ant	Hopping	-55.56	-20	Pass
NVNT	2-DH5	2480	Ant	Hopping	-57.26	-20	Pass
NVNT	3-DH5	2402	Ant	Hopping	-52.69	-20	Pass
NVNT	3-DH5	2480	Ant	Hopping	-56.79	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant Hopping Ref

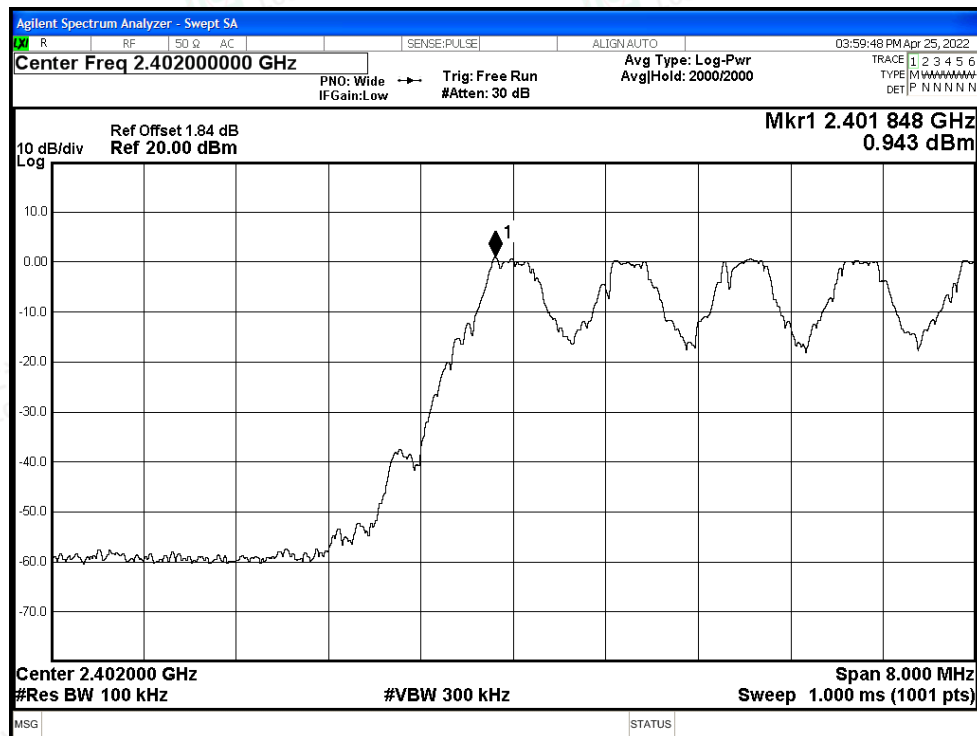

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant Hopping Emission

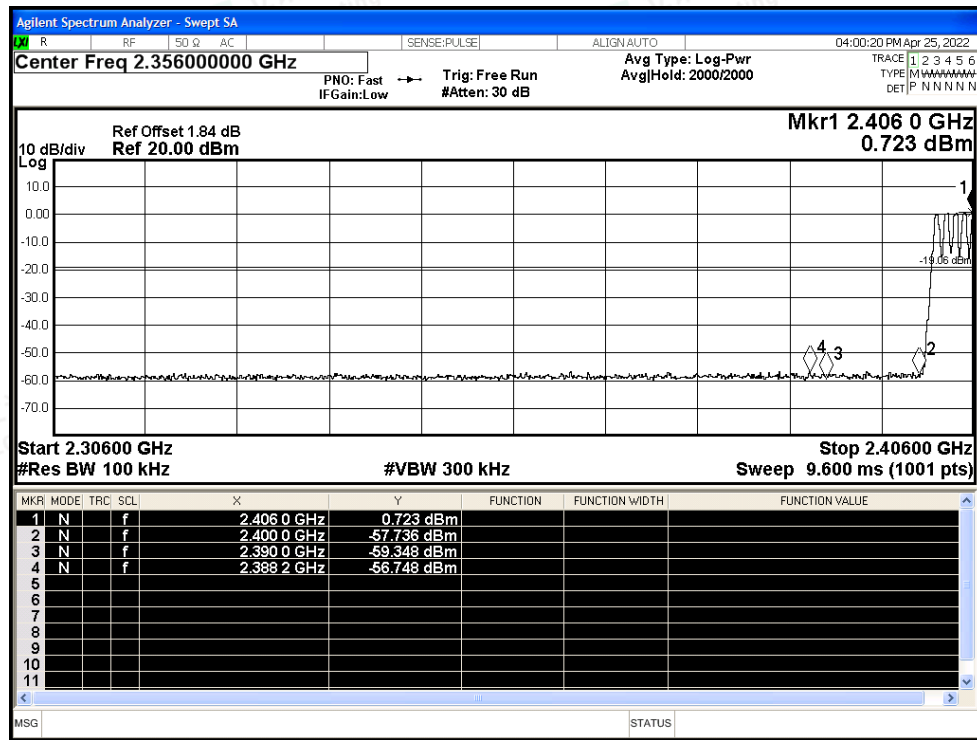

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant Hopping Ref

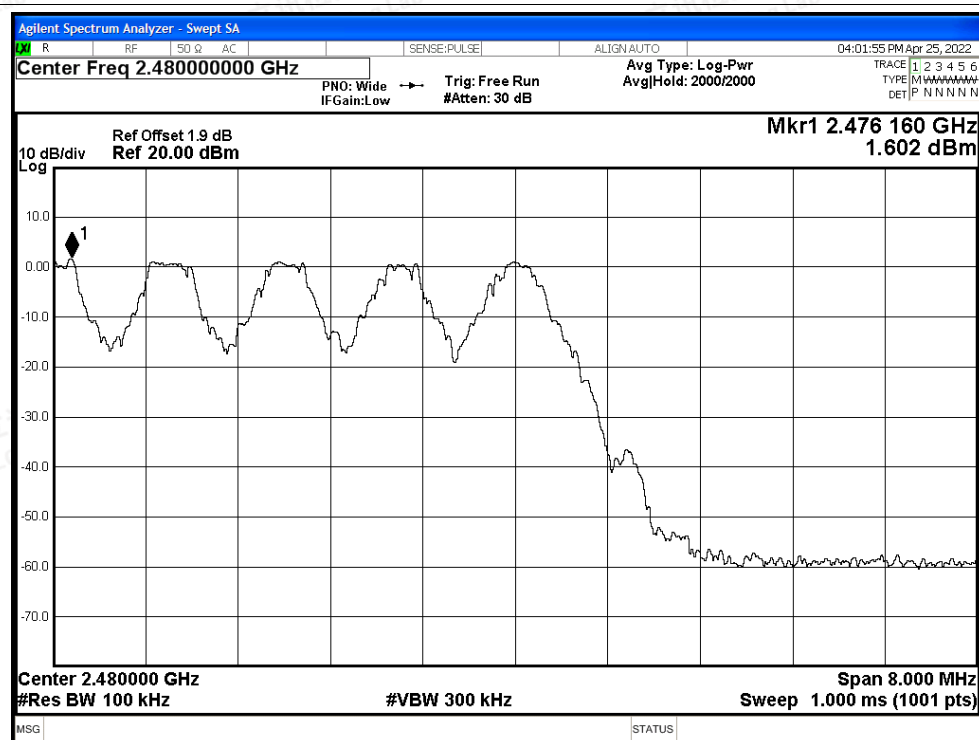

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant Hopping Emission

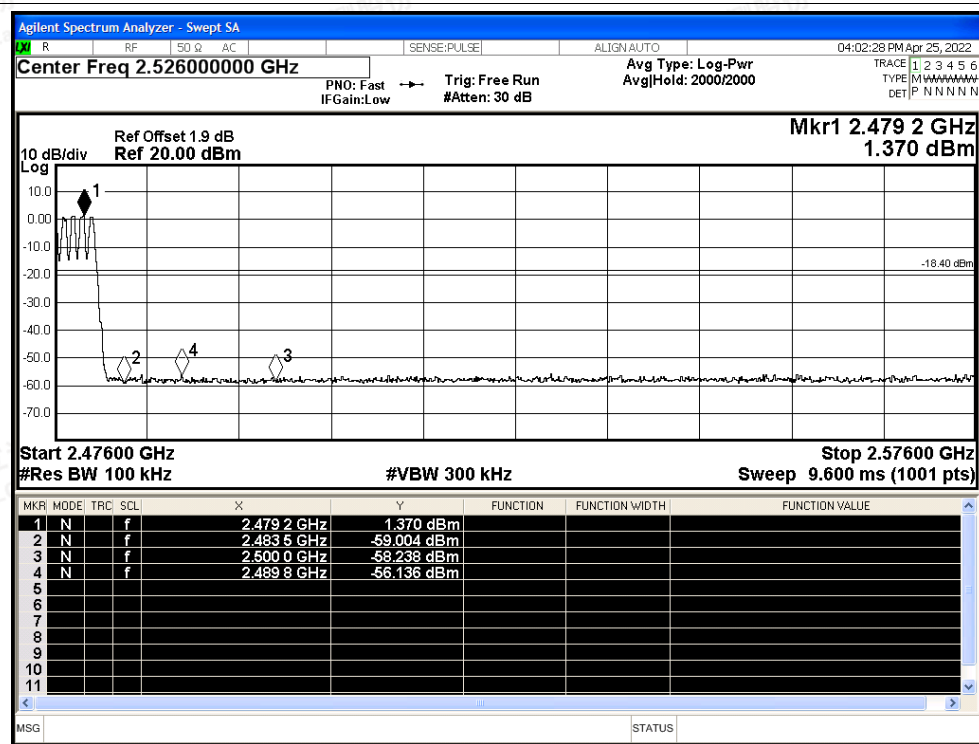

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant Hopping Emission

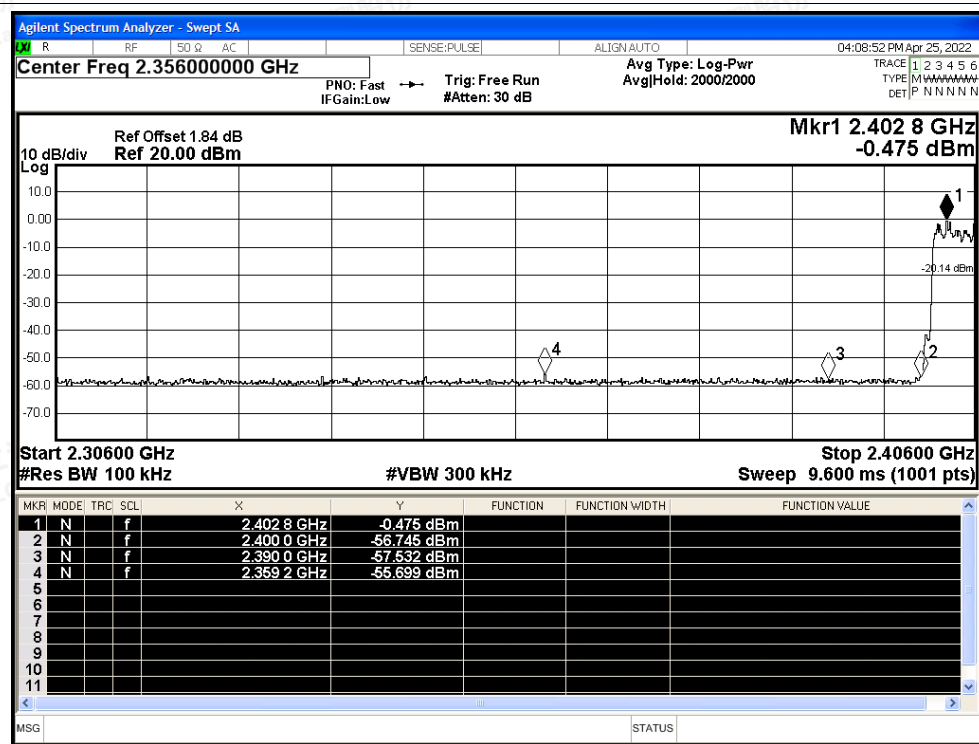




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant Hopping Ref

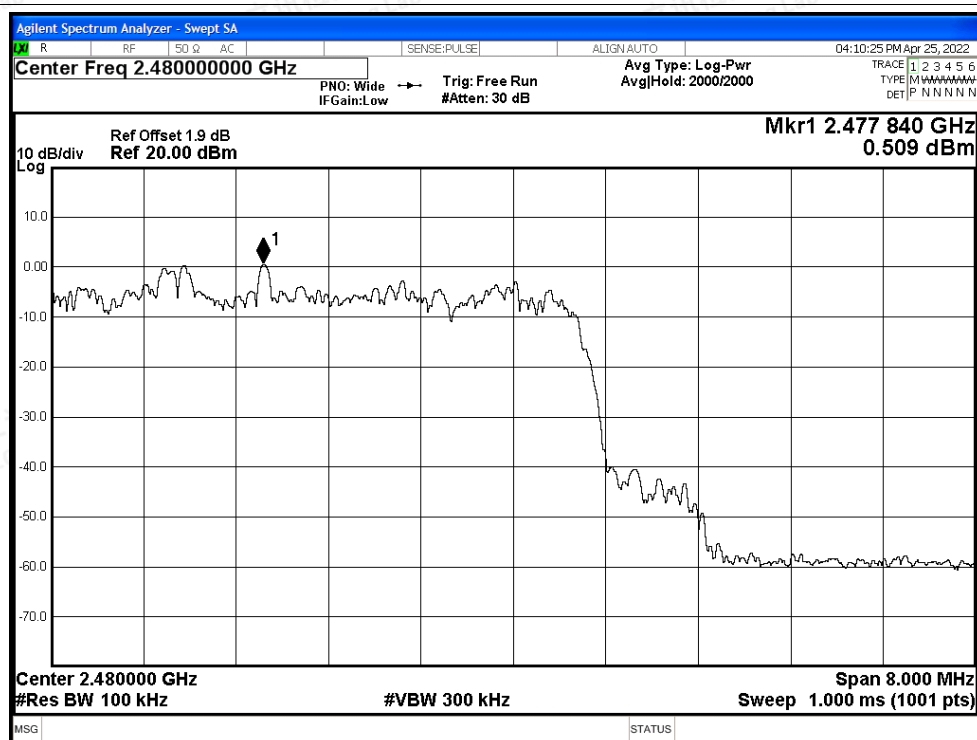


Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant Hopping Emission

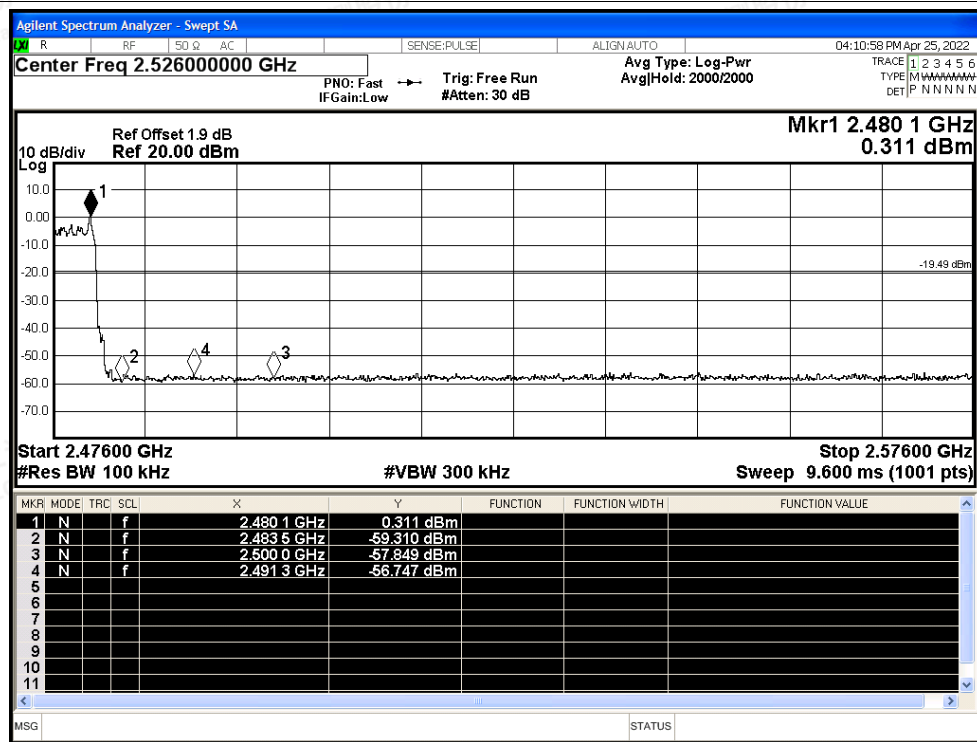




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant Hopping Ref

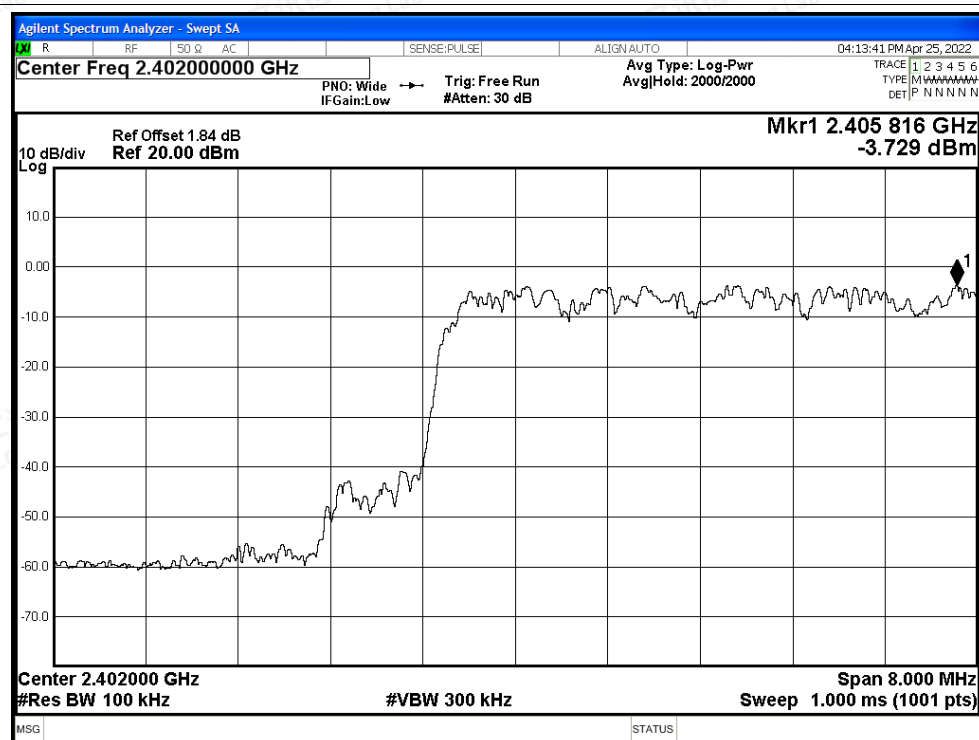

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant Hopping Emission

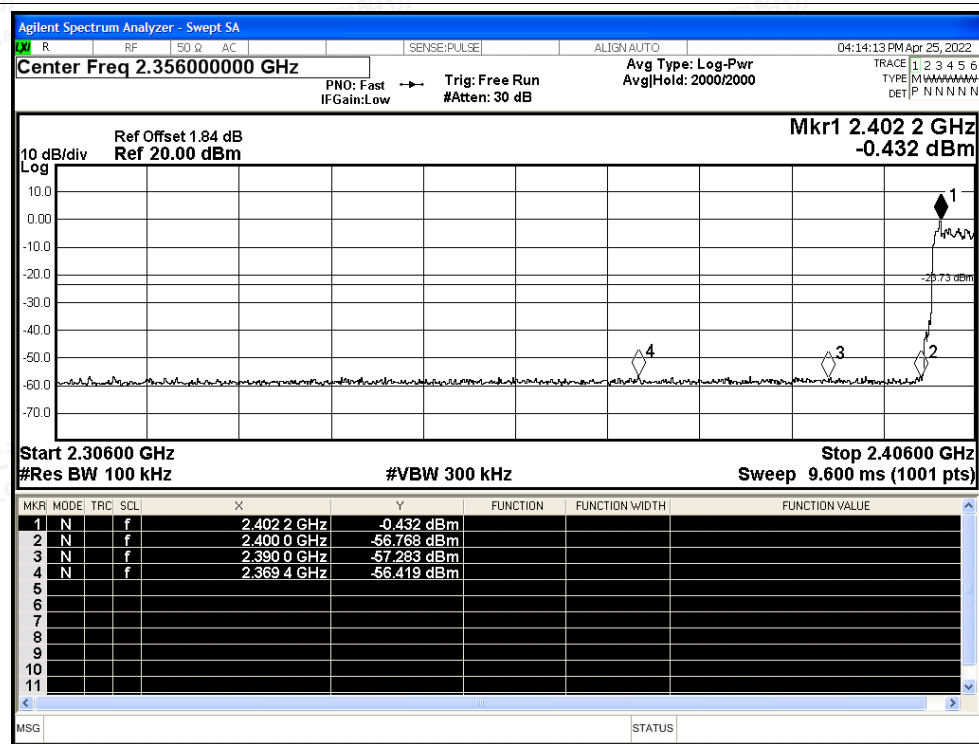

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant Hopping Ref

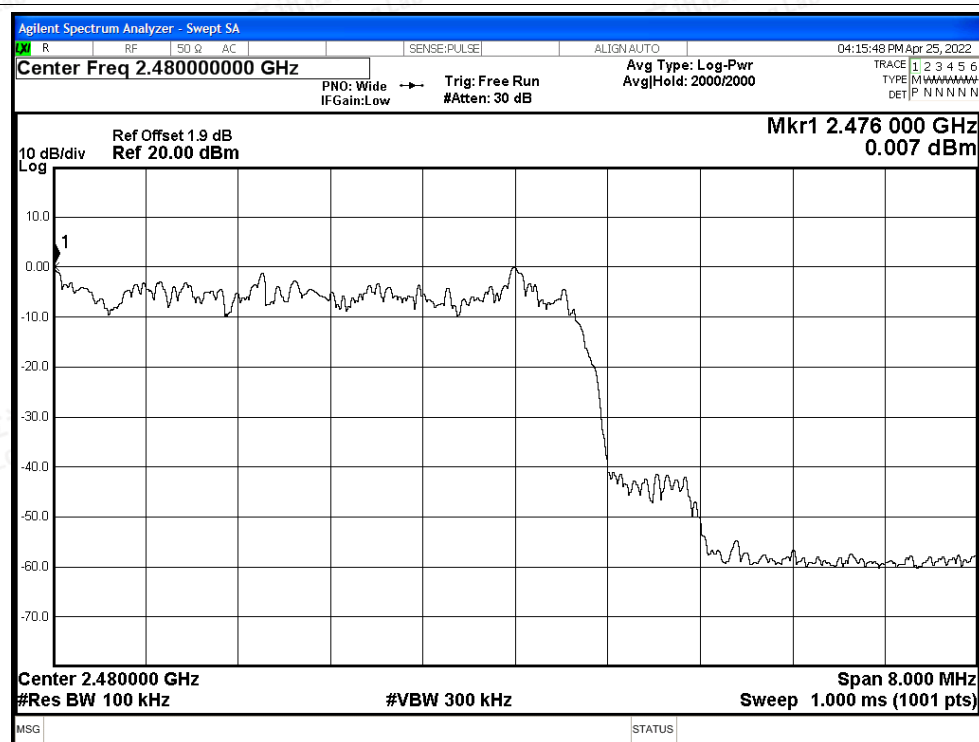

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant Hopping Emission

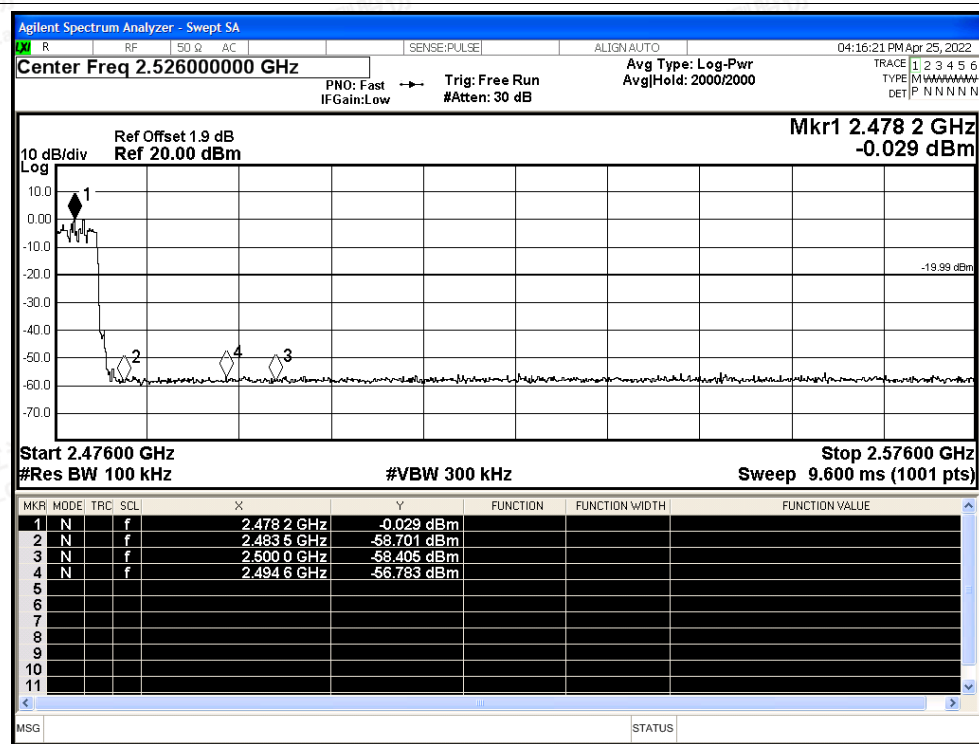



A.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant	-56.13	-20	Pass
NVNT	1-DH5	2441	Ant	-56.81	-20	Pass
NVNT	1-DH5	2480	Ant	-55.6	-20	Pass
NVNT	2-DH5	2402	Ant	-53.33	-20	Pass
NVNT	2-DH5	2441	Ant	-56.73	-20	Pass
NVNT	2-DH5	2480	Ant	-56.49	-20	Pass
NVNT	3-DH5	2402	Ant	-46.77	-20	Pass
NVNT	3-DH5	2441	Ant	-56.02	-20	Pass
NVNT	3-DH5	2480	Ant	-56.44	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant Ref

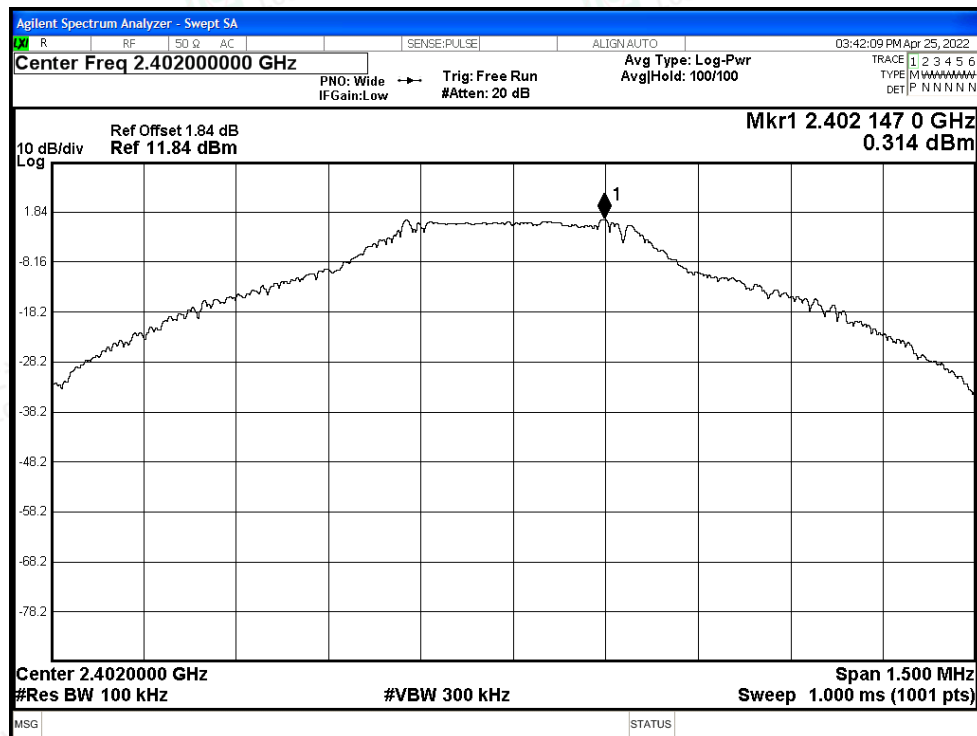


Tx. Spurious NVNT 1-DH5 2402MHz Ant Emission

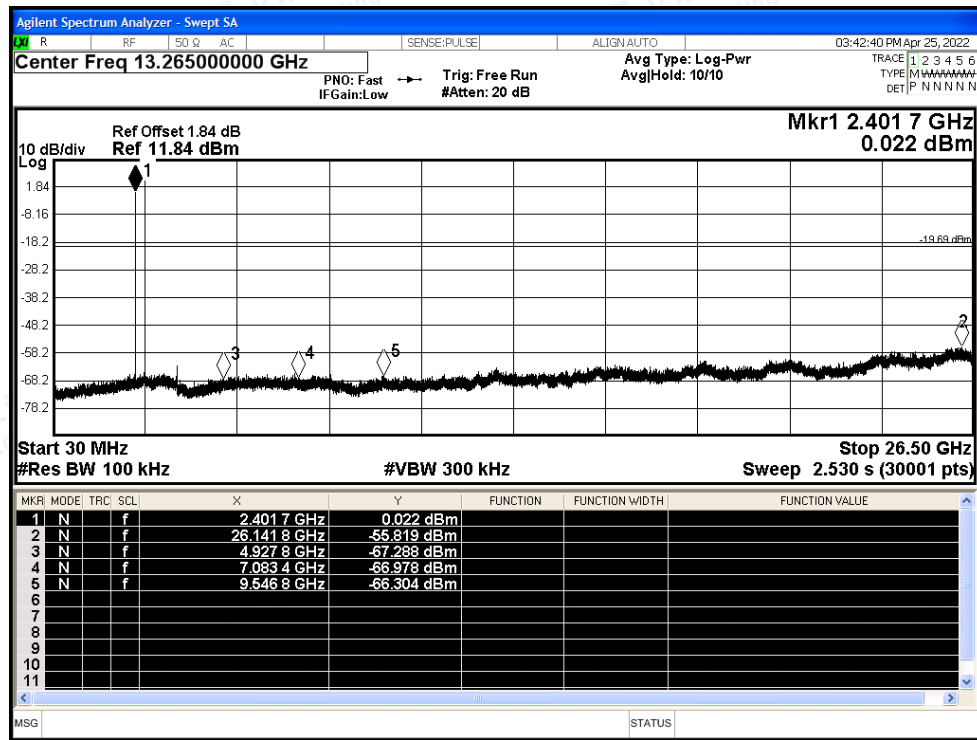




Tx. Spurious NVNT 1-DH5 2441MHz Ant Ref

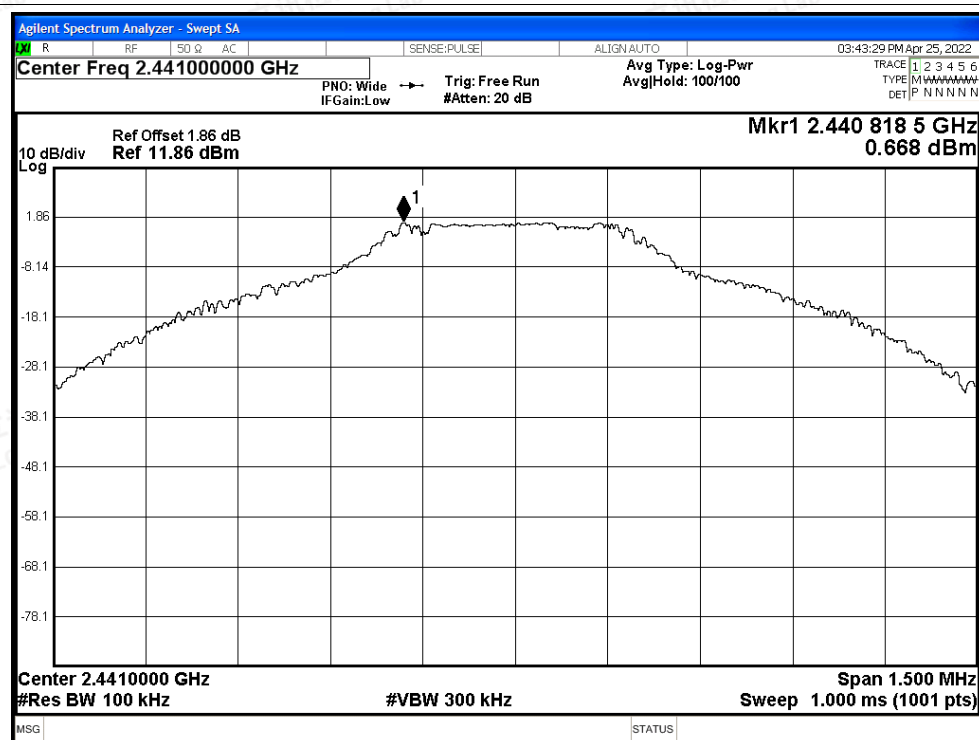


Tx. Spurious NVNT 1-DH5 2441MHz Ant Emission

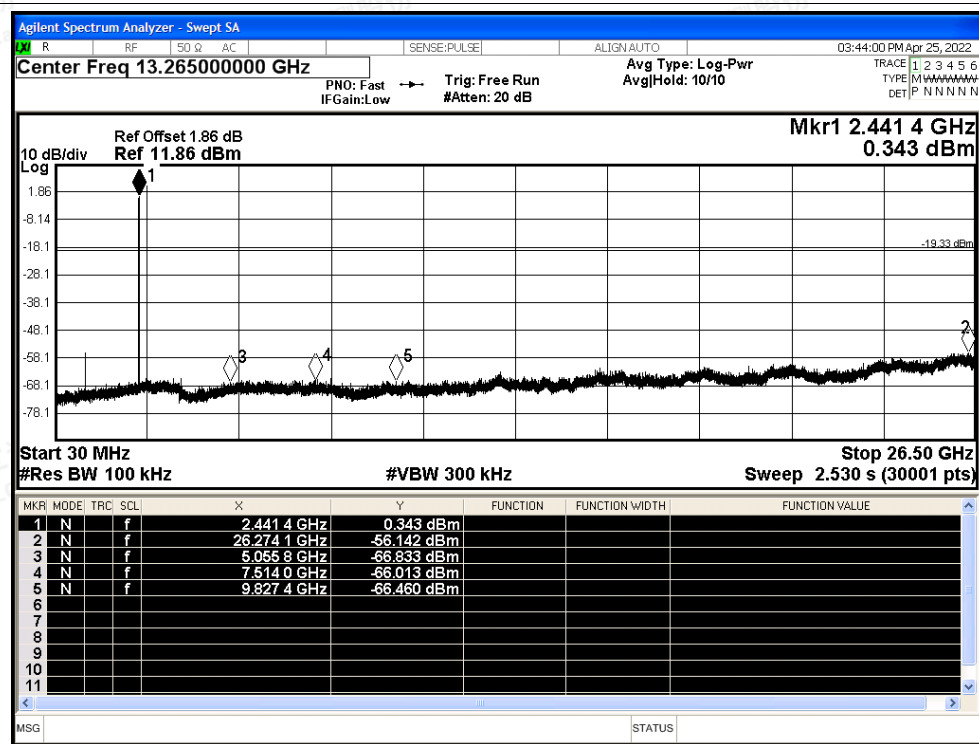




Tx. Spurious NVNT 1-DH5 2480MHz Ant Ref

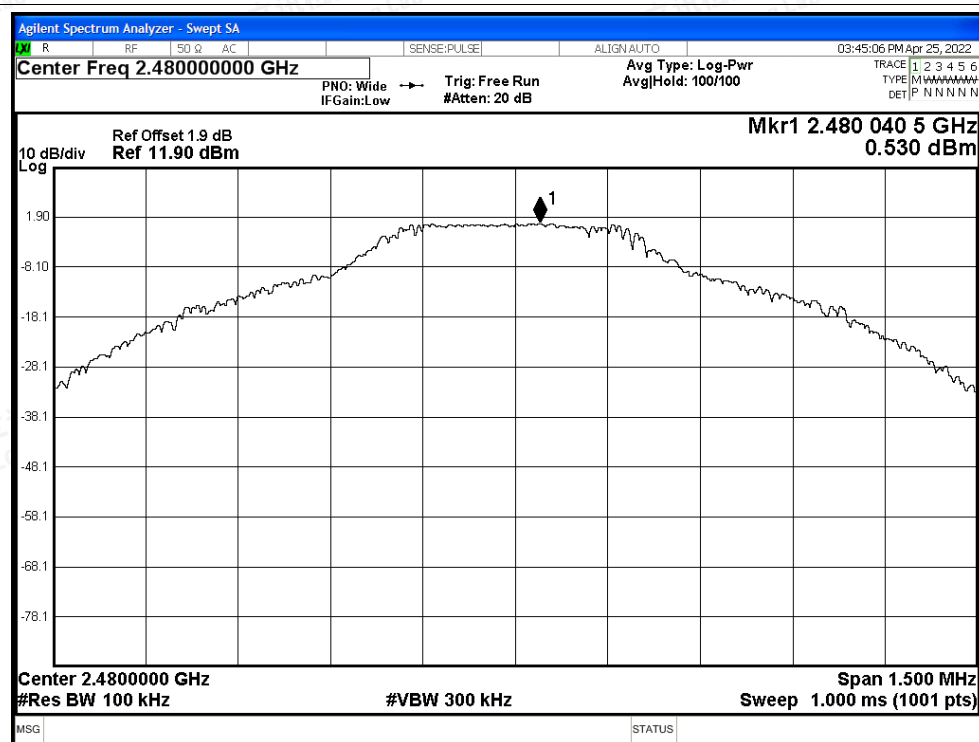


Tx. Spurious NVNT 1-DH5 2480MHz Ant Emission

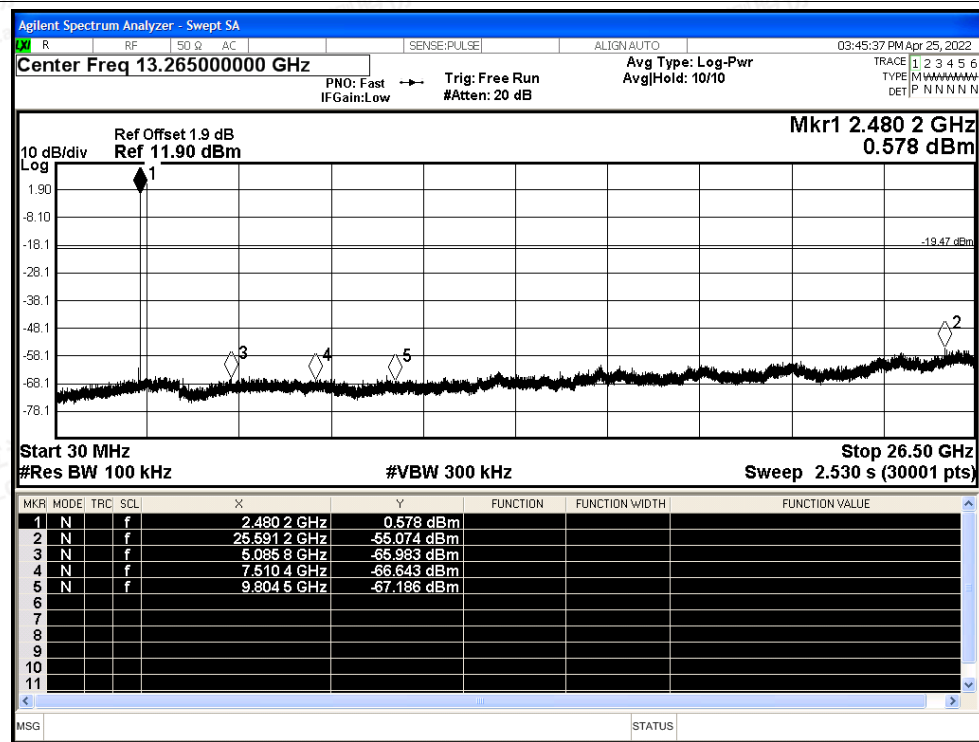




Tx. Spurious NVNT 2-DH5 2402MHz Ant Ref

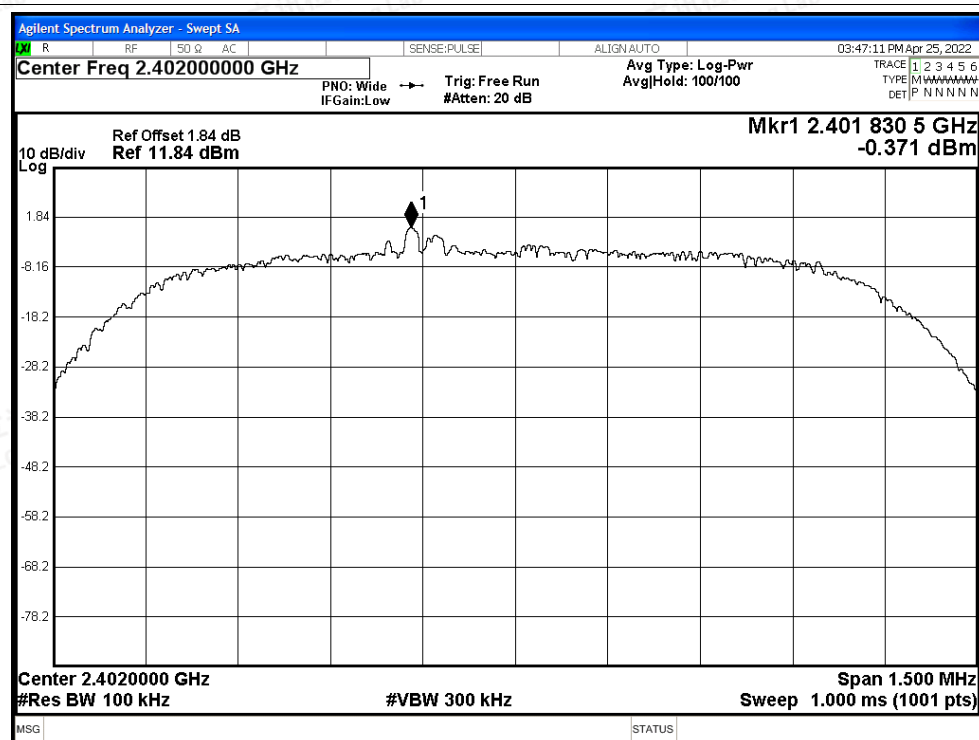


Tx. Spurious NVNT 2-DH5 2402MHz Ant Emission

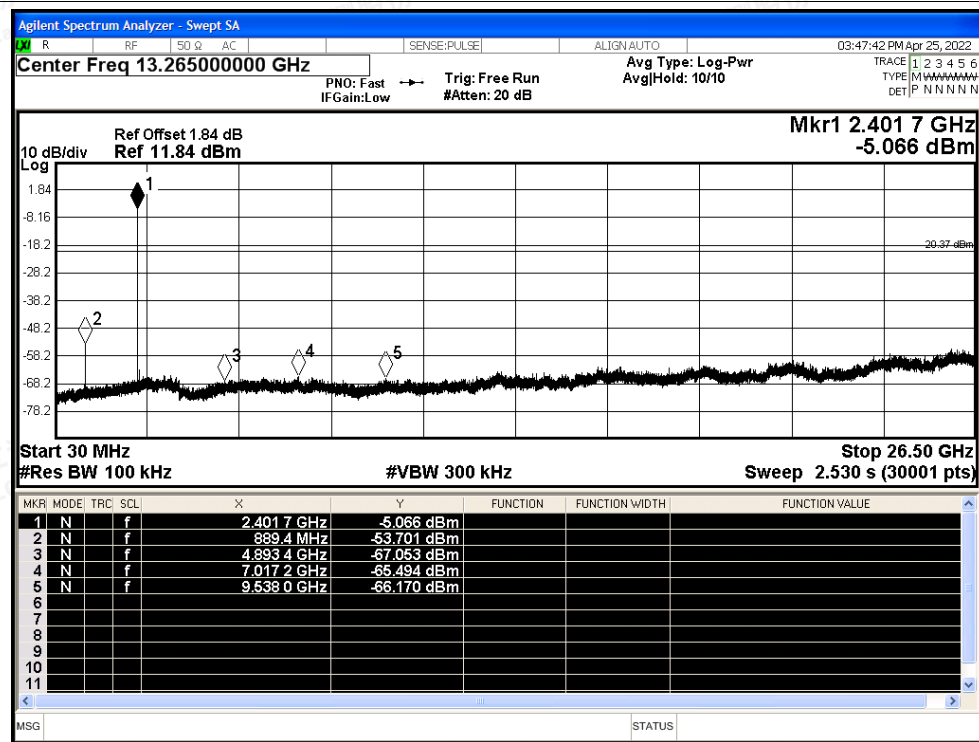




Tx. Spurious NVNT 2-DH5 2441MHz Ant Ref

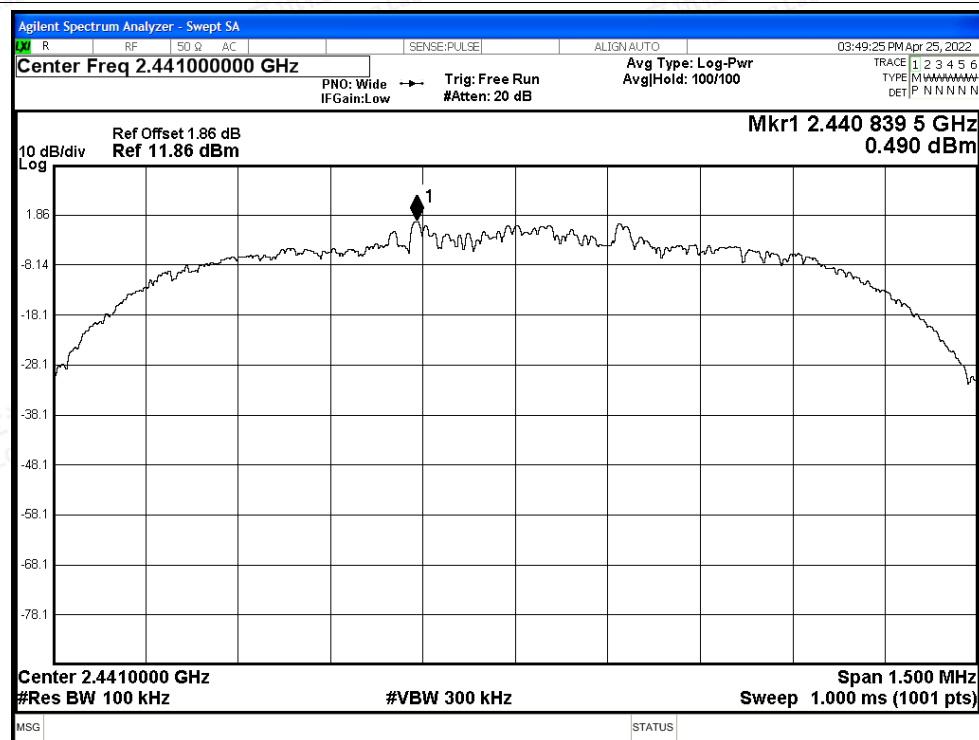


Tx. Spurious NVNT 2-DH5 2441MHz Ant Emission

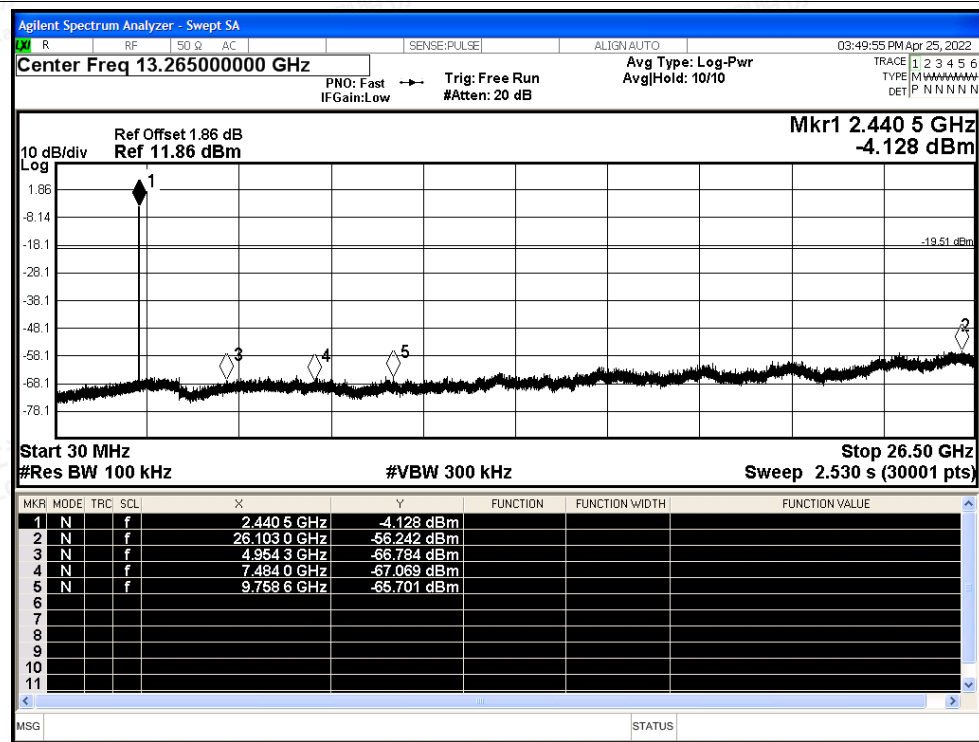




Tx. Spurious NVNT 2-DH5 2480MHz Ant Ref

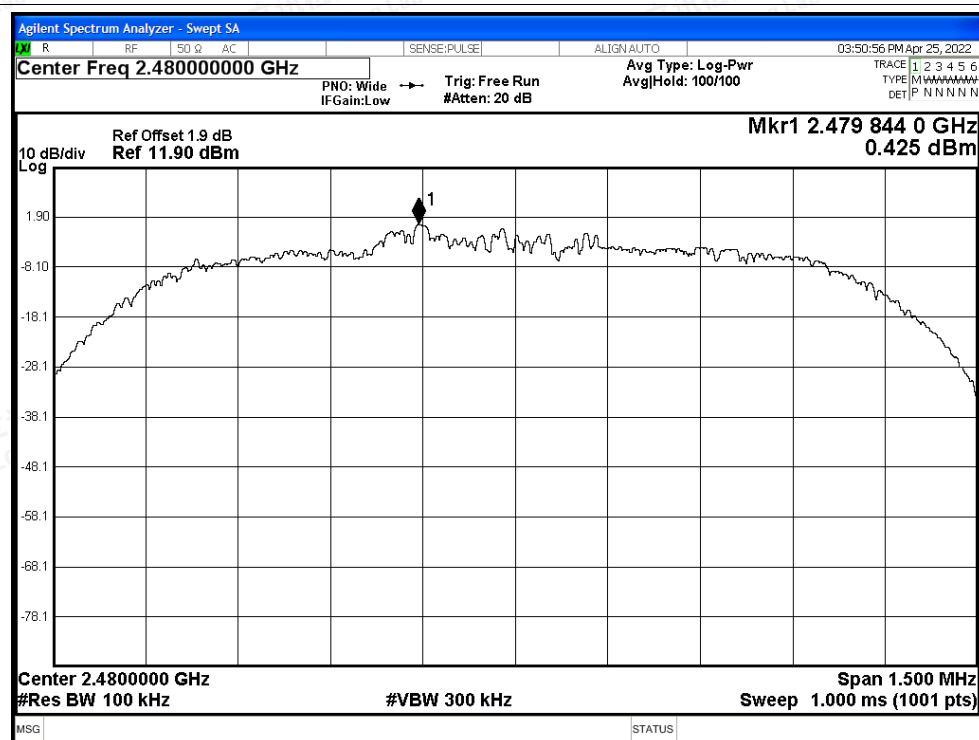


Tx. Spurious NVNT 2-DH5 2480MHz Ant Emission

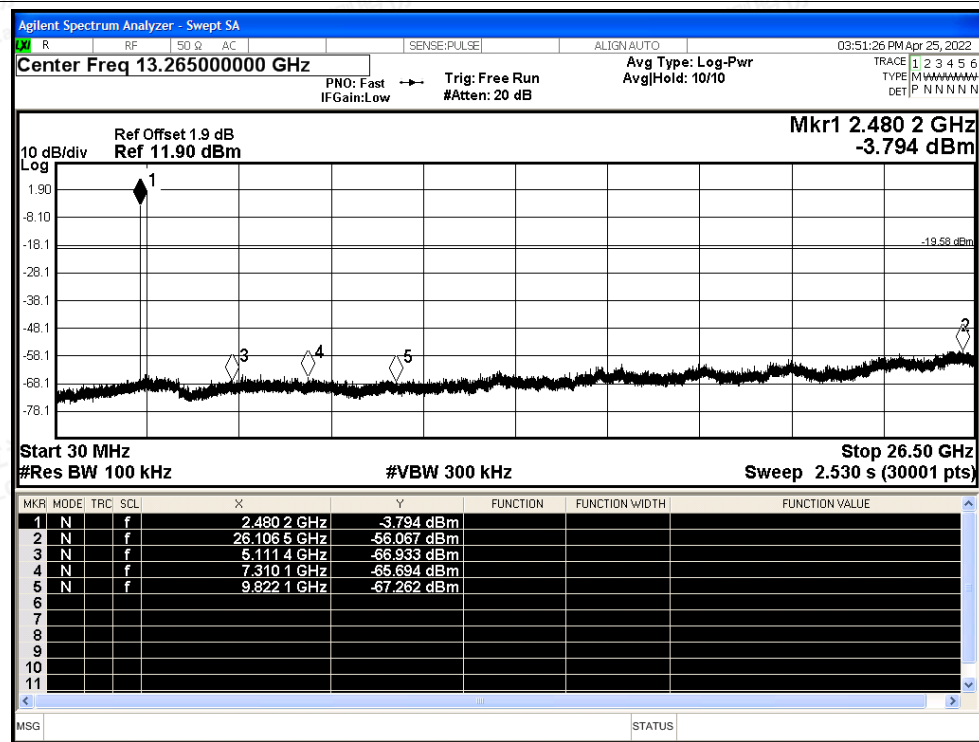




Tx. Spurious NVNT 3-DH5 2402MHz Ant Ref

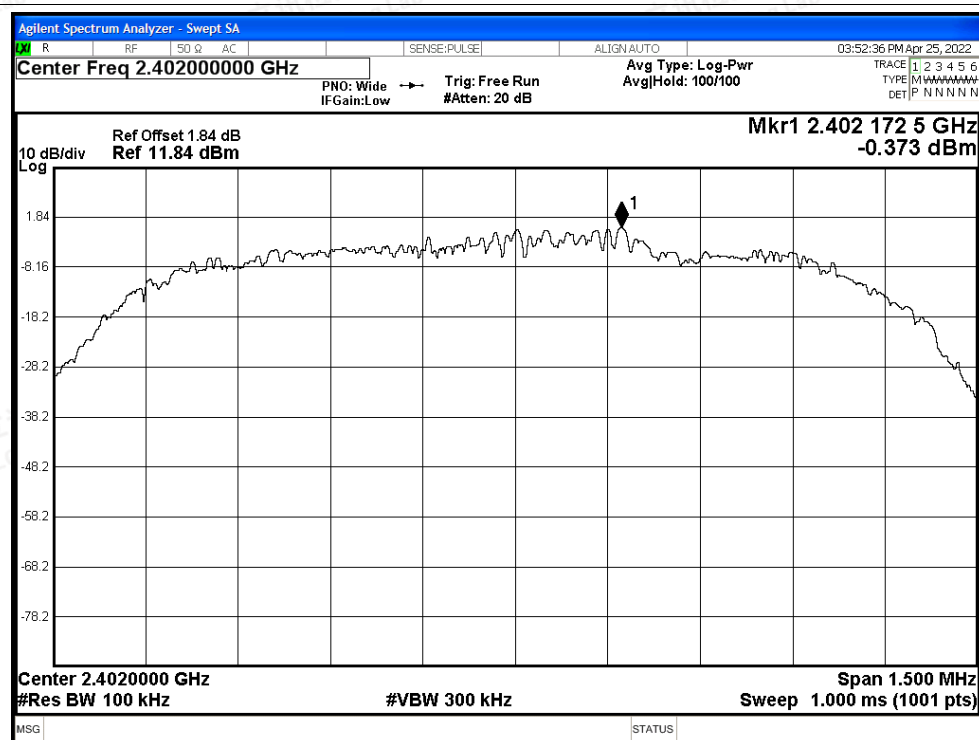


Tx. Spurious NVNT 3-DH5 2402MHz Ant Emission

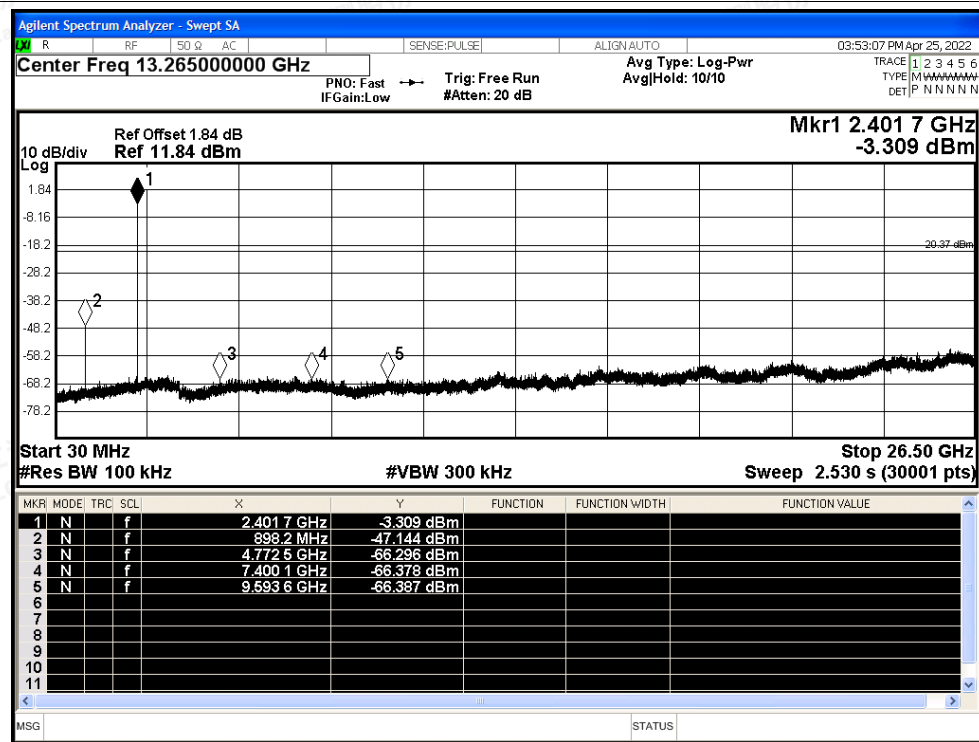




Tx. Spurious NVNT 3-DH5 2441MHz Ant Ref

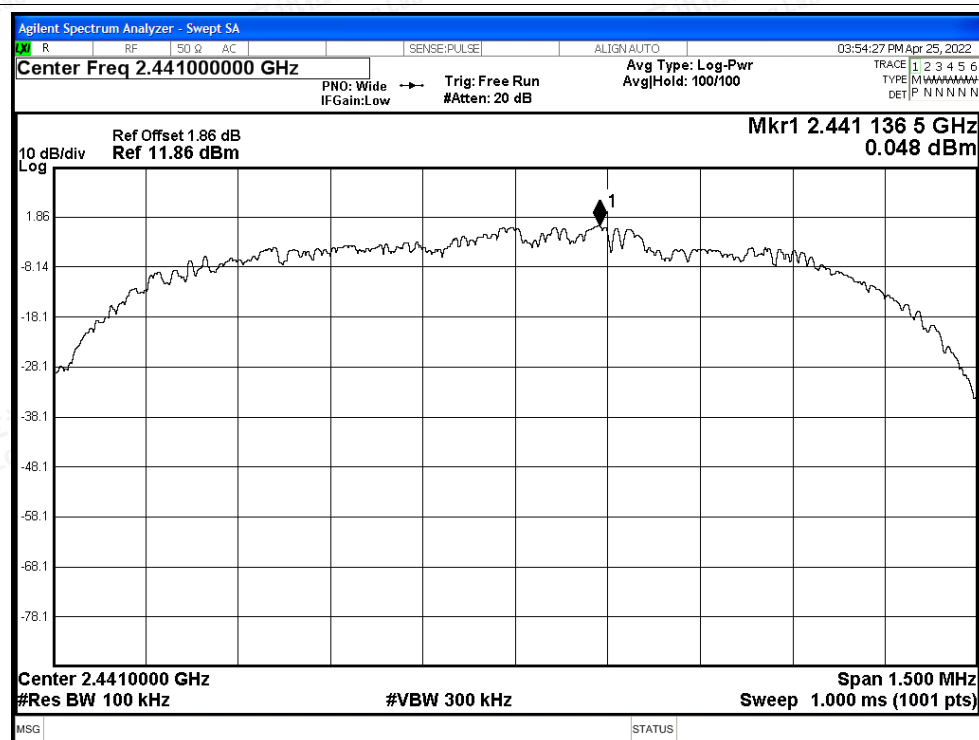


Tx. Spurious NVNT 3-DH5 2441MHz Ant Emission

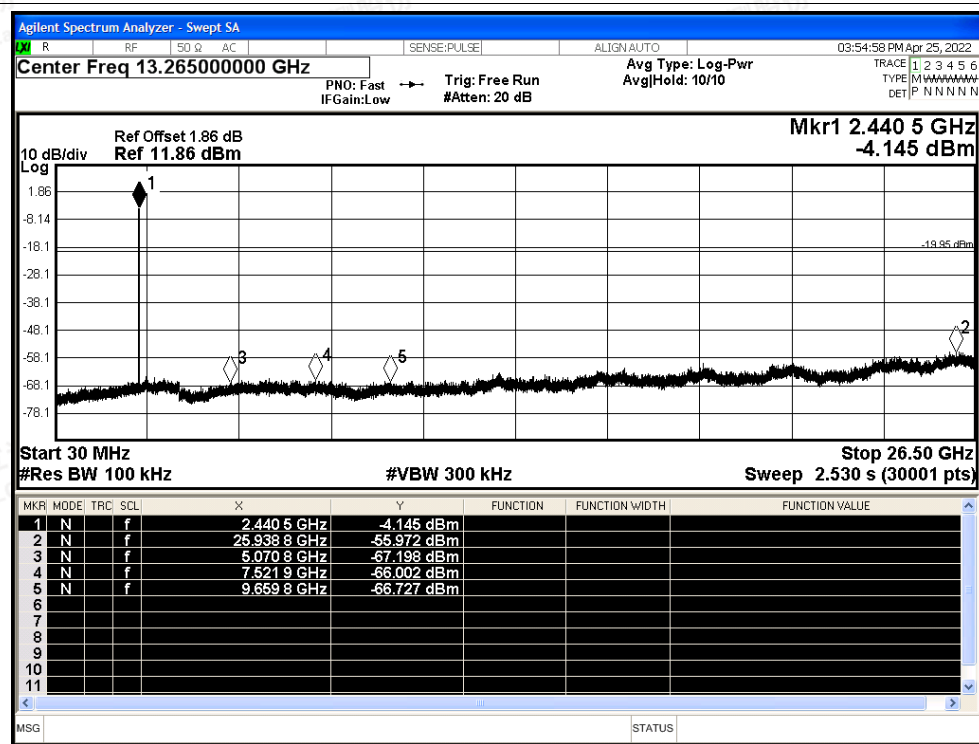




Tx. Spurious NVNT 3-DH5 2480MHz Ant Ref

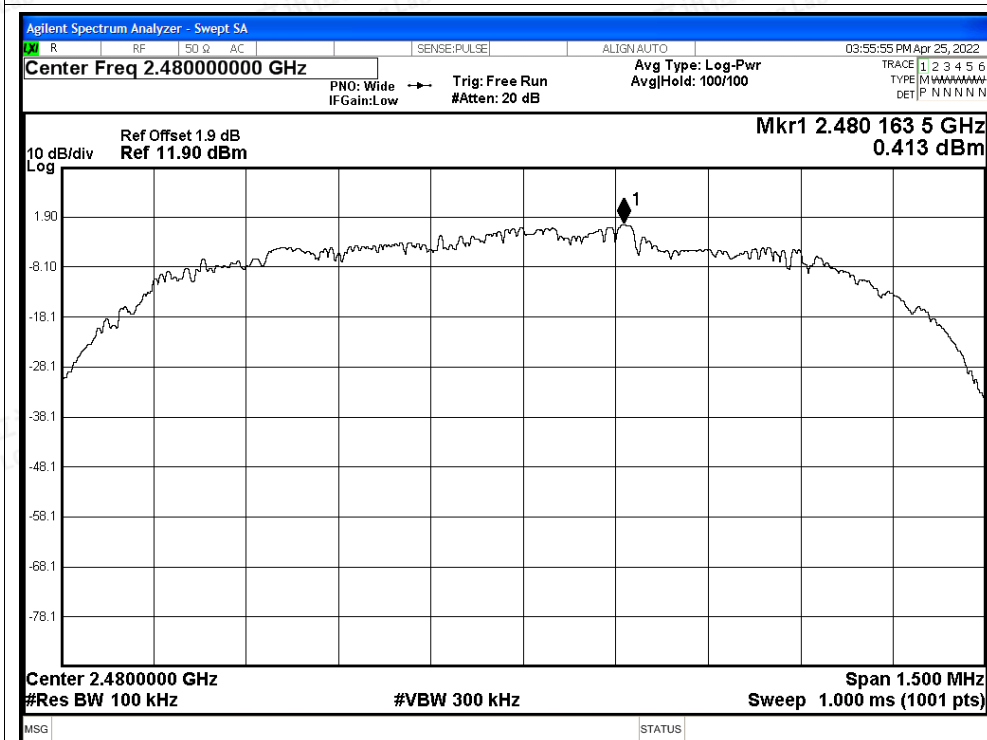

Tx. Spurious NVNT 3-DH5 2480MHz Ant Emission

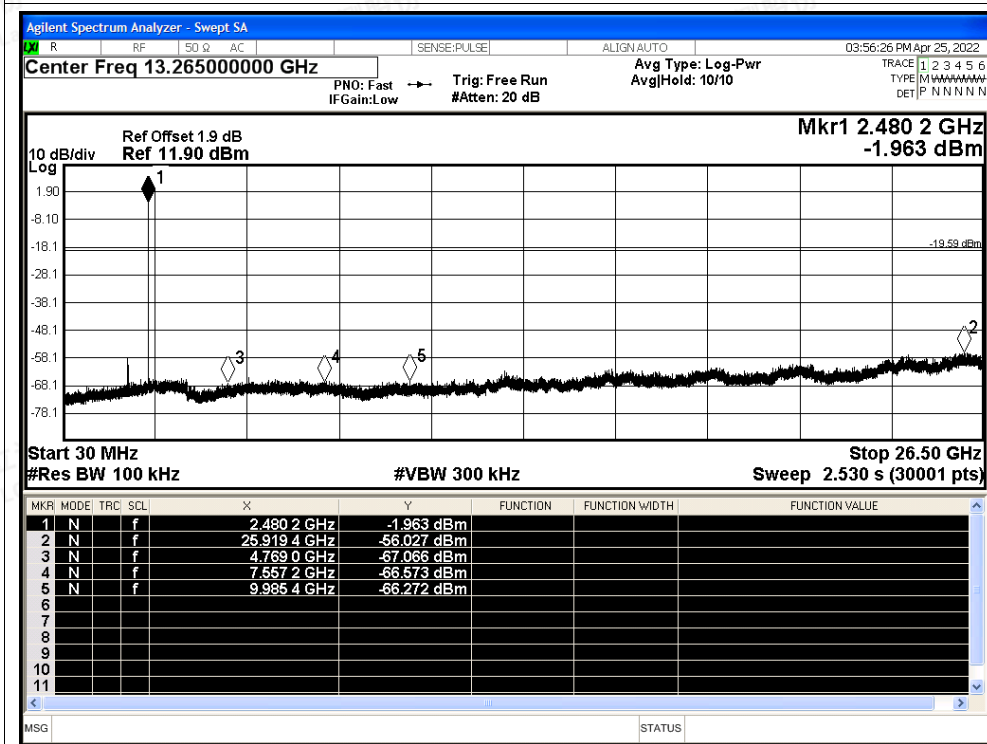



A.8 Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant	No-Hopping	2310	-51.27	2	45.99	Peak	74	Pass
NVNT	1-DH5	2402	Ant	No-Hopping	2310	-60.78	2	36.48	Average	54	Pass
NVNT	1-DH5	2402	Ant	No-Hopping	2383.44	-47.65	2	49.61	Peak	74	Pass
NVNT	1-DH5	2402	Ant	No-Hopping	2385.648	-60.24	2	37.02	Average	54	Pass
NVNT	1-DH5	2402	Ant	No-Hopping	2390	-50.64	2	46.62	Peak	74	Pass
NVNT	1-DH5	2402	Ant	No-Hopping	2390	-60.35	2	36.91	Average	54	Pass
NVNT	1-DH5	2480	Ant	No-Hopping	2483.5	-49.54	2	47.72	Peak	74	Pass
NVNT	1-DH5	2480	Ant	No-Hopping	2483.5	-59.9	2	37.36	Average	54	Pass
NVNT	1-DH5	2480	Ant	No-Hopping	2490.064	-47.9	2	49.36	Peak	74	Pass
NVNT	1-DH5	2480	Ant	No-Hopping	2484.568	-59.73	2	37.53	Average	54	Pass
NVNT	1-DH5	2480	Ant	No-Hopping	2500	-52.19	2	45.07	Peak	74	Pass
NVNT	1-DH5	2480	Ant	No-Hopping	2500	-60.09	2	37.17	Average	54	Pass
NVNT	2-DH5	2402	Ant	No-Hopping	2310	-50.6	2	46.66	Peak	74	Pass
NVNT	2-DH5	2402	Ant	No-Hopping	2310	-60.84	2	36.42	Average	54	Pass
NVNT	2-DH5	2402	Ant	No-Hopping	2373.072	-47.69	2	49.57	Peak	74	Pass
NVNT	2-DH5	2402	Ant	No-Hopping	2389.872	-60.13	2	37.13	Average	54	Pass
NVNT	2-DH5	2402	Ant	No-Hopping	2390	-51.1	2	46.16	Peak	74	Pass
NVNT	2-DH5	2402	Ant	No-Hopping	2390	-60.38	2	36.88	Average	54	Pass
NVNT	2-DH5	2480	Ant	No-Hopping	2483.5	-49.64	2	47.62	Peak	74	Pass
NVNT	2-DH5	2480	Ant	No-Hopping	2483.5	-59.62	2	37.64	Average	54	Pass
NVNT	2-DH5	2480	Ant	No-Hopping	2493.328	-47.33	2	49.93	Peak	74	Pass
NVNT	2-DH5	2480	Ant	No-Hopping	2483.512	-59.62	2	37.64	Average	54	Pass
NVNT	2-DH5	2480	Ant	No-Hopping	2500	-50.35	2	46.91	Peak	74	Pass
NVNT	2-DH5	2480	Ant	No-Hopping	2500	-60.25	2	37.01	Average	54	Pass
NVNT	3-DH5	2402	Ant	No-Hopping	2310	-50.09	2	47.17	Peak	74	Pass
NVNT	3-DH5	2402	Ant	No-Hopping	2310	-60.76	2	36.5	Average	54	Pass
NVNT	3-DH5	2402	Ant	No-Hopping	2368.944	-47.34	2	49.92	Peak	74	Pass
NVNT	3-DH5	2402	Ant	No-Hopping	2388.528	-60.26	2	37	Average	54	Pass
NVNT	3-DH5	2402	Ant	No-Hopping	2390	-51.36	2	45.9	Peak	74	Pass
NVNT	3-DH5	2402	Ant	No-Hopping	2390	-60.45	2	36.81	Average	54	Pass
NVNT	3-DH5	2480	Ant	No-Hopping	2483.5	-50.72	2	46.54	Peak	74	Pass
NVNT	3-DH5	2480	Ant	No-Hopping	2483.5	-59.83	2	37.43	Average	54	Pass
NVNT	3-DH5	2480	Ant	No-Hopping	2493.832	-47.72	2	49.54	Peak	74	Pass
NVNT	3-DH5	2480	Ant	No-Hopping	2483.752	-59.64	2	37.62	Average	54	Pass
NVNT	3-DH5	2480	Ant	No-Hopping	2500	-49.33	2	47.93	Peak	74	Pass
NVNT	3-DH5	2480	Ant	No-Hopping	2500	-60.09	2	37.17	Average	54	Pass






Test Graphs

Restrict Band NVNT 1-DH5 2402MHz Ant No-Hopping Peak

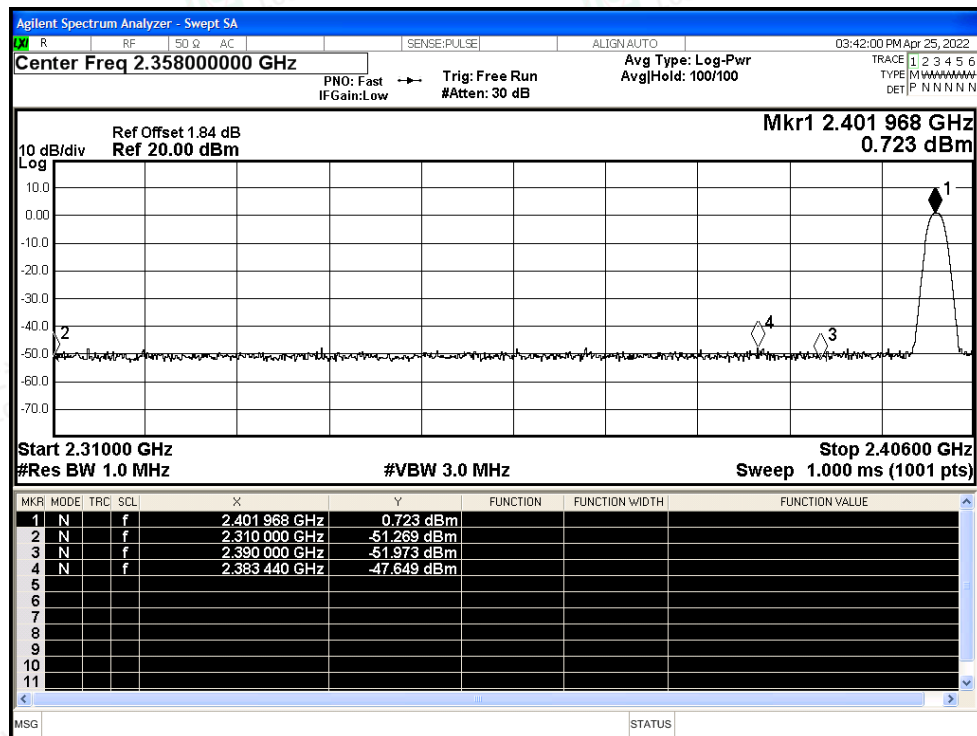

Restrict Band NVNT 1-DH5 2402MHz Ant No-Hopping Average

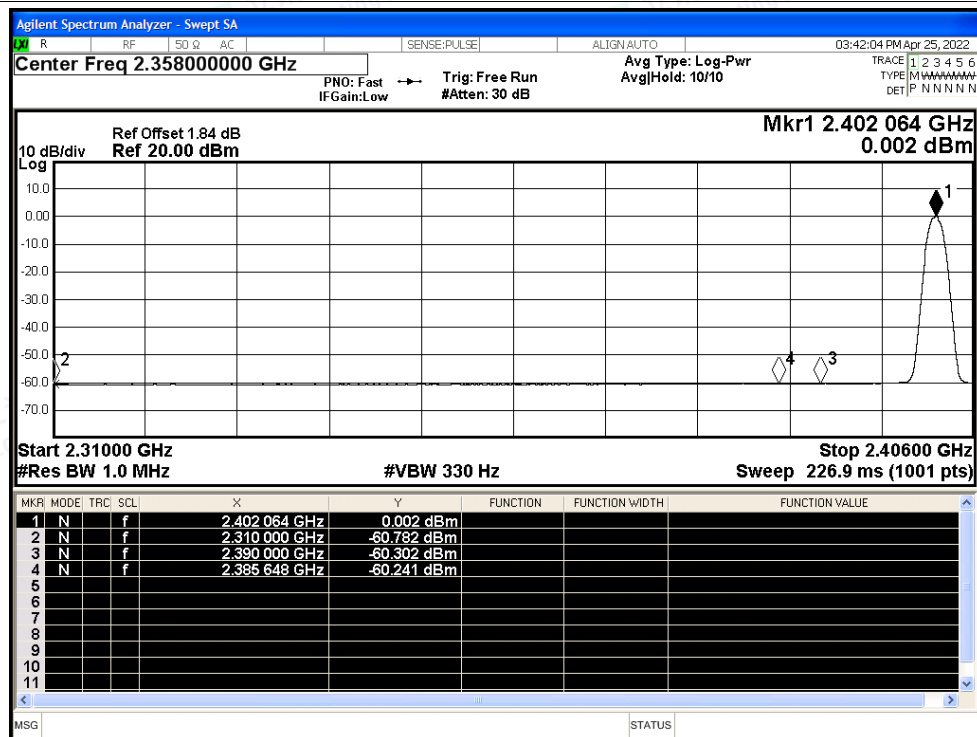

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT 1-DH5 2480MHz Ant No-Hopping Peak

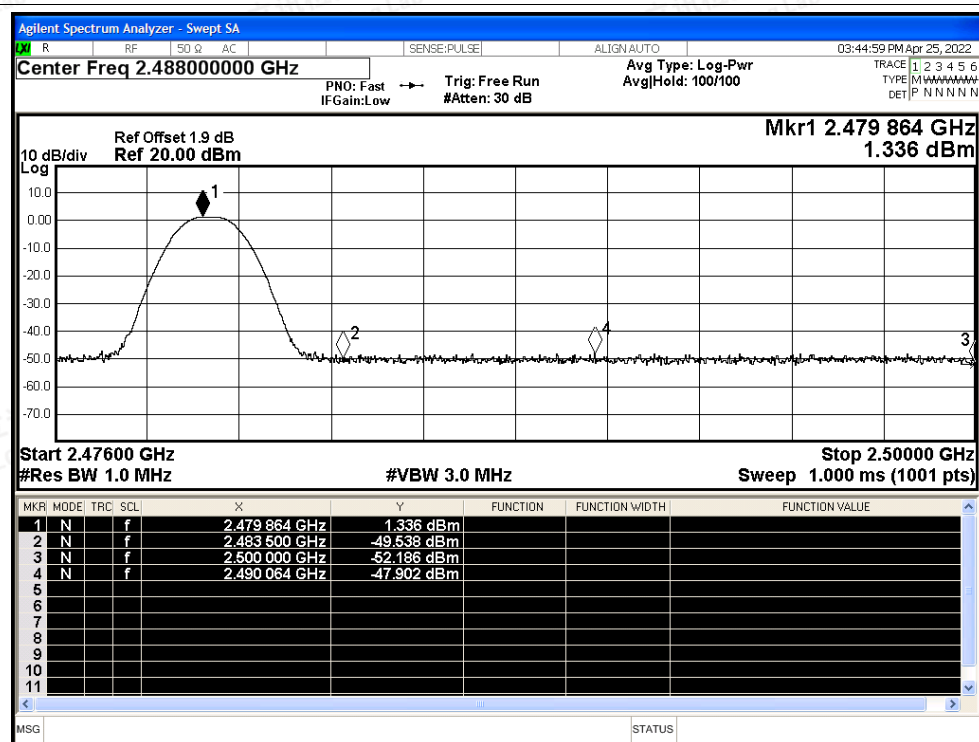


Restrict Band NVNT 1-DH5 2480MHz Ant No-Hopping Average

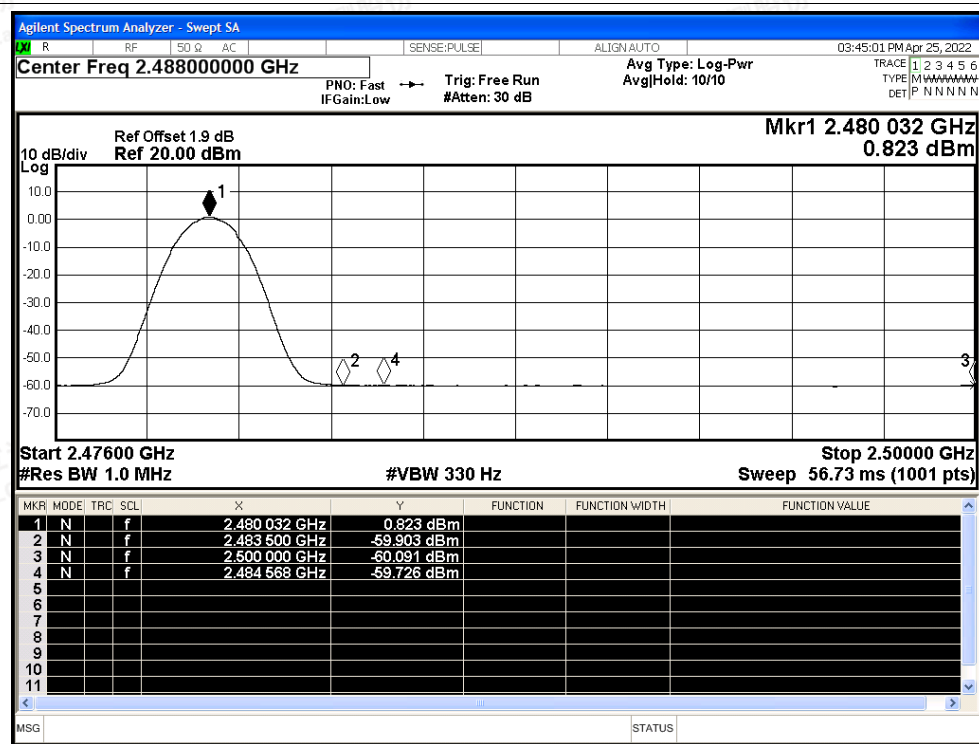




Restrict Band NVNT 2-DH5 2402MHz Ant No-Hopping Peak

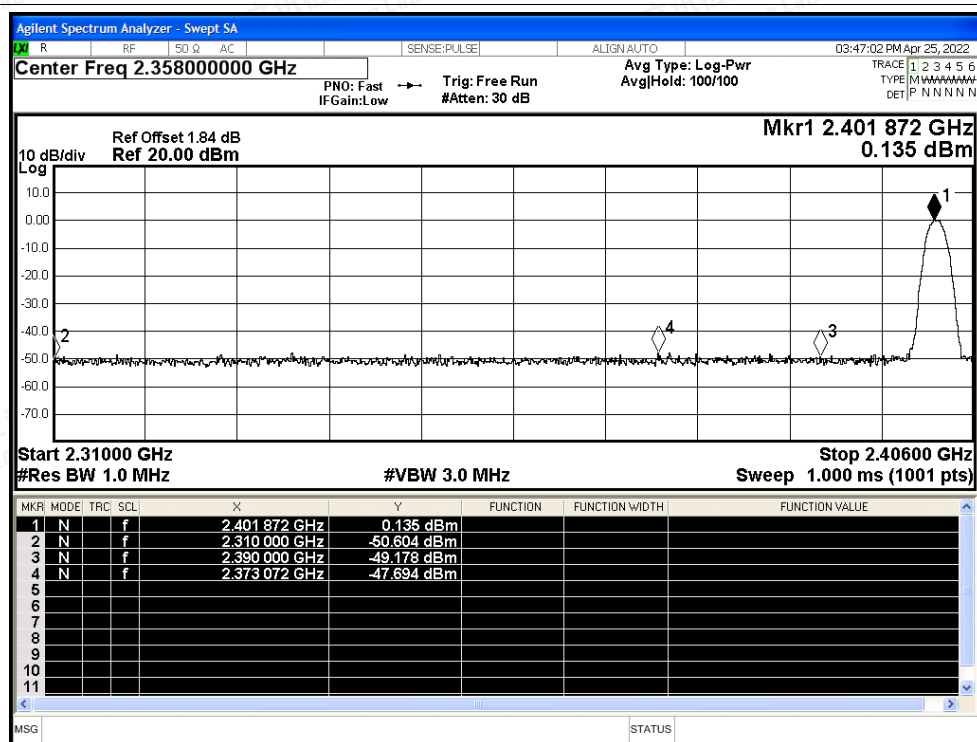


Restrict Band NVNT 2-DH5 2402MHz Ant No-Hopping Average

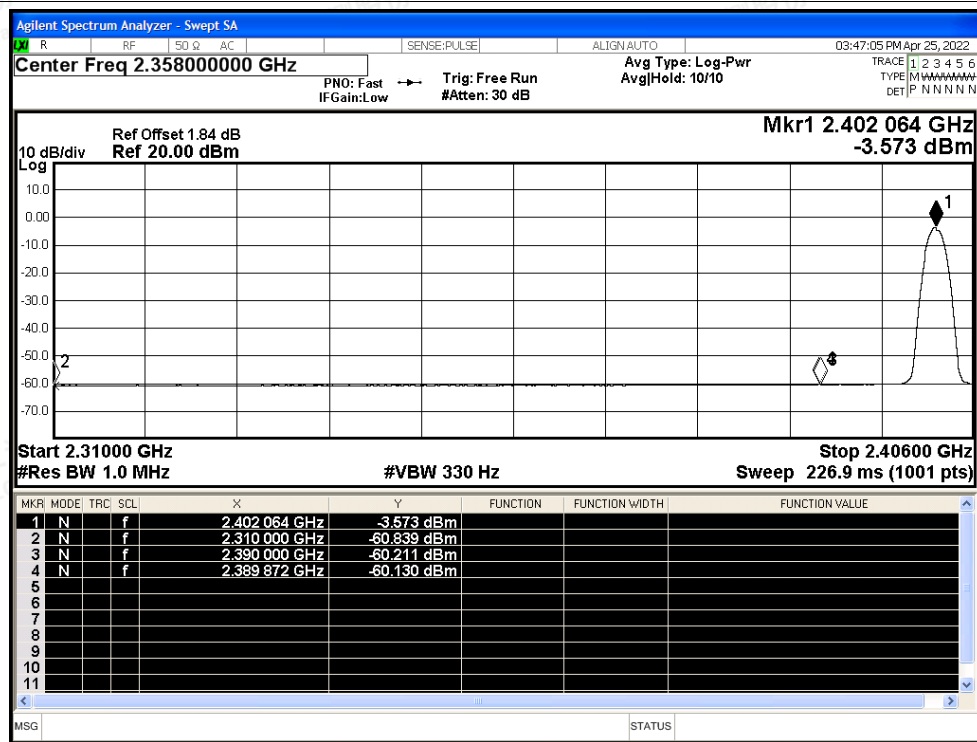




Restrict Band NVNT 2-DH5 2480MHz Ant No-Hopping Peak

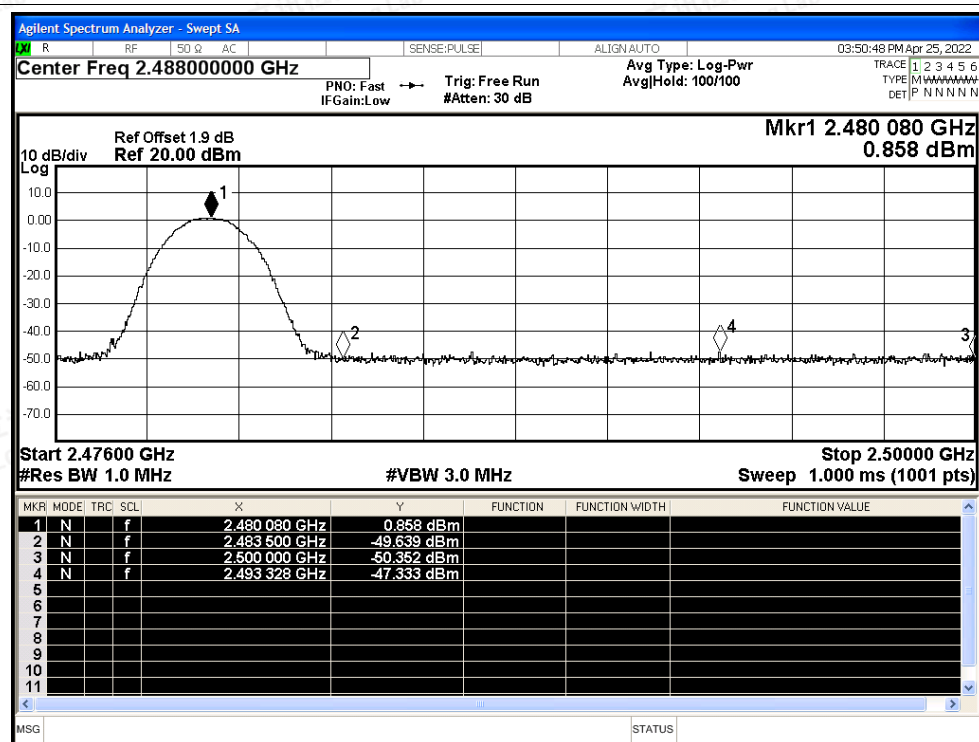


Restrict Band NVNT 2-DH5 2480MHz Ant No-Hopping Average

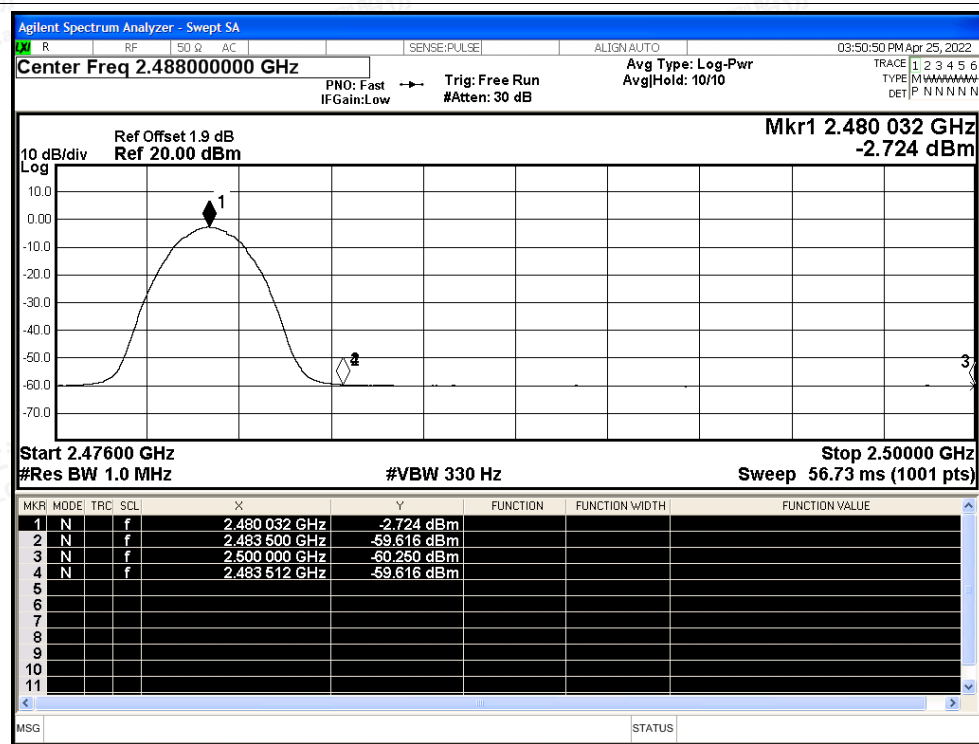




Restrict Band NVNT 3-DH5 2402MHz Ant No-Hopping Peak

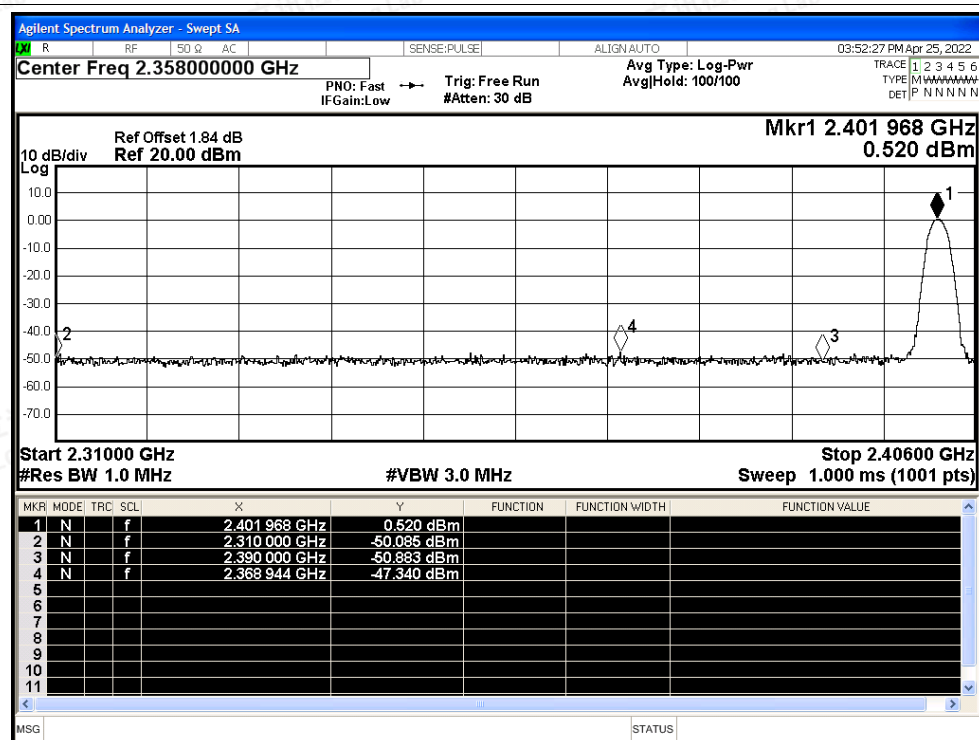


Restrict Band NVNT 3-DH5 2402MHz Ant No-Hopping Average

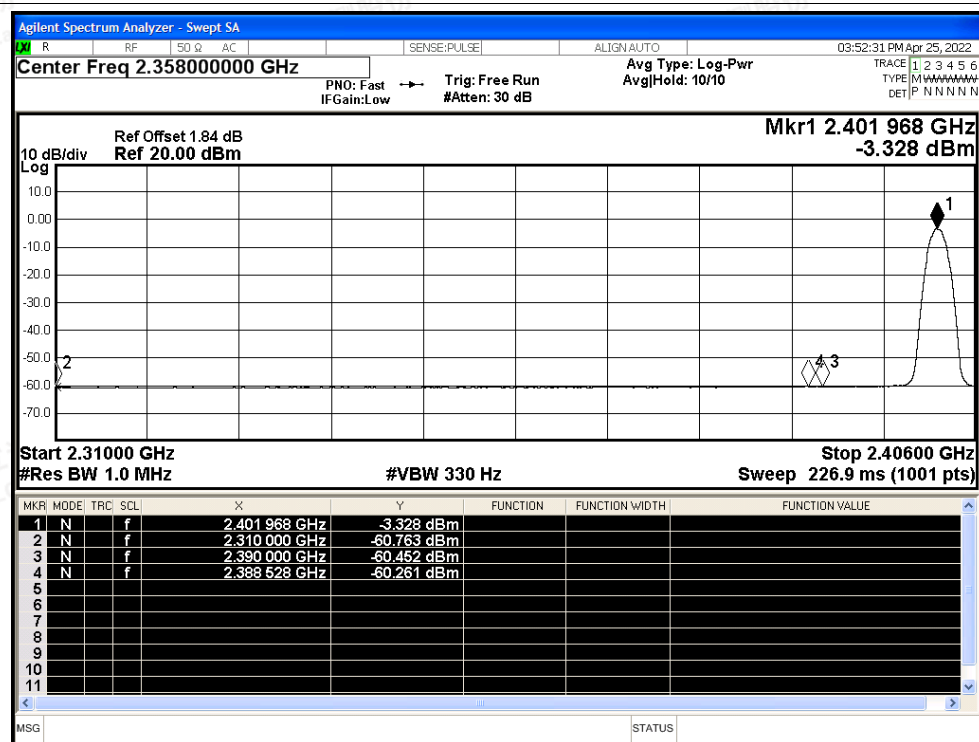



Restrict Band NVNT 3-DH5 2480MHz Ant No-Hopping Peak

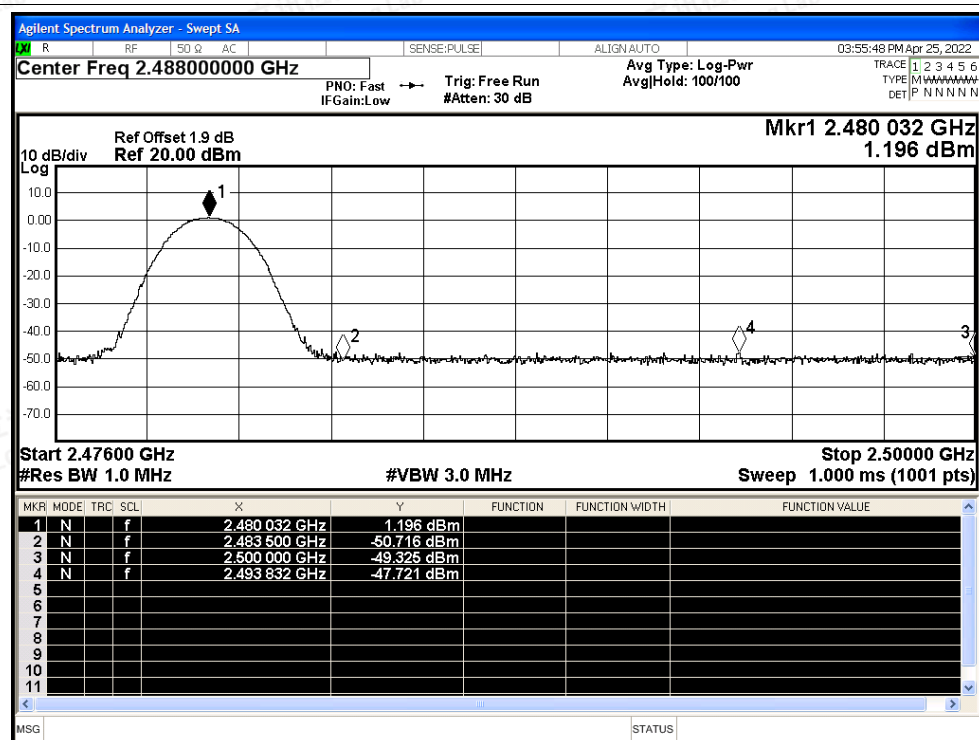

Restrict Band NVNT 3-DH5 2480MHz Ant No-Hopping Average

