



Appendix C

RF Test Data for 2.4GWIFI(Conducted Measurement)

Product Name: Mini PC

Trade Mark: Blackview

Test Model: MP100 Pro

Environmental Conditions

Temperature:	25.6° C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Emiya lin
Supervised by:	Simba Haung



Contents

	Page
COVER PAGE	
1 Duty Cycle	3
1.1 Test Result	3
1.2 Test Graphs	4
2 Maximum Conducted Output Power	22
2.1 Test Result	22
3 -6dB Bandwidth	24
3.1 Test Result	24
3.2 Test Graphs	25
4 Maximum Power Spectral Density Level	43
4.1 Test Result	43
4.2 Test Graphs	45
5 Band Edge	63
5.1 Test Result	63
5.2 Test Graphs	64
6 Conducted RF Spurious Emission	88
6.1 Test Result	88
6.2 Test Graphs	89






1 Duty Cycle



1.1 Test Result


Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor	1/T (kHz)
b	2412	Ant1	77.21	1.12	0.12
b	2437	Ant1	75.65	1.21	0.12
b	2462	Ant1	77.59	1.1	0.12
g	2412	Ant1	77.21	1.12	0.12
g	2437	Ant1	75.65	1.21	0.12
g	2462	Ant1	77.59	1.1	0.12
n20	2412	Ant1	67.21	1.73	0.2
n20	2437	Ant1	66.76	1.75	0.2
n20	2462	Ant1	65.58	1.83	0.2
n40	2422	Ant1	60	2.22	0.26
n40	2437	Ant1	60.01	2.22	0.26
n40	2452	Ant1	61.38	2.12	0.26
ax20	2412	Ant1	63.27	1.99	0.22
ax20	2437	Ant1	62.65	2.03	0.22
ax20	2462	Ant1	62.96	2.01	0.23
ax40	2422	Ant1	58.9	2.3	0.28
ax40	2437	Ant1	58.07	2.36	0.28
ax40	2452	Ant1	58.08	2.36	0.28
b	2412	Ant2	75.57	1.22	0.12
b	2437	Ant2	75.74	1.21	0.12
b	2462	Ant2	76.29	1.18	0.12
g	2412	Ant2	75.57	1.22	0.12
g	2437	Ant2	75.74	1.21	0.12
g	2462	Ant2	76.29	1.18	0.12
n20	2412	Ant2	65.1	1.86	0.2
n20	2437	Ant2	65.27	1.85	0.2
n20	2462	Ant2	66.18	1.79	0.2
n40	2422	Ant2	61.25	2.13	0.26
n40	2437	Ant2	61.94	2.08	0.26
n40	2452	Ant2	61.12	2.14	0.26
ax20	2412	Ant2	62.86	2.02	0.23
ax20	2437	Ant2	62.88	2.01	0.22
ax20	2462	Ant2	65.14	1.86	0.22
ax40	2422	Ant2	58.81	2.31	0.28
ax40	2437	Ant2	58.92	2.3	0.28
ax40	2452	Ant2	60.12	2.21	0.28


1.2 Test Graphs

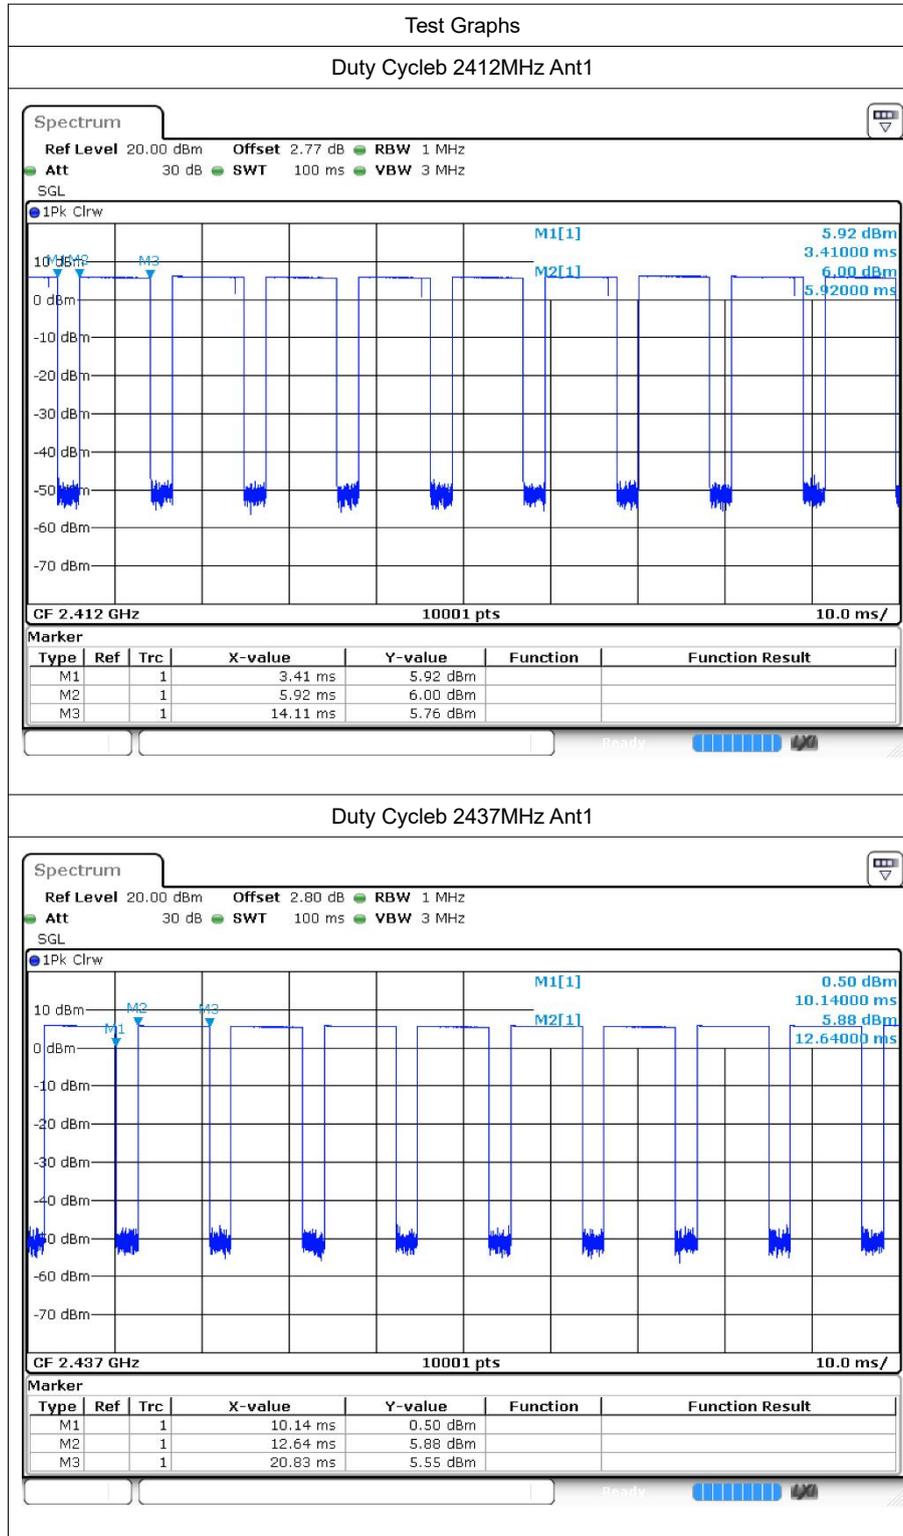


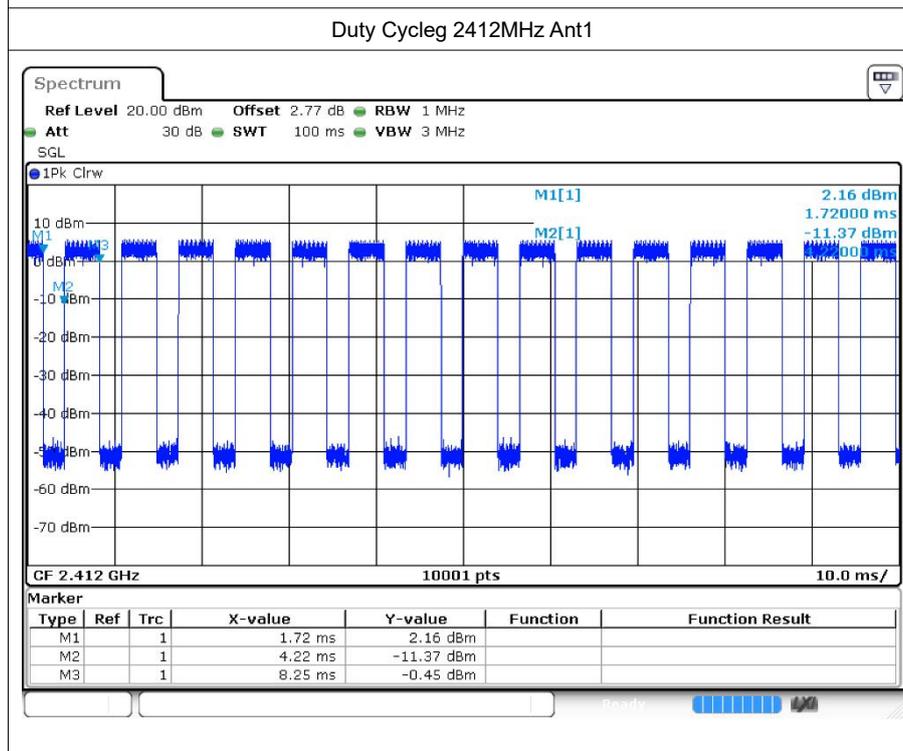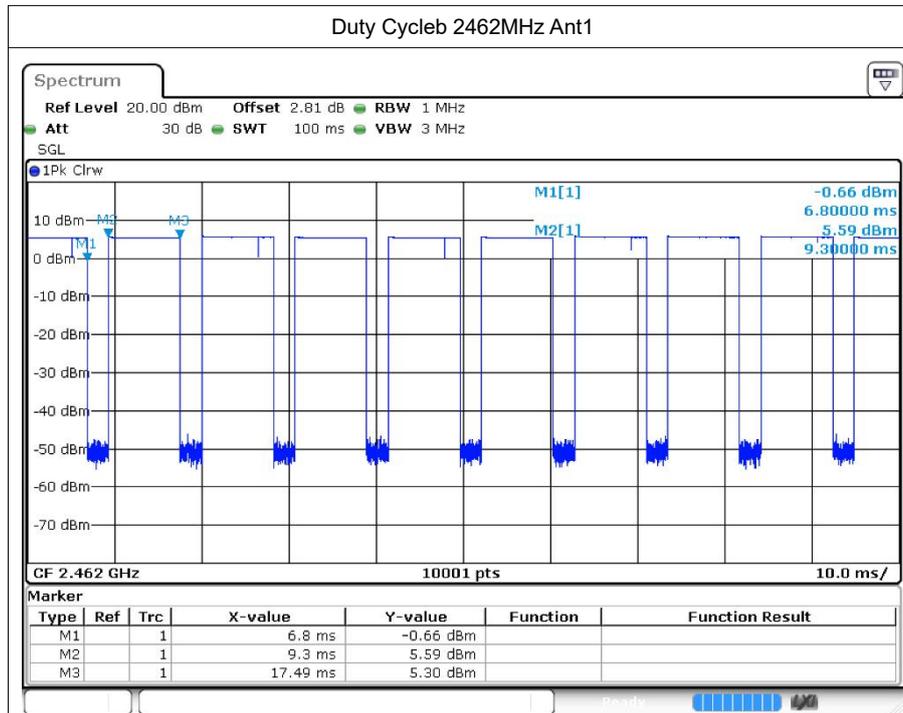

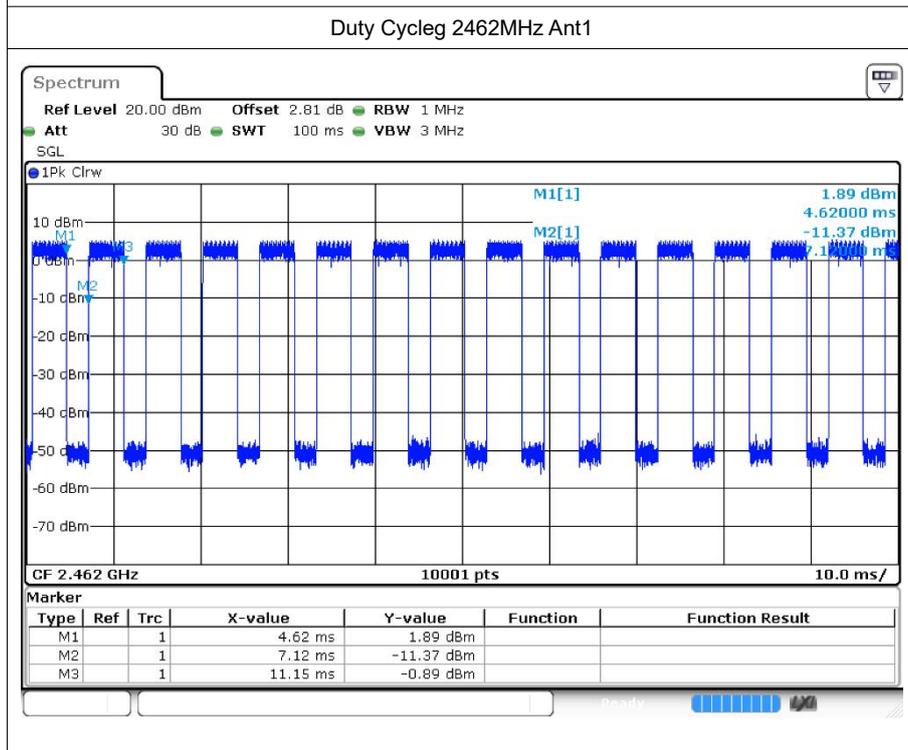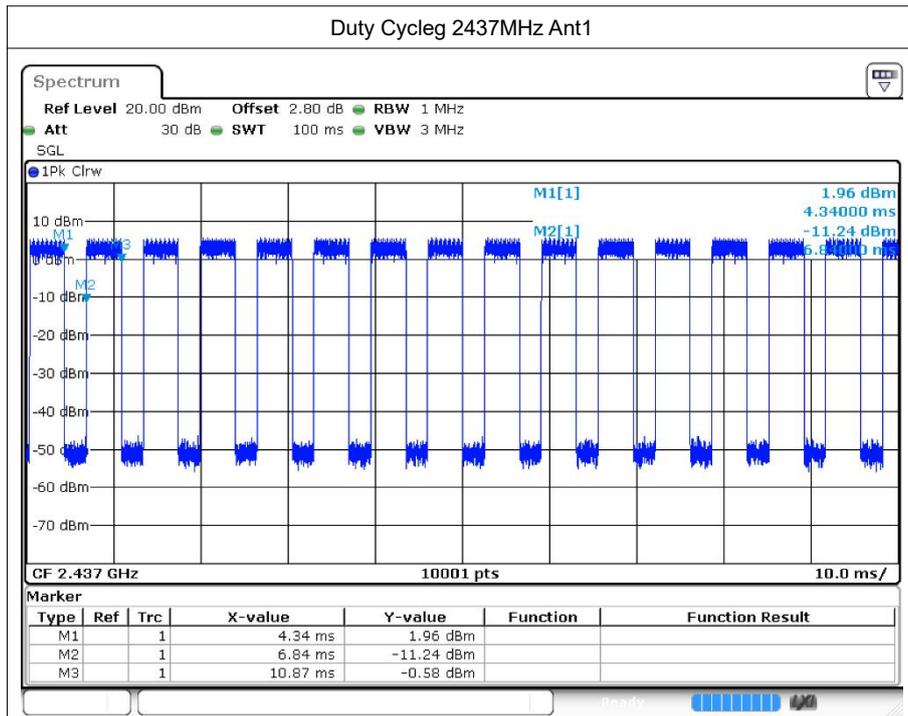

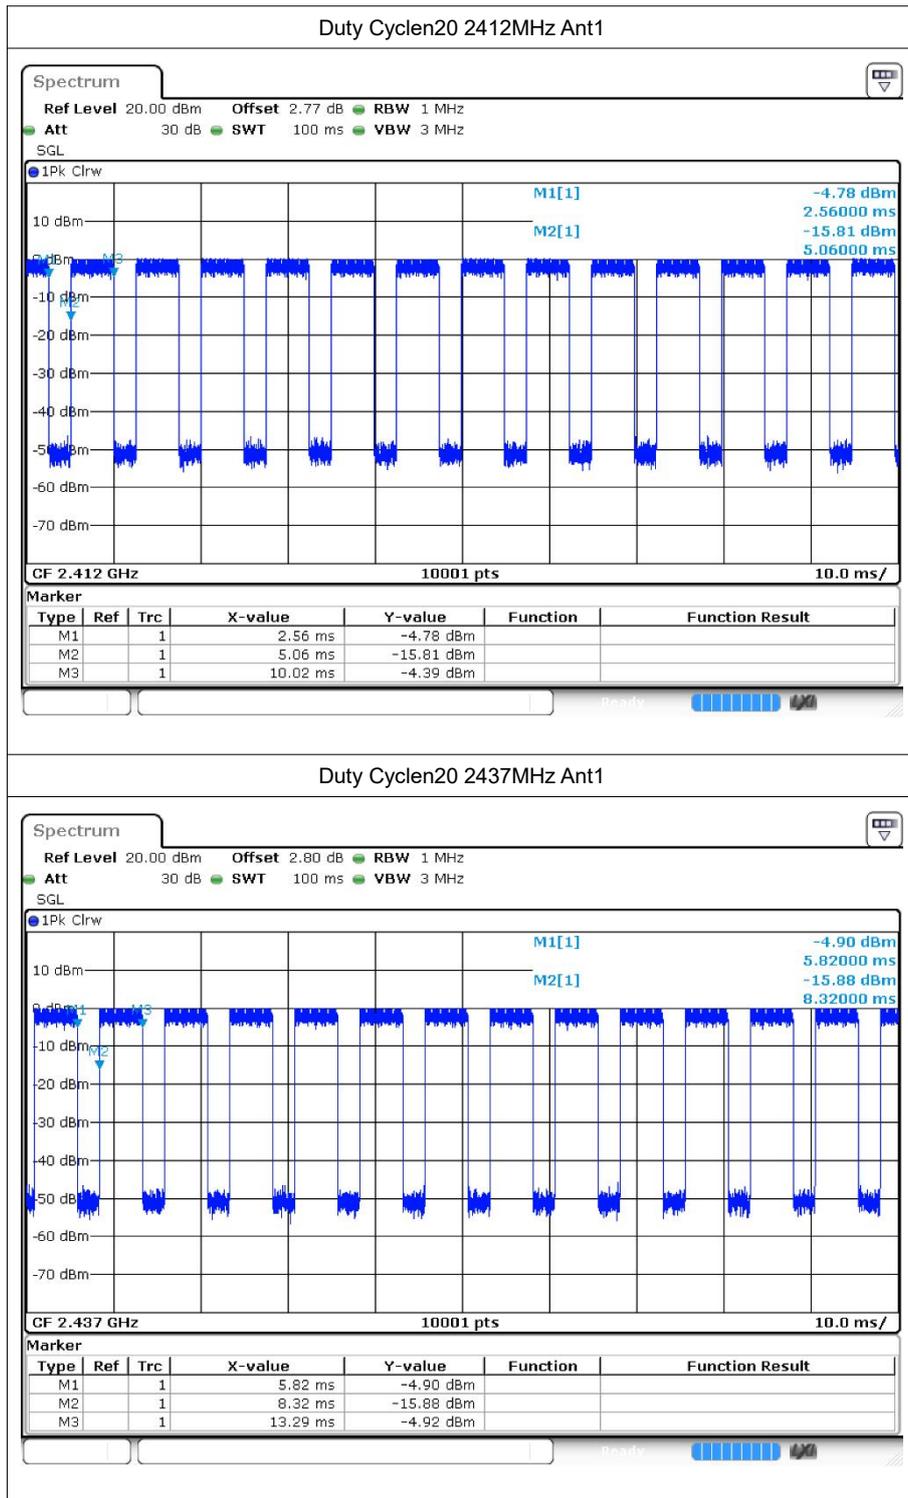


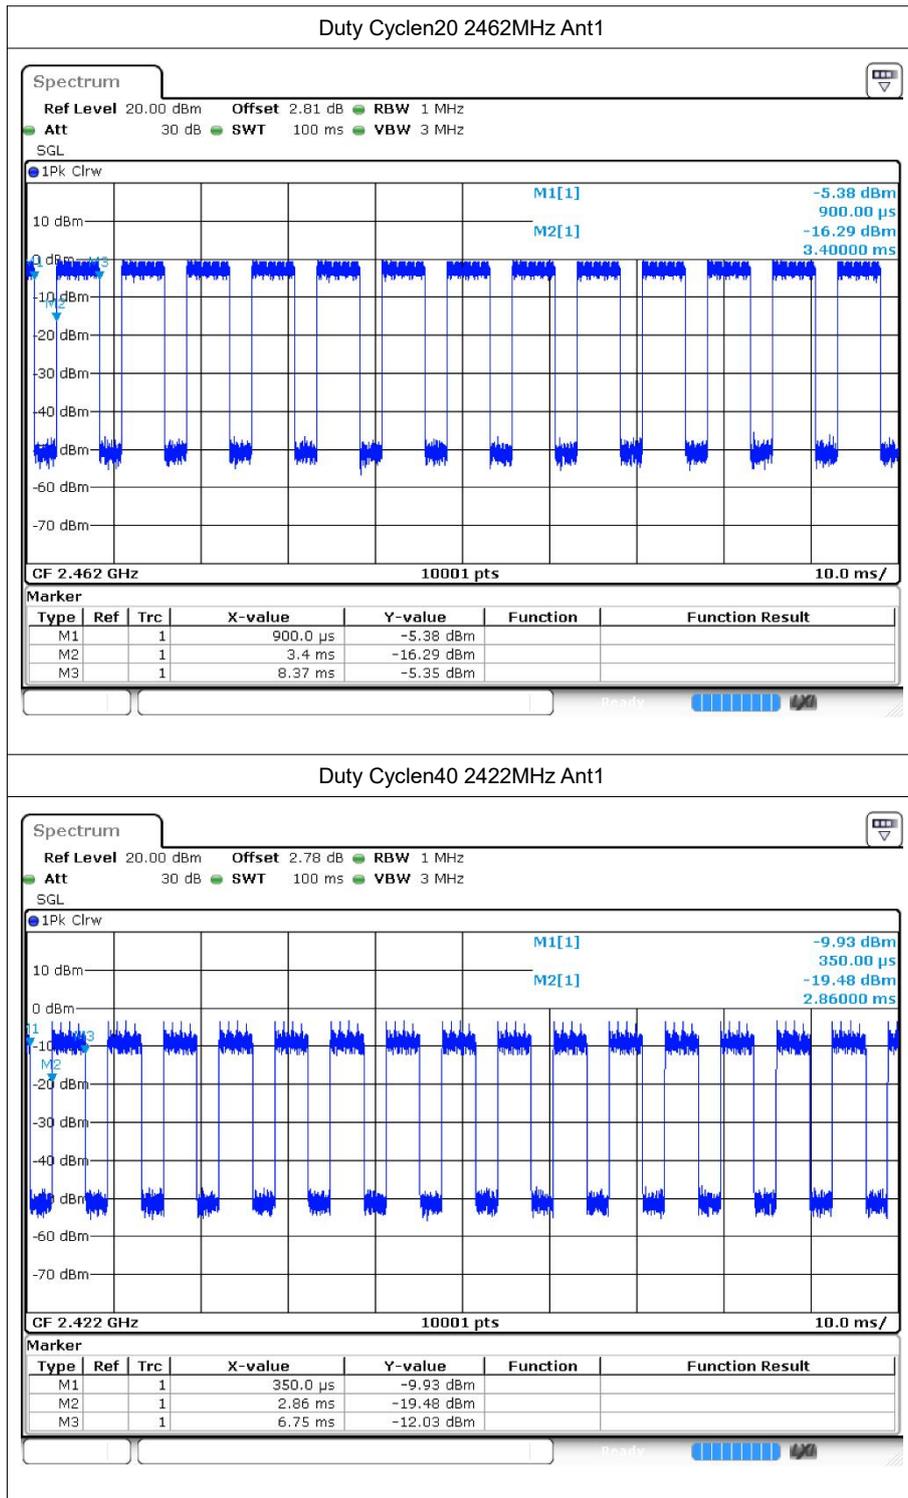

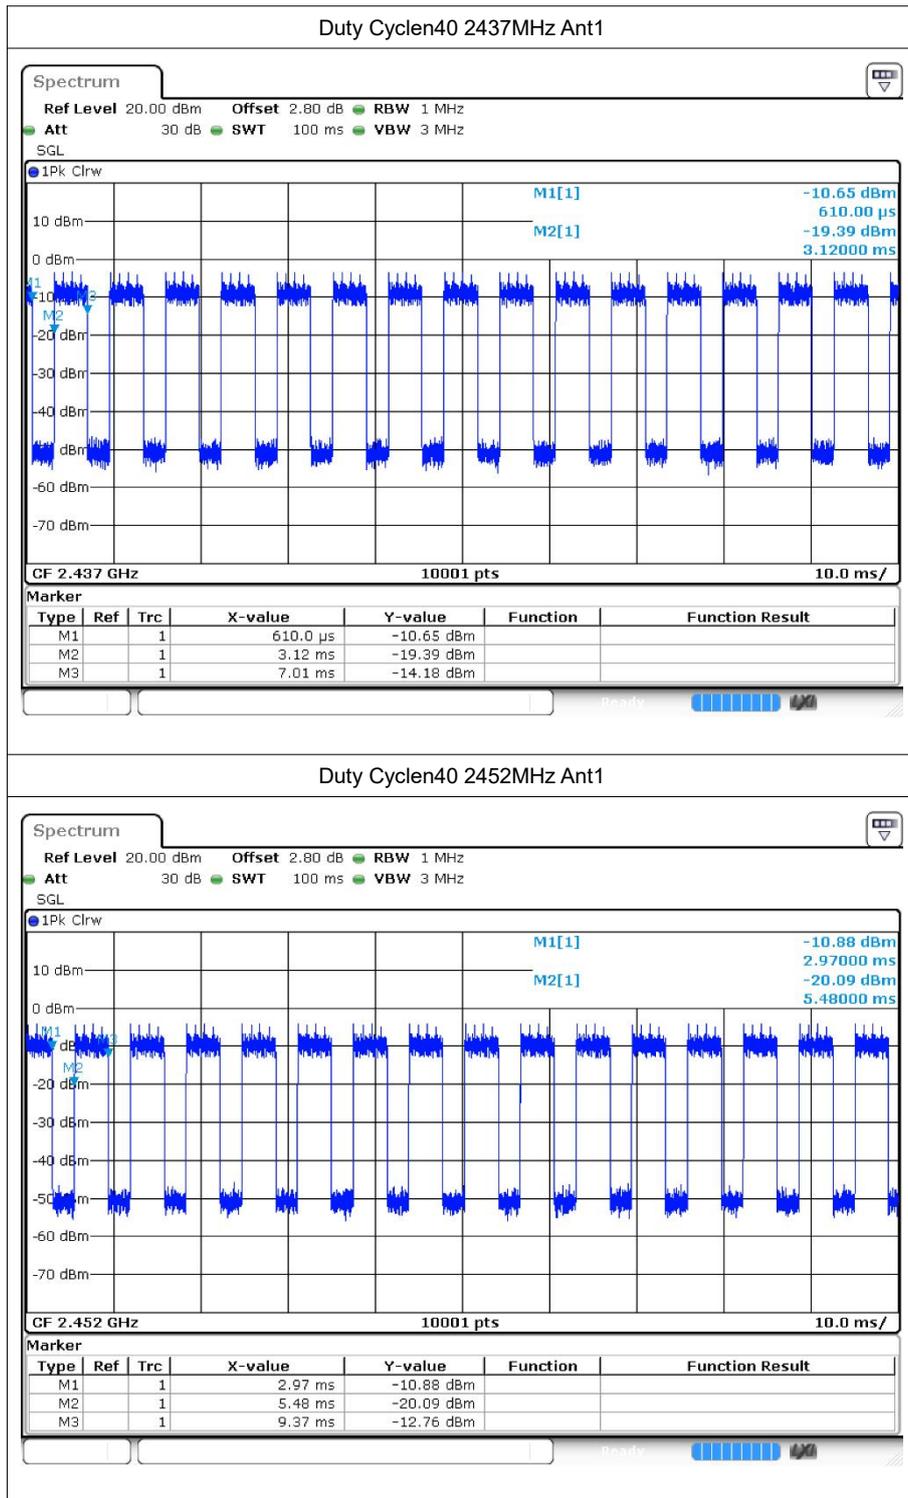



Test Graphs


Duty Cycle 2412MHz Ant2

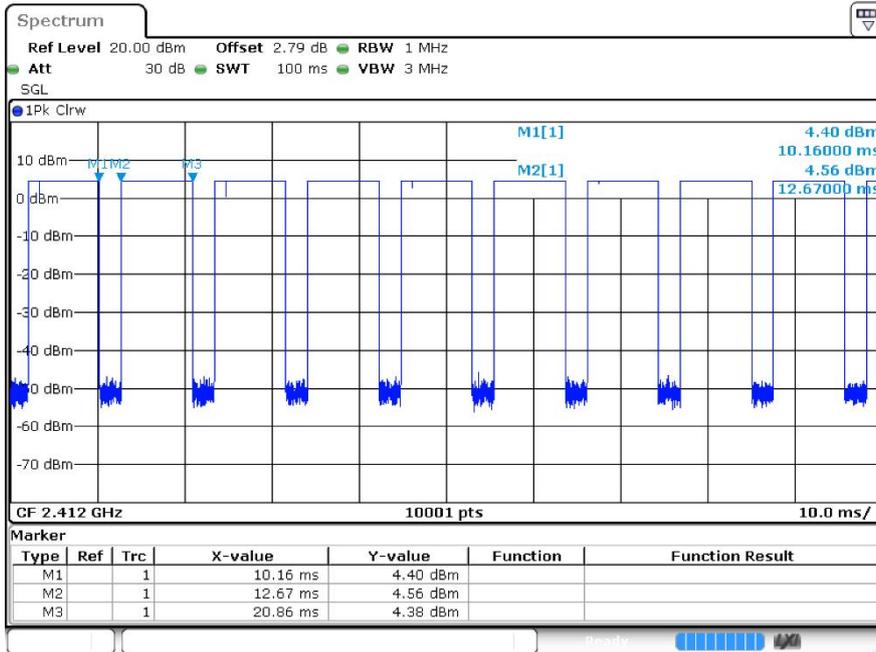




Duty Cycle 2437MHz Ant2

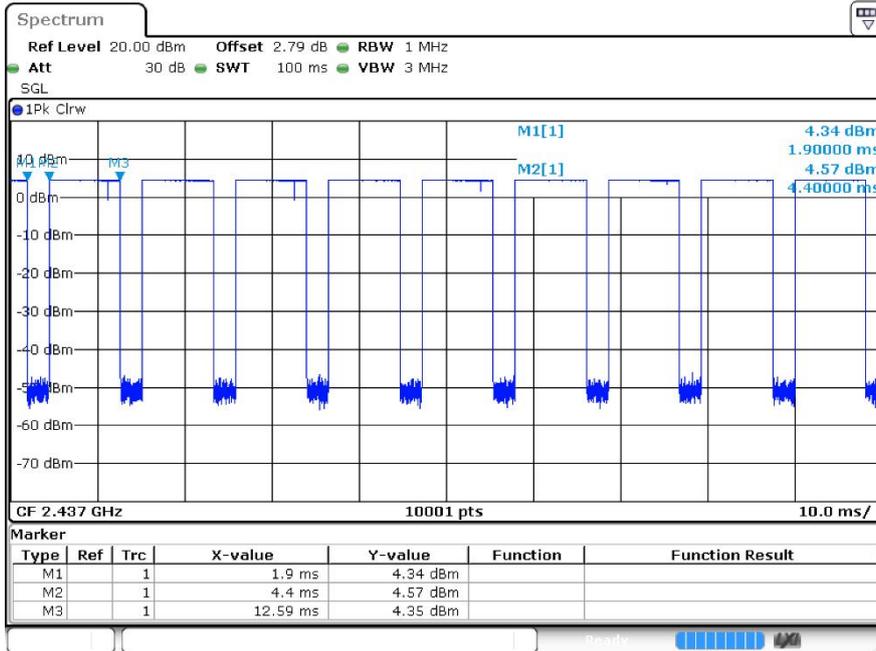


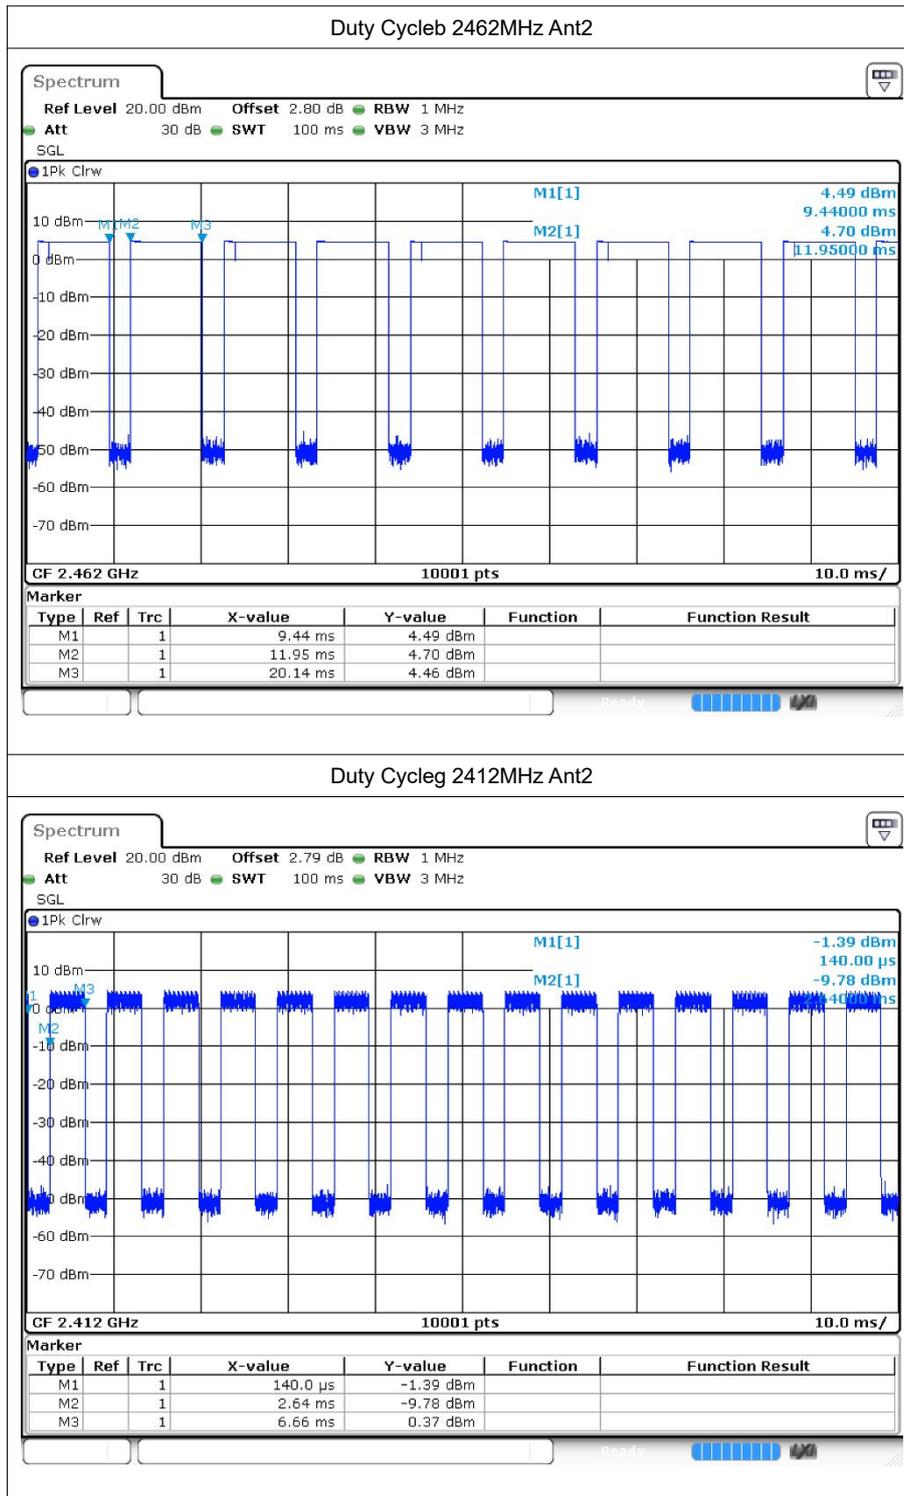


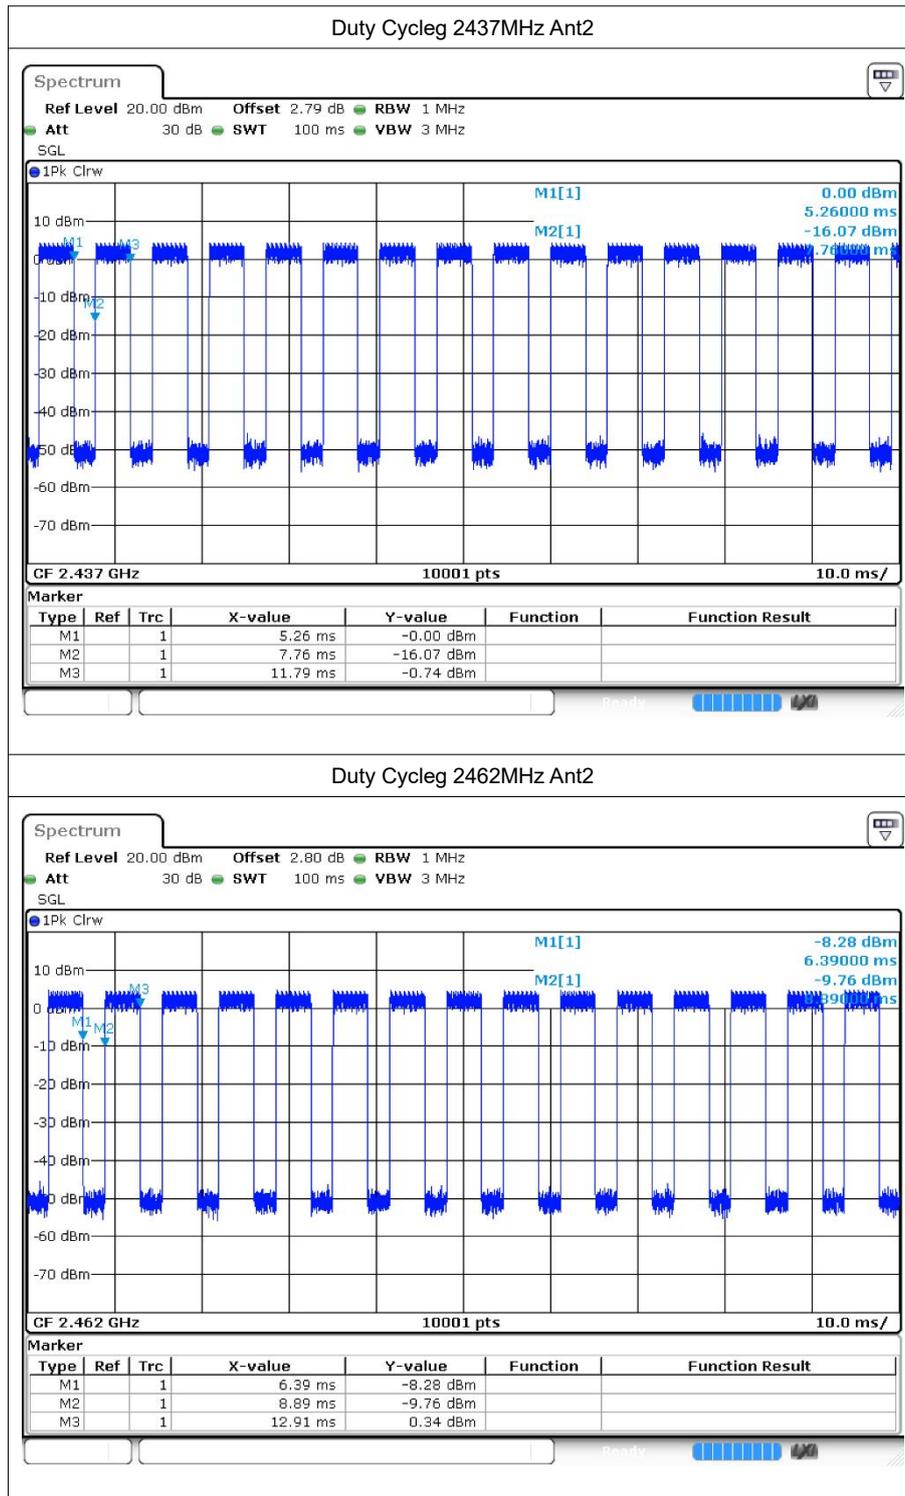


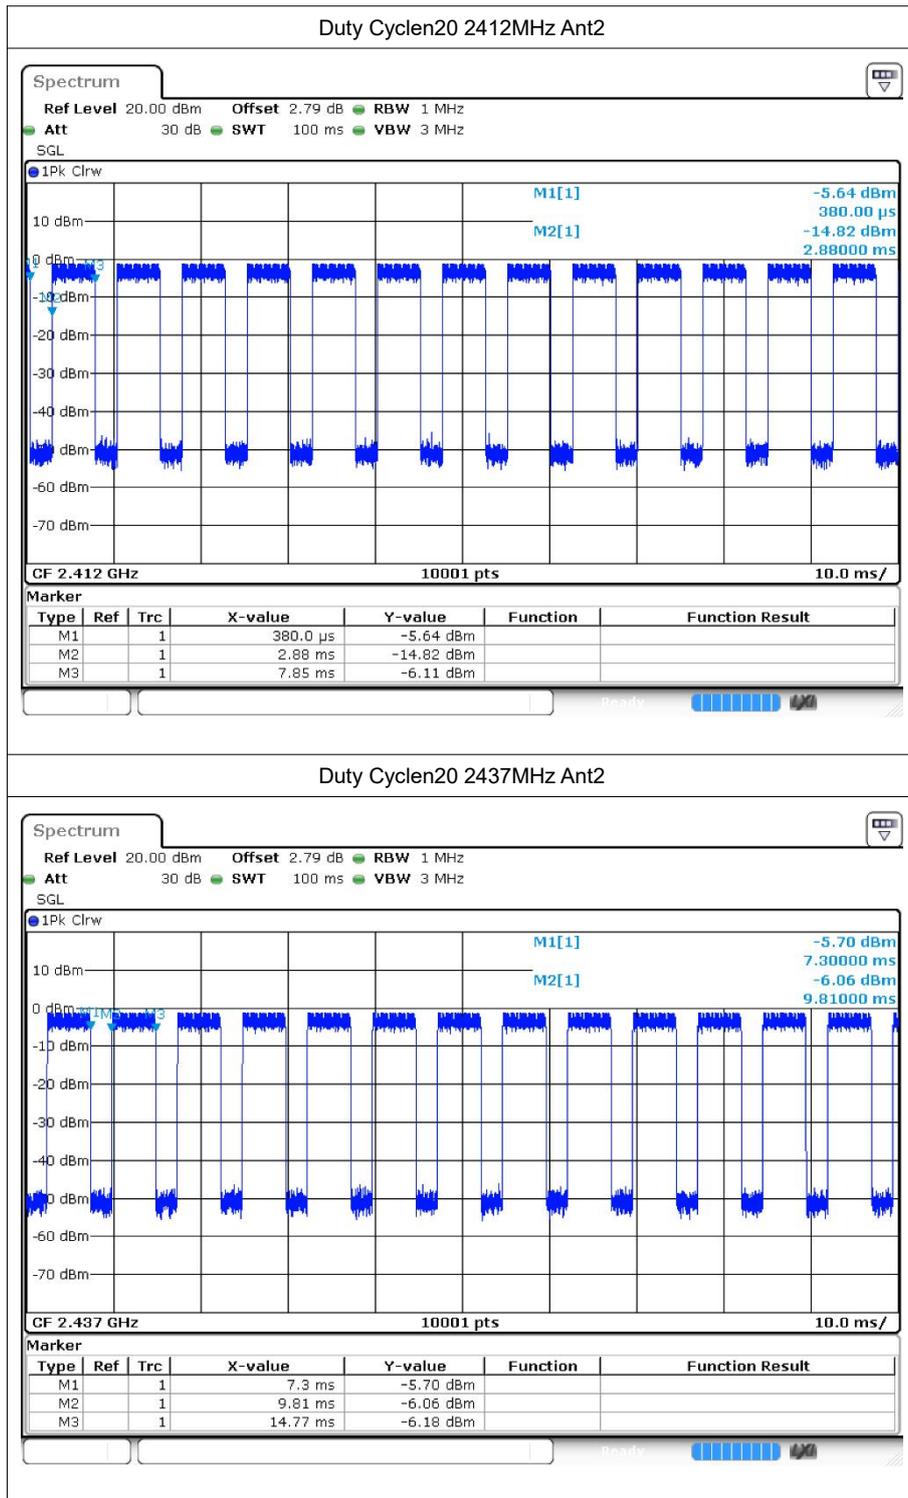


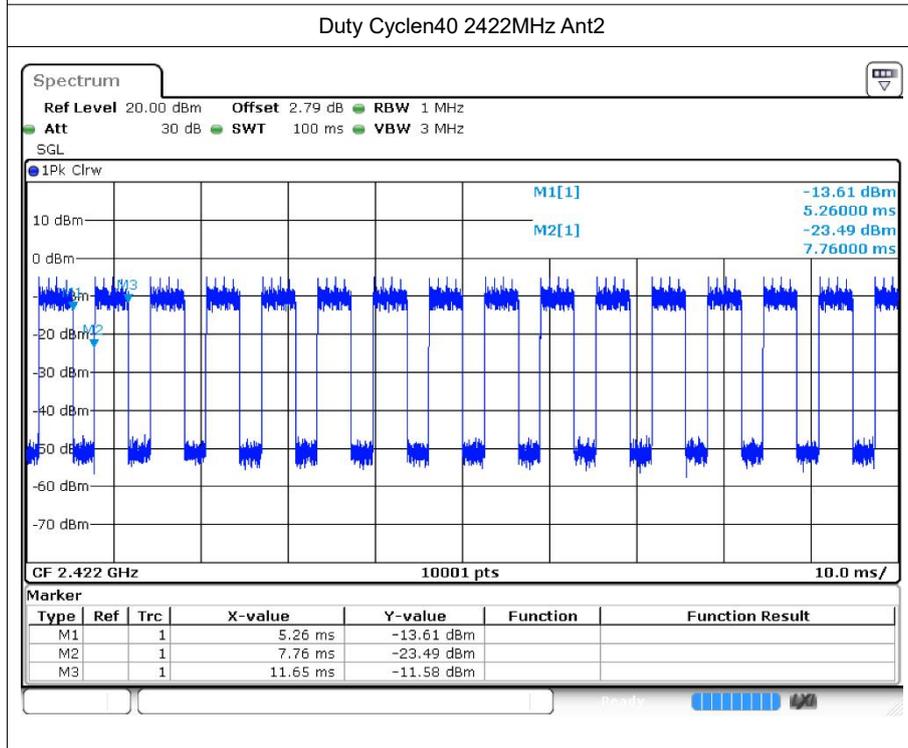
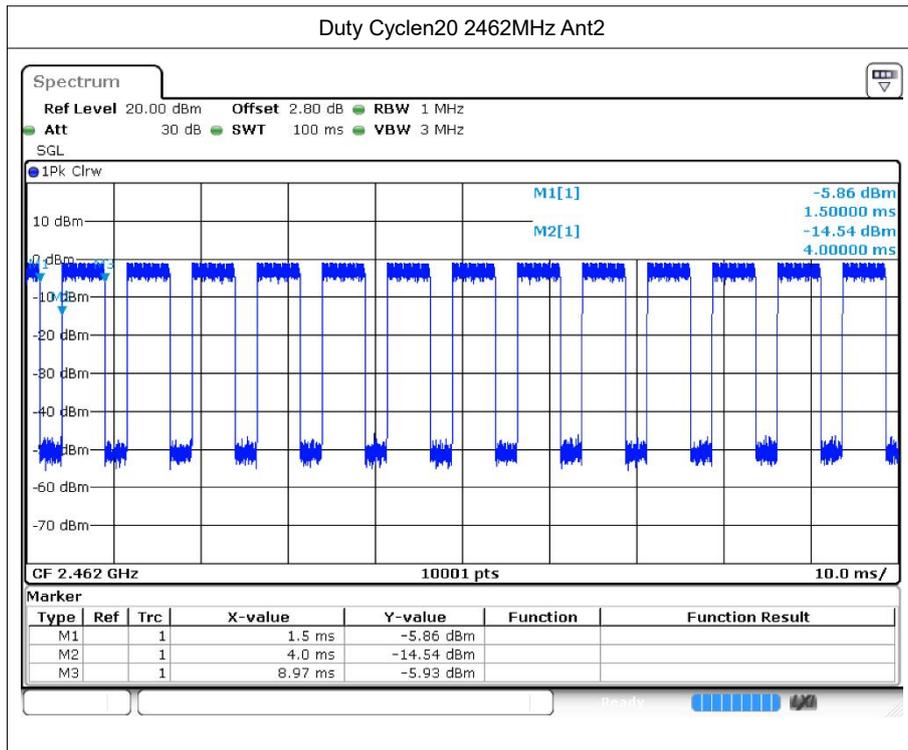


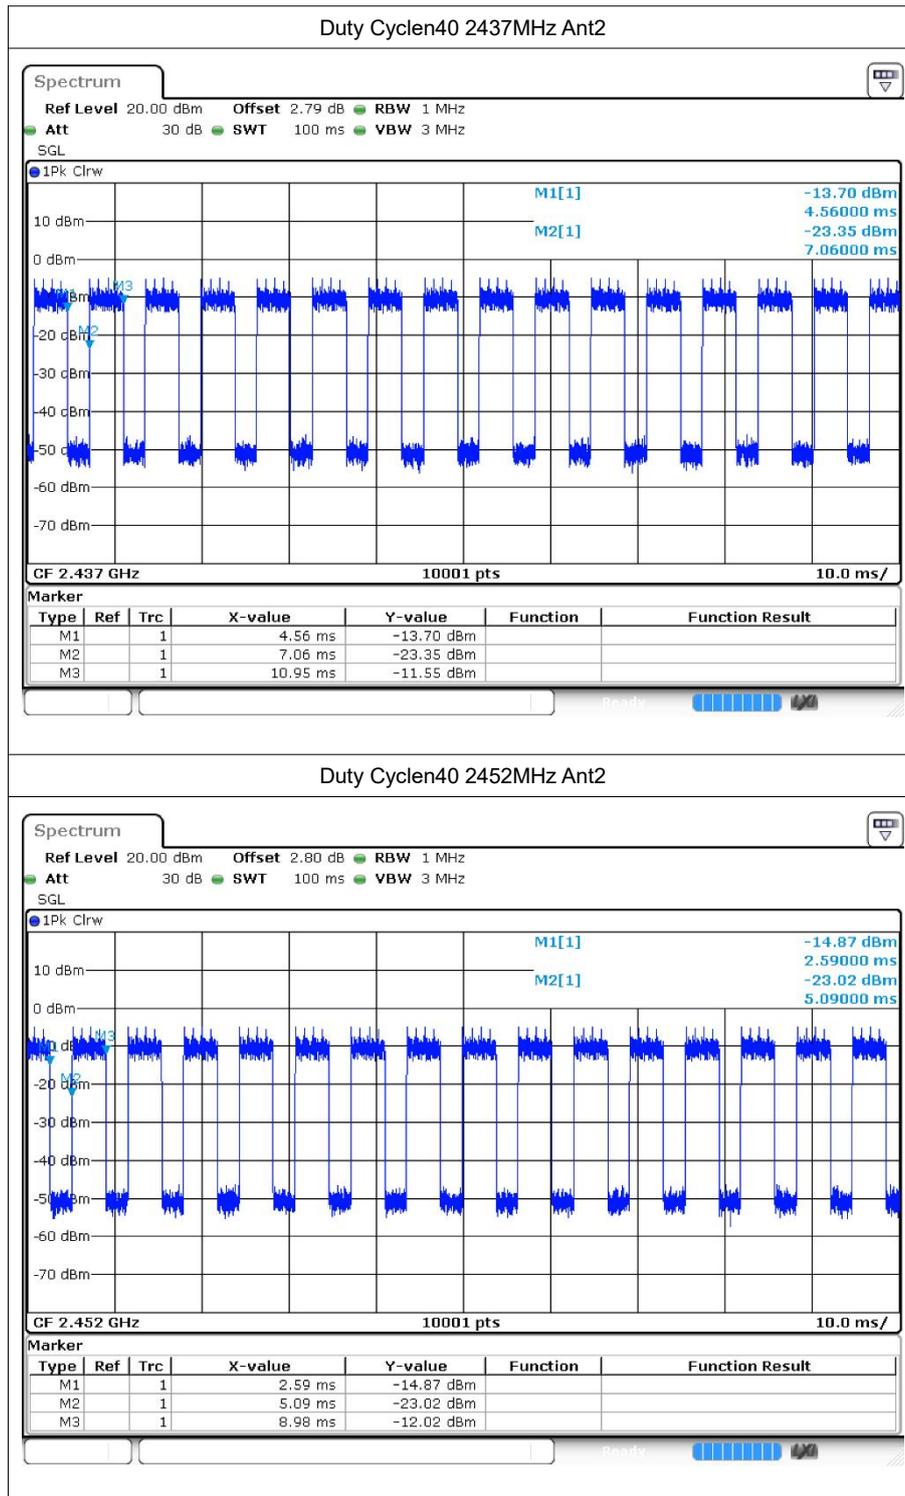


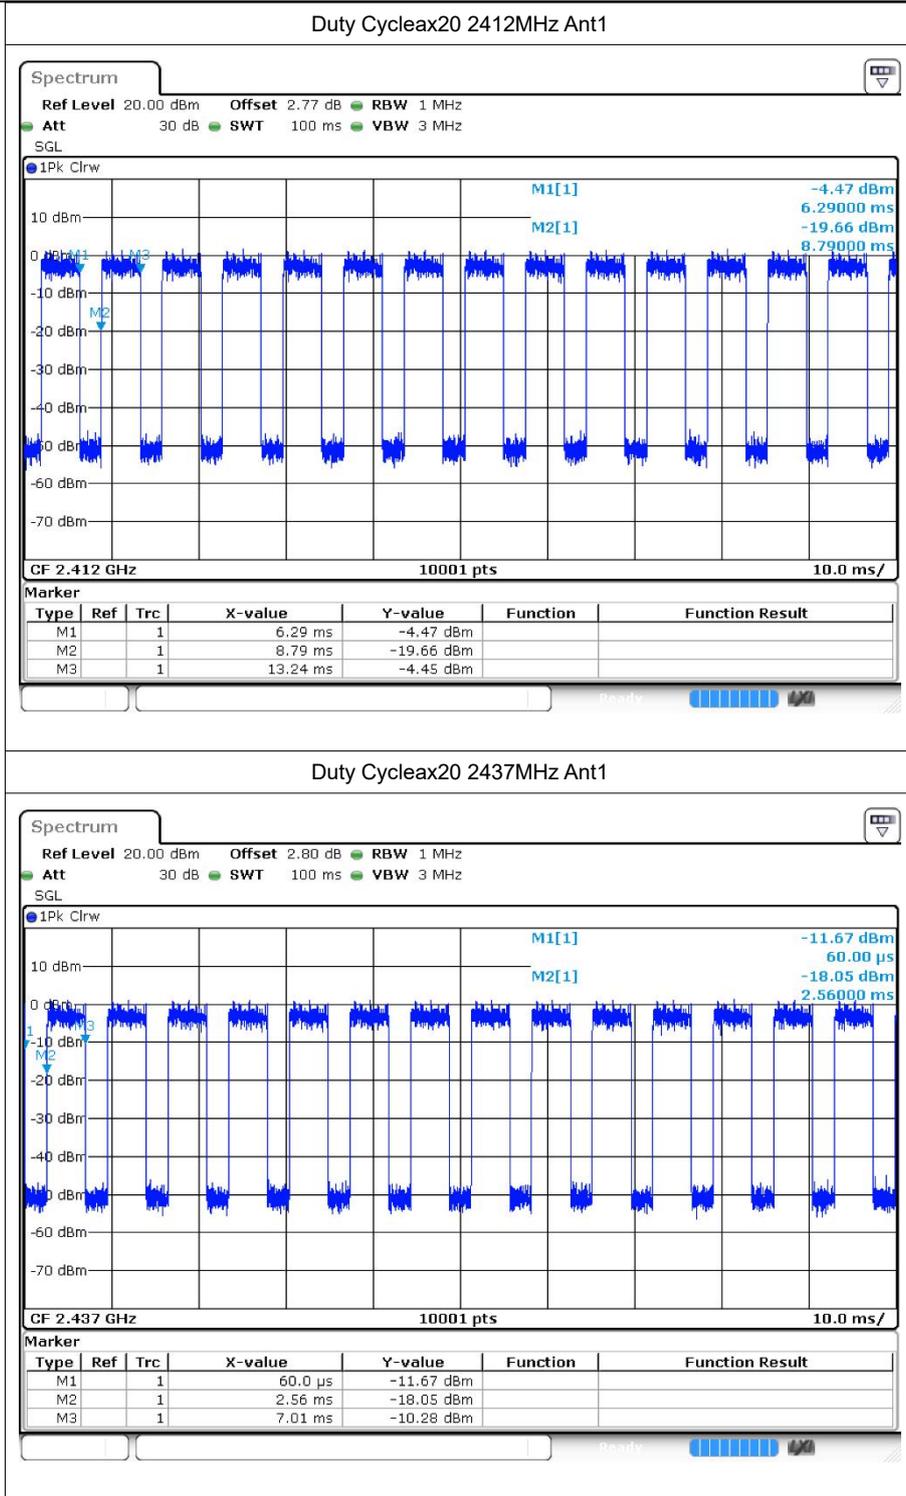


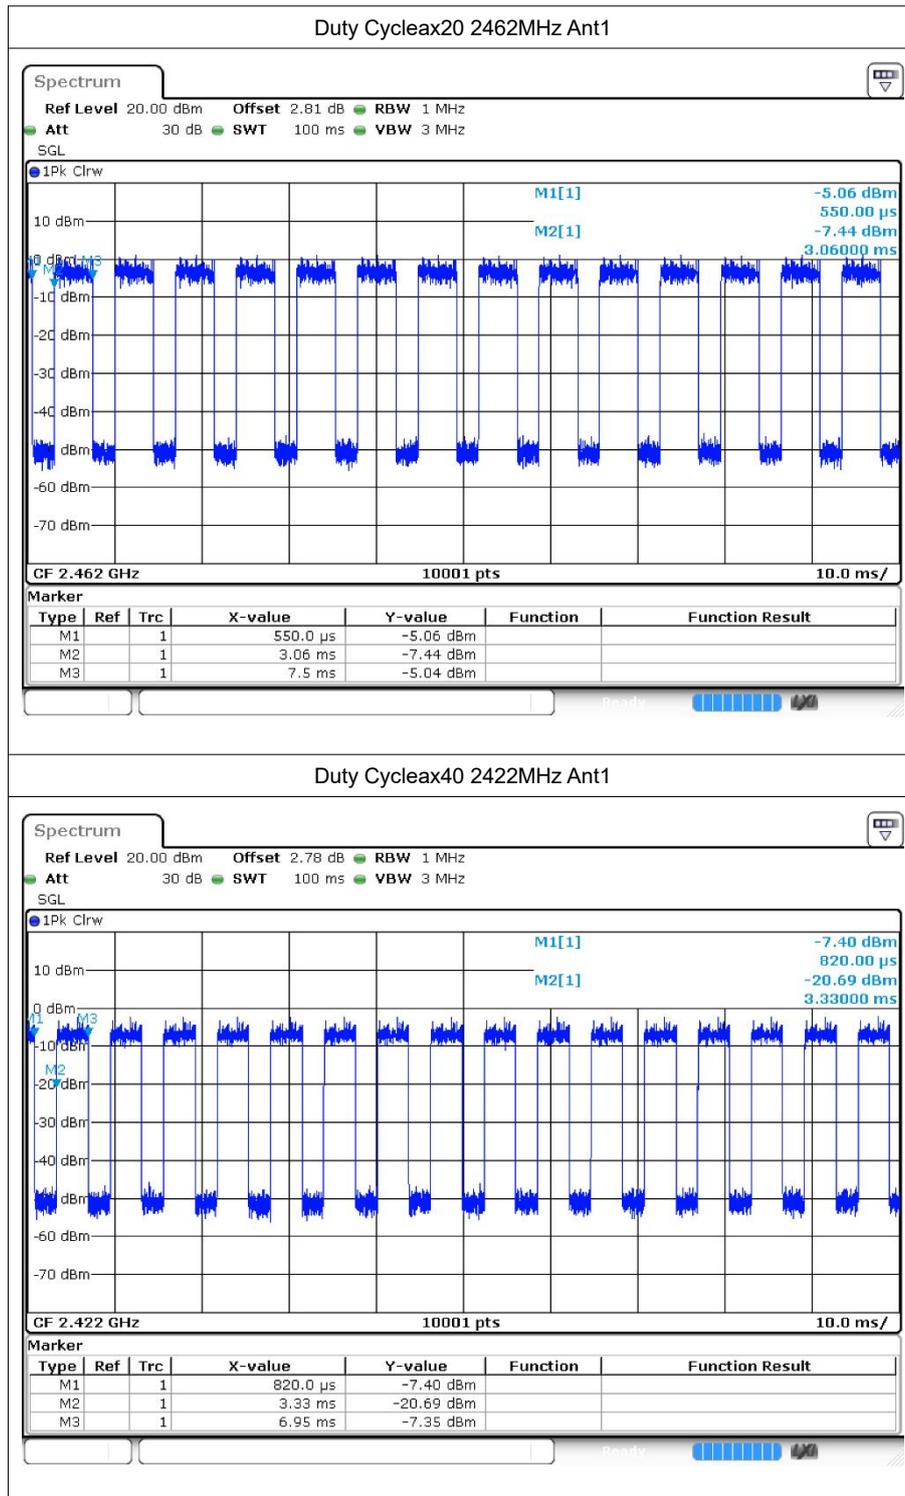

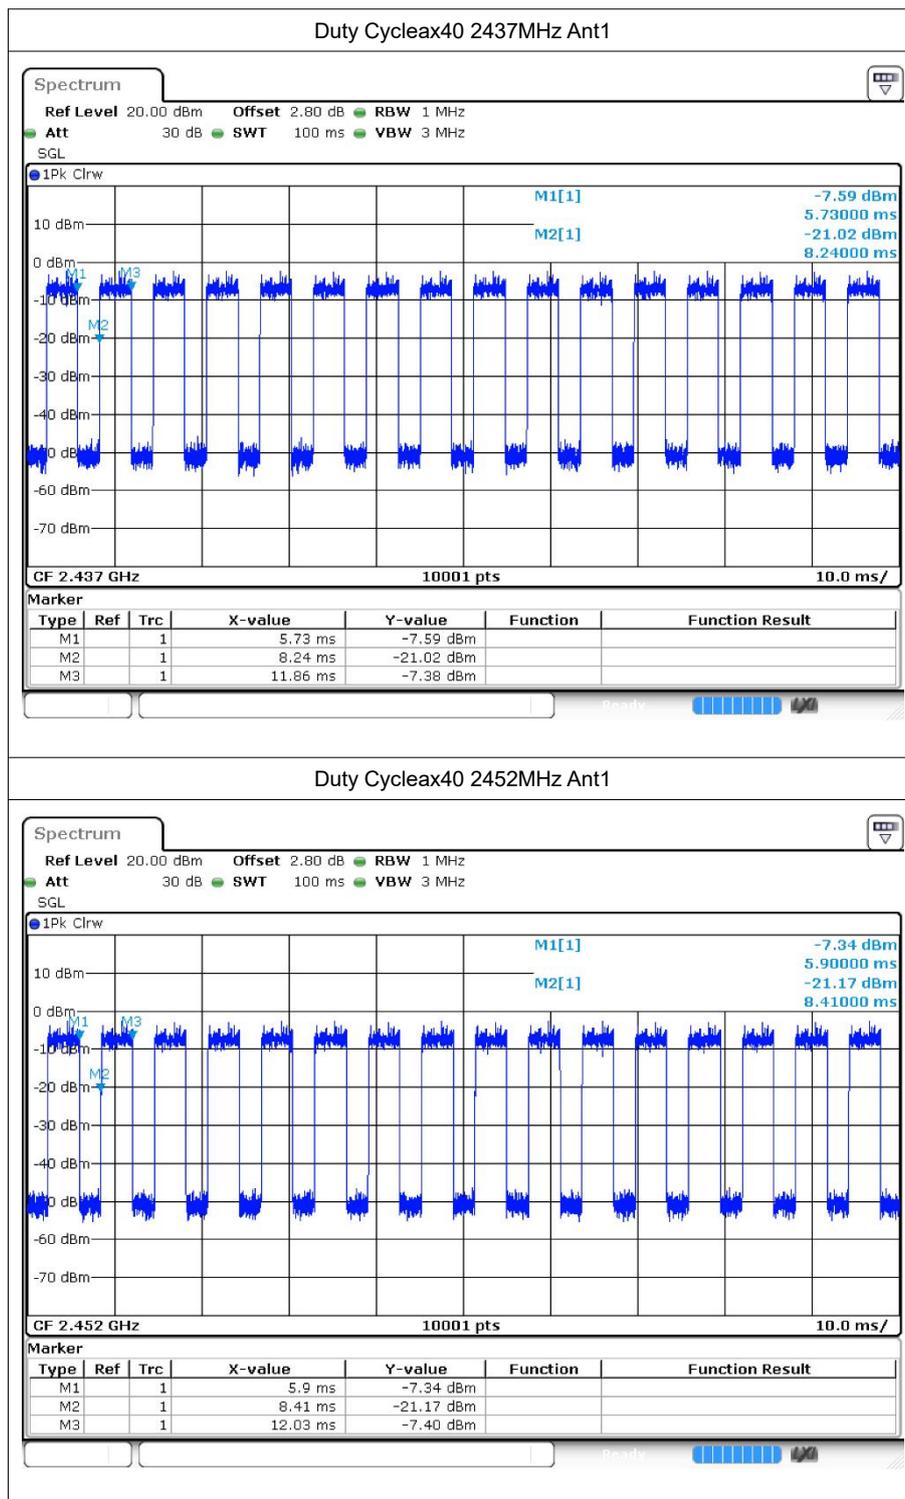

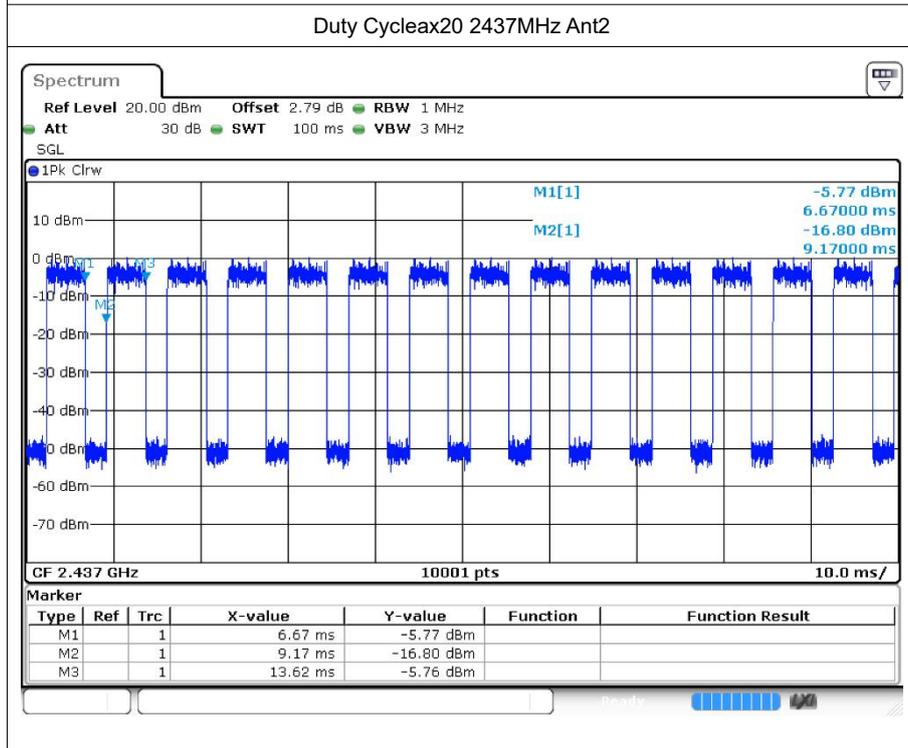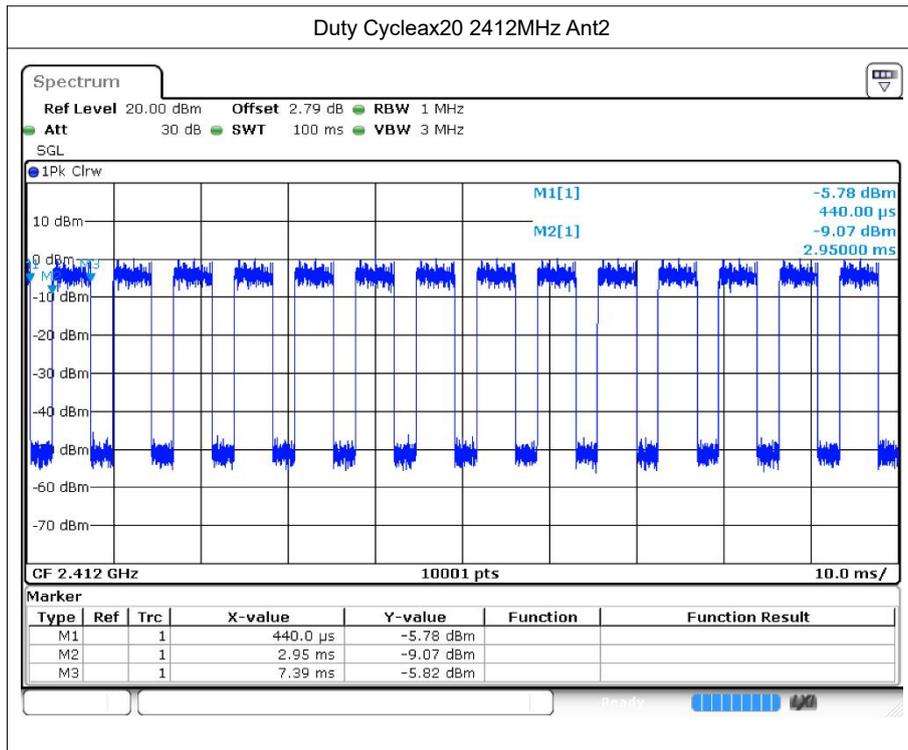

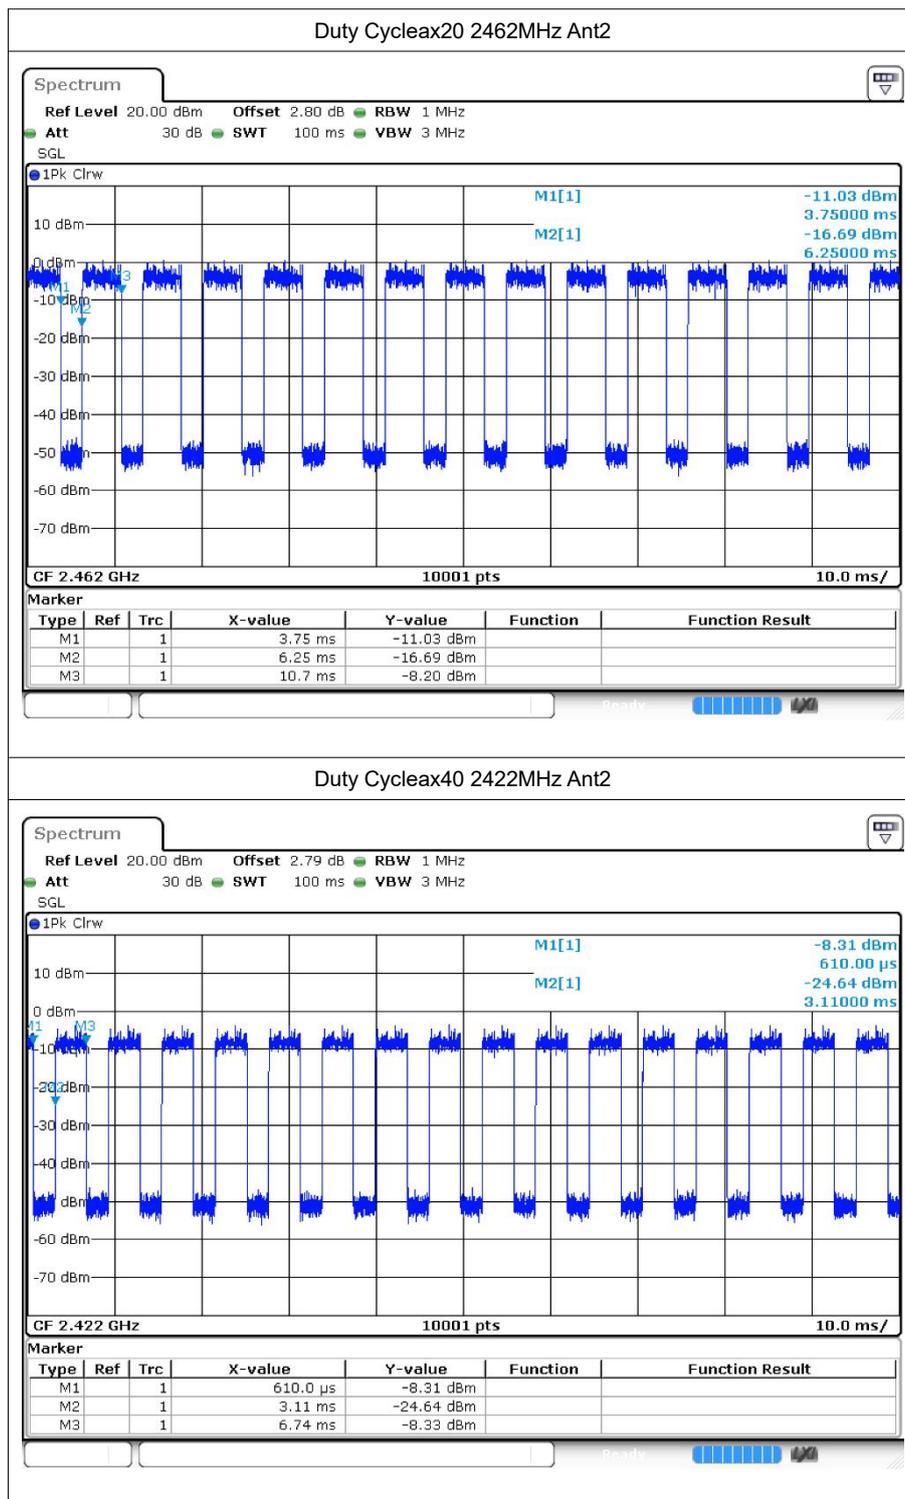

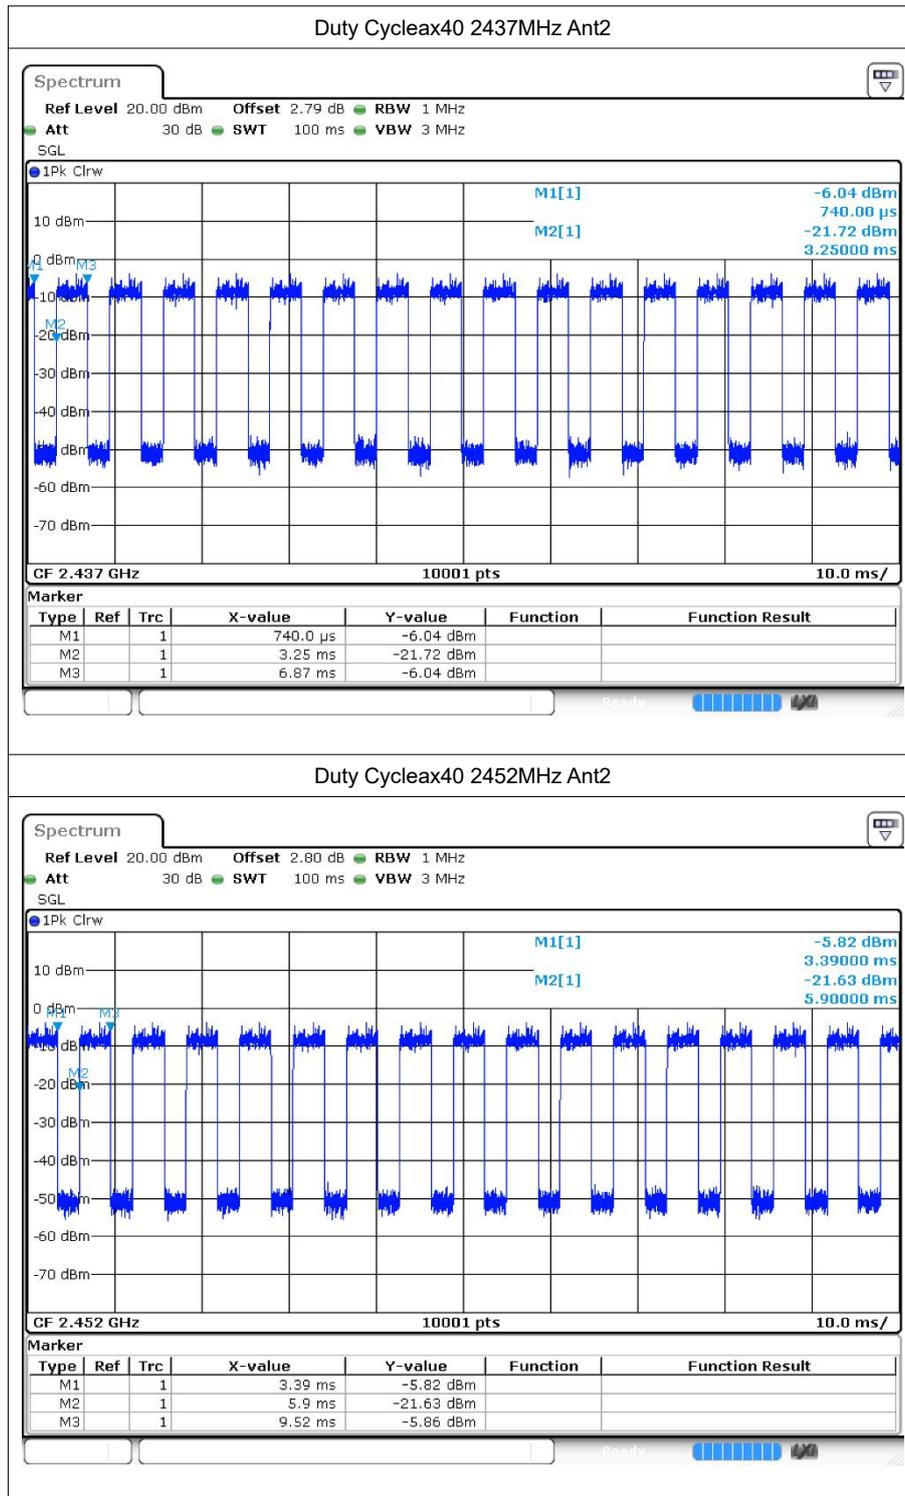



2 Maximum Conducted Output Power

2.1 Test Result

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	16.77	30	Pass
b	2437	Ant1	16.76	30	Pass
b	2462	Ant1	16.61	30	Pass
b	2412	Ant2	15.61	30	Pass
b	2437	Ant2	15.54	30	Pass
b	2462	Ant2	14.76	30	Pass
g	2412	Ant1	16	30	Pass
g	2437	Ant1	16.1	30	Pass
g	2462	Ant1	15.84	30	Pass
g	2412	Ant2	14.98	30	Pass
g	2437	Ant2	14.76	30	Pass
g	2462	Ant2	14.67	30	Pass
n20	2412	Ant1	13.41	30	Pass
n20	2437	Ant1	13.27	30	Pass
n20	2462	Ant1	12.9	30	Pass
n20	2412	Ant2	12.16	30	Pass
n20	2437	Ant2	12.12	30	Pass
n20	2462	Ant2	12.15	30	Pass
n20	2412	Sum	15.84	29.59	Pass
n20	2437	Sum	15.74	29.59	Pass
n20	2462	Sum	15.55	29.59	Pass
n40	2422	Ant1	12.86	30	Pass
n40	2437	Ant1	12.52	30	Pass
n40	2452	Ant1	12.1	30	Pass
n40	2422	Ant2	11.4	30	Pass
n40	2437	Ant2	10.93	30	Pass
n40	2452	Ant2	11.28	30	Pass
n40	2422	Sum	15.2	29.59	Pass
n40	2437	Sum	14.81	29.59	Pass
n40	2452	Sum	14.72	29.59	Pass
ax20	2412	Ant1	12.78	30	Pass
ax20	2437	Ant1	12.47	30	Pass
ax20	2462	Ant1	12.39	30	Pass
ax20	2412	Ant2	11.64	30	Pass
ax20	2437	Ant2	11.64	30	Pass
ax20	2462	Ant2	11.9	30	Pass



ax20	2412	Sum	15.49	29.59	Pass
ax20	2437	Sum	15.2	29.59	Pass
ax20	2462	Sum	15.04	29.59	Pass
ax40	2422	Ant1	12.39	30	Pass
ax40	2437	Ant1	11.79	30	Pass
ax40	2452	Ant1	11.83	30	Pass
ax40	2422	Ant2	10.96	30	Pass
ax40	2437	Ant2	10.74	30	Pass
ax40	2452	Ant2	10.76	30	Pass
ax40	2422	Sum	14.74	29.59	Pass
ax40	2437	Sum	14.31	29.59	Pass
ax40	2452	Sum	14.34	29.59	Pass

Note: The Directional Gain is 6.41dBi, exceeding 0.41dBi. The limit value is $30-0.41=29.59$ dBm




3 -6dB Bandwidth

3.1 Test Result

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant1	10.104	0.5	Pass
b	2437	Ant1	11.073	0.5	Pass
b	2462	Ant1	11.055	0.5	Pass
g	2412	Ant1	16.395	0.5	Pass
g	2437	Ant1	16.374	0.5	Pass
g	2462	Ant1	16.392	0.5	Pass
n20	2412	Ant1	17.646	0.5	Pass
n20	2437	Ant1	17.643	0.5	Pass
n20	2462	Ant1	17.64	0.5	Pass
n40	2422	Ant1	35.292	0.5	Pass
n40	2437	Ant1	36.324	0.5	Pass
n40	2452	Ant1	36.372	0.5	Pass
ax20	2412	Ant1	19.098	0.5	Pass
ax20	2437	Ant1	18.807	0.5	Pass
ax20	2462	Ant1	19.062	0.5	Pass
ax40	2422	Ant1	37.68	0.5	Pass
ax40	2437	Ant1	38.034	0.5	Pass
ax40	2452	Ant1	38.07	0.5	Pass
b	2412	Ant2	11.064	0.5	Pass
b	2437	Ant2	11.082	0.5	Pass
b	2462	Ant2	11.067	0.5	Pass
g	2412	Ant2	16.296	0.5	Pass
g	2437	Ant2	16.467	0.5	Pass
g	2462	Ant2	16.473	0.5	Pass
n20	2412	Ant2	17.643	0.5	Pass
n20	2437	Ant2	17.661	0.5	Pass
n20	2462	Ant2	16.773	0.5	Pass
n40	2422	Ant2	36.36	0.5	Pass
n40	2437	Ant2	36.366	0.5	Pass
n40	2452	Ant2	36.336	0.5	Pass
ax20	2412	Ant2	19.023	0.5	Pass
ax20	2437	Ant2	18.993	0.5	Pass
ax20	2462	Ant2	19.005	0.5	Pass
ax40	2422	Ant2	38.088	0.5	Pass
ax40	2437	Ant2	38.112	0.5	Pass
ax40	2452	Ant2	38.154	0.5	Pass

3.2 Test Graphs

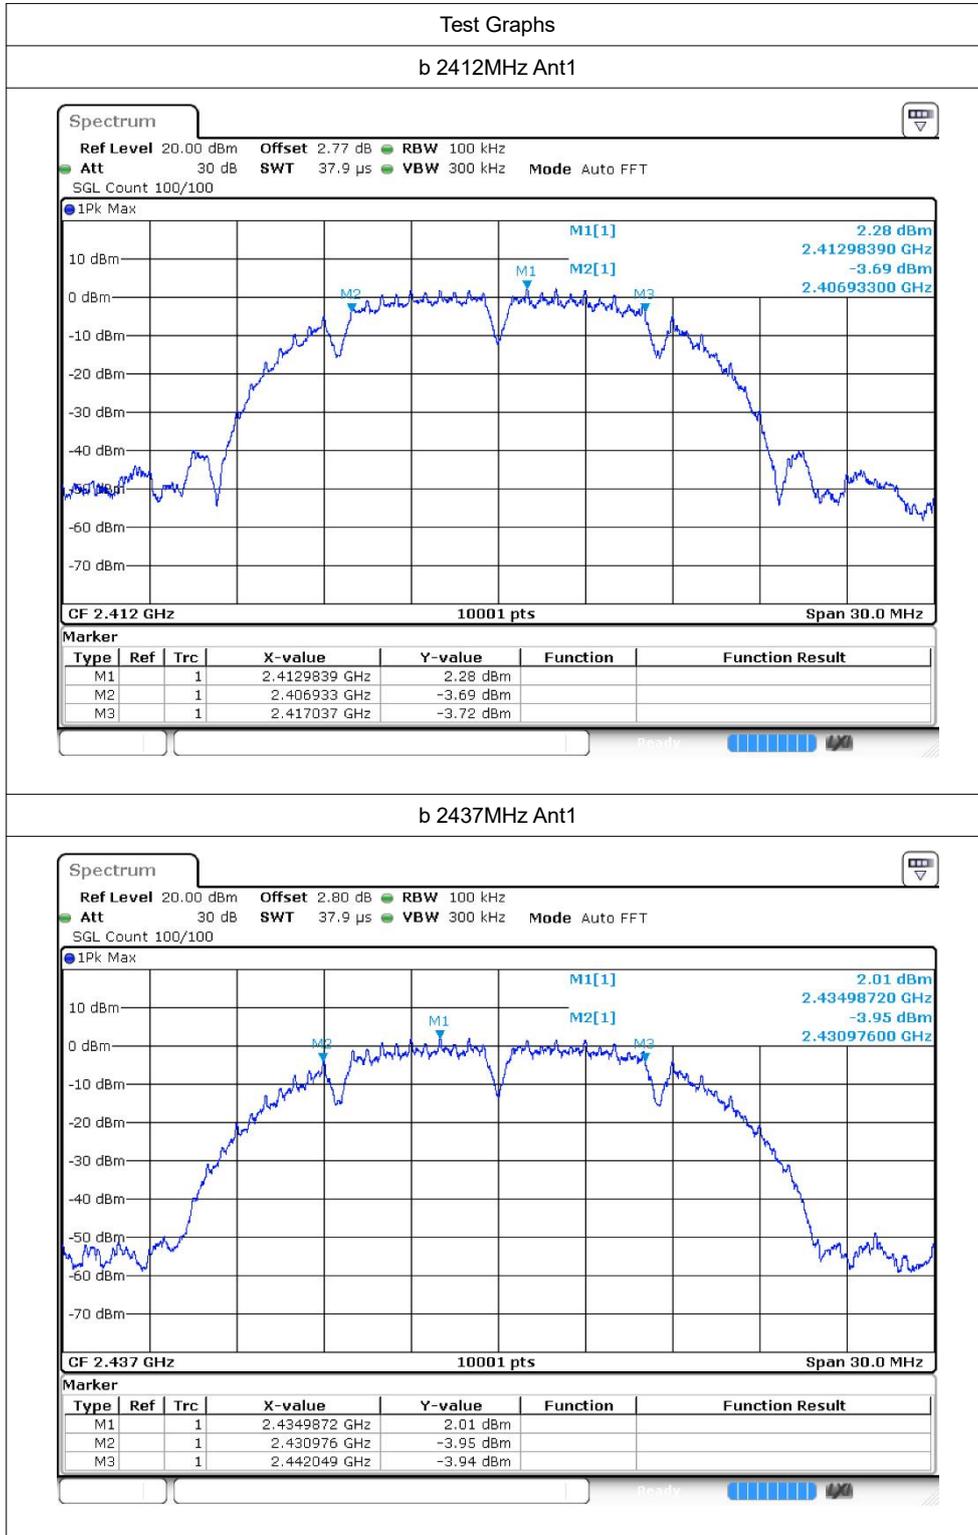

b 2437MHz Ant1

