

Antenna specification


Antenna model: MARB AT V1.0

APplications

※WIFI/Bluetooth Home RF

※ISM band 2.4GHz/5.5GHz applications

1. Dimensions

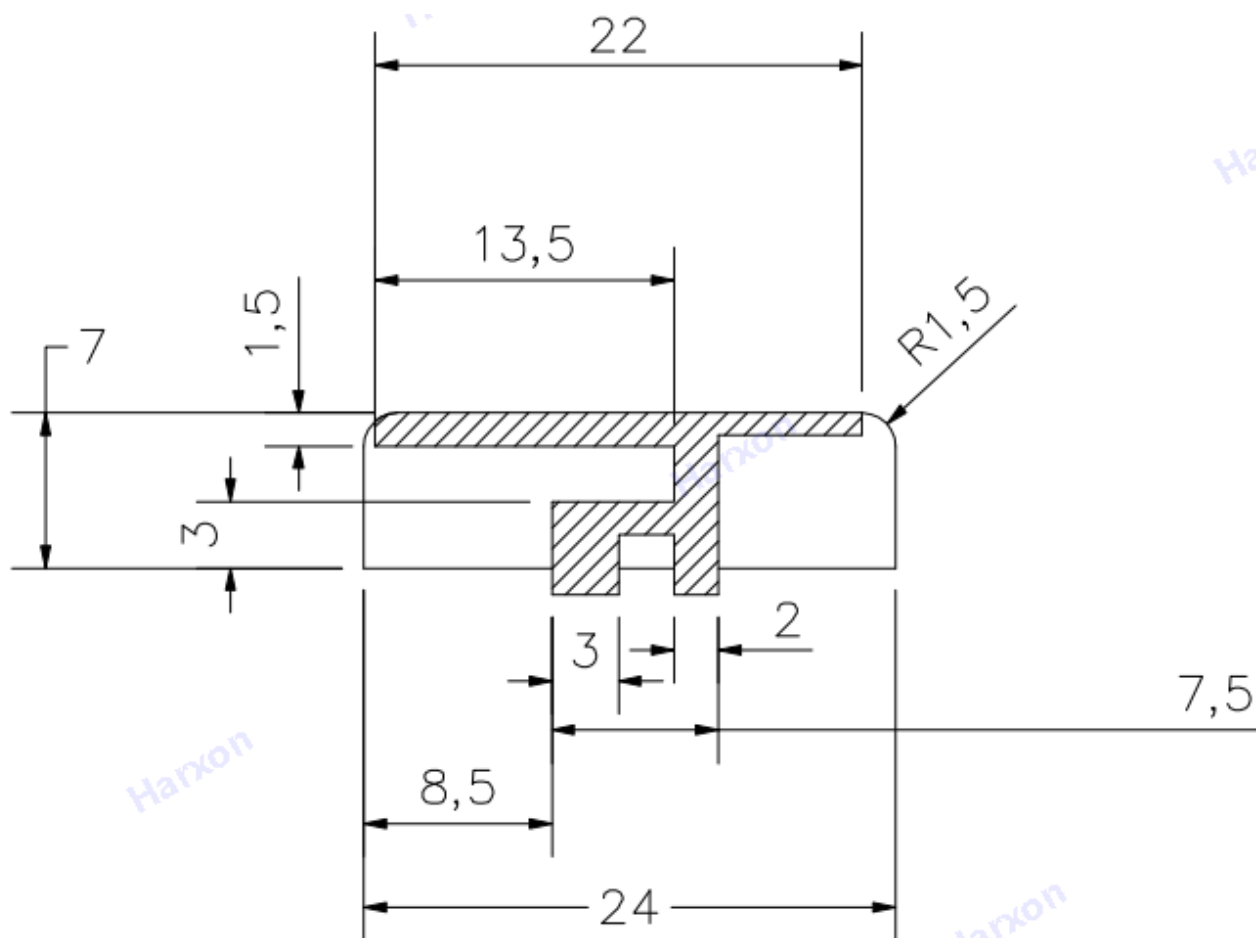

2. Specifications


number	Item	Specifications
--------	------	----------------

1	Working Central Frequency	2441 MHz/5560MHz
2	Band Width	(2402-2480)MHz (5150-5850)MHz
3	Gain	0dBi
4	VSWR	Resonance point $\leq$ 2.0
5	Antenna type	PCB antenna
6	Azimuth Beam width	Omni - directional
7	Impedance	50ohm
8	Modulation mode	GFSK

3. simulation parameter

① VSWR

Mkr1: 2410MHz 1.97 Mkr2: 2450MHz 1.17 Mkr3: 2480 MHz 1.8

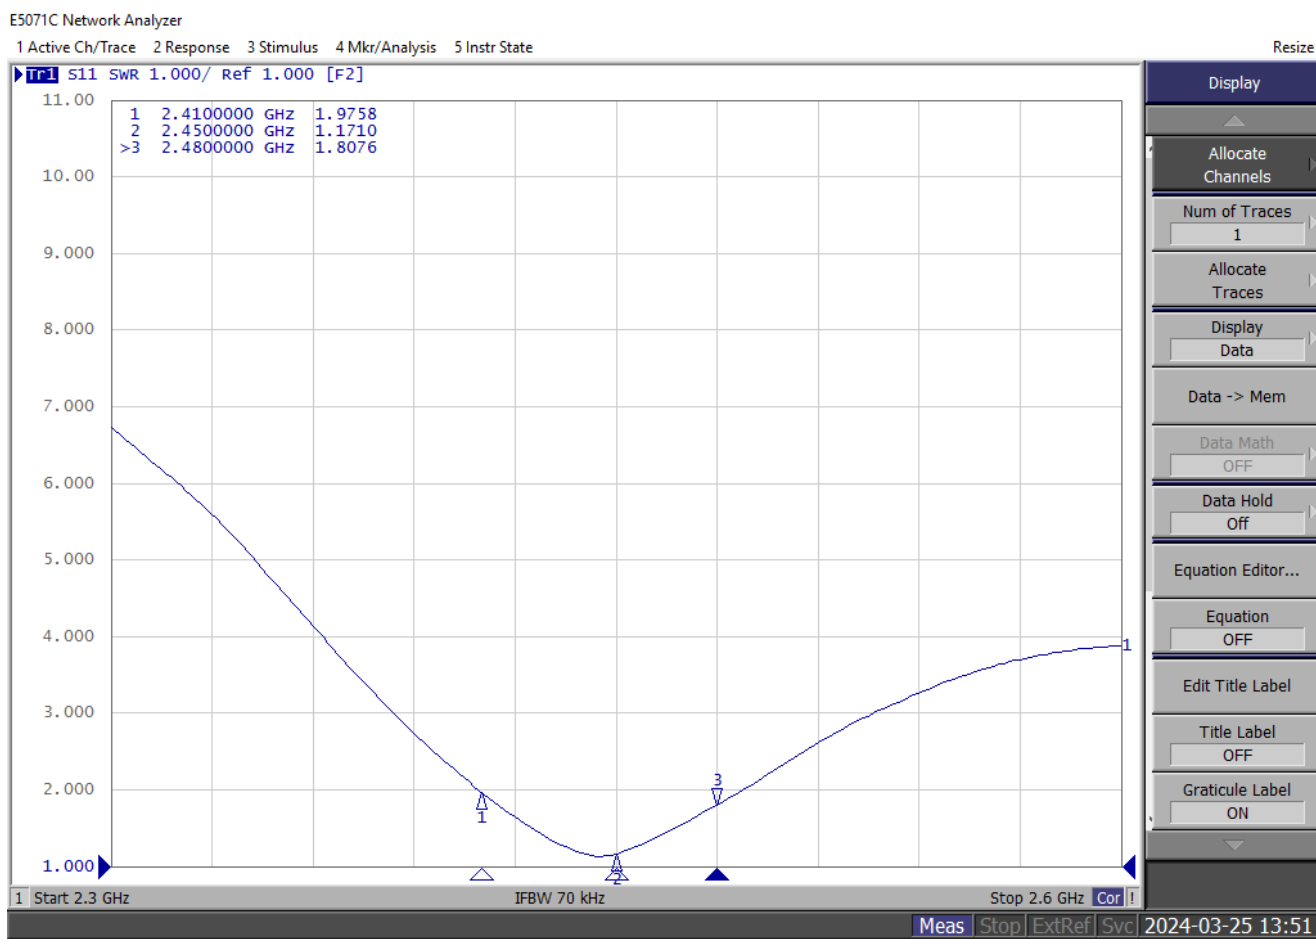

Antenna specification

Doc No. IS-QR-PD-010

Rev. V1.0


Page 4/16

Mkr1: 5150MHz 2.7 Mkr2: 5550MHz 1.57 Mkr3: 5850 MHz 1.84

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

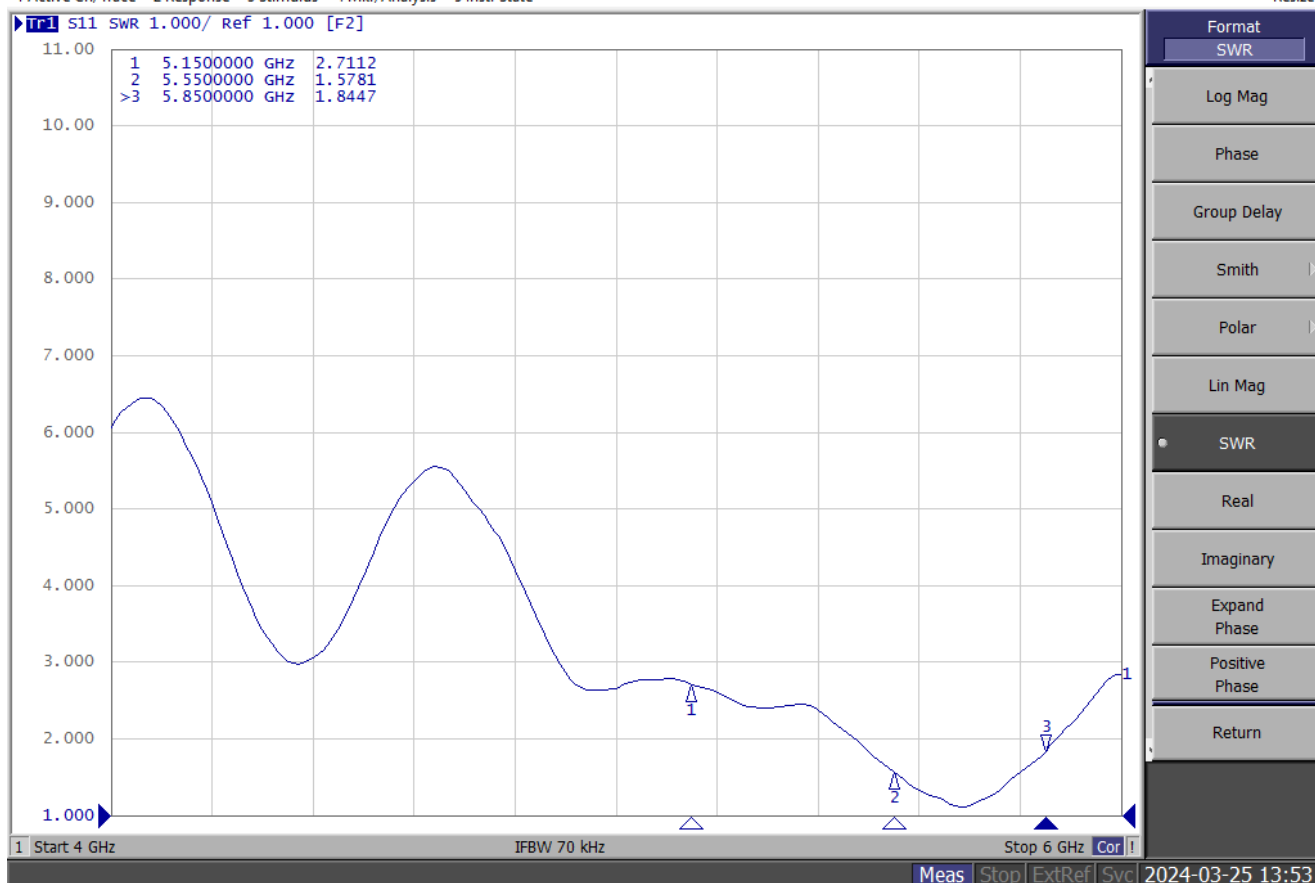


②Smith Chart

Mkr1: 2410MHz 95.1 Mkr2: 2450MHz 43.7 Mkr3: 2480MHz 31.9

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

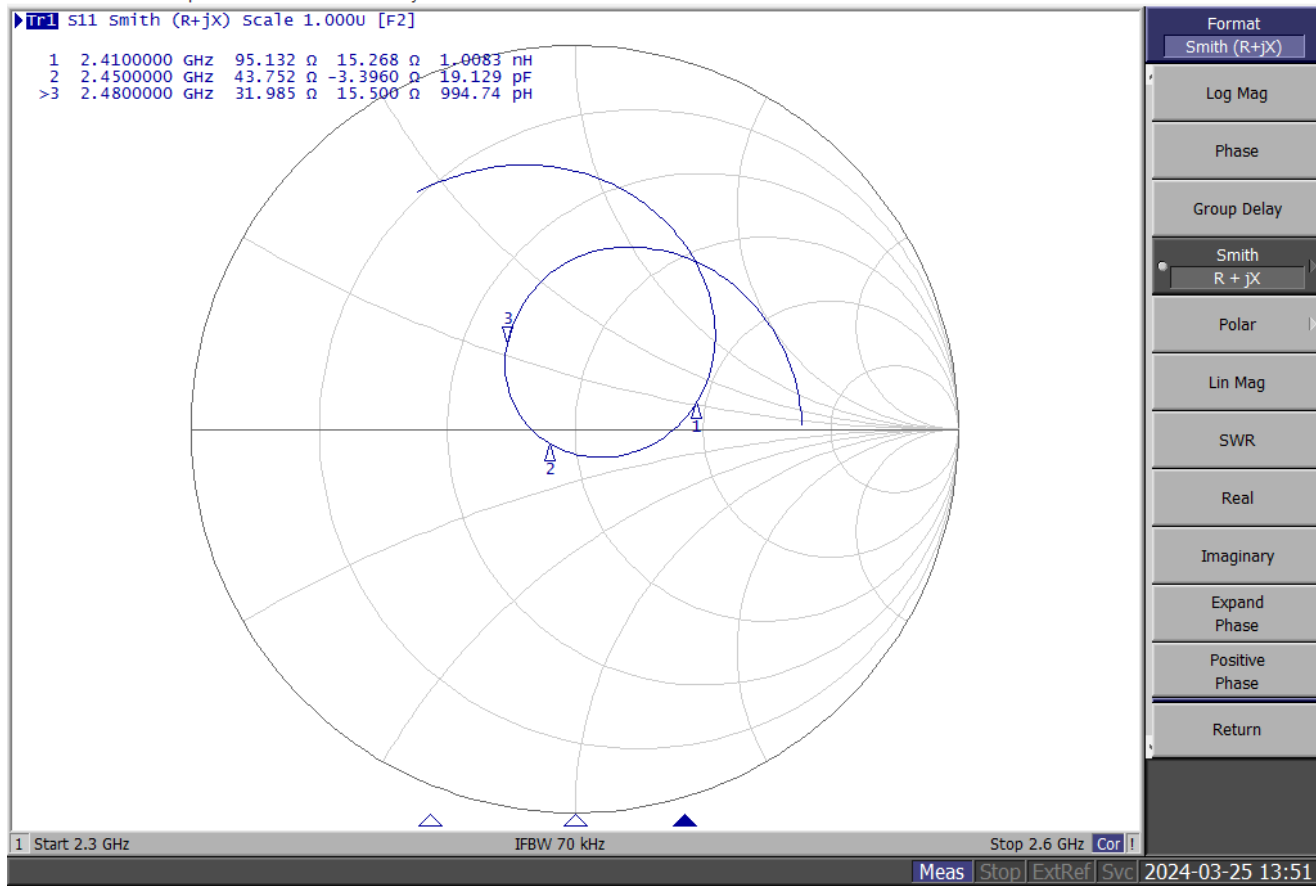

Mkr1: 5150MHz 19.5 Mkr2: 5550MHz 66.2 Mkr3: 5850 MHz 28.1


E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

► **Tr1** S11 Smith (R+jX) Scale 1.000U [F2]

1	5.1500000	GHz	19.508	Ω	-11.300	Ω	2.7348	pF
2	5.5500000	GHz	66.230	Ω	20.638	Ω	591.84	pH
>3	5.8500000	GHz	28.162	Ω	7.5794	Ω	206.20	pH

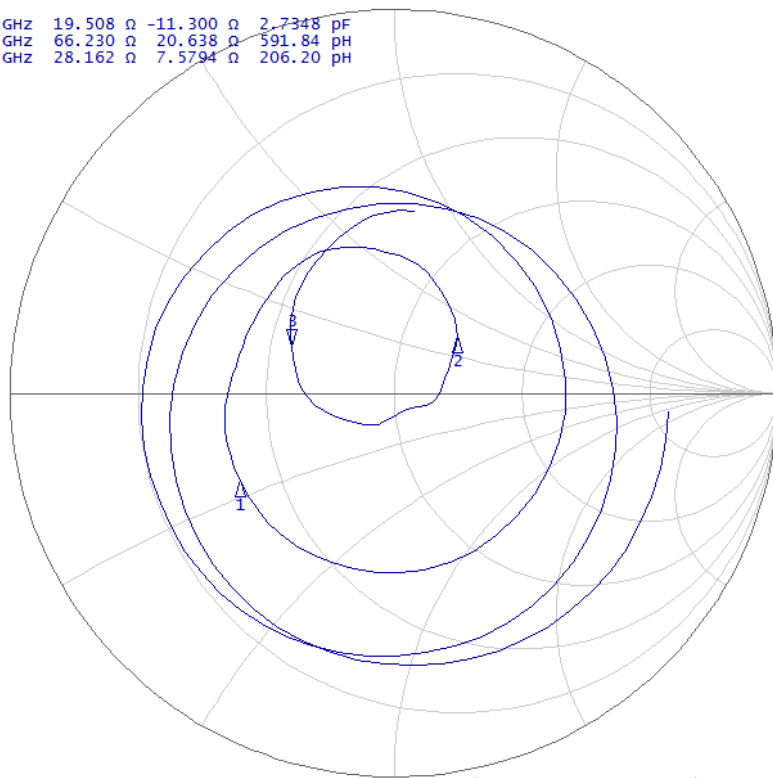

1 Start 4 GHz

IFBW 70 kHz

Stop 6 GHz **Cor** |

Meas Stop ExtRef Svc 2024-03-25 13:53

Format

Smith (R+jX)

Log Mag

Phase

Group Delay

Smith

R + jX

Polar

Lin Mag

SWR

Real

Imaginary

Expand Phase

Positive Phase

Return

③Return Loss

Mkr1: 2410MHz -9.7 Mkr2: 2450MHz -22.4 Mkr3: 2480 MHz -10.9

Antenna specification

Doc No. IS-QR-PD-010


Rev. V1.0

Page 7/16

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

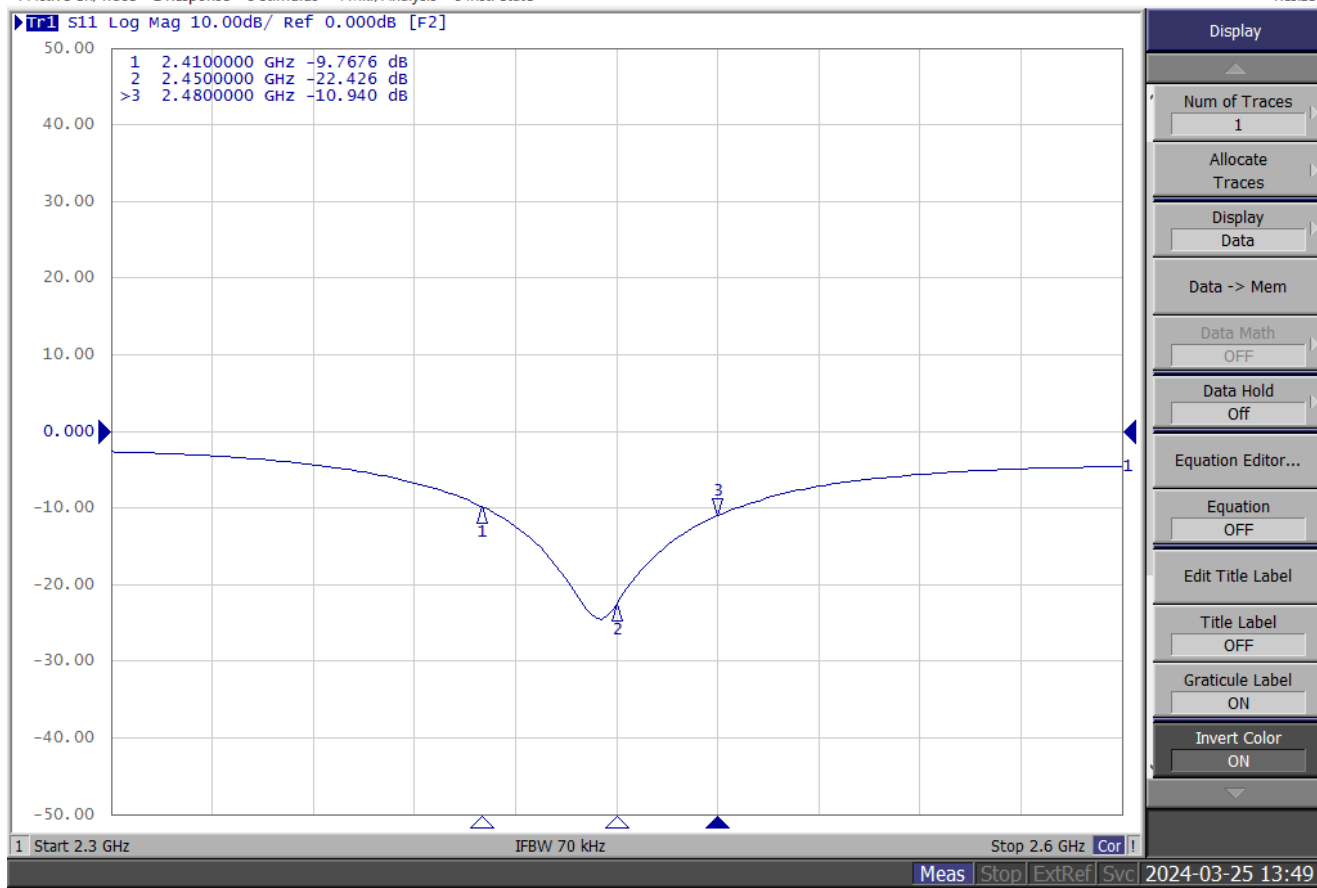


Mkr1: 5150MHz -6.7 Mkr2: 5550MHz -13 Mkr3: 5850 MHz -10.6

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

► Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [F2]

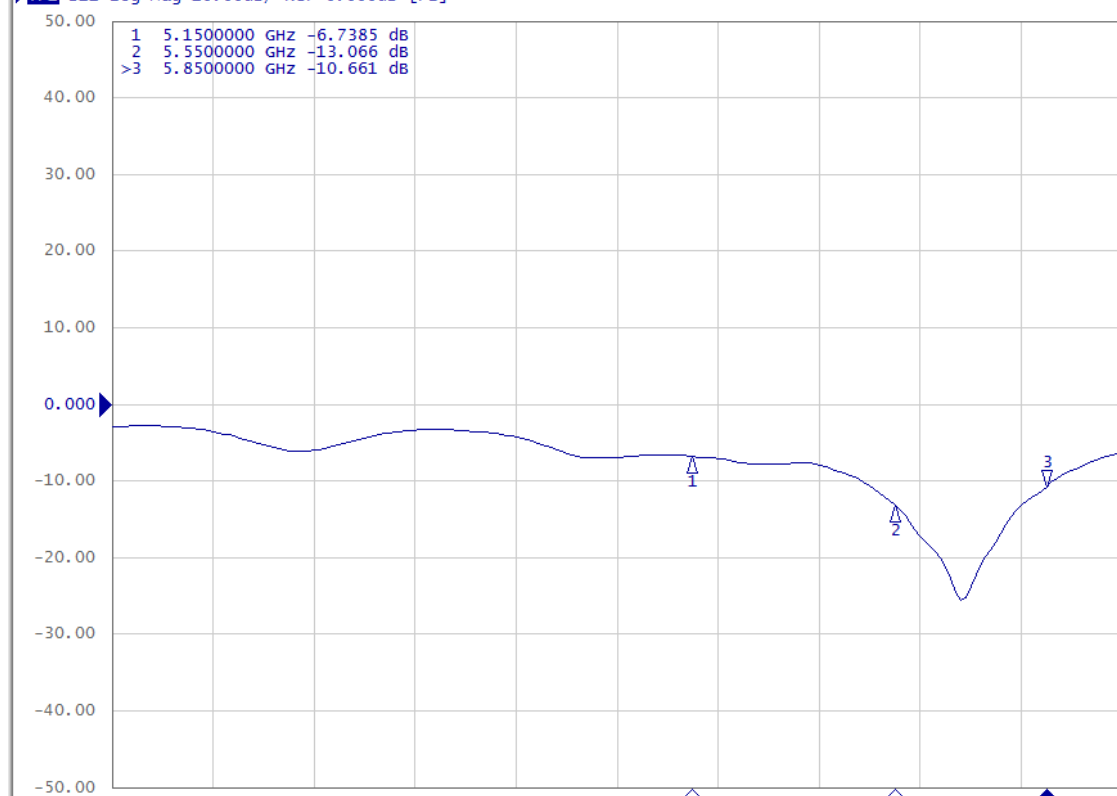

1 Start 4 GHz

IFBW 70 kHz

Stop 6 GHz Cor

Meas Stop ExtRef Svc 2024-03-25 13:52

Resize

Display

Data Hold

Off

Equation Editor...

Equation

OFF

Edit Title Label

Title Label

OFF

Graticule Label

ON

Invert Color

ON

Frequency

ON

Update

ON

Minimize

E5071C

E5071C Title bar

ON

Return

④Smith Chart

Mkr1: 2410MHz -9.6 Mkr2: 2450MHz -21.9 Mkr3: 2480 MHz -10.8


E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

► S11 Smith (Log/Phase) Scale 1.000u [F2]

1 2.410000 GHz -9.6487 dB 12.405 °
2 2.450000 GHz -21.966 dB -149.11 °
>3 2.480000 GHz -10.825 dB 128.26 °

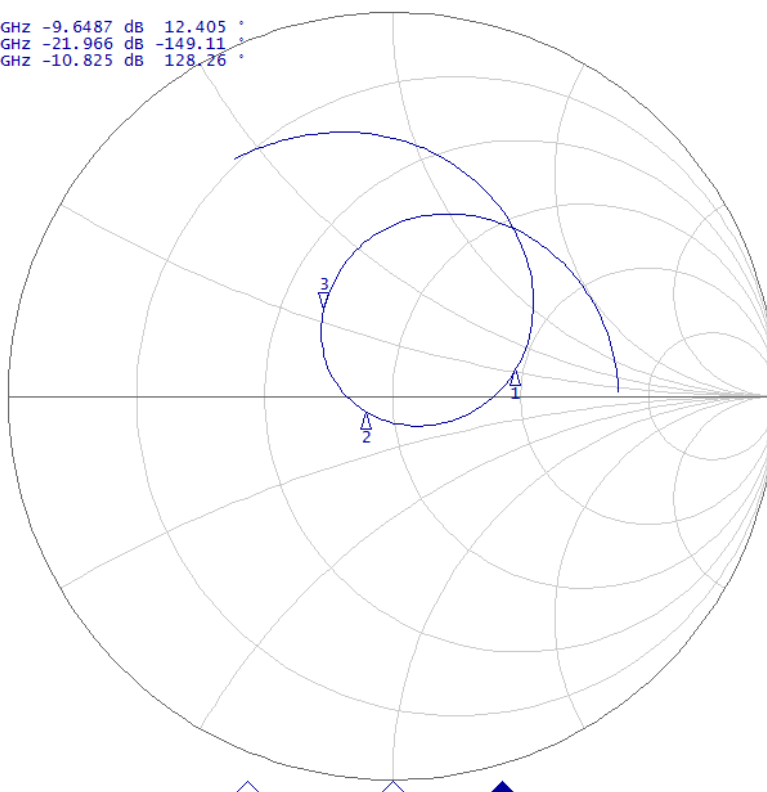

1 Start 2.3 GHz

IFBW 70 kHz

Stop 2.6 GHz Cor I


Meas Stop ExtRef Svc 2024-03-25 13:52

Mkr1: 5150MHz -17.3 Mkr2: 5550MHz -11.4 Mkr3: 5850 MHz -11.6

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

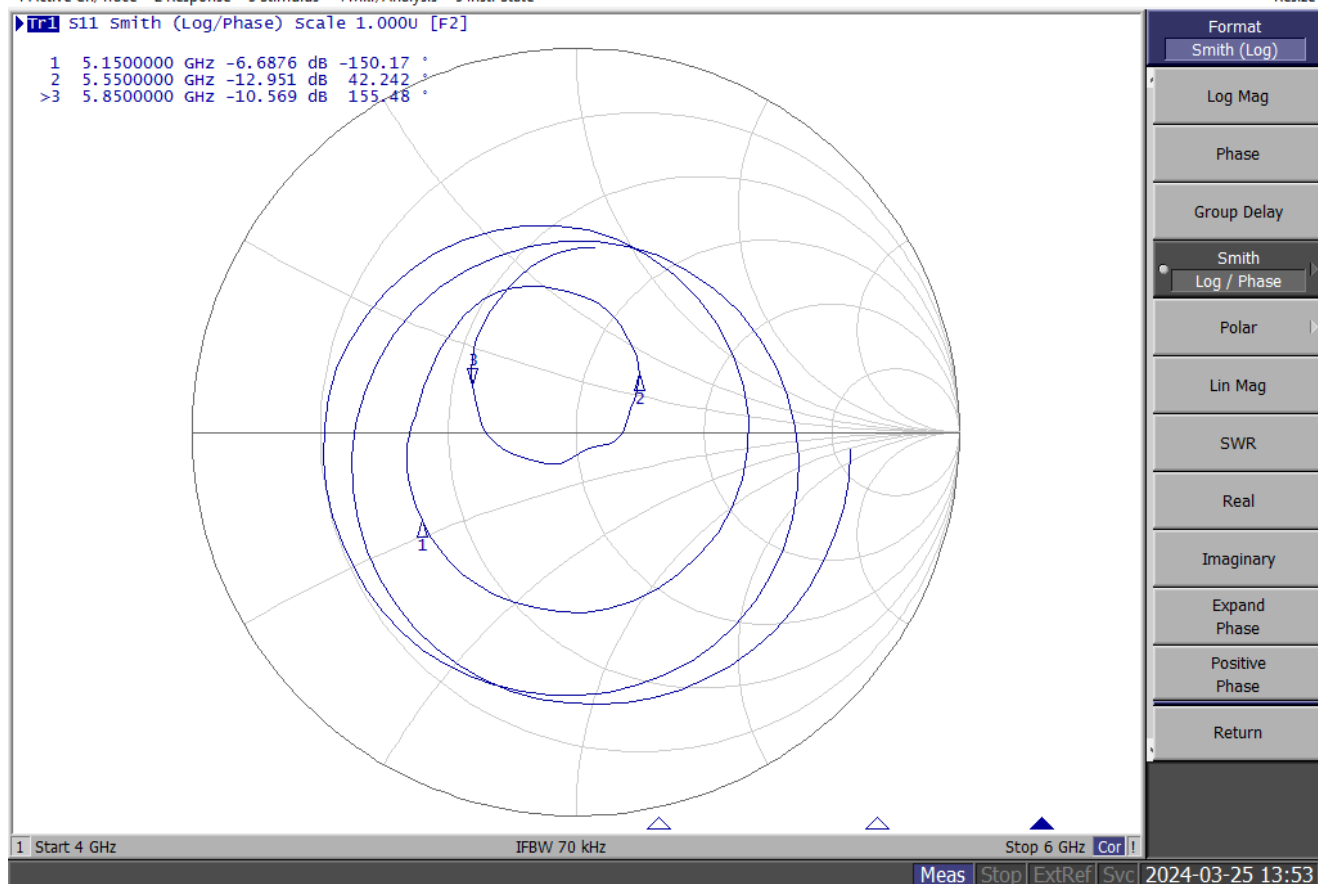

⑤Phase

Mkr1: 2410MHz 59 Mkr2: 2450MHz -98 Mkr3: 2480MHz 174

Antenna specification

Doc No. IS-QR-PD-010

Rev. V1.0

Page 11/16

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State


Resize



Mkr1: 5180MHz -69.1 Mkr2: 5560MHz 128.6 Mkr3: 5825 MHz -115.2

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

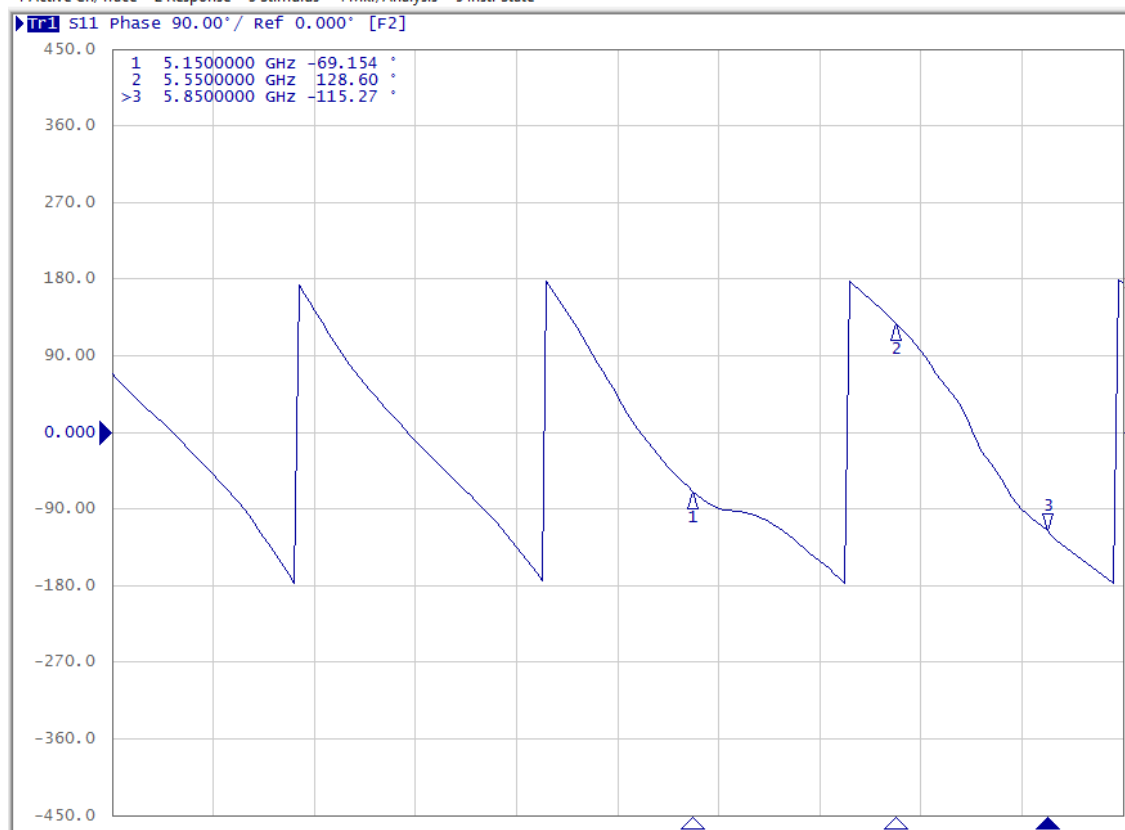

1 Start 4 GHz

IFBW 70 kHz

Stop 6 GHz Cor I

Meas Stop ExtRef Svc 2024-03-25 14:27

Display

Data Hold
Off

Equation Editor...

Equation
OFF

Edit Title Label

Title Label
OFF

Graticule Label

ON

Invert Color
ON

Frequency
ON

Update
ON


Minimize
E5071C

E5071C Title bar


ON

Return

4. Radiation Patterns

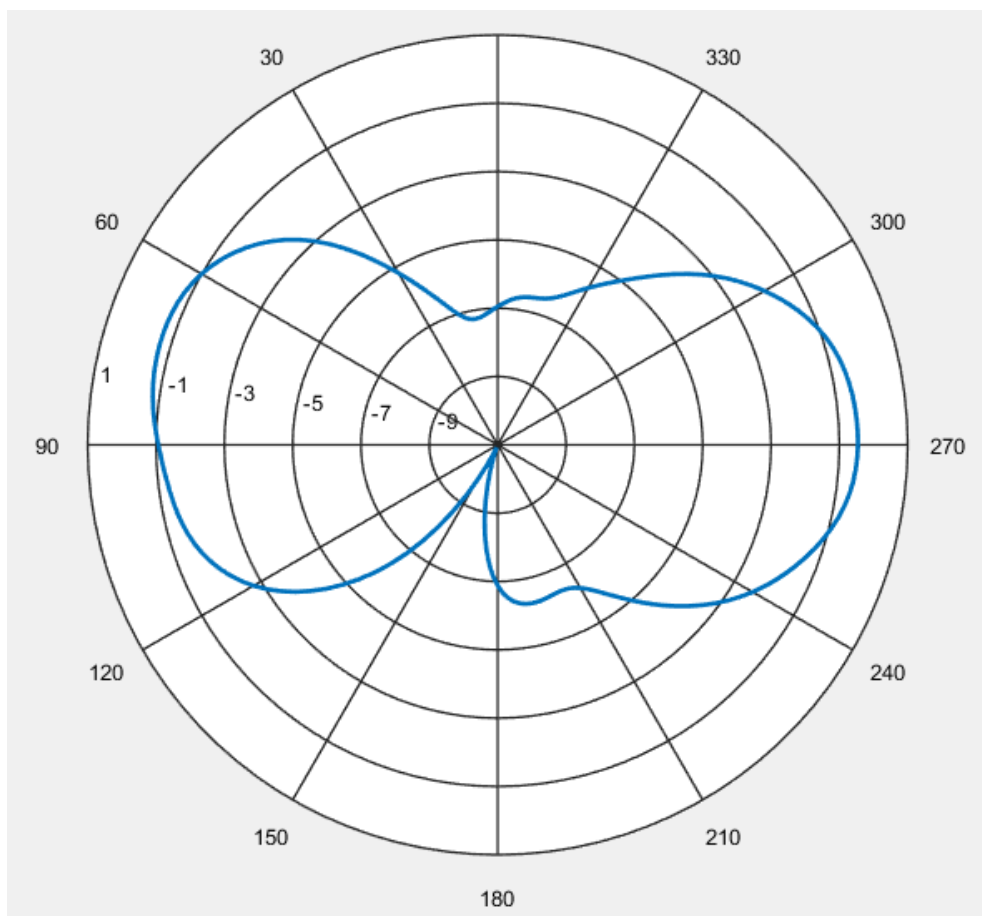


2450MHz

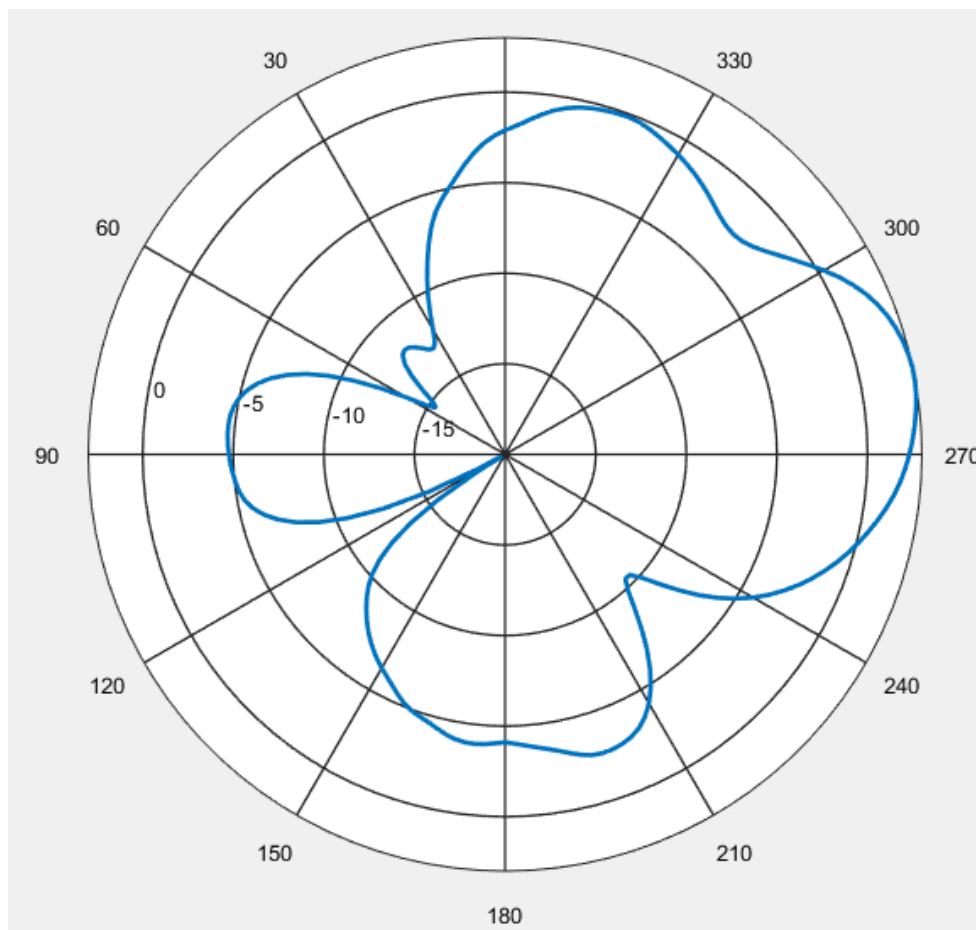


5550MHz

- 3D Radiation patterns

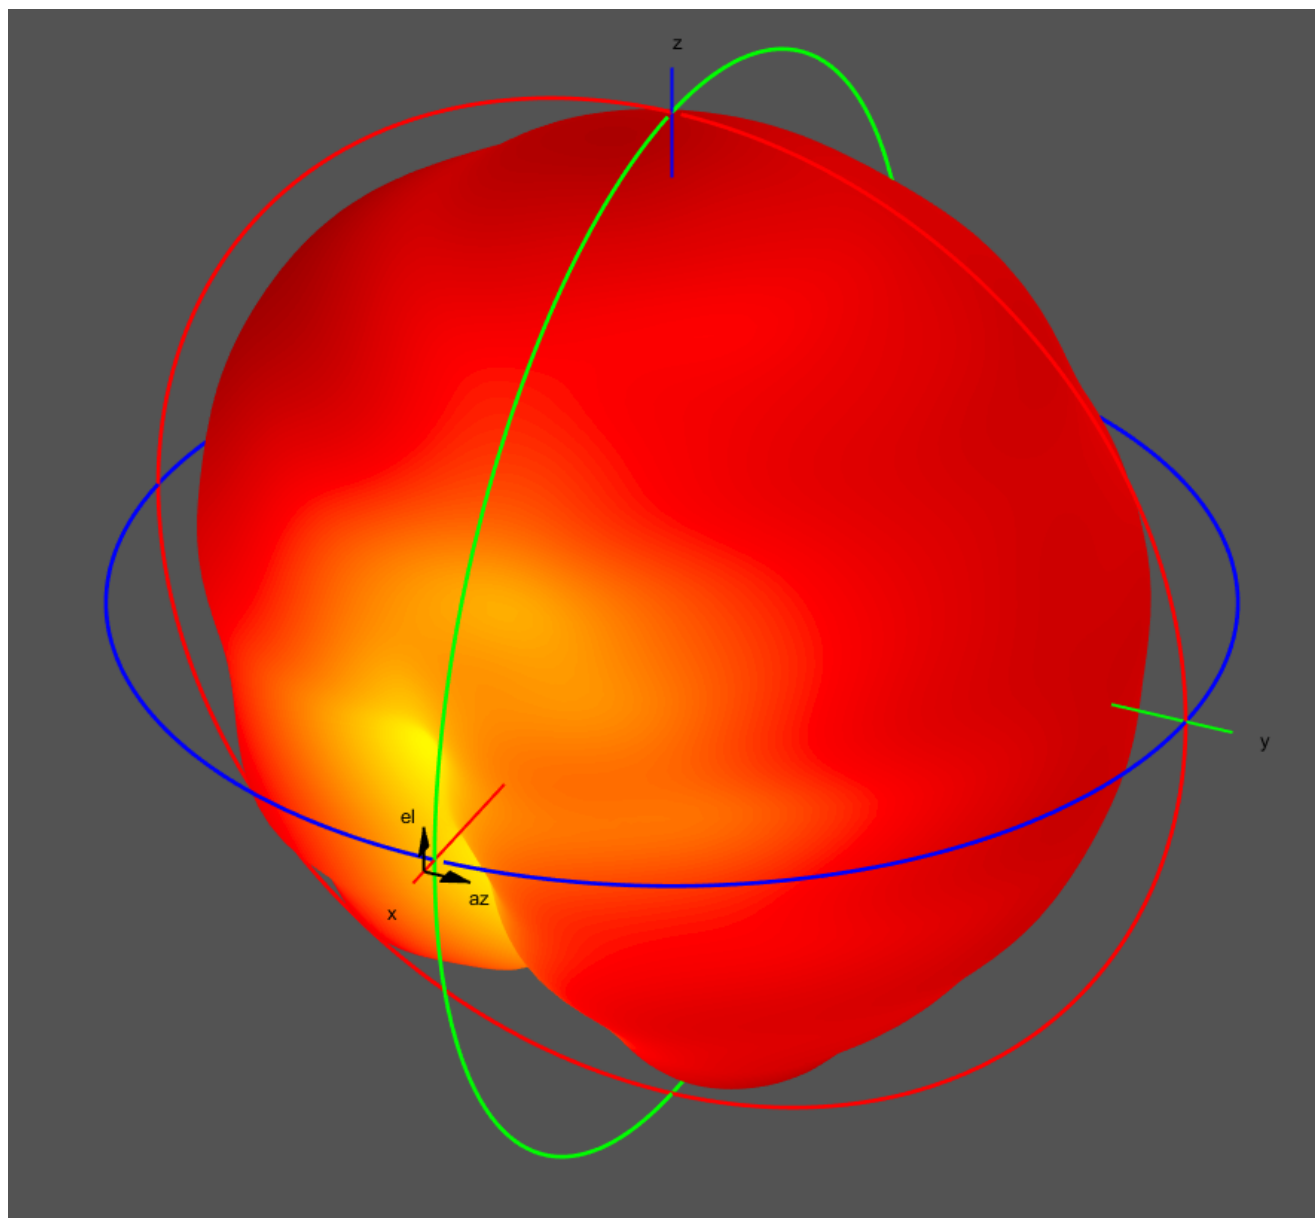

2450MHz

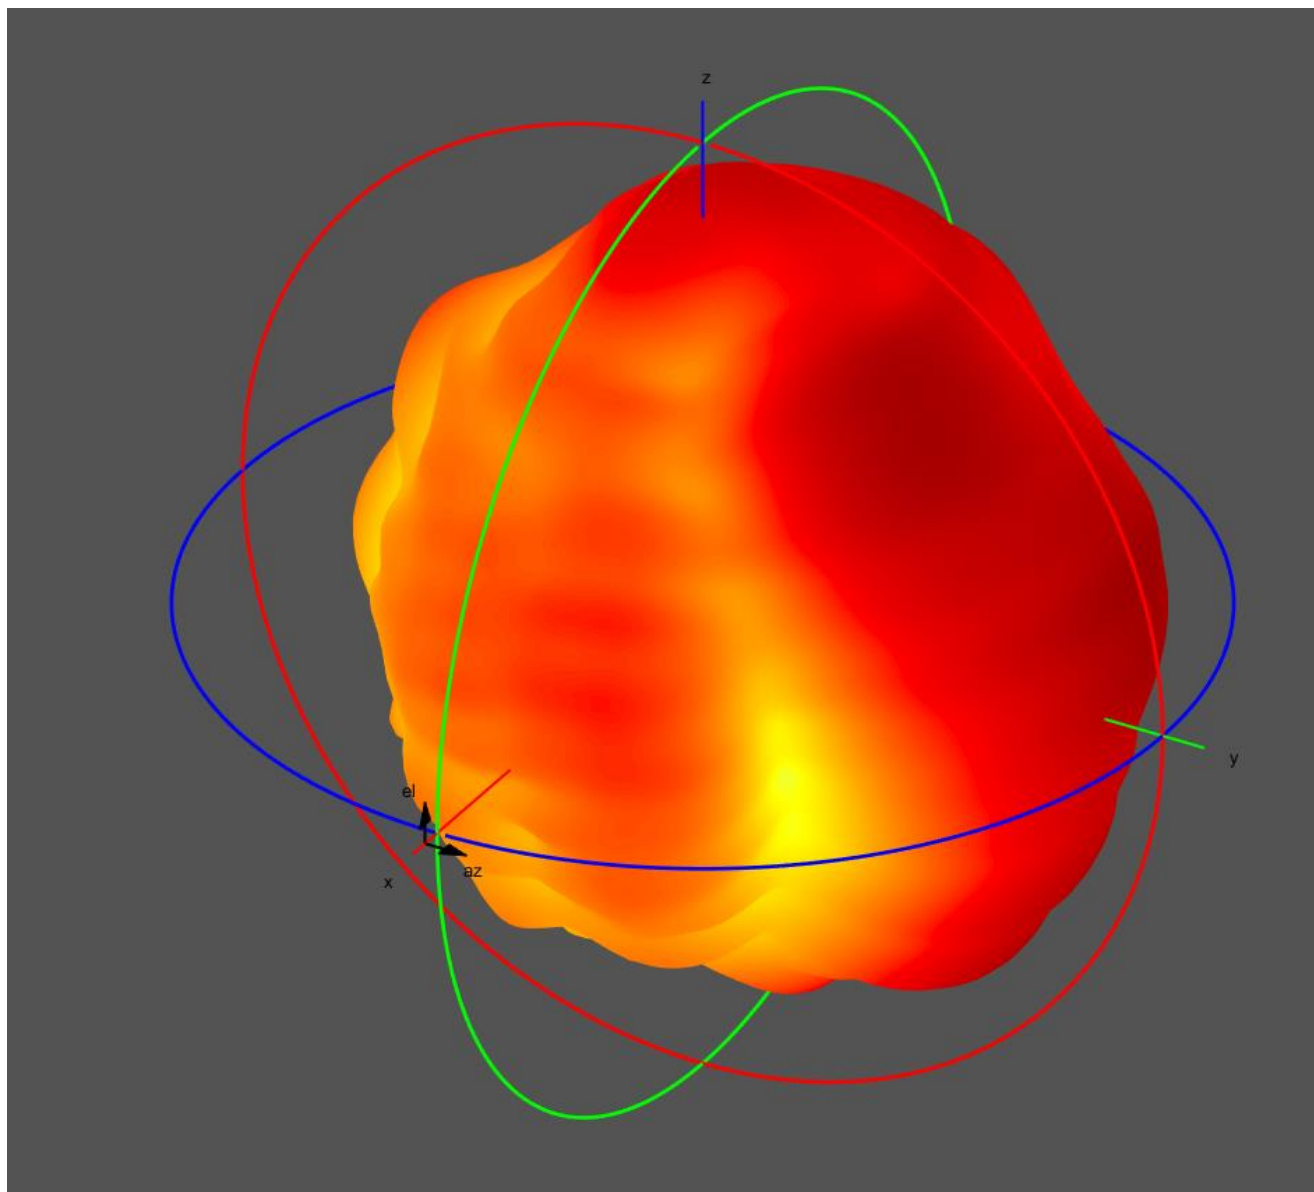

5550MHz