

FCC TEST REPORT

FCC ID: 2A9JR-EAP-CP8

Report Number..... : ZKT-220920L7016-02

Date of Test..... Aug. 25, 2022 -- Dec. 05, 2022

Date of issue : Dec. 05, 2022

Total number of pages : 333

Test Result : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Shanghai Cross Stars Cultural Technology LLC., Co.

Address : Floor 3, building 7, block chain ecological Valley, Jing'an District, Shanghai,P.R.China

Manufacturer's name : Shanghai Cross Stars Cultural Technology LLC., Co.

Address : Floor 3, building 7, block chain ecological Valley, Jing'an District, Shanghai,P.R.China

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart E Section 15.407
ANSI C63.10:2013

Test procedure..... : KDB 789033 D02 V01r02

Non-standard test method : N/A

Test Report Form No. : TRF-EL-110_V0

Test Report Form(s) Originator : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Communication Port

Trademark : N/A

Model/Type reference : EAP-CP8

Ratings..... : DC 48V/0.53A

Testing procedure and testing location:**Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.****Address..... : 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China****Tested by (name + signature) : Alen He****Reviewer (name + signature)..... : Joe Liu****Approved (name + signature) : Lake Xie**

Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULT	14
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 TEST RESULTS	19
5.POWER SPECTRAL DENSITY TEST	72
5.1 APPLIED PROCEDURES / LIMIT	72
5.2 TEST PROCEDURE	72
5.3 DEVIATION FROM STANDARD	72
5.4 TEST SETUP	72
5.5 EUT OPERATION CONDITIONS	72
5.6 TEST RESULT	73
6. -26 DB & 6DBM EMISSION BANDWIDTH	74
6.1 APPLIED PROCEDURES / LIMIT	74
6.2 TEST PROCEDURE	74
6.3 DEVIATION FROM STANDARD	74
6.4 TEST SETUP	74
6.5 EUT OPERATION CONDITIONS	74

6.6 TEST RESULT	74
7. OUTPUT POWER TEST	75
7.1 APPLIED PROCEDURES/LIMIT	75
7.2 DEVIATION FROM STANDARD	75
7.3 TEST SETUP	75
7.4 EUT OPERATION CONDITIONS	75
7.5 TEST RESULT	75
8. OUT OF BAND EDGE EMISSION	76
8.1 TEST PROCEDURE	76
8.2 DEVIATION FROM STANDARD	76
8.3 TEST SETUP	76
8.4 EUT OPERATION CONDITIONS	76
8.5 TEST RESULTS	76
9. FREQUENCY STABILITY MEASUREMENT	77
9.1 LIMIT	77
9.2 TESTPROCEDURE	77
9.3 TESTCONFIGURATION	77
9.4 TEST RESULT	77
10.ANTENNA REQUIREMENT	86
11. APPENDIX1---5.2GWIFI	87
12 APPENDIX1---5.8GWIFI	209
13.TEST SETUP PHOTO	332
14. EUT CONSTRUCTIONAL DETAILS	333

1. VERSION

Report No.	Version	Description	Approved
ZKT-220920L7016-02	Rev.01	Initial issue of report	Dec. 05, 2022

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.407 (a) (b)	Spurious Radiated Emissions and Band Edge	PASS	
15.407 (e) /15.407a	6 dB bandwidth, 26dB Emission Bandwidth& 99% Occupied Bandwidth	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407 (a)(1)(2)(3)	Maximum conducted output power	PASS	
15.407 (g)	Frequency Stability	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	tem	ncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59℃
9	Radiated disturbance(30MHz-1000MHz)	U=4.8dB
10	Radiated disturbance(1GHz-6GHz)	U=4.9dB
11	Radiated disturbance(1GHz-18GHz)	U=5.0dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Communication Port
Model No.:	EAP-CP8
Hardware Version:	N/A

Software Version:	N/A		
Sample(s) Status:	Engineer sample		
	IEEE802.11 WLAN mode supported	802.11a/n/ac/ax(20MHz channel bandwidth) 802.11n/ ac/ax (40MHz channel bandwidth) 802.11 ac /ax(80MHz channel bandwidth)	
	Date rate	802.11ax:MCS0-MCS11 802.11ac:MCS0-MCS9 802.11n: MCS0-MCS7	
	Modulation	OFDM	
	U-NII-1	Frequency Range	802.11a/n/ac/ax(20MHz) : 5180-5240MHz 802.11n/ac/ax (40MHz) : 5190-5230MHz 802.11 ac/ax (80MHz) : 5210MHz
		Channels	802.11 a/n/ac/ax (20MHz): 4 802.11 ac /n (40MHz): 2 802.11 ac/ax(80MHz): 1
	U-NII-3	Frequency Range	802.11 a/n/ac/ax(20MHz) : 5745-5825 MHz 802.11 n/ac/ax (40MHz): 5755-5795 MHz 802.11 ac/ax (80MHz): 5775 MHz
		Channels	802.11 a/n/ac/ax(20MHz) : 5 802.11 n/ac/ax (40MHz): 2 802.11 ac/ax (80MHz): 1
Antenna Type:	omni antenna		
Antenna gain:	ANT1: 12.04dBi ; ANT2: 12.29dBi ; ANT3: 8.94dBi; ANT4: 9.14 dBi ; ANT5:9.80 dBi ; ANT6: 9.94 dBi MIMO: 18.24dBi		
Power supply:	DC 48V/0.53A		

Note: MIMO Gain= $10 \cdot \log[(10^{G_{1/20}} + 10^{G_{2/20}} + \dots) / N_{\text{ant}}]$ dBi

U-NII-1		U-NII-3	
CH.	Frequency (MHz)	CH.	Frequency (MHz)
36	5180	149	5745
40	5200	...	...
44	5220	157	5785
48	5240	...	...
		165	5825

802.11a/n/ac/ax (20MHz) Frequency / Channel Operations

U-NII-1		U-NII-3	
CH.	Frequency (MHz)	CH.	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795

802.11n /ac/ ax(40MHz BW) Frequency / Channel Operations

U-NII-1		U-NII-3	
CH.	Frequency (MHz)	CH.	Frequency (MHz)
42	5210	155	5775

802.11ac/ax (80MHz BW) Frequency / Channel Operations

3.2 DESCRIPTION OF TEST MODES

Worst Case Configuration: transmitting both 2.4GHz mode and 5GHz mode

Description	5 GHz Emission
Antenna	MIMO
Channel	38
Operating Frequency (MHz)	802.11N
Data Rate (Mbps)	OFDM/13.5Mbps
Mode	Band I –N-5180MHz

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	PC	HP	HP40		Provide by lab

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 18, 2021	Oct. 16, 2022
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 17, 2021	Oct. 16, 2022
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 18, 2021	Oct. 16, 2022
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 17, 2021	Oct. 16, 2022
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Oct. 17, 2021	Oct. 16, 2022
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 17, 2021	Oct. 16, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Oct. 17, 2021	Oct. 16, 2022
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 18, 2021	Oct. 16, 2022
9	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Oct. 18, 2021	Oct. 16, 2022
10	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Oct. 18, 2021	Oct. 16, 2022
11	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Oct. 18, 2021	Oct. 16, 2022
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 18, 2021	Oct. 16, 2022
13	Signal Generator	Agilent	N5182A	N/A	Oct. 22, 2021	Oct. 21, 2022
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 17, 2021	Oct. 16, 2022
15	MWRP Power Meter Test system	MW	MW100-RPCB	N/A	Oct. 22, 2021	Oct. 21, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
17	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
18	RF Software	MW	MTS8310	V2.0.0.0	\	\
19	Turntable	MF	MF-7802BS	N/A	\	\
20	Antenna tower	MF	MF-7802BS	N/A	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 22, 2021	Oct. 21, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 22, 2021	Oct. 21, 2022
3	Test Cable	N/A	C01	N/A	Oct. 18, 2021	Oct. 16, 2022
4	Test Cable	N/A	C02	N/A	Oct. 18, 2021	Oct. 16, 2022
5	EMI Test Receiver	R&S	ESCI3	101393	Oct. 17, 2021	Oct. 16, 2022
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 16, 2022	Oct. 15, 2023
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 15, 2022	Oct. 14, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 16, 2022	Oct. 15, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 15, 2022	Oct. 14, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Oct. 15, 2022	Oct. 14, 2023
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 15, 2022	Oct. 14, 2023
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Oct. 15, 2022	Oct. 14, 2023
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 16, 2022	Oct. 15, 2023
9	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Oct. 16, 2022	Oct. 15, 2023
10	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Oct. 16, 2022	Oct. 15, 2023
11	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Oct. 16, 2022	Oct. 15, 2023
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 16, 2022	Oct. 15, 2023
13	Signal Generator	Agilent	N5182A	N/A	Oct. 20, 2022	Oct. 19, 2023
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 15, 2022	Oct. 14, 2023
15	MWRF Power Meter Test system	MW	MW100-RPCB	N/A	Oct. 20, 2022	Oct. 19, 2023
16	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
17	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
18	RF Software	MW	MTS8310	V2.0.0.0	\	\
19	Turntable	MF	MF-7802BS	N/A	\	\
20	Antenna tower	MF	MF-7802BS	N/A	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 20, 2022	Oct. 19, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 20, 2022	Oct. 19, 2023
3	Test Cable	N/A	C01	N/A	Oct. 16, 2022	Oct. 15, 2023
4	Test Cable	N/A	C02	N/A	Oct. 16, 2022	Oct. 15, 2023
5	EMI Test Receiver	R&S	ESCI3	101393	Oct. 15, 2022	Oct. 14, 2023
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.e.
8. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

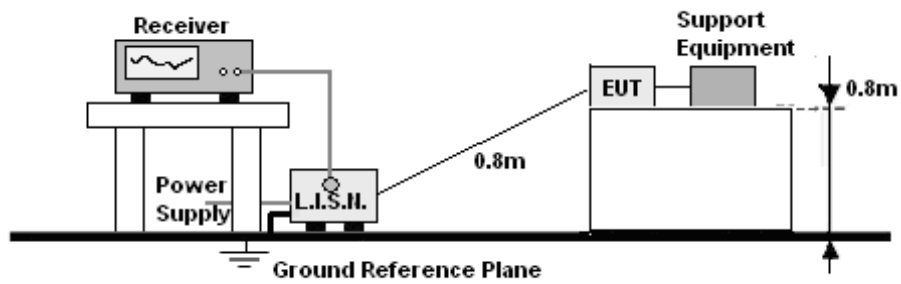


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V , the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULT

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC120V 60Hz		

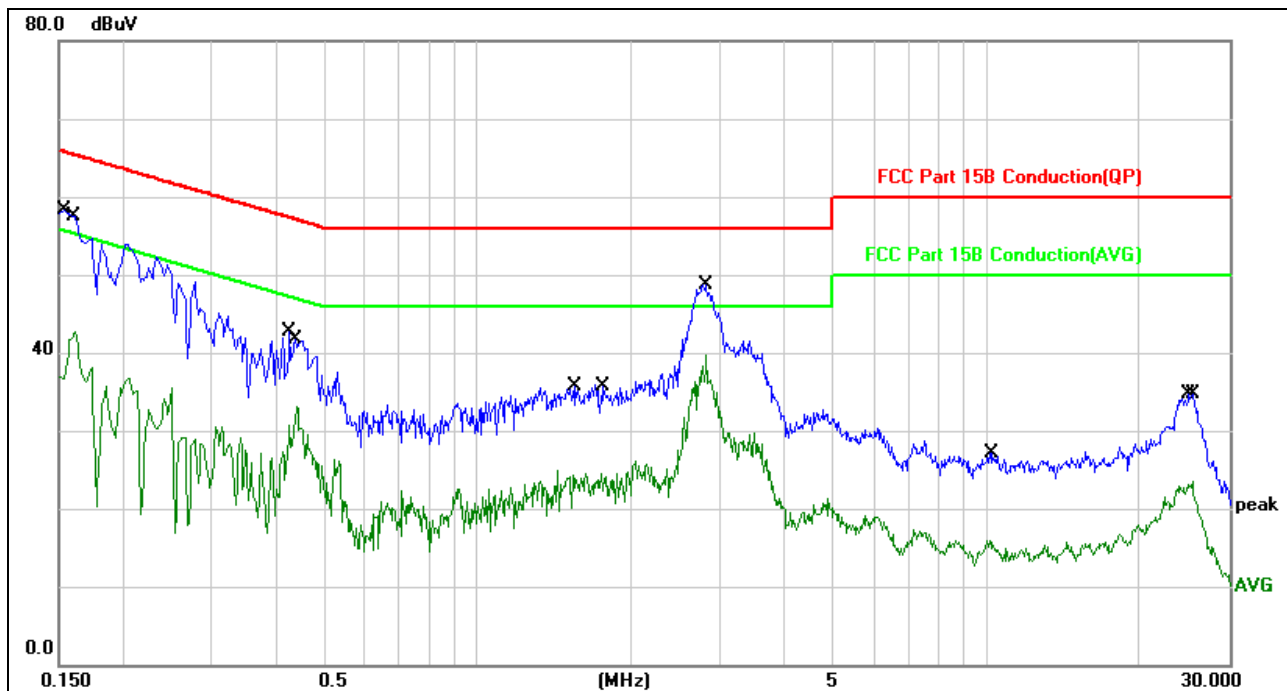


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1539	48.26	10.05	58.31	65.78	-7.47	QP	
2	0.1620	32.56	10.06	42.62	55.36	-12.74	AVG	
3	0.4260	32.54	10.20	42.74	57.33	-14.59	QP	
4	0.4420	22.86	10.20	33.06	47.02	-13.96	AVG	
5	1.5460	25.52	10.09	35.61	56.00	-20.39	QP	
6	1.7460	14.39	10.07	24.46	46.00	-21.54	AVG	
7	2.8020	38.76	9.96	48.72	56.00	-7.28	QP	
8 *	2.8100	29.71	9.95	39.66	46.00	-6.34	AVG	
9	10.1340	5.90	9.98	15.88	50.00	-34.12	AVG	
10	10.2460	17.18	10.00	27.18	60.00	-32.82	QP	
11	25.0500	24.90	9.73	34.63	60.00	-25.37	QP	
12	25.3460	13.87	9.73	23.60	50.00	-26.40	AVG	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC120V 60Hz		

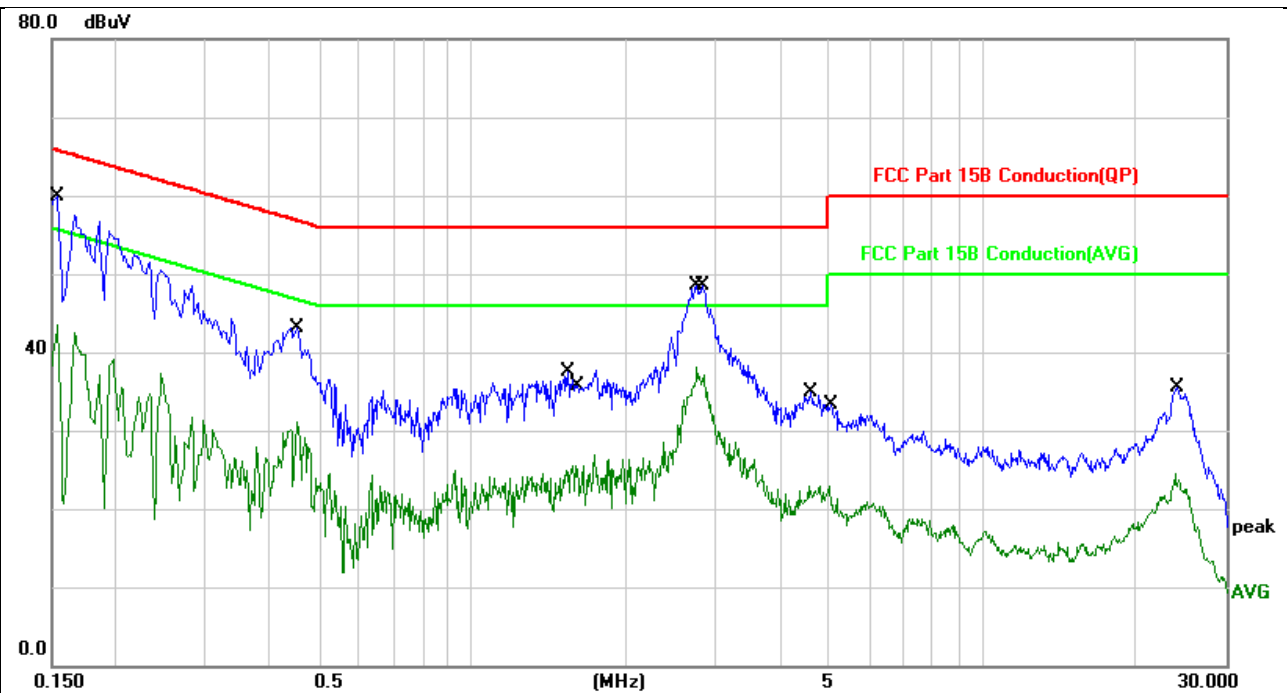

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1532	49.90	10.05	59.95	65.82	-5.87	QP	
2		0.1539	33.48	10.05	43.53	55.78	-12.25	AVG	
3		0.4540	32.93	10.20	43.13	56.80	-13.67	QP	
4		0.4540	20.80	10.20	31.00	46.80	-15.80	AVG	
5		1.5380	27.30	10.10	37.40	56.00	-18.60	QP	
6		1.5980	15.50	10.09	25.59	46.00	-20.41	AVG	
7		2.7620	28.23	9.97	38.20	46.00	-7.80	AVG	
8		2.8300	38.65	9.94	48.59	56.00	-7.41	QP	
9		4.6140	25.06	9.91	34.97	56.00	-21.03	QP	
10		5.0140	13.00	9.97	22.97	50.00	-27.03	AVG	
11		23.8580	14.67	9.74	24.41	50.00	-25.59	AVG	
12		24.0459	25.78	9.74	35.52	60.00	-24.48	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case- MIMO (5.2G-802.11ax-ax20 lowchannel)

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

1. Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cable and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.
2. For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz .
3. For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.
4. For transmitters operating in the 5470-5600 MHz and 5650-5725 MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz .
5. KDB789033v02r01G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are out side of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	$2400/F(\text{KHz})$	300
0.490~1.705	$24000/F(\text{KHz})$	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre (Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

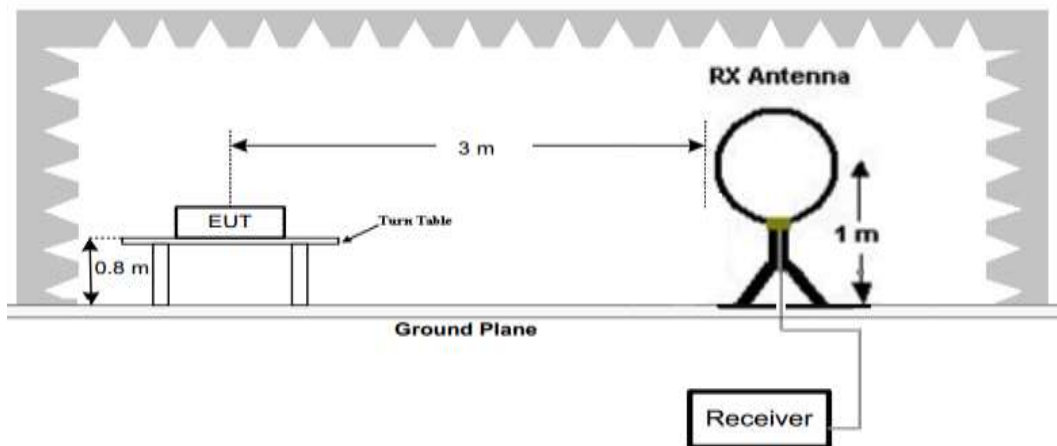

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

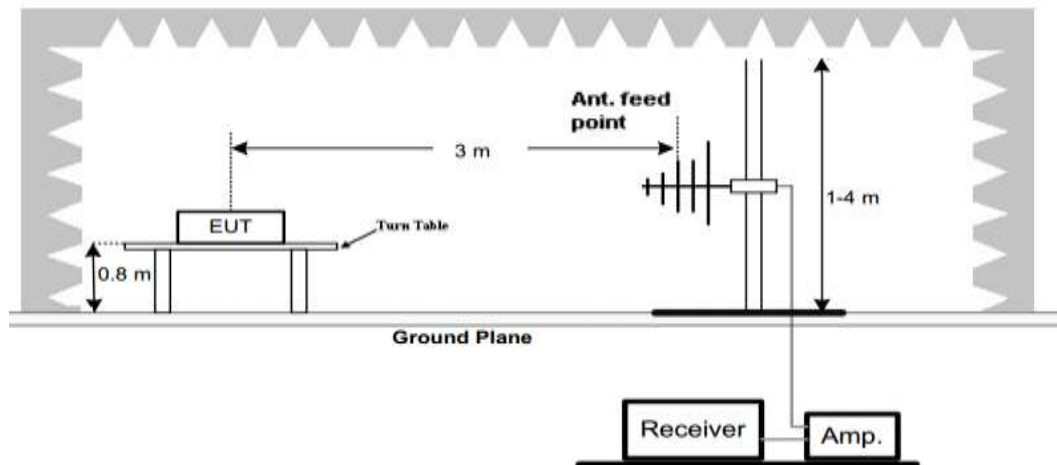

(C) Radiated Emission Test-Up Frequency Above 1GHz

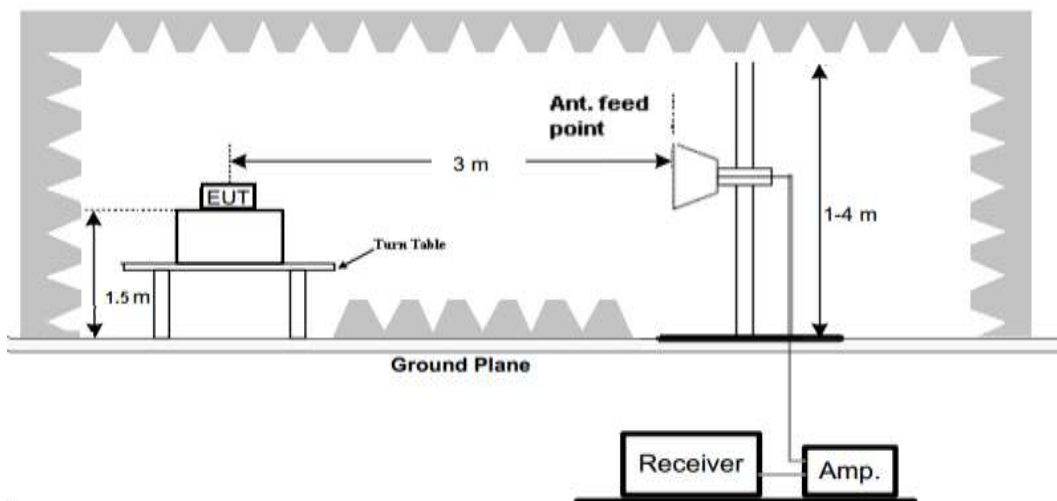

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.


Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC48V		

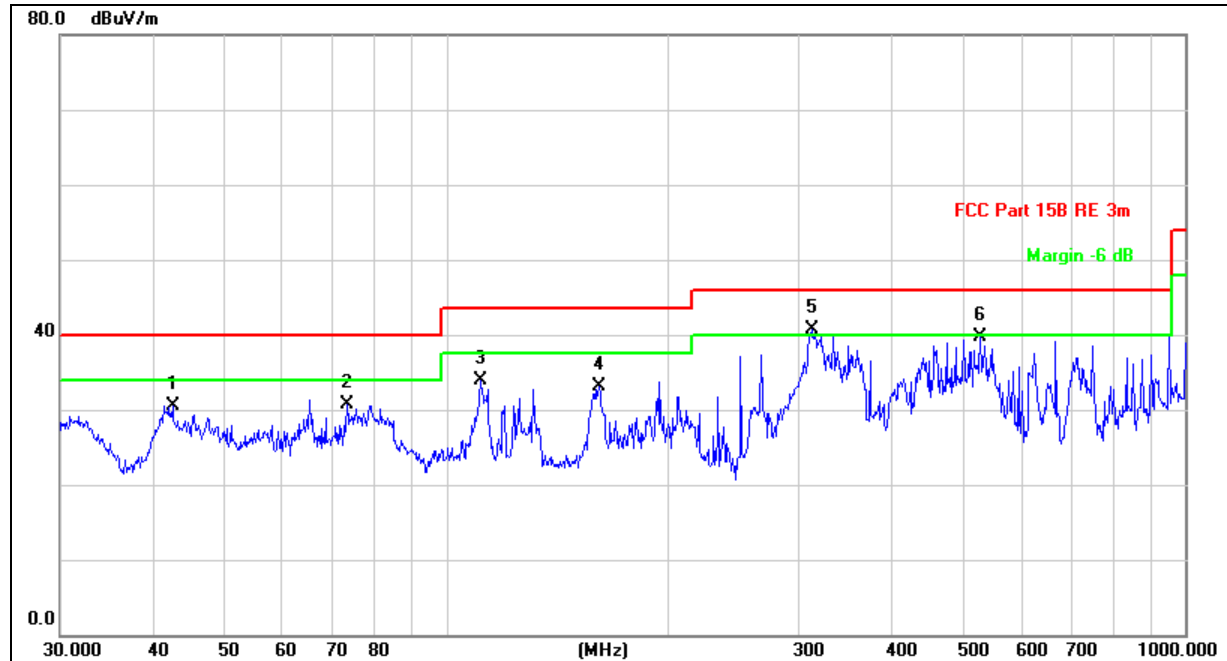

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		42.6000	42.12	-11.56	30.56	40.00	-9.44	QP	100	360
2		73.3593	45.80	-15.13	30.67	40.00	-9.33	QP	100	360
3	*	111.3468	45.86	-12.03	33.83	43.50	-9.67	QP	100	360
4		160.9088	43.06	-10.02	33.04	43.50	-10.46	QP	100	360
5		313.2760	48.41	-7.75	40.66	46.00	-5.34	QP	100	360
6		528.2458	42.57	-2.90	39.67	46.00	-6.33	QP	100	360

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC48V		

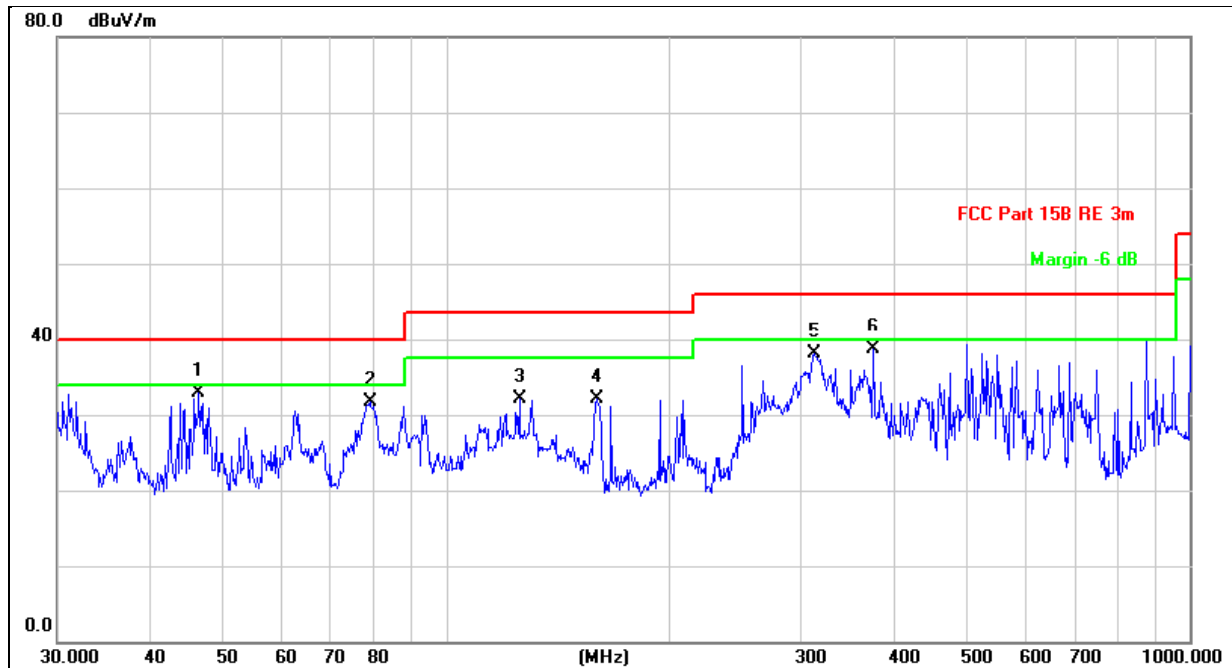

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	46.5030	46.47	-13.66	32.81	40.00	-7.19	QP	100	360
2		78.9651	46.84	-15.18	31.66	40.00	-8.34	QP	100	360
3		125.4457	42.55	-10.43	32.12	43.50	-11.38	QP	100	360
4		159.7844	42.04	-9.95	32.09	43.50	-11.41	QP	100	360
5		313.2760	45.82	-7.75	38.07	46.00	-7.93	QP	100	360
6		375.9384	44.99	-6.29	38.70	46.00	-7.30	QP	100	360

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case- MIMO (5.2G-802.11ax-ax20 lowchannel)

Note: Only the worst antenna and worst mode are recorded.

ANT1-802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	49.06	30.55	5.77	24.66	48.94	74.00	-25.06	PK
V	10360	35.56	30.55	5.77	24.66	35.44	54.00	-18.56	AV
V	15540	49.55	30.33	6.32	24.55	50.09	74.00	-23.91	PK
V	15540	39.43	30.33	6.32	24.55	39.97	54.00	-14.03	AV
V	20720	51.07	30.85	7.45	24.69	52.36	74.00	-21.64	PK
V	20720	40.61	30.85	7.45	24.69	41.90	54.00	-12.10	AV
H	10360	48.36	30.55	5.77	24.66	48.24	74.00	-25.76	PK
H	10360	39.60	30.55	5.77	24.66	39.48	54.00	-14.52	AV
H	15540	48.52	30.33	6.32	24.55	49.06	74.00	-24.94	PK
H	15540	40.87	30.33	6.32	24.55	41.41	54.00	-12.59	AV
H	20720	50.03	30.85	7.45	24.69	51.32	74.00	-22.68	PK
H	20720	39.45	30.85	7.45	24.69	40.74	54.00	-13.26	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	47.81	30.55	5.77	24.66	47.69	74.00	-26.31	PK
V	10400	36.47	30.55	5.77	24.66	36.35	54.00	-17.65	AV
V	15600	48.88	30.33	6.32	24.55	49.42	74.00	-24.58	PK
V	15600	40.75	30.33	6.32	24.55	41.29	54.00	-12.71	AV
V	20800	48.77	30.85	7.45	24.69	50.06	74.00	-23.94	PK
V	20800	40.58	30.85	7.45	24.69	41.87	54.00	-12.13	AV
H	10400	46.67	30.55	5.77	24.66	46.55	74.00	-27.45	PK
H	10400	39.05	30.55	5.77	24.66	38.93	54.00	-15.07	AV
H	15600	47.14	30.33	6.32	24.55	47.68	74.00	-26.32	PK
H	15600	39.02	30.33	6.32	24.55	39.56	54.00	-14.44	AV
H	20800	50.80	30.85	7.45	24.69	52.09	74.00	-21.91	PK
H	20800	39.21	30.85	7.45	24.69	40.50	54.00	-13.50	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	49.25	30.55	5.77	24.66	49.13	74.00	-24.87	PK
V	10480	35.12	30.55	5.77	24.66	35.00	54.00	-19.00	AV
V	15720	49.13	30.33	6.32	24.55	49.67	74.00	-24.33	PK
V	15720	41.18	30.33	6.32	24.55	41.72	54.00	-12.28	AV
V	20960	50.82	30.85	7.45	24.69	52.11	74.00	-21.89	PK
V	20960	39.03	30.85	7.45	24.69	40.32	54.00	-13.68	AV
H	10480	46.76	30.55	5.77	24.66	46.64	74.00	-27.36	PK
H	10480	37.95	30.55	5.77	24.66	37.83	54.00	-16.17	AV
H	15720	48.68	30.33	6.32	24.55	49.22	74.00	-24.78	PK
H	15720	40.15	30.33	6.32	24.55	40.69	54.00	-13.31	AV
H	20960	50.55	30.85	7.45	24.69	51.84	74.00	-22.16	PK
H	20960	39.26	30.85	7.45	24.69	40.55	54.00	-13.45	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5745MHz									
V	11490	48.78	30.55	5.77	24.66	48.66	74.00	-25.34	PK
V	11490	35.41	30.55	5.77	24.66	35.29	54.00	-18.71	AV
V	17235	49.46	30.33	6.32	24.55	50.00	74.00	-24.00	PK
V	17235	41.33	30.33	6.32	24.55	41.87	54.00	-12.13	AV
V	22980	50.17	30.85	7.45	24.69	51.46	74.00	-22.54	PK
V	22980	39.86	30.85	7.45	24.69	41.15	54.00	-12.85	AV
H	11490	48.72	30.55	5.77	24.66	48.60	74.00	-25.40	PK
H	11490	38.12	30.55	5.77	24.66	38.00	54.00	-16.00	AV
H	17235	48.24	30.33	6.32	24.55	48.78	74.00	-25.22	PK
H	17235	40.63	30.33	6.32	24.55	41.17	54.00	-12.83	AV
H	22980	49.55	30.85	7.45	24.69	50.84	74.00	-23.16	PK
H	22980	41.42	30.85	7.45	24.69	42.71	54.00	-11.29	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5785MHz									
V	11570	49.28	30.55	5.77	24.66	49.16	74.00	-24.84	PK
V	11570	35.72	30.55	5.77	24.66	35.60	54.00	-18.40	AV
V	17355	49.61	30.33	6.32	24.55	50.15	74.00	-23.85	PK
V	17355	38.98	30.33	6.32	24.55	39.52	54.00	-14.48	AV
V	23140	49.06	30.85	7.45	24.69	50.35	74.00	-23.65	PK
V	23140	40.94	30.85	7.45	24.69	42.23	54.00	-11.77	AV
H	11570	47.50	30.55	5.77	24.66	47.38	74.00	-26.62	PK
H	11570	39.47	30.55	5.77	24.66	39.35	54.00	-14.65	AV
H	17355	47.67	30.33	6.32	24.55	48.21	74.00	-25.79	PK
H	17355	39.63	30.33	6.32	24.55	40.17	54.00	-13.83	AV
H	23140	51.25	30.85	7.45	24.69	52.54	74.00	-21.46	PK
H	23140	41.27	30.85	7.45	24.69	42.56	54.00	-11.44	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5825MHz									
V	11650	49.25	30.55	5.77	24.66	49.13	74.00	-24.87	PK
V	11650	35.45	30.55	5.77	24.66	35.33	54.00	-18.67	AV
V	17475	48.09	30.33	6.32	24.55	48.63	74.00	-25.37	PK
V	17475	40.03	30.33	6.32	24.55	40.57	54.00	-13.43	AV
V	23300	50.53	30.85	7.45	24.69	51.82	74.00	-22.18	PK
V	23300	39.07	30.85	7.45	24.69	40.36	54.00	-13.64	AV
H	11650	46.42	30.55	5.77	24.66	46.30	74.00	-27.70	PK
H	11650	39.53	30.55	5.77	24.66	39.41	54.00	-14.59	AV
H	17475	47.62	30.33	6.32	24.55	48.16	74.00	-25.84	PK
H	17475	41.17	30.33	6.32	24.55	41.71	54.00	-12.29	AV
H	23300	50.94	30.85	7.45	24.69	52.23	74.00	-21.77	PK
H	23300	40.52	30.85	7.45	24.69	41.81	54.00	-12.19	AV

ANT1-802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	47.25	30.55	5.77	24.66	47.13	74.00	-26.87	PK
V	10360	34.37	30.55	5.77	24.66	34.25	54.00	-19.75	AV
V	15540	48.81	30.33	6.32	24.55	49.35	74.00	-24.65	PK
V	15540	40.60	30.33	6.32	24.55	41.14	54.00	-12.86	AV
V	20720	50.88	30.85	7.45	24.69	52.17	74.00	-21.83	PK
V	20720	41.05	30.85	7.45	24.69	42.34	54.00	-11.66	AV
H	10360	47.97	30.55	5.77	24.66	47.85	74.00	-26.15	PK
H	10360	40.57	30.55	5.77	24.66	40.45	54.00	-13.55	AV
H	15540	48.43	30.33	6.32	24.55	48.97	74.00	-25.03	PK
H	15540	39.37	30.33	6.32	24.55	39.91	54.00	-14.09	AV
H	20720	50.33	30.85	7.45	24.69	51.62	74.00	-22.38	PK
H	20720	40.42	30.85	7.45	24.69	41.71	54.00	-12.29	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	48.71	30.55	5.77	24.66	48.59	74.00	-25.41	PK
V	10400	34.50	30.55	5.77	24.66	34.38	54.00	-19.62	AV
V	15600	47.81	30.33	6.32	24.55	48.35	74.00	-25.65	PK
V	15600	40.97	30.33	6.32	24.55	41.51	54.00	-12.49	AV
V	20800	50.48	30.85	7.45	24.69	51.77	74.00	-22.23	PK
V	20800	40.60	30.85	7.45	24.69	41.89	54.00	-12.11	AV
H	10400	46.88	30.55	5.77	24.66	46.76	74.00	-27.24	PK
H	10400	38.52	30.55	5.77	24.66	38.40	54.00	-15.60	AV
H	15600	47.09	30.33	6.32	24.55	47.63	74.00	-26.37	PK
H	15600	39.49	30.33	6.32	24.55	40.03	54.00	-13.97	AV
H	20800	51.02	30.85	7.45	24.69	52.31	74.00	-21.69	PK
H	20800	40.34	30.85	7.45	24.69	41.63	54.00	-12.37	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	48.54	30.55	5.77	24.66	48.42	74.00	-25.58	PK
V	10480	34.10	30.55	5.77	24.66	33.98	54.00	-20.02	AV
V	15720	48.76	30.33	6.32	24.55	49.30	74.00	-24.70	PK
V	15720	39.45	30.33	6.32	24.55	39.99	54.00	-14.01	AV
V	20960	50.65	30.85	7.45	24.69	51.94	74.00	-22.06	PK
V	20960	41.14	30.85	7.45	24.69	42.43	54.00	-11.57	AV
H	10480	47.99	30.55	5.77	24.66	47.87	74.00	-26.13	PK
H	10480	38.05	30.55	5.77	24.66	37.93	54.00	-16.07	AV
H	15720	47.16	30.33	6.32	24.55	47.70	74.00	-26.30	PK
H	15720	38.91	30.33	6.32	24.55	39.45	54.00	-14.55	AV
H	20960	49.24	30.85	7.45	24.69	50.53	74.00	-23.47	PK
H	20960	40.04	30.85	7.45	24.69	41.33	54.00	-12.67	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5745MHz									
V	11490	47.35	30.55	5.77	24.66	47.23	74.00	-26.77	PK
V	11490	36.21	30.55	5.77	24.66	36.09	54.00	-17.91	AV
V	17235	48.03	30.33	6.32	24.55	48.57	74.00	-25.43	PK
V	17235	38.91	30.33	6.32	24.55	39.45	54.00	-14.55	AV
V	22980	51.66	30.85	7.45	24.69	52.95	74.00	-21.05	PK
V	22980	41.27	30.85	7.45	24.69	42.56	54.00	-11.44	AV
H	11490	48.66	30.55	5.77	24.66	48.54	74.00	-25.46	PK
H	11490	39.27	30.55	5.77	24.66	39.15	54.00	-14.85	AV
H	17235	48.22	30.33	6.32	24.55	48.76	74.00	-25.24	PK
H	17235	38.92	30.33	6.32	24.55	39.46	54.00	-14.54	AV
H	22980	51.62	30.85	7.45	24.69	52.91	74.00	-21.09	PK
H	22980	40.30	30.85	7.45	24.69	41.59	54.00	-12.41	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5785MHz									
V	11570	46.83	30.55	5.77	24.66	46.71	74.00	-27.29	PK
V	11570	35.15	30.55	5.77	24.66	35.03	54.00	-18.97	AV
V	17355	47.98	30.33	6.32	24.55	48.52	74.00	-25.48	PK
V	17355	38.83	30.33	6.32	24.55	39.37	54.00	-14.63	AV
V	23140	50.76	30.85	7.45	24.69	52.05	74.00	-21.95	PK
V	23140	39.65	30.85	7.45	24.69	40.94	54.00	-13.06	AV
H	11570	47.13	30.55	5.77	24.66	47.01	74.00	-26.99	PK
H	11570	38.57	30.55	5.77	24.66	38.45	54.00	-15.55	AV
H	17355	47.91	30.33	6.32	24.55	48.45	74.00	-25.55	PK
H	17355	39.58	30.33	6.32	24.55	40.12	54.00	-13.88	AV
H	23140	50.00	30.85	7.45	24.69	51.29	74.00	-22.71	PK
H	23140	41.65	30.85	7.45	24.69	42.94	54.00	-11.06	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650	48.30	30.55	5.77	24.66	48.18	74.00	-25.82	PK
V	11650	34.61	30.55	5.77	24.66	34.49	54.00	-19.51	AV
V	17475	48.07	30.33	6.32	24.55	48.61	74.00	-25.39	PK
V	17475	39.97	30.33	6.32	24.55	40.51	54.00	-13.49	AV
V	23300	50.27	30.85	7.45	24.69	51.56	74.00	-22.44	PK
V	23300	40.75	30.85	7.45	24.69	42.04	54.00	-11.96	AV
H	11650	48.15	30.55	5.77	24.66	48.03	74.00	-25.97	PK
H	11650	40.66	30.55	5.77	24.66	40.54	54.00	-13.46	AV
H	17475	47.32	30.33	6.32	24.55	47.86	74.00	-26.14	PK
H	17475	39.03	30.33	6.32	24.55	39.57	54.00	-14.43	AV
H	23300	51.32	30.85	7.45	24.69	52.61	74.00	-21.39	PK
H	23300	39.82	30.85	7.45	24.69	41.11	54.00	-12.89	AV

ANT1-802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	10360	47.26	30.55	5.77	24.66	47.14	74.00	-26.86	PK
V	10360	34.32	30.55	5.77	24.66	34.20	54.00	-19.80	AV
V	15540	49.62	30.33	6.32	24.55	50.16	74.00	-23.84	PK
V	15540	40.69	30.33	6.32	24.55	41.23	54.00	-12.77	AV
V	20720	51.21	30.85	7.45	24.69	52.50	74.00	-21.50	PK
V	20720	38.85	30.85	7.45	24.69	40.14	54.00	-13.86	AV
H	10360	46.89	30.55	5.77	24.66	46.77	74.00	-27.23	PK
H	10360	38.11	30.55	5.77	24.66	37.99	54.00	-16.01	AV
H	15540	47.00	30.33	6.32	24.55	47.54	74.00	-26.46	PK
H	15540	40.23	30.33	6.32	24.55	40.77	54.00	-13.23	AV
H	20720	48.97	30.85	7.45	24.69	50.26	74.00	-23.74	PK
H	20720	41.09	30.85	7.45	24.69	42.38	54.00	-11.62	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5230MHz									
V	10460	47.82	30.55	5.77	24.66	47.70	74.00	-26.30	PK
V	10460	36.49	30.55	5.77	24.66	36.37	54.00	-17.63	AV
V	15690	48.43	30.33	6.32	24.55	48.97	74.00	-25.03	PK
V	15690	41.56	30.33	6.32	24.55	42.10	54.00	-11.90	AV
V	20920	49.84	30.85	7.45	24.69	51.13	74.00	-22.87	PK
V	20920	40.35	30.85	7.45	24.69	41.64	54.00	-12.36	AV
H	10460	46.62	30.55	5.77	24.66	46.50	74.00	-27.50	PK
H	10460	40.07	30.55	5.77	24.66	39.95	54.00	-14.05	AV
H	15690	48.38	30.33	6.32	24.55	48.92	74.00	-25.08	PK
H	15690	39.57	30.33	6.32	24.55	40.11	54.00	-13.89	AV
H	20920	48.85	30.85	7.45	24.69	50.14	74.00	-23.86	PK
H	20920	41.03	30.85	7.45	24.69	42.32	54.00	-11.68	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5755MHz									
V	11510	49.60	30.55	5.77	24.66	49.48	74.00	-24.52	PK
V	11510	34.64	30.55	5.77	24.66	34.52	54.00	-19.48	AV
V	17265	49.71	30.33	6.32	24.55	50.25	74.00	-23.75	PK
V	17265	40.27	30.33	6.32	24.55	40.81	54.00	-13.19	AV
V	23020	51.40	30.85	7.45	24.69	52.69	74.00	-21.31	PK
V	23020	41.60	30.85	7.45	24.69	42.89	54.00	-11.11	AV
H	11510	46.73	30.55	5.77	24.66	46.61	74.00	-27.39	PK
H	11510	39.33	30.55	5.77	24.66	39.21	54.00	-14.79	AV
H	17265	48.71	30.33	6.32	24.55	49.25	74.00	-24.75	PK
H	17265	39.33	30.33	6.32	24.55	39.87	54.00	-14.13	AV
H	23020	50.43	30.85	7.45	24.69	51.72	74.00	-22.28	PK
H	23020	41.31	30.85	7.45	24.69	42.60	54.00	-11.40	AV

Page 27 of 33

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5795MHz									
V	11590	48.29	30.55	5.77	24.66	48.17	74.00	-25.83	PK
V	11590	35.45	30.55	5.77	24.66	35.33	54.00	-18.67	AV
V	17385	47.92	30.33	6.32	24.55	48.46	74.00	-25.54	PK
V	17385	40.08	30.33	6.32	24.55	40.62	54.00	-13.38	AV
V	23180	51.19	30.85	7.45	24.69	52.48	74.00	-21.52	PK
V	23180	40.62	30.85	7.45	24.69	41.91	54.00	-12.09	AV
H	11590	46.99	30.55	5.77	24.66	46.87	74.00	-27.13	PK
H	11590	39.83	30.55	5.77	24.66	39.71	54.00	-14.29	AV
H	17385	47.39	30.33	6.32	24.55	47.93	74.00	-26.07	PK
H	17385	39.29	30.33	6.32	24.55	39.83	54.00	-14.17	AV
H	23180	50.26	30.85	7.45	24.69	51.55	74.00	-22.45	PK
H	23180	41.19	30.85	7.45	24.69	42.48	54.00	-11.52	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

ANT3--802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	48.35	30.55	5.77	24.66	48.23	74.00	-25.77	PK
V	10360	36.67	30.55	5.77	24.66	36.55	54.00	-17.45	AV
V	15540	48.76	30.33	6.32	24.55	49.30	74.00	-24.70	PK
V	15540	39.65	30.33	6.32	24.55	40.19	54.00	-13.81	AV
V	20720	49.74	30.85	7.45	24.69	51.03	74.00	-22.97	PK
V	20720	39.46	30.85	7.45	24.69	40.75	54.00	-13.25	AV
H	10360	47.68	30.55	5.77	24.66	47.56	74.00	-26.44	PK
H	10360	38.74	30.55	5.77	24.66	38.62	54.00	-15.38	AV
H	15540	48.24	30.33	6.32	24.55	48.78	74.00	-25.22	PK
H	15540	40.02	30.33	6.32	24.55	40.56	54.00	-13.44	AV
H	20720	48.88	30.85	7.45	24.69	50.17	74.00	-23.83	PK
H	20720	40.26	30.85	7.45	24.69	41.55	54.00	-12.45	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	47.34	30.55	5.77	24.66	47.22	74.00	-26.78	PK
V	10400	36.29	30.55	5.77	24.66	36.17	54.00	-17.83	AV
V	15600	49.25	30.33	6.32	24.55	49.79	74.00	-24.21	PK
V	15600	40.14	30.33	6.32	24.55	40.68	54.00	-13.32	AV
V	20800	51.02	30.85	7.45	24.69	52.31	74.00	-21.69	PK
V	20800	38.88	30.85	7.45	24.69	40.17	54.00	-13.83	AV
H	10400	45.95	30.55	5.77	24.66	45.83	74.00	-28.17	PK

H	10400	39.86	30.55	5.77	24.66	39.74	54.00	-14.26	AV
H	15600	46.84	30.33	6.32	24.55	47.38	74.00	-26.62	PK
H	15600	41.46	30.33	6.32	24.55	42.00	54.00	-12.00	AV
H	20800	49.22	30.85	7.45	24.69	50.51	74.00	-23.49	PK
H	20800	41.61	30.85	7.45	24.69	42.90	54.00	-11.10	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	48.38	30.55	5.77	24.66	48.26	74.00	-25.74	PK
V	10480	36.34	30.55	5.77	24.66	36.22	54.00	-17.78	AV
V	15720	48.31	30.33	6.32	24.55	48.85	74.00	-25.15	PK
V	15720	39.11	30.33	6.32	24.55	39.65	54.00	-14.35	AV
V	20960	51.67	30.85	7.45	24.69	52.96	74.00	-21.04	PK
V	20960	40.12	30.85	7.45	24.69	41.41	54.00	-12.59	AV
H	10480	47.33	30.55	5.77	24.66	47.21	74.00	-26.79	PK
H	10480	38.31	30.55	5.77	24.66	38.19	54.00	-15.81	AV
H	15720	48.37	30.33	6.32	24.55	48.91	74.00	-25.09	PK
H	15720	39.36	30.33	6.32	24.55	39.90	54.00	-14.10	AV
H	20960	49.16	30.85	7.45	24.69	50.45	74.00	-23.55	PK
H	20960	40.08	30.85	7.45	24.69	41.37	54.00	-12.63	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5745MHz									
V	11490	47.05	30.55	5.77	24.66	46.93	74.00	-27.07	PK
V	11490	35.56	30.55	5.77	24.66	35.44	54.00	-18.56	AV
V	17235	49.69	30.33	6.32	24.55	50.23	74.00	-23.77	PK
V	17235	41.39	30.33	6.32	24.55	41.93	54.00	-12.07	AV
V	22980	49.58	30.85	7.45	24.69	50.87	74.00	-23.13	PK
V	22980	41.20	30.85	7.45	24.69	42.49	54.00	-11.51	AV
H	11490	48.36	30.55	5.77	24.66	48.24	74.00	-25.76	PK
H	11490	37.92	30.55	5.77	24.66	37.80	54.00	-16.20	AV
H	17235	46.79	30.33	6.32	24.55	47.33	74.00	-26.67	PK
H	17235	41.27	30.33	6.32	24.55	41.81	54.00	-12.19	AV
H	22980	48.85	30.85	7.45	24.69	50.14	74.00	-23.86	PK
H	22980	41.65	30.85	7.45	24.69	42.94	54.00	-11.06	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5785MHz									
V	11570	49.68	30.55	5.77	24.66	49.56	74.00	-24.44	PK
V	11570	35.42	30.55	5.77	24.66	35.30	54.00	-18.70	AV
V	17355	48.47	30.33	6.32	24.55	49.01	74.00	-24.99	PK
V	17355	39.36	30.33	6.32	24.55	39.90	54.00	-14.10	AV
V	23140	50.85	30.85	7.45	24.69	52.14	74.00	-21.86	PK
V	23140	41.34	30.85	7.45	24.69	42.63	54.00	-11.37	AV
H	11570	46.12	30.55	5.77	24.66	46.00	74.00	-28.00	PK

H	11570	39.19	30.55	5.77	24.66	39.07	54.00	-14.93	AV
H	17355	47.87	30.33	6.32	24.55	48.41	74.00	-25.59	PK
H	17355	38.88	30.33	6.32	24.55	39.42	54.00	-14.58	AV
H	23140	48.96	30.85	7.45	24.69	50.25	74.00	-23.75	PK
H	23140	41.45	30.85	7.45	24.69	42.74	54.00	-11.26	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650	47.39	30.55	5.77	24.66	47.27	74.00	-26.73	PK
V	11650	36.13	30.55	5.77	24.66	36.01	54.00	-17.99	AV
V	17475	48.72	30.33	6.32	24.55	49.26	74.00	-24.74	PK
V	17475	39.42	30.33	6.32	24.55	39.96	54.00	-14.04	AV
V	23300	51.59	30.85	7.45	24.69	52.88	74.00	-21.12	PK
V	23300	40.82	30.85	7.45	24.69	42.11	54.00	-11.89	AV
H	11650	48.30	30.55	5.77	24.66	48.18	74.00	-25.82	PK
H	11650	39.37	30.55	5.77	24.66	39.25	54.00	-14.75	AV
H	17475	48.19	30.33	6.32	24.55	48.73	74.00	-25.27	PK
H	17475	41.06	30.33	6.32	24.55	41.60	54.00	-12.40	AV
H	23300	50.11	30.85	7.45	24.69	51.40	74.00	-22.60	PK
H	23300	39.63	30.85	7.45	24.69	40.92	54.00	-13.08	AV

ANT1-802.11ac40

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	10360	48.98	30.55	5.77	24.66	48.86	74.00	-25.14	PK
V	10360	35.10	30.55	5.77	24.66	34.98	54.00	-19.02	AV
V	15540	49.30	30.33	6.32	24.55	49.84	74.00	-24.16	PK
V	15540	40.77	30.33	6.32	24.55	41.31	54.00	-12.69	AV
V	20720	49.74	30.85	7.45	24.69	51.03	74.00	-22.97	PK
V	20720	39.72	30.85	7.45	24.69	41.01	54.00	-12.99	AV
H	10360	47.07	30.55	5.77	24.66	46.95	74.00	-27.05	PK
H	10360	38.12	30.55	5.77	24.66	38.00	54.00	-16.00	AV
H	15540	47.02	30.33	6.32	24.55	47.56	74.00	-26.44	PK
H	15540	40.15	30.33	6.32	24.55	40.69	54.00	-13.31	AV
H	20720	51.44	30.85	7.45	24.69	52.73	74.00	-21.27	PK
H	20720	41.04	30.85	7.45	24.69	42.33	54.00	-11.67	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5230MHz									
V	10460	47.16	30.55	5.77	24.66	47.04	74.00	-26.96	PK
V	10460	36.20	30.55	5.77	24.66	36.08	54.00	-17.92	AV
V	15690	48.69	30.33	6.32	24.55	49.23	74.00	-24.77	PK
V	15690	40.04	30.33	6.32	24.55	40.58	54.00	-13.42	AV
V	20920	51.31	30.85	7.45	24.69	52.60	74.00	-21.40	PK
V	20920	40.88	30.85	7.45	24.69	42.17	54.00	-11.83	AV
H	10460	47.54	30.55	5.77	24.66	47.42	74.00	-26.58	PK
H	10460	39.68	30.55	5.77	24.66	39.56	54.00	-14.44	AV
H	15690	48.51	30.33	6.32	24.55	49.05	74.00	-24.95	PK

H	15690	41.70	30.33	6.32	24.55	42.24	54.00	-11.76	AV
H	20920	49.29	30.85	7.45	24.69	50.58	74.00	-23.42	PK
H	20920	40.45	30.85	7.45	24.69	41.74	54.00	-12.26	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detecto r Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5755MHz									
V	11510	49.39	30.55	5.77	24.66	49.27	74.00	-24.73	PK
V	11510	34.59	30.55	5.77	24.66	34.47	54.00	-19.53	AV
V	17265	48.54	30.33	6.32	24.55	49.08	74.00	-24.92	PK
V	17265	39.04	30.33	6.32	24.55	39.58	54.00	-14.42	AV
V	23020	48.94	30.85	7.45	24.69	50.23	74.00	-23.77	PK
V	23020	39.31	30.85	7.45	24.69	40.60	54.00	-13.40	AV
H	11510	47.58	30.55	5.77	24.66	47.46	74.00	-26.54	PK
H	11510	37.78	30.55	5.77	24.66	37.66	54.00	-16.34	AV
H	17265	47.19	30.33	6.32	24.55	47.73	74.00	-26.27	PK
H	17265	41.00	30.33	6.32	24.55	41.54	54.00	-12.46	AV
H	23020	50.31	30.85	7.45	24.69	51.60	74.00	-22.40	PK
H	23020	41.64	30.85	7.45	24.69	42.93	54.00	-11.07	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detecto r Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5795MHz									
V	11510	49.12	30.55	5.77	24.66	49.00	74.00	-25.00	PK
V	11510	36.04	30.55	5.77	24.66	35.92	54.00	-18.08	AV
V	17265	48.56	30.33	6.32	24.55	49.10	74.00	-24.90	PK
V	17265	41.05	30.33	6.32	24.55	41.59	54.00	-12.41	AV
V	23020	51.34	30.85	7.45	24.69	52.63	74.00	-21.37	PK
V	23020	41.32	30.85	7.45	24.69	42.61	54.00	-11.39	AV
H	11510	46.47	30.55	5.77	24.66	46.35	74.00	-27.65	PK
H	11510	39.80	30.55	5.77	24.66	39.68	54.00	-14.32	AV
H	17265	48.68	30.33	6.32	24.55	49.22	74.00	-24.78	PK
H	17265	40.96	30.33	6.32	24.55	41.50	54.00	-12.50	AV
H	23020	49.44	30.85	7.45	24.69	50.73	74.00	-23.27	PK
H	23020	41.51	30.85	7.45	24.69	42.80	54.00	-11.20	AV

ANT1-802.11ac80

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
5210MHz									
V	10420	48.44	30.55	5.77	24.66	48.32	74.00	-25.68	PK
V	10420	35.33	30.55	5.77	24.66	35.21	54.00	-18.79	AV
V	15630	48.59	30.33	6.32	24.55	49.13	74.00	-24.87	PK
V	15630	40.89	30.33	6.32	24.55	41.43	54.00	-12.57	AV
V	20840	49.38	30.85	7.45	24.69	50.67	74.00	-23.33	PK
V	20840	40.89	30.85	7.45	24.69	42.18	54.00	-11.82	AV
H	10420	48.40	30.55	5.77	24.66	48.28	74.00	-25.72	PK
H	10420	40.74	30.55	5.77	24.66	40.62	54.00	-13.38	AV
H	15630	46.92	30.33	6.32	24.55	47.46	74.00	-26.54	PK

H	15630	39.70	30.33	6.32	24.55	40.24	54.00	-13.76	AV
H	20840	50.76	30.85	7.45	24.69	52.05	74.00	-21.95	PK
H	20840	39.14	30.85	7.45	24.69	40.43	54.00	-13.57	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5775MHz									
V	11550	47.11	30.55	5.77	24.66	46.99	74.00	-27.01	PK
V	11550	36.15	30.55	5.77	24.66	36.03	54.00	-17.97	AV
V	17325	48.17	30.33	6.32	24.55	48.71	74.00	-25.29	PK
V	17325	40.82	30.33	6.32	24.55	41.36	54.00	-12.64	AV
V	23100	51.04	30.85	7.45	24.69	52.33	74.00	-21.67	PK
V	23100	40.94	30.85	7.45	24.69	42.23	54.00	-11.77	AV
H	11550	47.07	30.55	5.77	24.66	46.95	74.00	-27.05	PK
H	11550	39.61	30.55	5.77	24.66	39.49	54.00	-14.51	AV
H	17325	48.41	30.33	6.32	24.55	48.95	74.00	-25.05	PK
H	17325	40.09	30.33	6.32	24.55	40.63	54.00	-13.37	AV
H	23100	49.88	30.85	7.45	24.69	51.17	74.00	-22.83	PK
H	23100	40.00	30.85	7.45	24.69	41.29	54.00	-12.71	AV

ANT1--802.11ax20

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	46.80	30.55	5.77	24.66	46.68	74.00	-27.32	PK
V	10360	34.31	30.55	5.77	24.66	34.19	54.00	-19.81	AV
V	15540	47.86	30.33	6.32	24.55	48.40	74.00	-25.60	PK
V	15540	39.50	30.33	6.32	24.55	40.04	54.00	-13.96	AV
V	20720	50.17	30.85	7.45	24.69	51.46	74.00	-22.54	PK
V	20720	40.92	30.85	7.45	24.69	42.21	54.00	-11.79	AV
H	10360	47.31	30.55	5.77	24.66	47.19	74.00	-26.81	PK
H	10360	40.40	30.55	5.77	24.66	40.28	54.00	-13.72	AV
H	15540	48.09	30.33	6.32	24.55	48.63	74.00	-25.37	PK
H	15540	38.87	30.33	6.32	24.55	39.41	54.00	-14.59	AV
H	20720	50.63	30.85	7.45	24.69	51.92	74.00	-22.08	PK
H	20720	38.88	30.85	7.45	24.69	40.17	54.00	-13.83	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	47.42	30.55	5.77	24.66	47.30	74.00	-26.70	PK
V	10400	36.50	30.55	5.77	24.66	36.38	54.00	-17.62	AV
V	15600	48.53	30.33	6.32	24.55	49.07	74.00	-24.93	PK
V	15600	39.55	30.33	6.32	24.55	40.09	54.00	-13.91	AV
V	20800	49.47	30.85	7.45	24.69	50.76	74.00	-23.24	PK
V	20800	40.34	30.85	7.45	24.69	41.63	54.00	-12.37	AV
H	10400	47.08	30.55	5.77	24.66	46.96	74.00	-27.04	PK
H	10400	39.35	30.55	5.77	24.66	39.23	54.00	-14.77	AV
H	15600	48.33	30.33	6.32	24.55	48.87	74.00	-25.13	PK
H	15600	39.40	30.33	6.32	24.55	39.94	54.00	-14.06	AV
H	20800	50.31	30.85	7.45	24.69	51.60	74.00	-22.40	PK
H	20800	39.54	30.85	7.45	24.69	40.83	54.00	-13.17	AV

Page 32 of 33

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	47.92	30.55	5.77	24.66	47.80	74.00	-26.20	PK
V	10480	36.73	30.55	5.77	24.66	36.61	54.00	-17.39	AV
V	15720	49.19	30.33	6.32	24.55	49.73	74.00	-24.27	PK
V	15720	41.28	30.33	6.32	24.55	41.82	54.00	-12.18	AV
V	20960	49.96	30.85	7.45	24.69	51.25	74.00	-22.75	PK
V	20960	41.47	30.85	7.45	24.69	42.76	54.00	-11.24	AV
H	10480	48.42	30.55	5.77	24.66	48.30	74.00	-25.70	PK
H	10480	39.06	30.55	5.77	24.66	38.94	54.00	-15.06	AV
H	15720	48.62	30.33	6.32	24.55	49.16	74.00	-24.84	PK
H	15720	41.49	30.33	6.32	24.55	42.03	54.00	-11.97	AV
H	20960	50.96	30.85	7.45	24.69	52.25	74.00	-21.75	PK
H	20960	39.99	30.85	7.45	24.69	41.28	54.00	-12.72	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5745MHz									
V	11490	47.52	30.55	5.77	24.66	47.40	74.00	-26.60	PK
V	11490	34.91	30.55	5.77	24.66	34.79	54.00	-19.21	AV
V	17235	47.92	30.33	6.32	24.55	48.46	74.00	-25.54	PK
V	17235	38.89	30.33	6.32	24.55	39.43	54.00	-14.57	AV
V	22980	50.27	30.85	7.45	24.69	51.56	74.00	-22.44	PK
V	22980	40.30	30.85	7.45	24.69	41.59	54.00	-12.41	AV
H	11490	47.86	30.55	5.77	24.66	47.74	74.00	-26.26	PK
H	11490	40.40	30.55	5.77	24.66	40.28	54.00	-13.72	AV
H	17235	47.26	30.33	6.32	24.55	47.80	74.00	-26.20	PK
H	17235	38.91	30.33	6.32	24.55	39.45	54.00	-14.55	AV
H	22980	50.61	30.85	7.45	24.69	51.90	74.00	-22.10	PK
H	22980	39.02	30.85	7.45	24.69	40.31	54.00	-13.69	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5785MHz									
V	11570	48.35	30.55	5.77	24.66	48.23	74.00	-25.77	PK
V	11570	35.80	30.55	5.77	24.66	35.68	54.00	-18.32	AV
V	17355	47.95	30.33	6.32	24.55	48.49	74.00	-25.51	PK
V	17355	38.82	30.33	6.32	24.55	39.36	54.00	-14.64	AV
V	23140	51.36	30.85	7.45	24.69	52.65	74.00	-21.35	PK
V	23140	40.27	30.85	7.45	24.69	41.56	54.00	-12.44	AV
H	11570	47.73	30.55	5.77	24.66	47.61	74.00	-26.39	PK
H	11570	40.62	30.55	5.77	24.66	40.50	54.00	-13.50	AV
H	17355	47.67	30.33	6.32	24.55	48.21	74.00	-25.79	PK
H	17355	40.84	30.33	6.32	24.55	41.38	54.00	-12.62	AV
H	23140	49.79	30.85	7.45	24.69	51.08	74.00	-22.92	PK
H	23140	41.73	30.85	7.45	24.69	43.02	54.00	-10.98	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650	49.74	30.55	5.77	24.66	49.62	74.00	-24.38	PK
V	11650	33.81	30.55	5.77	24.66	33.69	54.00	-20.31	AV

V	17475	48.11	30.33	6.32	24.55	48.65	74.00	-25.35	PK
V	17475	40.81	30.33	6.32	24.55	41.35	54.00	-12.65	AV
V	23300	50.09	30.85	7.45	24.69	51.38	74.00	-22.62	PK
V	23300	39.21	30.85	7.45	24.69	40.50	54.00	-13.50	AV
H	11650	47.85	30.55	5.77	24.66	47.73	74.00	-26.27	PK
H	11650	38.78	30.55	5.77	24.66	38.66	54.00	-15.34	AV
H	17475	47.90	30.33	6.32	24.55	48.44	74.00	-25.56	PK
H	17475	40.36	30.33	6.32	24.55	40.90	54.00	-13.10	AV
H	23300	50.03	30.85	7.45	24.69	51.32	74.00	-22.68	PK
H	23300	41.17	30.85	7.45	24.69	42.46	54.00	-11.54	AV

ANT1-802.11ax40

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	10360	48.40	30.55	5.77	24.66	48.28	74.00	-25.72	PK
V	10360	34.19	30.55	5.77	24.66	34.07	54.00	-19.93	AV
V	15540	48.29	30.33	6.32	24.55	48.83	74.00	-25.17	PK
V	15540	38.78	30.33	6.32	24.55	39.32	54.00	-14.68	AV
V	20720	49.07	30.85	7.45	24.69	50.36	74.00	-23.64	PK
V	20720	39.79	30.85	7.45	24.69	41.08	54.00	-12.92	AV
H	10360	46.89	30.55	5.77	24.66	46.77	74.00	-27.23	PK
H	10360	39.29	30.55	5.77	24.66	39.17	54.00	-14.83	AV
H	15540	48.73	30.33	6.32	24.55	49.27	74.00	-24.73	PK
H	15540	38.90	30.33	6.32	24.55	39.44	54.00	-14.56	AV
H	20720	50.24	30.85	7.45	24.69	51.53	74.00	-22.47	PK
H	20720	40.22	30.85	7.45	24.69	41.51	54.00	-12.49	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5230MHz									
V	10460	47.45	30.55	5.77	24.66	47.33	74.00	-26.67	PK
V	10460	35.65	30.55	5.77	24.66	35.53	54.00	-18.47	AV
V	15690	49.48	30.33	6.32	24.55	50.02	74.00	-23.98	PK
V	15690	41.65	30.33	6.32	24.55	42.19	54.00	-11.81	AV
V	20920	51.23	30.85	7.45	24.69	52.52	74.00	-21.48	PK
V	20920	40.51	30.85	7.45	24.69	41.80	54.00	-12.20	AV
H	10460	48.57	30.55	5.77	24.66	48.45	74.00	-25.55	PK
H	10460	39.58	30.55	5.77	24.66	39.46	54.00	-14.54	AV
H	15690	47.69	30.33	6.32	24.55	48.23	74.00	-25.77	PK
H	15690	40.02	30.33	6.32	24.55	40.56	54.00	-13.44	AV
H	20920	49.67	30.85	7.45	24.69	50.96	74.00	-23.04	PK
H	20920	40.47	30.85	7.45	24.69	41.76	54.00	-12.24	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detecto r Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5755MHz									
V	11510	49.08	30.55	5.77	24.66	48.96	74.00	-25.04	PK
V	11510	35.08	30.55	5.77	24.66	34.96	54.00	-19.04	AV
V	17265	49.31	30.33	6.32	24.55	49.85	74.00	-24.15	PK
V	17265	39.00	30.33	6.32	24.55	39.54	54.00	-14.46	AV
V	23020	51.50	30.85	7.45	24.69	52.79	74.00	-21.21	PK
V	23020	39.59	30.85	7.45	24.69	40.88	54.00	-13.12	AV
H	11510	46.82	30.55	5.77	24.66	46.70	74.00	-27.30	PK

H	11510	38.82	30.55	5.77	24.66	38.70	54.00	-15.30	AV
H	17265	47.19	30.33	6.32	24.55	47.73	74.00	-26.27	PK
H	17265	40.78	30.33	6.32	24.55	41.32	54.00	-12.68	AV
H	23020	49.03	30.85	7.45	24.69	50.32	74.00	-23.68	PK
H	23020	40.93	30.85	7.45	24.69	42.22	54.00	-11.78	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5795MHz									
V	11510	49.45	30.55	5.77	24.66	49.33	74.00	-24.67	PK
V	11510	34.55	30.55	5.77	24.66	34.43	54.00	-19.57	AV
V	17265	49.72	30.33	6.32	24.55	50.26	74.00	-23.74	PK
V	17265	39.76	30.33	6.32	24.55	40.30	54.00	-13.70	AV
V	23020	49.39	30.85	7.45	24.69	50.68	74.00	-23.32	PK
V	23020	39.02	30.85	7.45	24.69	40.31	54.00	-13.69	AV
H	11510	47.91	30.55	5.77	24.66	47.79	74.00	-26.21	PK
H	11510	37.79	30.55	5.77	24.66	37.67	54.00	-16.33	AV
H	17265	48.68	30.33	6.32	24.55	49.22	74.00	-24.78	PK
H	17265	40.24	30.33	6.32	24.55	40.78	54.00	-13.22	AV
H	23020	49.30	30.85	7.45	24.69	50.59	74.00	-23.41	PK
H	23020	39.05	30.85	7.45	24.69	40.34	54.00	-13.66	AV

ANT1-802.11ax80

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
5210MHz									
V	10420	49.15	30.55	5.77	24.66	49.03	74.00	-24.97	PK
V	10420	36.00	30.55	5.77	24.66	35.88	54.00	-18.12	AV
V	15630	48.76	30.33	6.32	24.55	49.30	74.00	-24.70	PK
V	15630	39.10	30.33	6.32	24.55	39.64	54.00	-14.36	AV
V	20840	51.04	30.85	7.45	24.69	52.33	74.00	-21.67	PK
V	20840	40.31	30.85	7.45	24.69	41.60	54.00	-12.40	AV
H	10420	47.89	30.55	5.77	24.66	47.77	74.00	-26.23	PK
H	10420	39.58	30.55	5.77	24.66	39.46	54.00	-14.54	AV
H	15630	48.37	30.33	6.32	24.55	48.91	74.00	-25.09	PK
H	15630	39.33	30.33	6.32	24.55	39.87	54.00	-14.13	AV
H	20840	49.65	30.85	7.45	24.69	50.94	74.00	-23.06	PK
H	20840	40.25	30.85	7.45	24.69	41.54	54.00	-12.46	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5775MHz									
V	11550	48.02	30.55	5.77	24.66	47.90	74.00	-26.10	PK
V	11550	36.04	30.55	5.77	24.66	35.92	54.00	-18.08	AV
V	17325	48.09	30.33	6.32	24.55	48.63	74.00	-25.37	PK
V	17325	41.12	30.33	6.32	24.55	41.66	54.00	-12.34	AV
V	23100	49.76	30.85	7.45	24.69	51.05	74.00	-22.95	PK
V	23100	40.88	30.85	7.45	24.69	42.17	54.00	-11.83	AV
H	11550	48.74	30.55	5.77	24.66	48.62	74.00	-25.38	PK
H	11550	39.11	30.55	5.77	24.66	38.99	54.00	-15.01	AV
H	17325	48.14	30.33	6.32	24.55	48.68	74.00	-25.32	PK
H	17325	40.46	30.33	6.32	24.55	41.00	54.00	-13.00	AV

H	23100	49.04	30.85	7.45	24.69	50.33	74.00	-23.67	PK
H	23100	40.14	30.85	7.45	24.69	41.43	54.00	-12.57	AV

ANT3-802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	48.20	30.55	5.77	24.66	48.08	74.00	-25.92	PK
V	10360	35.32	30.55	5.77	24.66	35.20	54.00	-18.80	AV
V	15540	49.47	30.33	6.32	24.55	50.01	74.00	-23.99	PK
V	15540	39.87	30.33	6.32	24.55	40.41	54.00	-13.59	AV
V	20720	49.04	30.85	7.45	24.69	50.33	74.00	-23.67	PK
V	20720	41.44	30.85	7.45	24.69	42.73	54.00	-11.27	AV
H	10360	46.28	30.55	5.77	24.66	46.16	74.00	-27.84	PK
H	10360	38.92	30.55	5.77	24.66	38.80	54.00	-15.20	AV
H	15540	48.33	30.33	6.32	24.55	48.87	74.00	-25.13	PK
H	15540	40.68	30.33	6.32	24.55	41.22	54.00	-12.78	AV
H	20720	49.17	30.85	7.45	24.69	50.46	74.00	-23.54	PK
H	20720	39.53	30.85	7.45	24.69	40.82	54.00	-13.18	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	47.22	30.55	5.77	24.66	47.10	74.00	-26.90	PK
V	10400	34.33	30.55	5.77	24.66	34.21	54.00	-19.79	AV
V	15600	49.56	30.33	6.32	24.55	50.10	74.00	-23.90	PK
V	15600	41.31	30.33	6.32	24.55	41.85	54.00	-12.15	AV
V	20800	50.52	30.85	7.45	24.69	51.81	74.00	-22.19	PK
V	20800	40.53	30.85	7.45	24.69	41.82	54.00	-12.18	AV
H	10400	47.22	30.55	5.77	24.66	47.10	74.00	-26.90	PK
H	10400	40.16	30.55	5.77	24.66	40.04	54.00	-13.96	AV
H	15600	48.38	30.33	6.32	24.55	48.92	74.00	-25.08	PK
H	15600	40.88	30.33	6.32	24.55	41.42	54.00	-12.58	AV
H	20800	51.18	30.85	7.45	24.69	52.47	74.00	-21.53	PK
H	20800	41.26	30.85	7.45	24.69	42.55	54.00	-11.45	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	48.30	30.55	5.77	24.66	48.18	74.00	-25.82	PK
V	10480	34.12	30.55	5.77	24.66	34.00	54.00	-20.00	AV
V	15720	48.35	30.33	6.32	24.55	48.89	74.00	-25.11	PK
V	15720	39.34	30.33	6.32	24.55	39.88	54.00	-14.12	AV
V	20960	51.44	30.85	7.45	24.69	52.73	74.00	-21.27	PK
V	20960	41.35	30.85	7.45	24.69	42.64	54.00	-11.36	AV
H	10480	46.84	30.55	5.77	24.66	46.72	74.00	-27.28	PK
H	10480	38.45	30.55	5.77	24.66	38.33	54.00	-15.67	AV
H	15720	48.06	30.33	6.32	24.55	48.60	74.00	-25.40	PK
H	15720	39.82	30.33	6.32	24.55	40.36	54.00	-13.64	AV
H	20960	48.85	30.85	7.45	24.69	50.14	74.00	-23.86	PK
H	20960	41.41	30.85	7.45	24.69	42.70	54.00	-11.30	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5745MHz									
V	11490	48.96	30.55	5.77	24.66	48.84	74.00	-25.16	PK
V	11490	35.37	30.55	5.77	24.66	35.25	54.00	-18.75	AV
V	17235	49.01	30.33	6.32	24.55	49.55	74.00	-24.45	PK
V	17235	41.60	30.33	6.32	24.55	42.14	54.00	-11.86	AV
V	22980	51.16	30.85	7.45	24.69	52.45	74.00	-21.55	PK
V	22980	40.91	30.85	7.45	24.69	42.20	54.00	-11.80	AV
H	11490	46.53	30.55	5.77	24.66	46.41	74.00	-27.59	PK
H	11490	39.95	30.55	5.77	24.66	39.83	54.00	-14.17	AV
H	17235	48.60	30.33	6.32	24.55	49.14	74.00	-24.86	PK
H	17235	39.08	30.33	6.32	24.55	39.62	54.00	-14.38	AV
H	22980	49.15	30.85	7.45	24.69	50.44	74.00	-23.56	PK
H	22980	41.45	30.85	7.45	24.69	42.74	54.00	-11.26	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5785MHz									
V	11570	48.89	30.55	5.77	24.66	48.77	74.00	-25.23	PK
V	11570	35.50	30.55	5.77	24.66	35.38	54.00	-18.62	AV
V	17355	48.19	30.33	6.32	24.55	48.73	74.00	-25.27	PK
V	17355	38.84	30.33	6.32	24.55	39.38	54.00	-14.62	AV
V	23140	49.54	30.85	7.45	24.69	50.83	74.00	-23.17	PK
V	23140	39.02	30.85	7.45	24.69	40.31	54.00	-13.69	AV
H	11570	46.36	30.55	5.77	24.66	46.24	74.00	-27.76	PK
H	11570	40.10	30.55	5.77	24.66	39.98	54.00	-14.02	AV
H	17355	47.49	30.33	6.32	24.55	48.03	74.00	-25.97	PK
H	17355	40.48	30.33	6.32	24.55	41.02	54.00	-12.98	AV
H	23140	48.83	30.85	7.45	24.69	50.12	74.00	-23.88	PK
H	23140	41.47	30.85	7.45	24.69	42.76	54.00	-11.24	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650	46.90	30.55	5.77	24.66	46.78	74.00	-27.22	PK
V	11650	36.56	30.55	5.77	24.66	36.44	54.00	-17.56	AV
V	17475	47.91	30.33	6.32	24.55	48.45	74.00	-25.55	PK
V	17475	39.79	30.33	6.32	24.55	40.33	54.00	-13.67	AV
V	23300	50.20	30.85	7.45	24.69	51.49	74.00	-22.51	PK
V	23300	40.46	30.85	7.45	24.69	41.75	54.00	-12.25	AV
H	11650	46.78	30.55	5.77	24.66	46.66	74.00	-27.34	PK
H	11650	38.09	30.55	5.77	24.66	37.97	54.00	-16.03	AV
H	17475	47.62	30.33	6.32	24.55	48.16	74.00	-25.84	PK
H	17475	40.22	30.33	6.32	24.55	40.76	54.00	-13.24	AV
H	23300	49.99	30.85	7.45	24.69	51.28	74.00	-22.72	PK
H	23300	41.30	30.85	7.45	24.69	42.59	54.00	-11.41	AV

ANT2-802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	49.49	30.55	5.77	24.66	49.37	74.00	-24.63	PK
V	10360	35.93	30.55	5.77	24.66	35.81	54.00	-18.19	AV
V	15540	48.91	30.33	6.32	24.55	49.45	74.00	-24.55	PK
V	15540	39.40	30.33	6.32	24.55	39.94	54.00	-14.06	AV
V	20720	50.07	30.85	7.45	24.69	51.36	74.00	-22.64	PK
V	20720	41.69	30.85	7.45	24.69	42.98	54.00	-11.02	AV
H	10360	47.66	30.55	5.77	24.66	47.54	74.00	-26.46	PK
H	10360	40.37	30.55	5.77	24.66	40.25	54.00	-13.75	AV
H	15540	47.16	30.33	6.32	24.55	47.70	74.00	-26.30	PK
H	15540	39.73	30.33	6.32	24.55	40.27	54.00	-13.73	AV
H	20720	48.96	30.85	7.45	24.69	50.25	74.00	-23.75	PK
H	20720	40.59	30.85	7.45	24.69	41.88	54.00	-12.12	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	47.84	30.55	5.77	24.66	47.72	74.00	-26.28	PK
V	10400	36.55	30.55	5.77	24.66	36.43	54.00	-17.57	AV
V	15600	48.57	30.33	6.32	24.55	49.11	74.00	-24.89	PK
V	15600	40.28	30.33	6.32	24.55	40.82	54.00	-13.18	AV
V	20800	49.59	30.85	7.45	24.69	50.88	74.00	-23.12	PK
V	20800	39.72	30.85	7.45	24.69	41.01	54.00	-12.99	AV
H	10400	47.65	30.55	5.77	24.66	47.53	74.00	-26.47	PK
H	10400	40.34	30.55	5.77	24.66	40.22	54.00	-13.78	AV
H	15600	48.63	30.33	6.32	24.55	49.17	74.00	-24.83	PK
H	15600	39.45	30.33	6.32	24.55	39.99	54.00	-14.01	AV
H	20800	50.19	30.85	7.45	24.69	51.48	74.00	-22.52	PK
H	20800	41.28	30.85	7.45	24.69	42.57	54.00	-11.43	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	47.08	30.55	5.77	24.66	46.96	74.00	-27.04	PK
V	10480	36.70	30.55	5.77	24.66	36.58	54.00	-17.42	AV
V	15720	49.53	30.33	6.32	24.55	50.07	74.00	-23.93	PK
V	15720	38.98	30.33	6.32	24.55	39.52	54.00	-14.48	AV
V	20960	50.81	30.85	7.45	24.69	52.10	74.00	-21.90	PK
V	20960	39.06	30.85	7.45	24.69	40.35	54.00	-13.65	AV
H	10480	46.25	30.55	5.77	24.66	46.13	74.00	-27.87	PK
H	10480	40.32	30.55	5.77	24.66	40.20	54.00	-13.80	AV
H	15720	47.73	30.33	6.32	24.55	48.27	74.00	-25.73	PK
H	15720	39.51	30.33	6.32	24.55	40.05	54.00	-13.95	AV
H	20960	49.40	30.85	7.45	24.69	50.69	74.00	-23.31	PK
H	20960	40.75	30.85	7.45	24.69	42.04	54.00	-11.96	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5745MHz									
V	11490	49.41	30.55	5.77	24.66	49.29	74.00	-24.71	PK
V	11490	35.46	30.55	5.77	24.66	35.34	54.00	-18.66	AV
V	17235	48.49	30.33	6.32	24.55	49.03	74.00	-24.97	PK
V	17235	41.02	30.33	6.32	24.55	41.56	54.00	-12.44	AV
V	22980	49.63	30.85	7.45	24.69	50.92	74.00	-23.08	PK
V	22980	39.04	30.85	7.45	24.69	40.33	54.00	-13.67	AV
H	11490	48.50	30.55	5.77	24.66	48.38	74.00	-25.62	PK
H	11490	39.39	30.55	5.77	24.66	39.27	54.00	-14.73	AV
H	17235	47.04	30.33	6.32	24.55	47.58	74.00	-26.42	PK
H	17235	39.46	30.33	6.32	24.55	40.00	54.00	-14.00	AV
H	22980	50.89	30.85	7.45	24.69	52.18	74.00	-21.82	PK
H	22980	38.90	30.85	7.45	24.69	40.19	54.00	-13.81	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5785MHz									
V	11570	47.45	30.55	5.77	24.66	47.33	74.00	-26.67	PK
V	11570	34.49	30.55	5.77	24.66	34.37	54.00	-19.63	AV
V	17355	49.52	30.33	6.32	24.55	50.06	74.00	-23.94	PK
V	17355	40.03	30.33	6.32	24.55	40.57	54.00	-13.43	AV
V	23140	49.79	30.85	7.45	24.69	51.08	74.00	-22.92	PK
V	23140	39.30	30.85	7.45	24.69	40.59	54.00	-13.41	AV
H	11570	48.49	30.55	5.77	24.66	48.37	74.00	-25.63	PK
H	11570	39.10	30.55	5.77	24.66	38.98	54.00	-15.02	AV
H	17355	47.04	30.33	6.32	24.55	47.58	74.00	-26.42	PK
H	17355	41.26	30.33	6.32	24.55	41.80	54.00	-12.20	AV
H	23140	50.51	30.85	7.45	24.69	51.80	74.00	-22.20	PK
H	23140	41.75	30.85	7.45	24.69	43.04	54.00	-10.96	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650	48.34	30.55	5.77	24.66	48.22	74.00	-25.78	PK
V	11650	34.33	30.55	5.77	24.66	34.21	54.00	-19.79	AV
V	17475	47.99	30.33	6.32	24.55	48.53	74.00	-25.47	PK
V	17475	38.83	30.33	6.32	24.55	39.37	54.00	-14.63	AV
V	23300	51.05	30.85	7.45	24.69	52.34	74.00	-21.66	PK
V	23300	41.18	30.85	7.45	24.69	42.47	54.00	-11.53	AV
H	11650	46.35	30.55	5.77	24.66	46.23	74.00	-27.77	PK
H	11650	38.77	30.55	5.77	24.66	38.65	54.00	-15.35	AV
H	17475	48.45	30.33	6.32	24.55	48.99	74.00	-25.01	PK
H	17475	40.08	30.33	6.32	24.55	40.62	54.00	-13.38	AV
H	23300	48.82	30.85	7.45	24.69	50.11	74.00	-23.89	PK
H	23300	39.05	30.85	7.45	24.69	40.34	54.00	-13.66	AV

ANT3-802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	10360	49.13	30.55	5.77	24.66	49.01	74.00	-24.99	PK
V	10360	36.44	30.55	5.77	24.66	36.32	54.00	-17.68	AV
V	15540	49.28	30.33	6.32	24.55	49.82	74.00	-24.18	PK
V	15540	39.39	30.33	6.32	24.55	39.93	54.00	-14.07	AV
V	20720	50.14	30.85	7.45	24.69	51.43	74.00	-22.57	PK
V	20720	41.56	30.85	7.45	24.69	42.85	54.00	-11.15	AV
H	10360	48.63	30.55	5.77	24.66	48.51	74.00	-25.49	PK
H	10360	40.00	30.55	5.77	24.66	39.88	54.00	-14.12	AV
H	15540	47.00	30.33	6.32	24.55	47.54	74.00	-26.46	PK
H	15540	38.86	30.33	6.32	24.55	39.40	54.00	-14.60	AV
H	20720	51.54	30.85	7.45	24.69	52.83	74.00	-21.17	PK
H	20720	41.39	30.85	7.45	24.69	42.68	54.00	-11.32	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5230MHz									
V	10460	49.63	30.55	5.77	24.66	49.51	74.00	-24.49	PK
V	10460	35.24	30.55	5.77	24.66	35.12	54.00	-18.88	AV
V	15690	47.96	30.33	6.32	24.55	48.50	74.00	-25.50	PK
V	15690	39.78	30.33	6.32	24.55	40.32	54.00	-13.68	AV
V	20920	50.32	30.85	7.45	24.69	51.61	74.00	-22.39	PK
V	20920	41.65	30.85	7.45	24.69	42.94	54.00	-11.06	AV
H	10460	47.56	30.55	5.77	24.66	47.44	74.00	-26.56	PK
H	10460	38.97	30.55	5.77	24.66	38.85	54.00	-15.15	AV
H	15690	47.91	30.33	6.32	24.55	48.45	74.00	-25.55	PK
H	15690	39.37	30.33	6.32	24.55	39.91	54.00	-14.09	AV
H	20920	50.63	30.85	7.45	24.69	51.92	74.00	-22.08	PK
H	20920	40.36	30.85	7.45	24.69	41.65	54.00	-12.35	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5755MHz									
V	11510	49.01	30.55	5.77	24.66	48.89	74.00	-25.11	PK
V	11510	34.87	30.55	5.77	24.66	34.75	54.00	-19.25	AV
V	17265	47.88	30.33	6.32	24.55	48.42	74.00	-25.58	PK
V	17265	41.58	30.33	6.32	24.55	42.12	54.00	-11.88	AV
V	23020	49.54	30.85	7.45	24.69	50.83	74.00	-23.17	PK
V	23020	41.35	30.85	7.45	24.69	42.64	54.00	-11.36	AV
H	11510	47.09	30.55	5.77	24.66	46.97	74.00	-27.03	PK
H	11510	39.39	30.55	5.77	24.66	39.27	54.00	-14.73	AV
H	17265	47.52	30.33	6.32	24.55	48.06	74.00	-25.94	PK
H	17265	41.11	30.33	6.32	24.55	41.65	54.00	-12.35	AV
H	23020	50.36	30.85	7.45	24.69	51.65	74.00	-22.35	PK
H	23020	41.48	30.85	7.45	24.69	42.77	54.00	-11.23	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5795MHz									
V	11590	46.86	30.55	5.77	24.66	46.74	74.00	-27.26	PK
V	11590	35.13	30.55	5.77	24.66	35.01	54.00	-18.99	AV
V	17385	48.15	30.33	6.32	24.55	48.69	74.00	-25.31	PK
V	17385	39.20	30.33	6.32	24.55	39.74	54.00	-14.26	AV
V	23180	50.09	30.85	7.45	24.69	51.38	74.00	-22.62	PK
V	23180	41.27	30.85	7.45	24.69	42.56	54.00	-11.44	AV
H	11590	48.09	30.55	5.77	24.66	47.97	74.00	-26.03	PK
H	11590	37.96	30.55	5.77	24.66	37.84	54.00	-16.16	AV
H	17385	48.37	30.33	6.32	24.55	48.91	74.00	-25.09	PK
H	17385	40.34	30.33	6.32	24.55	40.88	54.00	-13.12	AV
H	23180	49.25	30.85	7.45	24.69	50.54	74.00	-23.46	PK
H	23180	39.32	30.85	7.45	24.69	40.61	54.00	-13.39	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

ANT5--802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	47.82	30.55	5.77	24.66	47.70	74.00	-26.30	PK
V	10360	35.13	30.55	5.77	24.66	35.01	54.00	-18.99	AV
V	15540	48.39	30.33	6.32	24.55	48.93	74.00	-25.07	PK
V	15540	39.17	30.33	6.32	24.55	39.71	54.00	-14.29	AV
V	20720	50.37	30.85	7.45	24.69	51.66	74.00	-22.34	PK
V	20720	40.82	30.85	7.45	24.69	42.11	54.00	-11.89	AV
H	10360	47.17	30.55	5.77	24.66	47.05	74.00	-26.95	PK
H	10360	38.31	30.55	5.77	24.66	38.19	54.00	-15.81	AV
H	15540	47.18	30.33	6.32	24.55	47.72	74.00	-26.28	PK
H	15540	39.06	30.33	6.32	24.55	39.60	54.00	-14.40	AV
H	20720	50.93	30.85	7.45	24.69	52.22	74.00	-21.78	PK
H	20720	40.73	30.85	7.45	24.69	42.02	54.00	-11.98	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	49.29	30.55	5.77	24.66	49.17	74.00	-24.83	PK
V	10400	36.76	30.55	5.77	24.66	36.64	54.00	-17.36	AV
V	15600	49.24	30.33	6.32	24.55	49.78	74.00	-24.22	PK
V	15600	39.61	30.33	6.32	24.55	40.15	54.00	-13.85	AV
V	20800	49.52	30.85	7.45	24.69	50.81	74.00	-23.19	PK
V	20800	41.02	30.85	7.45	24.69	42.31	54.00	-11.69	AV
H	10400	45.77	30.55	5.77	24.66	45.65	74.00	-28.35	PK
H	10400	38.37	30.55	5.77	24.66	38.25	54.00	-15.75	AV
H	15600	47.98	30.33	6.32	24.55	48.52	74.00	-25.48	PK
H	15600	41.16	30.33	6.32	24.55	41.70	54.00	-12.30	AV
H	20800	50.39	30.85	7.45	24.69	51.68	74.00	-22.32	PK
H	20800	41.25	30.85	7.45	24.69	42.54	54.00	-11.46	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	47.43	30.55	5.77	24.66	47.31	74.00	-26.69	PK
V	10480	33.82	30.55	5.77	24.66	33.70	54.00	-20.30	AV
V	15720	49.17	30.33	6.32	24.55	49.71	74.00	-24.29	PK
V	15720	39.48	30.33	6.32	24.55	40.02	54.00	-13.98	AV
V	20960	50.33	30.85	7.45	24.69	51.62	74.00	-22.38	PK
V	20960	38.85	30.85	7.45	24.69	40.14	54.00	-13.86	AV
H	10480	46.02	30.55	5.77	24.66	45.90	74.00	-28.10	PK
H	10480	39.00	30.55	5.77	24.66	38.88	54.00	-15.12	AV
H	15720	47.70	30.33	6.32	24.55	48.24	74.00	-25.76	PK
H	15720	39.97	30.33	6.32	24.55	40.51	54.00	-13.49	AV
H	20960	48.93	30.85	7.45	24.69	50.22	74.00	-23.78	PK
H	20960	40.37	30.85	7.45	24.69	41.66	54.00	-12.34	AV

Page 42 of 55

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5745MHz									
V	11490	48.41	30.55	5.77	24.66	48.29	74.00	-25.71	PK
V	11490	34.34	30.55	5.77	24.66	34.22	54.00	-19.78	AV
V	17235	47.84	30.33	6.32	24.55	48.38	74.00	-25.62	PK
V	17235	41.11	30.33	6.32	24.55	41.65	54.00	-12.35	AV
V	22980	51.63	30.85	7.45	24.69	52.92	74.00	-21.08	PK
V	22980	38.84	30.85	7.45	24.69	40.13	54.00	-13.87	AV
H	11490	48.66	30.55	5.77	24.66	48.54	74.00	-25.46	PK
H	11490	39.39	30.55	5.77	24.66	39.27	54.00	-14.73	AV
H	17235	48.25	30.33	6.32	24.55	48.79	74.00	-25.21	PK
H	17235	40.75	30.33	6.32	24.55	41.29	54.00	-12.71	AV
H	22980	51.50	30.85	7.45	24.69	52.79	74.00	-21.21	PK
H	22980	39.43	30.85	7.45	24.69	40.72	54.00	-13.28	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5785MHz									
V	11570	47.65	30.55	5.77	24.66	47.53	74.00	-26.47	PK
V	11570	36.72	30.55	5.77	24.66	36.60	54.00	-17.40	AV
V	17355	49.04	30.33	6.32	24.55	49.58	74.00	-24.42	PK
V	17355	41.09	30.33	6.32	24.55	41.63	54.00	-12.37	AV
V	23140	50.52	30.85	7.45	24.69	51.81	74.00	-22.19	PK
V	23140	39.30	30.85	7.45	24.69	40.59	54.00	-13.41	AV
H	11570	48.24	30.55	5.77	24.66	48.12	74.00	-25.88	PK
H	11570	39.09	30.55	5.77	24.66	38.97	54.00	-15.03	AV
H	17355	47.22	30.33	6.32	24.55	47.76	74.00	-26.24	PK
H	17355	38.77	30.33	6.32	24.55	39.31	54.00	-14.69	AV
H	23140	49.81	30.85	7.45	24.69	51.10	74.00	-22.90	PK
H	23140	41.31	30.85	7.45	24.69	42.60	54.00	-11.40	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650	46.89	30.55	5.77	24.66	46.77	74.00	-27.23	PK
V	11650	35.88	30.55	5.77	24.66	35.76	54.00	-18.24	AV
V	17475	48.85	30.33	6.32	24.55	49.39	74.00	-24.61	PK
V	17475	39.43	30.33	6.32	24.55	39.97	54.00	-14.03	AV
V	23300	50.83	30.85	7.45	24.69	52.12	74.00	-21.88	PK
V	23300	39.08	30.85	7.45	24.69	40.37	54.00	-13.63	AV
H	11650	48.62	30.55	5.77	24.66	48.50	74.00	-25.50	PK
H	11650	38.12	30.55	5.77	24.66	38.00	54.00	-16.00	AV
H	17475	47.31	30.33	6.32	24.55	47.85	74.00	-26.15	PK
H	17475	39.10	30.33	6.32	24.55	39.64	54.00	-14.36	AV
H	23300	51.40	30.85	7.45	24.69	52.69	74.00	-21.31	PK
H	23300	40.37	30.85	7.45	24.69	41.66	54.00	-12.34	AV

ANT2-802.11ac40

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	10360	47.14	30.55	5.77	24.66	47.02	74.00	-26.98	PK
V	10360	35.01	30.55	5.77	24.66	34.89	54.00	-19.11	AV
V	15540	49.69	30.33	6.32	24.55	50.23	74.00	-23.77	PK
V	15540	41.69	30.33	6.32	24.55	42.23	54.00	-11.77	AV
V	20720	51.61	30.85	7.45	24.69	52.90	74.00	-21.10	PK
V	20720	41.51	30.85	7.45	24.69	42.80	54.00	-11.20	AV
H	10360	47.96	30.55	5.77	24.66	47.84	74.00	-26.16	PK
H	10360	38.44	30.55	5.77	24.66	38.32	54.00	-15.68	AV
H	15540	46.92	30.33	6.32	24.55	47.46	74.00	-26.54	PK
H	15540	39.02	30.33	6.32	24.55	39.56	54.00	-14.44	AV
H	20720	49.42	30.85	7.45	24.69	50.71	74.00	-23.29	PK
H	20720	41.55	30.85	7.45	24.69	42.84	54.00	-11.16	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5230MHz									
V	10460	49.14	30.55	5.77	24.66	49.02	74.00	-24.98	PK
V	10460	36.05	30.55	5.77	24.66	35.93	54.00	-18.07	AV
V	15690	49.73	30.33	6.32	24.55	50.27	74.00	-23.73	PK
V	15690	41.12	30.33	6.32	24.55	41.66	54.00	-12.34	AV
V	20920	51.63	30.85	7.45	24.69	52.92	74.00	-21.08	PK
V	20920	40.94	30.85	7.45	24.69	42.23	54.00	-11.77	AV
H	10460	46.29	30.55	5.77	24.66	46.17	74.00	-27.83	PK
H	10460	38.37	30.55	5.77	24.66	38.25	54.00	-15.75	AV
H	15690	46.87	30.33	6.32	24.55	47.41	74.00	-26.59	PK
H	15690	39.16	30.33	6.32	24.55	39.70	54.00	-14.30	AV
H	20920	49.20	30.85	7.45	24.69	50.49	74.00	-23.51	PK
H	20920	40.93	30.85	7.45	24.69	42.22	54.00	-11.78	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detecto r Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5755MHz									
V	11510	47.95	30.55	5.77	24.66	47.83	74.00	-26.17	PK
V	11510	34.18	30.55	5.77	24.66	34.06	54.00	-19.94	AV
V	17265	49.13	30.33	6.32	24.55	49.67	74.00	-24.33	PK
V	17265	38.91	30.33	6.32	24.55	39.45	54.00	-14.55	AV
V	23020	51.75	30.85	7.45	24.69	53.04	74.00	-20.96	PK
V	23020	41.23	30.85	7.45	24.69	42.52	54.00	-11.48	AV
H	11510	46.10	30.55	5.77	24.66	45.98	74.00	-28.02	PK
H	11510	38.08	30.55	5.77	24.66	37.96	54.00	-16.04	AV
H	17265	47.47	30.33	6.32	24.55	48.01	74.00	-25.99	PK
H	17265	40.25	30.33	6.32	24.55	40.79	54.00	-13.21	AV
H	23020	50.88	30.85	7.45	24.69	52.17	74.00	-21.83	PK
H	23020	39.24	30.85	7.45	24.69	40.53	54.00	-13.47	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5795MHz									
V	11510	48.06	30.55	5.77	24.66	47.94	74.00	-26.06	PK
V	11510	34.86	30.55	5.77	24.66	34.74	54.00	-19.26	AV
V	17265	47.93	30.33	6.32	24.55	48.47	74.00	-25.53	PK
V	17265	40.15	30.33	6.32	24.55	40.69	54.00	-13.31	AV
V	23020	49.38	30.85	7.45	24.69	50.67	74.00	-23.33	PK
V	23020	40.39	30.85	7.45	24.69	41.68	54.00	-12.32	AV
H	11510	47.83	30.55	5.77	24.66	47.71	74.00	-26.29	PK
H	11510	40.26	30.55	5.77	24.66	40.14	54.00	-13.86	AV
H	17265	48.64	30.33	6.32	24.55	49.18	74.00	-24.82	PK
H	17265	41.16	30.33	6.32	24.55	41.70	54.00	-12.30	AV
H	23020	50.72	30.85	7.45	24.69	52.01	74.00	-21.99	PK
H	23020	39.03	30.85	7.45	24.69	40.32	54.00	-13.68	AV

ANT2-802.11ac80

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
5210MHz									
V	10420	49.60	30.55	5.77	24.66	49.48	74.00	-24.52	PK
V	10420	35.13	30.55	5.77	24.66	35.01	54.00	-18.99	AV
V	15630	47.77	30.33	6.32	24.55	48.31	74.00	-25.69	PK
V	15630	38.97	30.33	6.32	24.55	39.51	54.00	-14.49	AV
V	20840	50.33	30.85	7.45	24.69	51.62	74.00	-22.38	PK
V	20840	38.78	30.85	7.45	24.69	40.07	54.00	-13.93	AV
H	10420	47.55	30.55	5.77	24.66	47.43	74.00	-26.57	PK
H	10420	39.78	30.55	5.77	24.66	39.66	54.00	-14.34	AV
H	15630	47.40	30.33	6.32	24.55	47.94	74.00	-26.06	PK
H	15630	39.57	30.33	6.32	24.55	40.11	54.00	-13.89	AV
H	20840	50.27	30.85	7.45	24.69	51.56	74.00	-22.44	PK
H	20840	39.08	30.85	7.45	24.69	40.37	54.00	-13.63	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5775MHz									
V	11550	47.88	30.55	5.77	24.66	47.76	74.00	-26.24	PK
V	11550	34.02	30.55	5.77	24.66	33.90	54.00	-20.10	AV
V	17325	48.05	30.33	6.32	24.55	48.59	74.00	-25.41	PK
V	17325	40.66	30.33	6.32	24.55	41.20	54.00	-12.80	AV
V	23100	49.88	30.85	7.45	24.69	51.17	74.00	-22.83	PK
V	23100	41.34	30.85	7.45	24.69	42.63	54.00	-11.37	AV
H	11550	46.98	30.55	5.77	24.66	46.86	74.00	-27.14	PK
H	11550	38.93	30.55	5.77	24.66	38.81	54.00	-15.19	AV
H	17325	47.47	30.33	6.32	24.55	48.01	74.00	-25.99	PK
H	17325	41.40	30.33	6.32	24.55	41.94	54.00	-12.06	AV
H	23100	50.19	30.85	7.45	24.69	51.48	74.00	-22.52	PK
H	23100	40.26	30.85	7.45	24.69	41.55	54.00	-12.45	AV

ANT5--802.11ax20

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	48.50	30.55	5.77	24.66	48.38	74.00	-25.62	PK
V	10360	34.05	30.55	5.77	24.66	33.93	54.00	-20.07	AV
V	15540	49.26	30.33	6.32	24.55	49.80	74.00	-24.20	PK
V	15540	39.24	30.33	6.32	24.55	39.78	54.00	-14.22	AV
V	20720	49.71	30.85	7.45	24.69	51.00	74.00	-23.00	PK
V	20720	41.29	30.85	7.45	24.69	42.58	54.00	-11.42	AV
H	10360	46.86	30.55	5.77	24.66	46.74	74.00	-27.26	PK
H	10360	39.04	30.55	5.77	24.66	38.92	54.00	-15.08	AV
H	15540	47.08	30.33	6.32	24.55	47.62	74.00	-26.38	PK
H	15540	39.21	30.33	6.32	24.55	39.75	54.00	-14.25	AV
H	20720	50.99	30.85	7.45	24.69	52.28	74.00	-21.72	PK
H	20720	41.56	30.85	7.45	24.69	42.85	54.00	-11.15	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	47.61	30.55	5.77	24.66	47.49	74.00	-26.51	PK
V	10400	36.32	30.55	5.77	24.66	36.20	54.00	-17.80	AV
V	15600	47.78	30.33	6.32	24.55	48.32	74.00	-25.68	PK
V	15600	39.43	30.33	6.32	24.55	39.97	54.00	-14.03	AV
V	20800	51.13	30.85	7.45	24.69	52.42	74.00	-21.58	PK
V	20800	40.27	30.85	7.45	24.69	41.56	54.00	-12.44	AV
H	10400	47.24	30.55	5.77	24.66	47.12	74.00	-26.88	PK
H	10400	38.87	30.55	5.77	24.66	38.75	54.00	-15.25	AV
H	15600	47.85	30.33	6.32	24.55	48.39	74.00	-25.61	PK
H	15600	40.82	30.33	6.32	24.55	41.36	54.00	-12.64	AV
H	20800	51.66	30.85	7.45	24.69	52.95	74.00	-21.05	PK
H	20800	38.84	30.85	7.45	24.69	40.13	54.00	-13.87	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	49.66	30.55	5.77	24.66	49.54	74.00	-24.46	PK
V	10480	35.31	30.55	5.77	24.66	35.19	54.00	-18.81	AV
V	15720	49.09	30.33	6.32	24.55	49.63	74.00	-24.37	PK
V	15720	38.85	30.33	6.32	24.55	39.39	54.00	-14.61	AV
V	20960	50.84	30.85	7.45	24.69	52.13	74.00	-21.87	PK
V	20960	39.49	30.85	7.45	24.69	40.78	54.00	-13.22	AV
H	10480	48.36	30.55	5.77	24.66	48.24	74.00	-25.76	PK
H	10480	39.32	30.55	5.77	24.66	39.20	54.00	-14.80	AV
H	15720	47.77	30.33	6.32	24.55	48.31	74.00	-25.69	PK
H	15720	40.64	30.33	6.32	24.55	41.18	54.00	-12.82	AV
H	20960	48.89	30.85	7.45	24.69	50.18	74.00	-23.82	PK
H	20960	40.56	30.85	7.45	24.69	41.85	54.00	-12.15	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5745MHz									
V	11490	47.48	30.55	5.77	24.66	47.36	74.00	-26.64	PK
V	11490	36.67	30.55	5.77	24.66	36.55	54.00	-17.45	AV
V	17235	48.28	30.33	6.32	24.55	48.82	74.00	-25.18	PK
V	17235	40.00	30.33	6.32	24.55	40.54	54.00	-13.46	AV
V	22980	50.74	30.85	7.45	24.69	52.03	74.00	-21.97	PK
V	22980	40.94	30.85	7.45	24.69	42.23	54.00	-11.77	AV
H	11490	48.00	30.55	5.77	24.66	47.88	74.00	-26.12	PK
H	11490	38.98	30.55	5.77	24.66	38.86	54.00	-15.14	AV
H	17235	46.93	30.33	6.32	24.55	47.47	74.00	-26.53	PK
H	17235	39.20	30.33	6.32	24.55	39.74	54.00	-14.26	AV
H	22980	50.04	30.85	7.45	24.69	51.33	74.00	-22.67	PK
H	22980	39.77	30.85	7.45	24.69	41.06	54.00	-12.94	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5785MHz									
V	11570	48.21	30.55	5.77	24.66	48.09	74.00	-25.91	PK
V	11570	35.27	30.55	5.77	24.66	35.15	54.00	-18.85	AV
V	17355	47.92	30.33	6.32	24.55	48.46	74.00	-25.54	PK
V	17355	41.27	30.33	6.32	24.55	41.81	54.00	-12.19	AV
V	23140	49.44	30.85	7.45	24.69	50.73	74.00	-23.27	PK
V	23140	40.64	30.85	7.45	24.69	41.93	54.00	-12.07	AV
H	11570	47.12	30.55	5.77	24.66	47.00	74.00	-27.00	PK
H	11570	40.08	30.55	5.77	24.66	39.96	54.00	-14.04	AV
H	17355	47.13	30.33	6.32	24.55	47.67	74.00	-26.33	PK
H	17355	41.47	30.33	6.32	24.55	42.01	54.00	-11.99	AV
H	23140	48.81	30.85	7.45	24.69	50.10	74.00	-23.90	PK
H	23140	38.83	30.85	7.45	24.69	40.12	54.00	-13.88	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650	48.77	30.55	5.77	24.66	48.65	74.00	-25.35	PK
V	11650	35.81	30.55	5.77	24.66	35.69	54.00	-18.31	AV
V	17475	48.65	30.33	6.32	24.55	49.19	74.00	-24.81	PK
V	17475	40.26	30.33	6.32	24.55	40.80	54.00	-13.20	AV
V	23300	50.22	30.85	7.45	24.69	51.51	74.00	-22.49	PK
V	23300	39.52	30.85	7.45	24.69	40.81	54.00	-13.19	AV
H	11650	48.04	30.55	5.77	24.66	47.92	74.00	-26.08	PK
H	11650	39.94	30.55	5.77	24.66	39.82	54.00	-14.18	AV
H	17475	46.78	30.33	6.32	24.55	47.32	74.00	-26.68	PK
H	17475	39.96	30.33	6.32	24.55	40.50	54.00	-13.50	AV
H	23300	49.43	30.85	7.45	24.69	50.72	74.00	-23.28	PK
H	23300	39.61	30.85	7.45	24.69	40.90	54.00	-13.10	AV

ANT5-802.11ax40

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	10360	48.21	30.55	5.77	24.66	48.09	74.00	-25.91	PK
V	10360	36.76	30.55	5.77	24.66	36.64	54.00	-17.36	AV
V	15540	48.08	30.33	6.32	24.55	48.62	74.00	-25.38	PK
V	15540	41.01	30.33	6.32	24.55	41.55	54.00	-12.45	AV
V	20720	50.65	30.85	7.45	24.69	51.94	74.00	-22.06	PK
V	20720	39.86	30.85	7.45	24.69	41.15	54.00	-12.85	AV
H	10360	48.05	30.55	5.77	24.66	47.93	74.00	-26.07	PK
H	10360	40.68	30.55	5.77	24.66	40.56	54.00	-13.44	AV
H	15540	47.15	30.33	6.32	24.55	47.69	74.00	-26.31	PK
H	15540	40.80	30.33	6.32	24.55	41.34	54.00	-12.66	AV
H	20720	51.54	30.85	7.45	24.69	52.83	74.00	-21.17	PK
H	20720	39.74	30.85	7.45	24.69	41.03	54.00	-12.97	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5230MHz									
V	10460	47.94	30.55	5.77	24.66	47.82	74.00	-26.18	PK
V	10460	35.38	30.55	5.77	24.66	35.26	54.00	-18.74	AV
V	15690	48.22	30.33	6.32	24.55	48.76	74.00	-25.24	PK
V	15690	39.91	30.33	6.32	24.55	40.45	54.00	-13.55	AV
V	20920	51.12	30.85	7.45	24.69	52.41	74.00	-21.59	PK
V	20920	41.41	30.85	7.45	24.69	42.70	54.00	-11.30	AV
H	10460	45.97	30.55	5.77	24.66	45.85	74.00	-28.15	PK
H	10460	40.33	30.55	5.77	24.66	40.21	54.00	-13.79	AV
H	15690	48.65	30.33	6.32	24.55	49.19	74.00	-24.81	PK
H	15690	41.42	30.33	6.32	24.55	41.96	54.00	-12.04	AV
H	20920	50.85	30.85	7.45	24.69	52.14	74.00	-21.86	PK
H	20920	40.19	30.85	7.45	24.69	41.48	54.00	-12.52	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detecto r Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5755MHz									
V	11510	48.44	30.55	5.77	24.66	48.32	74.00	-25.68	PK
V	11510	33.80	30.55	5.77	24.66	33.68	54.00	-20.32	AV
V	17265	48.74	30.33	6.32	24.55	49.28	74.00	-24.72	PK
V	17265	41.36	30.33	6.32	24.55	41.90	54.00	-12.10	AV
V	23020	50.63	30.85	7.45	24.69	51.92	74.00	-22.08	PK
V	23020	39.41	30.85	7.45	24.69	40.70	54.00	-13.30	AV
H	11510	48.04	30.55	5.77	24.66	47.92	74.00	-26.08	PK
H	11510	38.34	30.55	5.77	24.66	38.22	54.00	-15.78	AV
H	17265	48.63	30.33	6.32	24.55	49.17	74.00	-24.83	PK
H	17265	39.30	30.33	6.32	24.55	39.84	54.00	-14.16	AV
H	23020	48.88	30.85	7.45	24.69	50.17	74.00	-23.83	PK
H	23020	39.48	30.85	7.45	24.69	40.77	54.00	-13.23	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5795MHz									
V	11510	47.47	30.55	5.77	24.66	47.35	74.00	-26.65	PK
V	11510	35.04	30.55	5.77	24.66	34.92	54.00	-19.08	AV
V	17265	49.00	30.33	6.32	24.55	49.54	74.00	-24.46	PK
V	17265	39.11	30.33	6.32	24.55	39.65	54.00	-14.35	AV
V	23020	49.64	30.85	7.45	24.69	50.93	74.00	-23.07	PK
V	23020	41.69	30.85	7.45	24.69	42.98	54.00	-11.02	AV
H	11510	45.91	30.55	5.77	24.66	45.79	74.00	-28.21	PK
H	11510	38.48	30.55	5.77	24.66	38.36	54.00	-15.64	AV
H	17265	47.67	30.33	6.32	24.55	48.21	74.00	-25.79	PK
H	17265	39.83	30.33	6.32	24.55	40.37	54.00	-13.63	AV
H	23020	50.92	30.85	7.45	24.69	52.21	74.00	-21.79	PK
H	23020	40.03	30.85	7.45	24.69	41.32	54.00	-12.68	AV

ANT5-802.11ax80

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
5210MHz									
V	10420	48.48	30.55	5.77	24.66	48.36	74.00	-25.64	PK
V	10420	34.47	30.55	5.77	24.66	34.35	54.00	-19.65	AV
V	15630	47.91	30.33	6.32	24.55	48.45	74.00	-25.55	PK
V	15630	40.14	30.33	6.32	24.55	40.68	54.00	-13.32	AV
V	20840	49.24	30.85	7.45	24.69	50.53	74.00	-23.47	PK
V	20840	41.66	30.85	7.45	24.69	42.95	54.00	-11.05	AV
H	10420	47.46	30.55	5.77	24.66	47.34	74.00	-26.66	PK
H	10420	38.60	30.55	5.77	24.66	38.48	54.00	-15.52	AV
H	15630	48.37	30.33	6.32	24.55	48.91	74.00	-25.09	PK
H	15630	40.23	30.33	6.32	24.55	40.77	54.00	-13.23	AV
H	20840	48.80	30.85	7.45	24.69	50.09	74.00	-23.91	PK
H	20840	40.05	30.85	7.45	24.69	41.34	54.00	-12.66	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5775MHz									
V	11550	47.62	30.55	5.77	24.66	47.50	74.00	-26.50	PK
V	11550	36.63	30.55	5.77	24.66	36.51	54.00	-17.49	AV
V	17325	49.70	30.33	6.32	24.55	50.24	74.00	-23.76	PK
V	17325	41.46	30.33	6.32	24.55	42.00	54.00	-12.00	AV
V	23100	50.66	30.85	7.45	24.69	51.95	74.00	-22.05	PK
V	23100	41.60	30.85	7.45	24.69	42.89	54.00	-11.11	AV
H	11550	47.37	30.55	5.77	24.66	47.25	74.00	-26.75	PK
H	11550	38.17	30.55	5.77	24.66	38.05	54.00	-15.95	AV
H	17325	47.88	30.33	6.32	24.55	48.42	74.00	-25.58	PK
H	17325	41.01	30.33	6.32	24.55	41.55	54.00	-12.45	AV
H	23100	51.16	30.85	7.45	24.69	52.45	74.00	-21.55	PK
H	23100	39.80	30.85	7.45	24.69	41.09	54.00	-12.91	AV

MIMO-802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	47.49	30.55	5.77	24.66	47.37	74.00	-26.63	PK
V	10360	33.88	30.55	5.77	24.66	33.76	54.00	-20.24	AV
V	15540	49.50	30.33	6.32	24.55	50.04	74.00	-23.96	PK
V	15540	39.91	30.33	6.32	24.55	40.45	54.00	-13.55	AV
V	20720	51.19	30.85	7.45	24.69	52.48	74.00	-21.52	PK
V	20720	41.01	30.85	7.45	24.69	42.30	54.00	-11.70	AV
H	10360	48.32	30.55	5.77	24.66	48.20	74.00	-25.80	PK
H	10360	39.01	30.55	5.77	24.66	38.89	54.00	-15.11	AV
H	15540	46.96	30.33	6.32	24.55	47.50	74.00	-26.50	PK
H	15540	41.23	30.33	6.32	24.55	41.77	54.00	-12.23	AV
H	20720	51.24	30.85	7.45	24.69	52.53	74.00	-21.47	PK
H	20720	47.49	30.55	5.77	24.66	47.37	74.00	-26.63	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	48.14	30.55	5.77	24.66	48.02	74.00	-25.98	PK
V	10400	35.32	30.55	5.77	24.66	35.20	54.00	-18.80	AV
V	15600	49.43	30.33	6.32	24.55	49.97	74.00	-24.03	PK
V	15600	40.77	30.33	6.32	24.55	41.31	54.00	-12.69	AV
V	20800	50.20	30.85	7.45	24.69	51.49	74.00	-22.51	PK
V	20800	40.50	30.85	7.45	24.69	41.79	54.00	-12.21	AV
H	10400	48.67	30.55	5.77	24.66	48.55	74.00	-25.45	PK
H	10400	39.96	30.55	5.77	24.66	39.84	54.00	-14.16	AV
H	15600	48.33	30.33	6.32	24.55	48.87	74.00	-25.13	PK
H	15600	39.79	30.33	6.32	24.55	40.33	54.00	-13.67	AV
H	20800	51.59	30.85	7.45	24.69	52.88	74.00	-21.12	PK
H	20800	39.99	30.85	7.45	24.69	41.28	54.00	-12.72	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	49.67	30.55	5.77	24.66	49.55	74.00	-24.45	PK
V	10480	36.29	30.55	5.77	24.66	36.17	54.00	-17.83	AV
V	15720	48.07	30.33	6.32	24.55	48.61	74.00	-25.39	PK
V	15720	40.81	30.33	6.32	24.55	41.35	54.00	-12.65	AV
V	20960	50.88	30.85	7.45	24.69	52.17	74.00	-21.83	PK
V	20960	40.22	30.85	7.45	24.69	41.51	54.00	-12.49	AV
H	10480	46.03	30.55	5.77	24.66	45.91	74.00	-28.09	PK
H	10480	39.06	30.55	5.77	24.66	38.94	54.00	-15.06	AV
H	15720	48.06	30.33	6.32	24.55	48.60	74.00	-25.40	PK
H	15720	41.00	30.33	6.32	24.55	41.54	54.00	-12.46	AV
H	20960	50.26	30.85	7.45	24.69	51.55	74.00	-22.45	PK
H	20960	40.28	30.85	7.45	24.69	41.57	54.00	-12.43	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5745MHz									
V	11490	48.79	30.55	5.77	24.66	48.67	74.00	-25.33	PK
V	11490	34.39	30.55	5.77	24.66	34.27	54.00	-19.73	AV
V	17235	49.39	30.33	6.32	24.55	49.93	74.00	-24.07	PK
V	17235	38.79	30.33	6.32	24.55	39.33	54.00	-14.67	AV
V	22980	51.47	30.85	7.45	24.69	52.76	74.00	-21.24	PK
V	22980	40.48	30.85	7.45	24.69	41.77	54.00	-12.23	AV
H	11490	47.38	30.55	5.77	24.66	47.26	74.00	-26.74	PK
H	11490	38.57	30.55	5.77	24.66	38.45	54.00	-15.55	AV
H	17235	47.39	30.33	6.32	24.55	47.93	74.00	-26.07	PK
H	17235	38.79	30.33	6.32	24.55	39.33	54.00	-14.67	AV
H	22980	49.72	30.85	7.45	24.69	51.01	74.00	-22.99	PK
H	22980	40.03	30.85	7.45	24.69	41.32	54.00	-12.68	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5785MHz									
V	11570	47.47	30.55	5.77	24.66	47.35	74.00	-26.65	PK
V	11570	34.63	30.55	5.77	24.66	34.51	54.00	-19.49	AV
V	17355	49.68	30.33	6.32	24.55	50.22	74.00	-23.78	PK
V	17355	40.53	30.33	6.32	24.55	41.07	54.00	-12.93	AV
V	23140	49.52	30.85	7.45	24.69	50.81	74.00	-23.19	PK
V	23140	39.54	30.85	7.45	24.69	40.83	54.00	-13.17	AV
H	11570	46.00	30.55	5.77	24.66	45.88	74.00	-28.12	PK
H	11570	38.85	30.55	5.77	24.66	38.73	54.00	-15.27	AV
H	17355	47.69	30.33	6.32	24.55	48.23	74.00	-25.77	PK
H	17355	41.34	30.33	6.32	24.55	41.88	54.00	-12.12	AV
H	23140	48.85	30.85	7.45	24.69	50.14	74.00	-23.86	PK
H	23140	38.79	30.85	7.45	24.69	40.08	54.00	-13.92	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650	47.34	30.55	5.77	24.66	47.22	74.00	-26.78	PK
V	11650	35.61	30.55	5.77	24.66	35.49	54.00	-18.51	AV
V	17475	48.31	30.33	6.32	24.55	48.85	74.00	-25.15	PK
V	17475	39.73	30.33	6.32	24.55	40.27	54.00	-13.73	AV
V	23300	51.68	30.85	7.45	24.69	52.97	74.00	-21.03	PK
V	23300	41.03	30.85	7.45	24.69	42.32	54.00	-11.68	AV
H	11650	48.51	30.55	5.77	24.66	48.39	74.00	-25.61	PK
H	11650	38.05	30.55	5.77	24.66	37.93	54.00	-16.07	AV
H	17475	48.71	30.33	6.32	24.55	49.25	74.00	-24.75	PK
H	17475	40.59	30.33	6.32	24.55	41.13	54.00	-12.87	AV
H	23300	49.01	30.85	7.45	24.69	50.30	74.00	-23.70	PK
H	23300	39.05	30.85	7.45	24.69	40.34	54.00	-13.66	AV

MIMO-802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	10380	47.52	30.55	5.77	24.66	47.40	74.00	-26.60	PK
V	10380	34.61	30.55	5.77	24.66	34.49	54.00	-19.51	AV
V	15570	48.20	30.33	6.32	24.55	48.74	74.00	-25.26	PK
V	15570	40.52	30.33	6.32	24.55	41.06	54.00	-12.94	AV
V	20760	49.55	30.85	7.45	24.69	50.84	74.00	-23.16	PK
V	20760	41.10	30.85	7.45	24.69	42.39	54.00	-11.61	AV
H	10380	47.55	30.55	5.77	24.66	47.43	74.00	-26.57	PK
H	10380	39.71	30.55	5.77	24.66	39.59	54.00	-14.41	AV
H	15570	48.09	30.33	6.32	24.55	48.63	74.00	-25.37	PK
H	15570	40.11	30.33	6.32	24.55	40.65	54.00	-13.35	AV
H	20760	49.67	30.85	7.45	24.69	50.96	74.00	-23.04	PK
H	20760	41.49	30.85	7.45	24.69	42.78	54.00	-11.22	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5230MHz									
V	10460	47.75	30.55	5.77	24.66	47.63	74.00	-26.37	PK
V	10460	36.60	30.55	5.77	24.66	36.48	54.00	-17.52	AV
V	15690	47.86	30.33	6.32	24.55	48.40	74.00	-25.60	PK
V	15690	41.26	30.33	6.32	24.55	41.80	54.00	-12.20	AV
V	20920	50.05	30.85	7.45	24.69	51.34	74.00	-22.66	PK
V	20920	39.08	30.85	7.45	24.69	40.37	54.00	-13.63	AV
H	10460	47.83	30.55	5.77	24.66	47.71	74.00	-26.29	PK
H	10460	39.27	30.55	5.77	24.66	39.15	54.00	-14.85	AV
H	15690	47.12	30.33	6.32	24.55	47.66	74.00	-26.34	PK
H	15690	41.37	30.33	6.32	24.55	41.91	54.00	-12.09	AV
H	20920	50.45	30.85	7.45	24.69	51.74	74.00	-22.26	PK
H	20920	39.32	30.85	7.45	24.69	40.61	54.00	-13.39	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5755MHz									
V	11510	49.43	30.55	5.77	24.66	49.31	74.00	-24.69	PK
V	11510	34.61	30.55	5.77	24.66	34.49	54.00	-19.51	AV
V	17265	49.54	30.33	6.32	24.55	50.08	74.00	-23.92	PK
V	17265	40.59	30.33	6.32	24.55	41.13	54.00	-12.87	AV
V	23020	50.76	30.85	7.45	24.69	52.05	74.00	-21.95	PK
V	23020	39.76	30.85	7.45	24.69	41.05	54.00	-12.95	AV
H	11510	46.86	30.55	5.77	24.66	46.74	74.00	-27.26	PK
H	11510	38.95	30.55	5.77	24.66	38.83	54.00	-15.17	AV
H	17265	47.31	30.33	6.32	24.55	47.85	74.00	-26.15	PK
H	17265	40.83	30.33	6.32	24.55	41.37	54.00	-12.63	AV
H	23020	49.51	30.85	7.45	24.69	50.80	74.00	-23.20	PK
H	23020	40.19	30.85	7.45	24.69	41.48	54.00	-12.52	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5795MHz									
V	11590	48.35	30.55	5.77	24.66	48.23	74.00	-25.77	PK
V	11590	34.58	30.55	5.77	24.66	34.46	54.00	-19.54	AV
V	17385	49.00	30.33	6.32	24.55	49.54	74.00	-24.46	PK
V	17385	39.55	30.33	6.32	24.55	40.09	54.00	-13.91	AV
V	23180	49.69	30.85	7.45	24.69	50.98	74.00	-23.02	PK
V	23180	40.50	30.85	7.45	24.69	41.79	54.00	-12.21	AV
H	11590	46.56	30.55	5.77	24.66	46.44	74.00	-27.56	PK
H	11590	40.70	30.55	5.77	24.66	40.58	54.00	-13.42	AV
H	17385	48.41	30.33	6.32	24.55	48.95	74.00	-25.05	PK
H	17385	41.26	30.33	6.32	24.55	41.80	54.00	-12.20	AV
H	23180	48.88	30.85	7.45	24.69	50.17	74.00	-23.83	PK
H	23180	39.57	30.85	7.45	24.69	40.86	54.00	-13.14	AV

MIMO--802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	47.10	30.55	5.77	24.66	46.98	74.00	-27.02	PK
V	10360	36.74	30.55	5.77	24.66	36.62	54.00	-17.38	AV
V	15540	49.32	30.33	6.32	24.55	49.86	74.00	-24.14	PK
V	15540	40.96	30.33	6.32	24.55	41.50	54.00	-12.50	AV
V	20720	48.77	30.85	7.45	24.69	50.06	74.00	-23.94	PK
V	20720	41.37	30.85	7.45	24.69	42.66	54.00	-11.34	AV
H	10360	48.54	30.55	5.77	24.66	48.42	74.00	-25.58	PK
H	10360	38.57	30.55	5.77	24.66	38.45	54.00	-15.55	AV
H	15540	47.35	30.33	6.32	24.55	47.89	74.00	-26.11	PK
H	15540	41.71	30.33	6.32	24.55	42.25	54.00	-11.75	AV
H	20720	51.53	30.85	7.45	24.69	52.82	74.00	-21.18	PK
H	20720	39.30	30.85	7.45	24.69	40.59	54.00	-13.41	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	47.88	30.55	5.77	24.66	47.76	74.00	-26.24	PK
V	10400	34.18	30.55	5.77	24.66	34.06	54.00	-19.94	AV
V	15600	49.09	30.33	6.32	24.55	49.63	74.00	-24.37	PK
V	15600	41.20	30.33	6.32	24.55	41.74	54.00	-12.26	AV
V	20800	51.45	30.85	7.45	24.69	52.74	74.00	-21.26	PK
V	20800	40.82	30.85	7.45	24.69	42.11	54.00	-11.89	AV
H	10400	47.96	30.55	5.77	24.66	47.84	74.00	-26.16	PK
H	10400	39.91	30.55	5.77	24.66	39.79	54.00	-14.21	AV
H	15600	48.20	30.33	6.32	24.55	48.74	74.00	-25.26	PK
H	15600	39.07	30.33	6.32	24.55	39.61	54.00	-14.39	AV
H	20800	49.57	30.85	7.45	24.69	50.86	74.00	-23.14	PK
H	20800	39.40	30.85	7.45	24.69	40.69	54.00	-13.31	AV

Page 55 of 55

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	46.77	30.55	5.77	24.66	46.65	74.00	-27.35	PK
V	10480	35.52	30.55	5.77	24.66	35.40	54.00	-18.60	AV
V	15720	48.99	30.33	6.32	24.55	49.53	74.00	-24.47	PK
V	15720	39.72	30.33	6.32	24.55	40.26	54.00	-13.74	AV
V	20960	50.87	30.85	7.45	24.69	52.16	74.00	-21.84	PK
V	20960	39.42	30.85	7.45	24.69	40.71	54.00	-13.29	AV
H	10480	46.09	30.55	5.77	24.66	45.97	74.00	-28.03	PK
H	10480	40.41	30.55	5.77	24.66	40.29	54.00	-13.71	AV
H	15720	47.00	30.33	6.32	24.55	47.54	74.00	-26.46	PK
H	15720	40.80	30.33	6.32	24.55	41.34	54.00	-12.66	AV
H	20960	50.01	30.85	7.45	24.69	51.30	74.00	-22.70	PK
H	20960	40.81	30.85	7.45	24.69	42.10	54.00	-11.90	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5745MHz									
V	11490	47.12	30.55	5.77	24.66	47.00	74.00	-27.00	PK
V	11490	35.74	30.55	5.77	24.66	35.62	54.00	-18.38	AV
V	17235	49.67	30.33	6.32	24.55	50.21	74.00	-23.79	PK
V	17235	39.72	30.33	6.32	24.55	40.26	54.00	-13.74	AV
V	22980	51.26	30.85	7.45	24.69	52.55	74.00	-21.45	PK
V	22980	41.30	30.85	7.45	24.69	42.59	54.00	-11.41	AV
H	11490	45.97	30.55	5.77	24.66	45.85	74.00	-28.15	PK
H	11490	39.25	30.55	5.77	24.66	39.13	54.00	-14.87	AV
H	17235	48.08	30.33	6.32	24.55	48.62	74.00	-25.38	PK
H	17235	39.50	30.33	6.32	24.55	40.04	54.00	-13.96	AV
H	22980	50.60	30.85	7.45	24.69	51.89	74.00	-22.11	PK
H	22980	40.96	30.85	7.45	24.69	42.25	54.00	-11.75	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5785MHz									
V	11570	49.15	30.55	5.77	24.66	49.03	74.00	-24.97	PK
V	11570	33.88	30.55	5.77	24.66	33.76	54.00	-20.24	AV
V	17355	48.26	30.33	6.32	24.55	48.80	74.00	-25.20	PK
V	17355	39.32	30.33	6.32	24.55	39.86	54.00	-14.14	AV
V	23140	51.72	30.85	7.45	24.69	53.01	74.00	-20.99	PK
V	23140	40.56	30.85	7.45	24.69	41.85	54.00	-12.15	AV
H	11570	47.49	30.55	5.77	24.66	47.37	74.00	-26.63	PK
H	11570	39.76	30.55	5.77	24.66	39.64	54.00	-14.36	AV
H	17355	48.39	30.33	6.32	24.55	48.93	74.00	-25.07	PK
H	17355	39.65	30.33	6.32	24.55	40.19	54.00	-13.81	AV
H	23140	49.36	30.85	7.45	24.69	50.65	74.00	-23.35	PK
H	23140	39.13	30.85	7.45	24.69	40.42	54.00	-13.58	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5795MHz									
V	11590	47.42	30.55	5.77	24.66	47.30	74.00	-26.70	PK

V	11590	36.14	30.55	5.77	24.66	36.02	54.00	-17.98	AV
V	17385	48.90	30.33	6.32	24.55	49.44	74.00	-24.56	PK
V	17385	40.34	30.33	6.32	24.55	40.88	54.00	-13.12	AV
V	23180	49.87	30.85	7.45	24.69	51.16	74.00	-22.84	PK
V	23180	39.01	30.85	7.45	24.69	40.30	54.00	-13.70	AV
H	11590	47.50	30.55	5.77	24.66	47.38	74.00	-26.62	PK
H	11590	39.01	30.55	5.77	24.66	38.89	54.00	-15.11	AV
H	17385	47.03	30.33	6.32	24.55	47.57	74.00	-26.43	PK
H	17385	38.81	30.33	6.32	24.55	39.35	54.00	-14.65	AV
H	23180	49.78	30.85	7.45	24.69	51.07	74.00	-22.93	PK
H	23180	40.52	30.85	7.45	24.69	41.81	54.00	-12.19	AV

MIMO-802.11ac40

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	10380	49.25	30.55	5.77	24.66	49.13	74.00	-24.87	PK
V	10380	34.00	30.55	5.77	24.66	33.88	54.00	-20.12	AV
V	15570	48.43	30.33	6.32	24.55	48.97	74.00	-25.03	PK
V	15570	41.26	30.33	6.32	24.55	41.80	54.00	-12.20	AV
V	20760	51.29	30.85	7.45	24.69	52.58	74.00	-21.42	PK
V	20760	38.77	30.85	7.45	24.69	40.06	54.00	-13.94	AV
H	10380	45.90	30.55	5.77	24.66	45.78	74.00	-28.22	PK
H	10380	40.23	30.55	5.77	24.66	40.11	54.00	-13.89	AV
H	15570	47.67	30.33	6.32	24.55	48.21	74.00	-25.79	PK
H	15570	41.11	30.33	6.32	24.55	41.65	54.00	-12.35	AV
H	20760	49.91	30.85	7.45	24.69	51.20	74.00	-22.80	PK
H	20760	39.27	30.85	7.45	24.69	40.56	54.00	-13.44	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5230MHz									
V	10460	48.41	30.55	5.77	24.66	48.29	74.00	-25.71	PK
V	10460	34.01	30.55	5.77	24.66	33.89	54.00	-20.11	AV
V	15690	48.06	30.33	6.32	24.55	48.60	74.00	-25.40	PK
V	15690	41.60	30.33	6.32	24.55	42.14	54.00	-11.86	AV
V	20920	49.70	30.85	7.45	24.69	50.99	74.00	-23.01	PK
V	20920	39.68	30.85	7.45	24.69	40.97	54.00	-13.03	AV
H	10460	46.51	30.55	5.77	24.66	46.39	74.00	-27.61	PK
H	10460	40.69	30.55	5.77	24.66	40.57	54.00	-13.43	AV
H	15690	48.67	30.33	6.32	24.55	49.21	74.00	-24.79	PK
H	15690	38.96	30.33	6.32	24.55	39.50	54.00	-14.50	AV
H	20920	50.75	30.85	7.45	24.69	52.04	74.00	-21.96	PK
H	20920	41.67	30.85	7.45	24.69	42.96	54.00	-11.04	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5755MHz									
V	11510	48.20	30.55	5.77	24.66	48.08	74.00	-25.92	PK
V	11510	34.16	30.55	5.77	24.66	34.04	54.00	-19.96	AV
V	17265	49.08	30.33	6.32	24.55	49.62	74.00	-24.38	PK
V	17265	39.70	30.33	6.32	24.55	40.24	54.00	-13.76	AV
V	23020	50.28	30.85	7.45	24.69	51.57	74.00	-22.43	PK
V	23020	40.17	30.85	7.45	24.69	41.46	54.00	-12.54	AV

H	11510	48.37	30.55	5.77	24.66	48.25	74.00	-25.75	PK
H	11510	39.51	30.55	5.77	24.66	39.39	54.00	-14.61	AV
H	17265	47.42	30.33	6.32	24.55	47.96	74.00	-26.04	PK
H	17265	41.40	30.33	6.32	24.55	41.94	54.00	-12.06	AV
H	23020	50.51	30.85	7.45	24.69	51.80	74.00	-22.20	PK
H	23020	39.44	30.85	7.45	24.69	40.73	54.00	-13.27	AV

MIMO-802.11ac80

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detect or Type
5210MHz									
V	10420	48.55	30.55	5.77	24.66	48.43	74.00	-25.57	PK
V	10420	36.16	30.55	5.77	24.66	36.04	54.00	-17.96	AV
V	15630	48.01	30.33	6.32	24.55	48.55	74.00	-25.45	PK
V	15630	40.69	30.33	6.32	24.55	41.23	54.00	-12.77	AV
V	20840	49.94	30.85	7.45	24.69	51.23	74.00	-22.77	PK
V	20840	40.95	30.85	7.45	24.69	42.24	54.00	-11.76	AV
H	10420	47.13	30.55	5.77	24.66	47.01	74.00	-26.99	PK
H	10420	40.55	30.55	5.77	24.66	40.43	54.00	-13.57	AV
H	15630	47.80	30.33	6.32	24.55	48.34	74.00	-25.66	PK
H	15630	39.21	30.33	6.32	24.55	39.75	54.00	-14.25	AV
H	20840	50.13	30.85	7.45	24.69	51.42	74.00	-22.58	PK
H	20840	39.39	30.85	7.45	24.69	40.68	54.00	-13.32	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detect or Type
High Channel:5775MHz									
V	11550	48.16	30.55	5.77	24.66	48.04	74.00	-25.96	PK
V	11550	36.69	30.55	5.77	24.66	36.57	54.00	-17.43	AV
V	17325	48.04	30.33	6.32	24.55	48.58	74.00	-25.42	PK
V	17325	41.35	30.33	6.32	24.55	41.89	54.00	-12.11	AV
V	23100	51.71	30.85	7.45	24.69	53.00	74.00	-21.00	PK
V	23100	40.08	30.85	7.45	24.69	41.37	54.00	-12.63	AV
H	11550	48.04	30.55	5.77	24.66	47.92	74.00	-26.08	PK
H	11550	40.12	30.55	5.77	24.66	40.00	54.00	-14.00	AV
H	17325	47.78	30.33	6.32	24.55	48.32	74.00	-25.68	PK
H	17325	41.20	30.33	6.32	24.55	41.74	54.00	-12.26	AV
H	23100	49.94	30.85	7.45	24.69	51.23	74.00	-22.77	PK
H	23100	41.18	30.85	7.45	24.69	42.47	54.00	-11.53	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

MIMO--802.11ax20

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360	48.88	30.55	5.77	24.66	48.76	74.00	-25.24	PK
V	10360	35.60	30.55	5.77	24.66	35.48	54.00	-18.52	AV
V	15540	48.64	30.33	6.32	24.55	49.18	74.00	-24.82	PK
V	15540	39.19	30.33	6.32	24.55	39.73	54.00	-14.27	AV
V	20720	49.92	30.85	7.45	24.69	51.21	74.00	-22.79	PK
V	20720	41.50	30.85	7.45	24.69	42.79	54.00	-11.21	AV
H	10360	47.11	30.55	5.77	24.66	46.99	74.00	-27.01	PK
H	10360	38.49	30.55	5.77	24.66	38.37	54.00	-15.63	AV
H	15540	47.95	30.33	6.32	24.55	48.49	74.00	-25.51	PK
H	15540	39.57	30.33	6.32	24.55	40.11	54.00	-13.89	AV
H	20720	48.87	30.85	7.45	24.69	50.16	74.00	-23.84	PK
H	20720	38.77	30.85	7.45	24.69	40.06	54.00	-13.94	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400	48.22	30.55	5.77	24.66	48.10	74.00	-25.90	PK
V	10400	36.42	30.55	5.77	24.66	36.30	54.00	-17.70	AV
V	15600	49.28	30.33	6.32	24.55	49.82	74.00	-24.18	PK
V	15600	41.67	30.33	6.32	24.55	42.21	54.00	-11.79	AV
V	20800	50.72	30.85	7.45	24.69	52.01	74.00	-21.99	PK
V	20800	40.85	30.85	7.45	24.69	42.14	54.00	-11.86	AV
H	10400	48.09	30.55	5.77	24.66	47.97	74.00	-26.03	PK
H	10400	39.34	30.55	5.77	24.66	39.22	54.00	-14.78	AV
H	15600	47.05	30.33	6.32	24.55	47.59	74.00	-26.41	PK
H	15600	40.33	30.33	6.32	24.55	40.87	54.00	-13.13	AV
H	20800	49.48	30.85	7.45	24.69	50.77	74.00	-23.23	PK
H	20800	39.06	30.85	7.45	24.69	40.35	54.00	-13.65	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	10480	48.34	30.55	5.77	24.66	48.22	74.00	-25.78	PK
V	10480	33.97	30.55	5.77	24.66	33.85	54.00	-20.15	AV
V	15720	47.88	30.33	6.32	24.55	48.42	74.00	-25.58	PK
V	15720	40.45	30.33	6.32	24.55	40.99	54.00	-13.01	AV
V	20960	50.91	30.85	7.45	24.69	52.20	74.00	-21.80	PK
V	20960	40.02	30.85	7.45	24.69	41.31	54.00	-12.69	AV
H	10480	46.96	30.55	5.77	24.66	46.84	74.00	-27.16	PK
H	10480	37.97	30.55	5.77	24.66	37.85	54.00	-16.15	AV
H	15720	48.74	30.33	6.32	24.55	49.28	74.00	-24.72	PK
H	15720	39.56	30.33	6.32	24.55	40.10	54.00	-13.90	AV
H	20960	48.99	30.85	7.45	24.69	50.28	74.00	-23.72	PK
H	20960	41.28	30.85	7.45	24.69	42.57	54.00	-11.43	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5745MHz									
V	11490	49.60	30.55	5.77	24.66	49.48	74.00	-24.52	PK
V	11490	35.93	30.55	5.77	24.66	35.81	54.00	-18.19	AV
V	17235	48.62	30.33	6.32	24.55	49.16	74.00	-24.84	PK
V	17235	41.57	30.33	6.32	24.55	42.11	54.00	-11.89	AV
V	22980	49.80	30.85	7.45	24.69	51.09	74.00	-22.91	PK
V	22980	41.14	30.85	7.45	24.69	42.43	54.00	-11.57	AV
H	11490	48.10	30.55	5.77	24.66	47.98	74.00	-26.02	PK
H	11490	39.41	30.55	5.77	24.66	39.29	54.00	-14.71	AV
H	17235	48.36	30.33	6.32	24.55	48.90	74.00	-25.10	PK
H	17235	40.15	30.33	6.32	24.55	40.69	54.00	-13.31	AV
H	22980	49.75	30.85	7.45	24.69	51.04	74.00	-22.96	PK
H	22980	39.27	30.85	7.45	24.69	40.56	54.00	-13.44	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5785MHz									
V	11570	47.03	30.55	5.77	24.66	46.91	74.00	-27.09	PK
V	11570	35.26	30.55	5.77	24.66	35.14	54.00	-18.86	AV
V	17355	48.18	30.33	6.32	24.55	48.72	74.00	-25.28	PK
V	17355	41.63	30.33	6.32	24.55	42.17	54.00	-11.83	AV
V	23140	49.92	30.85	7.45	24.69	51.21	74.00	-22.79	PK
V	23140	41.05	30.85	7.45	24.69	42.34	54.00	-11.66	AV
H	11570	48.19	30.55	5.77	24.66	48.07	74.00	-25.93	PK
H	11570	38.45	30.55	5.77	24.66	38.33	54.00	-15.67	AV
H	17355	46.88	30.33	6.32	24.55	47.42	74.00	-26.58	PK
H	17355	41.27	30.33	6.32	24.55	41.81	54.00	-12.19	AV
H	23140	50.98	30.85	7.45	24.69	52.27	74.00	-21.73	PK
H	23140	41.07	30.85	7.45	24.69	42.36	54.00	-11.64	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5795MHz									
V	11590	49.51	30.55	5.77	24.66	49.39	74.00	-24.61	PK
V	11590	35.04	30.55	5.77	24.66	34.92	54.00	-19.08	AV
V	17385	48.13	30.33	6.32	24.55	48.67	74.00	-25.33	PK
V	17385	39.79	30.33	6.32	24.55	40.33	54.00	-13.67	AV
V	23180	51.06	30.85	7.45	24.69	52.35	74.00	-21.65	PK
V	23180	40.31	30.85	7.45	24.69	41.60	54.00	-12.40	AV
H	11590	46.46	30.55	5.77	24.66	46.34	74.00	-27.66	PK
H	11590	38.98	30.55	5.77	24.66	38.86	54.00	-15.14	AV
H	17385	47.02	30.33	6.32	24.55	47.56	74.00	-26.44	PK
H	17385	41.68	30.33	6.32	24.55	42.22	54.00	-11.78	AV
H	23180	49.60	30.85	7.45	24.69	50.89	74.00	-23.11	PK
H	23180	39.43	30.85	7.45	24.69	40.72	54.00	-13.28	AV

MIMO-802.11ax40

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5190MHz									
V	10380	48.82	30.55	5.77	24.66	48.70	74.00	-25.30	PK
V	10380	36.64	30.55	5.77	24.66	36.52	54.00	-17.48	AV
V	15570	47.79	30.33	6.32	24.55	48.33	74.00	-25.67	PK
V	15570	41.60	30.33	6.32	24.55	42.14	54.00	-11.86	AV
V	20760	49.51	30.85	7.45	24.69	50.80	74.00	-23.20	PK
V	20760	40.39	30.85	7.45	24.69	41.68	54.00	-12.32	AV
H	10380	48.35	30.55	5.77	24.66	48.23	74.00	-25.77	PK
H	10380	39.54	30.55	5.77	24.66	39.42	54.00	-14.58	AV
H	15570	48.34	30.33	6.32	24.55	48.88	74.00	-25.12	PK
H	15570	39.85	30.33	6.32	24.55	40.39	54.00	-13.61	AV
H	20760	50.81	30.85	7.45	24.69	52.10	74.00	-21.90	PK
H	20760	40.41	30.85	7.45	24.69	41.70	54.00	-12.30	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5230MHz									
V	10460	49.60	30.55	5.77	24.66	49.48	74.00	-24.52	PK
V	10460	35.21	30.55	5.77	24.66	35.09	54.00	-18.91	AV
V	15690	49.30	30.33	6.32	24.55	49.84	74.00	-24.16	PK
V	15690	39.34	30.33	6.32	24.55	39.88	54.00	-14.12	AV
V	20920	49.98	30.85	7.45	24.69	51.27	74.00	-22.73	PK
V	20920	41.36	30.85	7.45	24.69	42.65	54.00	-11.35	AV
H	10460	48.62	30.55	5.77	24.66	48.50	74.00	-25.50	PK
H	10460	40.35	30.55	5.77	24.66	40.23	54.00	-13.77	AV
H	15690	48.08	30.33	6.32	24.55	48.62	74.00	-25.38	PK
H	15690	41.00	30.33	6.32	24.55	41.54	54.00	-12.46	AV
H	20920	51.33	30.85	7.45	24.69	52.62	74.00	-21.38	PK
H	20920	39.52	30.85	7.45	24.69	40.81	54.00	-13.19	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5755MHz									
V	11510	47.52	30.55	5.77	24.66	47.40	74.00	-26.60	PK
V	11510	35.10	30.55	5.77	24.66	34.98	54.00	-19.02	AV
V	17265	48.07	30.33	6.32	24.55	48.61	74.00	-25.39	PK
V	17265	39.46	30.33	6.32	24.55	40.00	54.00	-14.00	AV
V	23020	50.89	30.85	7.45	24.69	52.18	74.00	-21.82	PK
V	23020	40.89	30.85	7.45	24.69	42.18	54.00	-11.82	AV
H	11510	46.61	30.55	5.77	24.66	46.49	74.00	-27.51	PK
H	11510	40.70	30.55	5.77	24.66	40.58	54.00	-13.42	AV
H	17265	47.64	30.33	6.32	24.55	48.18	74.00	-25.82	PK
H	17265	41.00	30.33	6.32	24.55	41.54	54.00	-12.46	AV
H	23020	51.08	30.85	7.45	24.69	52.37	74.00	-21.63	PK
H	23020	40.99	30.85	7.45	24.69	42.28	54.00	-11.72	AV

MIMO-802.11ax80

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
5210MHz									
V	10420	48.79	30.55	5.77	24.66	48.67	74.00	-25.33	PK
V	10420	35.15	30.55	5.77	24.66	35.03	54.00	-18.97	AV
V	15630	49.41	30.33	6.32	24.55	49.95	74.00	-24.05	PK
V	15630	39.25	30.33	6.32	24.55	39.79	54.00	-14.21	AV
V	20840	49.29	30.85	7.45	24.69	50.58	74.00	-23.42	PK
V	20840	39.12	30.85	7.45	24.69	40.41	54.00	-13.59	AV
H	10420	46.28	30.55	5.77	24.66	46.16	74.00	-27.84	PK
H	10420	37.94	30.55	5.77	24.66	37.82	54.00	-16.18	AV
H	15630	47.86	30.33	6.32	24.55	48.40	74.00	-25.60	PK
H	15630	41.20	30.33	6.32	24.55	41.74	54.00	-12.26	AV
H	20840	49.73	30.85	7.45	24.69	51.02	74.00	-22.98	PK
H	20840	40.55	30.85	7.45	24.69	41.84	54.00	-12.16	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifi er	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5775MHz									
V	11550	48.74	30.55	5.77	24.66	48.62	74.00	-25.38	PK
V	11550	34.11	30.55	5.77	24.66	33.99	54.00	-20.01	AV
V	17325	49.53	30.33	6.32	24.55	50.07	74.00	-23.93	PK
V	17325	39.00	30.33	6.32	24.55	39.54	54.00	-14.46	AV
V	23100	50.86	30.85	7.45	24.69	52.15	74.00	-21.85	PK
V	23100	40.05	30.85	7.45	24.69	41.34	54.00	-12.66	AV
H	11550	46.66	30.55	5.77	24.66	46.54	74.00	-27.46	PK
H	11550	40.53	30.55	5.77	24.66	40.41	54.00	-13.59	AV
H	17325	48.33	30.33	6.32	24.55	48.87	74.00	-25.13	PK
H	17325	39.93	30.33	6.32	24.55	40.47	54.00	-13.53	AV
H	23100	49.26	30.85	7.45	24.69	50.55	74.00	-23.45	PK
H	23100	41.35	30.85	7.45	24.69	42.64	54.00	-11.36	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Radiated Band Edge Test(only show worst mode and antenna):

ANT1

Worse case mode:		802.11a		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	51.31	-0.12	51.19	74.00	-22.81	peak	H
5150	41.94	-0.12	41.82	54.00	-12.18	AV	H
5150	52.89	-0.12	52.77	74.00	-21.23	peak	V
5150	39.49	-0.12	39.37	54.00	-14.63	AV	V

Worse case mode:		802.11a		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	51.72	-0.12	51.60	74.00	-22.40	peak	H
5250	41.23	-0.12	41.11	54.00	-12.89	AV	H
5250	55.27	-0.12	55.15	74.00	-18.85	peak	V
5250	39.20	-0.12	39.08	54.00	-14.92	AV	V

Worse case mode:		802.11a		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	50.24	-0.12	50.12	68.20	-18.08	peak	H
5700	84.79	-0.12	84.67	105.20	-20.53	peak	H
5720	90.26	-0.12	90.14	110.80	-20.66	peak	H
5725	97.73	-0.12	97.61	122.20	-24.59	peak	H
5650	47.15	-0.12	47.03	68.20	-21.17	peak	V
5700	82.83	-0.12	82.71	105.20	-22.49	peak	V
5720	90.49	-0.12	90.37	110.80	-20.43	peak	V
5725	94.76	-0.12	94.64	122.20	-27.56	peak	V

Worse case mode:		802.11a		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	95.75	-0.12	95.63	122.20	-26.57	peak	H
5855	88.56	-0.12	88.44	110.80	-22.36	peak	H
5875	84.96	-0.12	84.84	105.20	-20.36	peak	H
5925	47.19	-0.12	47.07	68.20	-21.13	peak	H
5850	96.55	-0.12	96.43	122.20	-25.77	peak	V
5855	90.20	-0.12	90.08	110.80	-20.72	peak	V
5875	83.04	-0.12	82.92	105.20	-22.28	peak	V
5925	47.49	-0.12	47.37	68.20	-20.83	peak	V

Worse case mode:		802.11n20		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	53.53	-0.12	53.41	74.00	-20.59	peak	H
5150	41.38	-0.12	41.26	54.00	-12.74	AV	H
5150	54.27	-0.12	54.15	74.00	-19.85	peak	V
5150	37.62	-0.12	37.50	54.00	-16.50	AV	V

Worse case mode:		802.11n20		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	51.26	-0.12	51.14	74.00	-22.86	peak	H
5250	38.02	-0.12	37.90	54.00	-16.10	AV	H
5250	53.25	-0.12	53.13	74.00	-20.87	peak	V
5250	38.18	-0.12	38.06	54.00	-15.94	AV	V

Worse case mode:		802.11n20		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	49.74	-0.12	49.62	68.20	-18.58	peak	H
5700	82.23	-0.12	82.11	105.20	-23.09	peak	H
5720	88.42	-0.12	88.30	110.80	-22.50	peak	H
5725	97.54	-0.12	97.42	122.20	-24.78	peak	H
5650	48.27	-0.12	48.15	68.20	-20.05	peak	V
5700	83.98	-0.12	83.86	105.20	-21.34	peak	V
5720	87.28	-0.12	87.16	110.80	-23.64	peak	V
5725	95.68	-0.12	95.56	122.20	-26.64	peak	V

Worse case mode:		802.11n20		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	99.63	-0.12	99.51	122.20	-22.69	peak	H
5855	83.90	-0.12	83.78	110.80	-27.02	peak	H
5875	83.21	-0.12	83.09	105.20	-22.11	peak	H
5925	44.02	-0.12	43.90	68.20	-24.30	peak	H
5850	95.50	-0.12	95.38	122.20	-26.82	peak	V
5855	87.96	-0.12	87.84	110.80	-22.96	peak	V
5875	81.99	-0.12	81.87	105.20	-23.33	peak	V
5925	48.37	-0.12	48.25	68.20	-19.95	peak	V

Worse case mode:		802.11n40		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	53.55	-0.12	53.43	74.00	-20.57	peak	H
5150	41.82	-0.12	41.70	54.00	-12.30	AV	H
5150	53.67	-0.12	53.55	74.00	-20.45	peak	V
5150	37.32	-0.12	37.20	54.00	-16.80	AV	V

Worse case mode:		802.11n40		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	51.52	-0.12	51.40	74.00	-22.60	peak	H
5250	38.53	-0.12	38.41	54.00	-15.59	AV	H
5250	52.96	-0.12	52.84	74.00	-21.16	peak	V
5250	40.66	-0.12	40.54	54.00	-13.46	AV	V

Worse case mode:		802.11n40		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	47.18	-0.12	47.06	68.20	-21.14	peak	H
5700	84.95	-0.12	84.83	105.20	-20.37	peak	H
5720	87.92	-0.12	87.80	110.80	-23.00	peak	H
5725	97.33	-0.12	97.21	122.20	-24.99	peak	H
5650	48.13	-0.12	48.01	68.20	-20.19	peak	V
5700	82.64	-0.12	82.52	105.20	-22.68	peak	V
5720	87.63	-0.12	87.51	110.80	-23.29	peak	V
5725	95.68	-0.12	95.56	122.20	-26.64	peak	V

Worse case mode:		802.11n40		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	98.51	-0.12	98.39	122.20	-23.81	peak	H
5855	83.65	-0.12	83.53	110.80	-27.27	peak	H
5875	82.86	-0.12	82.74	105.20	-22.46	peak	H
5925	46.80	-0.12	46.68	68.20	-21.52	peak	H
5850	98.92	-0.12	98.80	122.20	-23.40	peak	V
5855	87.91	-0.12	87.79	110.80	-23.01	peak	V
5875	80.00	-0.12	79.88	105.20	-25.32	peak	V
5925	46.35	-0.12	46.23	68.20	-21.97	peak	V

Worse case mode:		802.11ac20		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	54.51	-0.12	54.39	74.00	-19.61	peak	H
5150	39.64	-0.12	39.52	54.00	-14.48	AV	H
5150	54.67	-0.12	54.55	74.00	-19.45	peak	V
5150	37.00	-0.12	36.88	54.00	-17.12	AV	V

Worse case mode:		802.11ac20		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	54.81	-0.12	54.69	74.00	-19.31	peak	H
5250	39.37	-0.12	39.25	54.00	-14.75	AV	H
5250	55.81	-0.12	55.69	74.00	-18.31	peak	V
5250	38.68	-0.12	38.56	54.00	-15.44	AV	V

Worse case mode:		802.11ac20		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	47.62	-0.12	47.50	68.20	-20.70	peak	H
5700	82.27	-0.12	82.15	105.20	-23.05	peak	H
5720	89.89	-0.12	89.77	110.80	-21.03	peak	H
5725	95.05	-0.12	94.93	122.20	-27.27	peak	H
5650	47.42	-0.12	47.30	68.20	-20.90	peak	V
5700	83.40	-0.12	83.28	105.20	-21.92	peak	V
5720	88.07	-0.12	87.95	110.80	-22.85	peak	V
5725	97.91	-0.12	97.79	122.20	-24.41	peak	V

Worse case mode:		802.11n20		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	99.61	-0.12	99.49	122.20	-22.71	peak	H
5855	83.79	-0.12	83.67	110.80	-27.13	peak	H
5875	83.93	-0.12	83.81	105.20	-21.39	peak	H
5925	47.58	-0.12	47.46	68.20	-20.74	peak	H
5850	94.40	-0.12	94.28	122.20	-27.92	peak	V
5855	86.42	-0.12	86.30	110.80	-24.50	peak	V
5875	83.81	-0.12	83.69	105.20	-21.51	peak	V
5925	46.41	-0.12	46.29	68.20	-21.91	peak	V

Worse case mode:		802.11ac40		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	54.29	-0.12	54.17	74.00	-19.83	peak	H
5150	38.96	-0.12	38.84	54.00	-15.16	AV	H
5150	52.56	-0.12	52.44	74.00	-21.56	peak	V
5150	38.60	-0.12	38.48	54.00	-15.52	AV	V

Worse case mode:		802.11ac40		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	55.15	-0.12	55.03	74.00	-18.97	peak	H
5250	39.16	-0.12	39.04	54.00	-14.96	AV	H
5250	53.38	-0.12	53.26	74.00	-20.74	peak	V
5250	37.35	-0.12	37.23	54.00	-16.77	AV	V

Worse case mode:		802.11ac40		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	49.56	-0.12	49.44	68.20	-18.76	peak	H
5700	82.42	-0.12	82.30	105.20	-22.90	peak	H
5720	88.30	-0.12	88.18	110.80	-22.62	peak	H
5725	96.05	-0.12	95.93	122.20	-26.27	peak	H
5650	49.69	-0.12	49.57	68.20	-18.63	peak	V
5700	84.89	-0.12	84.77	105.20	-20.43	peak	V
5720	89.05	-0.12	88.93	110.80	-21.87	peak	V
5725	94.75	-0.12	94.63	122.20	-27.57	peak	V

Worse case mode:		802.11ac40		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	94.43	-0.12	94.31	122.20	-27.89	peak	H
5855	87.35	-0.12	87.23	110.80	-23.57	peak	H
5875	87.84	-0.12	87.72	105.20	-17.48	peak	H
5925	46.08	-0.12	45.96	68.20	-22.24	peak	H
5850	97.10	-0.12	96.98	122.20	-25.22	peak	V
5855	88.72	-0.12	88.60	110.80	-22.20	peak	V
5875	83.71	-0.12	83.59	105.20	-21.61	peak	V
5925	49.49	-0.12	49.37	68.20	-18.83	peak	V

Worse case mode:		802.11ac80		Test channel:		42	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	53.04	-0.12	52.92	74.00	-21.08	peak	H
5150	38.62	-0.12	38.50	54.00	-15.50	AV	H
5150	53.32	-0.12	53.20	74.00	-20.80	peak	V
5150	39.95	-0.12	39.83	54.00	-14.17	AV	V
5250	53.90	-0.12	53.78	74.00	-20.22	peak	H
5250	39.03	-0.12	38.91	54.00	-15.09	AV	H
5250	52.83	-0.12	52.71	74.00	-21.29	peak	V
5250	38.99	-0.12	38.87	54.00	-15.13	AV	V

Worse case mode:		802.11ac80		Test channel:		155	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	49.50	-0.12	49.38	68.20	-18.82	peak	H
5700	83.26	-0.12	83.14	105.20	-22.06	peak	H
5720	90.21	-0.12	90.09	110.80	-20.71	peak	H
5725	96.27	-0.12	96.15	122.20	-26.05	peak	H
5650	47.50	-0.12	47.38	68.20	-20.82	peak	V
5700	83.22	-0.12	83.10	105.20	-22.10	peak	V
5720	87.66	-0.12	87.54	110.80	-23.26	peak	V
5725	96.47	-0.12	96.35	122.20	-25.85	peak	V
5850	96.30	-0.12	96.18	122.20	-26.02	peak	H
5855	87.05	-0.12	86.93	110.80	-23.87	peak	H
5875	86.67	-0.12	86.55	105.20	-18.65	peak	H
5925	44.03	-0.12	43.91	68.20	-24.29	peak	H
5850	96.65	-0.12	96.53	122.20	-25.67	peak	V
5855	87.44	-0.12	87.32	110.80	-23.48	peak	V
5875	82.20	-0.12	82.08	105.20	-23.12	peak	V
5925	49.91	-0.12	49.79	68.20	-18.41	peak	V

Factor =Antenna Factor + Cable Loss – Pre-amplifier,

ANT2

Worse case mode:		802.11a		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	51.94	-0.12	51.82	74.00	-22.18	peak	H
5150	40.42	-0.12	40.30	54.00	-13.70	AV	H
5150	54.11	-0.12	53.99	74.00	-20.01	peak	V
5150	40.86	-0.12	40.74	54.00	-13.26	AV	V

Worse case mode:		802.11a		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	53.40	-0.12	53.28	74.00	-20.72	peak	H
5250	38.42	-0.12	38.30	54.00	-15.70	AV	H
5250	53.12	-0.12	53.00	74.00	-21.00	peak	V
5250	38.55	-0.12	38.43	54.00	-15.57	AV	V

Worse case mode:		802.11a		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	50.20	-0.12	50.08	68.20	-18.12	peak	H
5700	83.82	-0.12	83.70	105.20	-21.50	peak	H
5720	90.05	-0.12	89.93	110.80	-20.87	peak	H
5725	97.95	-0.12	97.83	122.20	-24.37	peak	H
5650	48.50	-0.12	48.38	68.20	-19.82	peak	V
5700	83.74	-0.12	83.62	105.20	-21.58	peak	V
5720	87.52	-0.12	87.40	110.80	-23.40	peak	V
5725	95.54	-0.12	95.42	122.20	-26.78	peak	V

Worse case mode:		802.11a		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	99.57	-0.12	99.45	122.20	-22.75	peak	H
5855	83.35	-0.12	83.23	110.80	-27.57	peak	H
5875	82.34	-0.12	82.22	105.20	-22.98	peak	H
5925	46.75	-0.12	46.63	68.20	-21.57	peak	H
5850	94.70	-0.12	94.58	122.20	-27.62	peak	V
5855	87.17	-0.12	87.05	110.80	-23.75	peak	V
5875	80.72	-0.12	80.60	105.20	-24.60	peak	V
5925	48.13	-0.12	48.01	68.20	-20.19	peak	V

Worse case mode:		802.11n20		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	51.67	-0.12	51.55	74.00	-22.45	peak	H
5150	39.45	-0.12	39.33	54.00	-14.67	AV	H
5150	56.15	-0.12	56.03	74.00	-17.97	peak	V
5150	40.60	-0.12	40.48	54.00	-13.52	AV	V

Worse case mode:		802.11n20		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	51.54	-0.12	51.42	74.00	-22.58	peak	H
5250	40.22	-0.12	40.10	54.00	-13.90	AV	H
5250	55.96	-0.12	55.84	74.00	-18.16	peak	V
5250	39.63	-0.12	39.51	54.00	-14.49	AV	V

Worse case mode:		802.11n20		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	48.36	-0.12	48.24	68.20	-19.96	peak	H
5700	84.65	-0.12	84.53	105.20	-20.67	peak	H
5720	87.18	-0.12	87.06	110.80	-23.74	peak	H
5725	98.23	-0.12	98.11	122.20	-24.09	peak	H
5650	49.03	-0.12	48.91	68.20	-19.29	peak	V
5700	82.44	-0.12	82.32	105.20	-22.88	peak	V
5720	89.27	-0.12	89.15	110.80	-21.65	peak	V
5725	96.86	-0.12	96.74	122.20	-25.46	peak	V

Worse case mode:		802.11n20		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	94.07	-0.12	93.95	122.20	-28.25	peak	H
5855	86.63	-0.12	86.51	110.80	-24.29	peak	H
5875	87.91	-0.12	87.79	105.20	-17.41	peak	H
5925	47.44	-0.12	47.32	68.20	-20.88	peak	H
5850	94.81	-0.12	94.69	122.20	-27.51	peak	V
5855	86.69	-0.12	86.57	110.80	-24.23	peak	V
5875	79.89	-0.12	79.77	105.20	-25.43	peak	V
5925	46.42	-0.12	46.30	68.20	-21.90	peak	V

Worse case mode:		802.11n40		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	52.72	-0.12	52.60	74.00	-21.40	peak	H
5150	38.32	-0.12	38.20	54.00	-15.80	AV	H
5150	53.28	-0.12	53.16	74.00	-20.84	peak	V
5150	40.15	-0.12	40.03	54.00	-13.97	AV	V

Worse case mode:		802.11n40		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	53.17	-0.12	53.05	74.00	-20.95	peak	H
5250	38.72	-0.12	38.60	54.00	-15.40	AV	H
5250	55.36	-0.12	55.24	74.00	-18.76	peak	V
5250	38.60	-0.12	38.48	54.00	-15.52	AV	V

Worse case mode:		802.11n40		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	48.52	-0.12	48.40	68.20	-19.80	peak	H
5700	82.11	-0.12	81.99	105.20	-23.21	peak	H
5720	90.06	-0.12	89.94	110.80	-20.86	peak	H
5725	98.92	-0.12	98.80	122.20	-23.40	peak	H
5650	48.87	-0.12	48.75	68.20	-19.45	peak	V
5700	83.26	-0.12	83.14	105.20	-22.06	peak	V
5720	87.75	-0.12	87.63	110.80	-23.17	peak	V
5725	95.18	-0.12	95.06	122.20	-27.14	peak	V

Worse case mode:		802.11n40		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	99.53	-0.12	99.41	122.20	-22.79	peak	H
5855	87.92	-0.12	87.80	110.80	-23.00	peak	H
5875	86.10	-0.12	85.98	105.20	-19.22	peak	H
5925	46.10	-0.12	45.98	68.20	-22.22	peak	H
5850	95.02	-0.12	94.90	122.20	-27.30	peak	V
5855	85.22	-0.12	85.10	110.80	-25.70	peak	V
5875	79.65	-0.12	79.53	105.20	-25.67	peak	V
5925	47.24	-0.12	47.12	68.20	-21.08	peak	V

Worse case mode:		802.11ac20		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	54.83	-0.12	54.71	74.00	-19.29	peak	H
5150	39.34	-0.12	39.22	54.00	-14.78	AV	H
5150	53.34	-0.12	53.22	74.00	-20.78	peak	V
5150	38.92	-0.12	38.80	54.00	-15.20	AV	V

Worse case mode:		802.11ac20		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	52.37	-0.12	52.25	74.00	-21.75	peak	H
5250	40.21	-0.12	40.09	54.00	-13.91	AV	H
5250	55.83	-0.12	55.71	74.00	-18.29	peak	V
5250	40.47	-0.12	40.35	54.00	-13.65	AV	V

Worse case mode:		802.11ac20		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	48.37	-0.12	48.25	68.20	-19.95	peak	H
5700	82.27	-0.12	82.15	105.20	-23.05	peak	H
5720	88.09	-0.12	87.97	110.80	-22.83	peak	H
5725	98.24	-0.12	98.12	122.20	-24.08	peak	H
5650	46.17	-0.12	46.05	68.20	-22.15	peak	V
5700	82.26	-0.12	82.14	105.20	-23.06	peak	V
5720	90.11	-0.12	89.99	110.80	-20.81	peak	V
5725	96.69	-0.12	96.57	122.20	-25.63	peak	V

Worse case mode:		802.11n20		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	94.87	-0.12	94.75	122.20	-27.45	peak	H
5855	88.81	-0.12	88.69	110.80	-22.11	peak	H
5875	87.19	-0.12	87.07	105.20	-18.13	peak	H
5925	45.57	-0.12	45.45	68.20	-22.75	peak	H
5850	94.68	-0.12	94.56	122.20	-27.64	peak	V
5855	90.98	-0.12	90.86	110.80	-19.94	peak	V
5875	83.79	-0.12	83.67	105.20	-21.53	peak	V
5925	48.78	-0.12	48.66	68.20	-19.54	peak	V

Worse case mode:		802.11ac40		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	54.37	-0.12	54.25	74.00	-19.75	peak	H
5150	40.95	-0.12	40.83	54.00	-13.17	AV	H
5150	52.47	-0.12	52.35	74.00	-21.65	peak	V
5150	40.47	-0.12	40.35	54.00	-13.65	AV	V

Worse case mode:		802.11ac40		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5250	54.95	-0.12	54.83	74.00	-19.17	peak	H
5250	38.75	-0.12	38.63	54.00	-15.37	AV	H
5250	56.03	-0.12	55.91	74.00	-18.09	peak	V
5250	38.68	-0.12	38.56	54.00	-15.44	AV	V

Worse case mode:		802.11ac40		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	47.67	-0.12	47.55	68.20	-20.65	peak	H
5700	83.47	-0.12	83.35	105.20	-21.85	peak	H
5720	90.50	-0.12	90.38	110.80	-20.42	peak	H
5725	95.65	-0.12	95.53	122.20	-26.67	peak	H
5650	47.07	-0.12	46.95	68.20	-21.25	peak	V
5700	82.03	-0.12	81.91	105.20	-23.29	peak	V
5720	87.10	-0.12	86.98	110.80	-23.82	peak	V
5725	94.17	-0.12	94.05	122.20	-28.15	peak	V

Worse case mode:		802.11ac40		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	98.64	-0.12	98.52	122.20	-23.68	peak	H
5855	84.66	-0.12	84.54	110.80	-26.26	peak	H
5875	84.77	-0.12	84.65	105.20	-20.55	peak	H
5925	46.08	-0.12	45.96	68.20	-22.24	peak	H
5850	95.18	-0.12	95.06	122.20	-27.14	peak	V
5855	90.56	-0.12	90.44	110.80	-20.36	peak	V
5875	80.42	-0.12	80.30	105.20	-24.90	peak	V
5925	46.10	-0.12	45.98	68.20	-22.22	peak	V

Worse case mode:		802.11ac80		Test channel:		42	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	53.63	-0.12	53.51	74.00	-20.49	peak	H
5150	38.67	-0.12	38.55	54.00	-15.45	AV	H
5150	55.45	-0.12	55.33	74.00	-18.67	peak	V
5150	39.18	-0.12	39.06	54.00	-14.94	AV	V
5250	54.02	-0.12	53.90	74.00	-20.10	peak	H
5250	38.18	-0.12	38.06	54.00	-15.94	AV	H
5250	54.75	-0.12	54.63	74.00	-19.37	peak	V
5250	37.17	-0.12	37.05	54.00	-16.95	AV	V

Worse case mode:		802.11ac80		Test channel:		155	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5650	48.18	-0.12	48.06	68.20	-20.14	peak	H
5700	84.42	-0.12	84.30	105.20	-20.90	peak	H
5720	90.08	-0.12	89.96	110.80	-20.84	peak	H
5725	95.70	-0.12	95.58	122.20	-26.62	peak	H
5650	48.73	-0.12	48.61	68.20	-19.59	peak	V
5700	82.77	-0.12	82.65	105.20	-22.55	peak	V
5720	87.05	-0.12	86.93	110.80	-23.87	peak	V
5725	97.74	-0.12	97.62	122.20	-24.58	peak	V
5850	95.92	-0.12	95.80	122.20	-26.40	peak	H
5855	88.69	-0.12	88.57	110.80	-22.23	peak	H
5875	85.22	-0.12	85.10	105.20	-20.10	peak	H
5925	44.15	-0.12	44.03	68.20	-24.17	peak	H
5850	95.23	-0.12	95.11	122.20	-27.09	peak	V
5855	88.19	-0.12	88.07	110.80	-22.73	peak	V
5875	79.80	-0.12	79.68	105.20	-25.52	peak	V
5925	49.55	-0.12	49.43	68.20	-18.77	peak	V

Factor =Antenna Factor + Cable Loss – Pre-amplifier,

5. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)
Test Method:	KDB 789033 D02 v02r01

5.1 APPLIED PROCEDURES / LIMIT

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

LIMIT:	U-NII-1	17DBM/MHZ
	U-NII-3	30DBM/500KHZ


5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

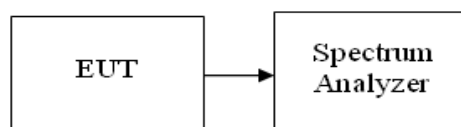

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

6. -26 DB & 6DBM EMISSION BANDWIDTH

Test Requirement:	Part 15 Subpart C Section 15.407 (e)
Test Method:	KDB 789033 D02 v02r01

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15.407 (e)		
Bandwidth		
Limit	U-NII-1	N/A
	U-NII-3	≥ 500 kHz

6.2 TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.

Set the spectrum analyzers RBW = approximately 1% of the emission bandwidth, VBW >RBW, Detector = Peak, Span>26dB bandwidth, and Sweep = auto ,Trace mode = max hold.


Measure the maximum width of the emission that is 26dB down from the maximum of the emission.

Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Repeat until all the rest channels were investigated.

6.3 DEVIATION FROM STANDARD

No deviation.

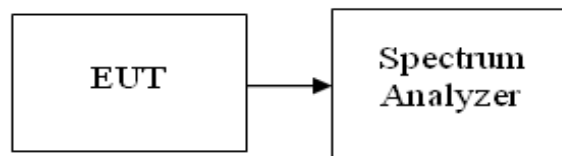6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

7. OUTPUT POWER TEST

Test Requirement:	15.407 (a)(1)(2)(3)
Test Method:	KDB 789033 D02 v02r01

7.1 APPLIED PROCEDURES/LIMIT

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).


For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Item	Limit	Result
U-NII-1	1W / 30dbm	Pass
U-NII-3	1 W / 30dbm	Pass

7.2 DEVIATION FROM STANDARD

No deviation.

7.3 TEST SETUP

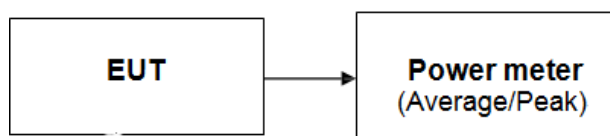

7.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.5 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

8. OUT OF BAND EDGE EMISSION

Test Requirement:	15.407 (b)
Test Method:	KDB 789033 D02 v02r01


8.1 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.2 DEVIATION FROM STANDARD

No deviation.

8.3 TEST SETUP

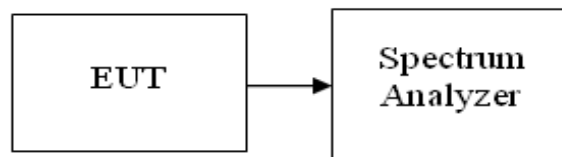

8.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.5 TEST RESULTS

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

9. FREQUENCY STABILITY MEASUREMENT


9.1 LIMIT

According to §15.407(g), Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

9.2 TEST PROCEDURE

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

9.3 TEST CONFIGURATION

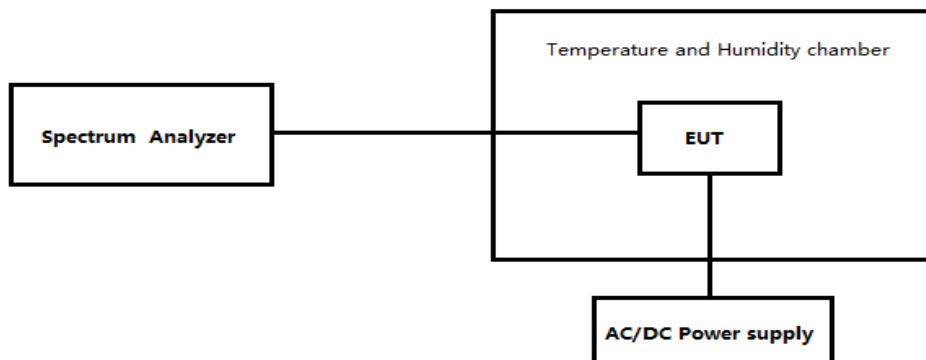

9.4 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC48V

Note: Only the test results of the worst channel are displayed

ANT1-802.11a- CH36

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	93	0.0180
40	48.0	87	0.0168
30	48.0	97	0.0187
20	48.0	78	0.0150
10	48.0	73	0.0142
0	48.0	77	0.0148
-10	48.0	79	0.0152
-20	48.0	73	0.0140
-30	48.0	86	0.0167

ANT1-802.11a- CH48

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	76	0.0145
40	48.0	83	0.0158
30	48.0	77	0.0147
20	48.0	78	0.0148
10	48.0	88	0.0167
0	48.0	82	0.0156
-10	48.0	86	0.0164
-20	48.0	86	0.0164
-30	48.0	93	0.0177

ANT1-802.11a- CH149

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	78	0.0136
40	48.0	76	0.0133
30	48.0	86	0.0150
20	48.0	77	0.0134
10	48.0	82	0.0142
0	48.0	91	0.0158
-10	48.0	92	0.0159
-20	48.0	77	0.0134
-30	48.0	79	0.0138

ANT1-802.11a- CH165

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	100	0.0171
40	48.0	75	0.0130
30	48.0	79	0.0135
20	48.0	91	0.0157
10	48.0	74	0.0126
0	48.0	76	0.0131
-10	48.0	95	0.0164
-20	48.0	74	0.0127
-30	48.0	96	0.0165

ANT2-802.11n20- CH36

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	76	0.0147
40	48.0	74	0.0142
30	48.0	82	0.0157
20	48.0	92	0.0177
10	48.0	75	0.0144
0	48.0	79	0.0152
-10	48.0	74	0.0142
-20	48.0	96	0.0186

-30	48.0	87	0.0168
-----	------	----	--------

ANT2-802.11n20- CH48

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	98	0.0187
40	48.0	74	0.0142
30	48.0	79	0.0151
20	48.0	74	0.0140
10	48.0	71	0.0135
0	48.0	80	0.0153
-10	48.0	71	0.0136
-20	48.0	75	0.0144
-30	48.0	83	0.0159

ANT2-802.11n20- CH149

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	70	0.0122
40	48.0	91	0.0159
30	48.0	84	0.0146
20	48.0	89	0.0155
10	48.0	86	0.0150
0	48.0	73	0.0127
-10	48.0	73	0.0126
-20	48.0	92	0.0160
-30	48.0	78	0.0136

ANT2-802.11n20- CH165

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	82	0.0141
40	48.0	81	0.0139
30	48.0	80	0.0137
20	48.0	96	0.0165
10	48.0	76	0.0130
0	48.0	96	0.0164
-10	48.0	74	0.0128
-20	48.0	83	0.0142
-30	48.0	99	0.0169

ANT2-802.11n40- CH38

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	93	0.0179
40	48.0	89	0.0171
30	48.0	83	0.0159

20	48.0	91	0.0175
10	48.0	96	0.0184
0	48.0	95	0.0184
-10	48.0	95	0.0182
-20	48.0	76	0.0146
-30	48.0	100	0.0192

ANT2-802.11n40- CH46

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	72	0.0137
40	48.0	83	0.0159
30	48.0	89	0.0170
20	48.0	74	0.0141
10	48.0	71	0.0135
0	48.0	94	0.0180
-10	48.0	78	0.0150
-20	48.0	77	0.0148
-30	48.0	71	0.0136

ANT2-802.11n40- CH151

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	96	0.0167
40	48.0	98	0.0171
30	48.0	72	0.0125
20	48.0	90	0.0156
10	48.0	87	0.0151
0	48.0	94	0.0164
-10	48.0	88	0.0153
-20	48.0	71	0.0124
-30	48.0	82	0.0142

ANT2-802.11n40- CH159

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	80	0.0138
40	48.0	82	0.0142
30	48.0	89	0.0154
20	48.0	79	0.0136
10	48.0	96	0.0167
0	48.0	99	0.0171
-10	48.0	77	0.0132
-20	48.0	84	0.0144
-30	48.0	97	0.0168

ANT5-802.11ac20- CH36

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	90	0.0174
40	48.0	70	0.0136
30	48.0	93	0.0179
20	48.0	77	0.0149
10	48.0	85	0.0163
0	48.0	77	0.0149
-10	48.0	85	0.0163
-20	48.0	90	0.0174
-30	48.0	87	0.0168

ANT5-802.11ac20- CH48

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	87	0.0166
40	48.0	89	0.0170
30	48.0	82	0.0156
20	48.0	88	0.0168
10	48.0	75	0.0143
0	48.0	80	0.0153
-10	48.0	84	0.0159
-20	48.0	98	0.0188
-30	48.0	85	0.0163

ANT5-802.11ac20- CH149

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	80	0.0139
40	48.0	88	0.0153
30	48.0	96	0.0168
20	48.0	75	0.0131
10	48.0	76	0.0132
0	48.0	88	0.0154
-10	48.0	78	0.0136
-20	48.0	87	0.0151
-30	48.0	73	0.0126

ANT5-802.11ac20- CH165

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	83	0.0142
40	48.0	78	0.0134
30	48.0	92	0.0158
20	48.0	96	0.0165
10	48.0	94	0.0161
0	48.0	81	0.0139

-10	48.0	91	0.0157
-20	48.0	91	0.0157
-30	48.0	83	0.0142

ANT5-802.11ac40- CH38

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	80	0.0155
40	48.0	78	0.0151
30	48.0	82	0.0159
20	48.0	93	0.0180
10	48.0	86	0.0166
0	48.0	82	0.0157
-10	48.0	79	0.0152
-20	48.0	79	0.0151
-30	48.0	75	0.0145

ANT5-802.11ac40- CH46

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	73	0.0140
40	48.0	98	0.0188
30	48.0	84	0.0160
20	48.0	87	0.0167
10	48.0	78	0.0150
0	48.0	80	0.0152
-10	48.0	77	0.0147
-20	48.0	77	0.0148
-30	48.0	71	0.0135

ANT5-802.11ac40- CH151

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	80	0.0138
40	48.0	97	0.0168
30	48.0	76	0.0132
20	48.0	84	0.0146
10	48.0	90	0.0156
0	48.0	74	0.0129
-10	48.0	73	0.0127
-20	48.0	84	0.0146
-30	48.0	75	0.0130

ANT5-802.11ac40- CH159

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	90	0.0155
40	48.0	89	0.0154
30	48.0	92	0.0159
20	48.0	75	0.0129
10	48.0	73	0.0125

0	48.0	100	0.0172
-10	48.0	83	0.0143
-20	48.0	98	0.0168
-30	48.0	83	0.0144

ANT5-802.11ac80- CH42

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	75	0.0144
40	48.0	91	0.0176
30	48.0	77	0.0147
20	48.0	71	0.0136
10	48.0	94	0.0181
0	48.0	99	0.0190
-10	48.0	97	0.0186
-20	48.0	96	0.0184
-30	48.0	95	0.0183

ANT5-802.11ac80- CH155

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	79	0.0137
40	48.0	91	0.0158
30	48.0	100	0.0173
20	48.0	92	0.0159
10	48.0	92	0.0160
0	48.0	99	0.0172
-10	48.0	73	0.0126
-20	48.0	80	0.0138
-30	48.0	77	0.0133

ANT6-802.11ax20- CH36

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	97	0.0187
40	48.0	79	0.0152
30	48.0	91	0.0176
20	48.0	75	0.0145
10	48.0	77	0.0149
0	48.0	72	0.0138
-10	48.0	83	0.0160
-20	48.0	85	0.0164
-30	48.0	95	0.0183

ANT6-802.11ax20- CH149

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	78	0.0135
40	48.0	74	0.0128
30	48.0	88	0.0154
20	48.0	91	0.0159

10	48.0	79	0.0138
0	48.0	70	0.0123
-10	48.0	89	0.0154
-20	48.0	80	0.0139
-30	48.0	70	0.0122

ANT6-802.11ax20- CH165

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	98	0.0169
40	48.0	89	0.0153
30	48.0	98	0.0168
20	48.0	87	0.0150
10	48.0	79	0.0135
0	48.0	92	0.0158
-10	48.0	77	0.0133
-20	48.0	96	0.0165
-30	48.0	79	0.0136

ANT6-802.11ax40- CH38

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	76	0.0147
40	48.0	88	0.0170
30	48.0	77	0.0148
20	48.0	77	0.0148
10	48.0	95	0.0183
0	48.0	85	0.0164
-10	48.0	88	0.0170
-20	48.0	83	0.0160
-30	48.0	79	0.0152

ANT6-802.11ax40- CH46

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	94	0.0179
40	48.0	72	0.0138
30	48.0	99	0.0189
20	48.0	80	0.0153
10	48.0	92	0.0176
0	48.0	82	0.0157
-10	48.0	99	0.0190
-20	48.0	71	0.0136
-30	48.0	98	0.0187

ANT6-802.11ax40- CH151

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	94	0.0162
40	48.0	83	0.0144

30	48.0	84	0.0147
20	48.0	97	0.0168
10	48.0	78	0.0135
0	48.0	97	0.0169
-10	48.0	71	0.0124
-20	48.0	100	0.0173
-30	48.0	93	0.0161

ANT6-802.11ax40- CH159

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	92	0.0159
40	48.0	82	0.0141
30	48.0	88	0.0152
20	48.0	78	0.0134
10	48.0	93	0.0161
0	48.0	73	0.0126
-10	48.0	90	0.0155
-20	48.0	73	0.0125
-30	48.0	86	0.0148


ANT6-802.11ax80- CH42

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		MCF	(ppm)
50	48.0	83	0.0160
40	48.0	94	0.0180
30	48.0	71	0.0136
20	48.0	88	0.0169
10	48.0	98	0.0188
0	48.0	97	0.0187
-10	48.0	98	0.0188
-20	48.0	71	0.0137
-30	48.0	99	0.0190

ANT6-802.11ax80- CH155

Temperature (°C)	Voltage (DC:V)	Frequency Measure with time Elapsed	
		Frequency Deviation(Hz)	(ppm)
50	48.0	84	0.0146
40	48.0	94	0.0163
30	48.0	92	0.0160
20	48.0	72	0.0124
10	48.0	95	0.0164
0	48.0	77	0.0133
-10	48.0	100	0.0173
-20	48.0	92	0.0159
-30	48.0	99	0.0171

10.ANTENNA REQUIREMENT

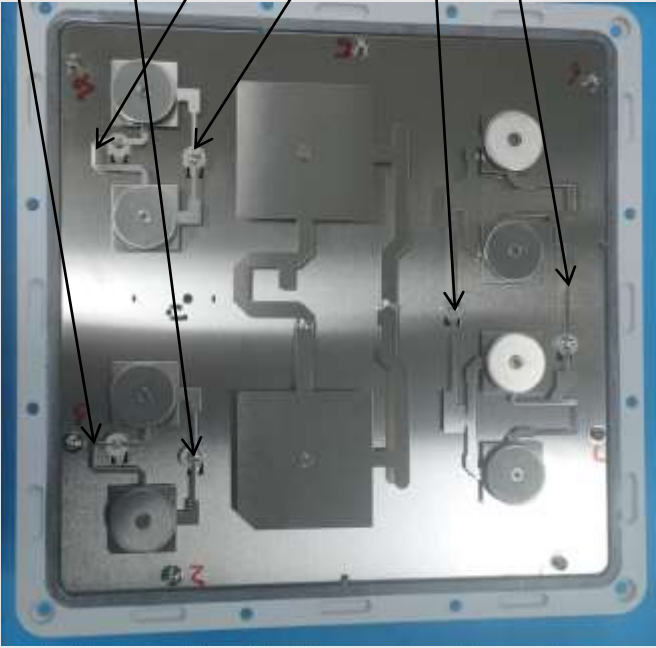Standard requirement:	FCC Part15 C Section 15.203 /247(c)
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. Refer to statement below for compliance. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed. Antenna Connected Construction The antenna used in this product is a omni antenna, and the best case gain of the antenna is antenna ANT1: 12.04dBi ; ANT2: 12.29dBi ; ANT3: 8.94dBi; ANT4: 9.14 dBi ; ANT5:9.80 dBi ; ANT6: 9.94 dBi EUT Antenna: ANT6 ANT5 ANT4 ANT3 ANT2 ANT1 	

11. APPENDIX1---5.2GWIFI

-26DB AND 99% EMISSION BANDWIDTH

Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5180.00	32.05	16.48
NVNT	ANT1	802.11a	5200.00	28.68	16.48
NVNT	ANT1	802.11a	5240.00	27.47	16.45
NVNT	ANT1	802.11n(HT20)	5180.00	34.42	17.68
NVNT	ANT1	802.11n(HT20)	5200.00	30.57	17.66
NVNT	ANT1	802.11n(HT20)	5240.00	35.31	17.68
NVNT	ANT1	802.11ac(VHT20)	5180.00	34.90	17.69
NVNT	ANT1	802.11ac(VHT20)	5200.00	32.26	17.68
NVNT	ANT1	802.11ac(VHT20)	5240.00	31.87	17.67
NVNT	ANT1	802.11n(HT40)	5190.00	72.53	37.20
NVNT	ANT1	802.11n(HT40)	5230.00	72.28	36.95
NVNT	ANT1	802.11ac(VHT40)	5190.00	72.34	36.65
NVNT	ANT1	802.11ac(VHT40)	5230.00	72.50	36.68
NVNT	ANT1	802.11ac(VHT80)	5210.00	150.88	93.69
NVNT	ANT1	802.11ax(HE20)	5180.00	33.21	19.11
NVNT	ANT1	802.11ax(HE20)	5200.00	29.43	19.10
NVNT	ANT1	802.11ax(HE20)	5240.00	21.61	19.03
NVNT	ANT1	802.11ax(HE40)	5190.00	75.63	38.20
NVNT	ANT1	802.11ax(HE40)	5230.00	75.88	38.30
NVNT	ANT1	802.11ax(HE80)	5210.00	156.56	103.09

Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT2	802.11a	5180.00	29.25	16.48
NVNT	ANT2	802.11a	5200.00	19.31	16.45
NVNT	ANT2	802.11a	5240.00	27.92	16.47
NVNT	ANT2	802.11n(HT20)	5180.00	34.60	17.71
NVNT	ANT2	802.11n(HT20)	5200.00	33.30	17.67
NVNT	ANT2	802.11n(HT20)	5240.00	33.08	17.66
NVNT	ANT2	802.11ac(VHT20)	5180.00	33.58	17.69
NVNT	ANT2	802.11ac(VHT20)	5200.00	33.82	17.67
NVNT	ANT2	802.11ac(VHT20)	5240.00	35.43	17.66
NVNT	ANT2	802.11n(HT40)	5190.00	72.53	37.18
NVNT	ANT2	802.11n(HT40)	5230.00	72.40	37.02
NVNT	ANT2	802.11ac(VHT40)	5190.00	72.49	36.73
NVNT	ANT2	802.11ac(VHT40)	5230.00	71.97	36.64
NVNT	ANT2	802.11ac(VHT80)	5210.00	150.81	90.42
NVNT	ANT2	802.11ax(HE20)	5180.00	27.58	19.13
NVNT	ANT2	802.11ax(HE20)	5200.00	28.11	19.11
NVNT	ANT2	802.11ax(HE20)	5240.00	33.66	19.05
NVNT	ANT2	802.11ax(HE40)	5190.00	75.58	38.28
NVNT	ANT2	802.11ax(HE40)	5230.00	75.69	38.30
NVNT	ANT2	802.11ax(HE80)	5210.00	156.28	102.20

Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT3	802.11a	5180.00	32.40	16.46
NVNT	ANT3	802.11a	5200.00	30.83	16.44
NVNT	ANT3	802.11a	5240.00	29.90	16.46
NVNT	ANT3	802.11n(HT20)	5180.00	35.23	17.68
NVNT	ANT3	802.11n(HT20)	5200.00	32.40	17.68
NVNT	ANT3	802.11n(HT20)	5240.00	34.98	17.68
NVNT	ANT3	802.11ac(VHT20)	5180.00	35.32	17.67
NVNT	ANT3	802.11ac(VHT20)	5200.00	32.14	17.66
NVNT	ANT3	802.11ac(VHT20)	5240.00	34.15	17.66
NVNT	ANT3	802.11n(HT40)	5190.00	72.46	37.00
NVNT	ANT3	802.11n(HT40)	5230.00	72.43	36.99
NVNT	ANT3	802.11ac(VHT40)	5190.00	72.36	36.56
NVNT	ANT3	802.11ac(VHT40)	5230.00	72.53	36.53
NVNT	ANT3	802.11ac(VHT80)	5210.00	151.86	96.74
NVNT	ANT3	802.11ax(HE20)	5180.00	33.67	19.18
NVNT	ANT3	802.11ax(HE20)	5200.00	23.28	19.13
NVNT	ANT3	802.11ax(HE20)	5240.00	33.23	19.06
NVNT	ANT3	802.11ax(HE40)	5190.00	75.54	38.26

NVNT	ANT3	802.11ax(HE40)	5230.00	75.72	38.27
NVNT	ANT3	802.11ax(HE80)	5210.00	156.34	102.68

Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT4	802.11a	5180.00	30.31	16.48
NVNT	ANT4	802.11a	5200.00	32.25	16.47
NVNT	ANT4	802.11a	5240.00	26.57	16.47
NVNT	ANT4	802.11n(HT20)	5180.00	35.04	17.67
NVNT	ANT4	802.11n(HT20)	5200.00	31.98	17.66
NVNT	ANT4	802.11n(HT20)	5240.00	31.50	17.66
NVNT	ANT4	802.11ac(VHT20)	5180.00	34.84	17.71
NVNT	ANT4	802.11ac(VHT20)	5200.00	34.71	17.69
NVNT	ANT4	802.11ac(VHT20)	5240.00	33.13	17.65
NVNT	ANT4	802.11n(HT40)	5190.00	72.47	37.09
NVNT	ANT4	802.11n(HT40)	5230.00	72.57	37.13
NVNT	ANT4	802.11ac(VHT40)	5190.00	72.54	36.73
NVNT	ANT4	802.11ac(VHT40)	5230.00	72.34	36.57
NVNT	ANT4	802.11ac(VHT80)	5210.00	152.01	91.82
NVNT	ANT4	802.11ax(HE20)	5180.00	34.99	19.11
NVNT	ANT4	802.11ax(HE20)	5200.00	35.57	19.14
NVNT	ANT4	802.11ax(HE20)	5240.00	36.37	19.03
NVNT	ANT4	802.11ax(HE40)	5190.00	76.09	38.25
NVNT	ANT4	802.11ax(HE40)	5230.00	75.79	38.28
NVNT	ANT4	802.11ax(HE80)	5210.00	157.10	104.87

Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT5	802.11a	5180.00	20.58	16.44
NVNT	ANT5	802.11a	5200.00	18.79	16.46
NVNT	ANT5	802.11a	5240.00	20.76	16.43
NVNT	ANT5	802.11n(HT20)	5180.00	30.29	17.68
NVNT	ANT5	802.11n(HT20)	5200.00	27.84	17.66
NVNT	ANT5	802.11n(HT20)	5240.00	28.36	17.67
NVNT	ANT5	802.11ac(VHT20)	5180.00	29.41	17.68
NVNT	ANT5	802.11ac(VHT20)	5200.00	32.98	17.67
NVNT	ANT5	802.11ac(VHT20)	5240.00	29.22	17.66
NVNT	ANT5	802.11n(HT40)	5190.00	72.48	36.94
NVNT	ANT5	802.11n(HT40)	5230.00	72.46	36.96
NVNT	ANT5	802.11ac(VHT40)	5190.00	72.33	37.03
NVNT	ANT5	802.11ac(VHT40)	5230.00	72.72	36.84
NVNT	ANT5	802.11ac(VHT80)	5210.00	152.13	103.99
NVNT	ANT5	802.11ax(HE20)	5180.00	32.93	19.17
NVNT	ANT5	802.11ax(HE20)	5200.00	37.26	19.15
NVNT	ANT5	802.11ax(HE20)	5240.00	35.69	19.04
NVNT	ANT5	802.11ax(HE40)	5190.00	75.70	38.32
NVNT	ANT5	802.11ax(HE40)	5230.00	75.89	38.22
NVNT	ANT5	802.11ax(HE80)	5210.00	156.59	106.37

Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT6	802.11a	5180.00	31.36	16.48
NVNT	ANT6	802.11a	5200.00	29.51	16.47
NVNT	ANT6	802.11a	5240.00	28.07	16.46
NVNT	ANT6	802.11n(HT20)	5180.00	34.85	17.69
NVNT	ANT6	802.11n(HT20)	5200.00	29.34	17.68
NVNT	ANT6	802.11n(HT20)	5240.00	25.44	17.67
NVNT	ANT6	802.11ac(VHT20)	5180.00	34.15	17.69
NVNT	ANT6	802.11ac(VHT20)	5200.00	27.36	17.67
NVNT	ANT6	802.11ac(VHT20)	5240.00	31.88	17.65
NVNT	ANT6	802.11n(HT40)	5190.00	72.53	37.03
NVNT	ANT6	802.11n(HT40)	5230.00	72.42	36.81
NVNT	ANT6	802.11ac(VHT40)	5190.00	72.47	37.04
NVNT	ANT6	802.11ac(VHT40)	5230.00	72.26	36.89
NVNT	ANT6	802.11ac(VHT80)	5210.00	151.90	102.80
NVNT	ANT6	802.11ax(HE20)	5180.00	36.91	19.16
NVNT	ANT6	802.11ax(HE20)	5200.00	35.80	19.10
NVNT	ANT6	802.11ax(HE20)	5240.00	36.63	19.07
NVNT	ANT6	802.11ax(HE40)	5190.00	75.93	38.32
NVNT	ANT6	802.11ax(HE40)	5230.00	76.04	38.27
NVNT	ANT6	802.11ax(HE80)	5210.00	156.90	104.90

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11a_5180_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11a_5200_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11a_5240_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11n(HT20)_5180_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11n(HT20)_5200_20M

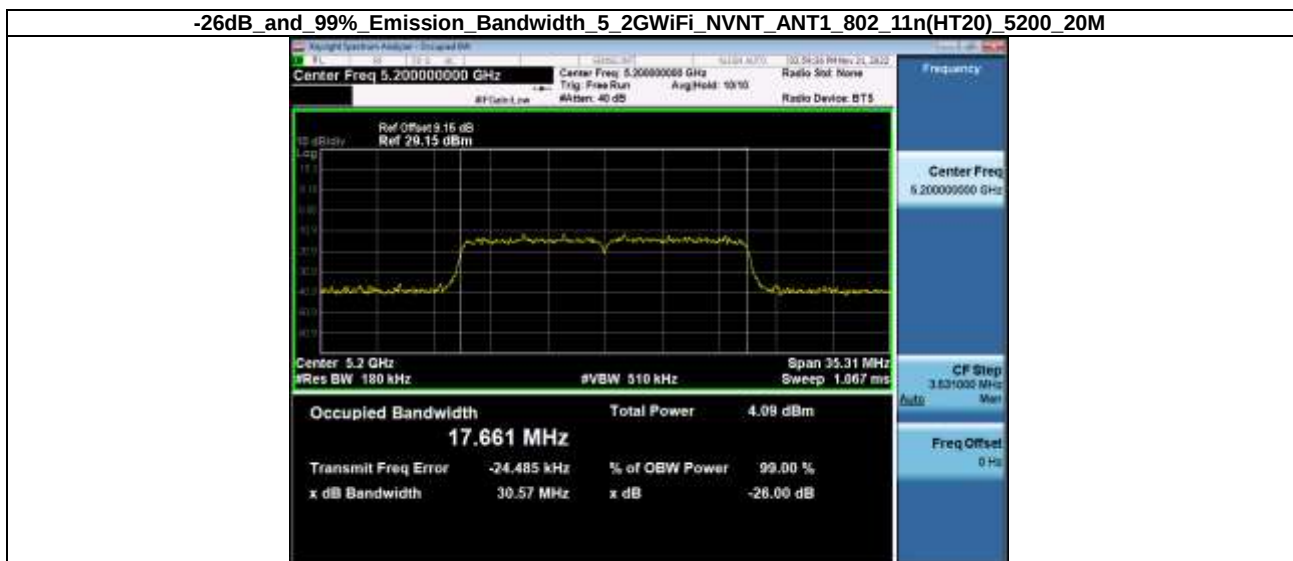


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11n(HT20)_5240_20M

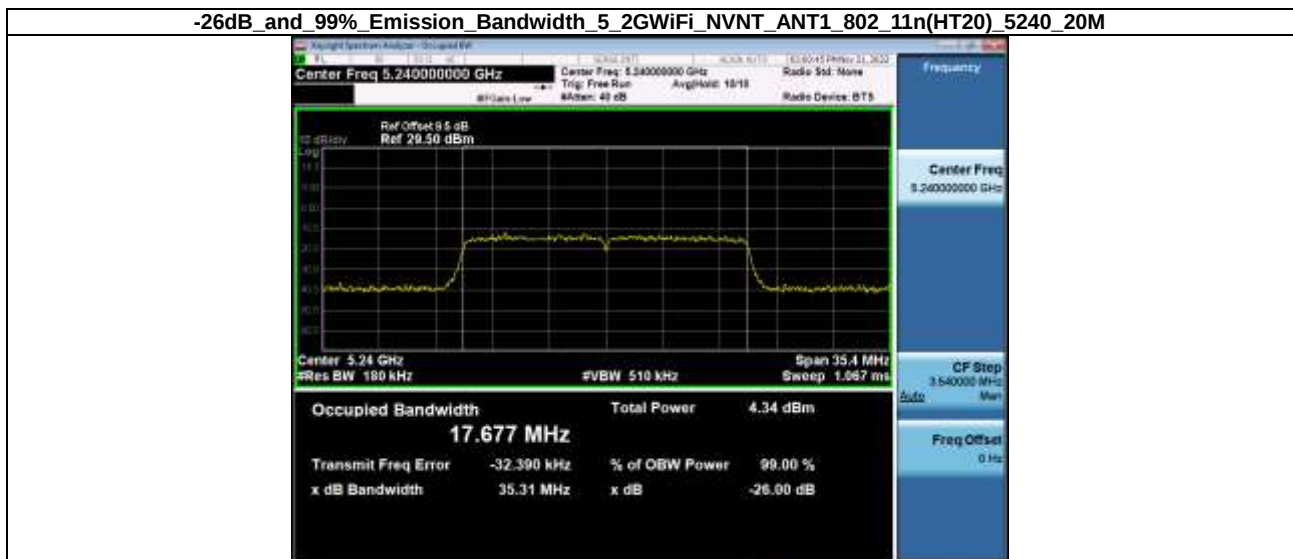


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11ac(VHT20)_5180_20M

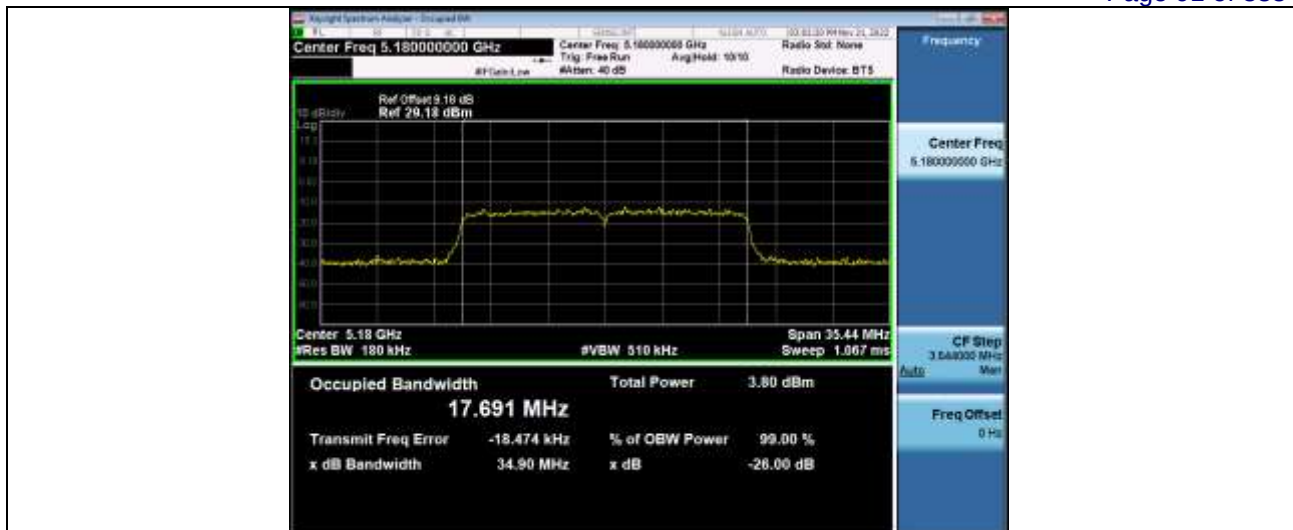

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11ac(VHT20)_5200_20M

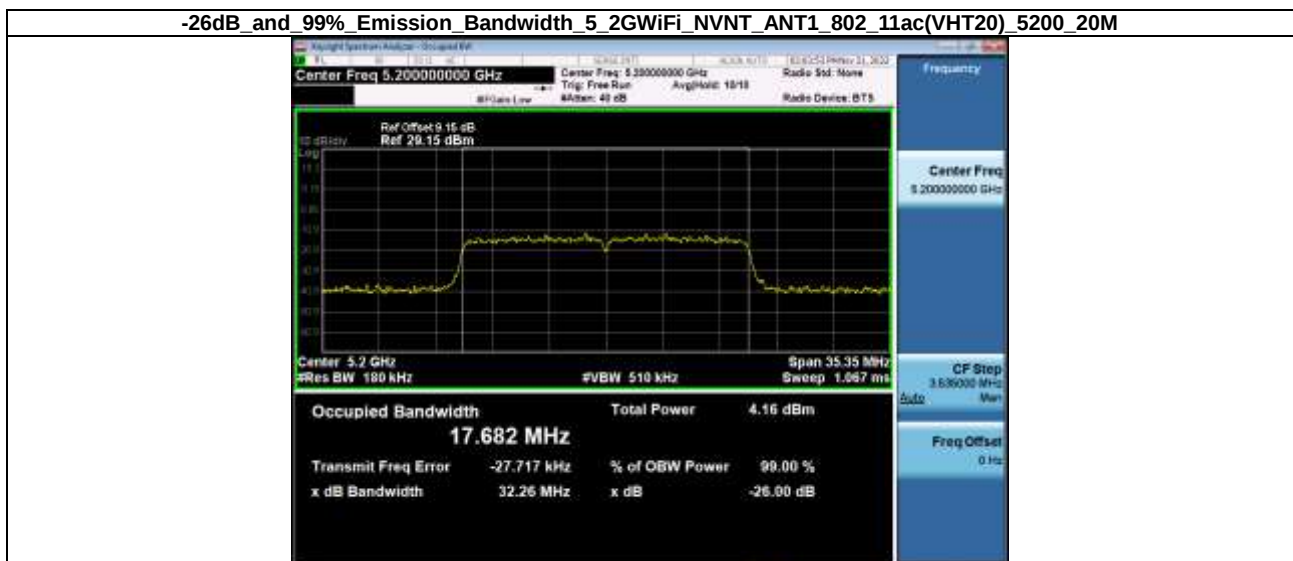

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11ac(VHT20)_5240_20M

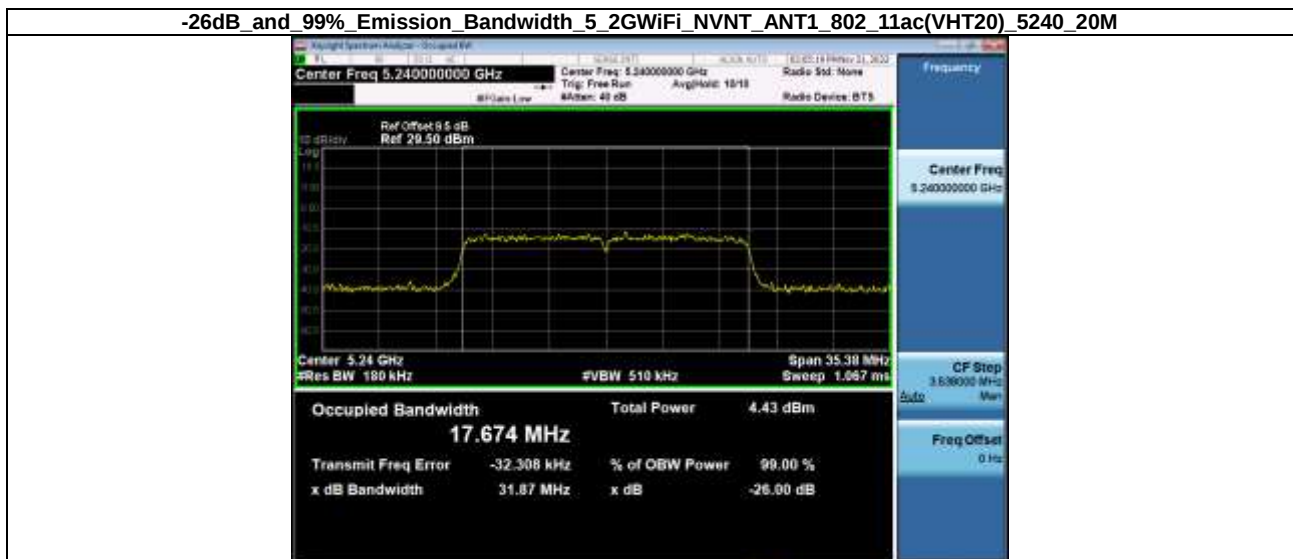

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11n(HT40)_5190_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11n(HT40)_5230_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11ac(VHT40)_5190_40M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11ac(VHT40)_5230_40M




-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT ANT1 802 11ac(VHT80) 5210 80M




-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT ANT1 802 11ax(HE20) 5180 20M

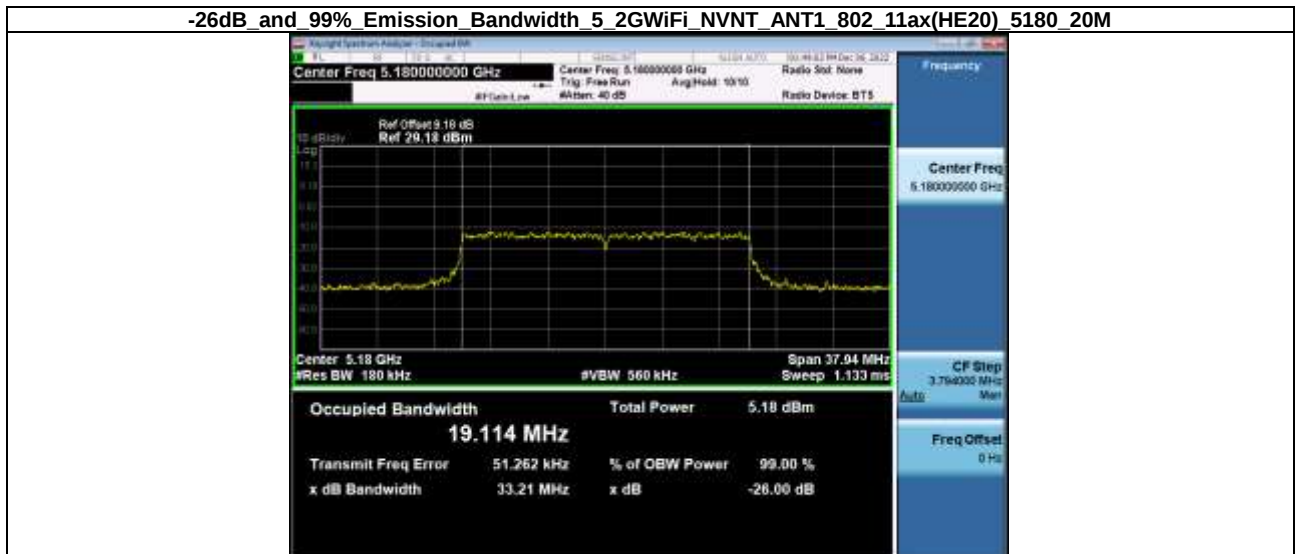

-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT ANT1 802 11ax(HE20) 5200 20M

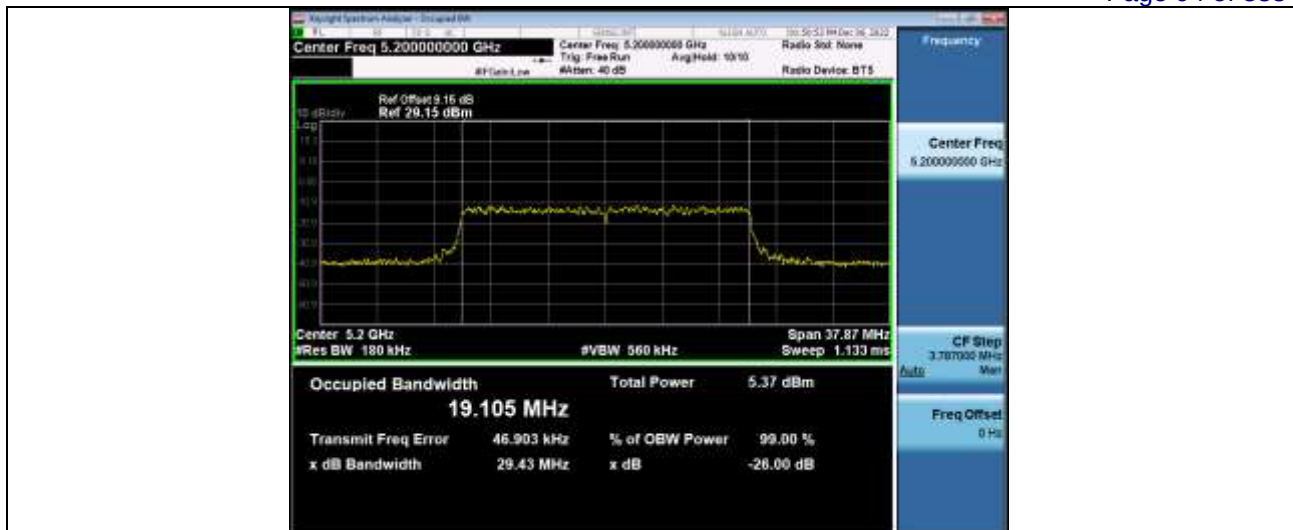

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11ax(HE20)_5240_20M

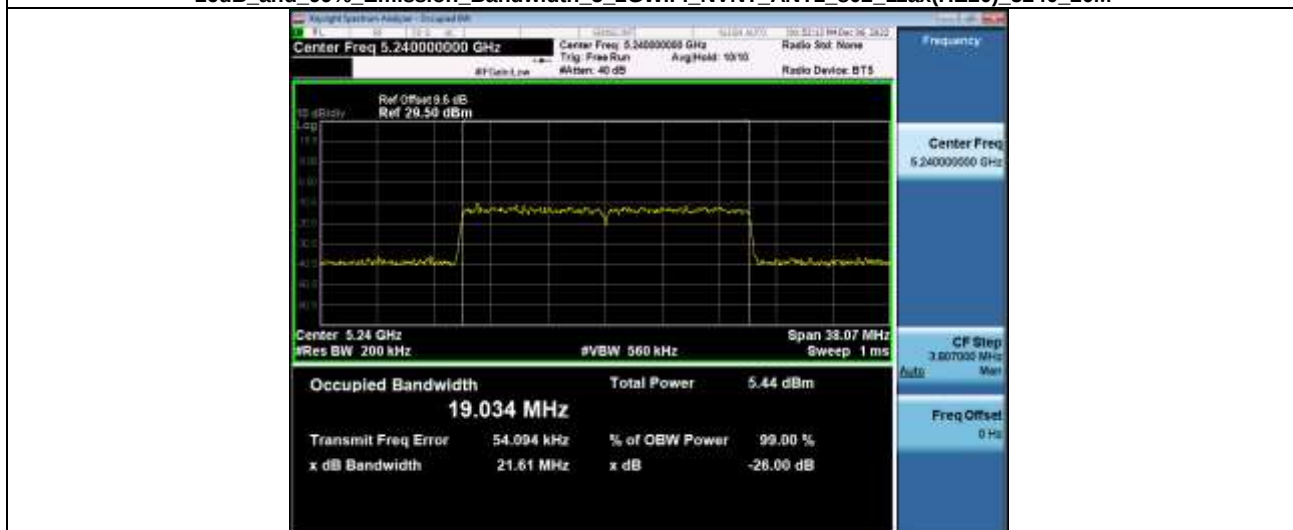

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11ax(HE40)_5190_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11ax(HE40)_5230_40M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT1_802_11ax(HE80)_5210_80M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11a_5180_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11a_5200_20M

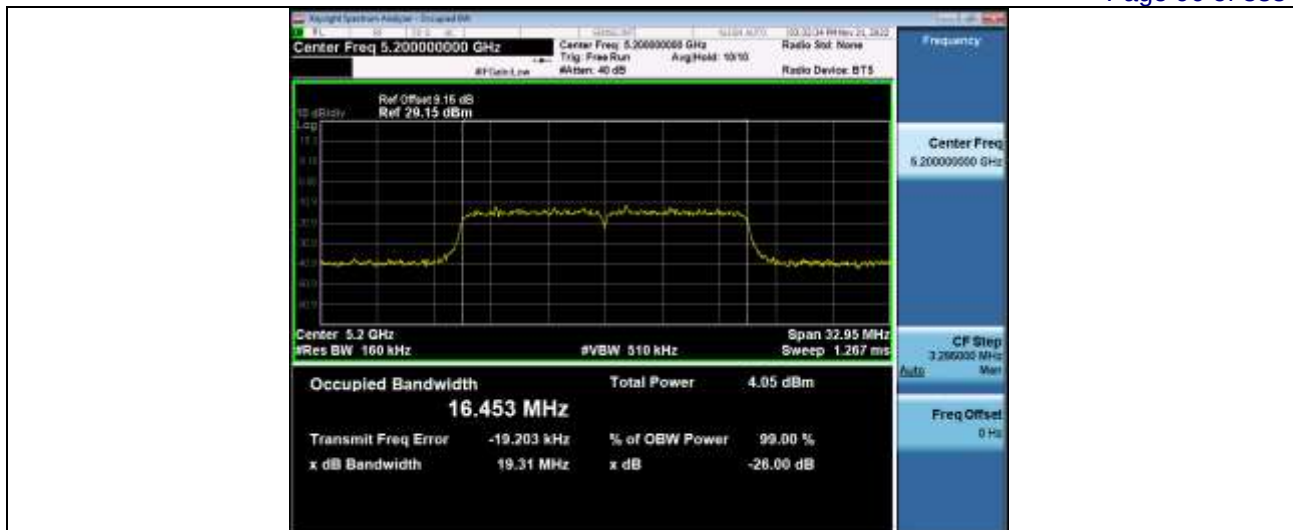


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11a_5240_20M

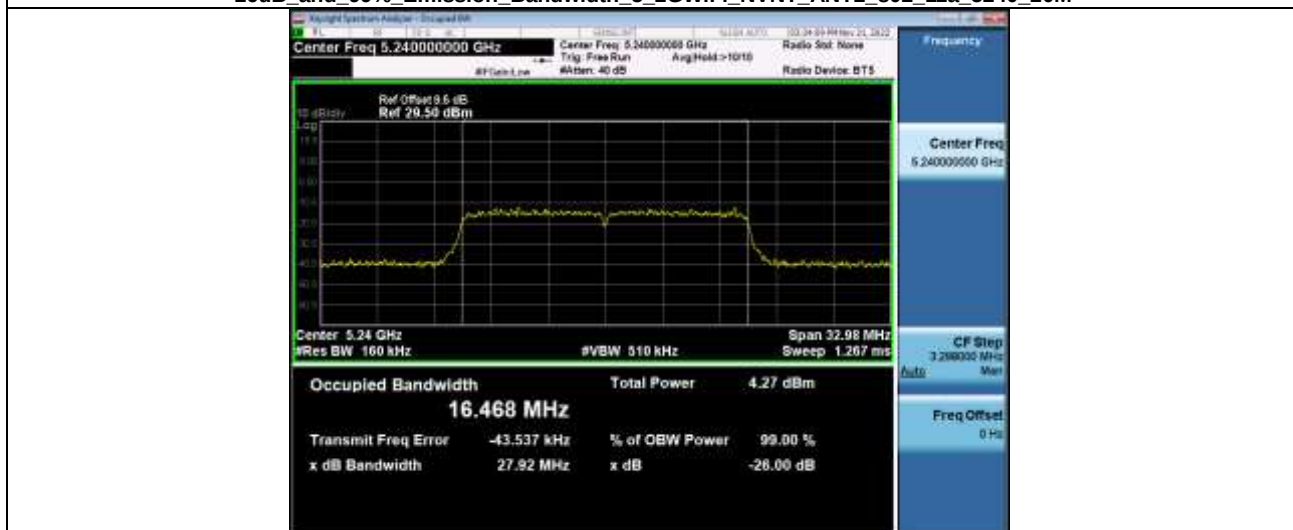

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11n(HT20)_5180_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11n(HT20)_5200_20M

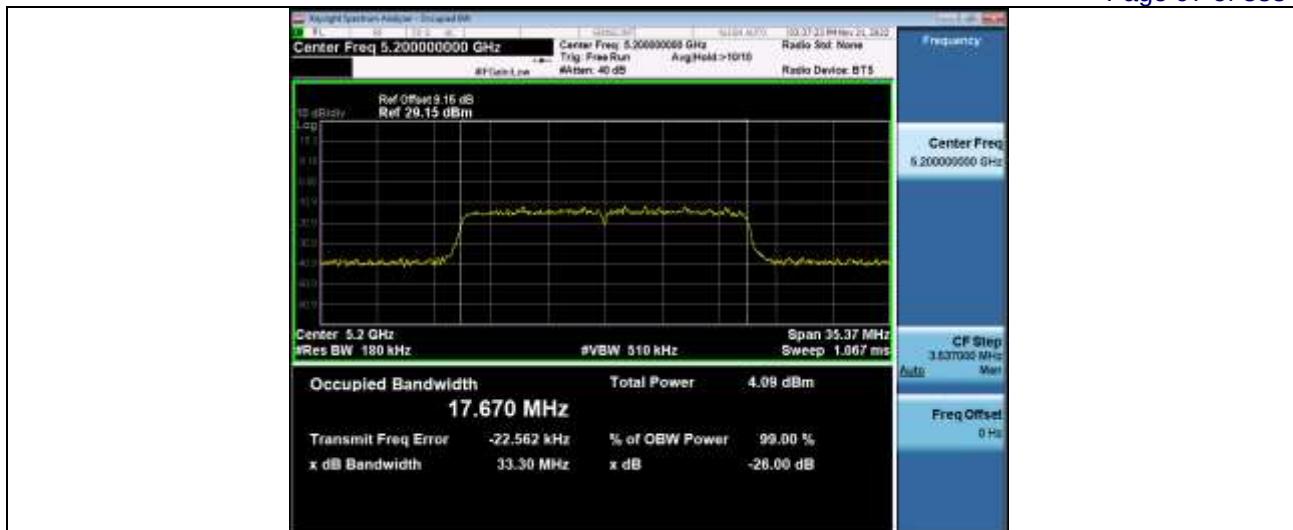


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11n(HT20)_5240_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11ac(VHT20)_5180_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11ac(VHT20)_5200_20M

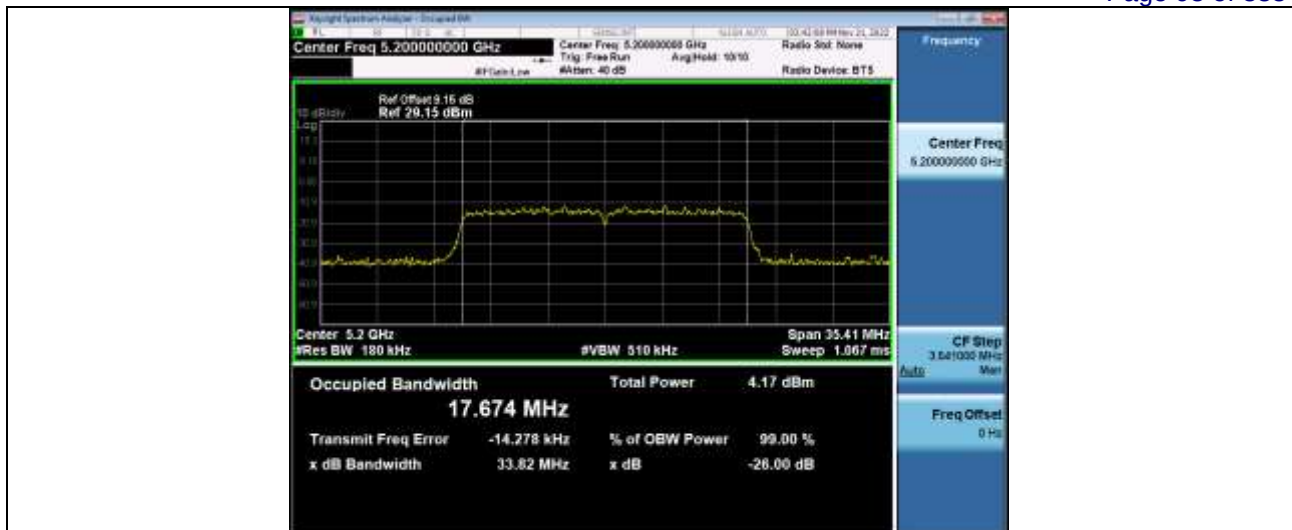

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11ac(VHT20)_5240_20M

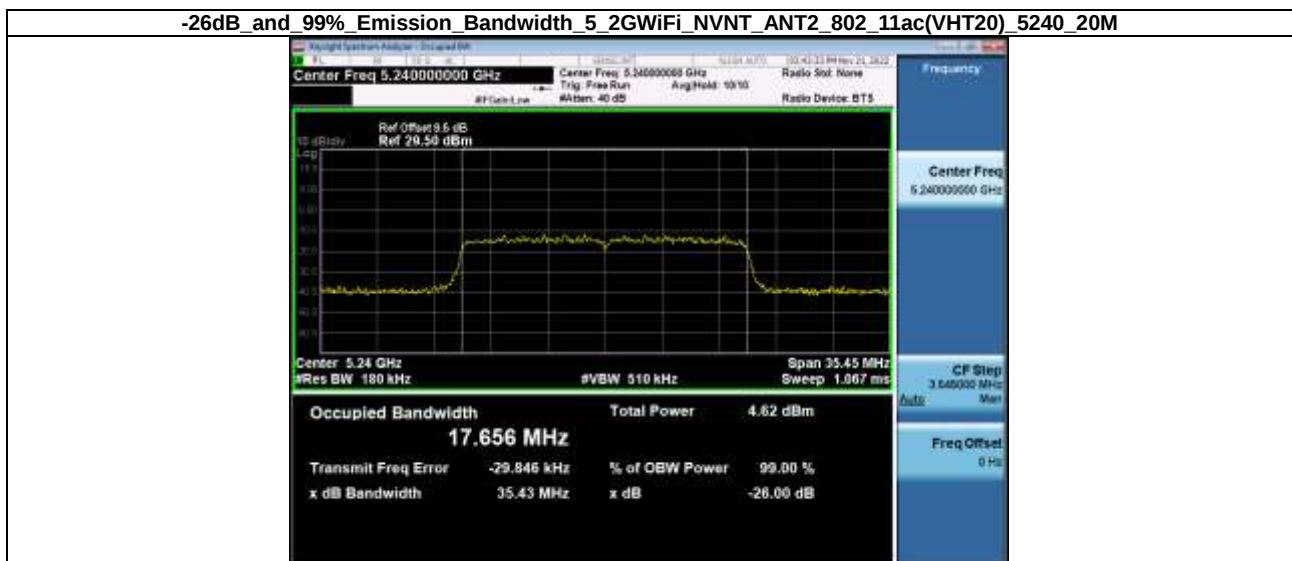

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11n(HT40)_5190_40M

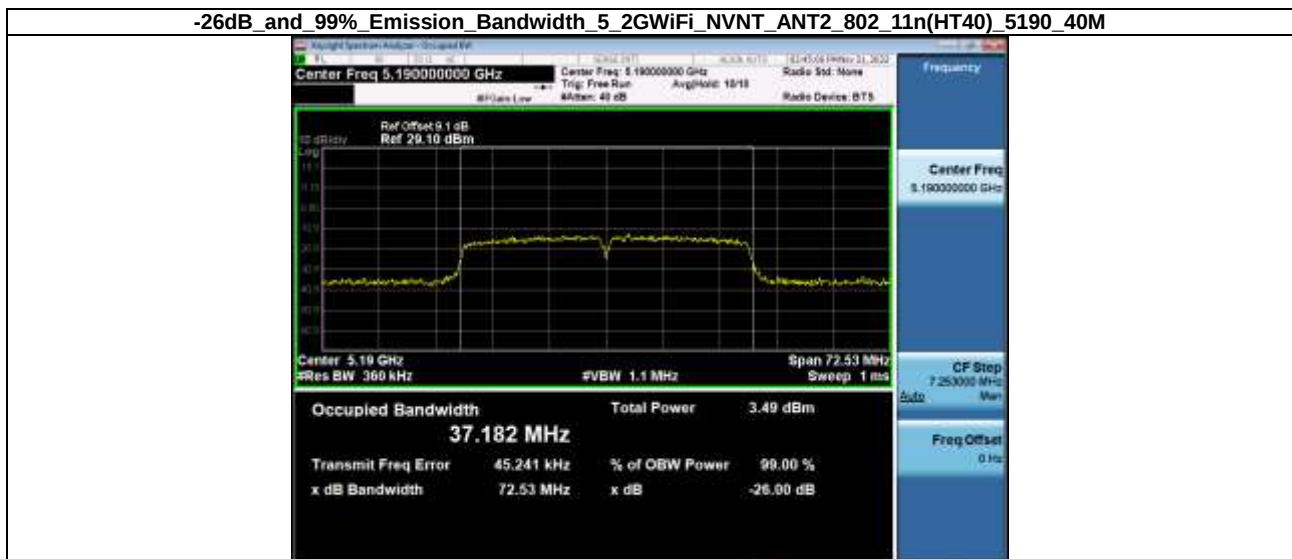

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11n(HT40)_5230_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11ac(VHT40)_5190_40M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11ac(VHT40)_5230_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11ac(VHT80)_5210_80M




-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT_ANT2_802_11ax(HE20)_5180_20M

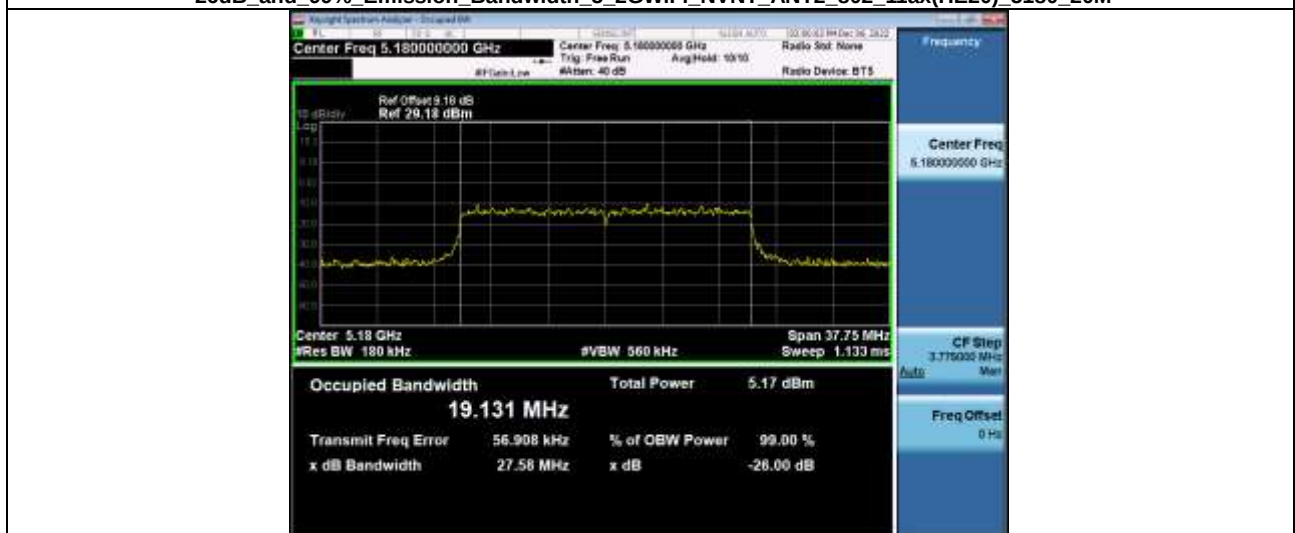

-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT_ANT2_802_11ax(HE20)_5200_20M



-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT_ANT2_802_11ax(HE20)_5240_20M

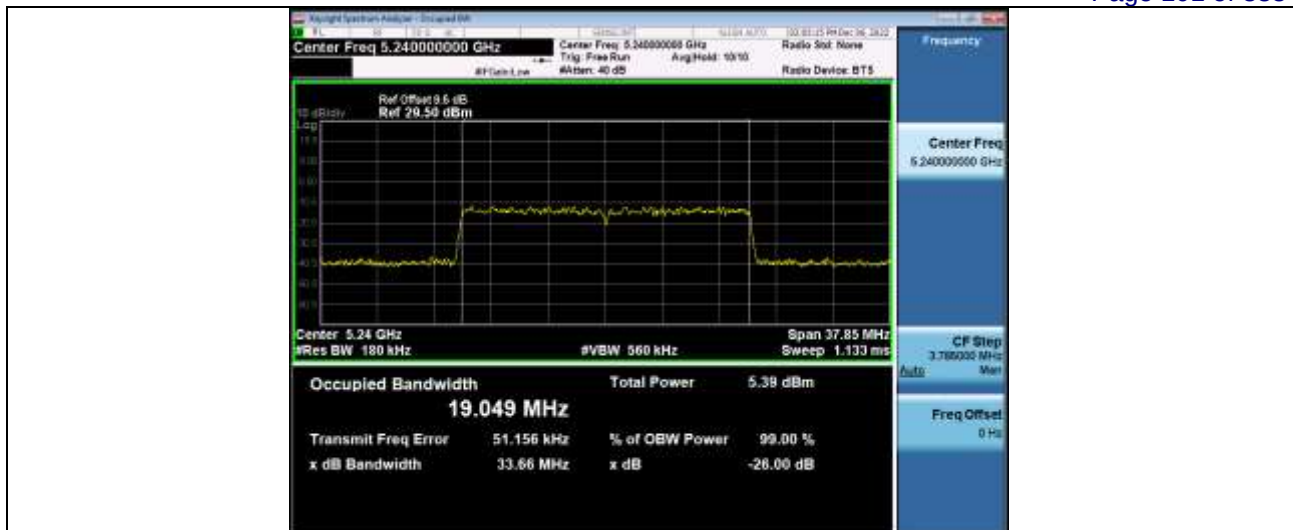

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11ax(HE40)_5190_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11ax(HE40)_5230_40M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT2_802_11ax(HE80)_5210_80M



-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT_ANT3_802_11a_5180_20M



-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT_ANT3_802_11a_5200_20M

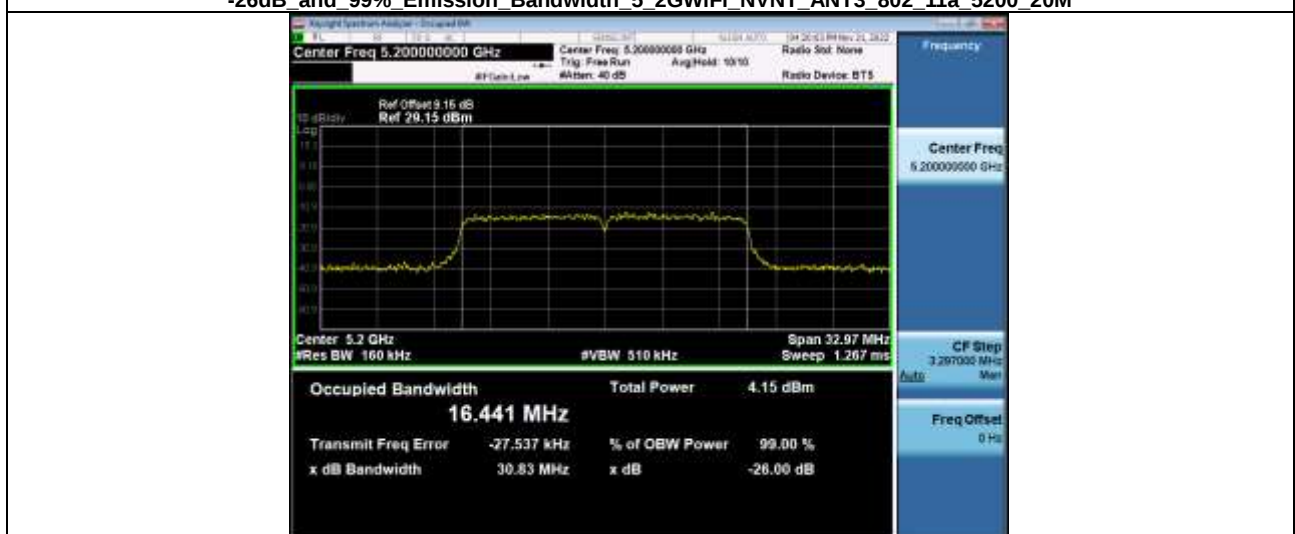

-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT_ANT3_802_11a_5240_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11n(HT20)_5180_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11n(HT20)_5200_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11n(HT20)_5240_20M

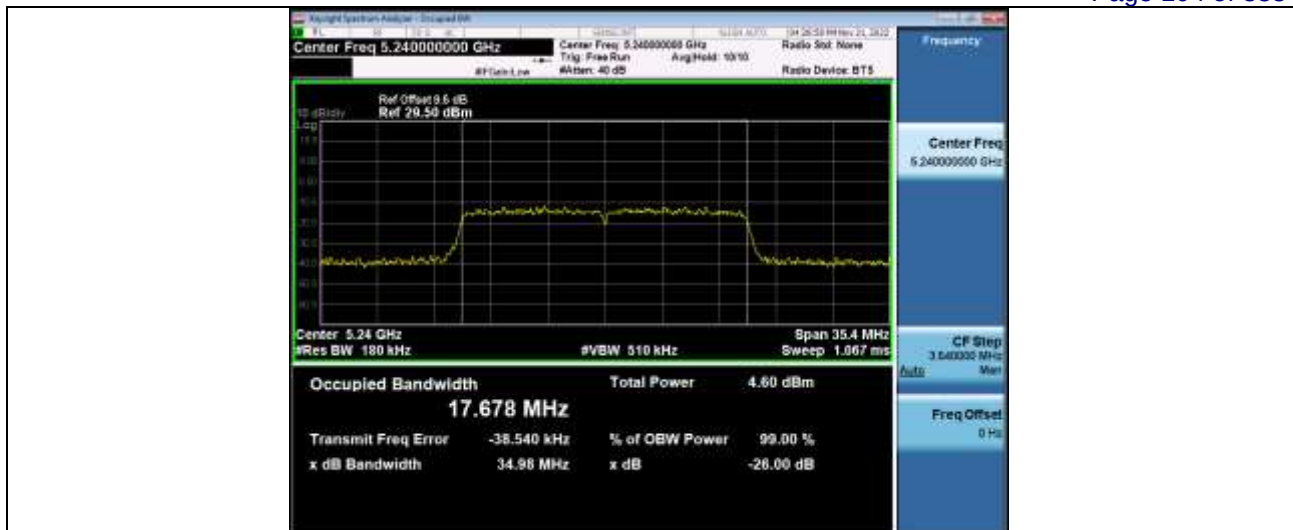


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ac(VHT20)_5180_20M

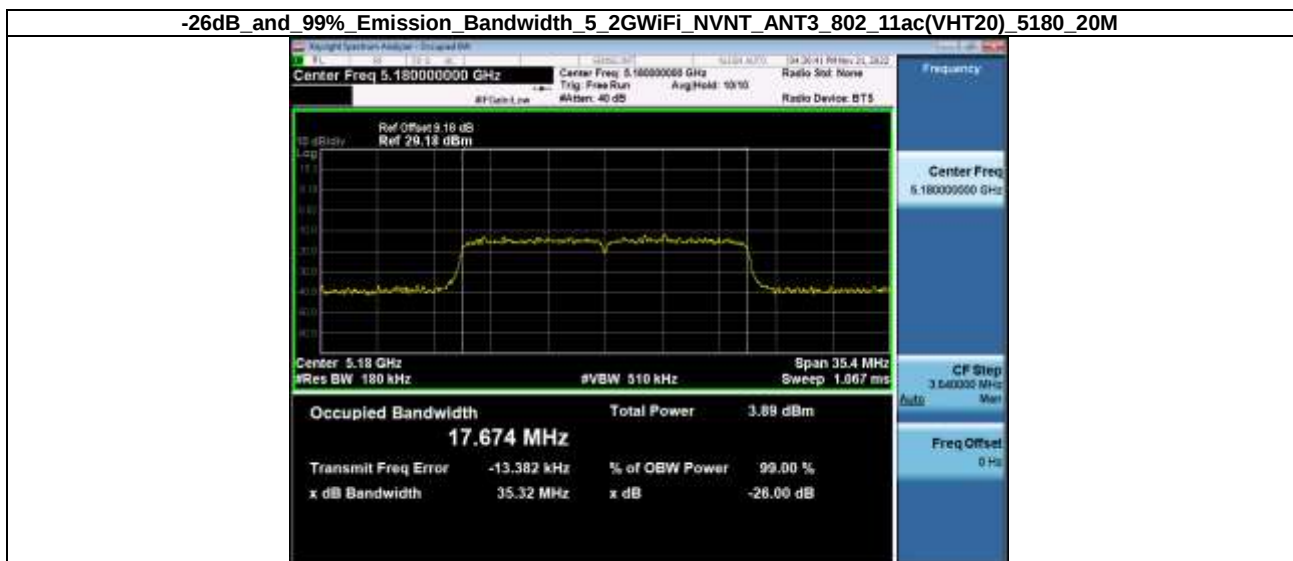


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ac(VHT20)_5200_20M

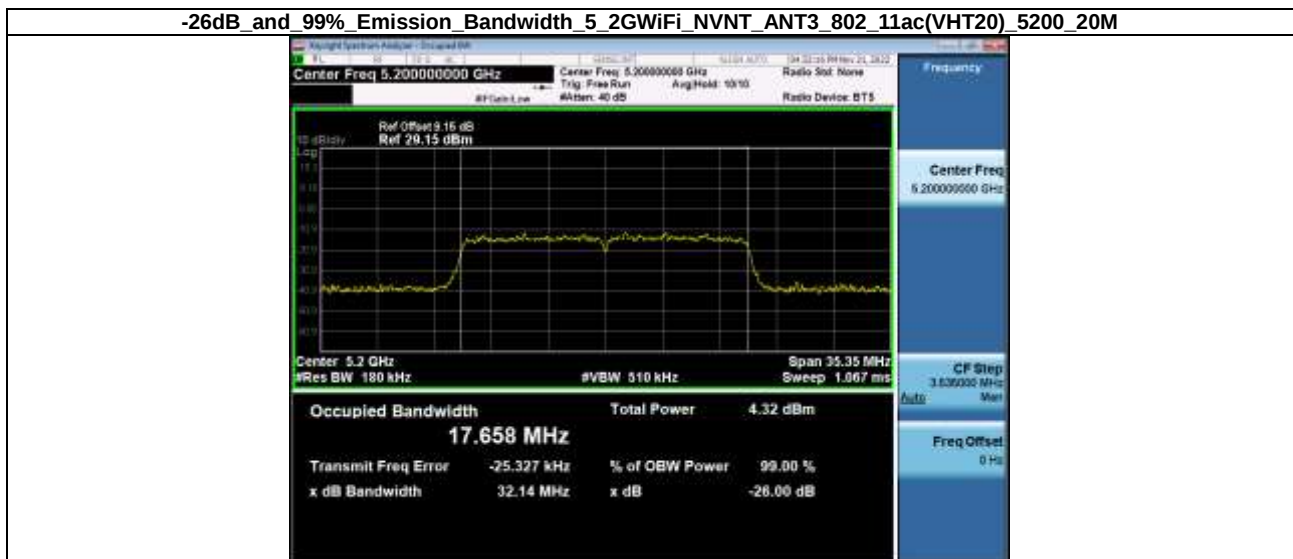


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ac(VHT20)_5240_20M

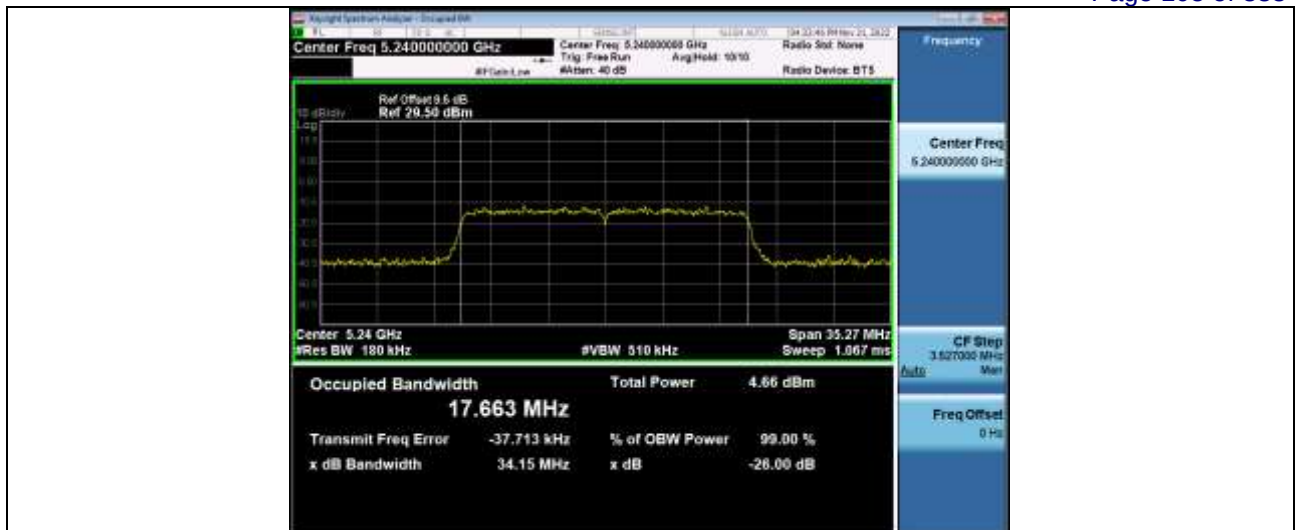

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11n(HT40)_5190_40M

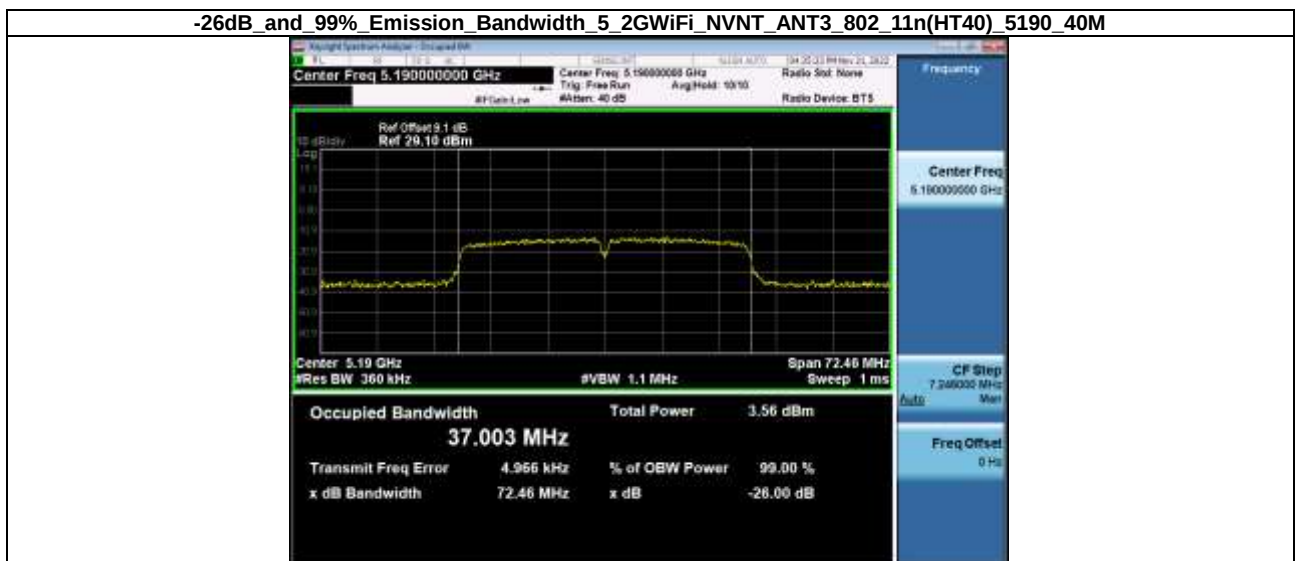

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11n(HT40)_5230_40M

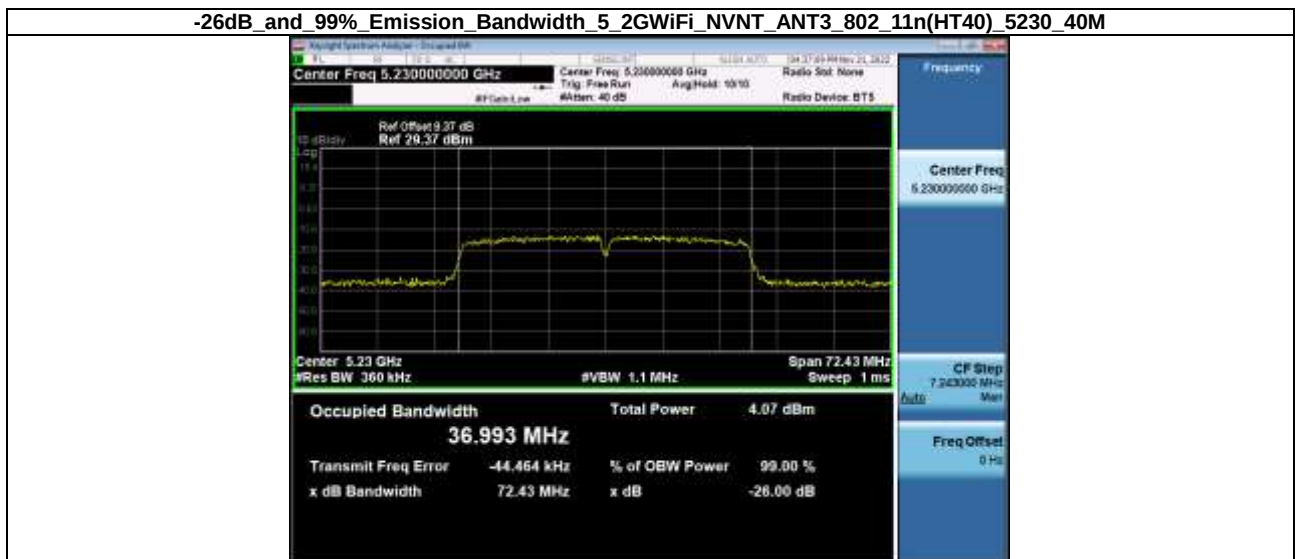

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ac(VHT40)_5190_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ac(VHT40)_5230_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ac(VHT80)_5210_80M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ax(HE20)_5180_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ax(HE20)_5200_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ax(HE20)_5240_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ax(HE40)_5190_40M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ax(HE40)_5230_40M

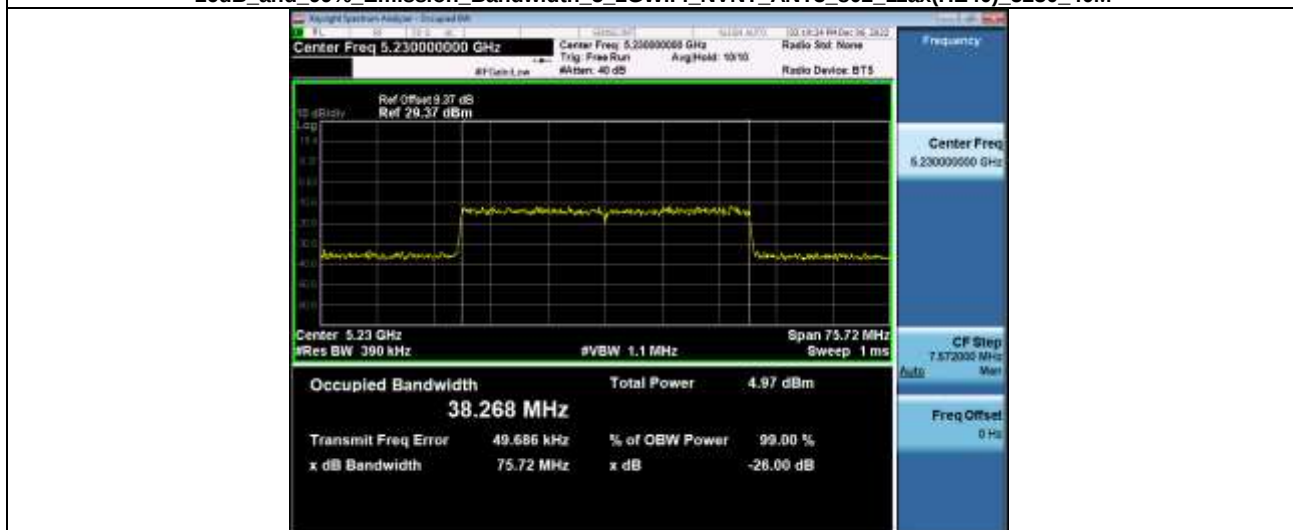


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT3_802_11ax(HE80)_5210_80M

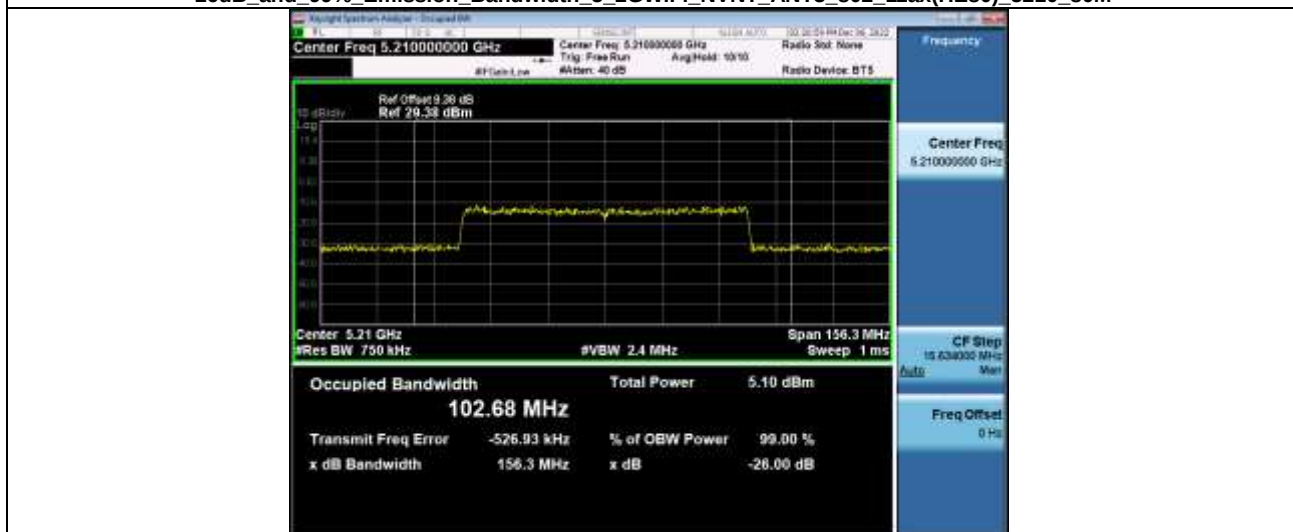


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11a_5180_20M

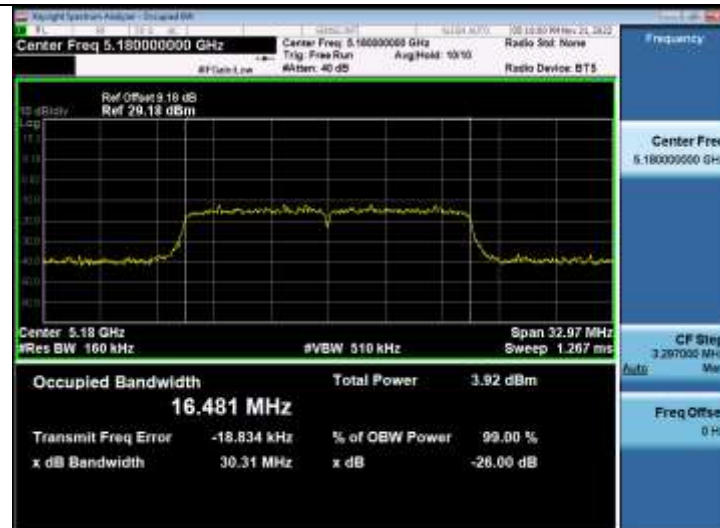

-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT_ANT4_802_11a 5200_20M

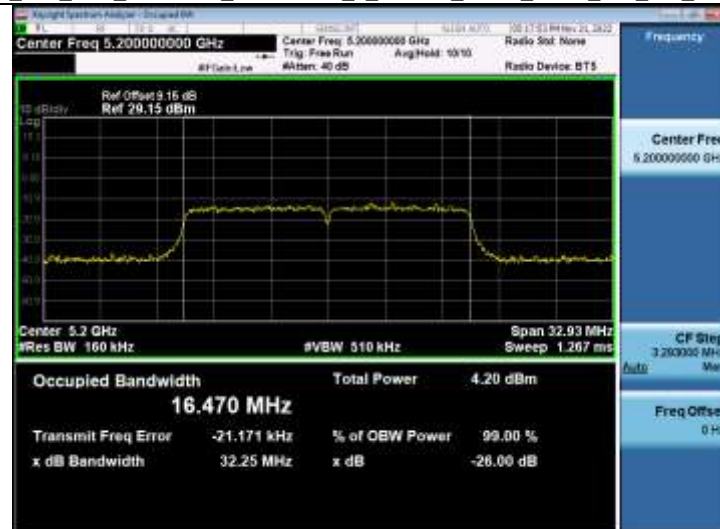

-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT ANT4 802 11a 5240 20M

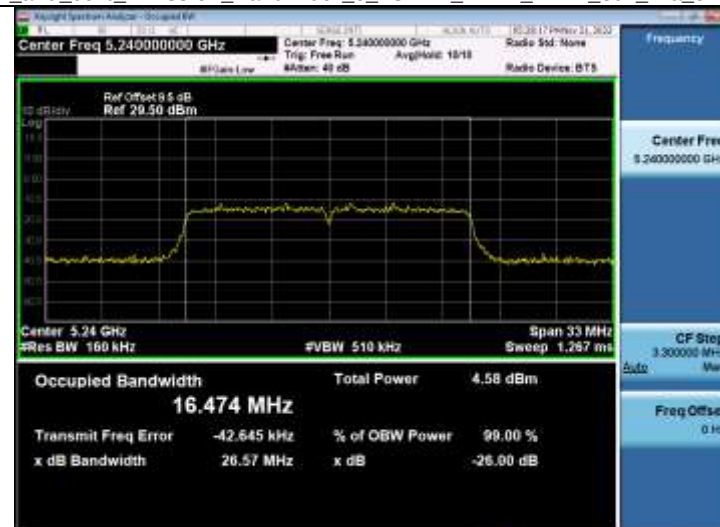

-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT ANT4 802 11n(HT20) 5180 20M



-26dB_and_99%_Emission_Bandwidth_5_2GWiFi_NVNT_ANT4_802_11n(HT20)_5200_20M



-26dB_and_99%_Emission_Bandwidth_5_2GWiFi_NVNT_ANT4_802_11n(HT20)_5240_20M



-26dB and 99% Emission Bandwidth 5 2GWiFi NVNT ANT4 802 11ac(VHT20) 5180 20M
--



-26dB_and_99%_Emission_Bandwidth_5_2WiFi_NVNT_ANT4_802_11ac(VHT20)_5200_20M



-26dB_and_99%_Emission_Bandwidth_5_2GWiFi_NVNT_ANT4_802_11ac(VHT20)_5240_20M



-26dB_and_99%_Emission_Bandwidth_5_2GWiFi_NVNT_ANT4_802_11n(HT40)_5190_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11n(HT40)_5230_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11ac(VHT40)_5190_40M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11ac(VHT40)_5230_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11ac(VHT80)_5210_80M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11ax(HE20)_5180_20M

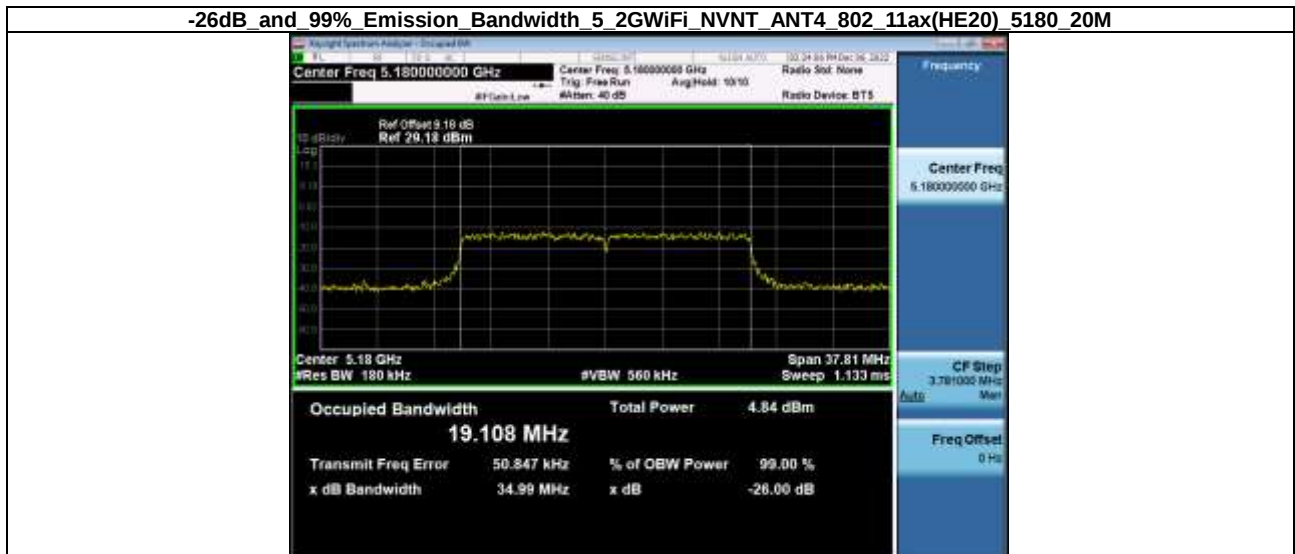

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11ax(HE20)_5200_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11ax(HE20)_5240_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11ax(HE40)_5190_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11ax(HE40)_5230_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT4_802_11ax(HE80)_5210_80M

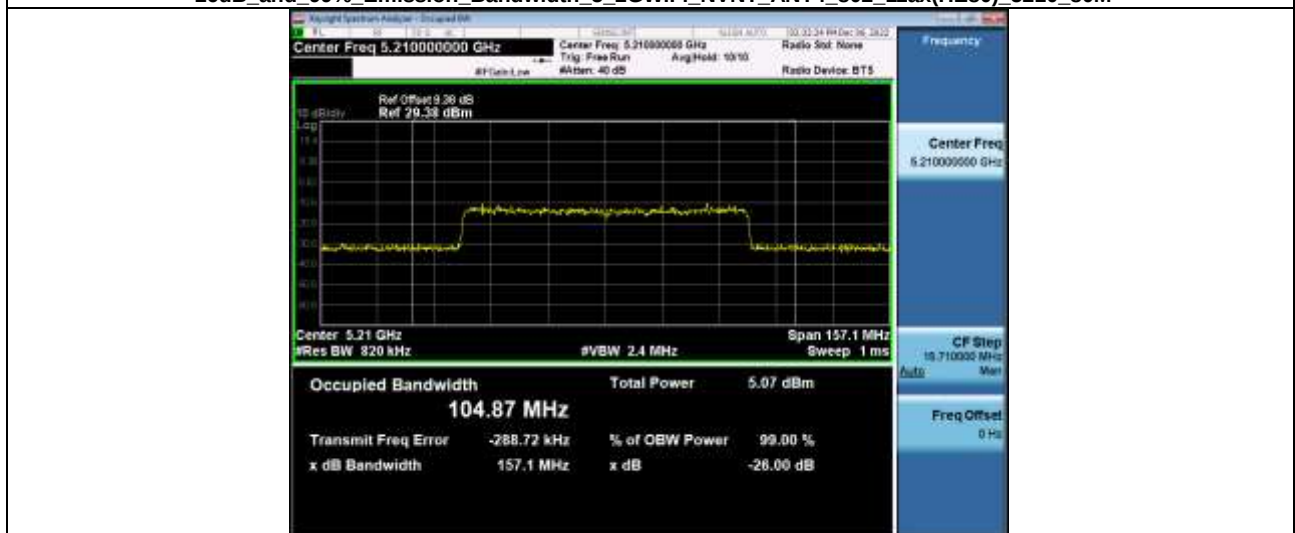

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11a_5180_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11a_5200_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11a_5240_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11n(HT20)_5180_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11n(HT20)_5200_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11n(HT20)_5240_20M

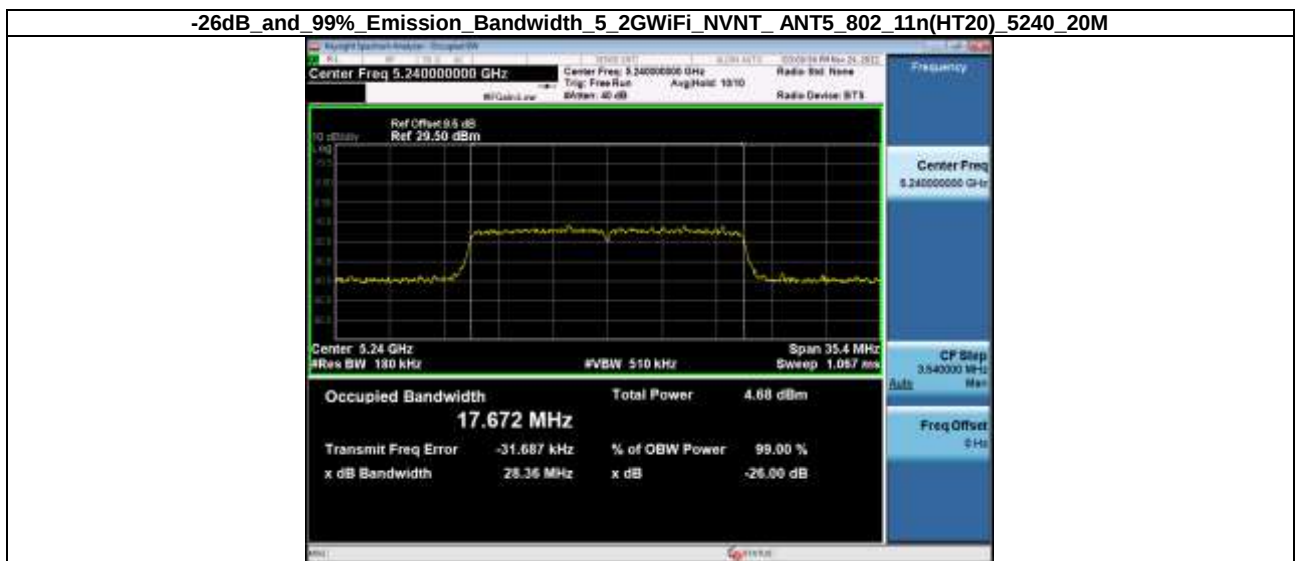


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11ac(VHT20)_5180_20M

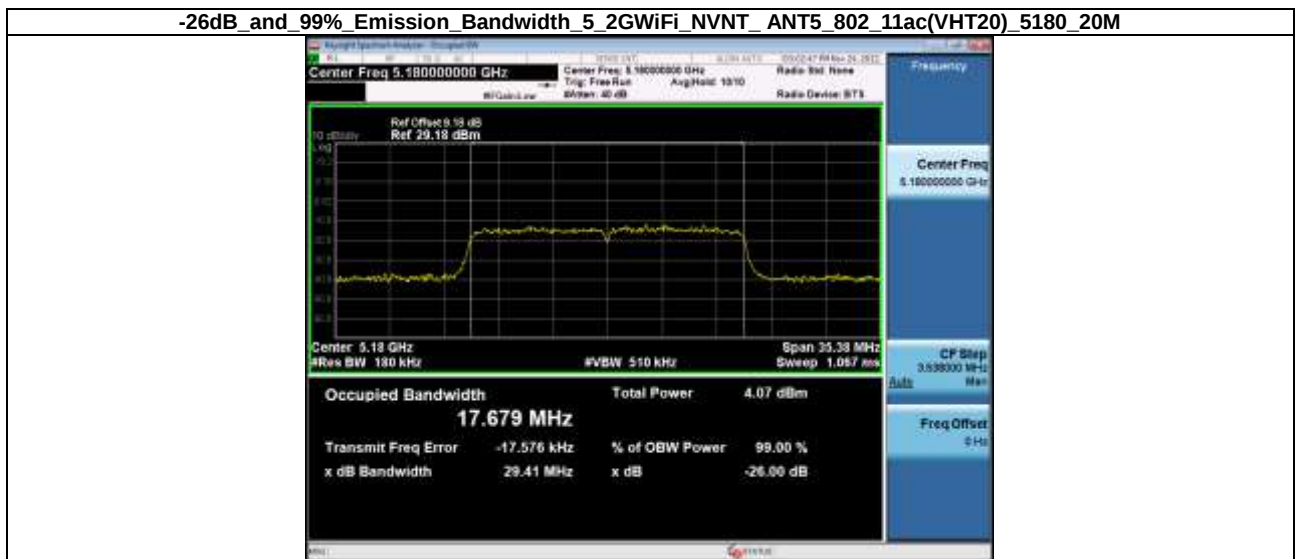


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11ac(VHT20)_5200_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11ac(VHT20)_5240_20M

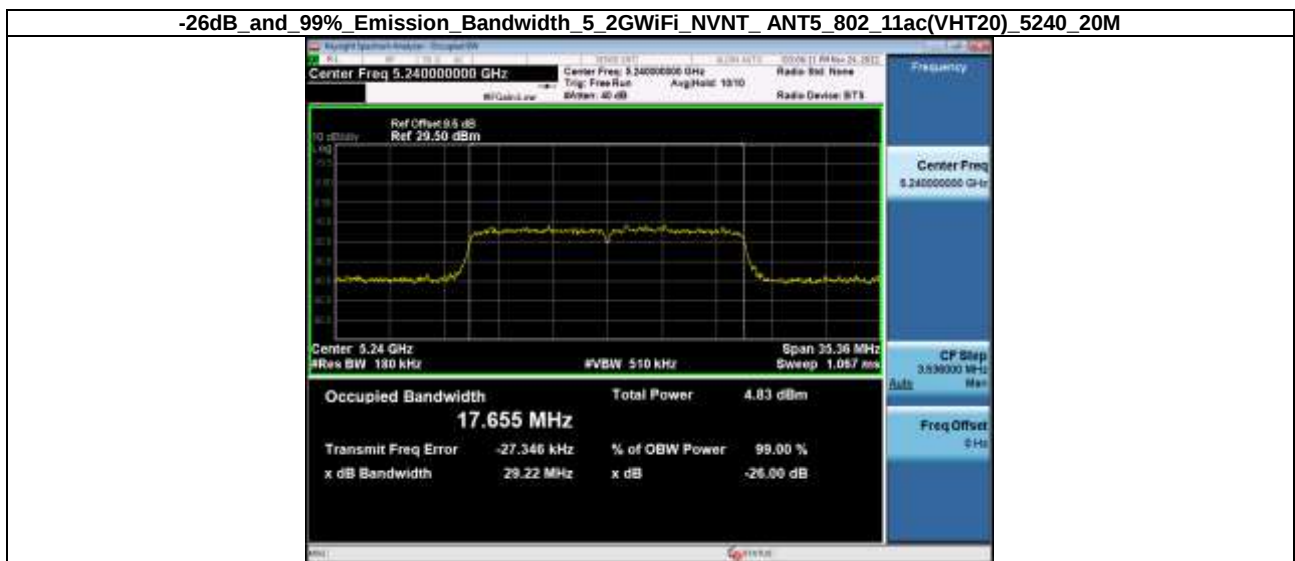

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11n(HT40)_5190_40M

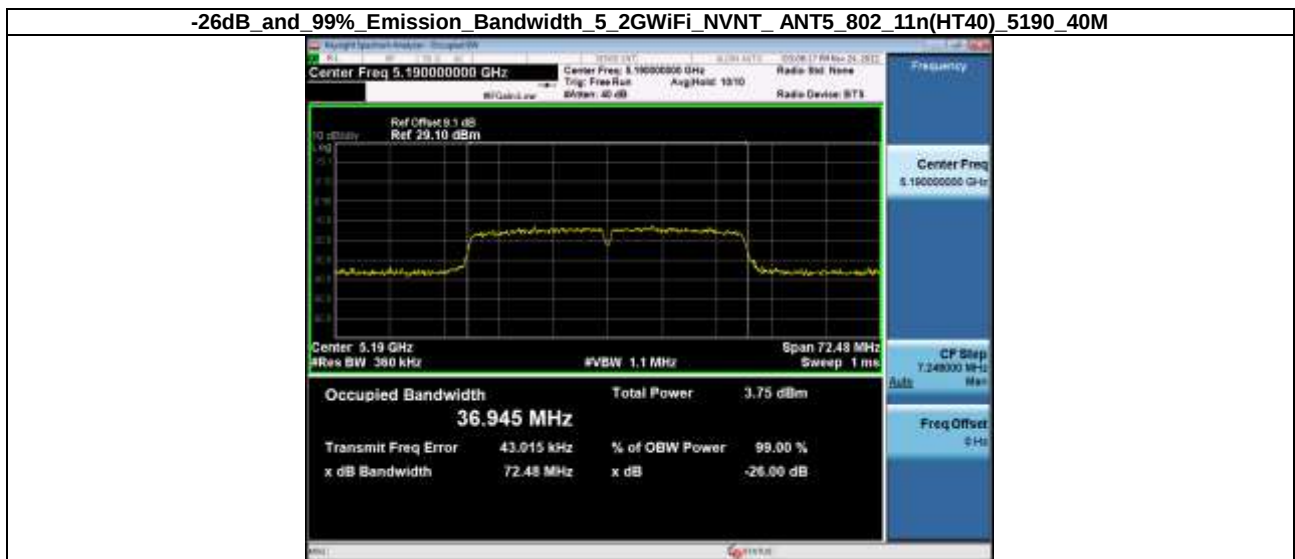

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11n(HT40)_5230_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11ac(VHT40)_5190_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11ac(VHT40)_5230_40M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11ac(VHT80)_5210_80M



-26dB and 99% Emission Bandwidth 5 2GWiFi_NVNT_ANT5_802_11ax(HE20)_5180_20M




-26dB and 99% Emission Bandwidth 5 2GWiFi_NVNT_ANT5_802_11ax(HE20)_5200_20M




-26dB and 99% Emission Bandwidth 5 2GWiFi_NVNT_ANT5_802_11ax(HE20)_5240_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11ax(HE40)_5190_40M

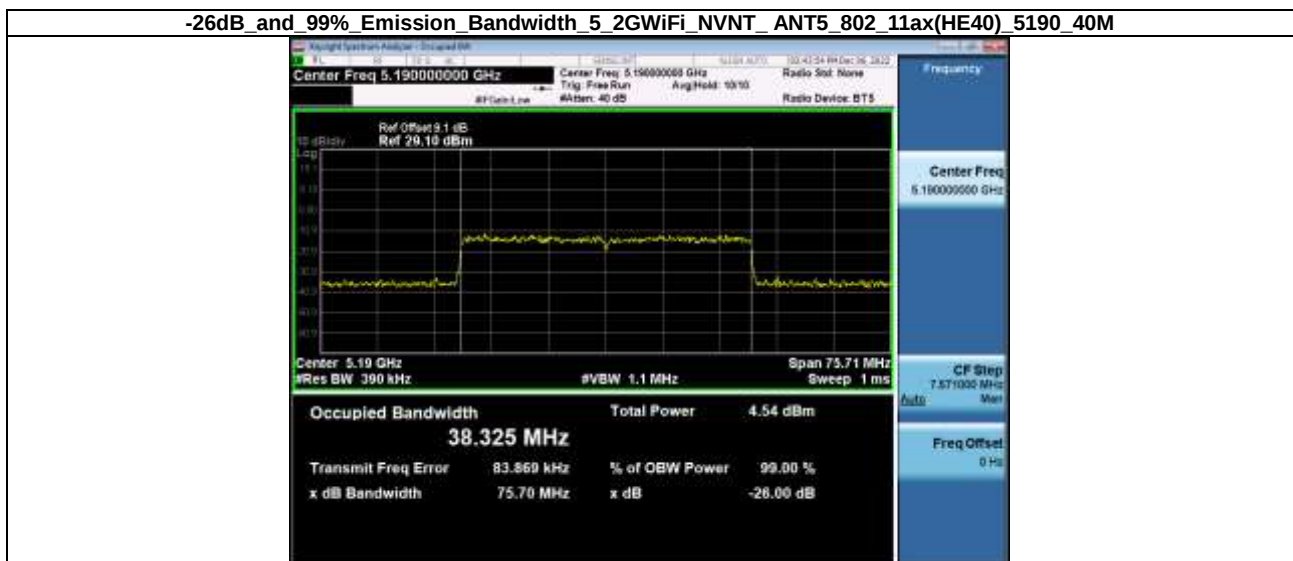

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11ax(HE40)_5230_40M

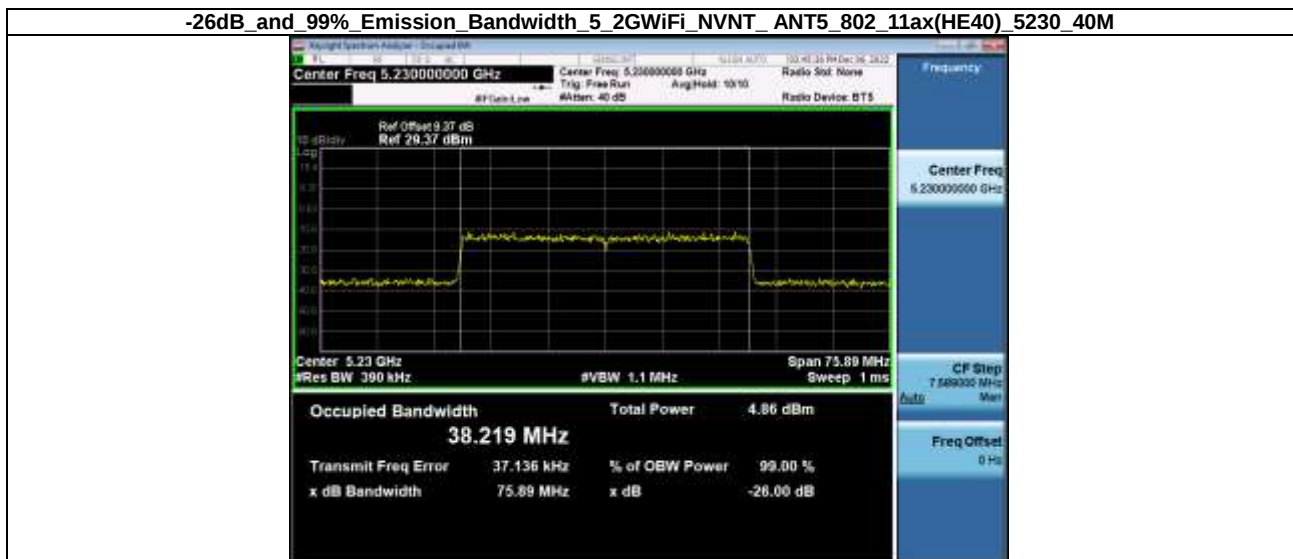

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT5_802_11ax(HE80)_5210_80M

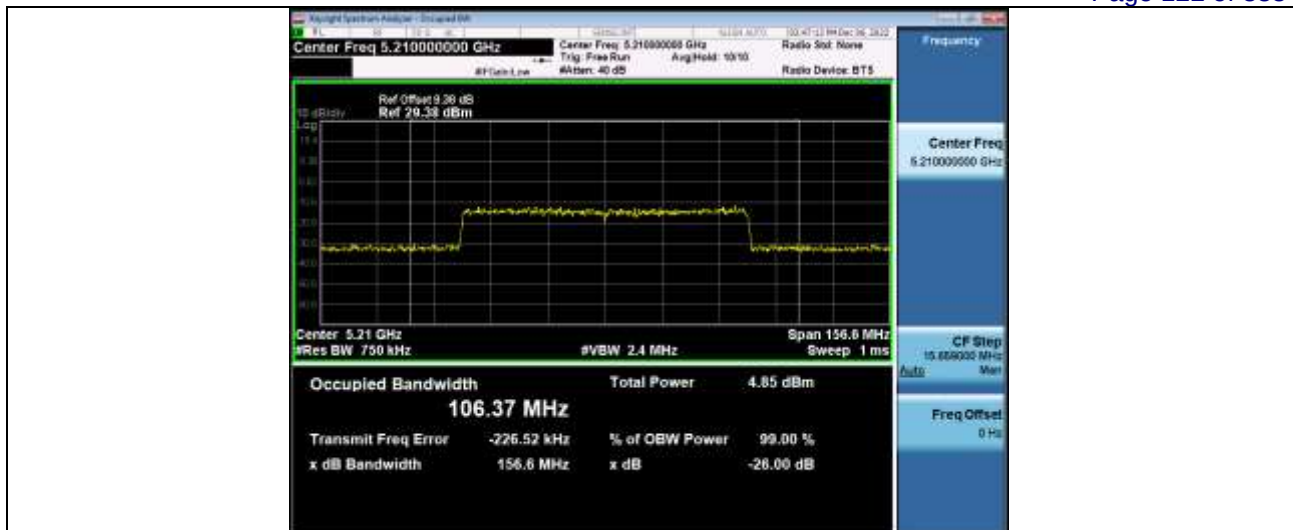

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11a_5180_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11a_5200_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11a_5240_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi NVNT_ANT6_802_11n(HT20)_5180_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi NVNT_ANT6_802_11n(HT20)_5200_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi NVNT_ANT6_802_11n(HT20)_5240_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11ac(VHT20)_5180_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11ac(VHT20)_5200_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11ac(VHT20)_5240_20M



-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11n(HT40)_5190_40M

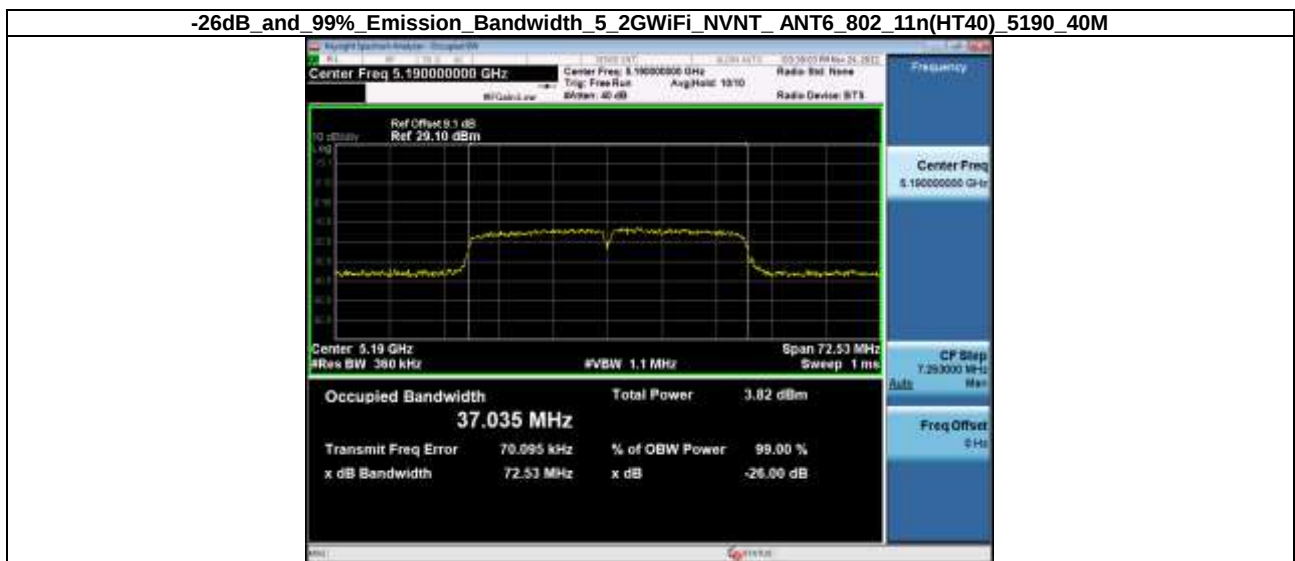


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11n(HT40)_5230_40M

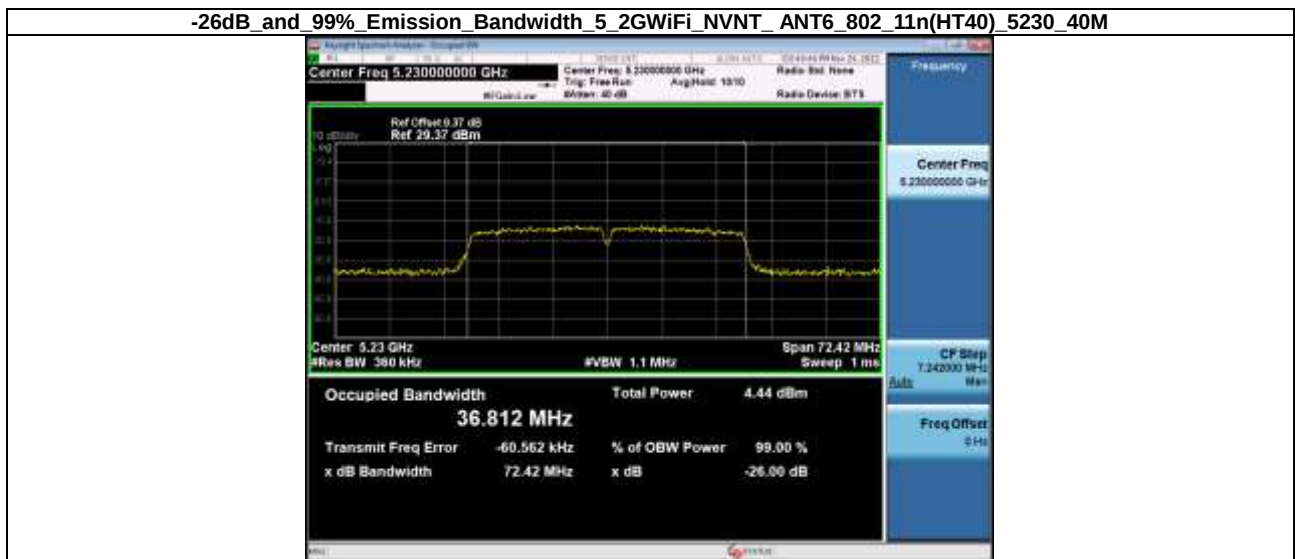


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11ac(VHT40)_5190_40M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11ac(VHT40)_5230_40M

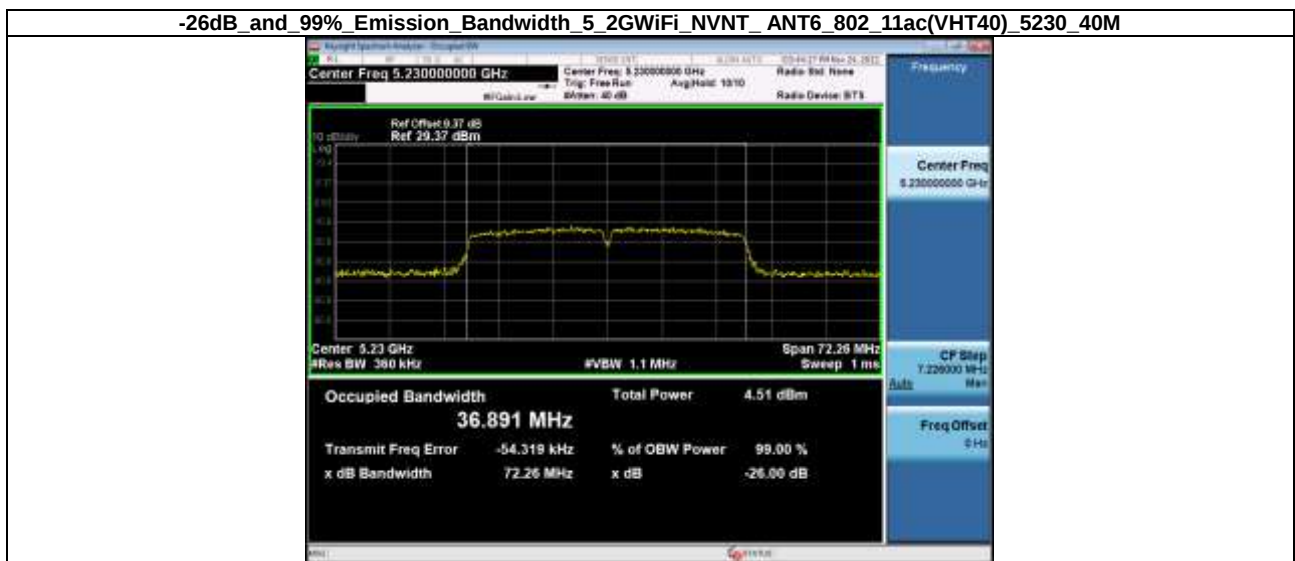

-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11ac(VHT80)_5210_80M

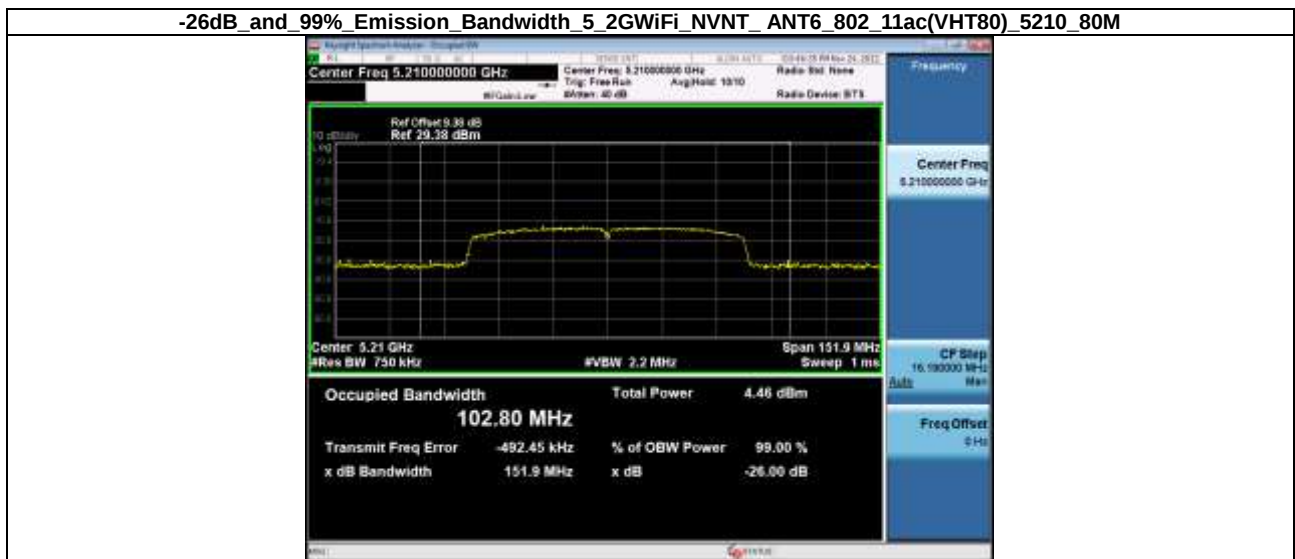


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11ax(HE20)_5180_20M

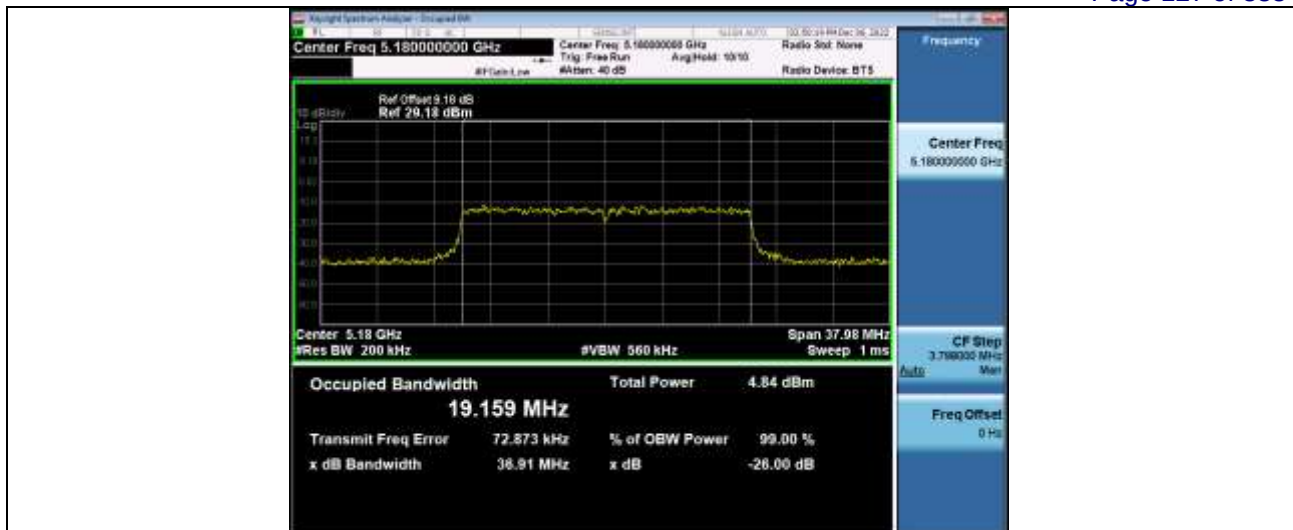


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11ax(HE20)_5200_20M




-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11ax(HE20)_5240_20M

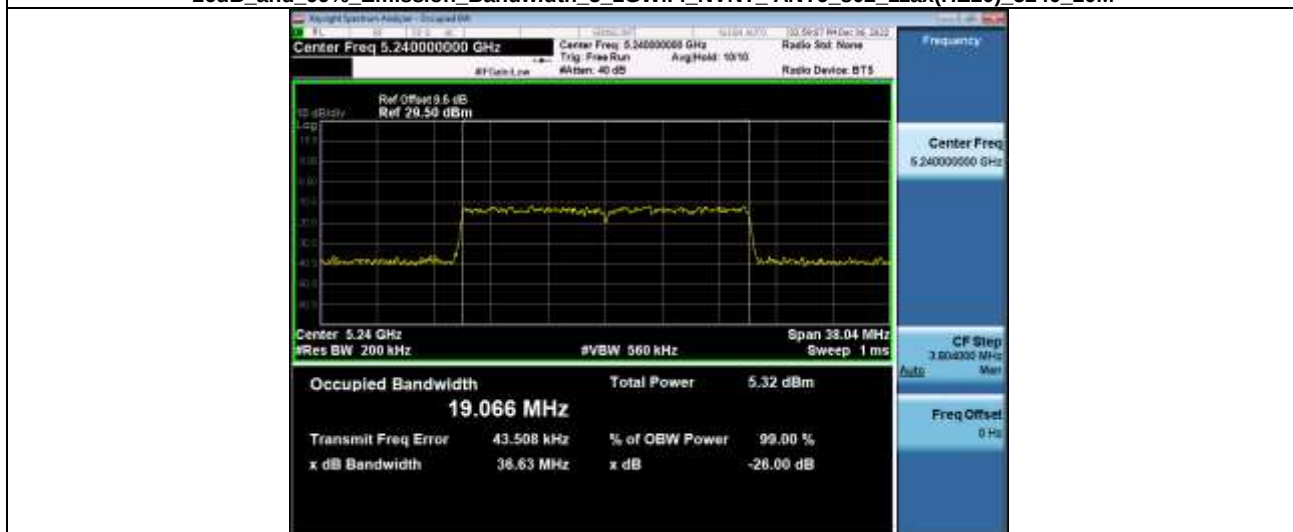


-26dB and 99% Emission Bandwidth 5_2GWiFi_NVNT_ANT6_802_11ax(HE40)_5190_40M

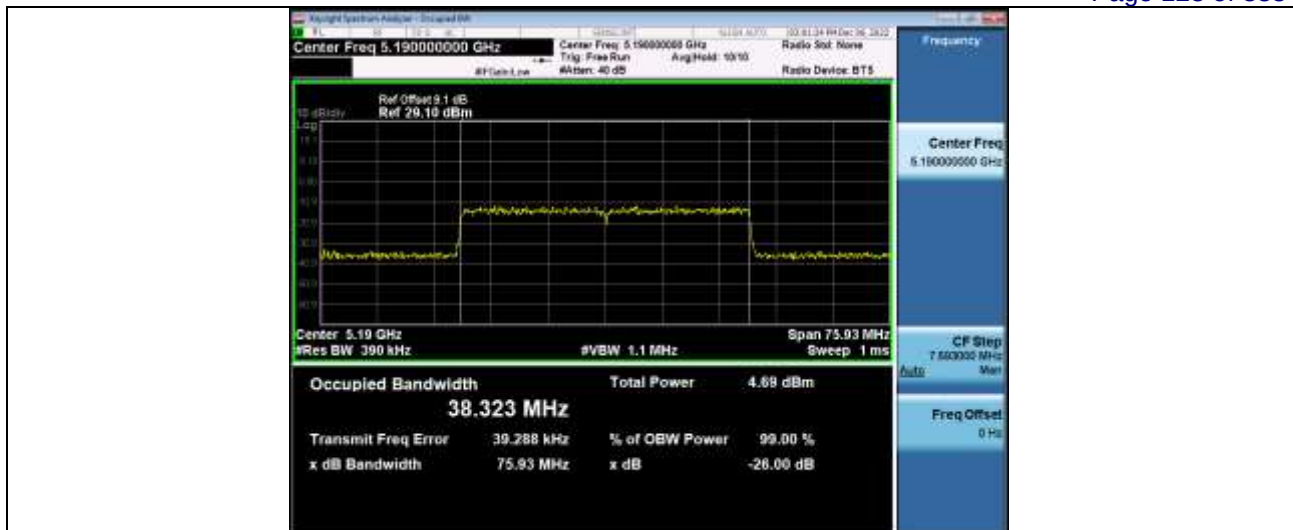

-26dB and 99% Emission Bandwidth 5 2GWiFi_NVNT_ANT6_802_11ax(HE40)_5230_40M

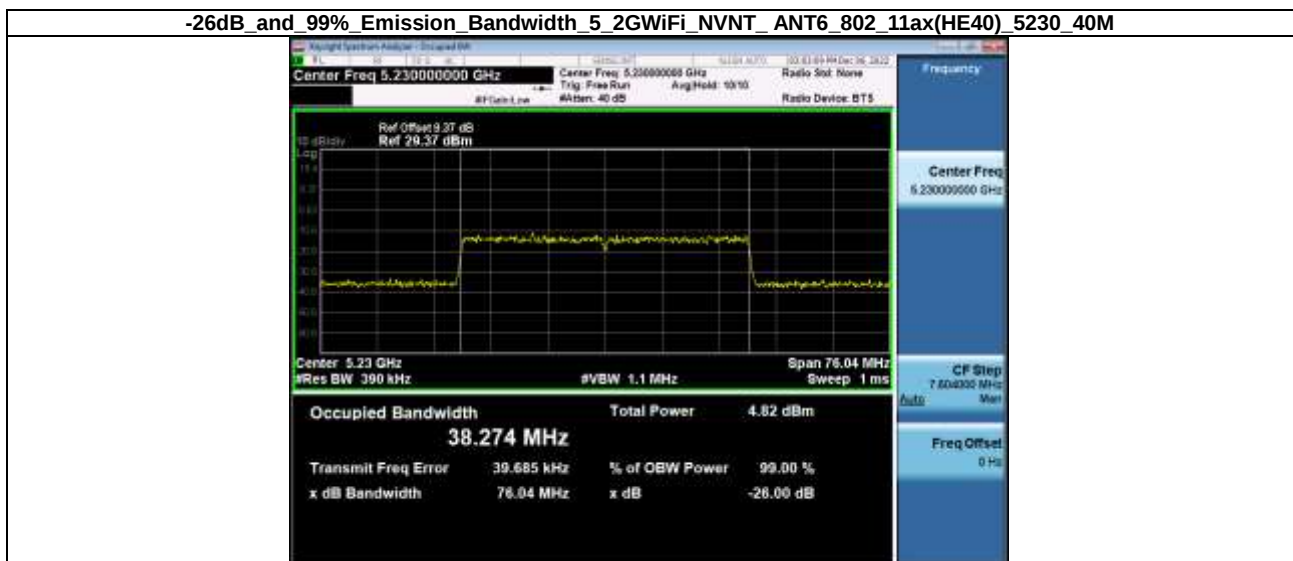

-26dB and 99% Emission Bandwidth 5 2GWiFi_NVNT_ANT6_802_11ax(HE80)_5210_80M

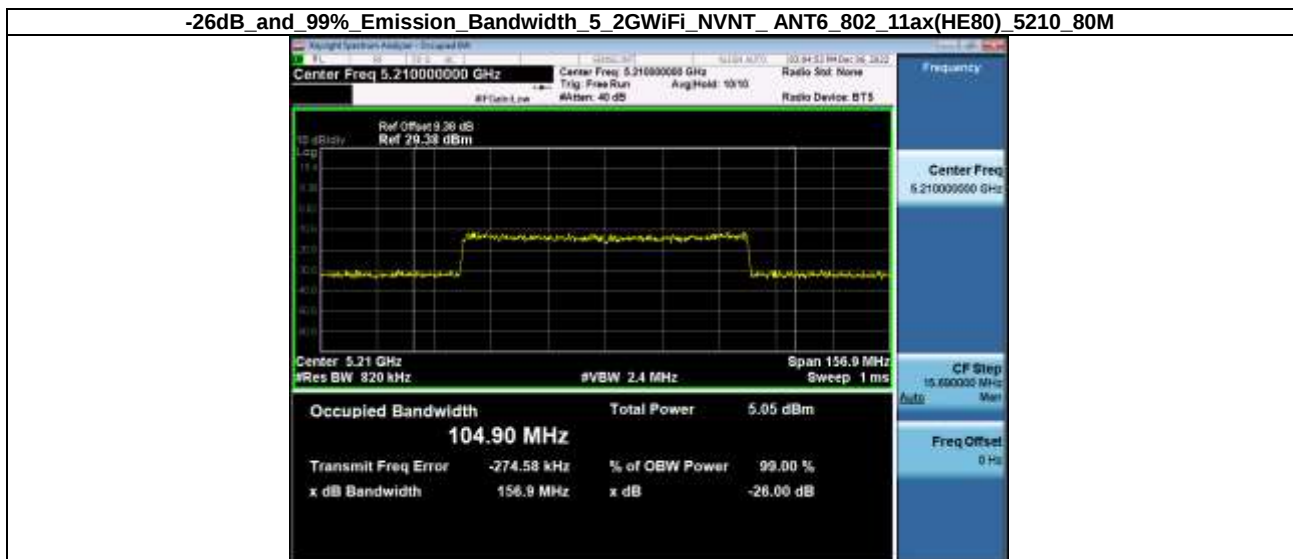

MAXIMUM CONDUCTED OUTPUT POWER

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5180.00	2.59	30.00	Pass
NVNT	ANT1	802.11a	5200.00	2.69	30.00	Pass
NVNT	ANT1	802.11a	5240.00	3.14	30.00	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	2.41	30.00	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	2.80	30.00	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	3.16	30.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	2.47	30.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	2.86	30.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	3.15	30.00	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	2.16	30.00	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	2.48	30.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	3.34	30.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	3.80	30.00	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	3.41	30.00	Pass
NVNT	ANT1	802.11ax(HE20)	5180.00	3.74	30.00	Pass
NVNT	ANT1	802.11ax(HE20)	5200.00	3.70	30.00	Pass
NVNT	ANT1	802.11ax(HE20)	5240.00	3.98	30.00	Pass
NVNT	ANT1	802.11ax(HE40)	5190.00	3.17	30.00	Pass
NVNT	ANT1	802.11ax(HE40)	5230.00	3.36	30.00	Pass
NVNT	ANT1	802.11ax(HE80)	5210.00	3.15	30.00	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT2	802.11a	5180.00	2.34	30.00	Pass
NVNT	ANT2	802.11a	5200.00	2.75	30.00	Pass
NVNT	ANT2	802.11a	5240.00	2.99	30.00	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	2.32	30.00	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	2.72	30.00	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	3.06	30.00	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	2.37	30.00	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	2.74	30.00	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	3.05	30.00	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	2.07	30.00	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	2.55	30.00	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	3.41	30.00	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	3.89	30.00	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	3.47	30.00	Pass
NVNT	ANT2	802.11ax(HE20)	5180.00	3.74	30.00	Pass
NVNT	ANT2	802.11ax(HE20)	5200.00	3.81	30.00	Pass
NVNT	ANT2	802.11ax(HE20)	5240.00	4.04	30.00	Pass
NVNT	ANT2	802.11ax(HE40)	5190.00	3.12	30.00	Pass
NVNT	ANT2	802.11ax(HE40)	5230.00	3.34	30.00	Pass
NVNT	ANT2	802.11ax(HE80)	5210.00	3.34	30.00	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT3	802.11a	5180.00	2.47	30.00	Pass
NVNT	ANT3	802.11a	5200.00	2.87	30.00	Pass
NVNT	ANT3	802.11a	5240.00	3.18	30.00	Pass
NVNT	ANT3	802.11n(HT20)	5180.00	2.53	30.00	Pass
NVNT	ANT3	802.11n(HT20)	5200.00	2.87	30.00	Pass
NVNT	ANT3	802.11n(HT20)	5240.00	3.17	30.00	Pass
NVNT	ANT3	802.11ac(VHT20)	5180.00	2.61	30.00	Pass
NVNT	ANT3	802.11ac(VHT20)	5200.00	2.93	30.00	Pass
NVNT	ANT3	802.11ac(VHT20)	5240.00	3.25	30.00	Pass
NVNT	ANT3	802.11n(HT40)	5190.00	2.21	30.00	Pass
NVNT	ANT3	802.11n(HT40)	5230.00	2.64	30.00	Pass
NVNT	ANT3	802.11ac(VHT40)	5190.00	3.40	30.00	Pass
NVNT	ANT3	802.11ac(VHT40)	5230.00	3.84	30.00	Pass
NVNT	ANT3	802.11ac(VHT80)	5210.00	3.51	30.00	Pass
NVNT	ANT3	802.11ax(HE20)	5180.00	3.79	30.00	Pass
NVNT	ANT3	802.11ax(HE20)	5200.00	3.74	30.00	Pass
NVNT	ANT3	802.11ax(HE20)	5240.00	3.97	30.00	Pass
NVNT	ANT3	802.11ax(HE40)	5190.00	3.12	30.00	Pass
NVNT	ANT3	802.11ax(HE40)	5230.00	3.33	30.00	Pass
NVNT	ANT3	802.11ax(HE80)	5210.00	3.24	30.00	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT4	802.11a	5180.00	2.58	30	Pass
NVNT	ANT4	802.11a	5200.00	2.90	30	Pass
NVNT	ANT4	802.11a	5240.00	3.29	30	Pass
NVNT	ANT4	802.11n(HT20)	5180.00	2.47	30	Pass
NVNT	ANT4	802.11n(HT20)	5200.00	2.77	30	Pass
NVNT	ANT4	802.11n(HT20)	5240.00	3.15	30	Pass
NVNT	ANT4	802.11ac(VHT20)	5180.00	2.51	30	Pass
NVNT	ANT4	802.11ac(VHT20)	5200.00	2.82	30	Pass
NVNT	ANT4	802.11ac(VHT20)	5240.00	3.15	30	Pass
NVNT	ANT4	802.11n(HT40)	5190.00	2.11	30	Pass
NVNT	ANT4	802.11n(HT40)	5230.00	2.64	30	Pass
NVNT	ANT4	802.11ac(VHT40)	5190.00	3.33	30	Pass
NVNT	ANT4	802.11ac(VHT40)	5230.00	3.81	30	Pass
NVNT	ANT4	802.11ac(VHT80)	5210.00	3.45	30	Pass
NVNT	ANT4	802.11ax(HE20)	5180.00	3.49	30	Pass
NVNT	ANT4	802.11ax(HE20)	5200.00	3.63	30	Pass
NVNT	ANT4	802.11ax(HE20)	5240.00	3.97	30	Pass
NVNT	ANT4	802.11ax(HE40)	5190.00	3.12	30	Pass
NVNT	ANT4	802.11ax(HE40)	5230.00	3.28	30	Pass
NVNT	ANT4	802.11ax(HE80)	5210.00	3.24	30	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT5	802.11a	5180.00	3.27	30	Pass
NVNT	ANT5	802.11a	5200.00	3.03	30	Pass
NVNT	ANT5	802.11a	5240.00	3.44	30	Pass
NVNT	ANT5	802.11n(HT20)	5180.00	2.70	30	Pass
NVNT	ANT5	802.11n(HT20)	5200.00	3.00	30	Pass
NVNT	ANT5	802.11n(HT20)	5240.00	3.34	30	Pass
NVNT	ANT5	802.11ac(VHT20)	5180.00	2.77	30	Pass
NVNT	ANT5	802.11ac(VHT20)	5200.00	3.00	30	Pass
NVNT	ANT5	802.11ac(VHT20)	5240.00	3.44	30	Pass
NVNT	ANT5	802.11n(HT40)	5190.00	2.40	30	Pass
NVNT	ANT5	802.11n(HT40)	5230.00	2.85	30	Pass
NVNT	ANT5	802.11ac(VHT40)	5190.00	2.40	30	Pass
NVNT	ANT5	802.11ac(VHT40)	5230.00	2.89	30	Pass
NVNT	ANT5	802.11ac(VHT80)	5210.00	2.43	30	Pass
NVNT	ANT5	802.11ax(HE20)	5180.00	3.78	30	Pass
NVNT	ANT5	802.11ax(HE20)	5200.00	3.53	30	Pass
NVNT	ANT5	802.11ax(HE20)	5240.00	4.04	30	Pass
NVNT	ANT5	802.11ax(HE40)	5190.00	3.10	30	Pass
NVNT	ANT5	802.11ax(HE40)	5230.00	3.26	30	Pass
NVNT	ANT5	802.11ax(HE80)	5210.00	3.15	30	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT6	802.11a	5180.00	2.72	30	Pass
NVNT	ANT6	802.11a	5200.00	2.89	30	Pass
NVNT	ANT6	802.11a	5240.00	3.34	30	Pass
NVNT	ANT6	802.11n(HT20)	5180.00	2.62	30	Pass
NVNT	ANT6	802.11n(HT20)	5200.00	3.02	30	Pass
NVNT	ANT6	802.11n(HT20)	5240.00	3.36	30	Pass
NVNT	ANT6	802.11ac(VHT20)	5180.00	2.70	30	Pass
NVNT	ANT6	802.11ac(VHT20)	5200.00	3.04	30	Pass
NVNT	ANT6	802.11ac(VHT20)	5240.00	3.46	30	Pass
NVNT	ANT6	802.11n(HT40)	5190.00	2.45	30	Pass
NVNT	ANT6	802.11n(HT40)	5230.00	2.88	30	Pass
NVNT	ANT6	802.11ac(VHT40)	5190.00	2.51	30	Pass
NVNT	ANT6	802.11ac(VHT40)	5230.00	2.91	30	Pass
NVNT	ANT6	802.11ac(VHT80)	5210.00	2.54	30	Pass
NVNT	ANT6	802.11ax(HE20)	5180.00	3.73	30	Pass
NVNT	ANT6	802.11ax(HE20)	5200.00	3.75	30	Pass
NVNT	ANT6	802.11ax(HE20)	5240.00	4.08	30	Pass
NVNT	ANT6	802.11ax(HE40)	5190.00	3.08	30	Pass
NVNT	ANT6	802.11ax(HE40)	5230.00	3.21	30	Pass
NVNT	ANT6	802.11ax(HE80)	5210.00	3.14	30	Pass

Condition	Antenna	Modulation	Frequency (MHz)	MIMO Power(dBm)	MIMO limit(dBm)	Result
NVNT	MIMO	802.11n(HT20)	5180.00	10.29	17.76	Pass
NVNT	MIMO	802.11n(HT20)	5200.00	10.65	17.76	Pass
NVNT	MIMO	802.11n(HT20)	5240.00	10.99	17.76	Pass
NVNT	MIMO	802.11ac(VHT20)	5180.00	10.36	17.76	Pass
NVNT	MIMO	802.11ac(VHT20)	5200.00	10.68	17.76	Pass
NVNT	MIMO	802.11ac(VHT20)	5240.00	11.03	17.76	Pass
NVNT	MIMO	802.11n(HT40)	5190.00	10.02	17.76	Pass
NVNT	MIMO	802.11n(HT40)	5230.00	10.46	17.76	Pass
NVNT	MIMO	802.11ac(VHT40)	5190.00	10.87	17.76	Pass
NVNT	MIMO	802.11ac(VHT40)	5230.00	11.33	17.76	Pass
NVNT	MIMO	802.11ac(VHT80)	5210.00	10.94	17.76	Pass
NVNT	MIMO	802.11ax(HE20)	5180.00	11.49	17.76	Pass
NVNT	MIMO	802.11ax(HE20)	5200.00	11.48	17.76	Pass
NVNT	MIMO	802.11ax(HE20)	5240.00	11.80	17.76	Pass
NVNT	MIMO	802.11ax(HE40)	5190.00	10.90	17.76	Pass
NVNT	MIMO	802.11ax(HE40)	5230.00	11.08	17.76	Pass
NVNT	MIMO	802.11ax(HE80)	5210.00	10.99	17.76	Pass

MIMO limit=30-(18.24-6)=30-12.24=17.76dBm

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Gain (dBi)	EIRP(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5180.00	2.59	12.04	14.63	21.00	Pass
NVNT	ANT1	802.11a	5200.00	2.69	12.04	14.73	21.00	Pass
NVNT	ANT1	802.11a	5240.00	3.14	12.04	15.18	21.00	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	2.41	12.04	14.45	21.00	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	2.8	12.04	14.84	21.00	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	3.16	12.04	15.2	21.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	2.47	12.04	14.51	21.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	2.86	12.04	14.9	21.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	3.15	12.04	15.19	21.00	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	2.16	12.04	14.2	21.00	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	2.48	12.04	14.52	21.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	3.34	12.04	15.38	21.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	3.8	12.04	15.84	21.00	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	3.41	12.04	15.45	21.00	Pass
NVNT	ANT1	802.11ax(HE20)	5180.00	3.74	12.04	15.78	21.00	Pass
NVNT	ANT1	802.11ax(HE20)	5200.00	3.7	12.04	15.74	21.00	Pass
NVNT	ANT1	802.11ax(HE20)	5240.00	3.98	12.04	16.02	21.00	Pass
NVNT	ANT1	802.11ax(HE40)	5190.00	3.17	12.04	15.21	21.00	Pass
NVNT	ANT1	802.11ax(HE40)	5230.00	3.36	12.04	15.4	21.00	Pass
NVNT	ANT1	802.11ax(HE80)	5210.00	3.15	12.04	15.19	21.00	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Gain (dBi)	EIRP(dBm)	limit(dBm)	Result
NVNT	ANT2	802.11a	5180.00	2.34	12.29	14.63	21.00	Pass
NVNT	ANT2	802.11a	5200.00	2.75	12.29	15.04	21.00	Pass
NVNT	ANT2	802.11a	5240.00	2.99	12.29	15.28	21.00	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	2.32	12.29	14.61	21.00	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	2.72	12.29	15.01	21.00	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	3.06	12.29	15.35	21.00	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	2.37	12.29	14.66	21.00	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	2.74	12.29	15.03	21.00	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	3.05	12.29	15.34	21.00	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	2.07	12.29	14.36	21.00	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	2.55	12.29	14.84	21.00	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	3.41	12.29	15.7	21.00	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	3.89	12.29	16.18	21.00	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	3.47	12.29	15.76	21.00	Pass
NVNT	ANT2	802.11ax(HE20)	5180.00	3.74	12.29	16.03	21.00	Pass
NVNT	ANT2	802.11ax(HE20)	5200.00	3.81	12.29	16.1	21.00	Pass
NVNT	ANT2	802.11ax(HE20)	5240.00	4.04	12.29	16.33	21.00	Pass
NVNT	ANT2	802.11ax(HE40)	5190.00	3.12	12.29	15.41	21.00	Pass
NVNT	ANT2	802.11ax(HE40)	5230.00	3.34	12.29	15.63	21.00	Pass

NVNT	ANT2	802.11ax(HE80)	5210.00	3.34	12.29	15.63	21.00	Pass
------	------	----------------	---------	------	-------	-------	-------	------

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Gain (dBi)	EIRP(dBm)	limit(dBm)	Result
NVNT	ANT3	802.11a	5180.00	2.47	8.94	11.41	21.00	Pass
NVNT	ANT3	802.11a	5200.00	2.87	8.94	11.81	21.00	Pass
NVNT	ANT3	802.11a	5240.00	3.18	8.94	12.12	21.00	Pass
NVNT	ANT3	802.11n(HT20)	5180.00	2.53	8.94	11.47	21.00	Pass
NVNT	ANT3	802.11n(HT20)	5200.00	2.87	8.94	11.81	21.00	Pass
NVNT	ANT3	802.11n(HT20)	5240.00	3.17	8.94	12.11	21.00	Pass
NVNT	ANT3	802.11ac(VHT20)	5180.00	2.61	8.94	11.55	21.00	Pass
NVNT	ANT3	802.11ac(VHT20)	5200.00	2.93	8.94	11.87	21.00	Pass
NVNT	ANT3	802.11ac(VHT20)	5240.00	3.25	8.94	12.19	21.00	Pass
NVNT	ANT3	802.11n(HT40)	5190.00	2.21	8.94	11.15	21.00	Pass
NVNT	ANT3	802.11n(HT40)	5230.00	2.64	8.94	11.58	21.00	Pass
NVNT	ANT3	802.11ac(VHT40)	5190.00	3.40	8.94	12.34	21.00	Pass
NVNT	ANT3	802.11ac(VHT40)	5230.00	3.84	8.94	12.78	21.00	Pass
NVNT	ANT3	802.11ac(VHT80)	5210.00	3.51	8.94	12.45	21.00	Pass
NVNT	ANT3	802.11ax(HE20)	5180.00	3.79	8.94	12.73	21.00	Pass
NVNT	ANT3	802.11ax(HE20)	5200.00	3.74	8.94	12.68	21.00	Pass
NVNT	ANT3	802.11ax(HE20)	5240.00	3.97	8.94	12.91	21.00	Pass
NVNT	ANT3	802.11ax(HE40)	5190.00	3.12	8.94	12.06	21.00	Pass
NVNT	ANT3	802.11ax(HE40)	5230.00	3.33	8.94	12.27	21.00	Pass
NVNT	ANT3	802.11ax(HE80)	5210.00	3.24	8.94	12.18	21.00	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Gain (dBi)	EIRP(dBm)	limit(dBm)	Result
NVNT	ANT4	802.11a	5180.00	2.58	9.14	11.72	21.00	Pass
NVNT	ANT4	802.11a	5200.00	2.9	9.14	12.04	21.00	Pass
NVNT	ANT4	802.11a	5240.00	3.29	9.14	12.43	21.00	Pass
NVNT	ANT4	802.11n(HT20)	5180.00	2.47	9.14	11.61	21.00	Pass
NVNT	ANT4	802.11n(HT20)	5200.00	2.77	9.14	11.91	21.00	Pass
NVNT	ANT4	802.11n(HT20)	5240.00	3.15	9.14	12.29	21.00	Pass
NVNT	ANT4	802.11ac(VHT20)	5180.00	2.51	9.14	11.65	21.00	Pass
NVNT	ANT4	802.11ac(VHT20)	5200.00	2.82	9.14	11.96	21.00	Pass
NVNT	ANT4	802.11ac(VHT20)	5240.00	3.15	9.14	12.29	21.00	Pass
NVNT	ANT4	802.11n(HT40)	5190.00	2.11	9.14	11.25	21.00	Pass
NVNT	ANT4	802.11n(HT40)	5230.00	2.64	9.14	11.78	21.00	Pass
NVNT	ANT4	802.11ac(VHT40)	5190.00	3.33	9.14	12.47	21.00	Pass
NVNT	ANT4	802.11ac(VHT40)	5230.00	3.81	9.14	12.95	21.00	Pass
NVNT	ANT4	802.11ac(VHT80)	5210.00	3.45	9.14	12.59	21.00	Pass
NVNT	ANT4	802.11ax(HE20)	5180.00	3.49	9.14	12.63	21.00	Pass
NVNT	ANT4	802.11ax(HE20)	5200.00	3.63	9.14	12.77	21.00	Pass
NVNT	ANT4	802.11ax(HE20)	5240.00	3.97	9.14	13.11	21.00	Pass
NVNT	ANT4	802.11ax(HE40)	5190.00	3.12	9.14	12.26	21.00	Pass
NVNT	ANT4	802.11ax(HE40)	5230.00	3.28	9.14	12.42	21.00	Pass
NVNT	ANT4	802.11ax(HE80)	5210.00	3.24	9.14	12.38	21.00	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Gain (dBi)	EIRP(dBm)	limit(dBm)	Result
NVNT	ANT5	802.11a	5180.00	3.27	9.8	13.07	21.00	Pass
NVNT	ANT5	802.11a	5200.00	3.03	9.8	12.83	21.00	Pass
NVNT	ANT5	802.11a	5240.00	3.44	9.8	13.24	21.00	Pass
NVNT	ANT5	802.11n(HT20)	5180.00	2.70	9.8	12.5	21.00	Pass
NVNT	ANT5	802.11n(HT20)	5200.00	3.00	9.8	12.8	21.00	Pass
NVNT	ANT5	802.11n(HT20)	5240.00	3.34	9.8	13.14	21.00	Pass
NVNT	ANT5	802.11ac(VHT20)	5180.00	2.77	9.8	12.57	21.00	Pass
NVNT	ANT5	802.11ac(VHT20)	5200.00	3.00	9.8	12.8	21.00	Pass
NVNT	ANT5	802.11ac(VHT20)	5240.00	3.44	9.8	13.24	21.00	Pass
NVNT	ANT5	802.11n(HT40)	5190.00	2.4	9.8	12.2	21.00	Pass
NVNT	ANT5	802.11n(HT40)	5230.00	2.85	9.8	12.65	21.00	Pass
NVNT	ANT5	802.11ac(VHT40)	5190.00	2.40	9.8	12.2	21.00	Pass
NVNT	ANT5	802.11ac(VHT40)	5230.00	2.89	9.8	12.69	21.00	Pass
NVNT	ANT5	802.11ac(VHT80)	5210.00	2.43	9.8	12.23	21.00	Pass
NVNT	ANT5	802.11ax(HE20)	5180.00	3.78	9.8	13.58	21.00	Pass
NVNT	ANT5	802.11ax(HE20)	5200.00	3.53	9.8	13.33	21.00	Pass
NVNT	ANT5	802.11ax(HE20)	5240.00	4.04	9.8	13.84	21.00	Pass
NVNT	ANT5	802.11ax(HE40)	5190.00	3.10	9.8	12.9	21.00	Pass
NVNT	ANT5	802.11ax(HE40)	5230.00	3.26	9.8	13.06	21.00	Pass
NVNT	ANT5	802.11ax(HE80)	5210.00	3.15	9.8	12.95	21.00	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Gain (dBi)	EIRP(dBm)	limit(dBm)	Result
NVNT	ANT6	802.11a	5180.00	2.72	9.94	12.66	21.00	Pass
NVNT	ANT6	802.11a	5200.00	2.89	9.94	12.83	21.00	Pass
NVNT	ANT6	802.11a	5240.00	3.34	9.94	13.28	21.00	Pass
NVNT	ANT6	802.11n(HT20)	5180.00	2.62	9.94	12.56	21.00	Pass
NVNT	ANT6	802.11n(HT20)	5200.00	3.02	9.94	12.96	21.00	Pass
NVNT	ANT6	802.11n(HT20)	5240.00	3.36	9.94	13.3	21.00	Pass
NVNT	ANT6	802.11ac(VHT20)	5180.00	2.7	9.94	12.64	21.00	Pass
NVNT	ANT6	802.11ac(VHT20)	5200.00	3.04	9.94	12.98	21.00	Pass
NVNT	ANT6	802.11ac(VHT20)	5240.00	3.46	9.94	13.4	21.00	Pass
NVNT	ANT6	802.11n(HT40)	5190.00	2.45	9.94	12.39	21.00	Pass
NVNT	ANT6	802.11n(HT40)	5230.00	2.88	9.94	12.82	21.00	Pass
NVNT	ANT6	802.11ac(VHT40)	5190.00	2.51	9.94	12.45	21.00	Pass
NVNT	ANT6	802.11ac(VHT40)	5230.00	2.91	9.94	12.85	21.00	Pass
NVNT	ANT6	802.11ac(VHT80)	5210.00	2.54	9.94	12.48	21.00	Pass
NVNT	ANT6	802.11ax(HE20)	5180.00	3.73	9.94	13.67	21.00	Pass
NVNT	ANT6	802.11ax(HE20)	5200.00	3.75	9.94	13.69	21.00	Pass
NVNT	ANT6	802.11ax(HE20)	5240.00	4.08	9.94	14.02	21.00	Pass
NVNT	ANT6	802.11ax(HE40)	5190.00	3.08	9.94	13.02	21.00	Pass
NVNT	ANT6	802.11ax(HE40)	5230.00	3.21	9.94	13.15	21.00	Pass
NVNT	ANT6	802.11ax(HE80)	5210.00	3.14	9.94	13.08	21.00	Pass

NOTE: EIRP=Conducted Power(dBm)+Gain(dBi)

POWER SPECTRAL DENSITY

Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/MHz)	limit(dBm/MHz)	Result
NVNT	ANT1	802.11a	5180.00	-7.134	17	Pass
NVNT	ANT1	802.11a	5200.00	-8.060	17	Pass
NVNT	ANT1	802.11a	5240.00	-7.531	17	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	-8.264	17	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	-7.777	17	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	-7.719	17	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	-7.943	17	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	-7.760	17	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	-7.150	17	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	-11.021	17	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	-10.819	17	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	-10.626	17	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	-9.764	17	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	-13.375	17	Pass
NVNT	ANT1	802.11ax(HE20)	5180.00	-6.617	17	Pass
NVNT	ANT1	802.11ax(HE20)	5200.00	-6.005	17	Pass
NVNT	ANT1	802.11ax(HE20)	5240.00	-6.305	17	Pass
NVNT	ANT1	802.11ax(HE40)	5190.00	-9.702	17	Pass
NVNT	ANT1	802.11ax(HE40)	5230.00	-9.942	17	Pass
NVNT	ANT1	802.11ax(HE80)	5210.00	-12.023	17	Pass

Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/MHz)	limit(dBm/MHz)	Result
NVNT	ANT2	802.11a	5180.00	-8.348	17	Pass
NVNT	ANT2	802.11a	5200.00	-7.934	17	Pass
NVNT	ANT2	802.11a	5240.00	-7.575	17	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	-8.621	17	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	-8.249	17	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	-7.787	17	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	-8.641	17	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	-7.805	17	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	-7.762	17	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	-11.257	17	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	-10.911	17	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	-9.950	17	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	-9.720	17	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	-13.356	17	Pass
NVNT	ANT2	802.11ax(HE20)	5180.00	-6.516	17	Pass
NVNT	ANT2	802.11ax(HE20)	5200.00	-6.561	17	Pass
NVNT	ANT2	802.11ax(HE20)	5240.00	-6.101	17	Pass
NVNT	ANT2	802.11ax(HE40)	5190.00	-10.209	17	Pass
NVNT	ANT2	802.11ax(HE40)	5230.00	-10.292	17	Pass
NVNT	ANT2	802.11ax(HE80)	5210.00	-13.184	17	Pass

Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/MHz)	limit(dBm/MHz)	Result
NVNT	ANT3	802.11a	5180.00	-8.266	17	Pass
NVNT	ANT3	802.11a	5200.00	-7.761	17	Pass
NVNT	ANT3	802.11a	5240.00	-7.269	17	Pass
NVNT	ANT3	802.11n(HT20)	5180.00	-8.417	17	Pass
NVNT	ANT3	802.11n(HT20)	5200.00	-7.713	17	Pass
NVNT	ANT3	802.11n(HT20)	5240.00	-7.971	17	Pass
NVNT	ANT3	802.11ac(VHT20)	5180.00	-8.612	17	Pass
NVNT	ANT3	802.11ac(VHT20)	5200.00	-7.359	17	Pass
NVNT	ANT3	802.11ac(VHT20)	5240.00	-7.797	17	Pass
NVNT	ANT3	802.11n(HT40)	5190.00	-11.690	17	Pass
NVNT	ANT3	802.11n(HT40)	5230.00	-10.652	17	Pass
NVNT	ANT3	802.11ac(VHT40)	5190.00	-10.230	17	Pass
NVNT	ANT3	802.11ac(VHT40)	5230.00	-10.063	17	Pass
NVNT	ANT3	802.11ac(VHT80)	5210.00	-13.497	17	Pass
NVNT	ANT3	802.11ax(HE20)	5180.00	-6.077	17	Pass
NVNT	ANT3	802.11ax(HE20)	5200.00	-6.457	17	Pass
NVNT	ANT3	802.11ax(HE20)	5240.00	-6.324	17	Pass
NVNT	ANT3	802.11ax(HE40)	5190.00	-9.368	17	Pass
NVNT	ANT3	802.11ax(HE40)	5230.00	-8.909	17	Pass
NVNT	ANT3	802.11ax(HE80)	5210.00	-12.449	17	Pass

Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/MHz)	limit(dBm/MHz)	Result
NVNT	ANT4	802.11a	5180.00	-7.266	17	Pass
NVNT	ANT4	802.11a	5200.00	-7.576	17	Pass
NVNT	ANT4	802.11a	5240.00	-6.155	17	Pass
NVNT	ANT4	802.11n(HT20)	5180.00	-8.287	17	Pass
NVNT	ANT4	802.11n(HT20)	5200.00	-8.284	17	Pass
NVNT	ANT4	802.11n(HT20)	5240.00	-7.468	17	Pass
NVNT	ANT4	802.11ac(VHT20)	5180.00	-7.934	17	Pass
NVNT	ANT4	802.11ac(VHT20)	5200.00	-8.130	17	Pass
NVNT	ANT4	802.11ac(VHT20)	5240.00	-7.820	17	Pass
NVNT	ANT4	802.11n(HT40)	5190.00	-11.484	17	Pass
NVNT	ANT4	802.11n(HT40)	5230.00	-11.191	17	Pass
NVNT	ANT4	802.11ac(VHT40)	5190.00	-10.194	17	Pass
NVNT	ANT4	802.11ac(VHT40)	5230.00	-9.572	17	Pass
NVNT	ANT4	802.11ac(VHT80)	5210.00	-13.276	17	Pass
NVNT	ANT4	802.11ax(HE20)	5180.00	-7.193	17	Pass
NVNT	ANT4	802.11ax(HE20)	5200.00	-6.424	17	Pass
NVNT	ANT4	802.11ax(HE20)	5240.00	-6.567	17	Pass
NVNT	ANT4	802.11ax(HE40)	5190.00	-9.002	17	Pass
NVNT	ANT4	802.11ax(HE40)	5230.00	-9.898	17	Pass
NVNT	ANT4	802.11ax(HE80)	5210.00	-12.297	17	Pass

Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/MHz)	limit(dBm/MHz)	Result
NVNT	ANT5	802.11a	5180.00	-7.395	17	Pass
NVNT	ANT5	802.11a	5200.00	-7.254	17	Pass
NVNT	ANT5	802.11a	5240.00	-6.907	17	Pass
NVNT	ANT5	802.11n(HT20)	5180.00	-8.028	17	Pass
NVNT	ANT5	802.11n(HT20)	5200.00	-7.738	17	Pass
NVNT	ANT5	802.11n(HT20)	5240.00	-6.629	17	Pass
NVNT	ANT5	802.11ac(VHT20)	5180.00	-7.877	17	Pass
NVNT	ANT5	802.11ac(VHT20)	5200.00	-7.588	17	Pass
NVNT	ANT5	802.11ac(VHT20)	5240.00	-7.524	17	Pass
NVNT	ANT5	802.11n(HT40)	5190.00	-11.013	17	Pass
NVNT	ANT5	802.11n(HT40)	5230.00	-10.712	17	Pass
NVNT	ANT5	802.11ac(VHT40)	5190.00	-11.336	17	Pass
NVNT	ANT5	802.11ac(VHT40)	5230.00	-10.326	17	Pass
NVNT	ANT5	802.11ac(VHT80)	5210.00	-14.283	17	Pass
NVNT	ANT5	802.11ax(HE20)	5180.00	-6.125	17	Pass
NVNT	ANT5	802.11ax(HE20)	5200.00	-6.603	17	Pass
NVNT	ANT5	802.11ax(HE20)	5240.00	-6.025	17	Pass
NVNT	ANT5	802.11ax(HE40)	5190.00	-9.472	17	Pass
NVNT	ANT5	802.11ax(HE40)	5230.00	-9.846	17	Pass
NVNT	ANT5	802.11ax(HE80)	5210.00	-13.028	17	Pass


Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/MHz)	limit(dBm/MHz)	Result
NVNT	ANT6	802.11a	5180.00	-8.170	17	Pass
NVNT	ANT6	802.11a	5200.00	-7.638	17	Pass
NVNT	ANT6	802.11a	5240.00	-6.541	17	Pass
NVNT	ANT6	802.11n(HT20)	5180.00	-8.323	17	Pass
NVNT	ANT6	802.11n(HT20)	5200.00	-6.805	17	Pass
NVNT	ANT6	802.11n(HT20)	5240.00	-7.720	17	Pass
NVNT	ANT6	802.11ac(VHT20)	5180.00	-7.748	17	Pass
NVNT	ANT6	802.11ac(VHT20)	5200.00	-7.412	17	Pass
NVNT	ANT6	802.11ac(VHT20)	5240.00	-6.857	17	Pass
NVNT	ANT6	802.11n(HT40)	5190.00	-11.079	17	Pass
NVNT	ANT6	802.11n(HT40)	5230.00	-10.813	17	Pass
NVNT	ANT6	802.11ac(VHT40)	5190.00	-11.116	17	Pass
NVNT	ANT6	802.11ac(VHT40)	5230.00	-10.339	17	Pass
NVNT	ANT6	802.11ac(VHT80)	5210.00	-13.458	17	Pass
NVNT	ANT6	802.11ax(HE20)	5180.00	-6.028	17	Pass
NVNT	ANT6	802.11ax(HE20)	5200.00	-6.385	17	Pass
NVNT	ANT6	802.11ax(HE20)	5240.00	-5.640	17	Pass
NVNT	ANT6	802.11ax(HE40)	5190.00	-10.427	17	Pass
NVNT	ANT6	802.11ax(HE40)	5230.00	-10.232	17	Pass
NVNT	ANT6	802.11ax(HE80)	5210.00	-12.641	17	Pass

Condition	Antenna	Modulation	Frequency (MHz)	MIMO PSD(dBm/MHz)	MIMO PSD limit(dBm/ MHz)	Result
NVNT	MIMO	802.11n(HT20)	5180.00	-0.54	4.76	Pass
NVNT	MIMO	802.11n(HT20)	5200.00	0.05	4.76	Pass
NVNT	MIMO	802.11n(HT20)	5240.00	0.26	4.76	Pass
NVNT	MIMO	802.11ac(VHT20)	5180.00	-0.33	4.76	Pass
NVNT	MIMO	802.11ac(VHT20)	5200.00	0.11	4.76	Pass
NVNT	MIMO	802.11ac(VHT20)	5240.00	0.31	4.76	Pass
NVNT	MIMO	802.11n(HT40)	5190.00	-3.47	4.76	Pass
NVNT	MIMO	802.11n(HT40)	5230.00	-3.06	4.76	Pass
NVNT	MIMO	802.11ac(VHT40)	5190.00	-2.76	4.76	Pass
NVNT	MIMO	802.11ac(VHT40)	5230.00	-2.17	4.76	Pass
NVNT	MIMO	802.11ac(VHT80)	5210.00	-5.75	4.76	Pass
NVNT	MIMO	802.11ax(HE20)	5180.00	1.37	4.76	Pass
NVNT	MIMO	802.11ax(HE20)	5200.00	1.38	4.76	Pass
NVNT	MIMO	802.11ax(HE20)	5240.00	1.63	4.76	Pass
NVNT	MIMO	802.11ax(HE40)	5190.00	-1.89	4.76	Pass
NVNT	MIMO	802.11ax(HE40)	5230.00	-2.05	4.76	Pass
NVNT	MIMO	802.11ax(HE80)	5210.00	-4.80	4.76	Pass

MIMO PSD limit=17-(18.24-6)=17-12.24=4.76(dBm)

ANT1


Power Spectral Density 5_2GWiFi_802_11a_5180_20M

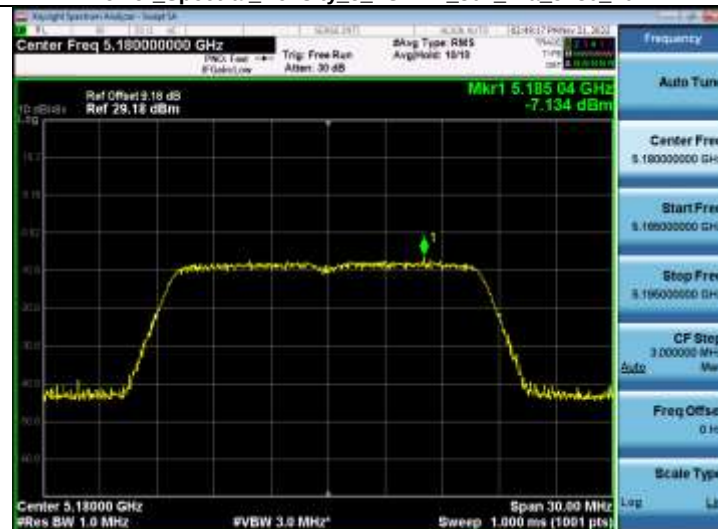

Power Spectral Density 5_2GWiFi_802_11a_5200_20M




Power Spectral Density 5_2GWiFi_802_11a_5240_20M

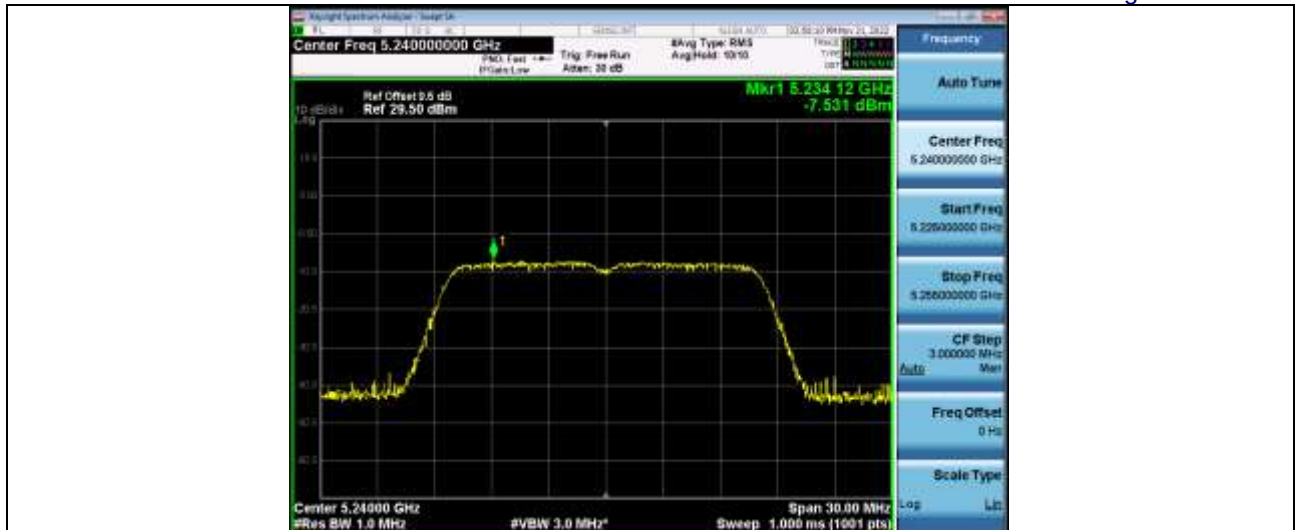



Power Spectral Density 5_2GWi-Fi_802_11ac(VHT20)_5240_20M

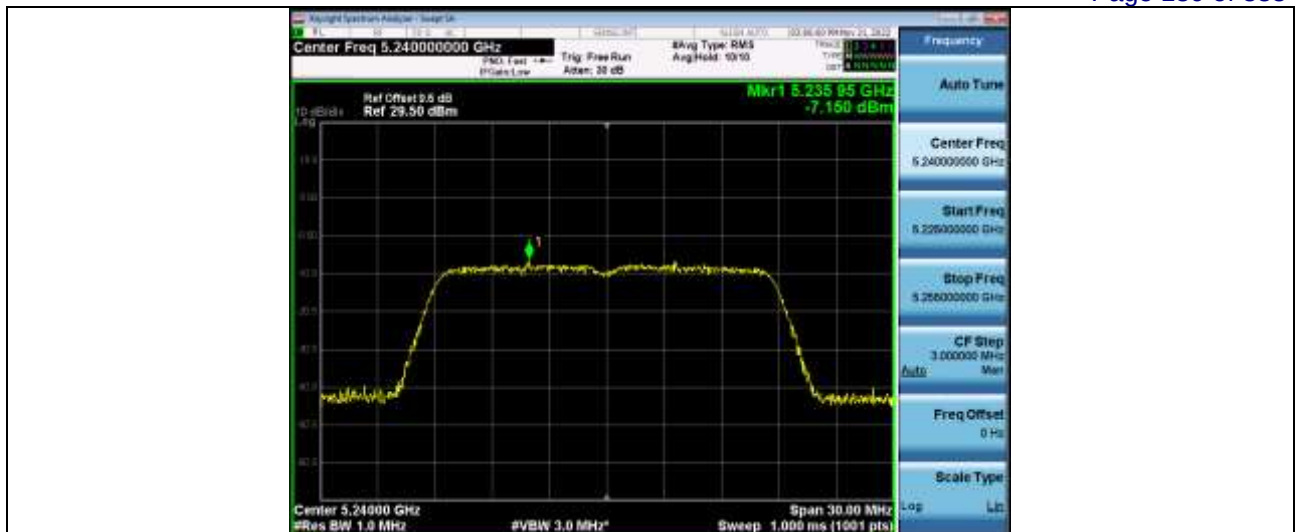


Power_Spectral_Density_5_2GWiFi_802_11n(HT40)_5190_40M



Power_Spectral_Density_5_2GWiFi_802_11n(HT40)_5230_40M



Power_Spectral_Density_5_2GWiFi_802_11ac(VHT40)_5190_40M

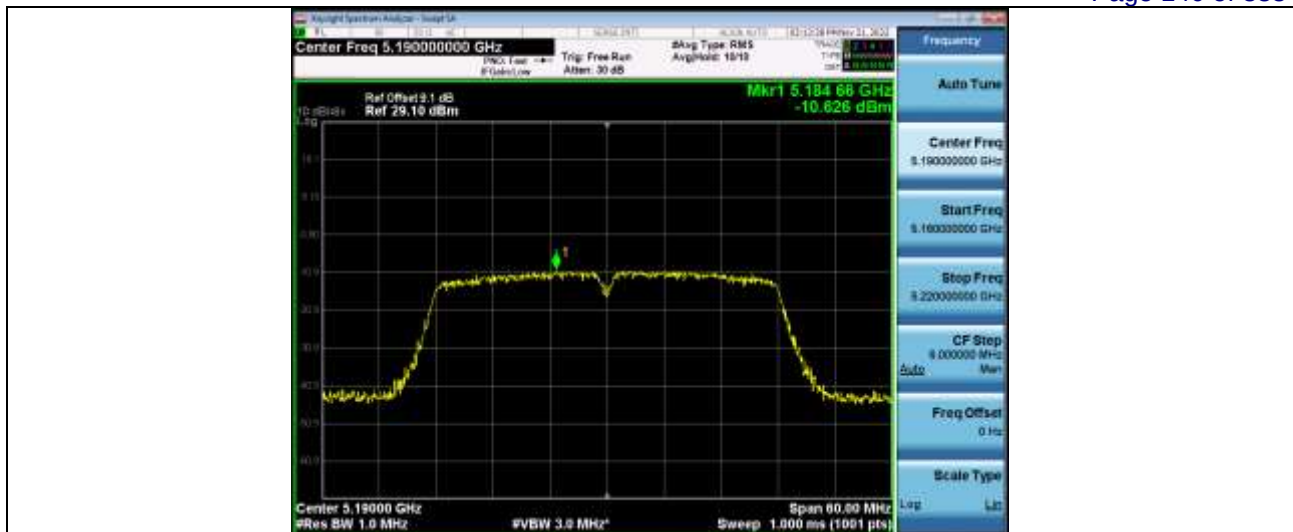


Power_Spectral_Density_5_2GWi-Fi_802_11ac(VHT40)_5230_40M




Power_Spectral_Density_5_2GWi-Fi_802_11ac(VHT80)_5210_80M



Power_Spectral_Density_5_2GWi-Fi_802_11ax(HE20)_5180_20M

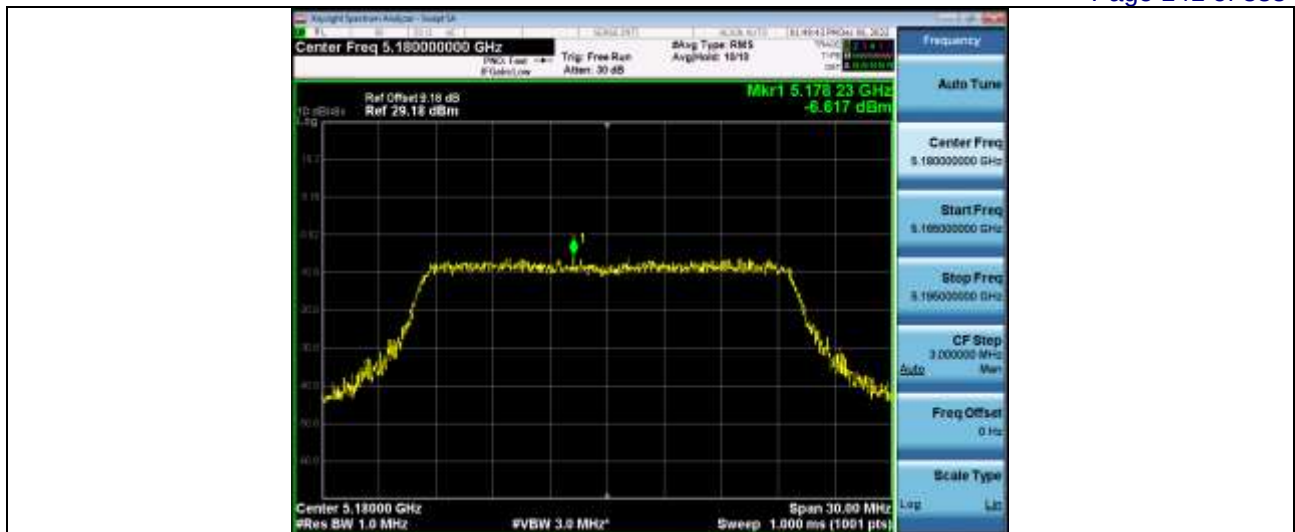


Power Spectral Density_5_2GWiFi_802_11ax(HE20)_5200_20M

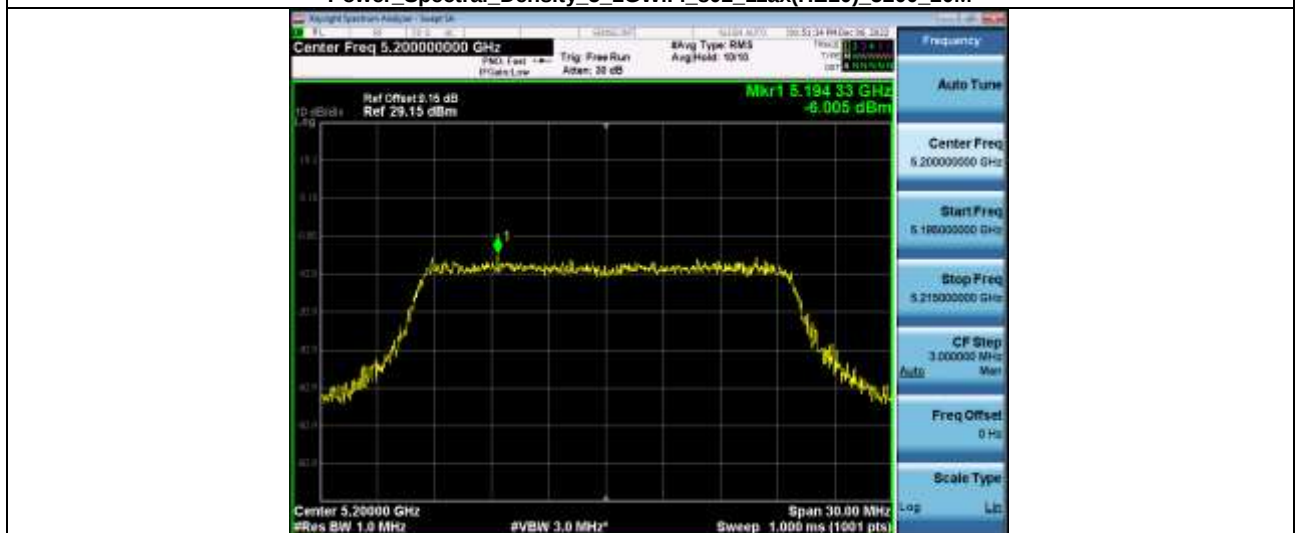

Power Spectral Density_5_2GWiFi_802_11ax(HE20)_5240_20M



Power Spectral Density_5_2GWiFi_802_11ax(HE40)_5190_40M

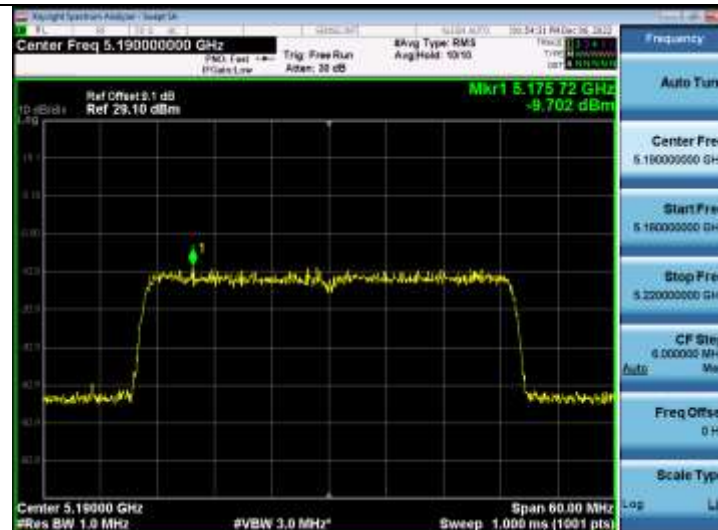

Power Spectral Density 5_2GWiFi_802_11ax(HE40)_5230_40M



Power Spectral Density 5_2GWiFi_802_11ax(HE80)_5210_80M



ANT2

Power Spectral Density 5_2GWiFi_802_11a_5180_20M





Power Spectral Density 5_2GWiFi_802_11a_5200_20M




Power Spectral Density 5_2GWiFi_802_11a_5240_20M



Power Spectral Density 5_2GWiFi_802_11n(HT20)_5180_20M

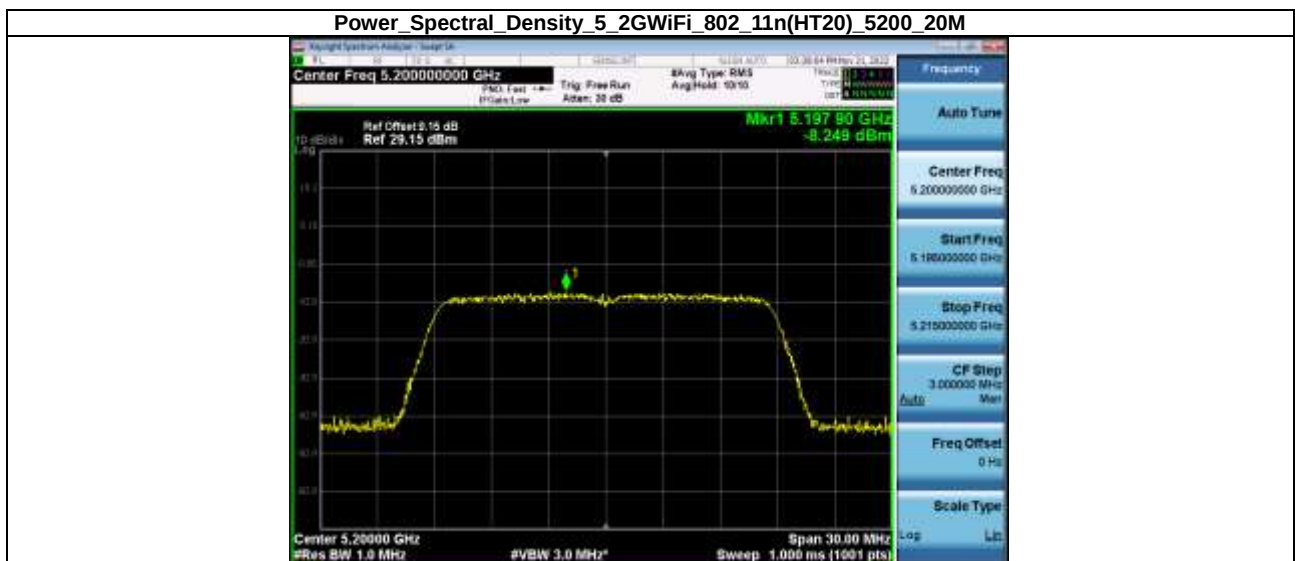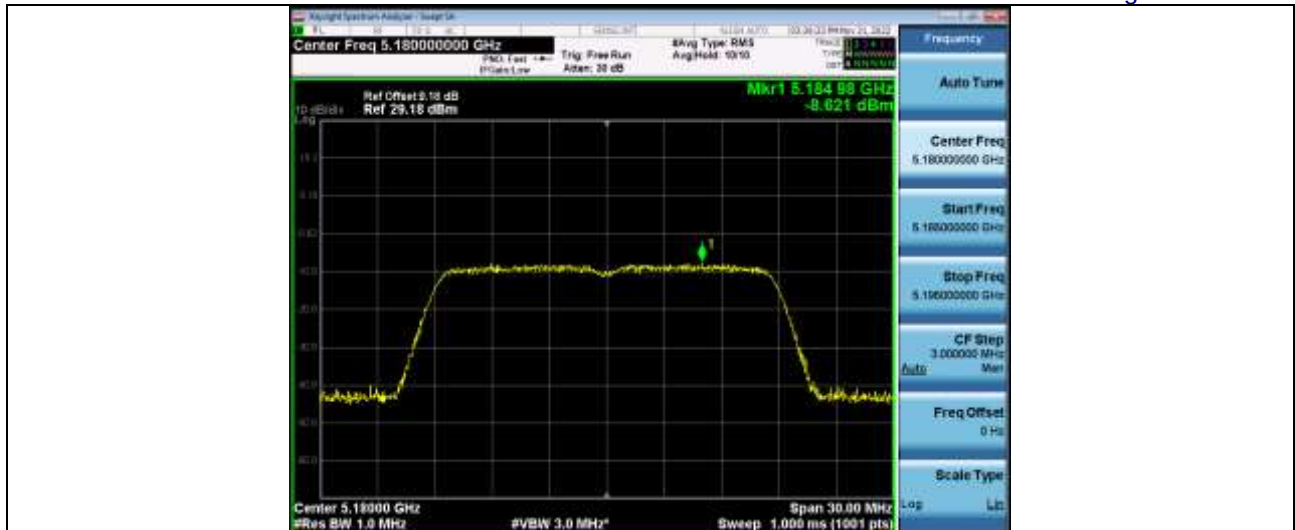

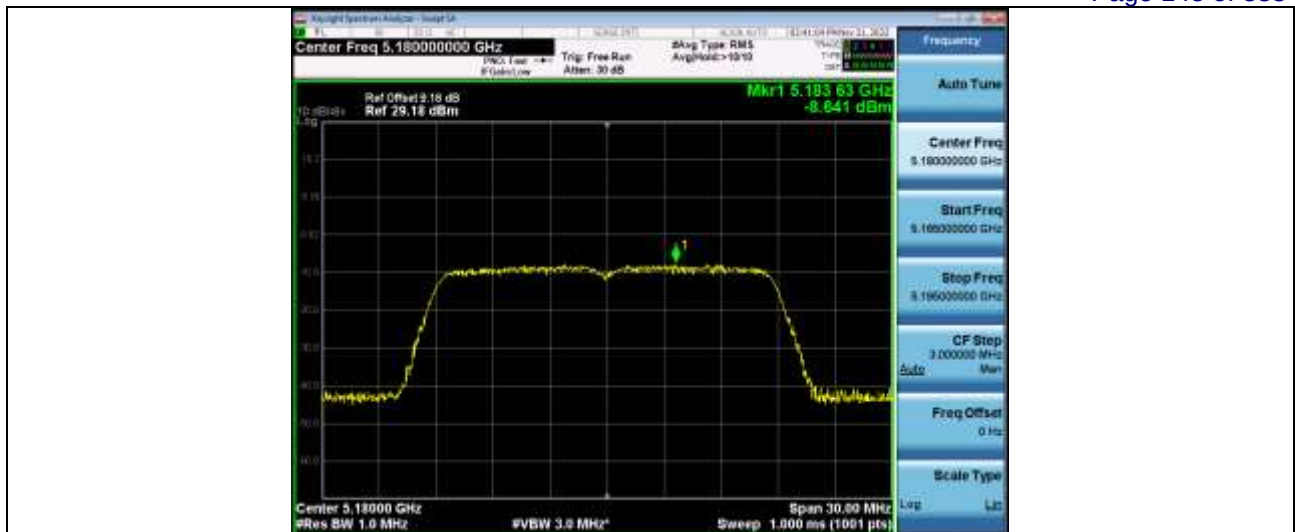



Power_Spectral_Density_5_2GWiFi_802_11ac(VHT20)_5200_20M




Power_Spectral_Density_5_2GWiFi_802_11ac(VHT20)_5240_20M



Power_Spectral_Density_5_2GWiFi_802_11n(HT40)_5190_40M

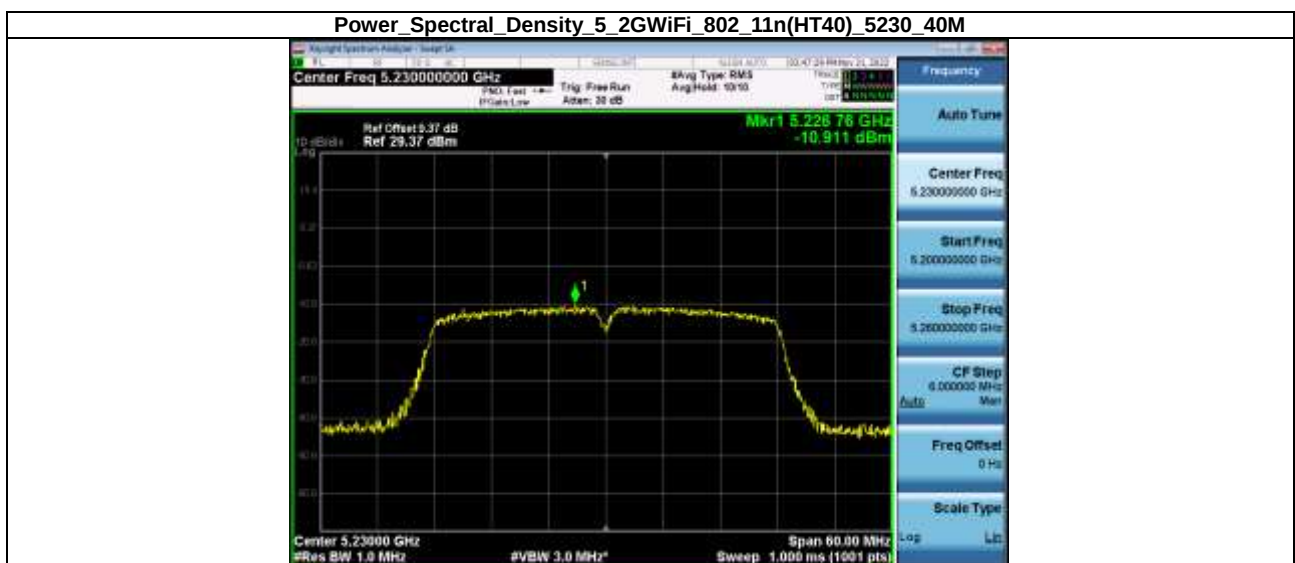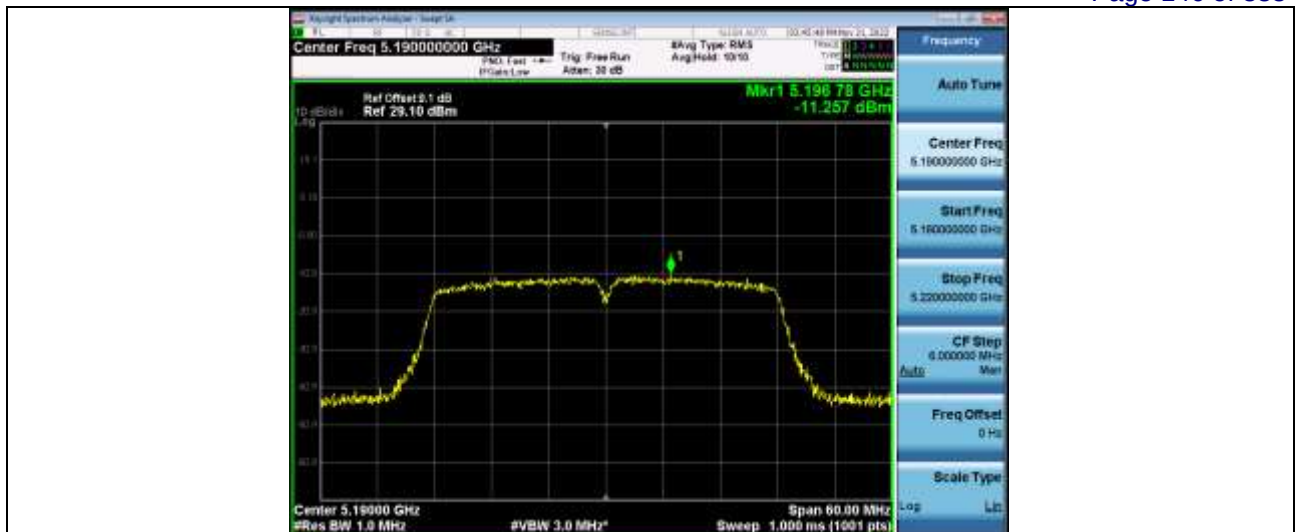

Power Spectral Density 5_2WiFi 802_11ac(VHT40) 5230_40M

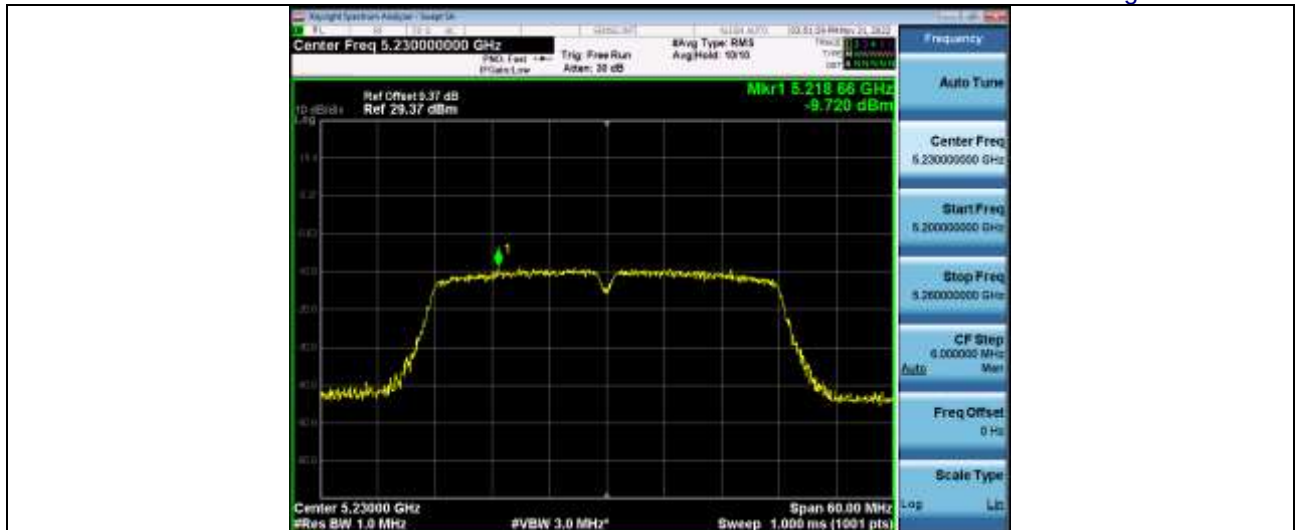


Power Spectral Density 5 GHz WiFi 802.11ac(VHT80) 5210_80M




Power Spectral Density 5 GHz WiFi 802.11ac(HE20) 5180_20M



Power Spectral Density 5 GHz WiFi 802.11ac(HE20) 5200_20M

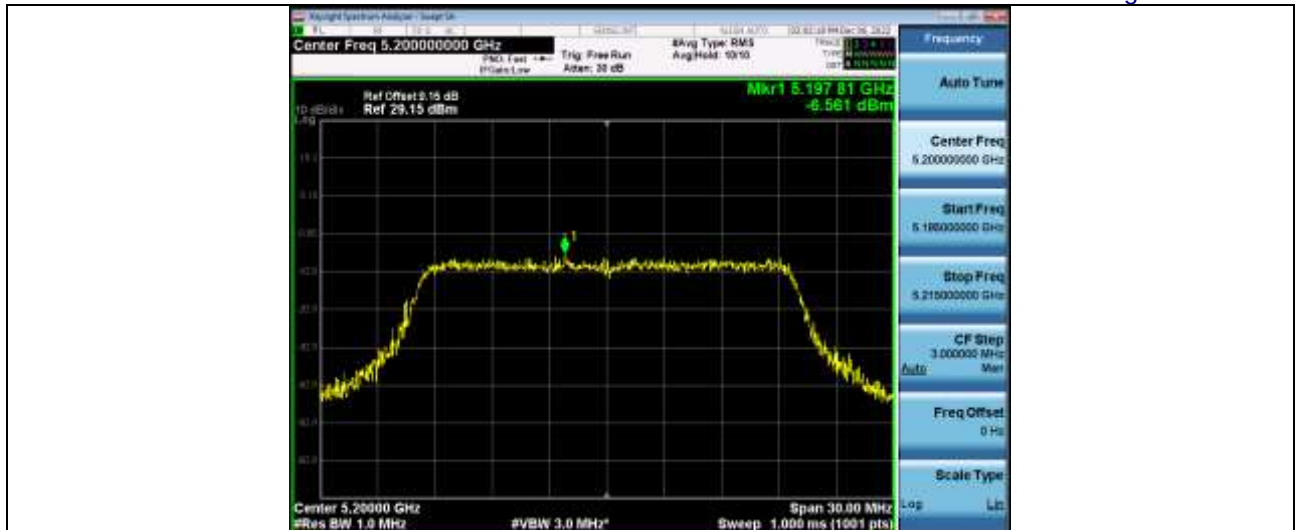

Power_Spectral_Density_5_2GWiFi_802_11ax(HE20)_5240_20M

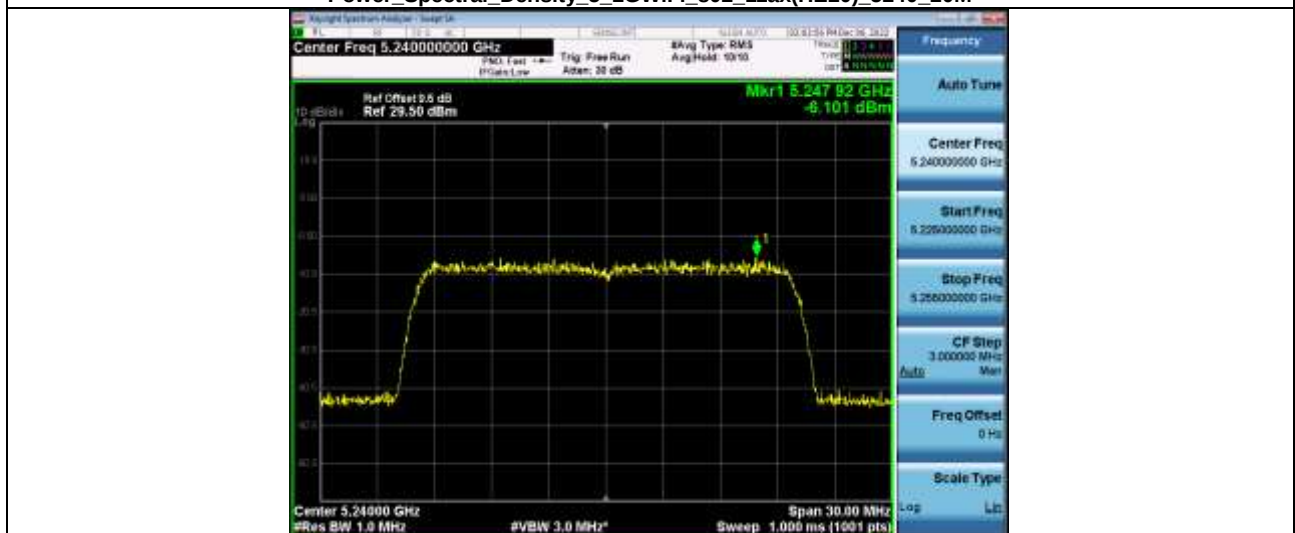

Power_Spectral_Density_5_2GWiFi_802_11ax(HE40)_5190_40M



Power_Spectral_Density_5_2GWiFi_802_11ax(HE40)_5230_40M



Power_Spectral_Density_5_2WiFi_802_11ax(HE80)_5210_80M




ANT3


Power_Spectral_Density_5_2WiFi_802_11a_5180_20M




Power_Spectral_Density_5_2WiFi_802_11a_5200_20M

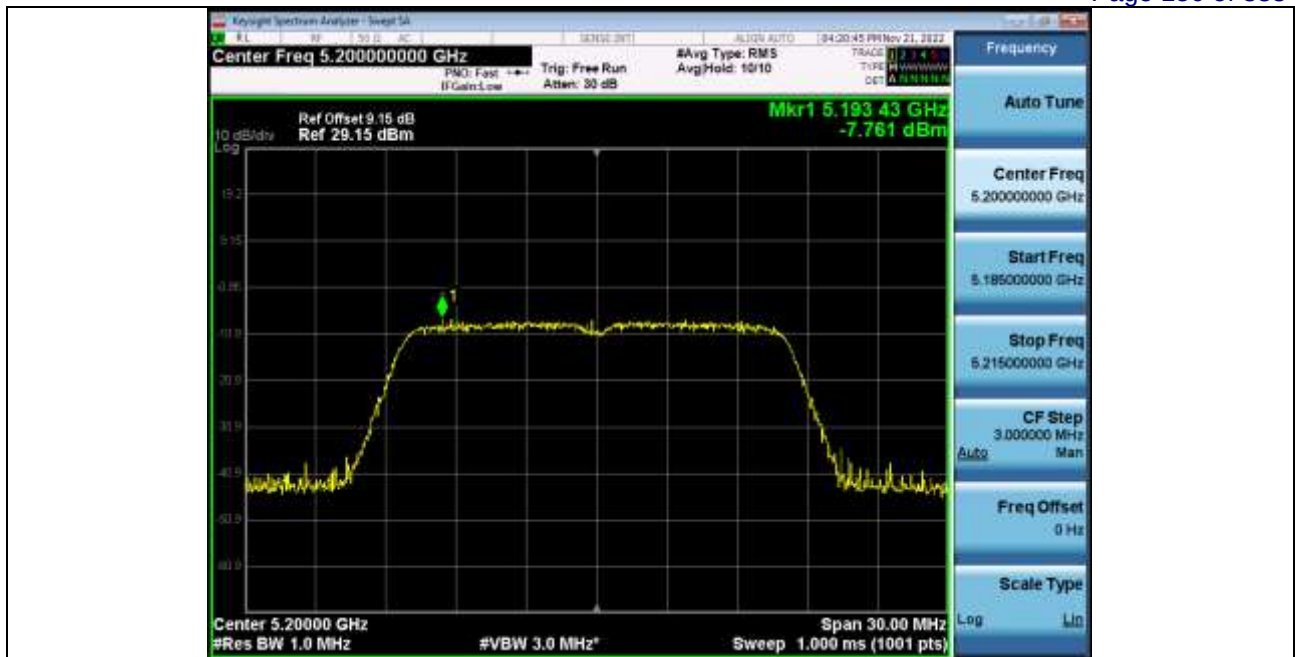

Power Spectral Density 5_2GWiFi_802_11a_5240_20M

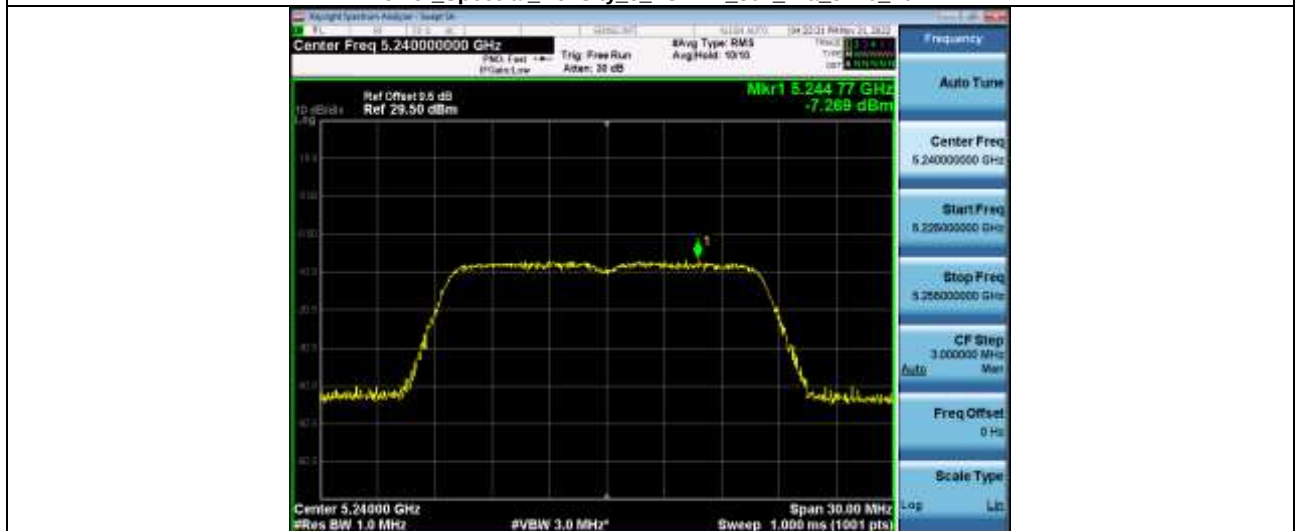

Power Spectral Density 5_2GWiFi_802_11n(HT20)_5180_20M

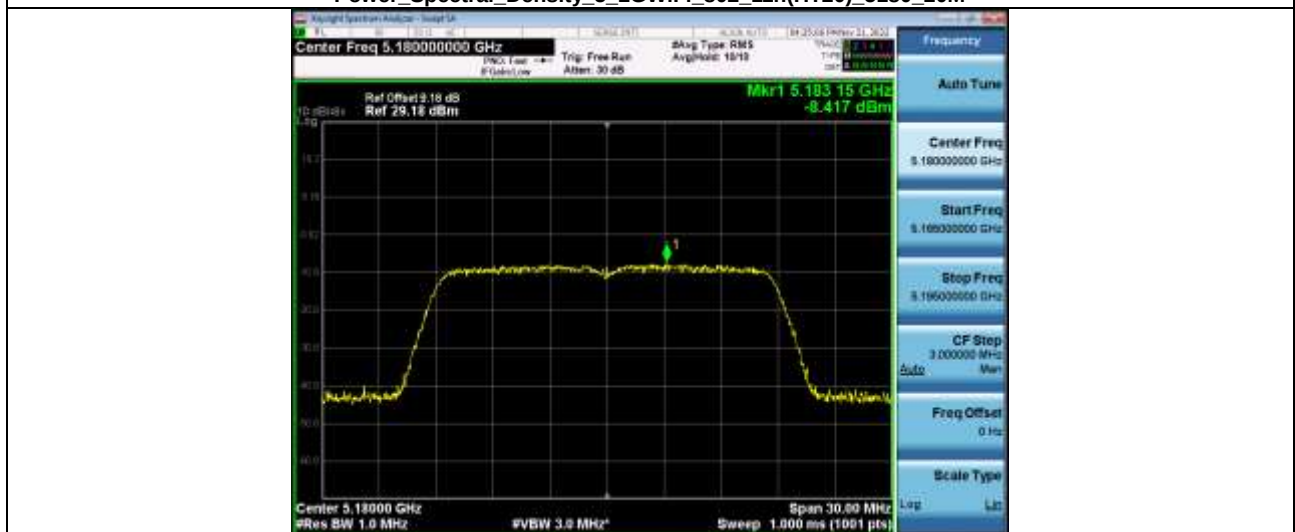

Power Spectral Density 5_2GWiFi_802_11n(HT20)_5200_20M