



Test Graphs

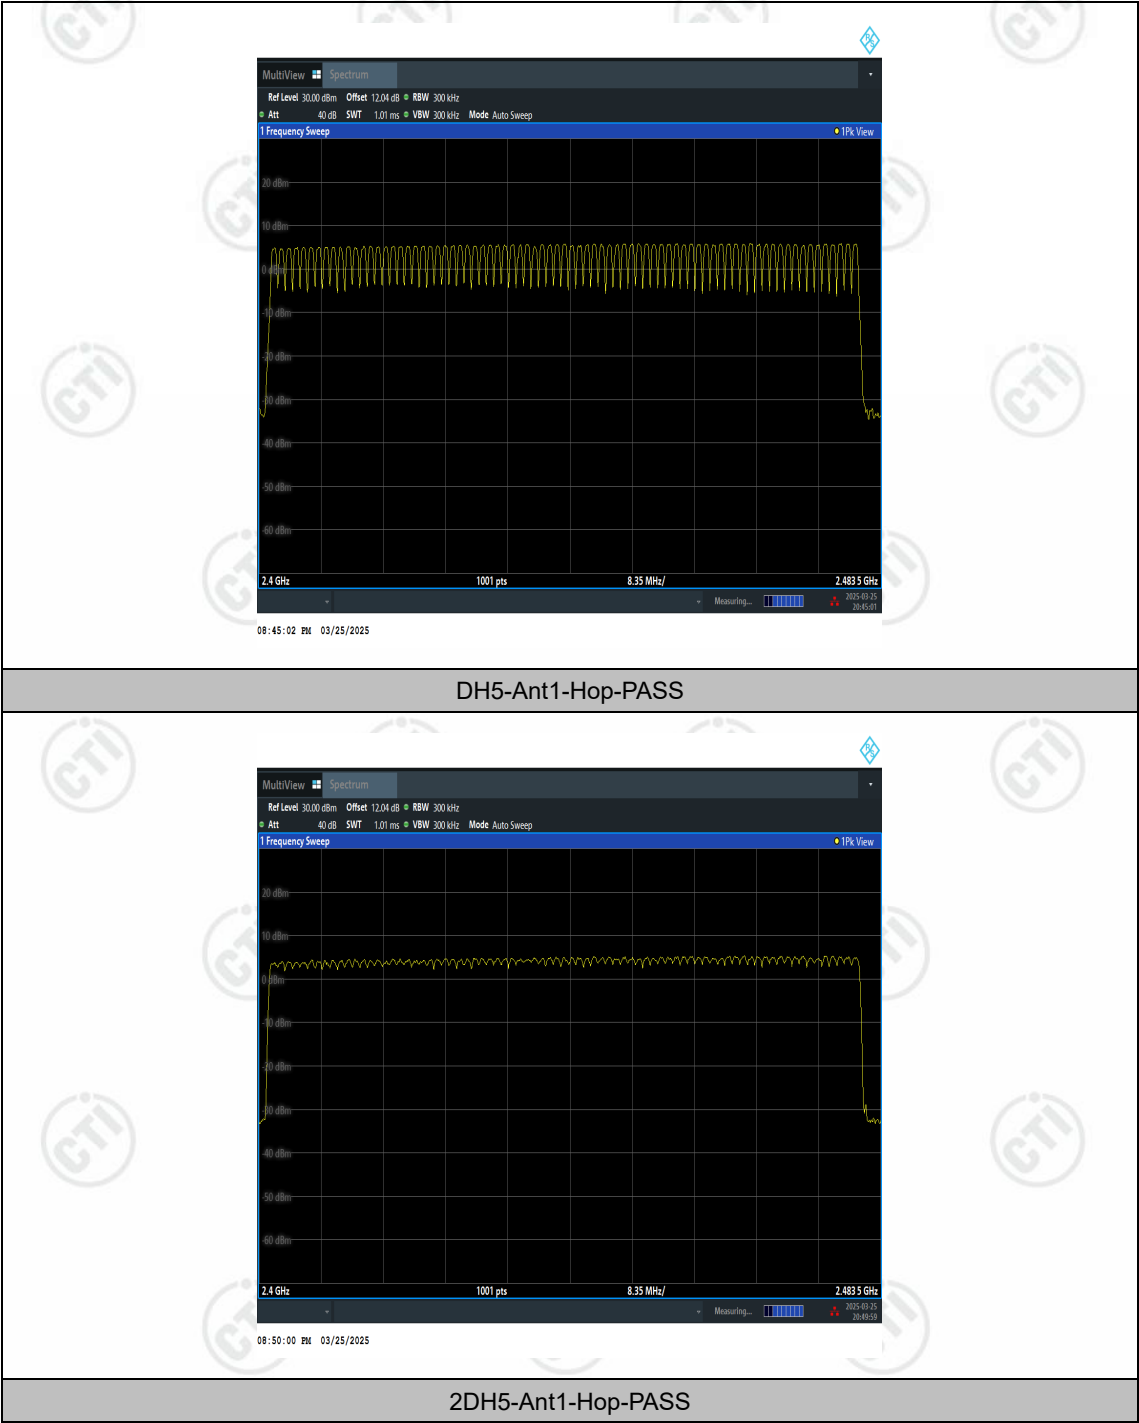

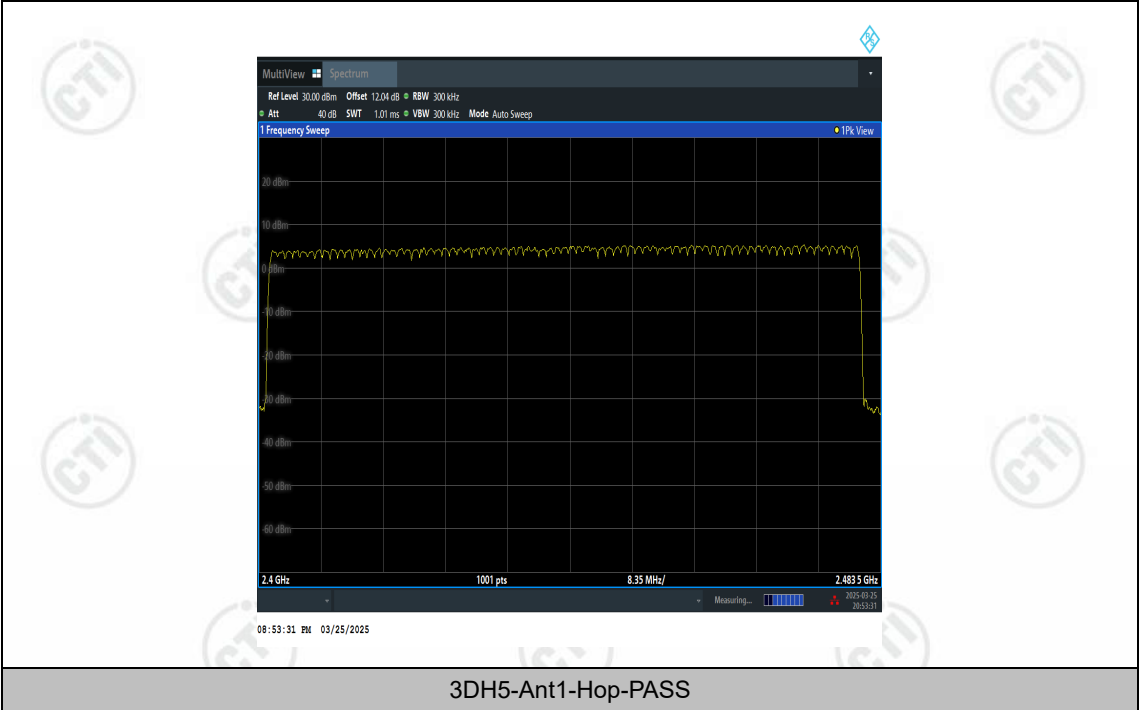

Appendix G: Band edge measurements

Test Result


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	4.01	-39.29	≤-15.99	PASS
DH5	Ant1	High	2480	5.14	-40.68	≤-14.86	PASS
DH5	Ant1	Low	Hop_2402	3.84	-40.93	≤-16.16	PASS
DH5	Ant1	High	Hop_2480	5.45	-40.05	≤-14.55	PASS
2DH5	Ant1	Low	2402	3.21	-39.87	≤-16.79	PASS
2DH5	Ant1	High	2480	4.42	-40	≤-15.58	PASS
2DH5	Ant1	Low	Hop_2402	3.28	-40.26	≤-16.72	PASS
2DH5	Ant1	High	Hop_2480	4.40	-40.61	≤-15.6	PASS
3DH5	Ant1	Low	2402	3.32	-40.73	≤-16.68	PASS
3DH5	Ant1	High	2480	4.41	-40.3	≤-15.59	PASS
3DH5	Ant1	Low	Hop_2402	3.43	-39.98	≤-16.57	PASS
3DH5	Ant1	High	Hop_2480	4.63	-39.26	≤-15.37	PASS

Test Graphs








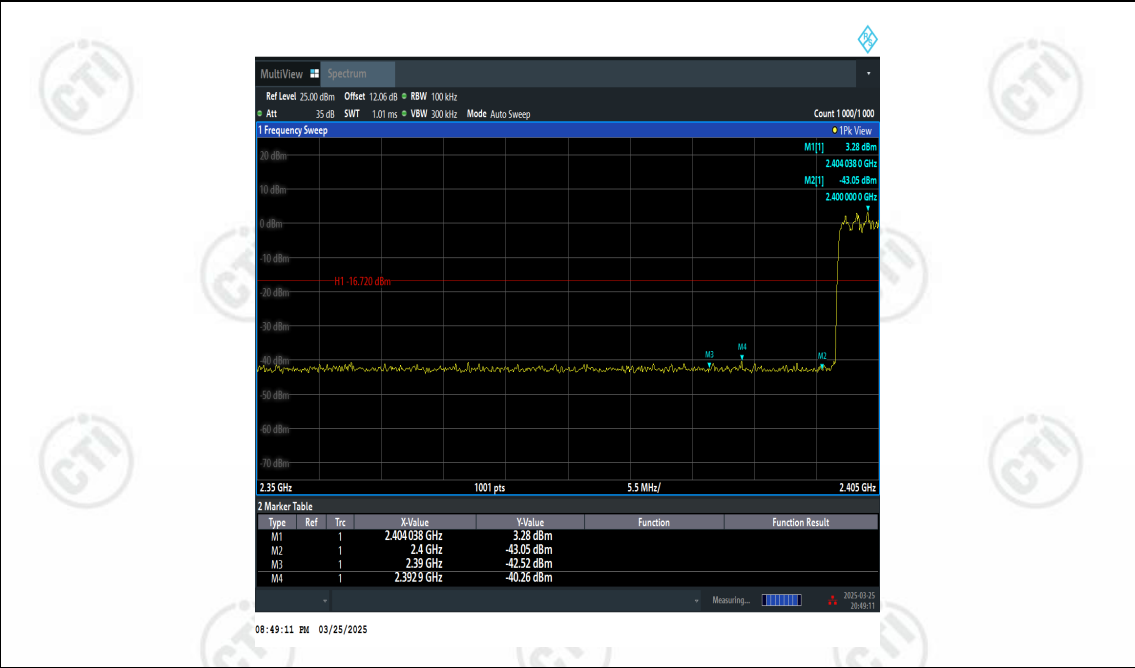

2DH5-Ant1-Hop_2402-PASS

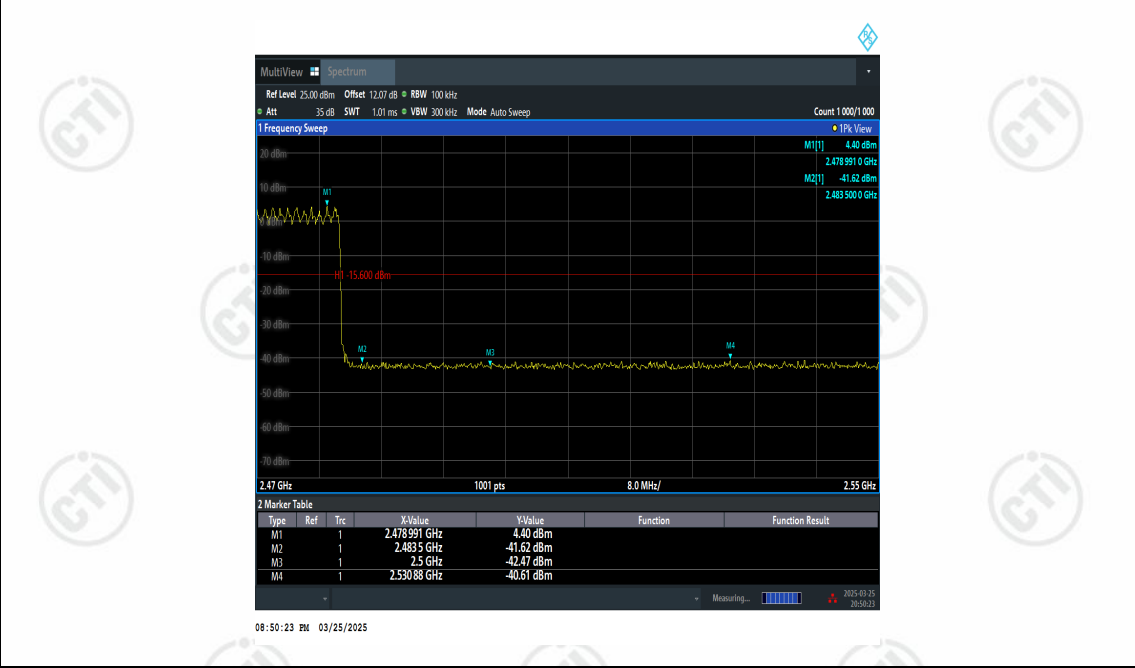

2DH5-Ant1-Hop_2480-PASS







Appendix H: Conducted Spurious Emission


Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	4.13	4.13	---	PASS
DH5	Ant1	2402	30~1000	4.13	-32.99	≤-15.87	PASS
DH5	Ant1	2402	1000~26500	4.13	-34.74	≤-15.87	PASS
DH5	Ant1	2441	0~Reference	5.12	5.12	---	PASS
DH5	Ant1	2441	30~1000	5.12	-35.15	≤-14.88	PASS
DH5	Ant1	2441	1000~26500	5.12	-35.07	≤-14.88	PASS
DH5	Ant1	2480	0~Reference	5.17	5.17	---	PASS
DH5	Ant1	2480	30~1000	5.17	-34.57	≤-14.83	PASS
DH5	Ant1	2480	1000~26500	5.17	-34.08	≤-14.83	PASS
2DH5	Ant1	2402	0~Reference	3.38	3.38	---	PASS
2DH5	Ant1	2402	30~1000	3.38	-35.12	≤-16.62	PASS
2DH5	Ant1	2402	1000~26500	3.38	-34.7	≤-16.62	PASS
2DH5	Ant1	2441	0~Reference	4.29	4.29	---	PASS
2DH5	Ant1	2441	30~1000	4.29	-34.36	≤-15.71	PASS
2DH5	Ant1	2441	1000~26500	4.29	-34.32	≤-15.71	PASS
2DH5	Ant1	2480	0~Reference	4.43	4.43	---	PASS
2DH5	Ant1	2480	30~1000	4.43	-34.45	≤-15.57	PASS
2DH5	Ant1	2480	1000~26500	4.43	-34.76	≤-15.57	PASS
3DH5	Ant1	2402	0~Reference	3.39	3.39	---	PASS
3DH5	Ant1	2402	30~1000	3.39	-35.15	≤-16.61	PASS
3DH5	Ant1	2402	1000~26500	3.39	-34.32	≤-16.61	PASS
3DH5	Ant1	2441	0~Reference	4.36	4.36	---	PASS
3DH5	Ant1	2441	30~1000	4.36	-34.62	≤-15.64	PASS
3DH5	Ant1	2441	1000~26500	4.36	-35.1	≤-15.64	PASS
3DH5	Ant1	2480	0~Reference	4.59	4.59	---	PASS
3DH5	Ant1	2480	30~1000	4.59	-34.24	≤-15.41	PASS
3DH5	Ant1	2480	1000~26500	4.59	-35.24	≤-15.41	PASS


Test Graphs

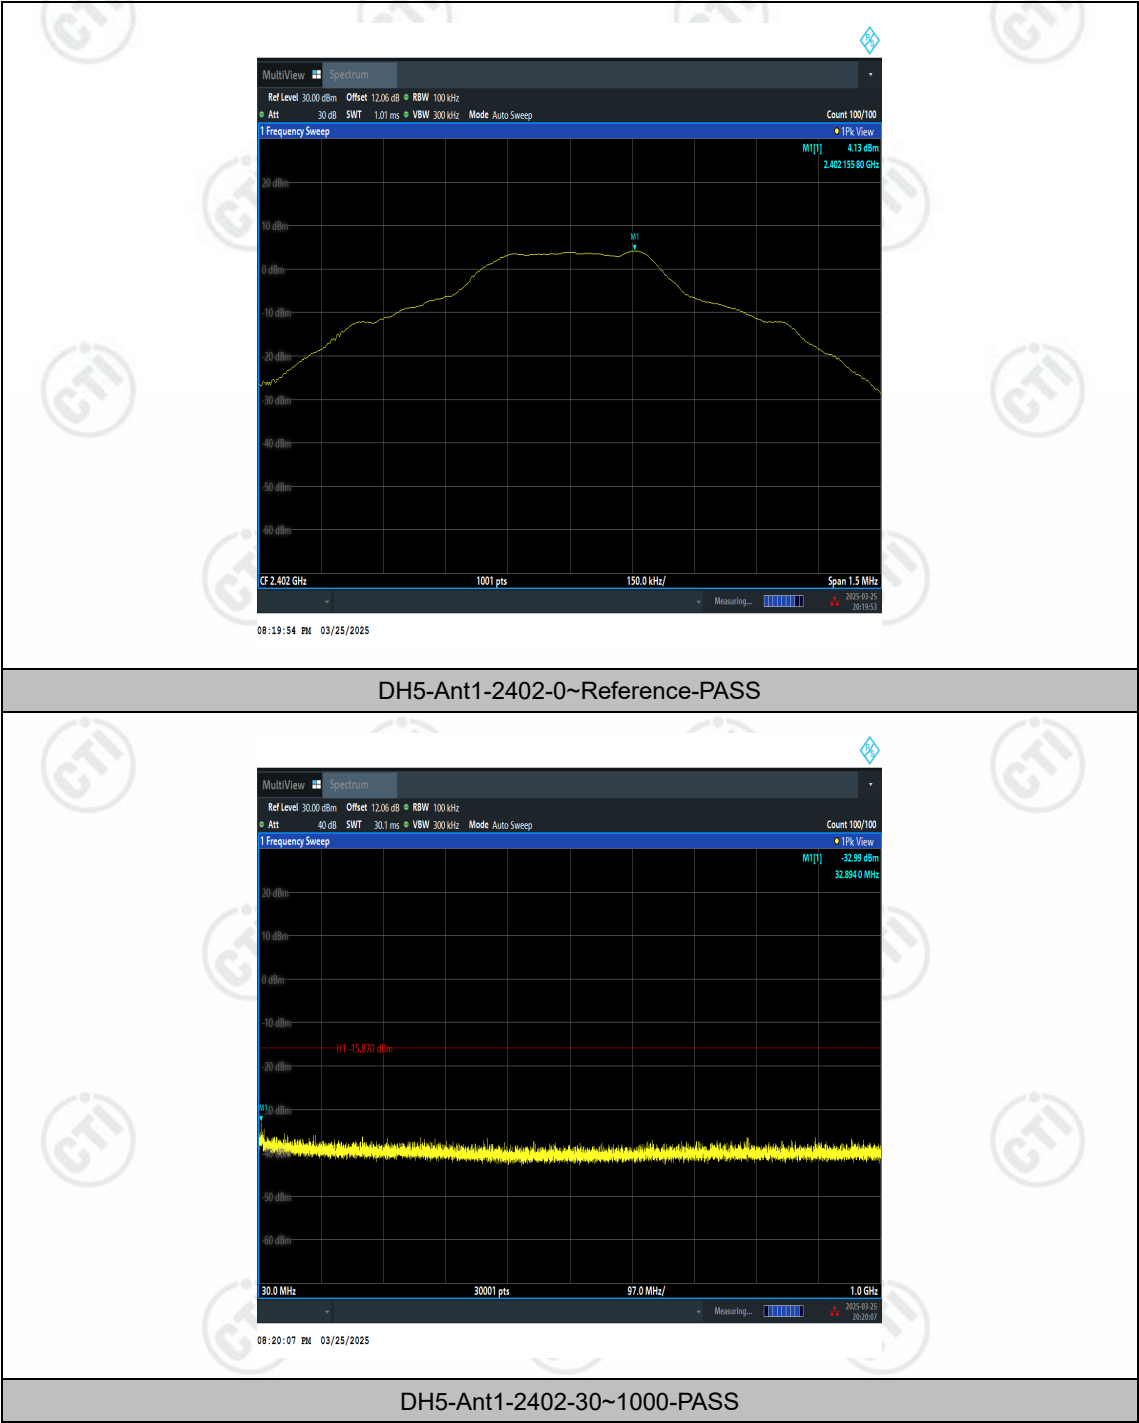

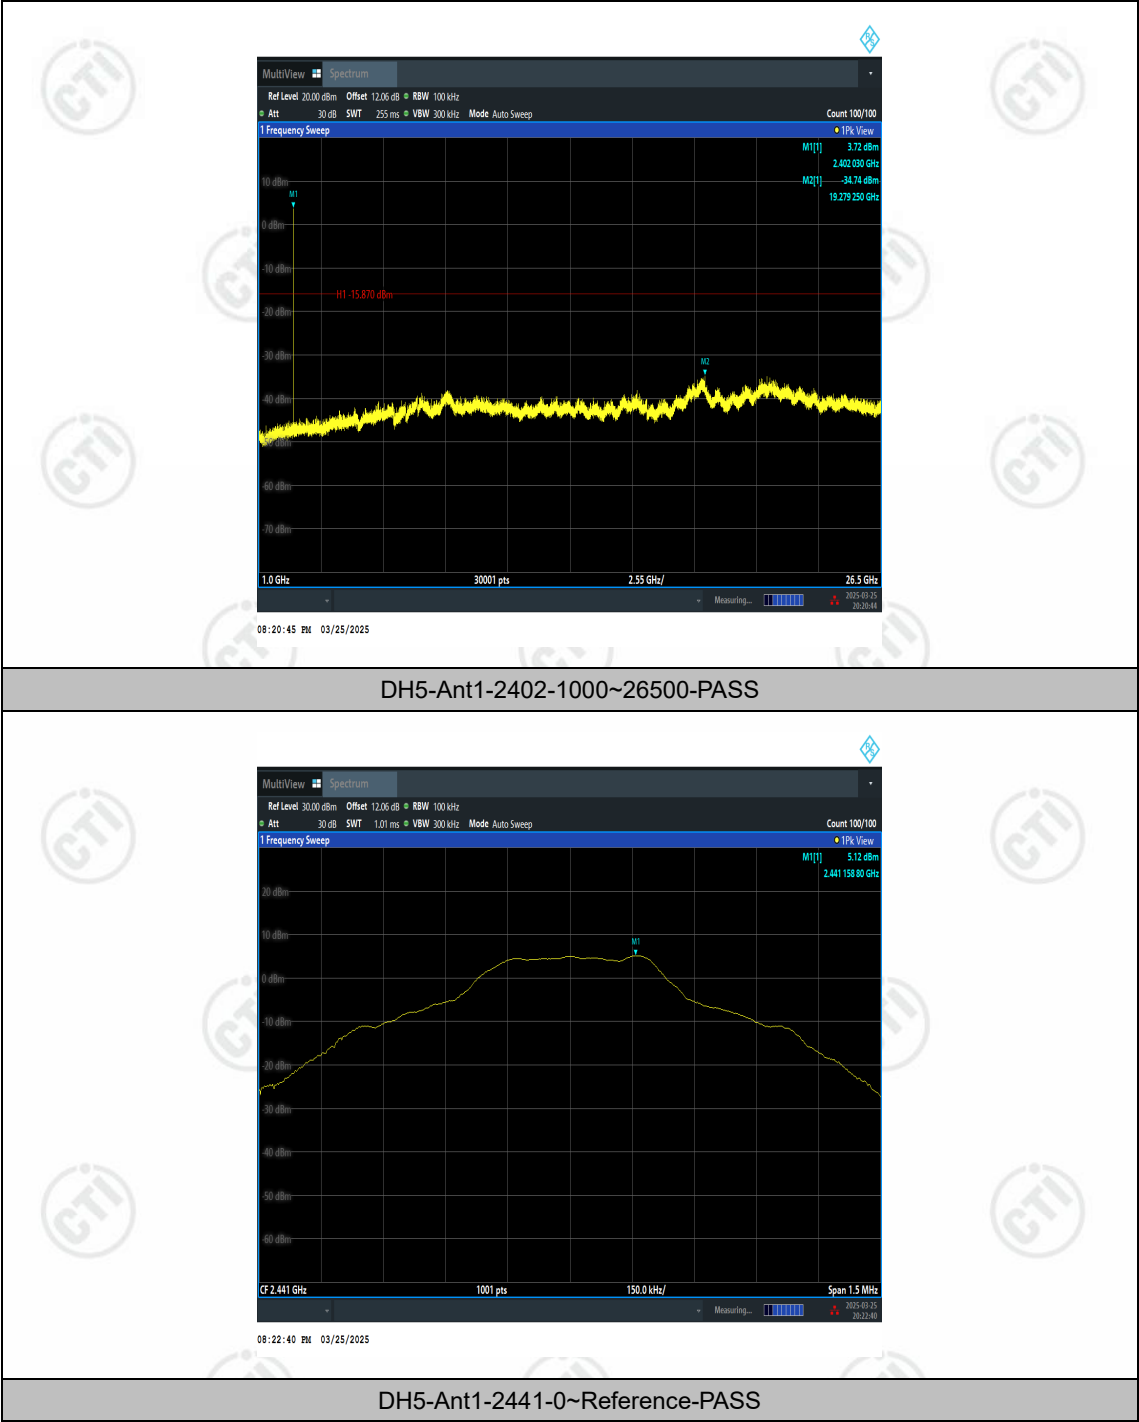


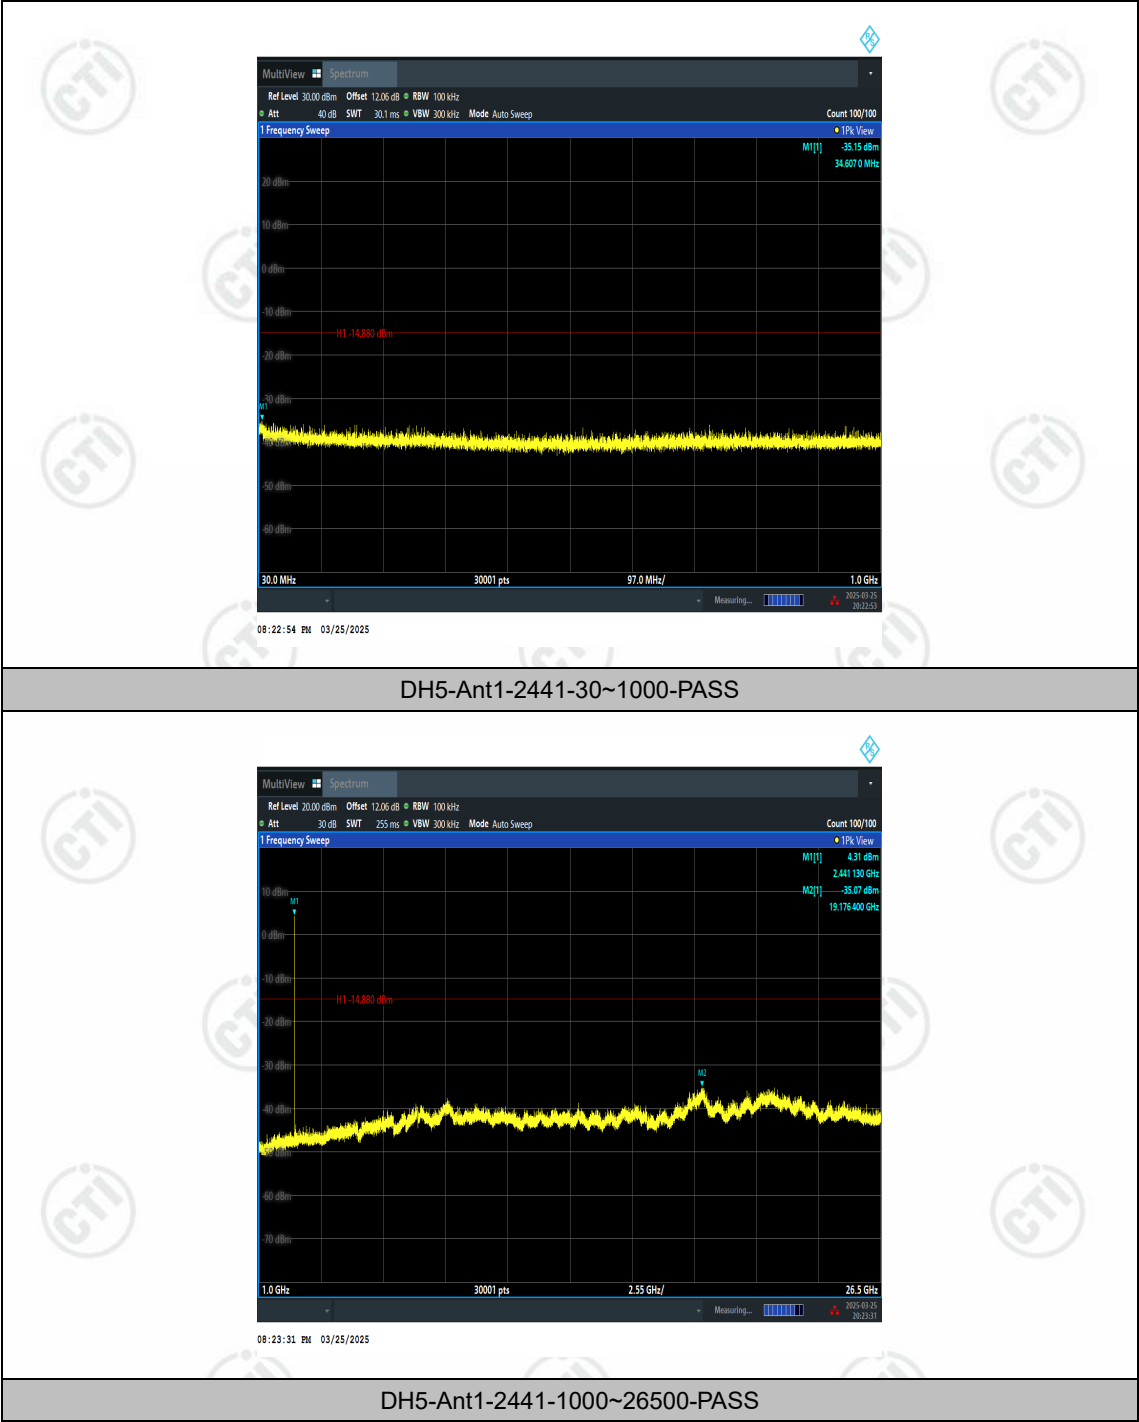

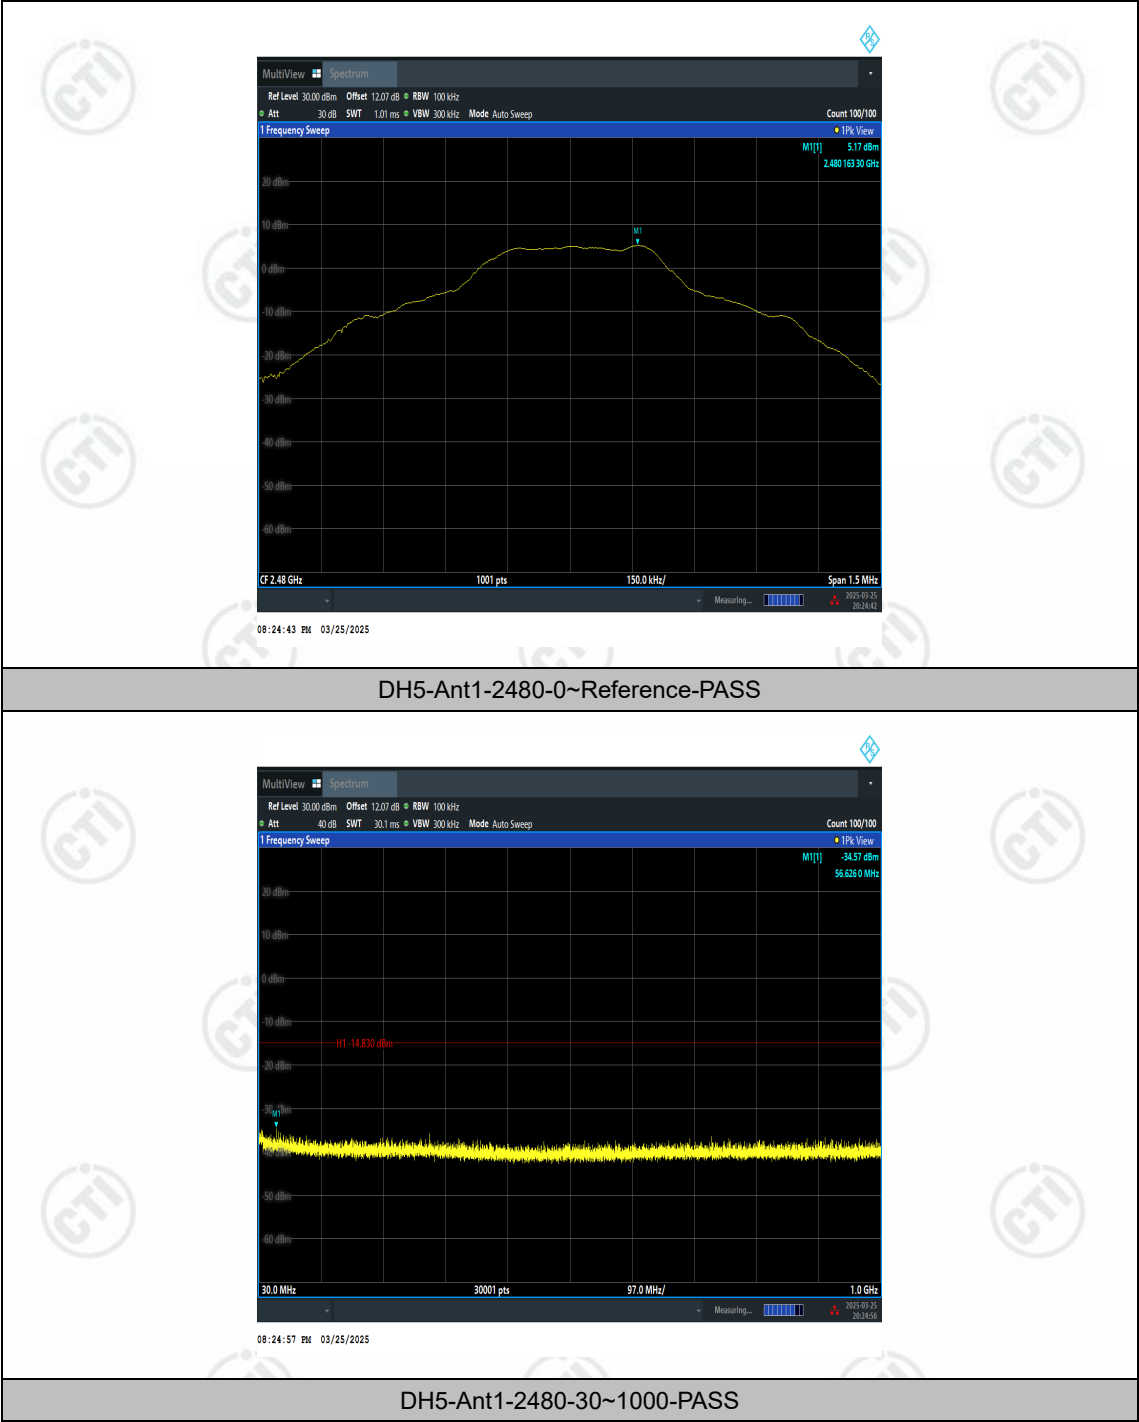


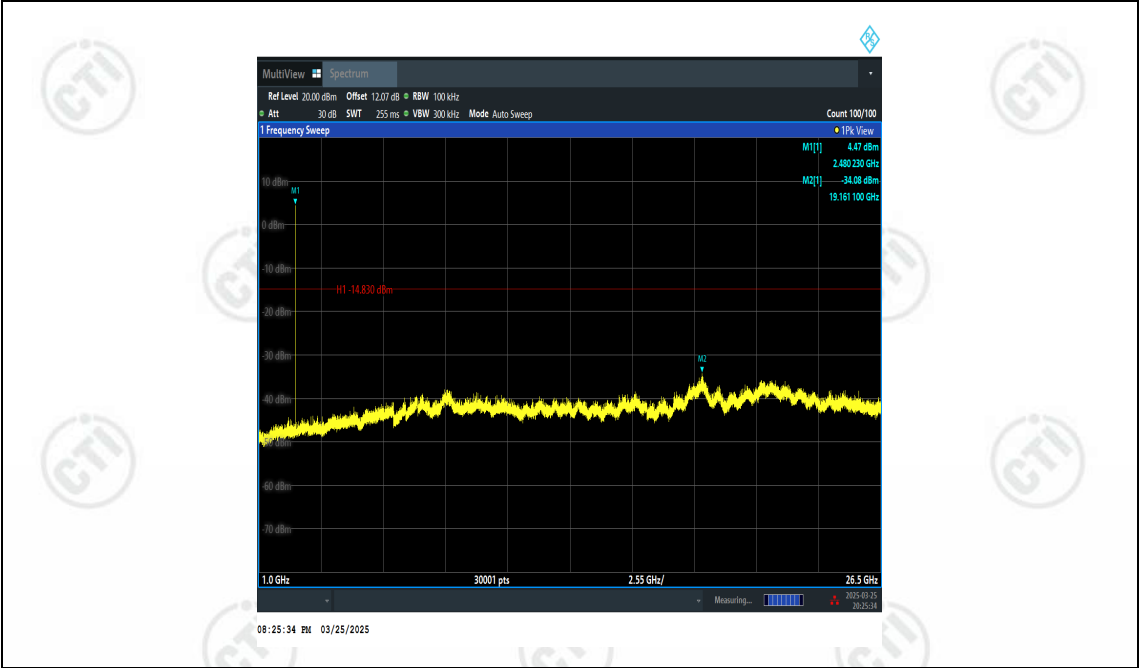



DH5-Ant1-2480-1000~26500-PASS

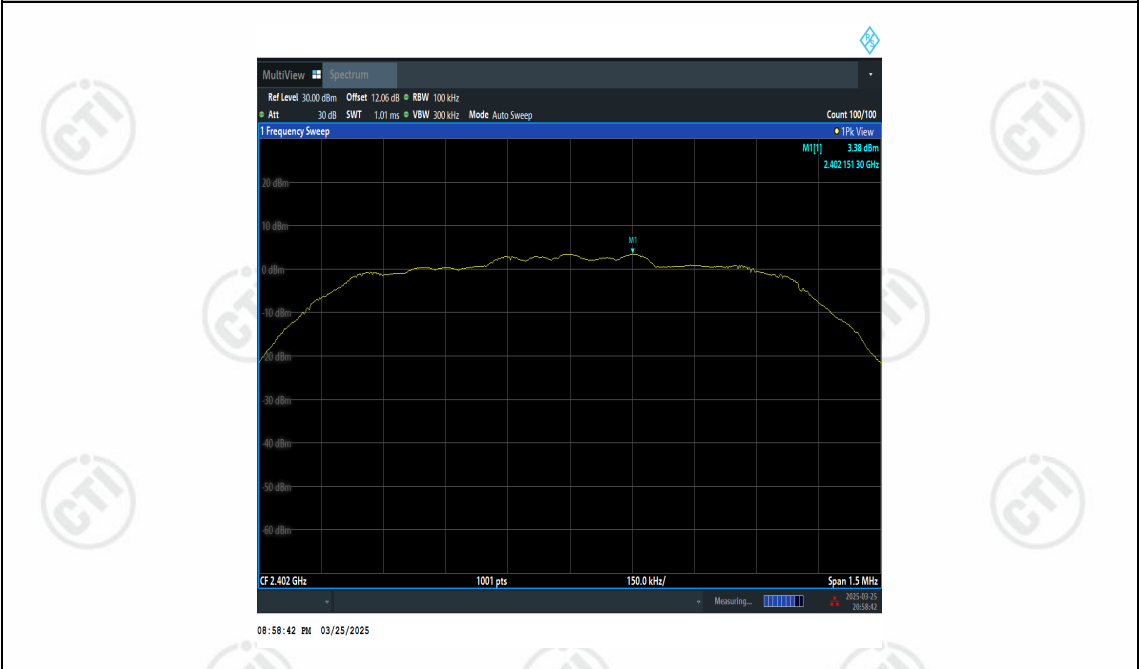

2DH5-Ant1-2402-0~Reference-PASS

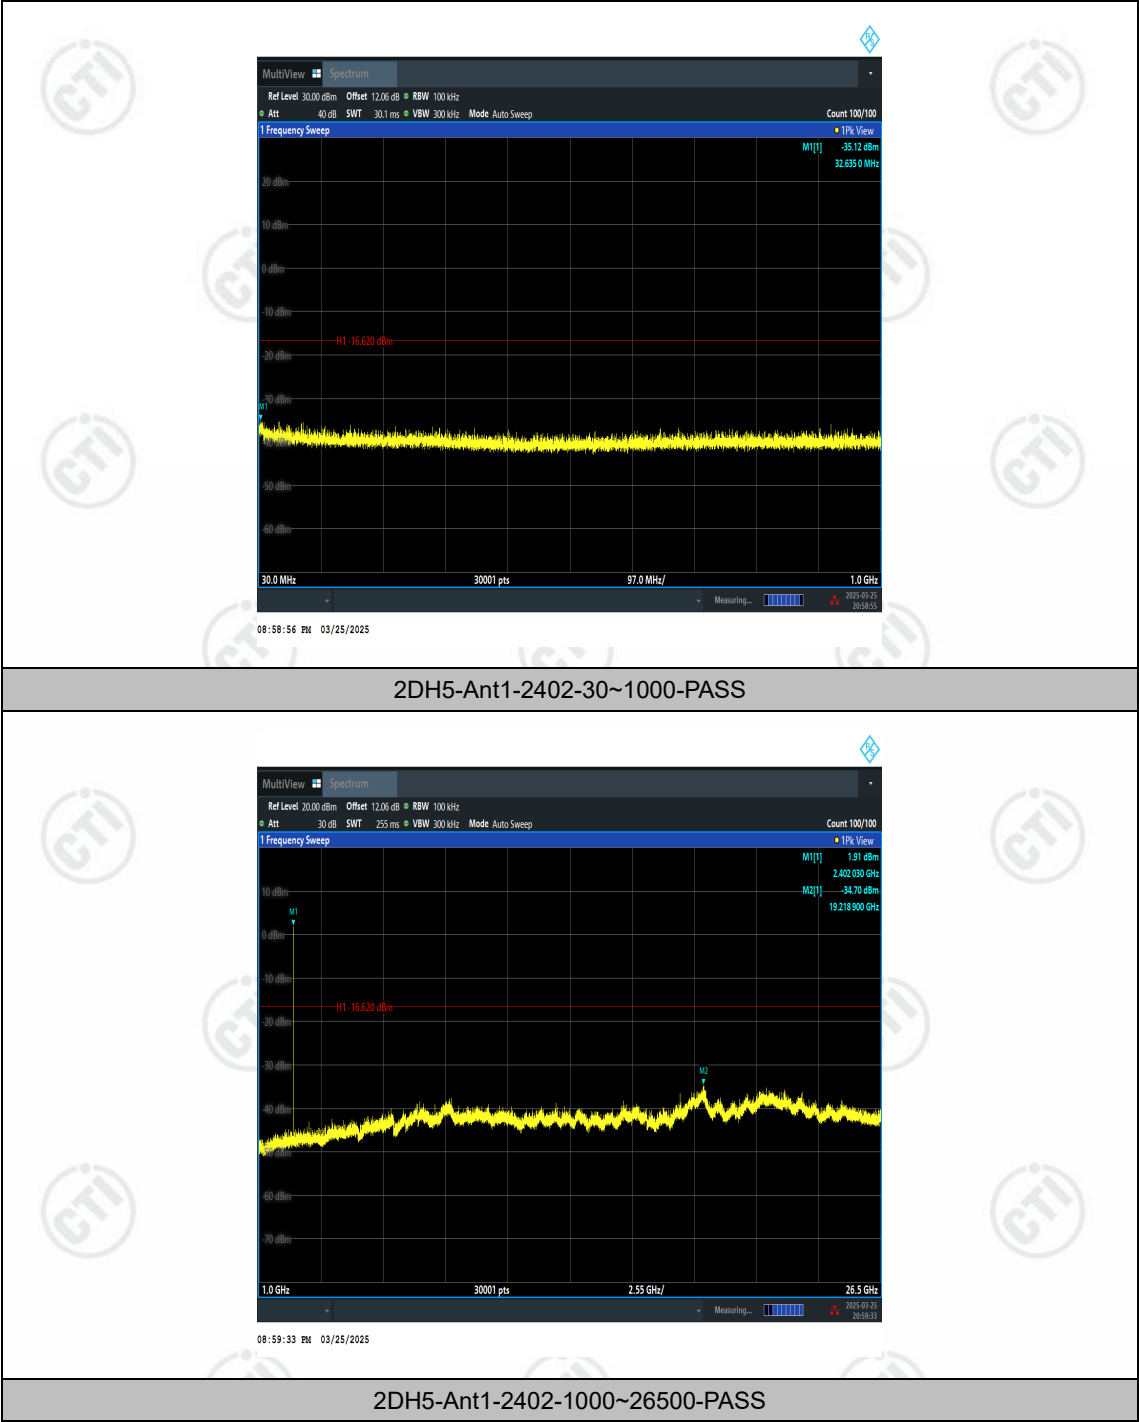

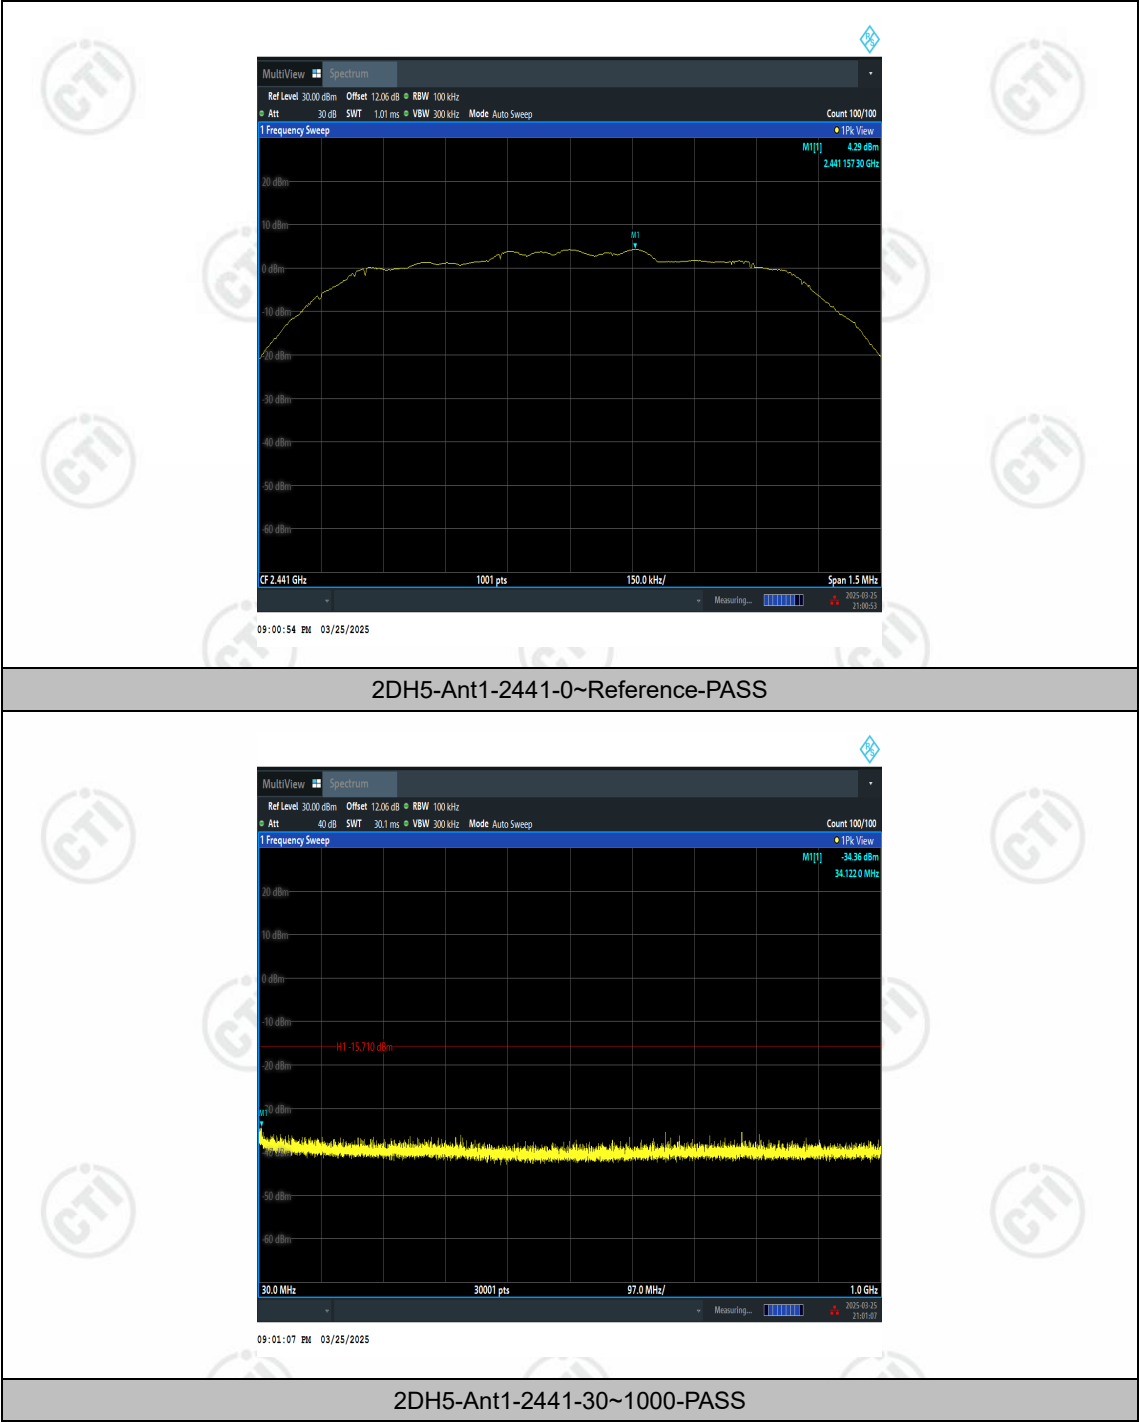


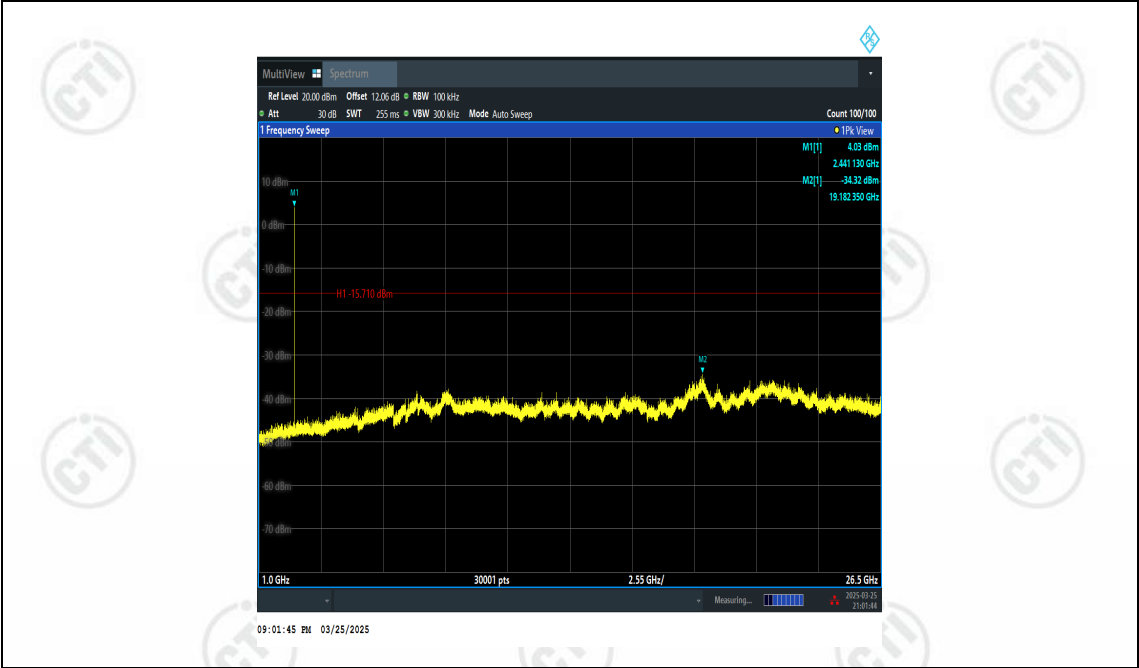



2DH5-Ant1-2441-1000~26500-PASS





2DH5-Ant1-2480-0~Reference-PASS

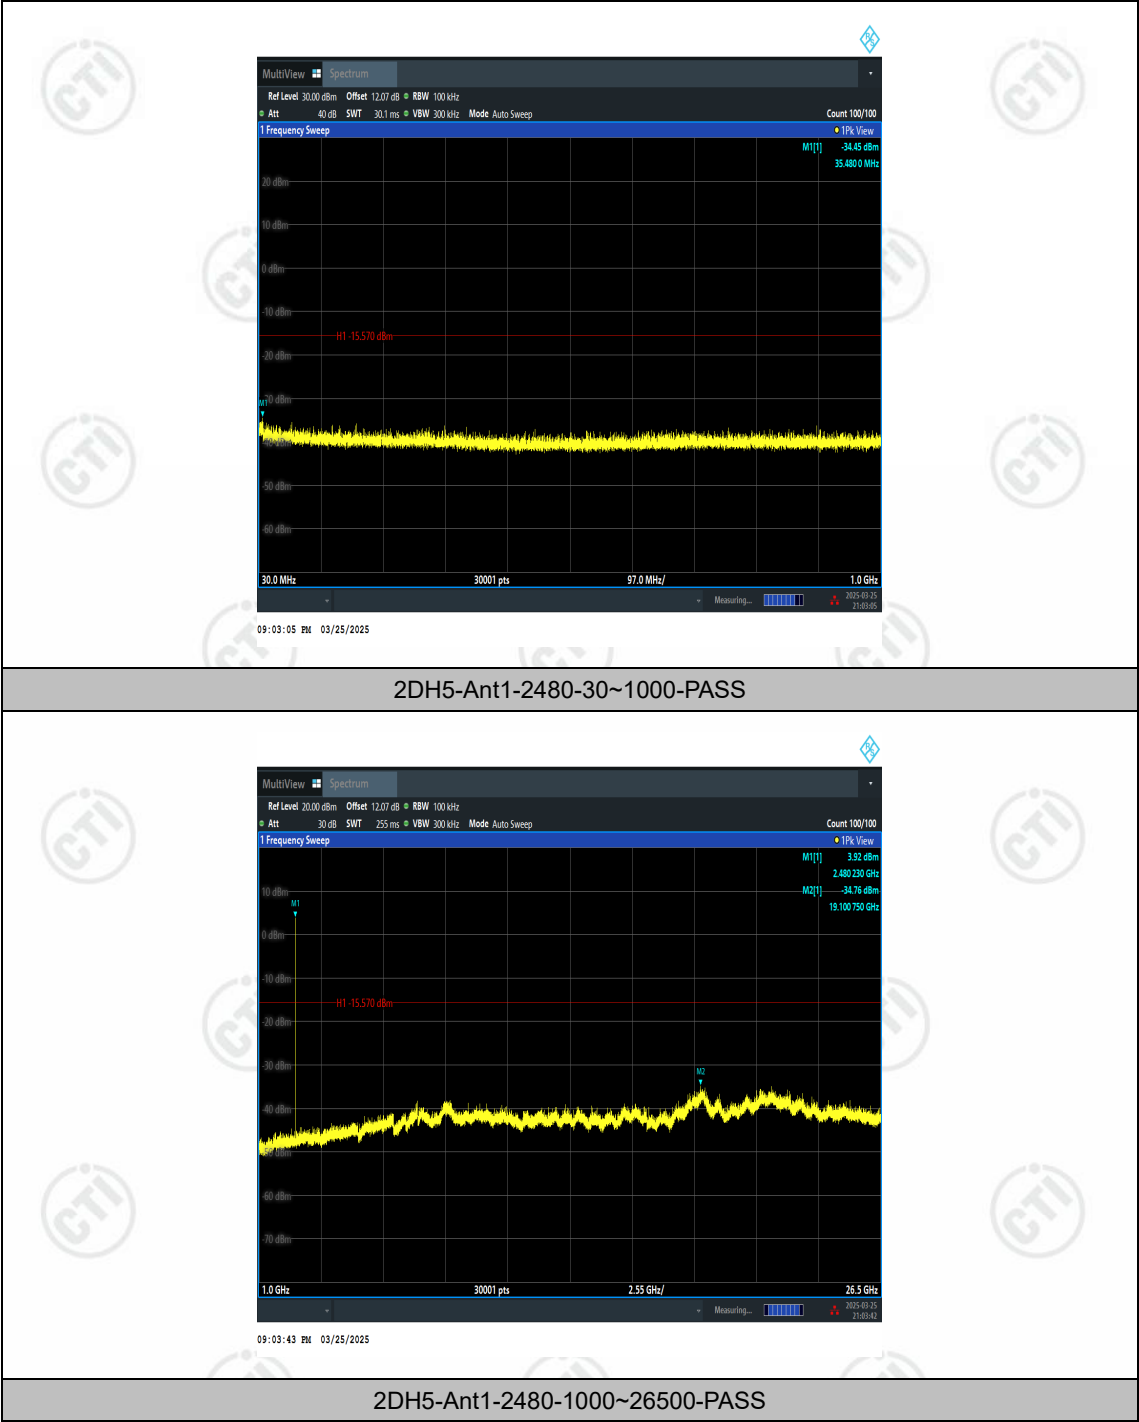


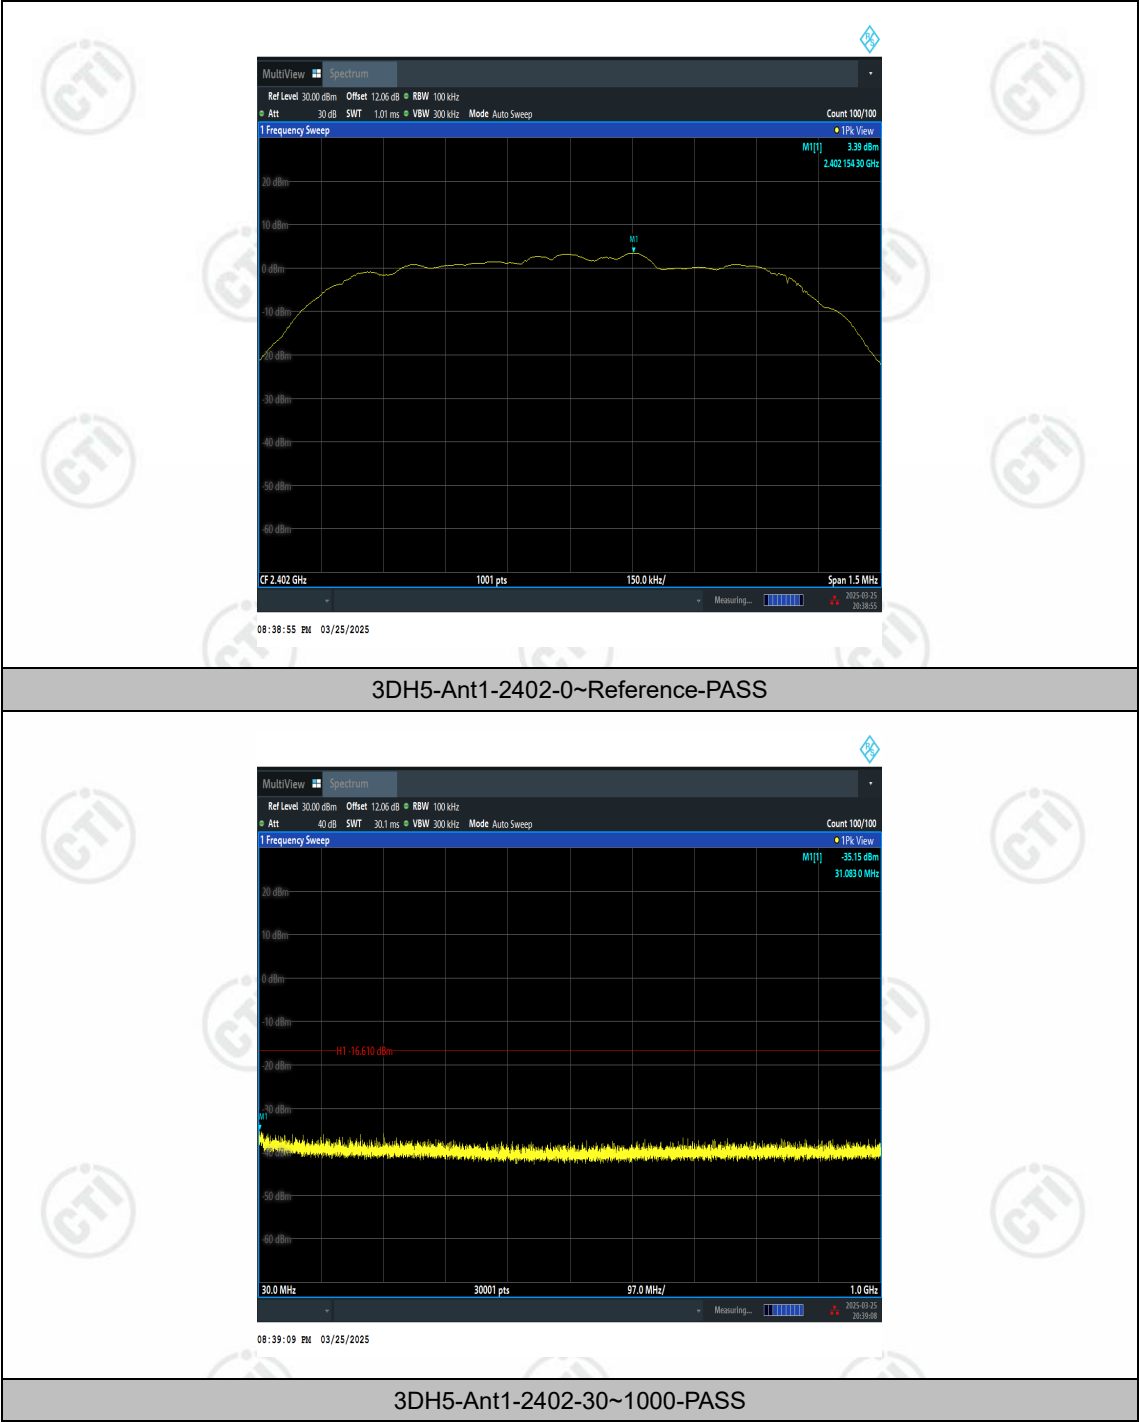

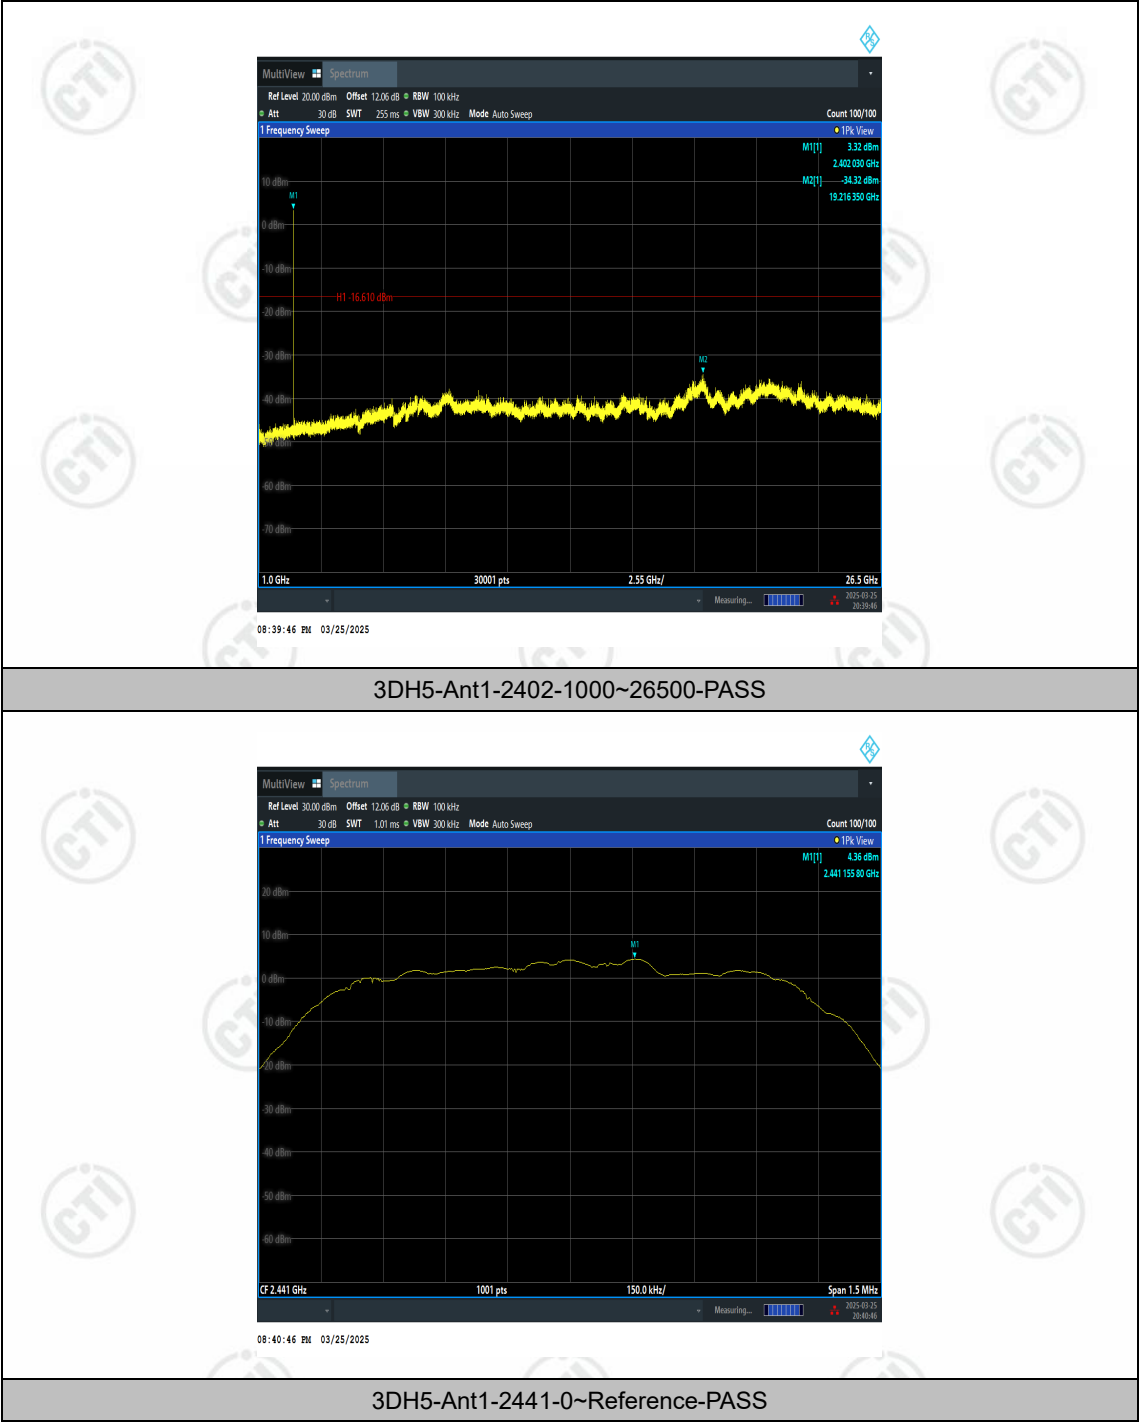

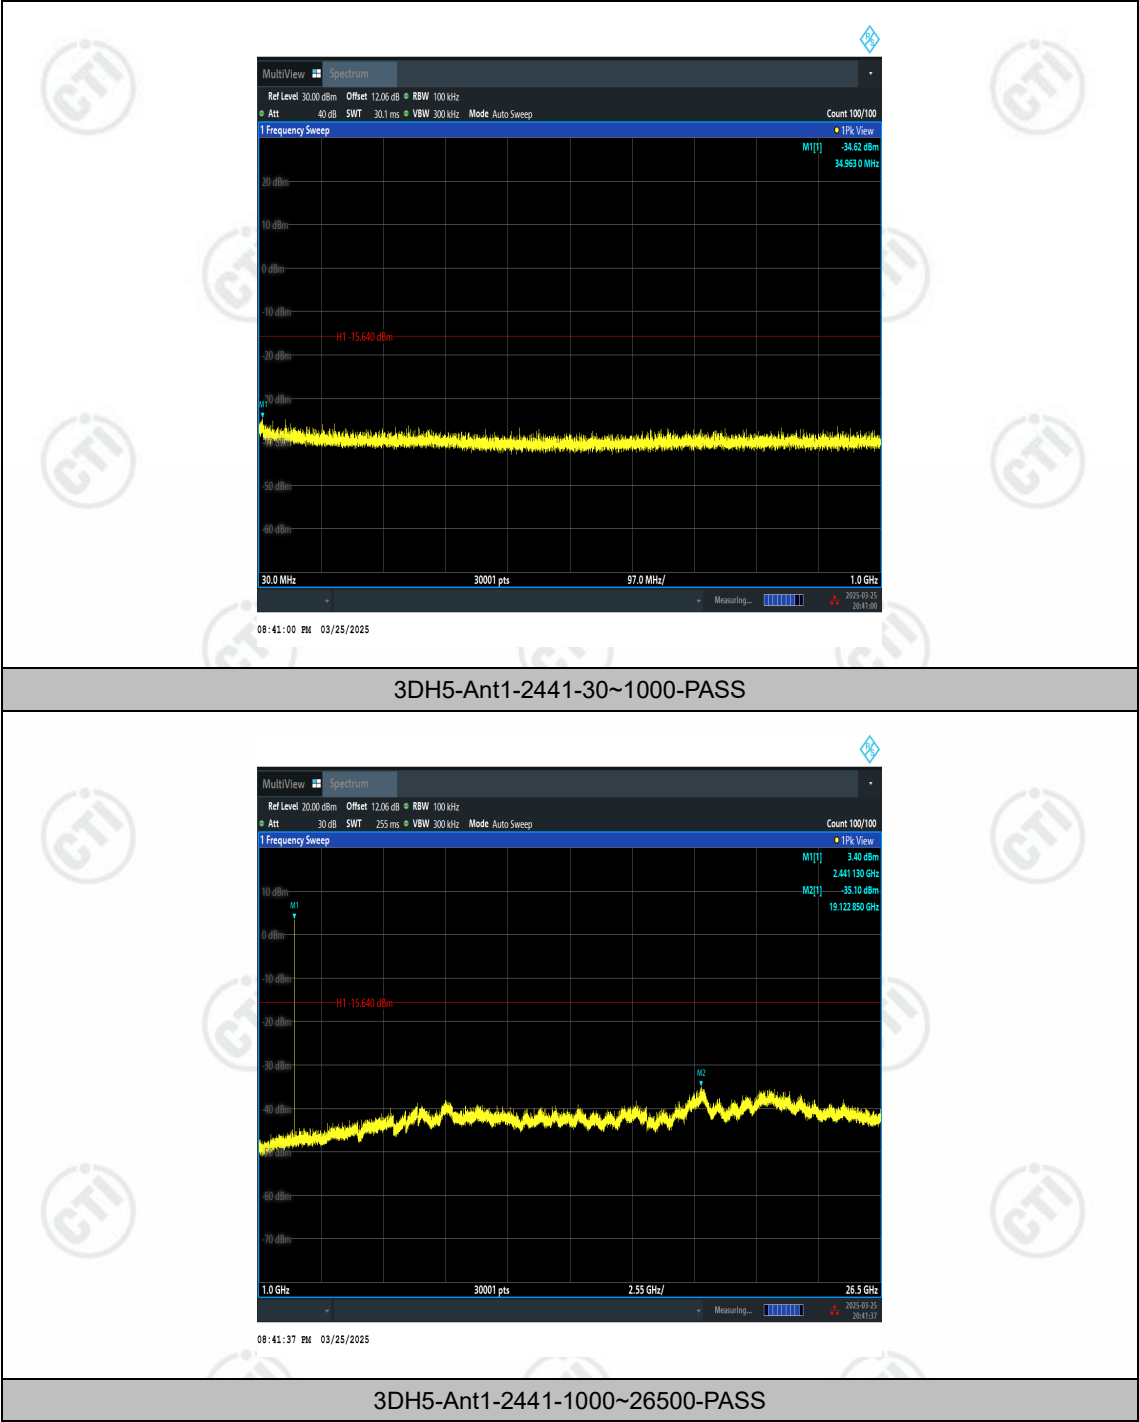

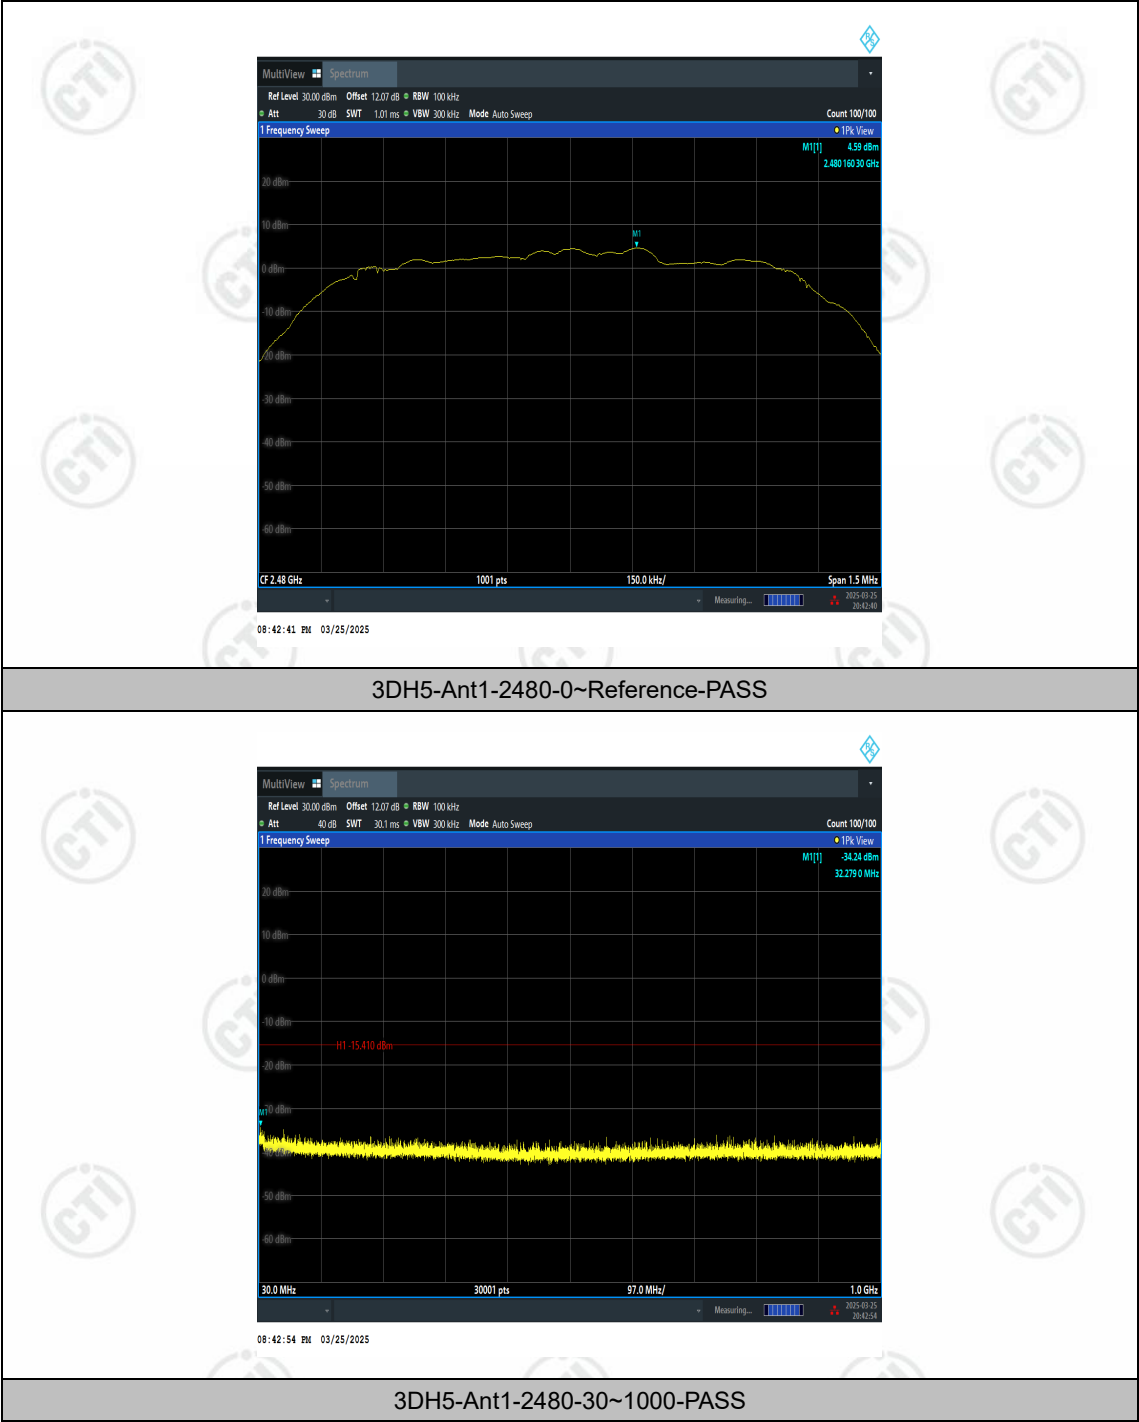

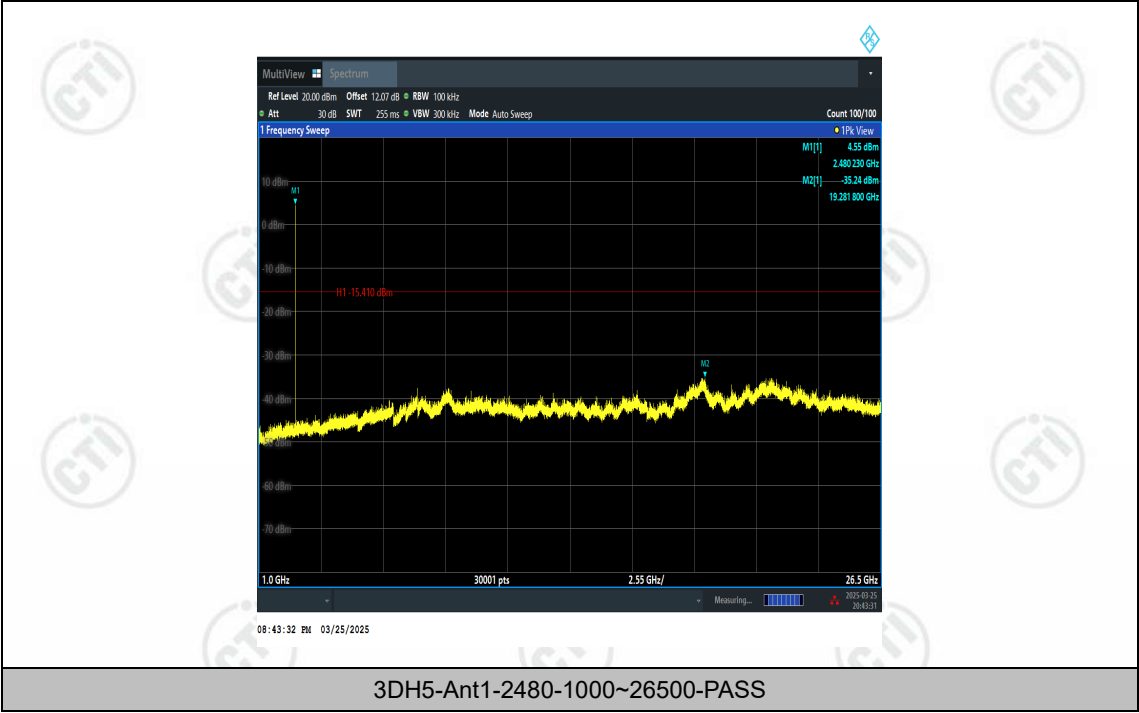

Appendix I: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	ON Time[ms]	Period[ms]	Duty Cycle[%]	Duty Cycle Factor[dB]
DH5	Ant1	2402	2.88	3.75	76.80	1.15
DH5	Ant1	2441	2.89	3.75	77.07	1.13
DH5	Ant1	2480	2.89	3.75	77.07	1.13
2DH5	Ant1	2402	2.89	3.75	77.07	1.13
2DH5	Ant1	2441	2.89	3.75	77.07	1.13
2DH5	Ant1	2480	2.89	3.75	77.07	1.13
3DH5	Ant1	2402	2.89	3.75	77.07	1.13
3DH5	Ant1	2441	2.90	3.76	77.13	1.13
3DH5	Ant1	2480	2.89	3.75	77.07	1.13


Test Graphs









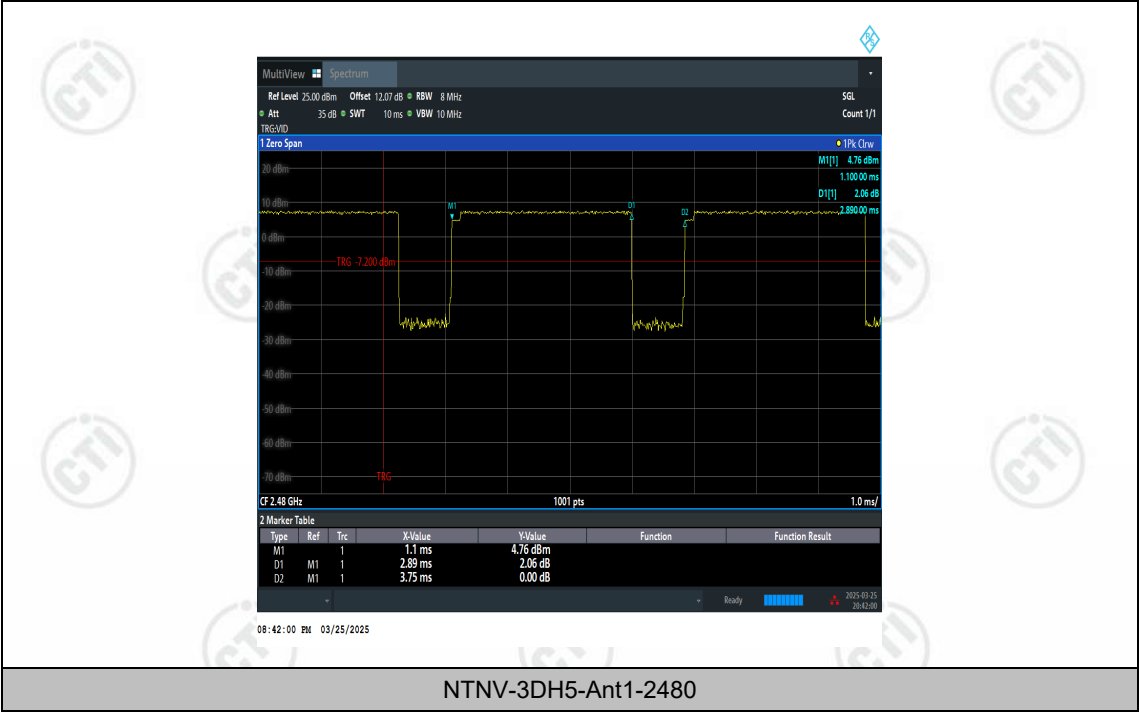

*** End of Report ***