

Report No.: 150410028GZU-001
Issued: 28 April 2015

TEST REPORT

Applicant Name & : Polygroup Limited(Macao Commercial Offshore)
Address : Avenida Xian Xing Hai,Centro Golden Dragon,11 Andar Macau

Sample Description :
Product : Christmas Tree Lighting
Model No. : LxGxYxS (the first x=30-120; the second x=0-5; the third x=0100-2300)
Note: "L" means that the low voltage. The first "x" indicates the size of the tree, said the use of height from 3ft-12ft. "Gx" number of lines, G0 represents 0 drag line G5 on behalf of 5 drag line. "Y" means tree stand. M means the tree is to use ordinary tree foot. R which means that the tree is to use rotating tree foot. The third "x" represents the number of lamp, from 100 to 2300 lamp.
"S" means that the tree pin.


Electrical Rating : Christmas Tree Lighting powered by Adapter .(Details in page 4 and 5)
FCC ID : 2AABT-CW003
Date Received : 22 April 2013 & 21 April 2014 & 10 April 2015
Date Test Conducted : 25 April 2013-13 May 2013 & 21 April 2014-30 April 2014 & 10 April 2015-17 April 2015

Test standards : FCC Part 15: 2014 Subpart B
Test Result : Pass
Conclusion : The submitted samples complied with the above rules/standards.

Remark : TRF No.: FCC Part 15 2014 (Subpart B)-a
Effective date: 19 April 2015

*****End of Page*****

Prepared and Checked By:

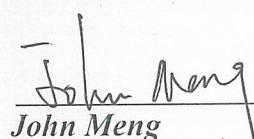
John Meng
Engineer
Intertek Guangzhou

Approved By:


Helen Ma
Team Leader
Intertek Guangzhou
28 April 2015

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
Tel / Fax: 86-20-8213 9688/86-20-3205 7538

FCC ID: 2AABT-CW003

Page 1 of 25

CONTENT

TEST REPORT	1
CONTENT	2
1 TEST RESULTS SUMMARY	3
2 TEST RESULTS CONCLUSION	4
3 LABORATORY MEASUREMENTS	7
4 TEST RESULTS	8
4.1 CONDUCTED DISTURBANCE VOLTAGE AT MAINS PORTS	8
4.1.1 <i>Used Test Equipment</i>	8
4.1.2 <i>Block Diagram of Test Setup</i>	8
4.1.3 <i>Test Setup and Procedure</i>	8
4.1.4 <i>Limit</i>	9
4.1.5 <i>Test Data</i>	9
4.1.6 <i>Emission Curve</i>	14
4.1.7 <i>Measurement Uncertainty</i>	17
4.2 RADIATED EMISSION (30 MHz -1000 MHz)	18
4.2.1 <i>Used Test Equipment</i>	18
4.2.2 <i>Block Diagram of Test Setup</i>	18
4.2.3 <i>Test Setup and Procedure</i>	18
4.2.4 <i>Limit</i>	19
4.2.5 <i>Test Data</i>	20
4.2.6 <i>Test Curve</i>	22
4.2.7 <i>Measurement uncertainty</i>	25

1**TEST RESULTS SUMMARY****Classification of EUT: Class B**

Test Item	Standard	Result
Conducted disturbance voltage at mains ports	FCC Part 15: 2014, Subpart B	Pass
Radiated emission (30 MHz–1 GHz)	FCC Part 15: 2014, Subpart B	Pass
Radiated emission (Above 1 GHz)	FCC Part 15: 2014, Subpart B	Pass
Remark: Reference publication is used for methods of measurement: ANSI C63.4:2009		

Remark: 1. When determining the test results, measurement uncertainty of tests has been considered.

2**Test Results Conclusion**
(with Justification)

RE: EMC Testing Pursuant to FCC Part 15, Subpart B Performed on the Christmas Tree Lighting, Model: LxGxYxS(the first x=30-120, means the height of the tree; the second x=0-5, means the number of the cord set; the third x=0100-2300, means the number of LED).

We tested the Christmas Tree Lighting, Model: L12G5R1400S, L12G5R2000S, L12G5R2300S, to determine if they were in compliance with the relevant FCC rules as marked on the Test Results Summary. We found that the units met the requirement of FCC Part 15, Subpart B when tested as received. The worst case's test data was presented in this test report.

The Equipment Under Test (EUT) is controlled by a controller, the controller is an intentional radiator using 433.92MHz frequency.

Antenna Type: PCB antenna.

The controller option of this receiver is subject to Certification procedure.

Model: LxGxYxS (Thirdly x=0100-0300) use the Adapter model XY-2900100UO

Model: LxGxYxS (Thirdly x=0100-0600) use the Adapter model XY-2900200UO

Model: LxGxYxS (Thirdly x=0100-0900) use the Adapter model XY-2900300U

Model: LxGxYxS (Thirdly x=0100-0900) use the Adapter model XY-2900300UO

Model: LxGxYxS (Thirdly x=0100-1100) use the Adapter model XY-2900400U

Model: LxGxYxS (Thirdly x=0100-1100) use the Adapter model XY-2900400UO

Model: LxGxYxS (Thirdly x=0100-1400) use the Adapter model XY-2900500-U

Model: LxGxYxS (Thirdly x=0100-1400) use the Adapter model XY-2900500-UO

Model: LxGxYxS (Thirdly x=0100-1600) use the Adapter model XY-2900600-U

Model: LxGxYxS (Thirdly x=0100-1600) use the Adapter model XY-2900600-UO

Model: LxGxYxS (Thirdly x=0100-1800) use the Adapter model XY-2900700-U

Model: LxGxYxS (Thirdly x=0100-1800) use the Adapter model XY-2900700-UO

Model: LxGxYxS (Thirdly x=0100-2000) use the Adapter model XY-2900800-U

Model: LxGxYxS (Thirdly x=0100-2000) use the Adapter model XY-2900800-UO

Model: LxGxYxS (Thirdly x=0100-0800) use the Adapter model TS-8W29V

Model: LxGxYxS (Thirdly x=0100-1300) use the Adapter model TS-13W29V

Model: LxGxYxS (Thirdly x=0100-2300) use the Adapter model TS-29V0.9A

Model: LxGxYxS (Thirdly x=0100-0300) use the Adapter model TS-3W28V

Model: LxGxYxS (Thirdly x=0100-1400) use the Adapter mode MTS810-29V

Model: LxGxYxS (Thirdly x=0100-1400) use the Adapter mode MTS-810-29V

Model: LxGxYxS (Thirdly x=0100-1200) use the Adapter mode TS-17W29V

Model: LxGxYxS (Thirdly x=0100-1200) use the Adapter mode TS-29V0.6A

Model: LxGxYxS (Thirdly x=0100-1400) use the Adapter mode TS-20W29V

Adapter model XY-2900100UO, input 120V, 60Hz, output DC 29V 0.1A 2.9W

Adapter model XY-2900200UO, input 120V, 60Hz, output DC 29V 0.2A 5.8W

Adapter model XY-2900300U, input 100-240V, 50/60Hz, output DC 29V 0.3A 8.7W

Adapter model XY-2900300UO, input 120V, 60Hz, output DC 29V 0.3A 8.7W

Adapter model XY-2900400U, input 100-240V, 50/60Hz, output DC 29V 0.4A 11.4W

Adapter model XY-2900400UO, input 120V, 60Hz, output DC 29V 0.4A 11.4W

Adapter model XY-2900500-U, input 100-240V, 50/60Hz, output DC 29V 0.5A 14.5W

Adapter model XY-2900500-UO, input 120V, 60Hz, output DC 29V 0.5A 14.5W

Adapter model XY-2900600-U, input 100-240V, 50/60Hz, output DC 29V 0.6A 17.4W

Adapter model XY-2900600-UO, input 120V, 60Hz, output DC 29V 0.6A 17.4W

Adapter model XY-2900700-U, input 100-240V, 50/60Hz, output DC 29V 0.7A 20.3W

Adapter model XY-2900700-UO, input 120V, 60Hz, output DC 29V 0.7A 20.3W

Adapter model XY-2900800-U, input 100-240V, 50/60Hz, output DC29V 0.8A 23.2W

Adapter model XY-2900800-UO, input 120V, 60Hz, output DC29V 0.8A 23.2W

Adapter model TS-3W28V, input 120V, 60Hz, output DC28V0.1A 3W

Adapter model TS-8W29V, input 120V, 60Hz, output DC29V0.28A 8W

Adapter model TS-13W29V, input 120V, 60Hz, output DC29V0.45A 13W

Adapter model TS-29V0.9A, input 120V, 60Hz, output DC29V0.9A 26.1W

Adapter model MTS810-29V, input 120V, 60Hz, output DC29V 15W

Adapter model MTS-810-29V, input 120V, 60Hz, output DC29V 15W

Adapter model TS-17W29V, input 120V, 60Hz, output DC29V17W

Adapter model TS-29V0.6A, input 120V, 60Hz, output DC29V0.6A

Adapter model TS-20W29V, input 120V, 60Hz, output DC29V20W

All models can use adapter and the controller PDR-001-29V series, PDR-002-29V series, PDR-003-29V series and with Remote Control PDT-001-29V.

The controllers PDR-001-29V, PDR-002-29V, PDR-003-29V are identical except the model number.

Adapter XY-2900100UO and XY-2900200UO they have the same circuit and mechanical design, their difference is that the output current and output electronic components parameters.

Adapter XY-2900300U, XY-2900300UO, XY-2900400U and XY-2900400UO they have the same circuit and mechanical design, their different is that the output current and output electronic components parameters.

Adapter XY-2900500-U, XY-2900600-U, XY-2900700-U, XY-2900800-U, XY-2900500-UO, XY-2900600-UO, XY-2900700-UO, XY-2900800-UO they have the same circuit and mechanical design, their different is that the output current and output electronic components parameters.

Adapter TS-8W29V, TS-13W29V, TS-3W28V they have the same circuit and mechanical design, their different is that the output current and output electronic components parameters.

Adapter MTS810-29V and MTS-810-29V are all identical except the model number.

Adapter TS-17W29V, TS-29V0.6A, TS-20W29V they have the same circuit and mechanical design, their different is that the output current and output electronic components parameters.

All models are declared to be identical in terms of electrical design, their difference lies in the number of LED. All models have been pre-tested and found L12G5R2000S+XY-2900800-U, L12G5R2300S+TS-29V0.9A, L12G5R1400S + MTS-810-29V, L12G5R1400S + TS-20W29V were the worst case in all models.

The data on the below test result table lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

According 15.107, the worst case conducted emission at 0.452MHz

Judgement: Passed by -4.0 dB

According 15.109, the worst case radiated emission at 57.16 MHz

Judgement: Passed by -3.06 dB

The production units are required to conform to the initial sample as received when the units are placed on the market.

3**LABORATORY MEASUREMENTS****Configuration Information**

Equipment Under Test (EUT):	Christmas Tree Lighting
Model:	L12G5R1400S, L12G5R2000S, L12G5R2300S
Serial No.:	Not Labeled
Support Equipment:	N/A
Rated Voltage:	120V, 60Hz
Condition of Environment:	Temperature : 22~28°C Relative Humidity: 35~60% Atmosphere Pressure 86~106kPa

Notes:

1. The EMI measurements had been made in the operating mode producing the largest emission in the frequency band being investigated consistent with normal applications.
An attempt had been made to maximize the emission by varying the configuration of the EUT.

2. Test Sites:

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch

All tests were performed at:

Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City,
GETDD Guangzhou, China

Except Radiated Disturbance was performed at:

Room 101, Block A, No.11 Jing Ye San Street, Yu Shu Industrial Park, Guangzhou Science City,
GETDD Guangzhou

4 TEST RESULTS


4.1 Conducted Disturbance Voltage at mains ports

Test Result: Pass

4.1.1 Used Test Equipment

Equipment No.	Equipment	Model	Manufacturer
EM004-04	EMC shield Room	8m×3m×3m	Zhongyu
EM080-05	EMI receiver	ESCI	R&S
EM006-05	LISN	ENV216	R&S

4.1.2 Block Diagram of Test Setup

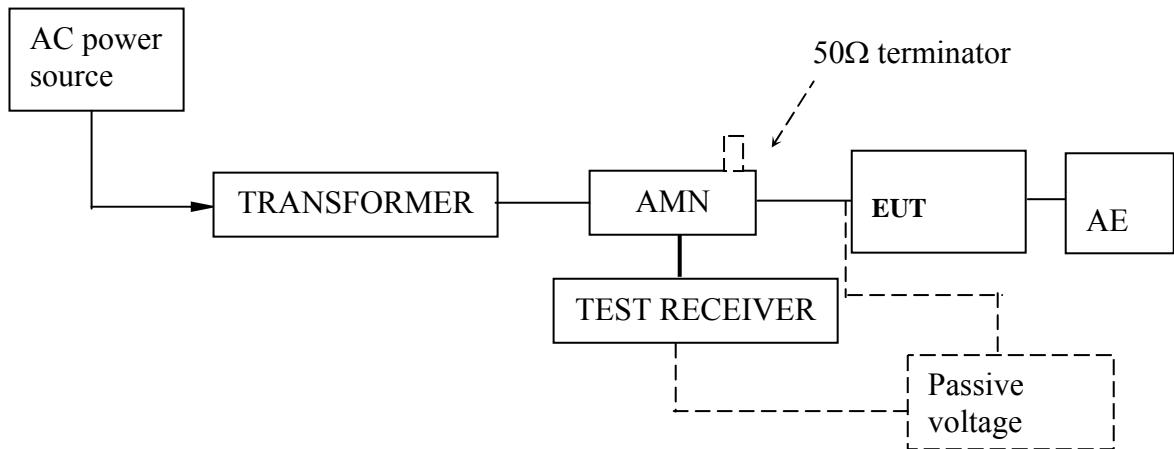

4.1.3 Test Setup and Procedure

Test was performed according to ANSI C63.4: 2009. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a 50Ω linear impedance. Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane(Ground Reference Plane). And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.

4.1.4 Limit

Class B

Frequency range MHz	AC mains terminals dB (uV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Note 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.
Note 2: The lower limit is applicable at the transition frequency.

4.1.5 Test Data**At main terminal: Pass****Test Voltage: AC120V, 60Hz****Model: L12G5R2000S+XY-2900800-U****Tested Wire: Live****Operation Mode: LED light on**

Frequency	Quasi-Peak		Average	
	Disturbance level [dB(μV)]	Permitted limit [dB(μV)]	Disturbance level [dB(μV)]	Permitted limit [dB(μV)]
0.166	51.1	65.2	34.0	55.2
0.422	43.6	57.4	41.2	47.4
0.554	33.5	56.0	28.0	46.0
0.662	32.5	56.0	27.2	46.0
0.678	33.1	56.0	28.2	46.0
4.970	31.8	56.0	23.8	46.0

Tested Wire: Neutral**Operation Mode: LED light on**

Frequency [MHz]	Quasi-Peak		Average	
	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]
0.166	48.8	65.2	34.0	55.2
0.418	44.1	57.5	40.2	47.5
0.554	32.9	56.0	28.5	46.0
0.886	32.4	56.0	27.5	46.0
2.842	29.3	56.0	24.5	46.0
4.366	31.2	56.0	25.1	46.0

Test Voltage: AC120V, 60Hz**Model: L12G5R2300S+TS29V0.9A****Tested Wire: Live****Operation Mode: LED light on**

Frequency [MHz]	Quasi-Peak		Average	
	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]
0.150	54.8	66.0	47.2	56.0
0.246	52.5	61.9	48.3	51.9
0.294	48.3	60.4	44.4	50.4
0.342	48.8	59.2	44.1	49.2
0.634	43.1	56.0	34.9	46.0
1.022	41.7	56.0	34.8	46.0

Tested Wire: Neutral**Operation Mode: LED light on**

Frequency	Quasi-Peak		Average	
[MHz]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]
0.150	53.7	66.0	45.1	56.0
0.246	49.9	61.9	44.5	51.9
0.294	45.8	60.4	42.2	50.4
0.342	46.6	59.2	42.9	49.2
0.634	43.1	56.0	36.0	46.0
1.022	42.7	56.0	34.4	46.0

At main terminal: Pass**Test Voltage: AC120V, 60Hz****Model: L12G5R1400S + MTS-810-29V****Tested Wire: Live****Operation Mode: LED light on**

Frequency	Quasi-Peak		Average	
[MHz]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]
0.154	51.0	65.8	35.8	55.8
0.452	43.0	56.8	39.5	46.8
1.077	39.7	56.0	28.8	46.0
3.454	43.7	56.0	30.5	46.0
6.523	45.0	60.0	34.6	50.0
13.127	44.6	60.0	31.3	50.0

Tested Wire: Neutral**Operation Mode: LED light on**

Frequency	Quasi-Peak		Average	
	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]
0.182	46.6	64.4	32.3	54.4
0.452	45.5	56.8	42.8	46.8
1.077	43.7	56.0	31.6	46.0
3.346	44.6	56.0	32.2	46.0
6.592	46.7	60.0	35.4	50.0
12.988	46.7	60.0	32.7	50.0

Test Voltage: AC120V, 60Hz**Model: L12G5R1400S + TS-20W29V****Tested Wire: Live****Operation Mode: LED light on**

Frequency	Quasi-Peak		Average	
	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]
0.198	53.3	63.7	44.5	53.7
0.446	38.0	56.9	28.1	46.9
1.000	<46	56.0	<36	46.0
10.000	<50	60.0	<40	50.0
22.000	<50	60.0	<40	50.0
30.000	<50	60.0	<40	50.0

Tested Wire: Neutral**Operation Mode: LED light on**


Frequency	Quasi-Peak		Average	
[MHz]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]	Disturbance level [dB(µV)]	Permitted limit [dB(µV)]
0.194	56.7	63.9	47.2	53.9
0.500	<46	56.0	<36	46.0
1.000	<46	56.0	<36	46.0
10.000	<50	60.0	<40	50.0
22.000	<50	60.0	<40	50.0
30.000	<50	60.0	<40	50.0

4.1.6 Emission Curve


Test Voltage: AC120V, 60Hz

Model: L12G5R2000S+XY2900800-U

Tested Wire: Live

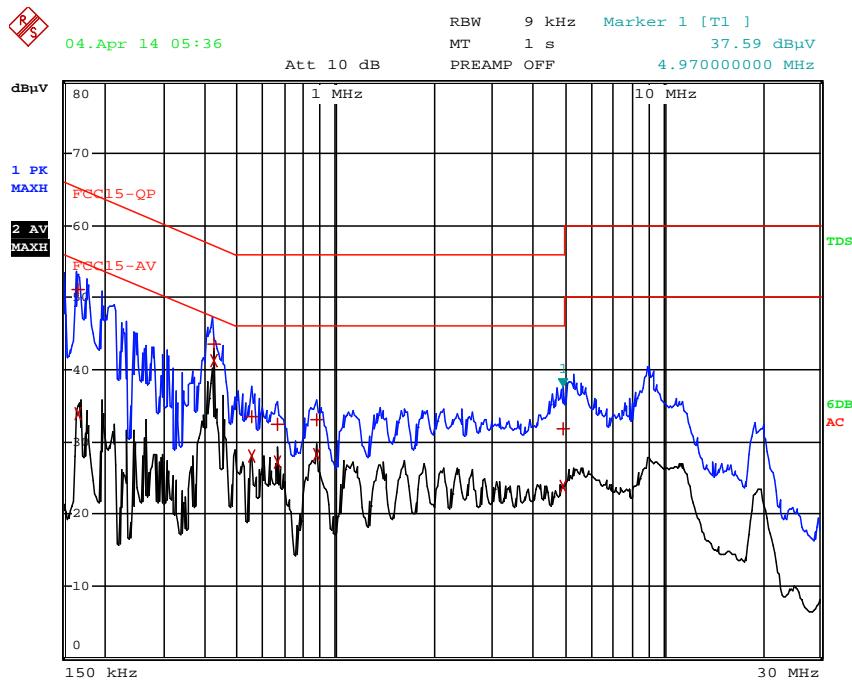


Tested Wire: Neutral

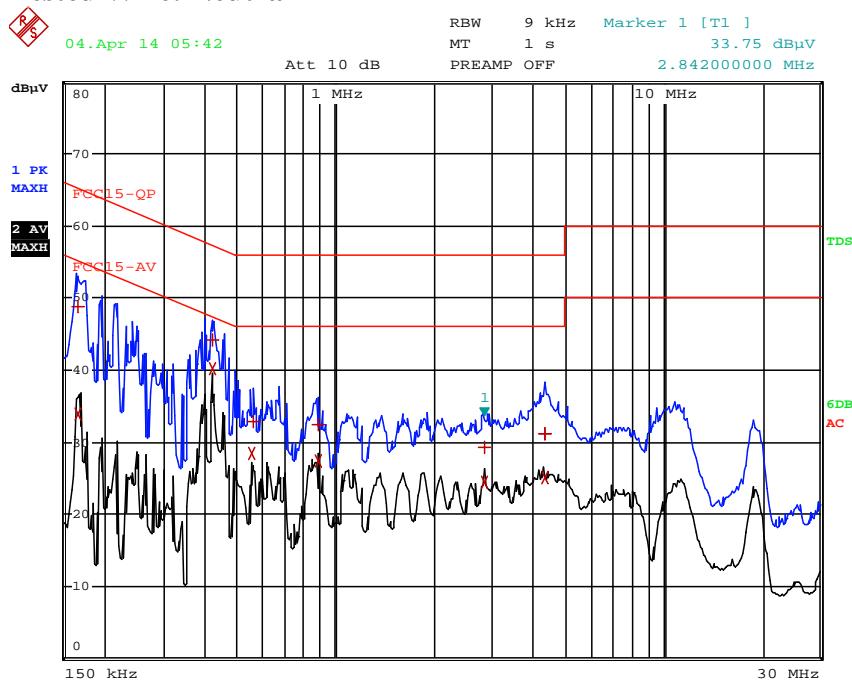


Test Voltage: AC120V, 60Hz



Model: L12G5R2300S+TS29V0.9A

Tested Wire: Live

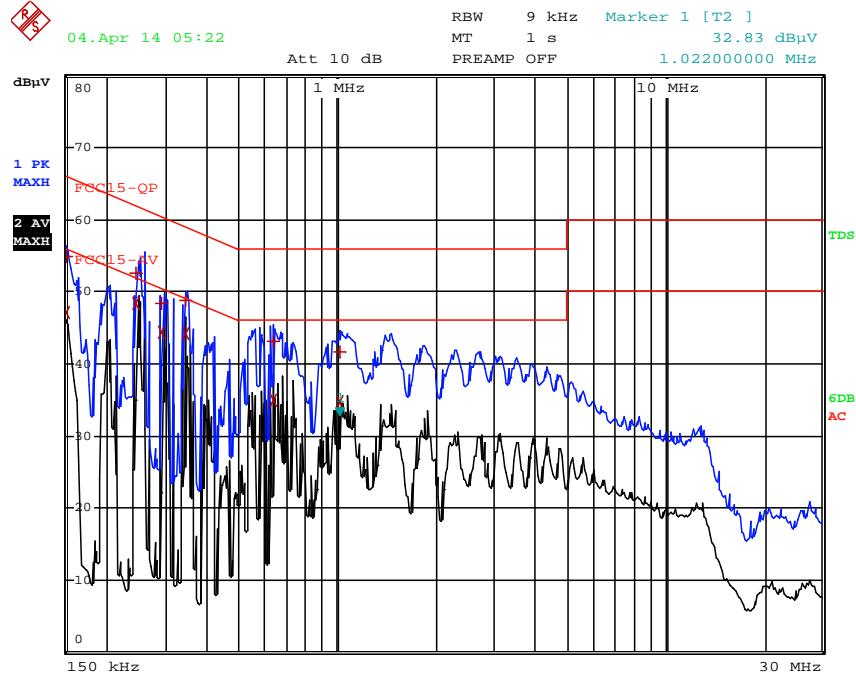

Tested Wire: Neutral

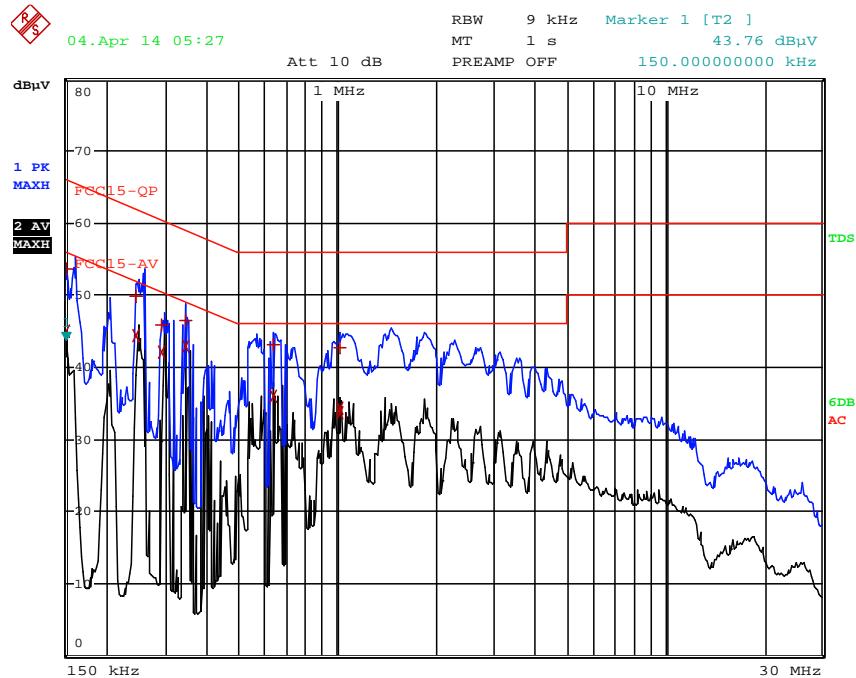


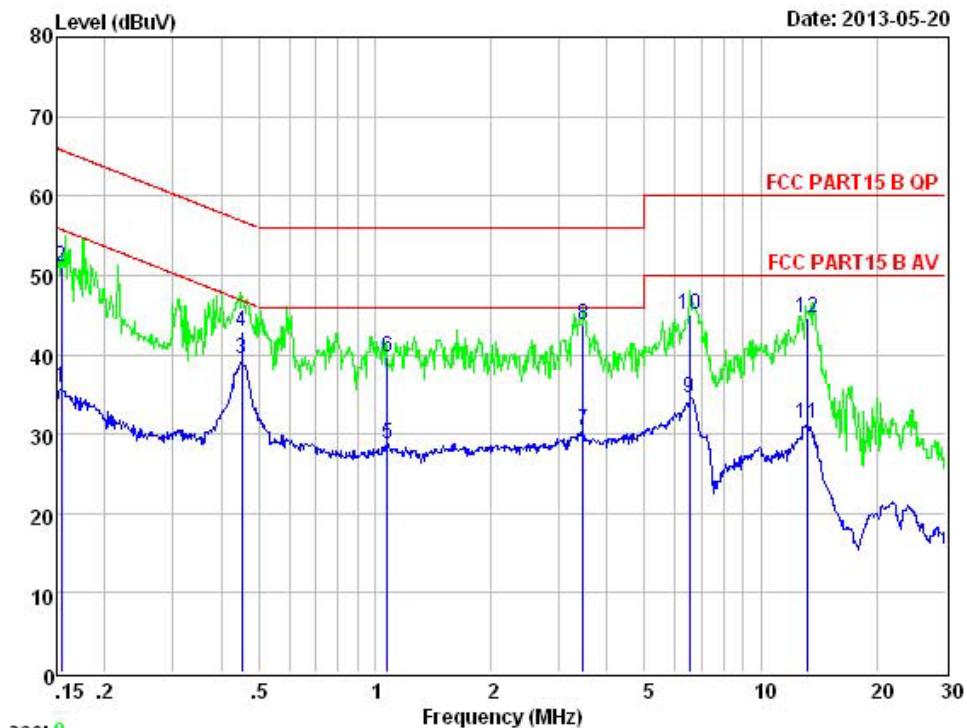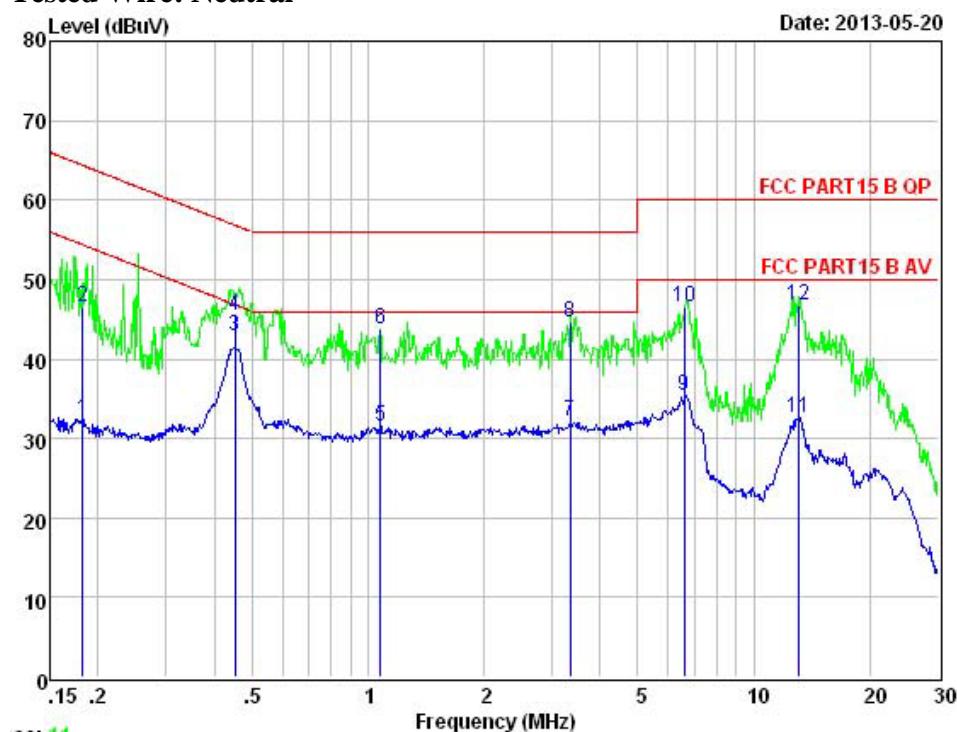Test Voltage: AC120V, 60Hz**Model: L12G5R1400S+ MTS-810-29V****Tested Wire: Live****Tested Wire: Neutral**


Test Voltage: AC120V, 60Hz

Model: L12G5R1400S + TS-20W29V

Tested Wire: Live

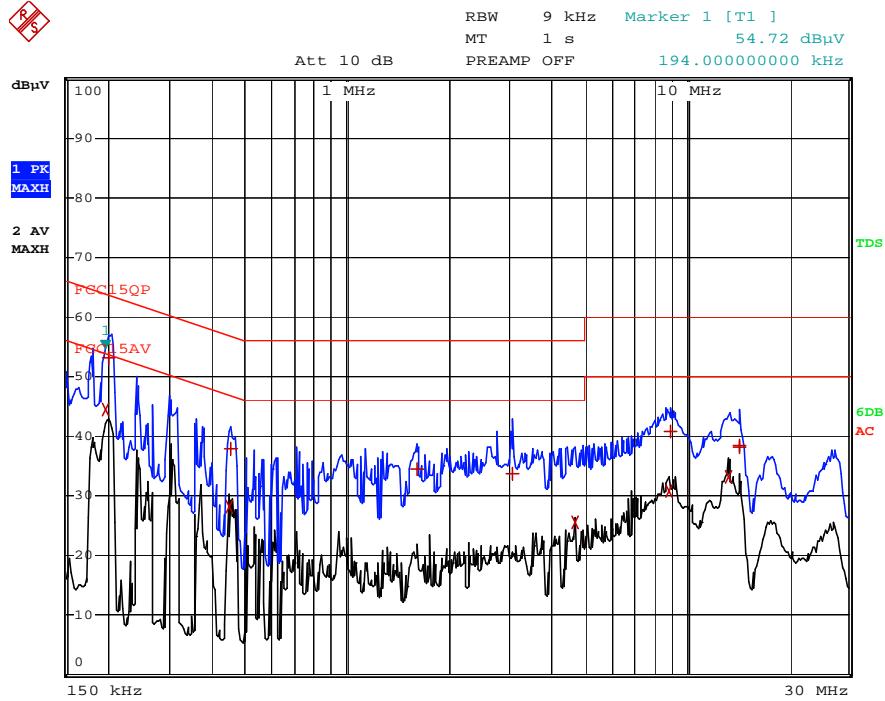

Tested Wire: Neutral

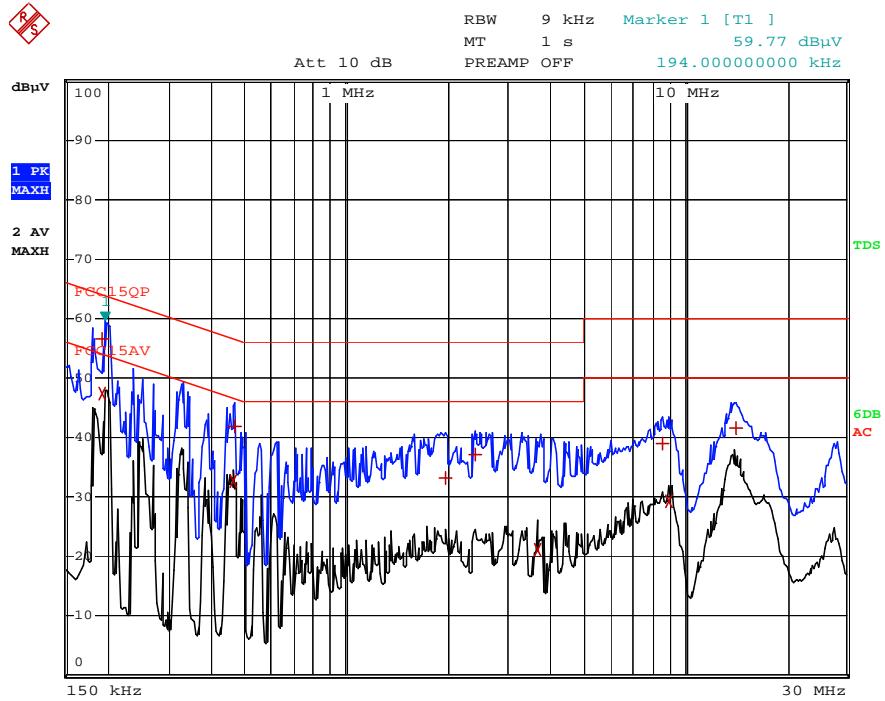


4.1.7 Measurement Uncertainty

Uncertainty: 2.58 dB at a level of confidence of 95%

FCC ID: 2AAABT-CW003

4.2 Radiated Emission (30 MHz -1000 MHz)**Test Result: Pass****4.2.1 Used Test Equipment**

Equip. No.	Equipment	Model	Manufacturer
EM030-01	3m Semi-Anechoic Chamber	9×6×6 m3	ETS•LINDGREN
EM030-02	Control room for 3m Semi-Anechoic Chamber	4×4×3 m3	ETS•LINDGREN
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S
EM033-01	TRILOG Super Broadband test Antenna (30 MHz-3 GHz)	VULB 9163	SCHWARZBECK
EM031-02-01	Coaxial cable	/	R&S

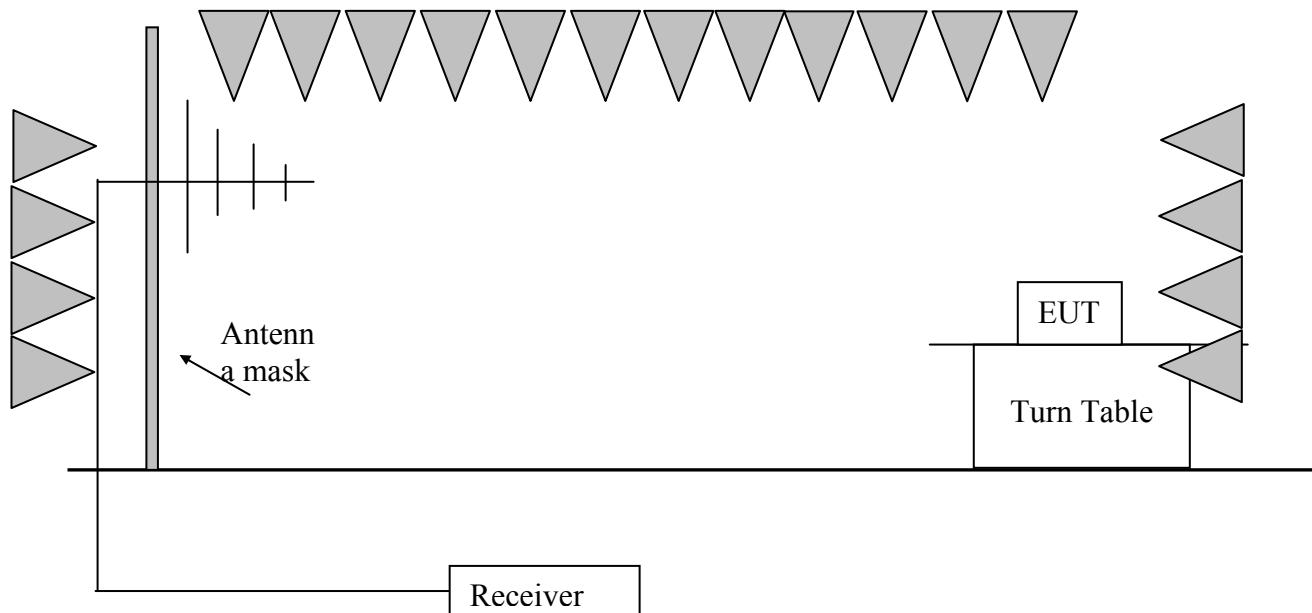4.2.2 Block Diagram of Test Setup**4.2.3 Test Setup and Procedure**

The measurement was applied in a 3 m semi-anechoic chamber. The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna

mask. The antenna moved up and down between 1 meter to 4 meters to find out the maximum emission level.

Broadband antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2009 requirement during radiated test. The bandwidth setting on R&S Test Receiver was 120 kHz. The frequency range from 30MHz to 1000MHz was checked.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper Frequency of Radiated Measurement
Below 1.705 MHz	30MHz
1.705 MHz – 108 MHz	1 GHz
108 MHz – 500 MHz	2 GHz
500 MHz – 1 GHz	5 GHz
Above 1 GHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower.
At transitional frequencies the lower limit applies.	

Remark: Radiated Emission was performed from 30 MHz to 1 GHz.

4.2.4 Limit

Class B limit at 3m test distance:

Frequency range MHz	Quasi-peak limits dB (μ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
960 to 1000	54
At transitional frequencies the lower limit applies.	

4.2.5 Test Data**Radiated Emissions**
Pursuant to FCC 15.109: Emissions Requirement: 30MHz-2GHz**Test Voltage: AC120V, 60Hz****Model: L12G5R2000S+XY-2900800-U**

Polarization	Frequency (MHz)	QP Reading (dB μ V)	Correction factor (dB/m)	QP Net at 3m (dB μ V/m)	QP Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	51.16	34.20	13.20	21.00	40.00	-19.00
Horizontal	58.20	32.70	12.50	20.20	40.00	-19.80
Horizontal	845.96	58.90	25.80	33.10	46.00	-12.90
Vertical	58.22	39.00	12.50	26.50	40.00	-13.50
Vertical	63.36	36.10	10.80	25.30	40.00	-14.70
Vertical	873.75	55.60	21.50	34.10	46.00	-11.90

Test Voltage: AC120V, 60Hz**Model: L12G5R2300S+TS29V0.9A**

Polarization	Frequency (MHz)	QP Reading (dB μ V)	Correction factor (dB/m)	QP Net at 3m (dB μ V/m)	QP Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	35.44	34.30	13.00	21.30	40.00	-18.70
Horizontal	46.92	35.00	13.90	21.10	40.00	-18.90
Horizontal	848.04	59.10	25.90	33.20	46.00	-12.80
Vertical	35.72	39.90	13.10	26.80	40.00	-13.20
Vertical	53.36	32.90	13.00	19.90	40.00	-20.10
Vertical	960.48	61.20	26.90	34.30	54.00	-19.70

Test Voltage: AC120V, 60Hz**Model: L12G5R1400S+ MTS-810-29V**

Polarization	Frequency (MHz)	Reading (dB μ V)	Correction factor (dB/m)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	63.95	55.50	-23.19	32.31	40.00	-7.69
Horizontal	105.66	49.61	-20.87	28.74	43.50	-14.76
Horizontal	144.46	38.06	-21.34	16.72	43.50	-26.78
Vertical	57.16	59.82	-22.88	36.94	40.00	-3.06
Vertical	63.95	58.80	-23.19	35.61	40.00	-4.39
Vertical	117.30	60.84	-21.50	39.34	43.50	-4.16

Test Voltage: AC120V, 60Hz**Model: L12G5R1400S + TS-20W29V**


Polarization	Frequency (MHz)	Reading (dB μ V)	Correction factor (dB/m)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	45.00	40.80	-13.90	26.90	40.00	-13.10
Horizontal	108.64	45.30	-12.70	32.60	43.50	-10.90
Horizontal	190.64	43.30	-10.00	33.30	43.50	-10.20
Vertical	35.60	44.60	-13.20	31.40	40.00	-8.60
Vertical	45.72	42.60	-14.00	28.60	40.00	-11.40
Vertical	88.36	34.10	-9.80	24.30	43.50	-19.20

- Notes:
1. Quasi-peak detector was used at below 1GHz, peak detector was used at above 1GHz.
 2. All measurements were made at 3 meter.
 3. Negative value in the margin column shows emission below limit.
 4. When tested above 1GHz, the emissions found were at least 20 dB below the limit.


4.2.6 Test Curve

Model: L12G5R2000S+XY2900800-U

Horizontal:

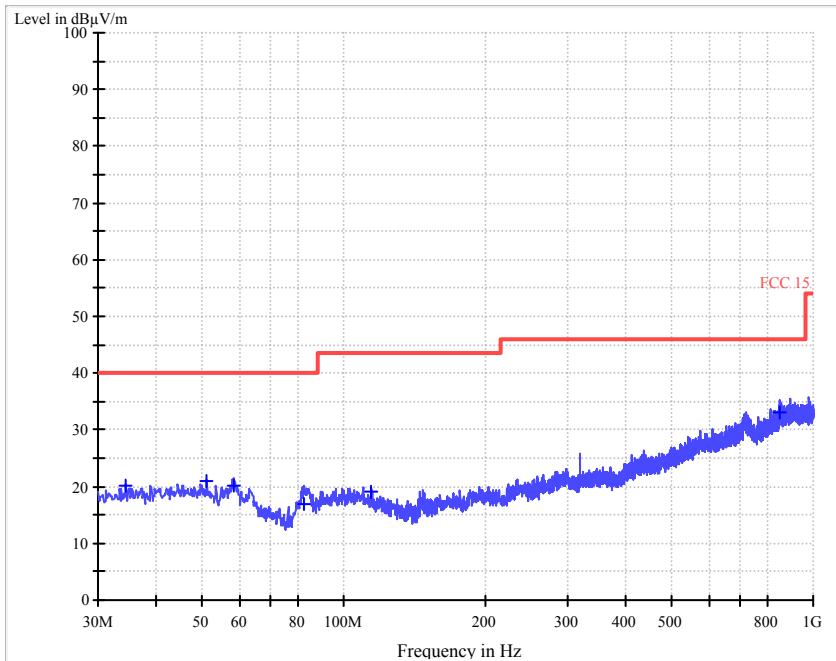


Vertical:

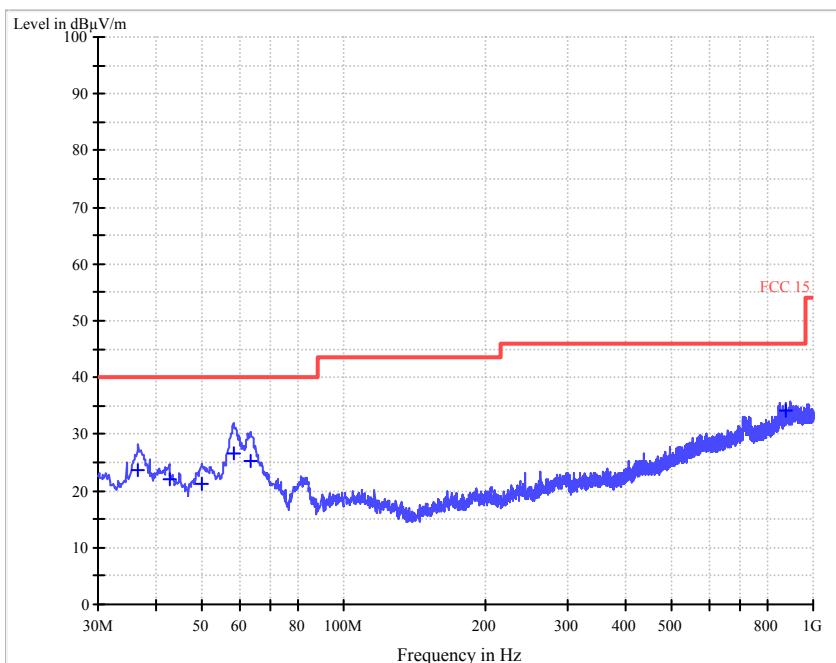


Model: L12G5R2300S+TS29V0.9A

Horizontal:

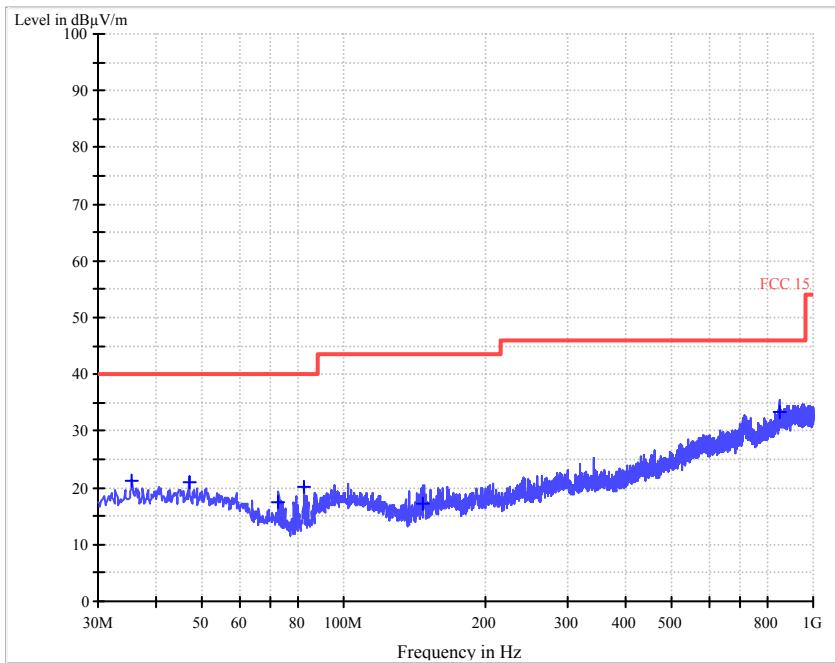


Vertical:

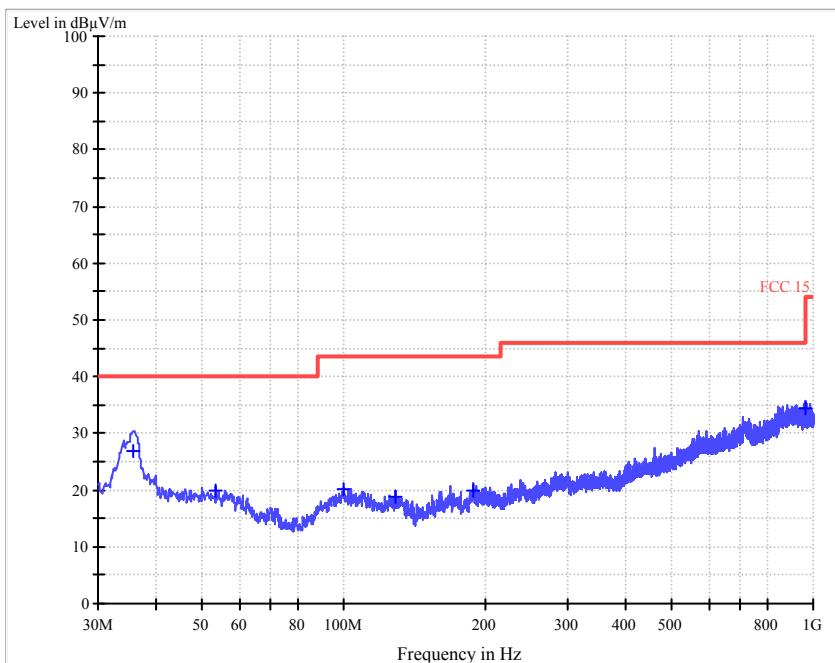


Model: L12G5R1400S+ MTS-810-29V

Horizontal:

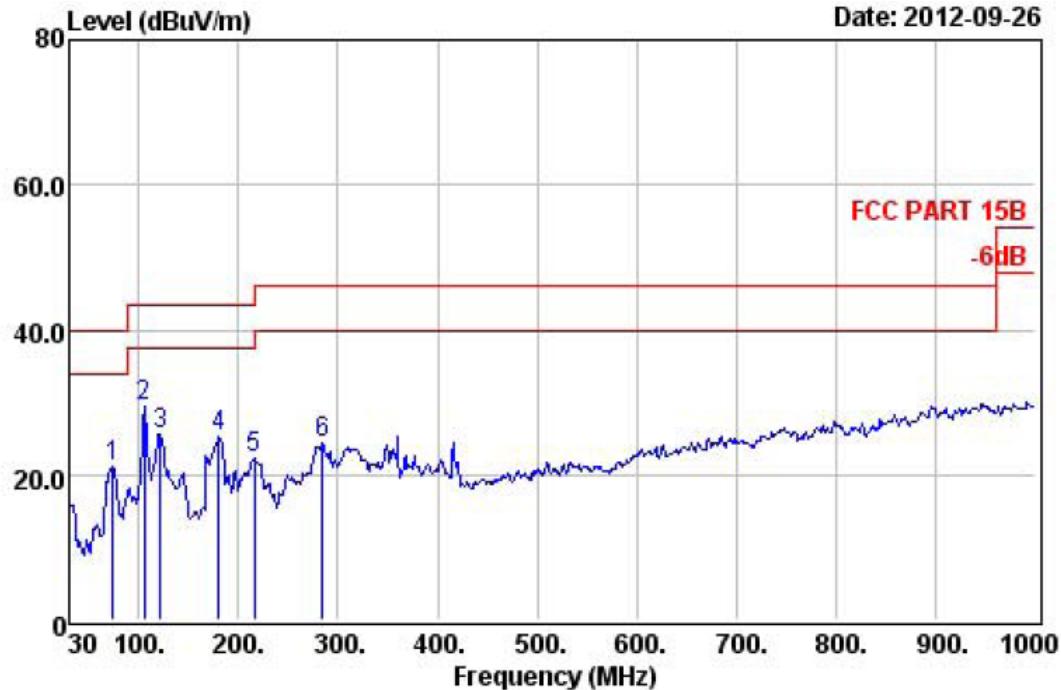


Vertical:

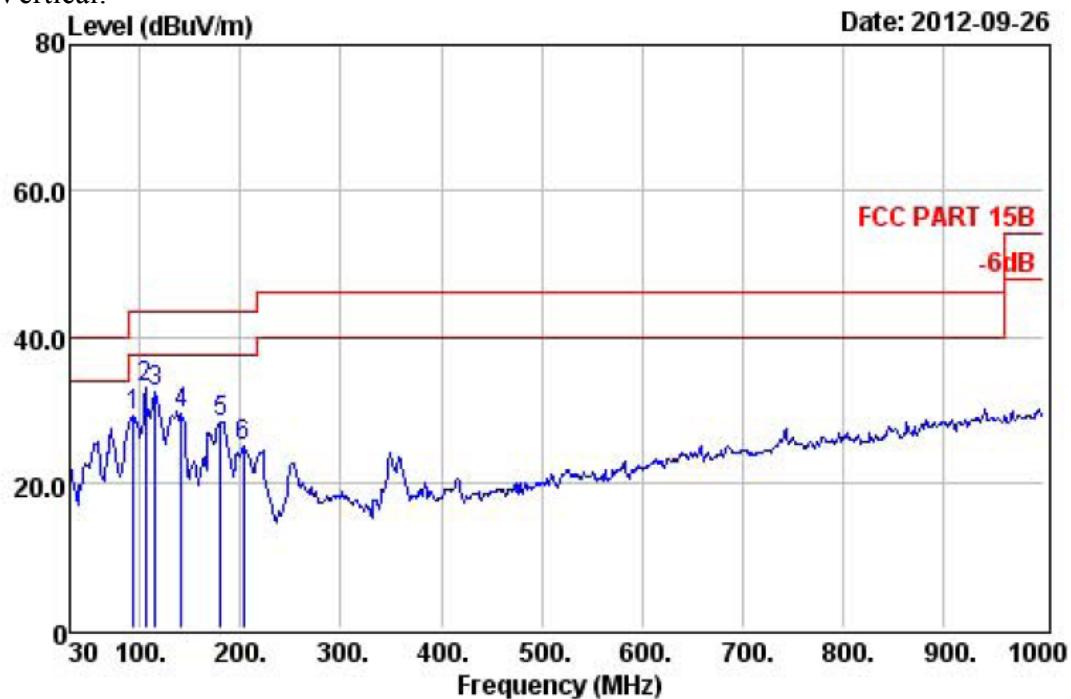


Model: L12G5R1400S + TS-20W29V

Horizontal:

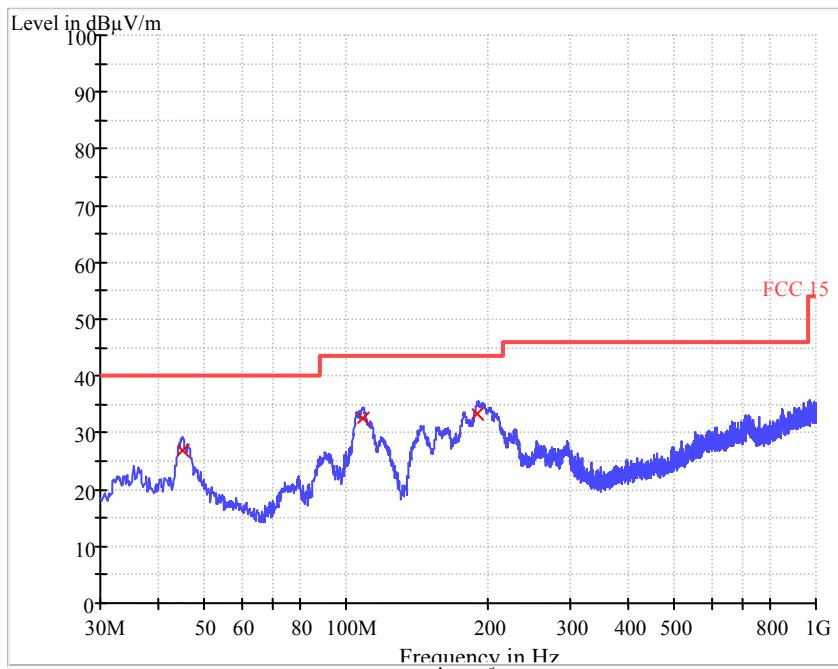

Vertical:

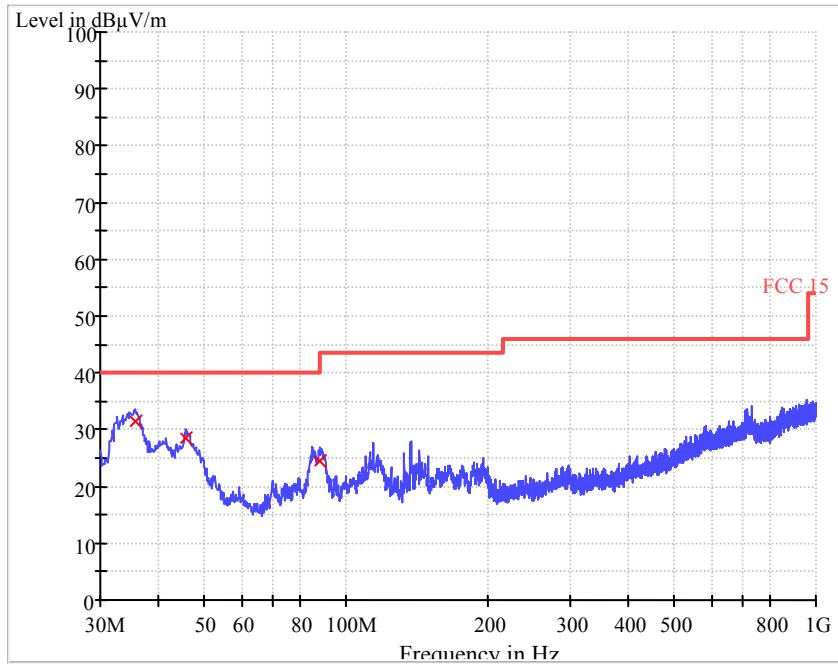

4.2.7 Measurement uncertainty

Uncertainty: 4.87 dB in the frequency range of 30-1000 MHz at a level of confidence of 95%.

FCC ID: 2AABT-CW003