

User Manual

Smart E12 Bulb, 2.4 GHz Wi-Fi, works with Alexa, color changing

Guide de l'utilisateur

FR Smart E12 Bulb, 2.4 GHz Wi-Fi, works with Alexa, color changing

Manual del usuario

ES Smart E12 Bulb, 2.4 GHz Wi-Fi, works with Alexa, color changing

B0DM9LKW2T, B0DM9LR62K

Contents

Safety Instructions	3
Before First Use.....	3
Package Contents.....	3
Compatibility.....	4
Parts Overview	4
Set Up the Smart Bulb.....	4
Alternative Setup Methods.....	5
Using the Smart Bulb	6
Troubleshooting.....	7
Light bulb does not turn on.....	7
Alexa app cannot find or connect to the smart bulb.....	7
How do I reset the light bulb?	7
If I lose the Quick Setup Guide or no barcode is available, how can I set up my smart bulb?	7
Error code (-1 :-1 :-1 :-1) displays on the screen.	7
Specifications	8
Legal Notices	8
Feedback and Help.....	9

Safety Instructions

Read these instructions carefully and retain them for future use. If this bulb is passed to a third party, then these instructions must be included.

When using electrical bulbs, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and/or injury to persons including the following:

⚠ DANGER Risk of fire, electric shock or death! Ensure the light is powered off from the light switch before changing the bulb and before cleaning.

⚠ WARNING Take special precautions when working on heights, for example, while using a ladder. Use the right type of ladder and ensure it is structurally sound. Use the ladder in accordance with the manufacturer's instructions.

⚠ CAUTION SUITABLE FOR DAMP LOCATIONS. DO NOT USE OUTDOORS.

⚠ CAUTION NOT FOR USE IN TOTALLY ENCLOSED LUMINARIES.

⚠ CAUTION THIS BULB IS NOT INTENDED FOR USE WITH EMERGENCY EXITS.

⚠ CAUTION DO NOT USE WITH STANDARD DIMMERS. Only use the control provided with or specified by these instructions to control this bulb. This bulb will not operate properly when connected to a standard (incandescent) dimmer or dimming control.

⚠ CAUTION

- ▶ The operation voltage of this bulb is 120 V~. It is not designed for universal voltage and cannot be used in 220 V~ environments.
- ▶ The bulb should not be used if the diffuser is broken.
- ▶ This bulb is intended for connection to **E12** lampholders for outlet boxes or **E12** lampholders provided in open luminaries.
- ▶ This bulb is rated 120 V AC and must be connected to a suitable power source.
- ▶ This bulb is intended for indoor dry or damp household use only.
- ▶ Do not attempt to disassemble, repair, or modify the bulb.
- ▶ Do not use this bulb with a dimmer switch.

Before First Use

⚠ DANGER Risk of suffocation!

Keep any packaging materials away from children and pets - these materials are a potential source of danger, e.g. suffocation.

- ▶ Remove all the packing materials
- ▶ Check the bulbs for transport damage.


Package Contents

- ▶ Smart LED light bulb (2)
- ▶ Quick Setup Guide
- ▶ Safety Manual

Compatibility

- ▶ 2.4GHz Wi-Fi network
- ▶ Light fixtures with 6W output
- ▶ Base: E12

Parts Overview

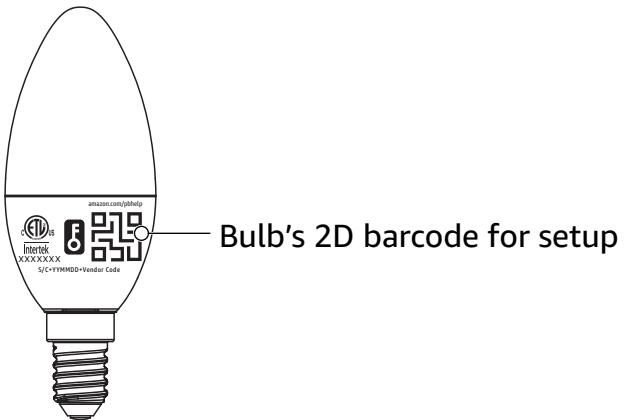

Set Up the Smart Bulb

You can set up the smart bulb with the 2D barcode on the *Quick Setup Guide* (recommended), 2D barcode on the light bulb, or without a 2D barcode.


Set up with the 2D barcode on the *Quick Setup Guide* (recommended)

Note: Certain devices may automatically connect to Alexa using Amazon's Frustration-Free Setup technology.

1. Download the latest version of [the Alexa app](#) from the app store, and log in.
2. Screw in the light bulb, then turn on the light.
3. In the Alexa app, tap **More** from the bottom menu, then tap **Add a Device**.
4. Tap **Light, Amazon Basics**, then choose **Amazon Basics Light Bulb**.

- Follow the steps in the Alexa app to complete setup. When prompted, scan the 2D barcodes on the *Quick Setup Guide*.

If you have more than one smart bulb and are scanning the 2D barcode in your Quick Setup Guide, match the DSN number on the smart bulb with the 2D barcode.

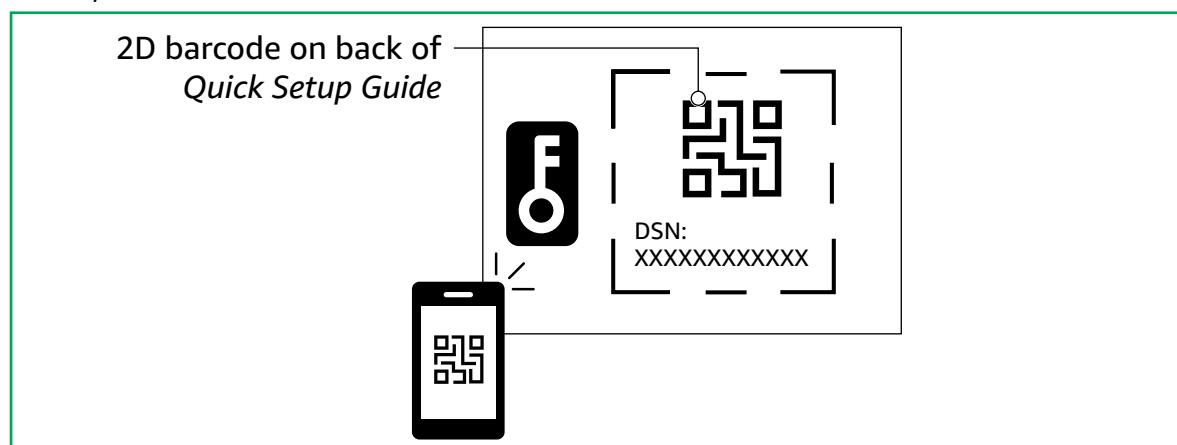

NOTICE Do not scan the barcode on packaging. If the 2D barcode scan fails or if you lose the *Quick Setup Guide*, refer to "Alternative setup methods" on page 5.


Alternative Setup Methods

Option 1: Setting Up with the 2D Barcode on the Product

Use these instructions if you don't have the Quick Setup Guide.

- Download the latest version of [the Alexa app](#) from the app store, and log in.
- Turn off the light and unscrew the light bulb from the socket.
- In the Alexa app, tap **More** from the bottom menu, then tap **Add a Device**.
- Tap **Light, Amazon Basics**, then choose **Amazon Basics Light Bulb**.
- Scan the 2D barcode on the light bulb when prompted by the app.

NOTICE Do not scan the barcode on packaging. If the barcode scan fails, refer to "Option 2: Set Up without the Barcode" on page 5.

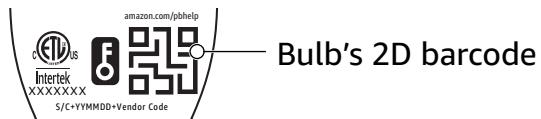

- Screw the light bulb back into the socket and turn on the light.
- Follow the steps in the Alexa app to complete setup.

Option 2: Set Up without the Barcode

Use these instructions if the 2D barcode setup does not work.

1. Screw in the light bulb, then turn on the light.
2. In the Alexa app, tap **More** from the bottom menu, then tap **Add a Device**.
3. Tap **Light, Amazon Basics**, then choose **Amazon Basics Light Bulb**.
4. When prompted to scan the barcode, tap **DON'T HAVE A BARCODE?**
5. Tap **NEXT**, then follow the on-screen instructions to complete setup.

Using the Smart Bulb

- To use the Alexa app, tap Devices from the bottom menu, then tap Lights.
- Use the voice control on your Amazon Alexa. (For example, "Alexa, turn on living room light.")

Changing the Light Style

To change the light color, light temperature, or brightness:

- Use the Alexa app.
- OR
- Use the voice control on your Amazon Alexa. For example, you could say:
 - "Alexa, set living room light to blue."
 - "Alexa, set living room light to warm white."
 - "Alexa, set living room light to 50%."

Understanding LEDs

Light bulb	Status
Flashes once softly, then remains soft white at full brightness	Bulb is connected
Flashes five times quickly, then flashes twice softly in soft white	Factory reset is complete, and the bulb is ready for setup again

Changing Settings with Alexa

Use the Alexa app to rename a light, add lights to a group/room, or set up routines that automatically turn a light on or off.

Resetting to Factory Defaults

- Delete your light bulb from the Alexa app to factory reset the bulb.
- OR
- Use a light switch to quickly turn the light on and off five times. When you turn the light on the sixth time, the bulb flashes quickly five times, then flashes twice softly. This indicates that the bulb has been factory reset, and it is ready for setup again.

Troubleshooting

If the smart bulb is not functioning properly, try the following solutions.

Problem

Light bulb does not turn on.

Solutions

- ▶ Make sure that the light switch is turned on.
- ▶ If installed in a lamp, make sure that it is plugged into a working power outlet.

Problem

Alexa app cannot find or connect to the smart bulb.

Solutions

- ▶ Make sure that you scan the 2D barcode on the *Quick Setup Guide* or the 2D barcode at the bottom of the light bulb during setup. Do not scan the barcode on the packaging for setup.
- ▶ Make sure that your phone/tablet and the Alexa app are updated to the latest software version.
- ▶ Make sure that your phone/tablet and smart LED light bulb are connected to the same 2.4GHz Wi-Fi network. The bulb is not compatible with 5GHz networks.
- ▶ If you have a dual Wi-Fi router and both network signals have the same name, rename one and try reconnecting to the 2.4GHz network.
- ▶ Make sure that your phone/tablet is within **9 m (30 ft.)** of the smart bulb.
- ▶ Do a factory reset. See “Resetting to Factory Defaults.”

Problem

How do I reset the light bulb?

Solutions

- ▶ You can do a factory reset by deleting your device from the app.
- ▶ If you are not able to delete your device from Alexa app, use a light switch to quickly turn the light on and off five times. When you turn the light on the sixth time, the bulb flashes quickly five times, then flashes twice softly. This indicates that the bulb has been factory reset, and it is ready for setup again.

Problem

If I lose the Quick Setup Guide or no barcode is available, how can I set up my smart bulb?

Solutions

- ▶ You can set up your device via two alternative setup methods. The instructions can be found in “Alternative setup methods” on page 56.

Problem

Error code (-1 :-1 :-1 :-1) displays on the screen.

Solutions

- ▶ Make sure your phone has Bluetooth turned on throughout the entire setup process and the device you are trying to setup is in pairing mode. Restart your device by powering it off and on, and then set up again.

Specifications

Light type	Color changing
Base size	E12
Rated voltage	120V, 60Hz
Rated power	6 W
Lumen output	500 lumens
Lifetime	15,000 hours
Estimated yearly energy cost	\$1.14 per year
Wi-Fi	2.4GHz 802.11 b/g/n
Operating humidity	0%-85%RH, non-condensing
Dimmable	Yes
Color temperature	2200K to 6500K

Legal Notices

Trademarks



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Amazon.com Services LLC is under license. Other trademarks and trade names are those of their respective owners.

FCC - Supplier's Declaration of Conformity

Unique Identifier	B0DM9LKW2T - Amazon Basics Smart E12 Bulb, 2.4 GHz Wi-Fi, works with Alexa, color changing, 2 pack B0DM9LR62K - Amazon Basics Smart E12 Bulb, 2.4 GHz Wi-Fi, works with Alexa, color changing, 4 pack
Responsible Party	Amazon.com Services LLC.
U.S. Contact Information	410 Terry Ave N. Seattle, WA 98109 USA
Telephone Number	(206) 266-1000

FCC Compliance Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) this device may not cause harmful interference, and
 - (2) this device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ▶ Reorient or relocate the receiving antenna.
- ▶ Increase the separation between the equipment and receiver.
- ▶ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ▶ Consult the dealer or an experienced radio / TV technician for help.

RF Warning Statement: The device has been evaluated to meet general RF exposure requirements. This device should be installed and operated with minimum distance of **20 cm (8 in.)** between the radiator and your body

Canada IC Notice

- ▶ This device contains license-exempt transmitter(s) / receiver(s) that comply with Innovation, Science and Economic Development Canada's License-exempt RSS(s). Operation is subject to the following two conditions:
 - (1) this device may not cause interference, and
 - (2) this device must accept any interference, including interference that may cause undesired operation of the device.
- ▶ This equipment complies with Industry Canada radiation exposure limits set forth for an uncontrolled environment.
- ▶ This Class B digital apparatus complies with Canadian **CAN ICES(B) / NMB(B)** standard.
- ▶ This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of **20 cm (8 in.)** between the radiator and any part of your body

Feedback and Help

We would love to hear your feedback. Please consider leaving a rating and review through your purchase orders. If you need help with your product, log in to your account and navigate to the customer service / contact us page.

Avis d'Industrie Canada (IC)

- Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux normes RSS applicables aux appareils exempts de licence d'Innovation, Science et Développement économique Canada. Son fonctionnement est assujetti aux deux conditions suivantes :
 - (1) Cet appareil ne doit pas produire d'interférences;
 - (2) Cet appareil doit accepter les interférences, y compris les interférences susceptibles de compromettre le fonctionnement de l'appareil.
- Cet équipement est conforme aux limites d'exposition au rayonnement établies par Industrie Canada pour un environnement non contrôlé.
- Cet appareil numérique de classe B est conforme à la norme canadienne CAN ICES-003(B) / NMB-003(B).
- Cet appareil numérique de classe B est conforme à la norme canadienne CAN ICES-005(B) / NMB-005(B).
- Cet équipement est conforme aux limites d'exposition au rayonnement définies par la norme IC RSS-102 pour un environnement non contrôlé. Cet équipement doit être installé et utilisé de manière à offrir une distance minimale de 20 cm (8 po) entre le radiateur et toute partie du corps.



MISE EN GARDE NE PAS UTILISER AVEC DES GRADATEURS STANDARD. Utilisez uniquement la commande fournie avec ces instructions ou indiquée dans ces instructions pour contrôler cette ampoule. L'ampoule ne fonctionne pas correctement lorsqu'elle est connectée à un gradateur standard (incandescent) ou à une commande de gradation de lumière.



amazon.com/pbhelp

MADE IN CHINA
FABRIQUÉ EN CHINE
HECHO EN CHINA

V01-12/24