

FCC PART 27 TEST REPORT**FCC Part 27**


| | |
|--|--|
| Report Reference No..... | LCS200918146AEI |
| FCC ID..... | 2ABFV-PTL2020 |
| Date of Issue..... | October 28, 2020 |
| Testing Laboratory Name..... | Shenzhen LCS Compliance Testing Laboratory Ltd. |
| Address..... | 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China |
| Applicant's name..... | Smartec S.A.S. |
| Address..... | Carrera 116 no.15-25, Bogota, Colombia |
| Test specification..... | |
| Standard..... | FCC CFR Title 47 Part 2,Part 27 TIA-603-E: 2016 KDB971168 D01 Power Meas License Digital Systems v03r01 |
| Test Report Form No..... | LCSEMC-1.0 |
| TRF Originator..... | Shenzhen LCS Compliance Testing Laboratory Ltd. |
| Master TRF..... | Dated 2011-03 |
| Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved. | |
| This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. | |
| Test item description..... | TABLET PC |
| Trade Mark..... | PC SMART |
| Test Model..... | PCSGOB10LTE-V2 |
| Modulation Type..... | QPSK, 16QAM |
| | For AC Adapter: Input: 100-240V~, 50/60Hz, 0.5A |
| Rating..... | Output: 5V---2A DC 3.7V by Rechargeable Li-ion Battery, 5000mAh |
| Hardware version..... | G868HH_V1_20191223 |
| Software version..... | PC-SMART |
| Result..... | PASS |

Compiled by:



Jack Liu / File administrators

Supervised by:



Jin Wang / Technique principal

Approved by:



Gavin Liang/ Manager

TEST REPORT

| | | |
|-------------------|-----------------|------------------|
| Test Report No. : | LCS200918146AEI | October 28, 2020 |
| | | Date of issue |

Equipment under Test : TABLET PC

Test Model : PCSGOB10LTE-V2

Applicant : **Smartec S.A.S.**

Address : Carrera 116 no.15-25,Bogota,Colombia

Manufacturer : **Dongguan Iproda Technology Co., Ltd**

Address : No.99,C Building,Yadinan 1st Road,Shanhe Village,Qiaotou Town,Dongguan City,Guangdong Province,China

Factory : **Dongguan Iproda Technology Co., Ltd**

Address : No.99,C Building,Yadinan 1st Road,Shanhe Village,Qiaotou Town,Dongguan City,Guangdong Province,China

| | |
|---------------------|-------------|
| Test Result: | PASS |
|---------------------|-------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|------------------|---------------|-------------|
| 000 | October 28, 2020 | Initial Issue | Gavin Liang |
| | | | |
| | | | |

Contents

| | | |
|-------------|---|-----------|
| 1 | TEST STANDARDS | 5 |
| 2 | SUMMARY | 6 |
| 2.1 | General Remarks | 6 |
| 2.2 | Product Description | 6 |
| 2.3 | Equipment under Test | 8 |
| 2.4 | Short description of the Equipment under Test (EUT) | 8 |
| 2.5 | Internal Identification of AE used during the test | 8 |
| 2.6 | Normal Accessory setting | 8 |
| 2.7 | EUT configuration | 8 |
| 2.8 | Related Submittal(s) / Grant (s) | 8 |
| 2.9 | Modifications | 8 |
| 2.10 | General Test Conditions/Configurations | 8 |
| 3 | TEST ENVIRONMENT | 9 |
| 3.1 | Address of the test laboratory | 9 |
| 3.2 | Test Facility | 9 |
| 3.3 | Environmental conditions | 9 |
| 3.4 | Test Description | 9 |
| 3.5 | Equipments Used during the Test | 11 |
| 3.6 | Measurement uncertainty | 12 |
| 4 | TEST CONDITIONS AND RESULTS | 13 |
| 4.1 | Output Power | 13 |
| 4.2 | Peak-to-Average Ratio (PAR) | 19 |
| 4.3 | Occupied Bandwidth and Emission Bandwidth | 20 |
| 4.4 | Band Edge compliance | 21 |
| 1.1 | Spurious Emssion on Antenna Port | 23 |
| 4.5 | Radiated Spurious Emssion | 25 |
| 4.6 | Frequency Stability under Temperature & Voltage Variations | 30 |
| 5 | TEST SETUP PHOTOS OF THE EUT | 33 |
| 6 | EXTERNAL PHOTOS OF THE EUT | 33 |
| 7 | INTERNAL PHOTOS OF THE EUT | 33 |

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA-603-E March 2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[ANSI C63.4:2014](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

[FCC KDB971168 D01](#) Power Meas License Digital Systems v03r01

2 SUMMARY

2.1 General Remarks

| | | |
|--------------------------------|---|---------------------|
| Date of receipt of test sample | : | September 25 , 2020 |
| Testing commenced on | : | October 13, 2020 |
| Testing concluded on | : | October 23, 2020 |

2.2 Product Description

The **Smartec S.A.S.**’s Model: PCSGOB10LTE-V2 or the “EUT” as referred to in this report; more general information as follows, for more details, refer to the user’s manual of the EUT.

| | | |
|---------------------------|---|---|
| EUT | : | TABLET PC |
| Test Model | : | PCSGOB10LTE-V2 |
| Power Supply | : | For AC Adapter: Input: 100-240V~, 50/60Hz, 0.5A Output: 5V==2A DC 3.7V by Rechargeable Li-ion Battery, 5000mAh |
| Hardware Version | : | G868HH_V1_20191223 |
| Software Version | : | PC-SMART |
| Bluetooth | | |
| Frequency Range | : | 2402MHz-2480MHz |
| Bluetooth Channel Number | : | 79 Channels for Bluetooth V5.0(DSS) 40 channels for Bluetooth V5.0(DTS) |
| Bluetooth Channel Spacing | : | 1MHz for Bluetooth V5.0(DSS) 2MHz for Bluetooth V5.0(DTS) |
| Bluetooth Modulation Type | : | GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V5.0(DSS) GFSK for Bluetooth V5.0 (DTS) |
| Bluetooth Version | : | V5.0 |
| Antenna Description | : | Internal Antenna, 2.15dBi(Max.) |
| 2.4G WLAN | | |
| Frequency Range | : | 2412MHz-2462MHz |
| Channel Number | : | 11 Channels for 20MHz bandwidth(2412~2462MHz) 7 Channels for 40MHz bandwidth(2422~2452MHz) |
| Channel Spacing | : | 5MHz |
| Modulation Type | : | IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK) |
| Antenna Description | : | Internal Antenna, 2.15dBi(Max.) |
| 5.2G WLAN | | |
| Frequency Range | : | 5180MHz-5240MHz |
| Channel Number | : | 4 channels for 20MHz bandwidth(5180MHz-5240MHz) 2 channels for 40MHz bandwidth(5190MHz~5230MHz) 1 channels for 80MHz bandwidth(5210MHz) |
| Modulation Type | : | IEEE 802.11a/n/ac: OFDM(256QAM,64QAM, 16QAM, QPSK, BPSK) |
| Antenna Description | : | Internal Antenna, 2.16dBi(Max.) |
| 5.8G WLAN | | |
| Frequency Range | : | 5745MHz-5825MHz |
| Modulation Type | : | IEEE 802.11a/n/ac: OFDM(256QAM,64QAM, 16QAM, QPSK, BPSK) |

Antenna Description : Internal Antenna, 2.08dBi(Max.)

2G

Support Band : GSM 900 (EU-Band) DCS 1800 (EU-Band)
 GSM 850 (U.S.-Band) PCS 1900 (U.S.-Band)

Release Version : R99

GPRS Class : Class 12

EGPRS Class : Class 12

Type Of Modulation : GMSK for GSM/GPRS; GMSK/8PSK for EGPRS

Antenna Description : PIFA Antenna;
0.5dBi (max.) For GSM 850;
0.5dBi (max.) For PCS 1900.

3G

Support Band : WCDMA Band II (U.S.-Band)
 WCDMA Band V (U.S.-Band)
 WCDMA Band IV (U.S.-Band)
 WCDMA Band I (EU-Band)
 WCDMA Band VIII (EU-Band)

Release Version : R8

Type Of Modulation : WCDMA: QPSK,16QAM; HSDPA/HSUPA: QPSK,16QAM

Antenna Description : PIFA Antenna;
0.5dBi (max.) For WCDMA Band II;
0.5dBi (max.) For WCDMA Band V.

LTE

Support Band : E-UTRA Band 4(U.S.-Band)
 E-UTRA Band 7(U.S.-Band)

LTE Release Version : R13

Type Of Modulation : QPSK/16QAM

Antenna Description : PIFA Antenna;
0.5dBi (max.) For E-UTRA Band 4;
0.5dBi (max.) For E-UTRA Band 7.

Power Class : Class 3

GPS Receiver

Receive Frequency : 1575.42MHz

Channel Number : 1

Antenna Description : PIFA Antenna

FM

Frequency Range : 87.5MHz~108MHz

Antenna Description : Intergral Antenna

2.3 Equipment under Test

Power supply system utilised

| | | | |
|----------------------|---|---|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 120V / 60 Hz | <input type="radio"/> 115V / 60Hz |
| | | <input type="radio"/> 12 V DC | <input type="radio"/> 24 V DC |
| | | <input checked="" type="radio"/> Other (3.7V) | |

2.4 Short description of the Equipment under Test (EUT)

2.4.1 General Description

TABLET PC is subscriber equipment in the BT/BLE/2.4WIFI/5.2GWIFI/5.8GWIFI/GSM/ WCDMA/LTE/GPS/FM system. GSM/GPRS/EGPRS frequency band is Band II/V. The HSPA/UMTS frequency band is Band II/V. LTE frequency band is band 4/7. The HSPA/UMTS frequency band II and Band V test data included in this report. The TABLET PC implements such functions as RF signal receiving/transmitting, GSM/GPRS/EGPRS/ HSPA/UMTS/LTE protocol processing, video MMS service and etc. Externally it provides SIM card interface.

2.5 Normal Accessory setting

Fully charged battery was used during the test.

2.6 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

| | | |
|-----------------------------------|----------------|---|
| <input type="radio"/> Power Cable | Length (m) : | / |
| | Shield : | / |
| | Detachable : | / |
| <input type="radio"/> Multimeter | Manufacturer : | / |
| | Model No. : | / |

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2ABFV-PTL2020 filing to comply with FCC Part 27 Rules

2.8 Modifications

No modifications were implemented to meet testing criteria.

2.9 General Test Conditions/Configurations

2.10.1 Test Environment

| Environment Parameter | Selected Values During Tests | |
|-----------------------|------------------------------|----------|
| Relative Humidity | Ambient | |
| Temperature | TN | Ambient |
| Voltage | VL | DC 3.15V |
| | VN | DC 3.70V |
| | VH | DC 4.26V |

NOTE: VL=lower extreme test voltage VN=nominal voltage

VH=upper extreme test voltage TN=normal temperature

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen LCS Compliance Testing Laboratory Ltd

101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China
The sites are constructed in conformance with the requirements of ANSI C63.4 (2014) and CISPR Publication 22.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|-----------------------|--------------|
| Temperature: | 15-35 ° C |
| Humidity: | 30-60 % |
| Atmospheric pressure: | 950-1050mbar |

3.4 Test Description

Band 4 (1710-1755MHz paired with 2110-2155MHz)

| Test Item | FCC RuleNo. | Requirements | Verdict |
|---|--------------------|--|---------|
| Effective(Isotropic) Radiated Power Output Data | §2.1046, §27.50(d) | EIRP ≤ 1W; | PASS |
| Peak-Average Ratio | §2.1046, §27.50(d) | Limit≤13dB | Pass |
| Modulation Characteristics | §2.1047 | Digitalmodulation | N/A |
| Bandwidth | §2.1049 | OBW: Nolimit. EBW: Nolimit. | PASS |
| BandEdges Compliance | §2.1051, §27.53(h) | ≤ -13dBm/1%*EBW,in1 MHz bands immediately outside and adjacent to the frequency block. | PASS |
| Spurious Emission at Antenna Terminals | §2.1051, §27.53(h) | ≤ -13dBm/1MHz, from 9kHz to10 th harmonics but outside authorized operating frequency ranges. | PASS |
| Frequency Stability | §2.1055, §27.54 | Within authorized bands of operation/frequency block. | PASS |
| Radiated spurious emission | §2.1053, §27.53(h) | ≤ -13dBm/1MHz. | PASS |

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested"

Band 7 (2500-2570MHz paired with 2620-2690MHz)

| Test Item | FCC Rule No. | Requirements | Verdict |
|--|--------------------|--|---------|
| Effective(Isotropic) Radiated Output Power | §2.1046, §27.50(h) | FCC: EIRP ≤ 2W. | Pass |
| Peak-AverageRatio | §2.1046, §27.50(a) | Limit≤13dB | Pass |
| Modulation Characteristics | §2.1047 | Digital modulation | N/A |
| Bandwidth | §2.1049 | OBW: No limit. EBW: No limit. | Pass |
| Band Edges Compliance | §2.1051, §27.53(m) | More details specified in §27.53(m)(4) | Pass |
| Spurious Emission at Antenna Terminals | §2.1051, §27.53(m) | More details specified in §27.53(m)(4) | Pass |
| Field Strength of Spurious Radiation | §2.1053, §27.53(m) | More details specified in §27.53(m)(4) | Pass |
| Frequency Stability | §2.1055, §27.54 | ≤ ±2.5ppm. | Pass |

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

3.5 Equipments Used during the Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Cal Date | Due Date |
|------|--|----------------------|-----------------|------------|------------|------------|
| 1 | Power Meter | R&S | NRVS | 100444 | 2020-06-22 | 2021-06-21 |
| 2 | Power Sensor | R&S | NRV-Z81 | 100458 | 2020-06-22 | 2021-06-21 |
| 3 | Power Sensor | R&S | NRV-Z32 | 10057 | 2020-06-22 | 2021-06-21 |
| 4 | LTE Test Software | Tonscend | JS1120-1 | N/A | N/A | N/A |
| 5 | RF Control Unit | Tonscend | JS0806 | 158060009 | 2020-06-22 | 2021-06-21 |
| 6 | MXA Signal Analyzer | Agilent | N9020A | MY51250905 | 2019-11-12 | 2020-11-21 |
| 7 | WIDEBAND RADIO COMMUNICATION TESTER | R&S | CMW 500 | 103818 | 2020-06-22 | 2021-06-21 |
| 8 | DC Power Supply | Agilent | E3642A | N/A | 2019-11-14 | 2020-11-13 |
| 9 | EMI Test Software | EZ | EZ-EMC | N/A | N/A | N/A |
| 10 | 3m Full Anechoic Chamber | MRDIANZI | FAC-3M | MR009 | 2020-09-26 | 2021-09-25 |
| 11 | Positioning Controller | MF | MF7082 | MF78020803 | 2020-06-22 | 2021-06-21 |
| 12 | Active Loop Antenna | SCHWARZBECK | FMZB 1519B | 00005 | 2018-07-26 | 2021-07-25 |
| 13 | By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 2018-07-26 | 2021-07-25 |
| 14 | Horn Antenna | SCHWARZBECK | BBHA 9120D | 9120D-1925 | 2018-07-02 | 2021-07-01 |
| 15 | Broadband Horn Antenna | SCHWARZBECK | BBHA 9170 | 791 | 2020-09-20 | 2023-09-19 |
| 16 | Broadband Preamplifier | SCHWARZBECK | BBV9745 | 9719-025 | 2020-06-22 | 2021-06-21 |
| 17 | EMI Test Receiver | R&S | ESR 7 | 101181 | 2020-06-22 | 2021-06-21 |
| 18 | RS SPECTRUM ANALYZER | R&S | FSP40 | 100503 | 2019-11-14 | 2020-11-13 |
| 19 | Broadband Preamplifier | / | BP-01M18G | P190501 | 2020-06-22 | 2021-06-21 |
| 20 | RF Cable-R03m | Jye Bao | RG142 | CB021 | 2020-06-22 | 2021-06-21 |
| 21 | RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 2020-06-22 | 2021-06-21 |
| 22 | 6dB Attenuator | / | 100W/6dB | 1172040 | 2020-06-22 | 2021-06-21 |
| 23 | 3dB Attenuator | / | 2N-3dB | / | 2020-06-22 | 2021-06-21 |
| 24 | Temperature & Humidity Chamber | GUANGZHOU GOGNWEN | GDS-100 | 70932 | 2020-10-08 | 2021-10-07 |

Note: All equipment is calibrated through CHINA CEPREI LABORATORY and GUANGZHOU LISAI CALIBRATION AND TEST CO., LTD.

3.6 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to ETSI TR 100 028 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics" and is documented in the Shenzhen LCS Compliance Testing Laboratory Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen LCS Compliance Testing Laboratory Ltd. is reported:

| Test | Range | Measurement Uncertainty | Notes |
|-------------------------------------|------------|-------------------------|-------|
| Radiated Emission | 30~1000MHz | 3.10 dB | (1) |
| Radiated Emission | 1~18GHz | 3.80 dB | (1) |
| Radiated Emission | 18-40GHz | 3.90 dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 1.63 dB | (1) |
| Conducted Power | 9KHz~18GHz | 0.61 dB | (1) |
| Spurious RF Conducted Emission | 9KHz~40GHz | 1.22 dB | (1) |
| Band Edge Compliance of RF Emission | 9KHz~40GHz | 1.22 dB | (1) |
| Occupied Bandwidth | 9KHz~40GHz | - | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4 TEST CONDITIONS AND RESULTS


4.1 Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW 500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

4.1.1. Conducted Output Power

TEST CONFIGURATION

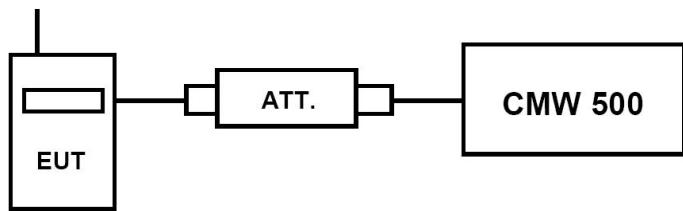

TEST PROCEDURE

Conducted Power Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a CMW 500 by an Att.
- c) EUT Communicate with CMW 500 then selects a channel for testing.
- d) Add a correction factor to the display CMW 500, and then test.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4, LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 4, LTE FDD Band 7.
2. For E-UTRA Band 4, please refer to Appendix F: Section F.1
3. For E-UTRA Band 7, please refer to Appendix G: Section G.1

4.1.2. Radiated Output Power

LIMIT


This is the test for the maximum radiated power from the EUT.

Per Part 27.50(d) (4) specifies, Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755MHz band are limited to 1W EIRP. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in this band must employ a means for limiting power to the minimum necessary for successful communications.

Per Part 27.50(c) (10) specifies, Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

Per Part 27.50(h) (2) specifies Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST CONFIGURATION

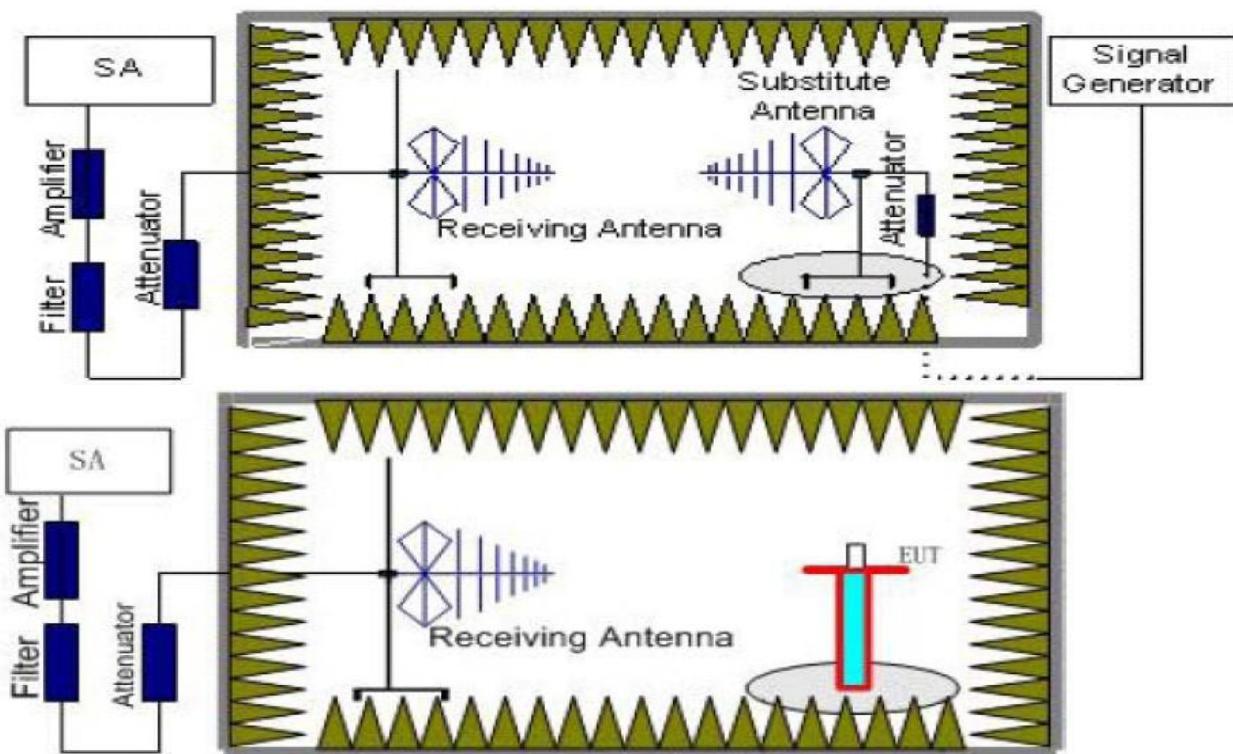

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed

to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

TEST RESULTS

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4; recorded worst case for each Channel Bandwidth of LTE FDD Band 4.
2. $EIRP = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
3. $ERP = EIRP - 2.15\text{dBi}$ as EIRP by subtracting the gain of the dipole.
4. Margin = Emission Level - Limit
5. We test the H direction and V direction recorded worst case

LTE FDD Band 4_Channel Bandwidth 1.4MHz_QPSK

| Frequency (MHz) | P_{Mea} (dBm) | P_{cl} (dB) | G_a Antenna Gain(dB) | P_{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|--------------------------|-------------|-------------|--------------|
| 1710.7 | -18.54 | 3.93 | 9.05 | 34.96 | 21.54 | 30.00 | -8.46 | V |
| 1732.5 | -17.32 | 3.93 | 8.89 | 35.01 | 22.65 | 30.00 | -7.35 | V |
| 1754.3 | -17.06 | 3.94 | 8.76 | 35.08 | 22.84 | 30.00 | -7.16 | V |

LTE FDD Band 4_Channel Bandwidth 3MHz_QPSK

| Frequency (MHz) | P_{Mea} (dBm) | P_{cl} (dB) | G_a Antenna Gain(dB) | P_{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|--------------------------|-------------|-------------|--------------|
| 1711.5 | -18.40 | 3.93 | 9.05 | 34.96 | 21.68 | 30.00 | -8.32 | V |
| 1732.5 | -17.09 | 3.93 | 8.89 | 35.01 | 22.88 | 30.00 | -7.12 | V |
| 1753.5 | -18.58 | 3.94 | 8.76 | 35.08 | 21.32 | 30.00 | -8.68 | V |

LTE FDD Band 4_Channel Bandwidth 5MHz_QPSK

| Frequency (MHz) | P_{Mea} (dBm) | P_{cl} (dB) | G_a Antenna Gain(dB) | P_{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|--------------------------|-------------|-------------|--------------|
| 1712.5 | -18.76 | 3.93 | 9.05 | 34.96 | 21.32 | 30.00 | -8.68 | V |
| 1732.5 | -18.24 | 3.93 | 8.89 | 35.01 | 21.73 | 30.00 | -8.27 | V |
| 1752.5 | -18.09 | 3.94 | 8.76 | 35.08 | 21.81 | 30.00 | -8.19 | V |

LTE FDD Band 4_Channel Bandwidth 10MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1715.0 | -17.05 | 3.93 | 9.05 | 34.96 | 23.03 | 30.00 | -6.97 | V |
| 1732.5 | -17.11 | 3.93 | 8.89 | 35.01 | 22.86 | 30.00 | -7.14 | V |
| 1750.0 | -17.57 | 3.94 | 8.76 | 35.08 | 22.33 | 30.00 | -7.67 | V |

LTE FDD Band 4_Channel Bandwidth 15MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1717.5 | -17.18 | 3.93 | 9.05 | 34.96 | 22.90 | 30.00 | -7.10 | V |
| 1732.5 | -17.92 | 3.93 | 8.89 | 35.01 | 22.05 | 30.00 | -7.95 | V |
| 1747.5 | -17.43 | 3.94 | 8.76 | 35.08 | 22.47 | 30.00 | -7.53 | V |

LTE FDD Band 4_Channel Bandwidth 20MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1720.0 | -18.23 | 3.93 | 9.05 | 34.96 | 21.85 | 30.00 | -8.15 | V |
| 1732.5 | -18.32 | 3.93 | 8.89 | 35.01 | 21.65 | 30.00 | -8.35 | V |
| 1745.0 | -17.24 | 3.94 | 8.76 | 35.08 | 22.66 | 30.00 | -7.34 | V |

LTE FDD Band 4_Channel Bandwidth 1.4MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1710.7 | -19.66 | 3.93 | 9.05 | 34.96 | 20.42 | 30.00 | -9.58 | V |
| 1732.5 | -18.39 | 3.93 | 8.89 | 35.01 | 21.58 | 30.00 | -8.42 | V |
| 1754.3 | -18.78 | 3.94 | 8.76 | 35.08 | 21.12 | 30.00 | -8.88 | V |

LTE FDD Band 4_Channel Bandwidth 3MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1711.5 | -19.65 | 3.93 | 9.05 | 34.96 | 20.43 | 30.00 | -9.57 | V |
| 1732.5 | -19.67 | 3.93 | 8.89 | 35.01 | 20.30 | 30.00 | -9.70 | V |
| 1753.5 | -19.48 | 3.94 | 8.76 | 35.08 | 20.42 | 30.00 | -9.58 | V |

LTE FDD Band 4_Channel Bandwidth 5MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1712.5 | -19.95 | 3.93 | 9.05 | 34.96 | 20.13 | 30.00 | -9.87 | V |
| 1732.5 | -18.14 | 3.93 | 8.89 | 35.01 | 21.83 | 30.00 | -8.17 | V |
| 1752.5 | -19.70 | 3.94 | 8.76 | 35.08 | 20.20 | 30.00 | -9.80 | V |

LTE FDD Band 4_Channel Bandwidth 10MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1715.0 | -19.11 | 3.93 | 9.05 | 34.96 | 20.97 | 30.00 | -9.03 | V |
| 1732.5 | -18.17 | 3.93 | 8.89 | 35.01 | 21.80 | 30.00 | -8.20 | V |
| 1750.0 | -19.70 | 3.94 | 8.76 | 35.08 | 20.20 | 30.00 | -9.80 | V |

LTE FDD Band 4_Channel Bandwidth 15MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1717.5 | -19.41 | 3.93 | 9.05 | 34.96 | 20.67 | 30.00 | -9.33 | V |
| 1732.5 | -19.36 | 3.93 | 8.89 | 35.01 | 20.61 | 30.00 | -9.39 | V |
| 1747.5 | -19.95 | 3.94 | 8.76 | 35.08 | 19.95 | 30.00 | -10.05 | V |

LTE FDD Band 4_Channel Bandwidth 20MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1720.0 | -18.51 | 3.93 | 9.05 | 34.96 | 21.57 | 30.00 | -8.43 | V |
| 1732.5 | -18.16 | 3.93 | 8.89 | 35.01 | 21.81 | 30.00 | -8.19 | V |
| 1745.0 | -18.06 | 3.94 | 8.76 | 35.08 | 21.84 | 30.00 | -8.16 | V |

LTE FDD Band 7_Channel Bandwidth 5MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|-----------------|-------------|-------------|--------------|
| 2502.5 | -18.27 | 4.32 | 6.80 | 36.14 | 20.35 | 33.01 | -12.66 | V |
| 2535.0 | -18.43 | 4.32 | 6.61 | 36.17 | 20.03 | 33.01 | -12.98 | V |
| 2567.5 | -18.05 | 4.33 | 6.57 | 36.22 | 20.41 | 33.01 | -12.60 | V |

LTE FDD Band 7_Channel Bandwidth 10MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|-----------------|-------------|-------------|--------------|
| 2505.0 | -18.29 | 4.32 | 6.80 | 36.14 | 20.33 | 33.01 | -12.68 | V |
| 2535.0 | -18.01 | 4.32 | 6.61 | 36.17 | 20.45 | 33.01 | -12.56 | V |
| 2565.0 | -18.62 | 4.33 | 6.57 | 36.22 | 19.84 | 33.01 | -13.17 | V |

LTE FDD Band 7_Channel Bandwidth 15MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|-----------------|-------------|-------------|--------------|
| 2507.5 | -18.29 | 4.32 | 6.80 | 36.14 | 20.33 | 33.01 | -12.68 | V |
| 2535.0 | -18.83 | 4.32 | 6.61 | 36.17 | 19.63 | 33.01 | -13.38 | V |
| 2562.5 | -18.84 | 4.33 | 6.57 | 36.22 | 19.62 | 33.01 | -13.39 | V |

LTE FDD Band 7_Channel Bandwidth 20MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|-----------------|-------------|-------------|--------------|
| 2510.0 | -18.69 | 4.32 | 6.80 | 36.14 | 19.93 | 33.01 | -13.08 | V |
| 2535.0 | -18.50 | 4.32 | 6.61 | 36.17 | 19.96 | 33.01 | -13.05 | V |
| 2560.0 | -18.27 | 4.33 | 6.57 | 36.22 | 20.19 | 33.01 | -12.82 | V |

LTE FDD Band 7_Channel Bandwidth 5MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|-----------------|-------------|-------------|--------------|
| 2502.5 | -19.49 | 4.32 | 6.80 | 36.14 | 19.13 | 33.01 | -13.88 | V |
| 2535.0 | -19.31 | 4.32 | 6.61 | 36.17 | 19.15 | 33.01 | -13.86 | V |
| 2567.5 | -19.96 | 4.33 | 6.57 | 36.22 | 18.50 | 33.01 | -14.51 | V |

LTE FDD Band 7_Channel Bandwidth 10MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|-----------------|-------------|-------------|--------------|
| 2505.0 | -19.46 | 4.32 | 6.80 | 36.14 | 19.16 | 33.01 | -13.85 | V |
| 2535.0 | -19.30 | 4.32 | 6.61 | 36.17 | 19.16 | 33.01 | -13.85 | V |
| 2565.0 | -19.24 | 4.33 | 6.57 | 36.22 | 19.22 | 33.01 | -13.79 | V |

LTE FDD Band 7_Channel Bandwidth 15MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|-----------------|-------------|-------------|--------------|
| 2507.5 | -19.06 | 4.32 | 6.80 | 36.14 | 19.56 | 33.01 | -13.45 | V |
| 2535.0 | -19.57 | 4.32 | 6.61 | 36.17 | 18.89 | 33.01 | -14.12 | V |
| 2562.5 | -19.29 | 4.33 | 6.57 | 36.22 | 19.17 | 33.01 | -13.84 | V |

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM


| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|-----------------|-------------|-------------|--------------|
| 2510.0 | -19.27 | 4.32 | 6.80 | 36.14 | 19.35 | 33.01 | -13.66 | V |
| 2535.0 | -19.23 | 4.32 | 6.61 | 36.17 | 19.23 | 33.01 | -13.78 | V |
| 2560.0 | -19.10 | 4.33 | 6.57 | 36.22 | 19.36 | 33.01 | -13.65 | V |

4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

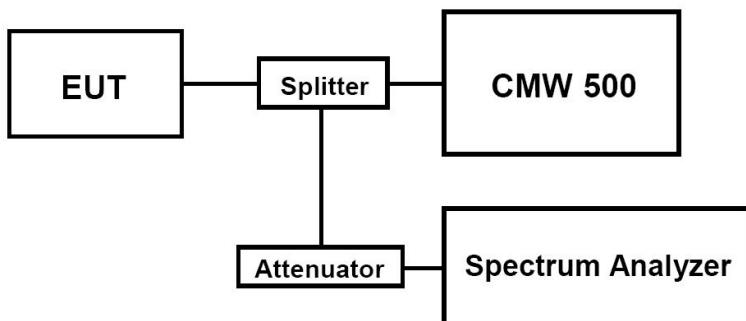

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:


6. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4, LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 4, LTE FDD Band 7.
7. For E-UTRA Band 4, please refer to Appendix F: Section F.2
8. For E-UTRA Band 7, please refer to Appendix G: Section G.2

4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

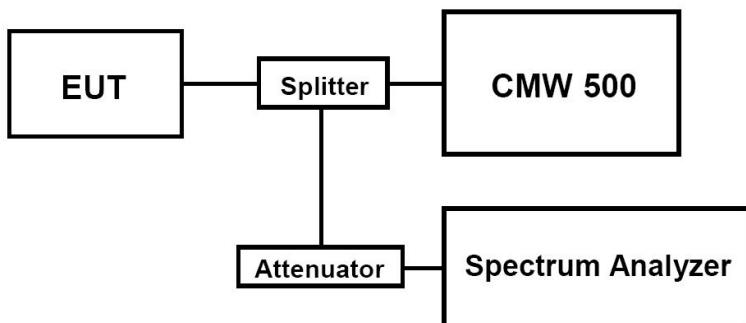

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, $VBW \geq 3$ times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4, LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 4, LTE FDD Band 7.
2. For E-UTRA Band 4, please refer to Appendix F: Section F.3
3. For E-UTRA Band 7, please refer to Appendix G: Section G.3

4.4 Band Edge compliance

LIMIT

For LTE FDD Band 4: Per § 27.53(h): For operations in the 1710 – 1755 MHz and 2110 – 2155 MHz bands, the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.


For LTE FDD Band 7: Per FCC §27.53 (m)(4): For mobile digital stations, the attenuation factor shall be not less than:

- 40+10logP dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge,
- 43+10logP dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge, and
- 55+10logP dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB). [§ 27.53(m)(4)]

In addition, the attenuation factor (fixed limit) shall not be less than:

- 43+10logP dB on all frequencies between 2490.5 MHz and 2496 MHz, and
- 55+10logP dB at or below 2490.5 MHz. [§ 27.53(m)(4)]

TEST CONFIGURATION

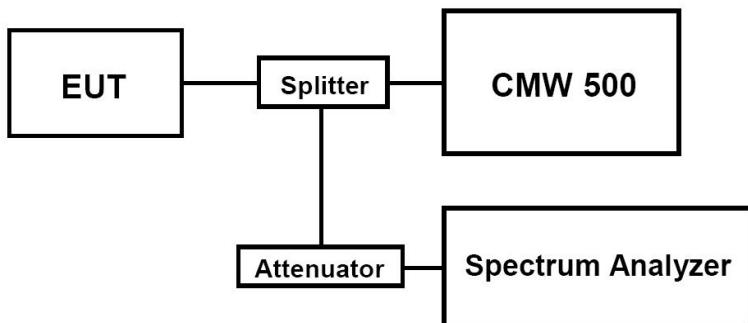

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS

Remark:

5. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4, LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 4, LTE FDD Band 7.
6. For E-UTRA Band 4, please refer to Appendix F: Section F.4
7. For E-UTRA Band 7, please refer to Appendix G: Section G.4

1.1 Spurious Emission on Antenna Port

LIMIT

For LTE FDD Band 4: Per § 27.53(h): For operations in the 1710 – 1755 MHz and 2110 – 2155 MHz bands, the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.


For LTE FDD Band 7: Per FCC §27.53 (m)(4): For mobile digital stations, the attenuation factor shall be not less than:

- 40+10logP dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge,
- 43+10logP dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge, and
- 55+10logP dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB). [§ 27.53(m)(4)]

In addition, the attenuation factor (fixed limit) shall not be less than:

- 43+10logP dB on all frequencies between 2490.5 MHz and 2496 MHz, and
- 55+10logP dB at or below 2490.5 MHz. [§ 27.53(m)(4)]

TEST CONFIGURATION

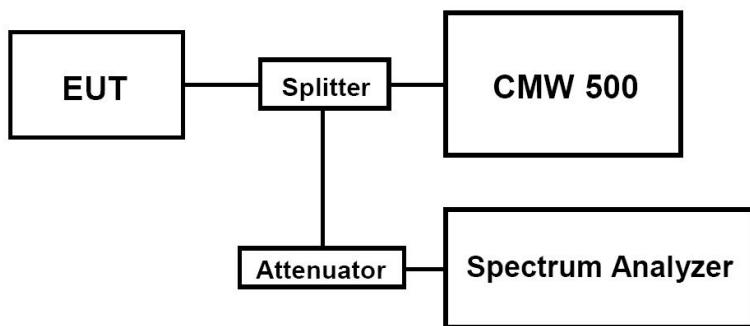

TEST PROCEDURE

The EUT was setup according to TIA-603-E

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW 500 by a Directional Couple.
- c. EUT Communicate with CMW 500, then select a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.
- e. The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.
- f. Please refer to following tables for test antenna conducted emissions.

| Working Frequency | Sub range (GHz) | RBW | VBW | Sweep time (s) |
|-------------------|-------------------|-------|-------|----------------|
| LTE FDD Band 4 | 0.000009~0.000015 | 1KHz | 3KHz | Auto |
| | 0.000015~0.03 | 10KHz | 30KHz | Auto |
| | 0.03~26 | 1 MHz | 3 MHz | Auto |
| LTE FDD Band 7 | 0.000009~0.000015 | 1KHz | 3KHz | Auto |
| | 0.000015~0.03 | 10KHz | 30KHz | Auto |
| | 0.03~26 | 1 MHz | 3 MHz | Auto |

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4, LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 4, LTE FDD Band 7.
2. For E-UTRA Band 4, please refer to Appendix F: Section F.5
3. For E-UTRA Band 7, please refer to Appendix G: Section G.5

4.5 Radiated Spurious Emission

LIMIT

For LTE FDD Band 4: Per § 27.53(h): For operations in the 1710 – 1755 MHz and 2110 – 2155 MHz bands, the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.


For LTE FDD Band 7: Per FCC §27.53 (m)(4): For mobile digital stations, the attenuation factor shall be not less than:

- $40 + 10 \log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge,
- $43 + 10 \log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge, and
- $55 + 10 \log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB). [§ 27.53(m)(4)]

In addition, the attenuation factor (fixed limit) shall not be less than:

- $43 + 10 \log P$ dB on all frequencies between 2490.5 MHz and 2496 MHz, and
- $55 + 10 \log P$ dB at or below 2490.5 MHz. [§ 27.53(m)(4)]

TEST CONFIGURATION

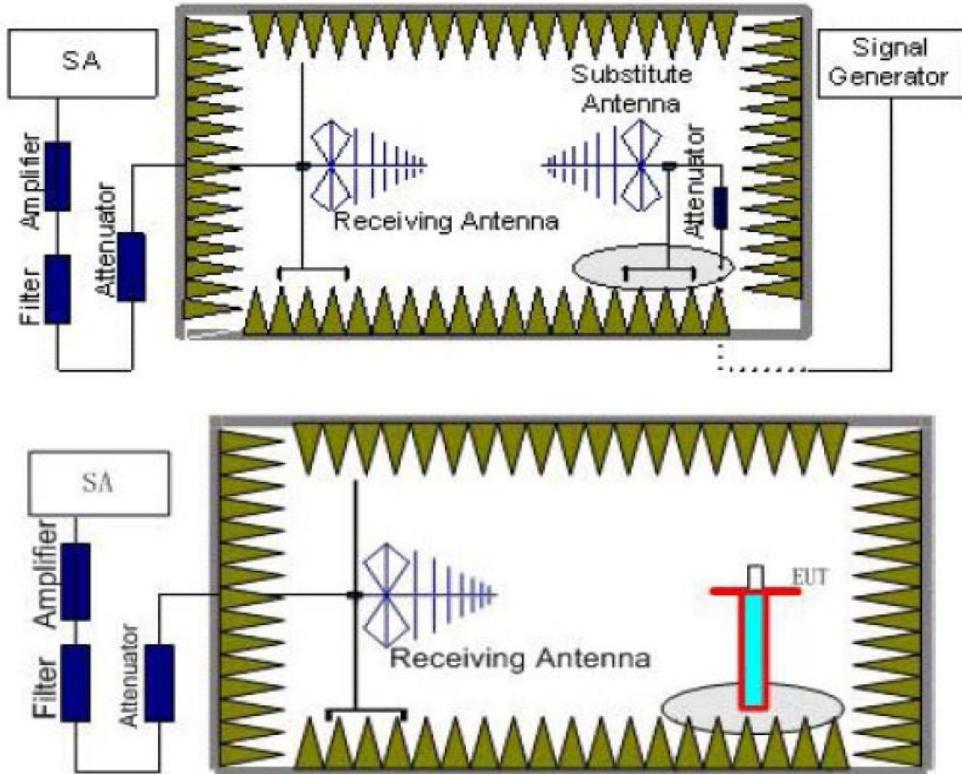

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

| Working Frequency | Subrange (GHz) | RBW | VBW | Sweep time (s) |
|-------------------|----------------|--------|--------|----------------|
| LTE FDD Band 4 | 0.00009~0.15 | 1KHz | 3KHz | 30 |
| | 0.00015~0.03 | 10KHz | 30KHz | 10 |
| | 0.03~1 | 100KHz | 300KHz | 10 |
| | 1~2 | 1 MHz | 3 MHz | 2 |
| | 2~5 | 1 MHz | 3 MHz | 3 |
| | 5~8 | 1 MHz | 3 MHz | 3 |
| | 8~11 | 1 MHz | 3 MHz | 3 |
| | 11~14 | 1 MHz | 3 MHz | 3 |
| | 14~18 | 1 MHz | 3 MHz | 3 |
| LTE FDD Band 7 | 0.00009~0.15 | 1KHz | 3KHz | 30 |
| | 0.00015~0.03 | 10KHz | 30KHz | 10 |
| | 0.03~1 | 100KHz | 300KHz | 10 |
| | 1~2 | 1 MHz | 3 MHz | 2 |
| | 2~5 | 1 MHz | 3 MHz | 3 |
| | 5~8 | 1 MHz | 3 MHz | 3 |

| Frequency | Channel | Frequency Range | Verdict |
|----------------|---------|-----------------|---------|
| LTE FDD Band 4 | Low | 9KHz -18GHz | PASS |
| | Middle | 9KHz -18GHz | PASS |
| | High | 9KHz -18GHz | PASS |
| LTE FDD Band 7 | Low | 9KHz -26GHz | PASS |
| | Middle | 9KHz -26GHz | PASS |
| | High | 9KHz -26GHz | PASS |

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4 and LTE FDD Band 7.
2. recorded worst case for each Channel Bandwidth of LTE FDD Band 4 and LTE FDD Band 7.
3. We were not recorded other points as values lower than limits.
4. Power(EIRP)=P_{Mea}+ P_{Ag} - P_{cl} + G_a
5. Margin = EIRP - Limit

LTE FDD Band 4_Channel Bandwidth 20MHz_QPSK_Low Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3440.0 | -42.80 | 4.62 | 3.00 | 9.81 | -37.61 | -13.00 | -24.61 | H |
| 5160.0 | -53.80 | 5.94 | 3.00 | 10.86 | -48.88 | -13.00 | -35.88 | H |
| 3440.0 | -44.91 | 4.62 | 3.00 | 9.81 | -39.72 | -13.00 | -26.72 | V |
| 5160.0 | -46.01 | 5.94 | 3.00 | 10.86 | -41.09 | -13.00 | -28.09 | V |

LTE FDD Band 4_Channel Bandwidth 20MHz_QPSK_Middle Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3465.0 | -45.99 | 4.63 | 3.00 | 9.84 | -40.78 | -13.00 | -27.78 | H |
| 5197.5 | -53.44 | 5.94 | 3.00 | 10.86 | -48.52 | -13.00 | -35.52 | H |
| 3465.0 | -41.48 | 4.63 | 3.00 | 9.84 | -36.27 | -13.00 | -23.27 | V |
| 5197.5 | -51.22 | 5.94 | 3.00 | 10.86 | -46.30 | -13.00 | -33.30 | V |

LTE FDD Band 4_Channel Bandwidth 20MHz_QPSK_High Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3490.0 | -42.19 | 4.65 | 3.00 | 9.9 | -36.94 | -13.00 | -23.94 | H |
| 5235.0 | -46.97 | 5.95 | 3.00 | 10.91 | -42.01 | -13.00 | -29.01 | H |
| 3490.0 | -42.04 | 4.65 | 3.00 | 9.9 | -36.79 | -13.00 | -23.79 | V |
| 5235.0 | -46.87 | 5.95 | 3.00 | 10.91 | -41.91 | -13.00 | -28.91 | V |

LTE FDD Band 4_Channel Bandwidth 20MHz_16QAM_Low Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3440.0 | -43.80 | 4.62 | 3.00 | 9.81 | -38.61 | -13.00 | -25.61 | H |
| 5160.0 | -50.89 | 5.94 | 3.00 | 10.86 | -45.97 | -13.00 | -32.97 | H |
| 3440.0 | -40.88 | 4.62 | 3.00 | 9.81 | -35.69 | -13.00 | -22.69 | V |
| 5160.0 | -51.58 | 5.94 | 3.00 | 10.86 | -46.66 | -13.00 | -33.66 | V |

LTE FDD Band 4_Channel Bandwidth 20MHz_16QAM_Middle Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3465.0 | -45.98 | 4.63 | 3.00 | 9.84 | -40.77 | -13.00 | -27.77 | H |
| 5197.5 | -52.28 | 5.94 | 3.00 | 10.86 | -47.36 | -13.00 | -34.36 | H |
| 3465.0 | -42.86 | 4.63 | 3.00 | 9.84 | -37.65 | -13.00 | -24.65 | V |
| 5197.5 | -51.07 | 5.94 | 3.00 | 10.86 | -46.15 | -13.00 | -33.15 | V |

LTE FDD Band 4_Channel Bandwidth 20MHz_16QAM_High Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3490.0 | -40.77 | 4.65 | 3.00 | 9.9 | -35.52 | -13.00 | -22.52 | H |
| 5235.0 | -50.93 | 5.95 | 3.00 | 10.91 | -45.97 | -13.00 | -32.97 | H |
| 3490.0 | -43.61 | 4.65 | 3.00 | 9.9 | -38.36 | -13.00 | -25.36 | V |
| 5235.0 | -52.69 | 5.95 | 3.00 | 10.91 | -47.73 | -13.00 | -34.73 | V |

LTE FDD Band 7_Channel Bandwidth 20MHz_QPSK_Low Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 5020.0 | -45.54 | 5.88 | 3.00 | 10.77 | -40.65 | -25.00 | -15.65 | H |
| 7530.0 | -49.72 | 7.12 | 3.00 | 12.26 | -44.58 | -25.00 | -19.58 | H |
| 5020.0 | -43.16 | 5.88 | 3.00 | 10.77 | -38.27 | -25.00 | -13.27 | V |
| 7530.0 | -55.04 | 7.12 | 3.00 | 12.26 | -49.90 | -25.00 | -24.90 | V |

LTE FDD Band 7_Channel Bandwidth 20MHz_QPSK_Middle Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 5070.0 | -42.71 | 5.9 | 3.00 | 10.81 | -37.80 | -25.00 | -12.80 | H |
| 7605.0 | -49.94 | 7.19 | 3.00 | 12.32 | -44.81 | -25.00 | -19.81 | H |
| 5070.0 | -44.03 | 5.9 | 3.00 | 10.81 | -39.12 | -25.00 | -14.12 | V |
| 7605.0 | -47.35 | 7.19 | 3.00 | 12.32 | -42.22 | -25.00 | -17.22 | V |

LTE FDD 7_Channel Bandwidth 20MHz_QPSK_High Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 5120.0 | -40.62 | 5.94 | 3.00 | 10.86 | -35.70 | -25.00 | -10.70 | H |
| 7680.0 | -55.79 | 7.25 | 3.00 | 12.98 | -50.06 | -25.00 | -25.06 | H |
| 5120.0 | -40.71 | 5.94 | 3.00 | 10.86 | -35.79 | -25.00 | -10.79 | V |
| 7680.0 | -49.60 | 7.25 | 3.00 | 12.98 | -43.87 | -25.00 | -18.87 | V |

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM_Low Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 5020.0 | -42.48 | 5.88 | 3.00 | 10.77 | -37.59 | -25.00 | -12.59 | H |
| 7530.0 | -53.58 | 7.12 | 3.00 | 12.26 | -48.44 | -25.00 | -23.44 | H |
| 5020.0 | -41.69 | 5.88 | 3.00 | 10.77 | -36.80 | -25.00 | -11.80 | V |
| 7530.0 | -46.23 | 7.12 | 3.00 | 12.26 | -41.09 | -25.00 | -16.09 | V |

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM_Middle Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 5070.0 | -40.09 | 5.9 | 3.00 | 10.81 | -35.18 | -25.00 | -10.18 | H |
| 7605.0 | -49.93 | 7.19 | 3.00 | 12.32 | -44.80 | -25.00 | -19.80 | H |
| 5070.0 | -42.77 | 5.9 | 3.00 | 10.81 | -37.86 | -25.00 | -12.86 | V |
| 7605.0 | -47.30 | 7.19 | 3.00 | 12.32 | -42.17 | -25.00 | -17.17 | V |

LTE FDD Band 7_Channel Bandwidth 20MHz_16QAM_High Channel

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | Diatance | G _a Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------|---------------------------------|-----------------|-------------|-------------|--------------|
| 5120.0 | -42.36 | 5.94 | 3.00 | 10.86 | -37.44 | -25.00 | -12.44 | H |
| 7680.0 | -55.25 | 7.25 | 3.00 | 12.98 | -49.52 | -25.00 | -24.52 | H |
| 5120.0 | -40.23 | 5.94 | 3.00 | 10.86 | -35.31 | -25.00 | -10.31 | V |
| 7680.0 | -46.80 | 7.25 | 3.00 | 12.98 | -41.07 | -25.00 | -16.07 | V |


Notes: All channel bandwidth were tested, the report recorded the worst data.

4.6 Frequency Stability under Temperature & Voltage Variations

LIMIT

According to FCC §2.1055 and §27.54 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

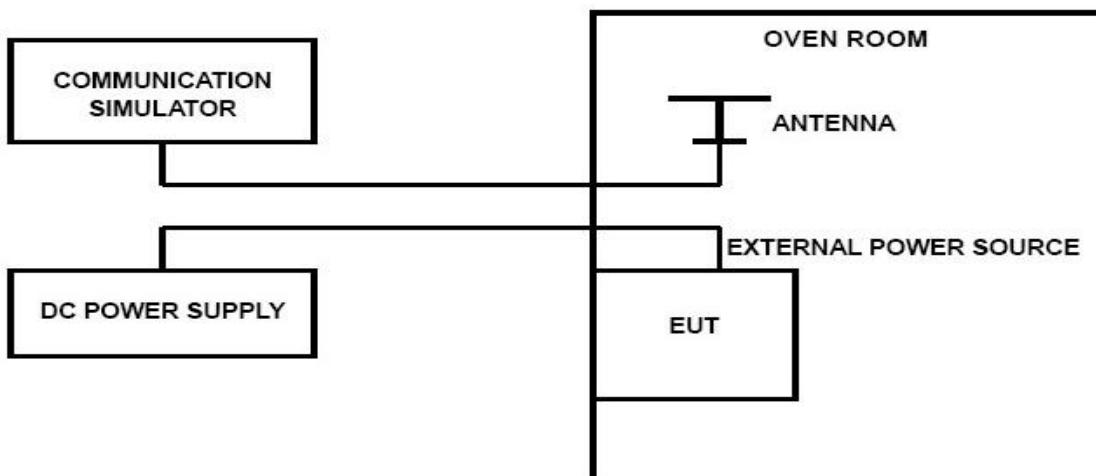

TEST PROCEDURE

The EUT was setup according to TIA-603-E

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW 500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW 500 and in a simulated call on middle channel for LTE LTE band 4; measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW 500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Remark:

We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4/7; recorded worst case for each Channel Bandwidth of LTE FDD Band 4/7.

LTE Band 4, QPSK, 1.4MHz bandwidth (worst case of all bandwidths)

| LTE FDD Band 4 | | | | | |
|----------------|------------------|---------------------|----------------------|-------------|---------|
| DC Power | Temperature (°C) | Frequency error(Hz) | Frequency error(ppm) | Limit (ppm) | Verdict |
| 3.23 | 20 | -50 | -0.029 | ±2.50 | PASS |
| 3.80 | 20 | 18 | 0.010 | ±2.50 | PASS |
| 4.37 | 20 | 46 | 0.026 | ±2.50 | PASS |
| 3.80 | -30 | 32 | 0.018 | ±2.50 | PASS |
| 3.80 | -20 | 2 | 0.001 | ±2.50 | PASS |
| 3.80 | -10 | -45 | -0.026 | ±2.50 | PASS |
| 3.80 | 0 | -12 | -0.007 | ±2.50 | PASS |
| 3.80 | 10 | -30 | -0.017 | ±2.50 | PASS |
| 3.80 | 20 | 6 | 0.003 | ±2.50 | PASS |
| 3.80 | 30 | 31 | 0.018 | ±2.50 | PASS |
| 3.80 | 40 | -49 | -0.028 | ±2.50 | PASS |
| 3.80 | 50 | 26 | 0.015 | ±2.50 | PASS |

LTE Band 4, 16QAM, 1.4MHz bandwidth (worst case of all bandwidths)

| LTE FDD Band 4 | | | | | |
|----------------|------------------|---------------------|----------------------|-------------|---------|
| DC Power | Temperature (°C) | Frequency error(Hz) | Frequency error(ppm) | Limit (ppm) | Verdict |
| 3.23 | 20 | 47 | 0.027 | ±2.50 | PASS |
| 3.80 | 20 | -14 | -0.008 | ±2.50 | PASS |
| 4.37 | 20 | -37 | -0.021 | ±2.50 | PASS |
| 3.80 | -30 | -13 | -0.007 | ±2.50 | PASS |
| 3.80 | -20 | -23 | -0.013 | ±2.50 | PASS |
| 3.80 | -10 | 4 | 0.002 | ±2.50 | PASS |
| 3.80 | 0 | -39 | -0.022 | ±2.50 | PASS |
| 3.80 | 10 | 25 | 0.014 | ±2.50 | PASS |
| 3.80 | 20 | 50 | 0.029 | ±2.50 | PASS |
| 3.80 | 30 | 20 | 0.011 | ±2.50 | PASS |
| 3.80 | 40 | 35 | 0.020 | ±2.50 | PASS |
| 3.80 | 50 | 49 | 0.028 | ±2.50 | PASS |

LTE Band 7, QPSK, 5MHz bandwidth (worst case of all bandwidths and modulation type)

| LTE FDD Band 7 | | | | | |
|----------------|------------------|---------------------|----------------------|-------------|---------|
| DC Power | Temperature (°C) | Frequency error(Hz) | Frequency error(ppm) | Limit (ppm) | Verdict |
| 3.23 | 20 | -13 | -0.005 | ±2.50 | PASS |
| 3.80 | 20 | 8 | 0.003 | ±2.50 | PASS |
| 4.37 | 20 | 10 | 0.004 | ±2.50 | PASS |
| 3.80 | -30 | 17 | 0.007 | ±2.50 | PASS |
| 3.80 | -20 | 19 | 0.007 | ±2.50 | PASS |
| 3.80 | -10 | -4 | -0.002 | ±2.50 | PASS |
| 3.80 | 0 | 17 | 0.007 | ±2.50 | PASS |
| 3.80 | 10 | -4 | -0.002 | ±2.50 | PASS |
| 3.80 | 20 | -11 | -0.004 | ±2.50 | PASS |
| 3.80 | 30 | -1 | 0.000 | ±2.50 | PASS |
| 3.80 | 40 | -10 | -0.004 | ±2.50 | PASS |
| 3.80 | 50 | 12 | 0.005 | ±2.50 | PASS |

LTE Band 7, 16QAM, 5MHz bandwidth (worst case of all bandwidths and modulation type)

| LTE FDD Band 7 | | | | | |
|----------------|------------------|---------------------|----------------------|-------------|---------|
| DC Power | Temperature (°C) | Frequency error(Hz) | Frequency error(ppm) | Limit (ppm) | Verdict |
| 3.23 | 20 | 14 | 0.006 | ±2.50 | PASS |
| 3.80 | 20 | -15 | -0.006 | ±2.50 | PASS |
| 4.37 | 20 | -13 | -0.005 | ±2.50 | PASS |
| 3.80 | -30 | 0 | 0.000 | ±2.50 | PASS |
| 3.80 | -20 | -13 | -0.005 | ±2.50 | PASS |
| 3.80 | -10 | -7 | -0.003 | ±2.50 | PASS |
| 3.80 | 0 | -7 | -0.003 | ±2.50 | PASS |
| 3.80 | 10 | 13 | 0.005 | ±2.50 | PASS |
| 3.80 | 20 | 14 | 0.006 | ±2.50 | PASS |
| 3.80 | 30 | -3 | -0.001 | ±2.50 | PASS |
| 3.80 | 40 | -9 | -0.004 | ±2.50 | PASS |
| 3.80 | 50 | -18 | -0.007 | ±2.50 | PASS |

5 Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6 External Photos of the EUT

Please refer to separated files for External Photos of the EUT.

7 Internal Photos of the EUT

Please refer to separated files for Internal Photos of the EUT.

*****End of Report*****