

---

# **User Manual**

**Tablet PC**  
**Model: TP02**

---

## Warm Tips

When using 3D display, please attention below:

### 1. Adjustment Period for your Eyes.

Generally, there is an adjustment period for watching the 3D display. 5-15 min adjustment period needed when you begin to watch the 3D play and feel mild discomfort. If you are extremely uncomfortable at that time, please stop watching at once.

### 2. People who are unsuitable to watch the 3D play:

- (1) Under the age of 6 (included) children.
- (2) People who ill with geriatric diseases, Diabetes, Hypertension, Hypotension, etc.
- (3) People who ill with Meniere's syndrome, CHD(Coronary Heart Disease), Heart Disease, Arrhythmia, etc.
- (4) People who ill with eye disease, such people include but are not limited to Glaucoma, Pinkeye, Strabismus and Heterophoria ,Anisometropia, Cataract patients, etc.
- (5) People who was eyes injured and get high myopia.
- (6) People who ill with Nervous& Mental system, and migraine patient.
- (7) People who taking cholesterol medicine.

---

(8) Other conditions and people are unsuitable to watch the 3D display.

3. It is advice that user controls the continuous time within 45 min.

Regarding over 6-year-old children, elder or people who feels uncomfortable, please be attentive to have a rest or stop watching.

4. When watching 3D display, if user feels headache, nausea, mild acid bilges at eyes or nasal root, or cause optical illusions, giddiness, tinnitus and any other poor reaction, please stop watching 3D play frame at once.

## **1. Product Specification**

(1) OS: Android 4.2.2

(2) CPU: Cortex-A7 Dual Core(A20)

(3) Memory: RAM 1G DDR3 ROM 8G, external memory max.

---

32G

- (4) Screen: 7 inch LCD, resolution 800\*1289, 5-point capacitive
- (5) RF Frequency: GSM (Four Frequency+ EDGE:GSM850/900  
DCS1800/PCS1900)  
WCDMA:BAND1-W2100/BAND 2-W1900/BAND 5-W850
- (6) Sensor: G-Sensor
- (7) Interface: Micro USB, 3.5 mm jack plug
- (8) Battery: Li-ion polymer, 3000mAh(2800mAh sufficient  
capacity), 3-4h network scanning
- (9) Dimension: 193.6(L)\*116(W)\*11(H)mm
- (10) Weight: Approx. 328g
- (11) DFU: Local upgrade
- (12) Other: Support Bluetooth, Wi-Fi
- (13) The information of battery performance depends on  
network setting and many other factors, so the result might  
different.

## **2. Product Introduction**



- (1) SIM card slot
- (2) Camera
- (3) Charge jack
- (4) Micro USB jack: Data transmit, charge or external USB flash drive by connecting PC .
- (5) HDMI output: mini-HDMI video output, support connecting the displayer with HDMI
- (6) Earphone jack: 3.5 mm jack plug
- (7) Micro-SD/TF card slot: supports external T-Flash card
- (8) Power button

---

- a. On: long press, system will enter main page
- b. Off: On main menu, press about 5 seconds, system tells "Power off""Reboot""Airplane mode", Safety choose "Power off" then click "Yes".
- c. Lock screen: short press the power button to lock or un-lock the screen

Remark: When battery runs out, system will auto power-off

(9) Volume Control

(10) Speaker

### **3. First Use**

3.1 Battery manage and charge

Please make the battery fully charge by connecting the Adapter before the first use, the first two charge please keep about 6 hours, after this two times keeping about 4 hours charging.

This Tablet PC applies built-in polymer battery, please using the standard equipped charger, the battery icon will keep running when charging; When charge finished, the icon will turn to green and stop running.

**【Remark】**

---

- a. If do not use the tablet for a long time, to avoid the damage as battery runs out, please charge and use once a month.
- b. When power off as low battery, connecting the adapter, the device would alert users to low battery charging, take a while, power on till fully charge.
- c. When charging, please make the tablet on standby. If the tablet works when charge, it will cause charge time lengthened decrease the battery's service life.

### 3.2 Power-on/off and unlock screen

- a. Power on and unlock screen

When the tablet was power off, please press the power button for 3 second to turn on, boot animation arises; after it, screen will show on lock, users would drag the unlock icon to the right then enter main interface.

- b. Sleep mode and lock screen

When the tablet is power on, please short press the power button for 1 second and the device will enter sleeping and lock mode; When use needed, short press the power button, screen lights up then enter unlock interface.

### C. Power Off

Long press the power button for 3 second at any interface,

---

shutdown confirmation interface popup then click "Yes".

Long press for 6 second if forced shutdown, the system will off automatically.



### 3.3 USB connecting

3.3.1 Apply USB to connect the PC, the USB connect windows would popup, connecting by clicking "Turn on USB storage", in this state, users would copy or delete files on memory card.

3.3.2 Host mode: Data transfer by connecting OTG and the device like U flash drive etc.



### 3.4 Surf the Internet

Settings Wi-Fi, users click "Settings" icon and choose" Wi-Fi" to enter the network setting interface. Press "On", the system will auto-scanning the nearby Wi-Fi network ;at the same time, click "scan " to make manual scanning; If fail to scan the network you need, click "Add network" to add manually.



## 4. Interface

### 4.1 Main Interface

Enter the unlock main interface, it will show up the information- Phone, Phonebook, Menu, Messaging, Internet Explorer, power quantity, Wi-Fi status, etc. Users can change the display way by "settings"; Based on users' need, create the shortcut icon, and show the apps which is you frequently used or favor in the main interface.



Whatever in any interface, back to the main interface by this soft key  . In any apps, back to the last menu by this soft key 

#### 4.2 Functional Menu Interface




Enter the Menu Interface by clicking  at main interface



### 4.3 Widgets

Click "Widgets", by touching and keep pressing the tools to show it at the desktop main interface.

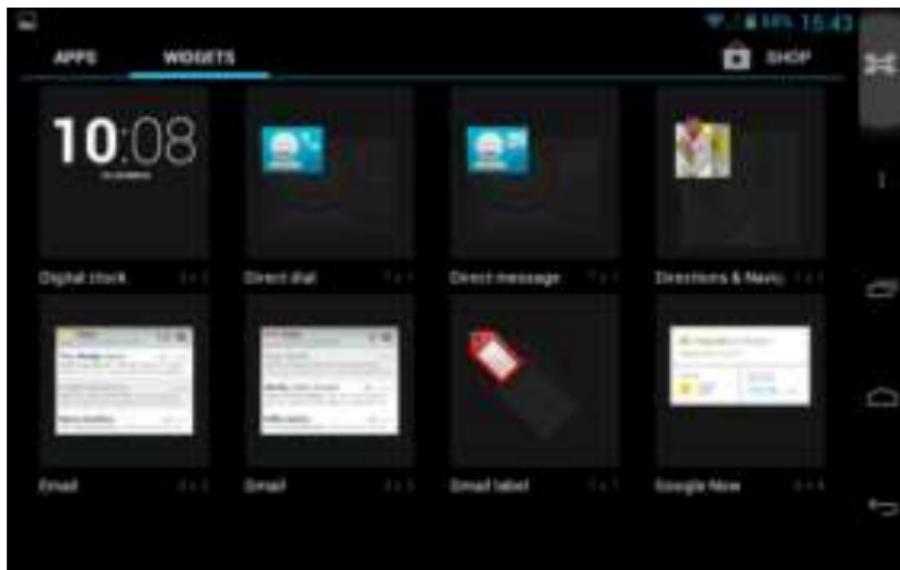

#### 4.4 Switch Multi-task Windows

Multi-task running meanwhile support, click the soft key  to check the background state and make multi-task switch.



## 5. 3DPView, 3DVplayer and 3DV games center

### 5.1 3DPView

Enter application program, open “3DPView” browser to choose the picture, slide left and right to switch the picture; 2D and 3D pictures switch by touching 2D/3D icon.




### 5.2 3DVplayer

(1) “3DVplayer” video program supports 2D/3D format video

---

## (2) Settings of video display



switch key.

Enter the apps interface, click "3DVPlayer" Local video


or "Network video"-online video, choosing the video then display.





### 5.3.3 DV Game Center

Enter this app, open the start or market interface, start by clicking the 3D games icon. If games are uninstalled, before using please download and install.

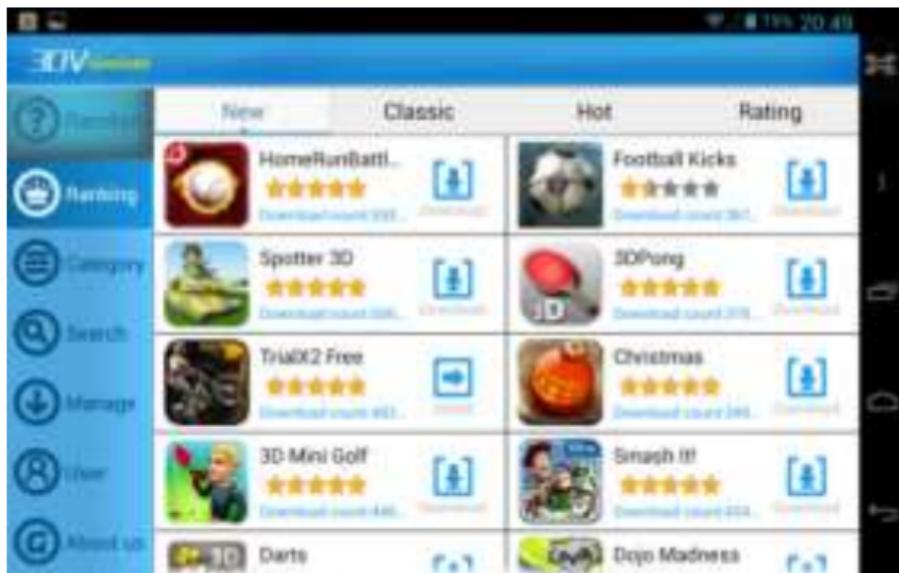

## 6. Communication function settings:

6.1 Please power off the tablet when GSM/WCDMA SIM Card plug, power on till plug finished.



6.2 Make a Phone Call: Please click  input the phone numbers, users would make calls normally after answered.



6.3 Messaging: Please click  to edit message, finished then

---

input the phone number and send.



## 7. Settings

### 7.1 Wi-Fi

Users click "Wi-Fi" and press "On", system will auto-scanning the nearby Wi-Fi network ;at the same time, click "scan " to make manual scanning; If fail to scan the network you need, click "Add network" to add manually.

### 7.2 Bluetooth

Users click "Bluetooth" and Press "On", system will auto-scanning the nearby Bluetooth device.

### 7.3 Data usage

Users would monitor the using condition of mobile network data by this setting.

### 7.4 Sound

Setting ringtone, volume control, touching tone, dial tone and

---

lock tone, etc.

## 7.5 Display

Setting brightness, fonts, Auto-rotate screen and sleeping mode; users would choose “Wallpaper” to change the theme style or choose a photo from album as desktop wallpaper.

## 7.6 GPS

Click and enter the access right of location information, click “Yes” to allow accessing my location; in turn, choose the GPS satellite positioning; If Wi-Fi on, connect the GPS satellite positioning function with Wi-Fi.

## 7.7 Apps

Check apps memory, download and running condition. Choose any apps, users can unload in tablet or move it to the TF card.

## 7.8 Storage

Check the interior memory using condition, external and interior SD card memory capacity condition, display classified the memory capacity; manage the load and unload condition of external SD card.

## 7.9 Language and input

Language and input setting, multi-countries language support: about 60 language such as simplified Chinese, complex

---

Chinese, English, French, German, etc.

## 7.10 Date and Time

Auto-assure the Date and Time, time zone; customize the time and date's using formats.


## 7.11 About Tablet



# 8. Apps installation

8.1 Support the third-party Android Apps,

8.2 Installation: Open the USB adjustment mode, click installation then enter the APK install interface, interior memory and SD card separately, click to install the APK and back the main interface, the installed apps icon will display here.

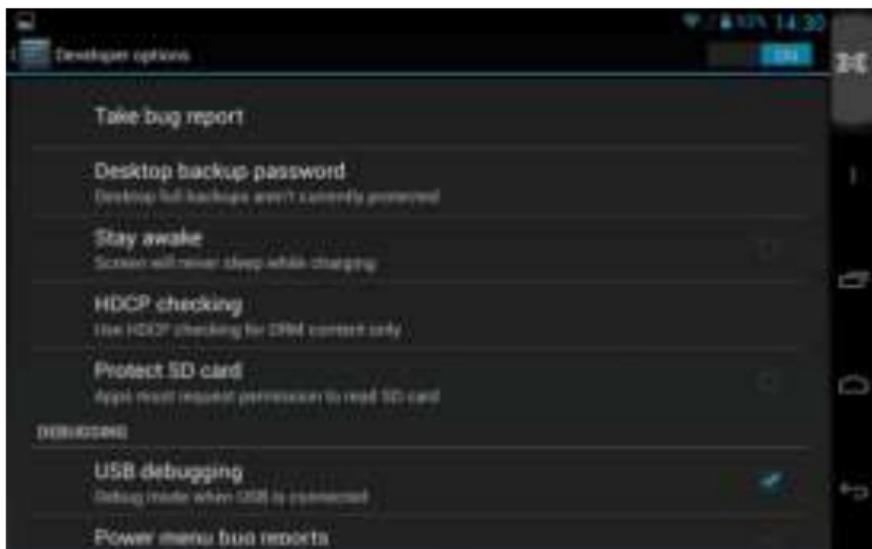

## 9. Troubleshootingz

### 9.1 Tablet power on abnormally

- (1) Check if battery power low;
- (2) Check again by connecting the charge adapter

### 9.2 Tablet auto power off when screen on or logon wallpaper arise

- (1) Power Low, please charge the tablet and boot it till fully charge.

### 9.3 The earphone fails to hear the voice

- (1) Check the volume if set 0.
- (2) Check the music files damaged or not and try to play others;  
If this file is destroyed, it might cause seriously noise or

---

staccato.

#### 9.4 Fail to copy file or music, etc

- (1) Check the tablet and device if correctly connecting
- (2) Check the interior memory space if fully
- (3) Check the USB cable if destroy

#### 9.5 Default Settings

- (1) If default the settings and delete all data, click Default

Settings at restore and reset interface, then all data in tablet will delete.

---

## Warning

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this

---

equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be located or operating in conjunction with any other antenna or transmitter. The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

