

**PRODUCT
SPECIFICATION**

Specification and Parameters:


- Three adjustable gears, on/off switch, CH, FR, automatically cycle display three gears on LED after power on.
- Short press button to adjust "CH", 1-6 adjustable.
- Press and hold button 2s, transfer to FR, A, b, F, r adjustable, then short press button to adjust FR.
- Press and hold button 5s to adjust on/off, "0" and "=" adjustable, short press button to adjust, "0" stands for "off", and "=" stands for "on".

Frequency and channel frequency table:

FR	CH	CH1	CH2	CH3	CH4	CH5	CH6
FR1/Band A	5745M	5845M	5825M	5805M	5785M	5765M	
FR2/Band b	5787M	5752M	5771M	5790M	5808M	5828M	
FR3/Band F	5740M	5780M	5780M	5800M	5820M	5840M	
FR4/Band r	5739M	5847M	5732M	5769M	5808M	5843M	

3-IN-1


Super Mini 5.8GHz FPV Transmitter +600TVL FPV Camera+Clover Antenna



**Product Instruction
Manual**

**PRODUCT
SPECIFICATION**

Super Mini 5.8GHz FPV Transmitter +600TVL FPV Camera+Clover Antenna

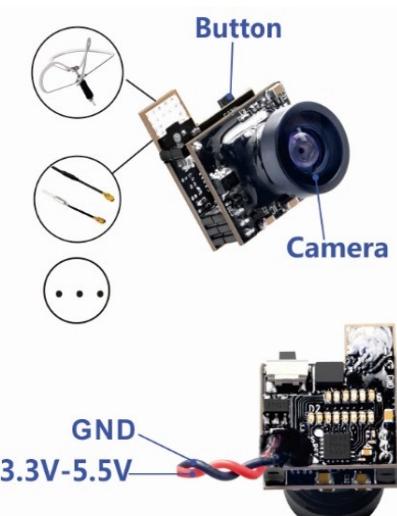

**PRODUCT
SPECIFICATION**

Operation Instruction:

Output power: 25mW(200mW)
Input power: 3.2-5V
Current consumption: 3.2V-5V,200mA(type) — 25mW
3.2V-5V,500mA(type) — 200mW
Camera resolution: 600TVL
Video system:NTSC
Mini illumination: 1 lux
Field of view: 120°viewing angle
Antenna dimensions: 22mm X 29mm diameter
Antenna: 4 lobe right hand circular polarized
Frequency: 5.8GHz 4 bands
with Raceband:5732-5847MHz
Size: 18.7*13mm(L*W)
Weight: 4.5g

FCC Rules

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radIncrease the separation between the equipment and receiverio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to c

orrect the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.