

Appendix A. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11b (20 MHz)	2412	16.70	16.17	19.45	<30.00	Pass
	2437	17.14	16.91	20.04	<30.00	Pass
	2462	15.89	16.24	19.08	<30.00	Pass
802.11g (20 MHz)	2412	14.01	14.31	17.17	<30.00	Pass
	2437	14.25	14.36	17.32	<30.00	Pass
	2462	13.62	14.35	17.01	<30.00	Pass
802.11n (20 MHz)	2412	14.02	14.27	17.16	<30.00	Pass
	2437	14.21	14.30	17.27	<30.00	Pass
	2462	13.49	14.28	16.91	<30.00	Pass
802.11n (40 MHz)	2422	14.25	14.71	17.50	<30.00	Pass
	2437	14.44	14.01	17.24	<30.00	Pass
	2452	14.21	14.81	17.53	<30.00	Pass

Note: Average Output Power (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)})$.

Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Peak Output power (dBm)	Limit (dBm)	Result
802.11b (20 MHz)	2412	18.92	18.67	21.81	<30.00	Pass
	2437	19.62	19.41	22.53	<30.00	Pass
	2462	18.52	18.77	21.66	<30.00	Pass
802.11g (20 MHz)	2412	21.19	21.49	24.35	<30.00	Pass
	2437	21.43	21.51	24.48	<30.00	Pass
	2462	20.88	21.63	24.28	<30.00	Pass
802.11n (20 MHz)	2412	21.07	21.24	24.17	<30.00	Pass
	2437	21.25	21.41	24.34	<30.00	Pass
	2462	20.88	21.57	24.25	<30.00	Pass
802.11n (40 MHz)	2422	21.32	21.91	24.64	<30.00	Pass
	2437	21.66	21.15	24.42	<30.00	Pass
	2452	21.30	22.08	24.72	<30.00	Pass

Note: Peak Output Power (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)})$.

Modulation	Frequency (MHz)	RU Config	Chain A Power (dBm)	Chain B Power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11ax (20 MHz)	2412	26/0	7.52	5.31	9.56	<30.00	Pass
		52/37	10.81	8.52	12.82	<30.00	Pass
		106/53	13.53	11.82	15.77	<30.00	Pass
		242/61	14.75	12.81	16.90	<30.00	Pass
	2437	26/0	7.51	5.35	9.57	<30.00	Pass
		52/37	11.23	8.42	13.06	<30.00	Pass
		106/53	14.31	11.71	16.21	<30.00	Pass
		242/61	17.33	14.99	19.33	<30.00	Pass
	2462	26/0	7.66	5.26	9.63	<30.00	Pass
		52/37	11.12	8.33	12.96	<30.00	Pass
		106/53	14.22	11.62	16.12	<30.00	Pass
		242/61	15.75	13.45	17.76	<30.00	Pass

Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.

Modulation	Frequency (MHz)	RU Config	Chain A Power (dBm)	Chain B Power (dBm)	Peak Output power (dBm)	Limit (dBm)	Result
802.11ax (20 MHz)	2412	26/0	14.72	13.92	17.35	<30.00	Pass
		52/37	19.41	17.46	21.55	<30.00	Pass
		106/53	22.22	20.27	24.36	<30.00	Pass
		242/61	22.66	20.63	24.77	<30.00	Pass
	2437	26/0	15.24	13.48	17.46	<30.00	Pass
		52/37	18.99	16.14	20.81	<30.00	Pass
		106/53	22.33	19.77	24.25	<30.00	Pass
		242/61	24.79	22.93	26.97	<30.00	Pass
	2462	26/0	15.38	13.29	17.47	<30.00	Pass
		52/37	18.76	16.01	20.61	<30.00	Pass
		106/53	22.13	19.68	24.09	<30.00	Pass
		242/61	23.11	21.33	25.32	<30.00	Pass

Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.

Modulation	Frequency (MHz)	RU Config	Chain A Power (dBm)	Chain B Power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11ax (40 MHz)	2422	26/0	3.66	1.64	5.78	<30.00	Pass
		52/37	6.61	4.71	8.77	<30.00	Pass
		106/53	9.82	8.06	12.04	<30.00	Pass
		242/61	13.23	11.33	15.39	<30.00	Pass
		484/65	14.13	12.15	16.26	<30.00	Pass
	2437	26/0	4.33	2.41	6.49	<30.00	Pass
		52/37	7.49	5.67	9.68	<30.00	Pass
		106/53	11.15	8.76	13.13	<30.00	Pass
		242/61	14.33	11.90	16.29	<30.00	Pass
		484/65	17.47	15.02	19.43	<30.00	Pass
	2452	26/0	4.71	1.32	6.35	<30.00	Pass
		52/37	8.04	4.81	9.73	<30.00	Pass
		106/53	11.04	8.11	12.83	<30.00	Pass
		242/61	14.24	11.43	16.07	<30.00	Pass
		484/65	16.20	13.15	17.95	<30.00	Pass


Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.

Modulation	Frequency (MHz)	RU Config	Chain A Power (dBm)	Chain B Power (dBm)	Peak Output power (dBm)	Limit (dBm)	Result
802.11ax (40 MHz)	2422	26/0	11.39	9.63	13.61	<30.00	Pass
		52/37	14.96	13.57	17.33	<30.00	Pass
		106/53	18.14	16.36	20.35	<30.00	Pass
		242/61	21.93	20.44	24.26	<30.00	Pass
		484/65	22.41	20.39	24.53	<30.00	Pass
	2437	26/0	12.25	10.44	14.45	<30.00	Pass
		52/37	15.37	14.19	17.83	<30.00	Pass
		106/53	20.21	17.82	22.19	<30.00	Pass
		242/61	23.21	20.63	25.12	<30.00	Pass
		484/65	25.28	22.84	27.24	<30.00	Pass
	2452	26/0	13.88	10.63	15.56	<30.00	Pass
		52/37	15.66	13.26	17.63	<30.00	Pass
		106/53	20.59	17.61	22.36	<30.00	Pass
		242/61	23.11	20.42	24.98	<30.00	Pass
		484/65	24.03	21.11	25.82	<30.00	Pass

Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$.

Appendix B. Test Result of Radiated Emission

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2412MHz
Test by :Nova

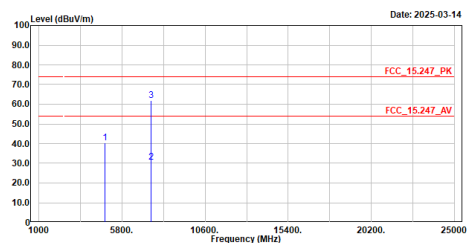


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	40.25	74.00	-33.75	47.48	-7.23	Peak
2	7492.300	30.59	54.00	-23.41	30.77	-0.18	Average
3	7492.300	61.86	74.00	-12.14	62.04	-0.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2412MHz
Test by :Nova

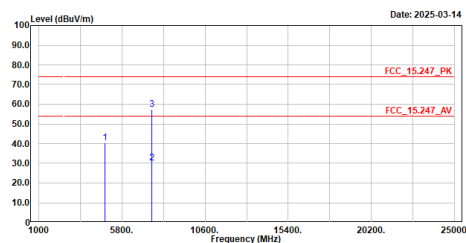


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	40.50	74.00	-33.50	47.73	-7.23	Peak
2	7528.000	30.36	54.00	-23.64	30.62	-0.26	Average
3	7528.000	57.43	74.00	-16.57	57.69	-0.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2437MHz
Test by :Nova

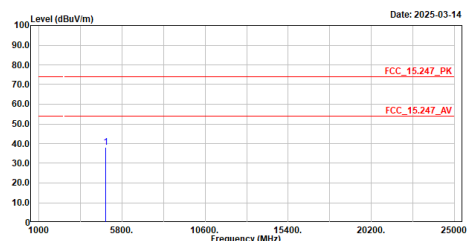


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.14	74.00	-35.86	45.09	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2437MHz
Test by :Nova

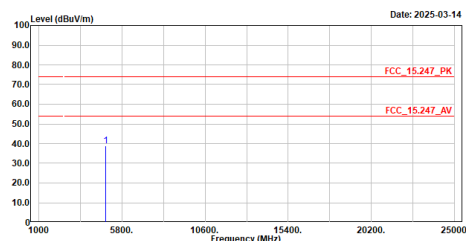


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.81	74.00	-35.19	45.76	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2462MHz
Test by :Nova

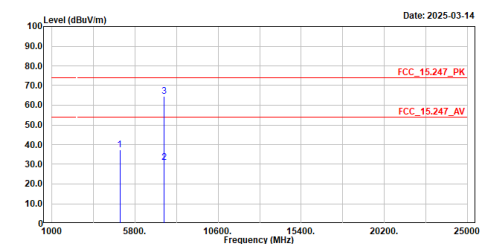


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.38	74.00	-36.62	44.06	-6.68	Peak
2	7499.100	30.83	54.00	-23.17	31.03	-0.20	Average
3	7499.100	64.54	74.00	-9.46	64.74	-0.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2462MHz
Test by :Nova

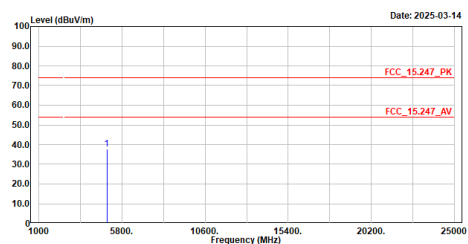


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.83	74.00	-36.17	44.51	-6.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Nova

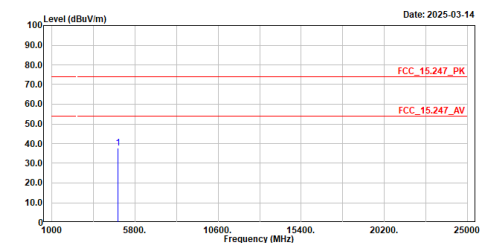


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	37.69	74.00	-36.31	44.92	-7.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Nova

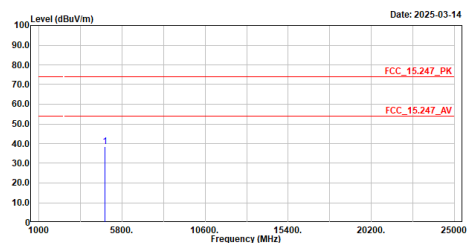


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	38.57	74.00	-35.43	45.80	-7.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2437MHz
Test by :Caster

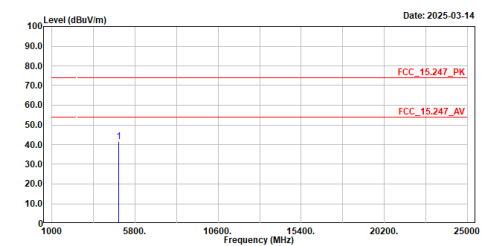


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	41.63	74.00	-32.37	48.58	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2437MHz
Test by :Caster

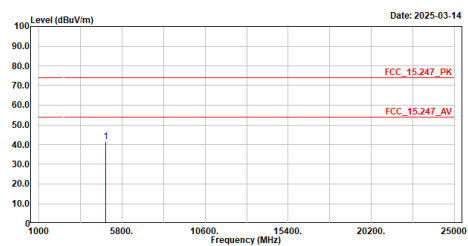


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	41.63	74.00	-32.37	48.58	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Caster

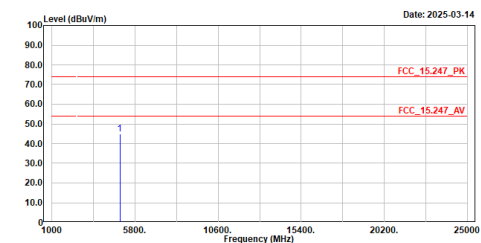


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	44.84	74.00	-29.16	51.52	-6.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz
Test by :Caster

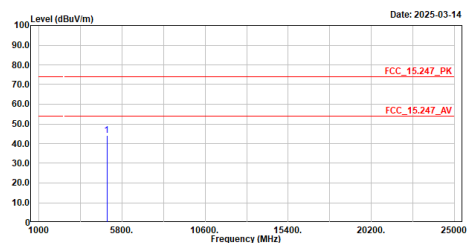


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	44.12	74.00	-29.88	50.80	-6.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2412MHz
Test by :Caster

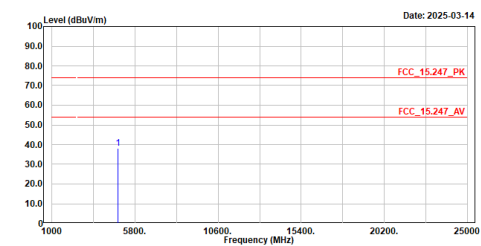


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	38.21	74.00	-35.79	45.44	-7.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2412MHz
Test by :Caster

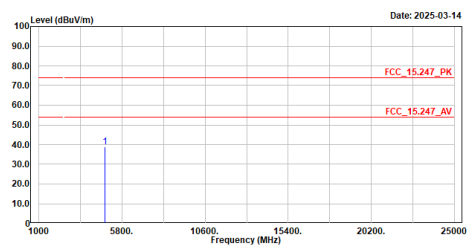


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	38.71	74.00	-35.29	45.94	-7.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2437MHz
Test by :Caster

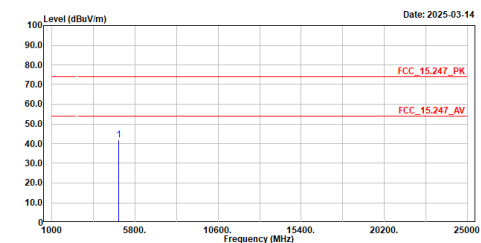


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	41.80	74.00	-32.20	48.75	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2437MHz
Test by :Caster

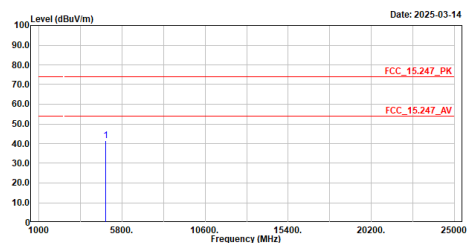


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	41.66	74.00	-32.34	48.61	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2462MHz
Test by :Caster

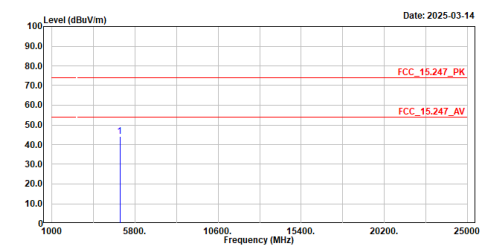


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	44.09	74.00	-29.91	50.77	-6.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2462MHz
Test by :Caster

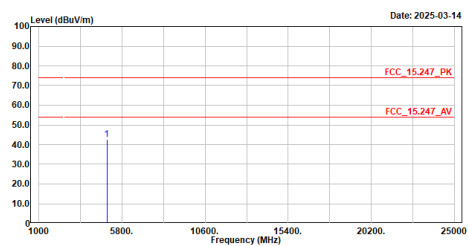


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	42.82	74.00	-31.18	49.50	-6.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2422MHz
Test by :Caster

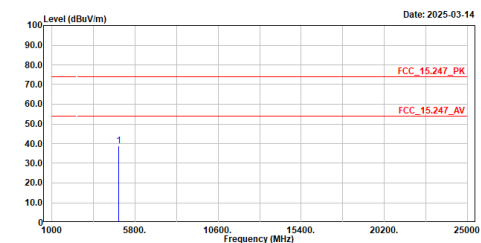


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4844.000	38.97	74.00	-35.03	46.12	-7.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_2422MHz
Test by :Caster

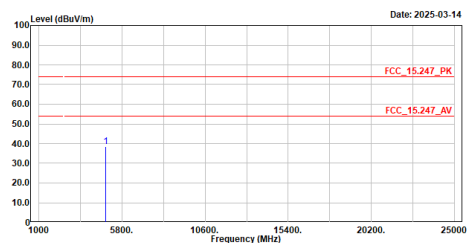


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4844.000	38.30	74.00	-35.70	45.45	-7.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2437MHz
Test by :Caster

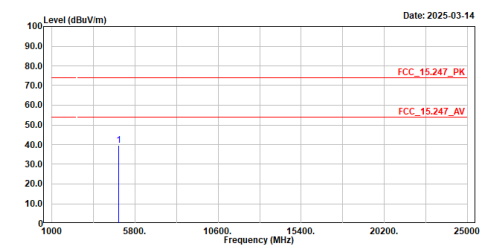


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	39.46	74.00	-34.54	46.41	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_2437MHz
Test by :Caster

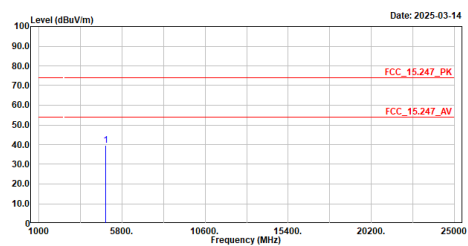


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	39.80	74.00	-34.20	46.75	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2452MHz
Test by :Caster

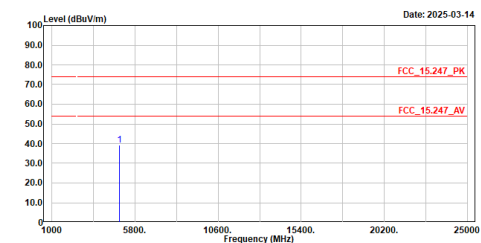


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	39.10	74.00	-34.90	45.83	-6.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_2452MHz
Test by :Caster

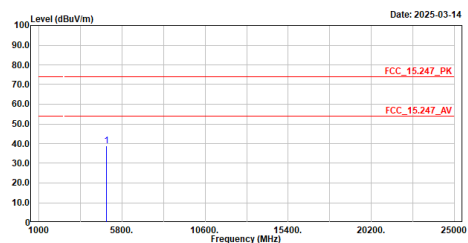


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	39.04	74.00	-34.96	45.77	-6.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2437MHz
Test by :Caster

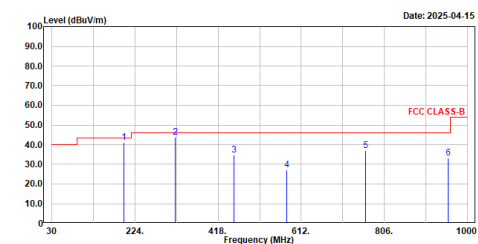


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	198.780	41.31	43.50	-2.19	68.75	-27.44	QP
2	318.090	43.91	46.00	-2.09	67.01	-23.10	QP
3	455.830	34.53	46.00	-11.47	53.86	-19.33	QP
4	578.050	26.99	46.00	-19.01	43.88	-16.89	QP
5	762.350	37.09	46.00	-8.91	50.71	-13.62	QP
6	955.380	33.14	46.00	-12.86	44.58	-11.44	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_2437MHz
Test by :Caster

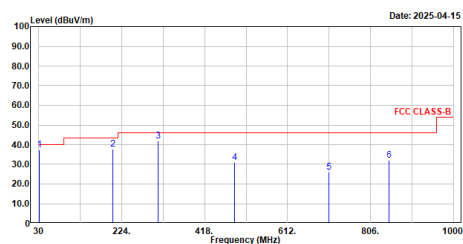


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	31.940	37.34	40.00	-2.66	62.80	-25.46	QP
2	202.660	37.61	43.50	-5.89	64.98	-27.37	QP
3	309.360	42.01	46.00	-3.99	65.43	-23.42	QP
4	487.840	30.89	46.00	-15.11	49.79	-18.90	QP
5	708.030	25.85	46.00	-20.15	40.48	-14.63	QP
6	849.650	31.96	46.00	-14.04	44.66	-12.70	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Partial RU


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2412MHz_RU 242 61
Test by :Rock

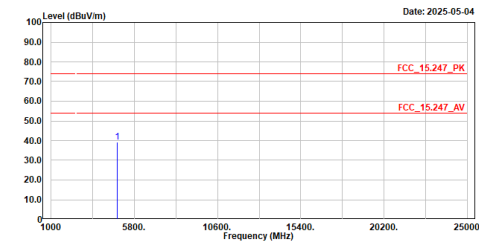

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	4824.000	39.42	74.00	-34.58	46.65	-7.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2412MHz_RU 242 61
Test by :Rock

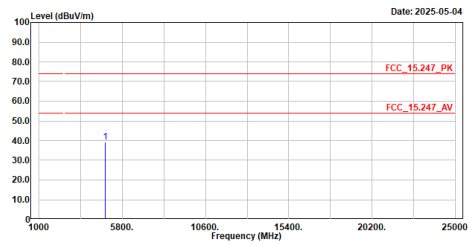

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	4824.000	39.28	74.00	-34.72	46.51	-7.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2437MHz_RU 242 61
Test by :Rock

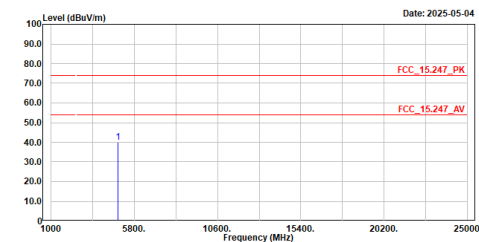

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	4874.000	40.15	74.00	-33.85	47.10	-6.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2437MHz_RU 242 61
Test by :Rock

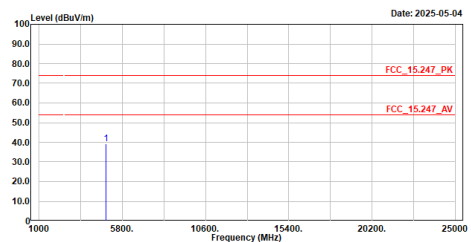

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	4874.000	39.08	74.00	-34.92	46.03	-6.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2462MHz_RU 242 61
Test by :Rock

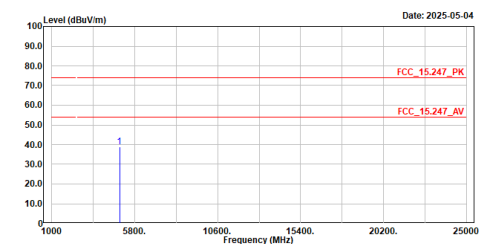


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	38.76	74.00	-35.24	45.44	-6.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2462MHz_RU 242 61
Test by :Rock

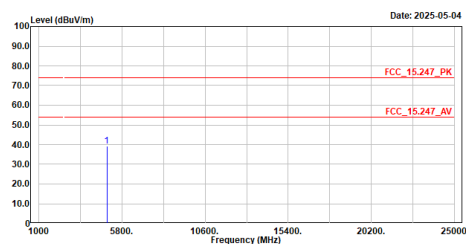


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	39.14	74.00	-34.86	45.82	-6.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz_RU 484 65
Test by :Rock

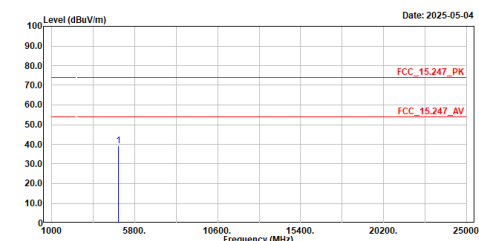


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	39.09	74.00	-34.91	46.24	-7.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz_RU 484 65
Test by :Rock

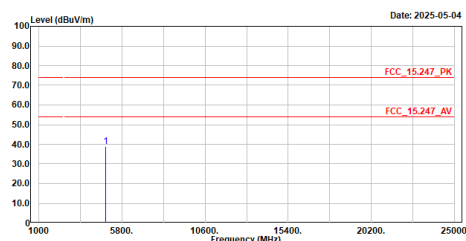


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	39.01	74.00	-34.99	46.16	-7.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2437MHz_RU 484 65
Test by :Caster

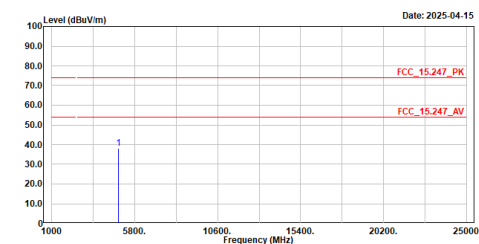


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	38.25	74.00	-35.75	45.20	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2437MHz_RU 484 65
Test by :Caster

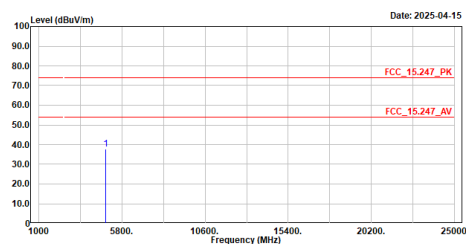


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.60	74.00	-36.40	44.55	-6.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2452MHz_RU 484 65
Test by :Rock

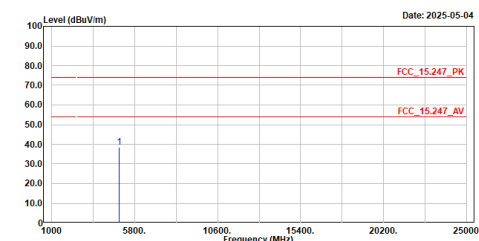


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	38.61	74.00	-35.39	45.34	-6.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2452MHz_RU 484 65
Test by :Rock

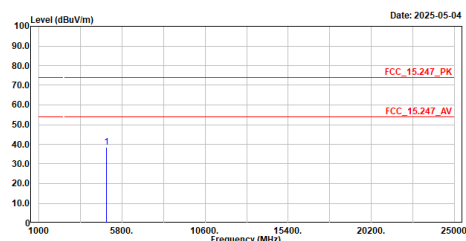


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	38.57	74.00	-35.43	45.30	-6.73	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
 Condition :3m ,HORIZONTAL
 mode :TX_ax40_2437MHz_484 65
 Test by :Caster

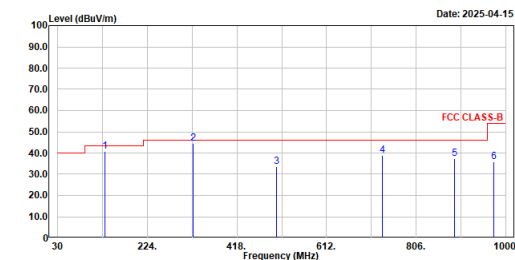


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	132.820	40.73	43.50	-2.77	66.43	-25.70	QP
2	323.910	44.42	46.00	-1.58	67.29	-22.87	QP
3	504.330	33.53	46.00	-12.47	52.11	-18.58	QP
4	733.250	38.76	46.00	-7.24	52.79	-14.03	QP
5	888.450	37.28	46.00	-8.72	49.79	-12.51	QP
6	973.810	35.73	54.00	-18.27	47.16	-11.43	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
 Condition :3m ,VERTICAL
 mode :TX_ax40_2437MHz_484 65
 Test by :Caster

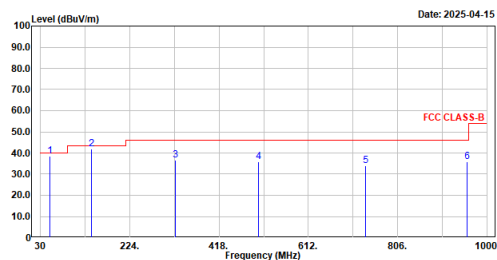


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	51.340	38.52	40.00	-1.48	62.59	-24.07	QP
2	140.580	41.75	43.50	-1.75	66.71	-24.96	QP
3	323.910	36.62	46.00	-9.38	59.49	-22.87	QP
4	504.330	35.76	46.00	-10.24	54.34	-18.58	QP
5	737.130	33.80	46.00	-12.20	47.78	-13.98	QP
6	956.350	35.73	46.00	-10.27	47.19	-11.46	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2412MHz
Test by :Caster

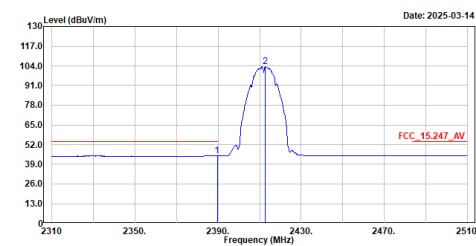


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	44.63	54.80	-9.37	14.26	30.37	Average
2	2412.800	103.44	-----	-----	73.14	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2412MHz
Test by :Caster

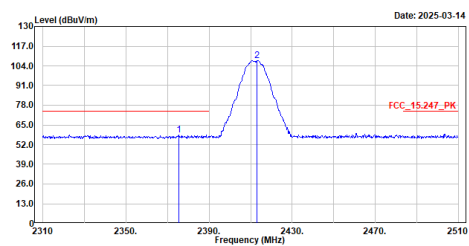


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2375.400	58.54	74.80	-15.46	28.23	30.31	Peak
2	2413.200	107.60	-----	-----	77.30	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2412MHz
Test by :Caster

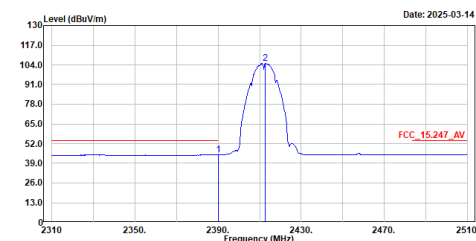


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	44.81	54.80	-9.19	14.44	30.37	Average
2	2412.800	105.14	-----	-----	74.84	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2412MHz
Test by :Caster

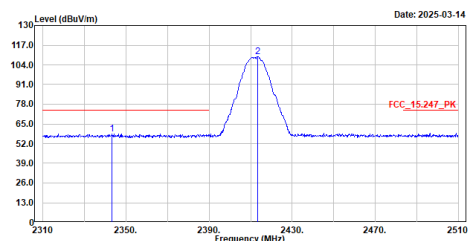


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2343.400	58.46	74.80	-15.54	28.13	30.33	Peak
2	2413.400	109.42	-----	-----	79.12	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2462MHz
Test by :Caster

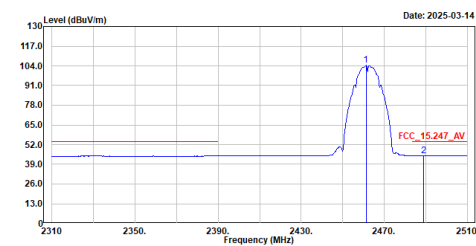


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dBuV	dB/m	
1	2461.200	104.35	54.00	-9.33	74.11	30.24	Average
2	2488.800	44.67	54.00	-9.33	14.31	30.36	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2462MHz
Test by :Caster

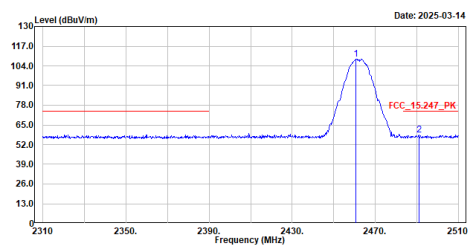


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dBuV	dB/m	
1	2460.800	108.35	74.00	-15.81	78.11	30.24	Peak
2	2491.000	58.19	74.00	-15.81	27.82	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2462MHz
Test by :Caster

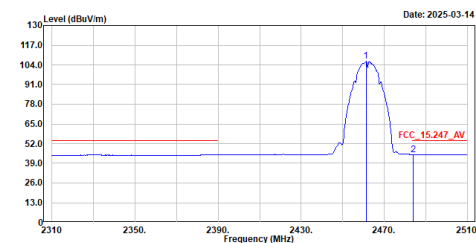


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dBuV	dB/m	
1	2461.200	106.21	54.00	-9.27	75.97	30.24	Average
2	2483.800	44.73	54.00	-9.27	14.43	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2462MHz
Test by :Caster

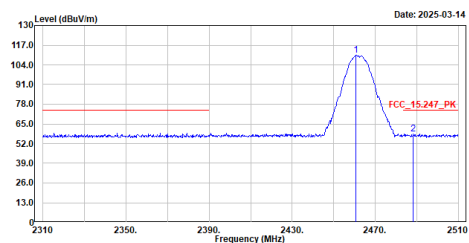


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dBuV	dB/m	
1	2460.800	110.18	74.00	-15.43	79.94	30.24	Peak
2	2488.400	58.57	74.00	-15.43	28.22	30.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Caster

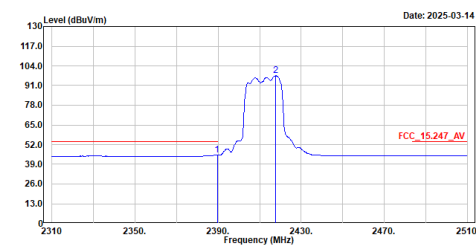


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.600	45.10	54.00	-8.90	14.73	30.37	Average
2	2417.600	97.42	-----	-----	67.12	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Caster

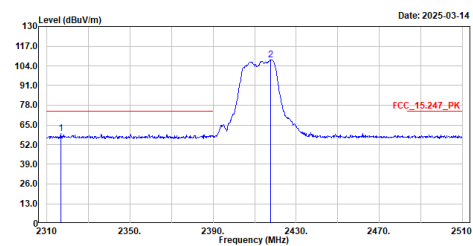


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2316.800	59.30	74.00	-14.70	28.99	30.31	Peak
2	2417.600	108.07	-----	-----	77.77	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Caster

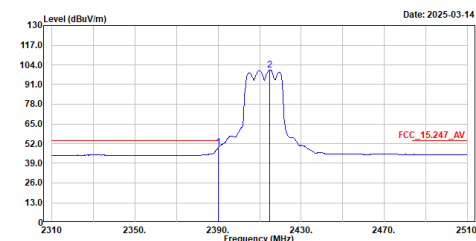


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	49.39	54.00	-4.61	19.02	30.37	Average
2	2414.800	100.78	-----	-----	70.48	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Caster

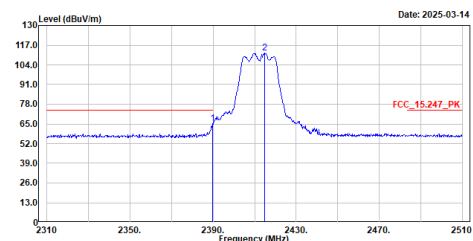


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.800	65.21	74.00	-8.79	34.84	30.37	Peak
2	2415.000	111.75	-----	-----	81.45	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Caster

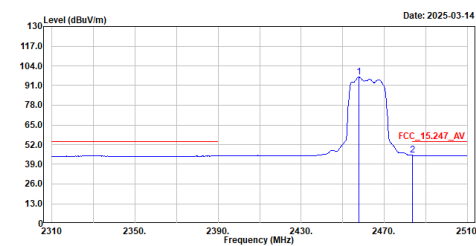


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2457.800	96.46	-----	-----	66.22	30.24	Average
2	2483.600	44.89	54.00	-9.11	14.59	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Caster

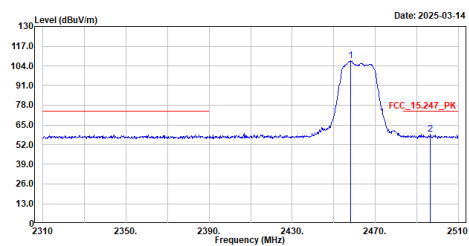


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2458.200	107.21	-----	-----	76.97	30.24	Peak
2	2496.600	59.10	74.00	-14.90	28.73	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz
Test by :Caster

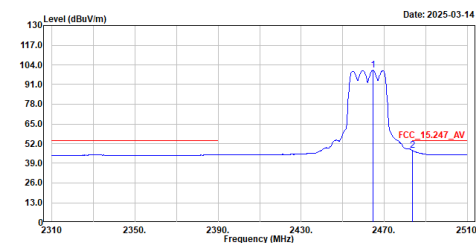


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2464.600	100.34	-----	-----	70.09	30.25	Average
2	2483.600	47.34	54.00	-6.66	17.04	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz
Test by :Caster

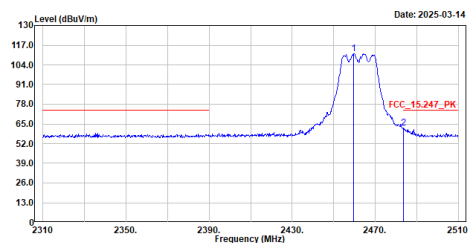


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2459.600	111.50	-----	-----	81.26	30.24	Peak
2	2483.600	62.45	74.00	-11.55	32.15	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2412MHz
Test by :Caster

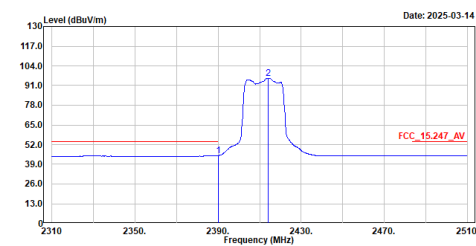


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2390.000	44.79	54.00	-9.21	14.42	30.37	Average
2	2414.000	95.74	-----	-----	65.44	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2412MHz
Test by :Caster

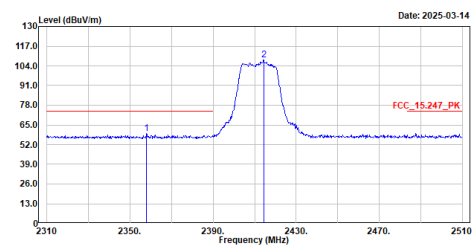


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2358.000	59.33	74.00	-14.67	28.99	30.34	Peak
2	2414.400	107.89	-----	-----	77.59	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2412MHz
Test by :Caster

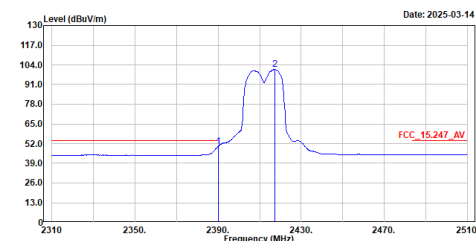


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2390.000	50.18	54.00	-3.82	19.81	30.37	Average
2	2417.200	101.05	-----	-----	70.75	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2412MHz
Test by :Caster

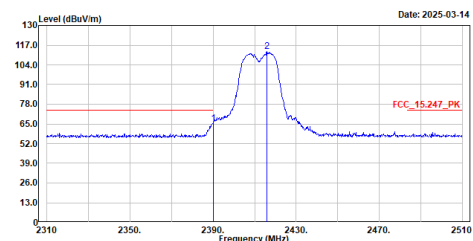


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2390.000	65.48	74.00	-8.52	35.11	30.37	Peak
2	2416.000	112.59	-----	-----	82.29	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2462MHz
Test by :Caster

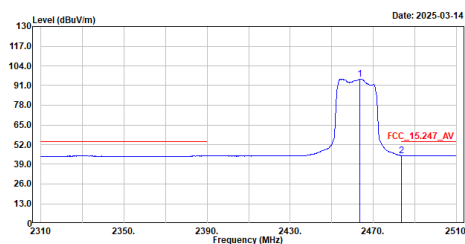


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2463.400	95.31	-----	-----	65.06	30.25	Average
2	2483.600	44.75	54.00	-9.25	14.45	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2462MHz
Test by :Caster

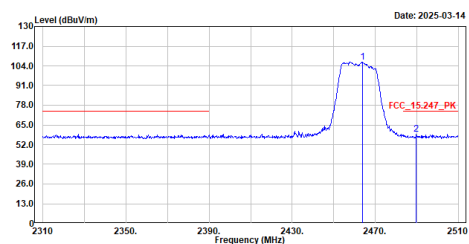


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2463.800	106.61	-----	-----	76.36	30.25	Peak
2	2489.800	58.97	74.00	-15.03	28.60	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2462MHz
Test by :Caster

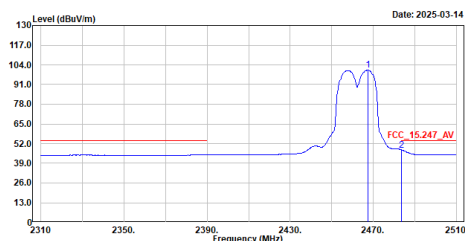


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2467.400	100.62	-----	-----	70.37	30.25	Average
2	2483.600	47.83	54.00	-6.17	17.53	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2462MHz
Test by :Caster

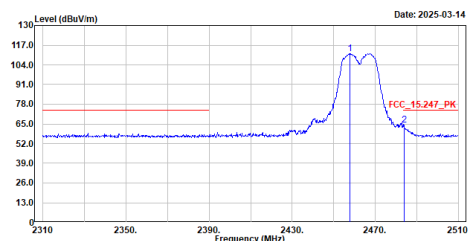


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2457.800	111.38	-----	-----	81.14	30.24	Peak
2	2483.800	64.20	74.00	-9.80	33.90	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2422MHz
Test by :Caster

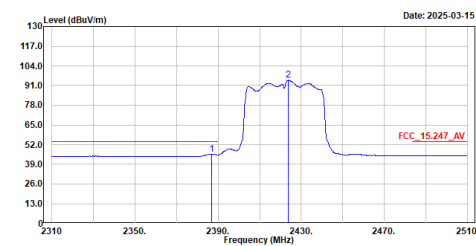

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2422MHz
Test by :Caster

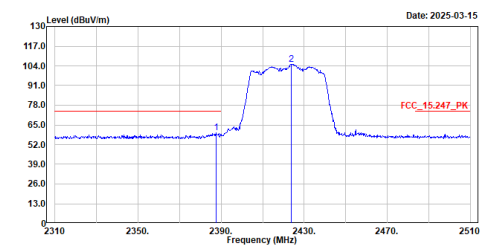

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Caster

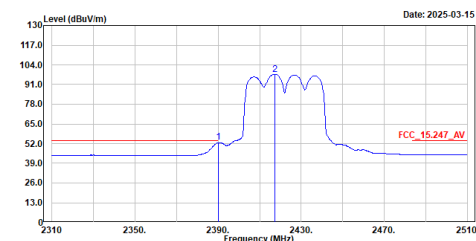

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Caster

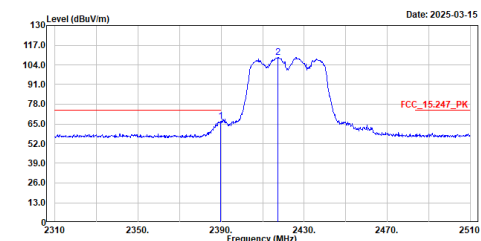

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2452MHz
Test by :Caster

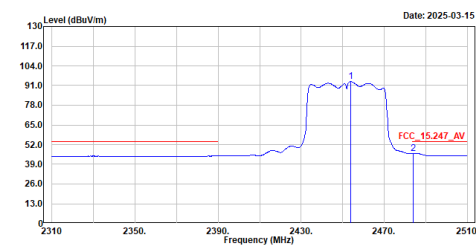


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.800	93.60	-----	-----	63.36	30.24	Average
2	2484.000	46.23	54.00	-7.77	15.93	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2452MHz
Test by :Caster

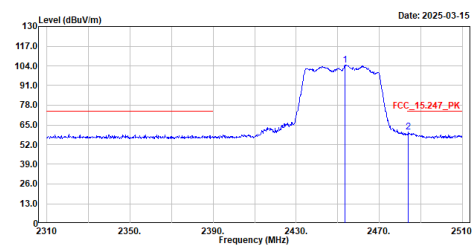


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.400	104.48	-----	-----	74.24	30.24	Peak
2	2484.000	60.27	74.00	-13.73	29.97	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_2452MHz
Test by :Caster

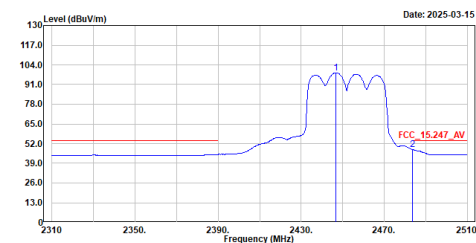


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2446.800	98.78	-----	-----	68.58	30.20	Average
2	2483.600	48.09	54.00	-5.91	17.79	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_2452MHz
Test by :Caster

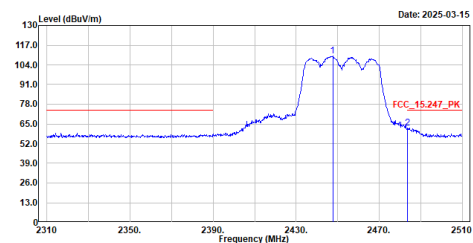


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2447.600	109.72	-----	-----	79.51	30.21	Peak
2	2483.600	62.13	74.00	-11.87	31.83	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Partial RU

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_2412MHz_RU 242 61
Test by :Rock

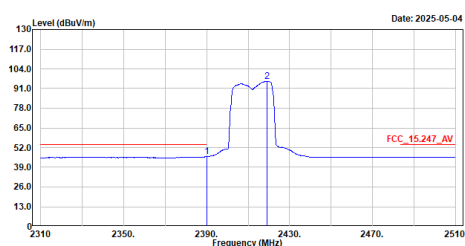


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	45.99	54.00	-8.01	15.62	30.37	Average
2	2419.000	95.66	-----	-----	65.36	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_2412MHz_RU 242 61
Test by :Rock

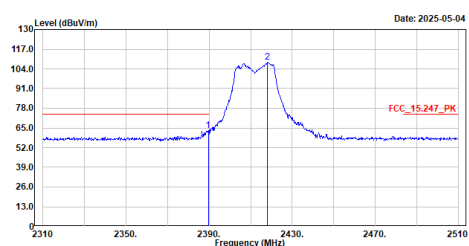


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.600	63.33	74.00	-10.67	32.96	30.37	Peak
2	2418.200	108.19	-----	-----	77.89	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2412MHz_RU 242 61
Test by :Rock

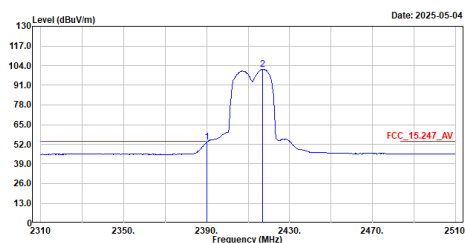


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	53.42	54.00	-0.58	23.05	30.37	Average
2	2417.000	101.51	-----	-----	71.21	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2412MHz_RU 242 61
Test by :Rock

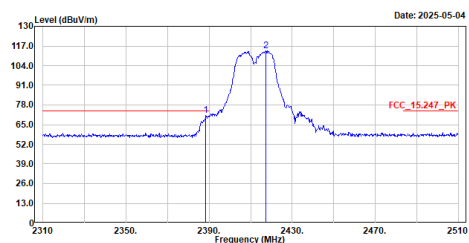


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.400	71.10	74.00	-2.90	40.73	30.37	Peak
2	2417.400	113.81	-----	-----	83.51	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_2462MHz_RU 242 61
Test by :Rock

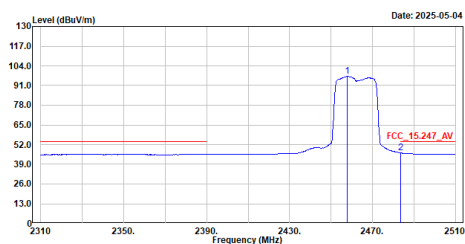


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2457.800	96.99	-----	-----	66.75	30.24	Average
2	2483.600	46.46	54.00	-7.54	16.16	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax20_2462MHz_RU 242 61
Test by :Rock

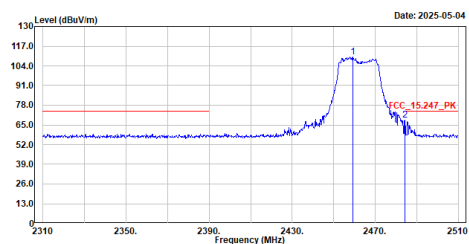


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2459.200	109.90	-----	-----	79.66	30.24	Peak
2	2484.400	68.17	74.00	-5.83	37.87	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2462MHz_RU 242 61
Test by :Rock

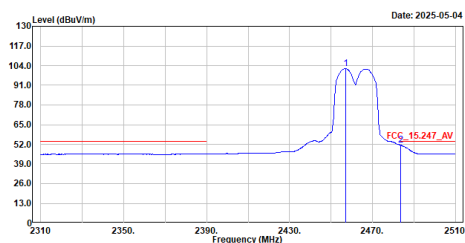


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2457.000	102.02	-----	-----	71.78	30.24	Average
2	2483.600	51.44	54.00	-2.56	21.14	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2462MHz_RU 242 61
Test by :Rock

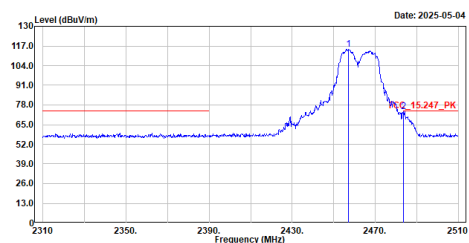


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2457.200	114.63	-----	-----	84.39	30.24	Peak
2	2483.600	73.45	74.00	-0.55	43.15	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_2422MHz_RU 484 65
Test by :Rock

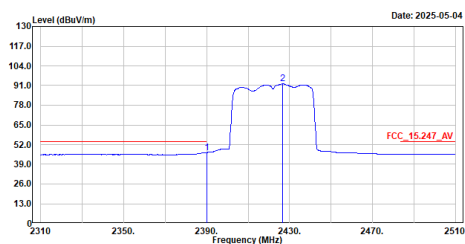


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	46.82	54.00	-7.18	16.45	30.37	Average
2	2426.800	92.13	-----	-----	61.82	30.31	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_2422MHz_RU 484 65
Test by :Rock

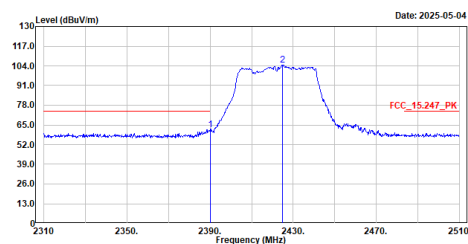


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	62.04	74.00	-11.96	31.67	30.37	Peak
2	2425.000	104.70	-----	-----	74.39	30.31	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2422MHz_RU 484 65
Test by :Rock

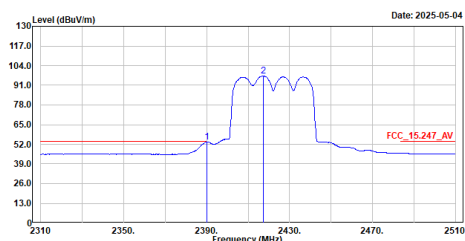


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	53.43	54.00	-0.57	23.06	30.37	Average
2	2417.200	97.19	-----	-----	66.89	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2422MHz_RU 484 65
Test by :Rock

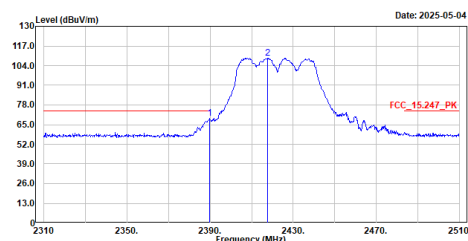


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	69.18	74.00	-4.82	38.81	30.37	Peak
2	2417.800	109.01	-----	-----	78.71	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_2452MHz_RU 484 65
Test by :Rock

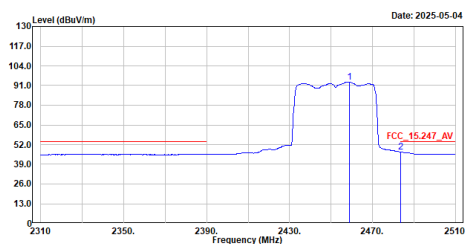


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2458.800	93.29	-----	-----	63.05	30.24	Average
2	2483.600	47.11	54.00	-6.89	16.81	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_ax40_2452MHz_RU 484 65
Test by :Rock

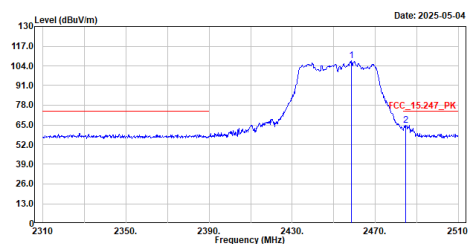


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2458.400	107.32	-----	-----	77.08	30.24	Peak
2	2484.800	64.90	74.00	-9.10	34.59	30.31	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2452MHz_RU 484 65
Test by :Rock

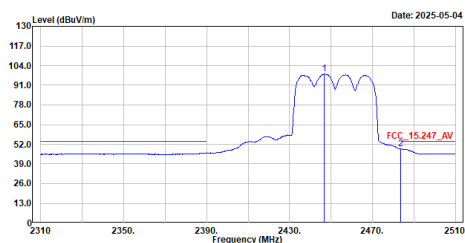


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2446.000	98.45	-----	-----	68.25	30.20	Average
2	2483.600	49.05	54.00	-4.95	18.75	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2452MHz_RU 484 65
Test by :Rock

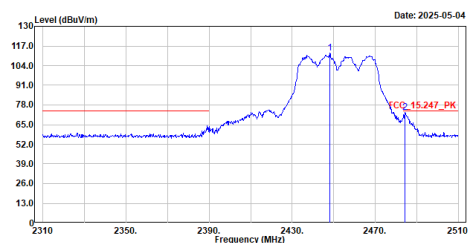


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2448.000	112.30	-----	-----	82.09	30.21	Peak
2	2484.400	73.20	74.00	-0.80	42.90	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Appendix C. Test Result of Radiated Emissions Co-location

Site :HY-CB02
Condition :3m ,Horizontal
mode :NFC_TX+11G_TX_2437MHz+BLE2M_TX_2440MHz
Test by :Rock

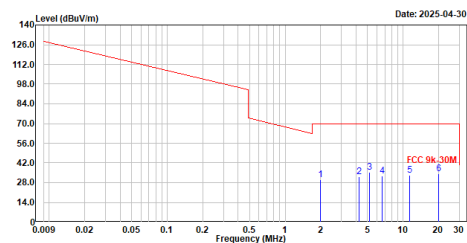


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1.981	29.95	69.50	-39.55	10.25	19.70	QP
2	4.247	32.15	69.50	-37.35	12.18	19.97	QP
3	5.159	35.50	69.50	-33.94	15.18	20.38	QP
4	6.635	32.62	69.50	-36.88	11.32	21.30	QP
5	11.334	33.40	69.50	-36.10	11.50	21.90	QP
6	20.160	34.44	69.50	-35.06	11.79	22.65	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,Vertical
mode :NFC_TX+11G_TX_2437MHz+BLE2M_TX_2440MHz
Test by :Rock

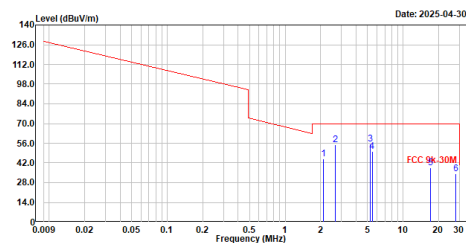


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2.114	44.81	69.50	-24.69	25.12	19.69	QP
2	2.653	55.20	69.50	-14.30	35.57	19.63	QP
3	5.244	55.37	69.50	-14.13	34.98	20.47	QP
4	5.462	50.17	69.50	-19.33	29.46	20.71	QP
5	17.003	38.47	69.50	-31.03	16.17	22.30	QP
6	27.888	34.49	69.50	-35.01	11.61	22.88	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+11G_TX_2437MHz+BLE2M_TX_2440MHz
Test by :Rock

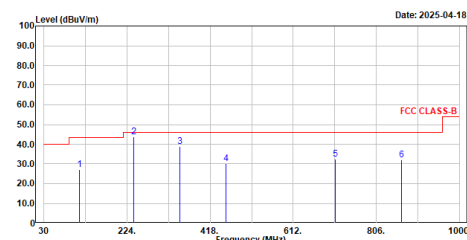


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	112.450	27.26	43.50	-16.24	54.68	-27.42	QP
2	240.490	43.94	46.00	-2.06	69.61	-25.67	QP
3	348.160	38.95	46.00	-7.05	61.52	-22.57	QP
4	455.830	30.14	46.00	-15.86	49.47	-19.33	QP
5	709.970	32.54	46.00	-13.46	47.12	-14.58	QP
6	864.200	31.89	46.00	-14.11	44.65	-12.76	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+11G_TX_2437MHz+BLE2M_TX_2440MHz
Test by :Rock

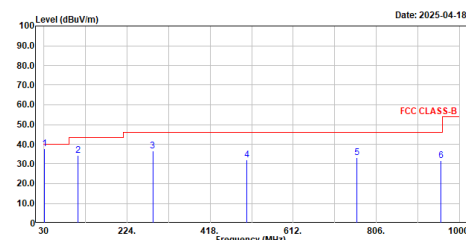


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.970	37.57	40.00	-2.43	63.11	-25.54	QP
2	109.540	34.28	43.50	-9.22	61.91	-27.63	QP
3	284.140	36.58	46.00	-9.42	60.61	-24.03	QP
4	504.330	31.94	46.00	-14.06	50.52	-18.58	QP
5	761.380	33.30	46.00	-12.70	46.94	-13.64	QP
6	957.320	31.53	46.00	-14.47	43.01	-11.48	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :NFC_TX+11G_TX_2437MHz+BLE2M_TX_2440MHz
Test by :Rock

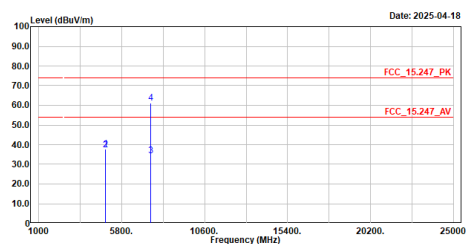


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.89	74.00	-36.11	44.84	-6.95	Peak
2	4880.000	37.28	74.00	-36.72	44.18	-6.90	Peak
3	7494.000	34.29	54.00	-19.71	34.48	-0.19	Average
4	7494.000	60.94	74.00	-13.06	61.13	-0.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :NFC_TX+11G_TX_2437MHz+BLE2M_TX_2440MHz
Test by :Rock

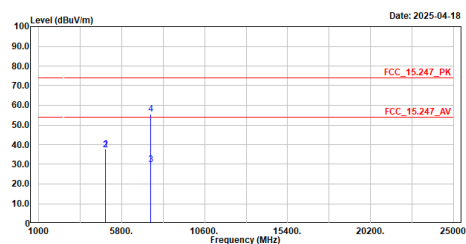

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.79	74.00	-36.21	44.74	-6.95	Peak
2	4880.000	37.35	74.00	-36.65	44.25	-6.90	Peak
3	7482.100	29.97	54.00	-24.03	30.12	-0.15	Average
4	7482.100	55.40	74.00	-18.60	55.55	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.