


RF EXPOSURE EVALUATION REPORT

FCC ID : 2ABZ2-EF14A
Equipment : Smart Phone
Brand Name : ONEPLUS
Model Name : LE2125
Applicant : OnePlus Technology (Shenzhen) Co., Ltd.
18C02, 18C03, 18C04 and 18C05, Shum Yip
Terra Building, Binhe Avenue North, Futian
District, Shenzhen
Manufacturer : OnePlus Technology (Shenzhen) Co., Ltd.
18C02, 18C03, 18C04 and 18C05, Shum Yip
Terra Building, Binhe Avenue North, Futian
District, Shenzhen
Standard : FCC 47 CFR Part 2 (2.1093)

We, SPORTON INTERNATIONAL INC have been evaluated in accordance with 47 CFR Part 2.1093 for the device and pass the limit.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

Sporton International Inc.

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan



Table of Contents

1. Summary	4
2. Guidance Applied	4
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
4. RF Exposure Limits	6
4.1 Uncontrolled Environment	6
4.2 Controlled Environment	6
5. System Description and Setup	7
5.1 EUMmWave Probe / E-Field 5G Probe	8
5.2 Data Acquisition Electronics (DAE)	9
5.3 Scan configuration	9
6. Test Equipment List	9
7. System Verification Source	10
8. Power Density System Verification	11
9. System Verification Results	11
9.1 Computation of the Electric Field Polarization Ellipse	12
9.2 Total Field and Power Flux Density Reconstruction	13
9.3 Test Positions	13
10. RF Exposure Evaluation Results	14
11. 5G NR + LTE + WLAN + BT Sim-Tx analysis	15
12. Simultaneous-Tx analysis	17
12.1 Simultaneous transmission analysis for WiFi/BT + 5G NR	17
12.2 Head Exposure Condition	19
12.3 Hotspot Exposure Condition	22
12.4 Body-worn Exposure Condition	25
12.5 Extremity Exposure Condition	27
13. Uncertainty Assessment	28
14. References	29

Appendix A. Plots of System Performance Check

Appendix B. Plots of Power Density Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Setup Photo



History of this test report

Report No.	Version	Description	Issued Date
FA02623-06B	01	Initial issue of report	Feb. 05, 2021



1. Summary

The maximum measured average power density found during testing for OnePlus Technology (Shenzhen) Co., Ltd., Smart Phone, are as follows.

Standalone transmission				Simultaneous transmission with other transmitters Summation of Exposure Ratio
RF Transmitter		Measured PD (mW/cm ²)	Reported PD (mW/cm ²)	
5G FR2	n258	0.43	0.75	0.999
	n260	0.73	0.75	
	n261	0.70	0.75	
Result		PASS		

Reviewed by: Jason Wang

Report Producer: Daisy Peng

2. Guidance Applied

The Power Density testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2.1091
- FCC 47 CFR Part 2.1093
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- TCBC workshop notes
- IEC Draft TR 63170



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Smart Phone
Brand Name	ONEPLUS
FCC ID	2ABZ2-EF14A
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77 : 3700 MHz ~ 3980 MHz 5G NR n258a: 24.25GHz ~24.45GHz 5G NR n258b: 24.75GHz ~25.25GHz 5G NR n260 : 37 GHz~40 GHz 5G NR n261 : 27.5 GHz~28.35 GHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz ANT+: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz WPT: 100 KHz ~ 205KHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A)/1xEv-Do(Rev.B) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE ANT+: GFSK NFC: ASK WPT: ASK
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
Date Tested	2020/12/12 ~ 2021/01/15
EUT Stage	Production Unit
Remark: 1. Update model name, all the test case which can be referred to Sporton Part1 Test Report, Report No: FA002623-02B.	

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure above 6GHz to radio frequency (RF) radiation as specified in §1.1310.

General Population Basic restriction for power density for frequencies between 1.5GHz and 100 GHz is $1.0 \text{ mW/cm}^2 = 10 \text{ W/m}^2$


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

Table 1

5. System Description and Setup

The system to be used for the near field power density measurement



- SPEAG DASY6 system
- SPEAG cDASY6 5G module software
- EUmWVx probe
- 5G Phantom cover

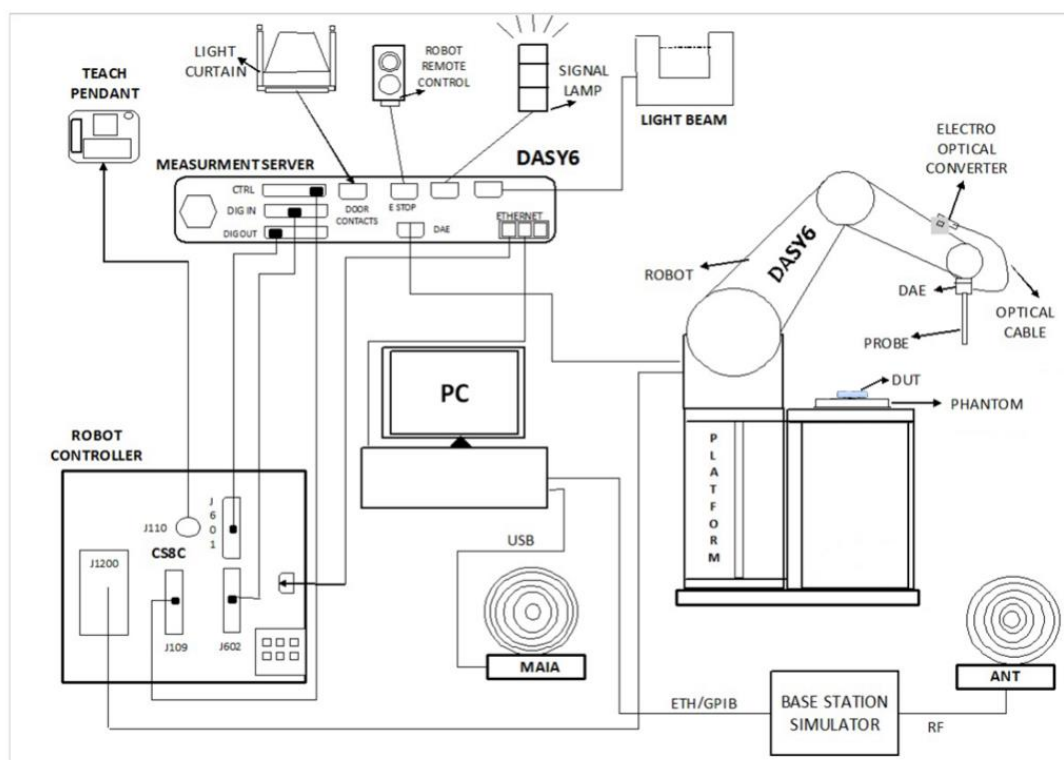

5.1 E UmmWave Probe / E-Field 5G Probe

The probe design allows measurements at distances as small as 2 mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm.


Frequency	750 MHz – 110 GHz
Probe Overall Length	320 mm
Probe Body Diameter	8.0 mm
Tip Length	23.0 mm
Tip Diameter	8.0 mm
Probe's two dipoles length	0.9 mm – Diode loaded
Dynamic Range	< 20 V/m - 10000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)
Position Precision	< 0.2 mm
Distance between diode sensors and probe's tip	1.5 mm
Minimum Mechanical separation between probe tip and a Surface	0.5 mm
Applications	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction.
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

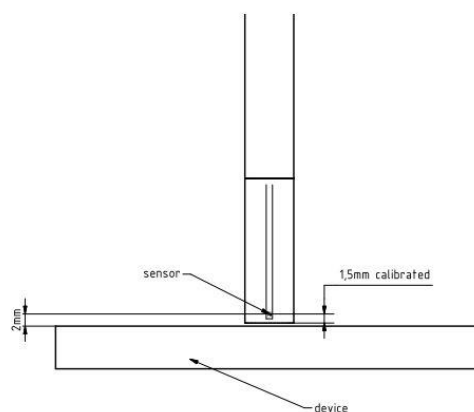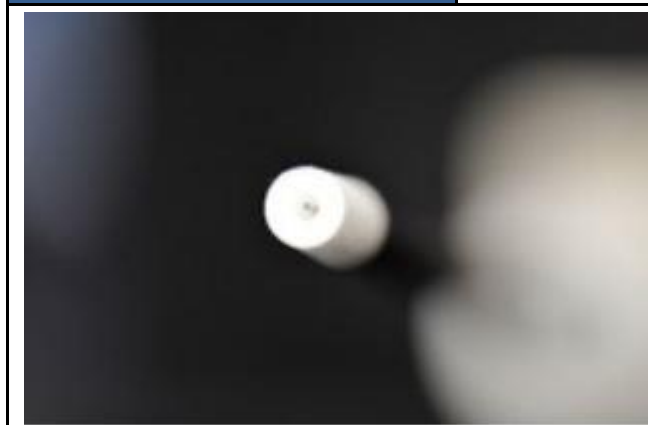

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

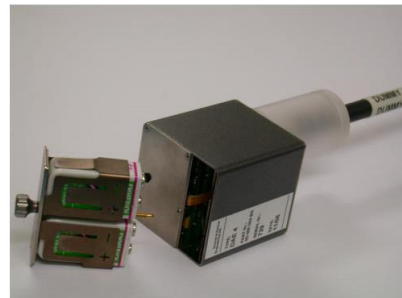

5.3 Scan configuration

Fine-resolution scans on 2 different planes are performed to reconstruct the E- and H-fields as well as the power density; the z-distance between the 2 planes is set to $\lambda/4$.

The (x, y) grid step is also set $\lambda/4$, the grid extent is set to sufficiently large to identify the field pattern and the peak.


6. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	5G Verification Source	30GHz	1007	Nov. 17, 2020	Nov. 16, 2021
SPEAG	EUmmWV Probe	EUmmWV4	9441	Nov. 24, 2020	Nov. 23, 2021
SPEAG	Data Acquisition Electronics	DAE4	376	Nov. 23, 2020	Nov. 22, 2021
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 16, 2020	Sep. 15, 2021
TESTO	Hygro meter	608-H1	34893240	Nov. 18, 2020	Nov. 17, 2021
Aglient	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2020	Aug. 26, 2021
Custom Microwave	Standard Horn antenna	M15RH	V91113-A	NCR	NCR

7. System Verification Source

The System Verification sources at 30 GHz and above comprise horn-antennas and very stable signal generators.

Model	Ka-band horn antenna
Calibrated frequency:	30 GHz at 10mm from the case surface
Frequency accuracy	± 100 MHz
E-field polarization	linear
Harmonics	-20 dBc
Total radiated power	14 dBm
Power stability	0.05 dB
Power consumption	5 W
Size	00 x 100 x 100 mm
Weight	1 kg

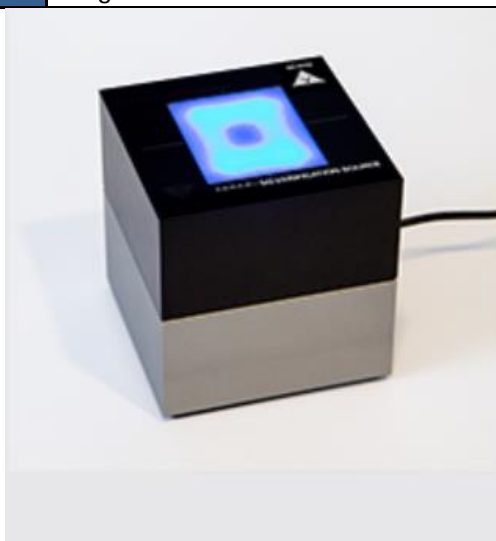



8. Power Density System Verification

The system performance check verifies that the system operates within its specifications.

The EUT is replaced by a calibrated source, the same spatial resolution, measurement region and the test separation used in the calibration was applied to system check. Through visual inspection into the measured power density distribution, both spatially (shape) and numerically (level) have no noticeable difference. The measured results should be within 0.66dB of the calibrated targets.

Frequency [GHz]	Grid step	Grid extent X/Y [mm]	Measurement points
10	$0.25 \left(\frac{\lambda}{4}\right)$	120/120	16×16
30	$0.25 \left(\frac{\lambda}{4}\right)$	60/60	24×24
60	$0.25 \left(\frac{\lambda}{4}\right)$	32.5/32.5	26×26
90	$0.25 \left(\frac{\lambda}{4}\right)$	30/30	36×36

Settings for measurement of verification sources

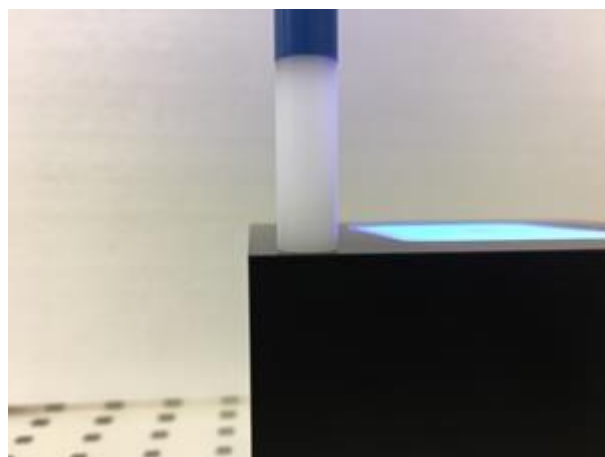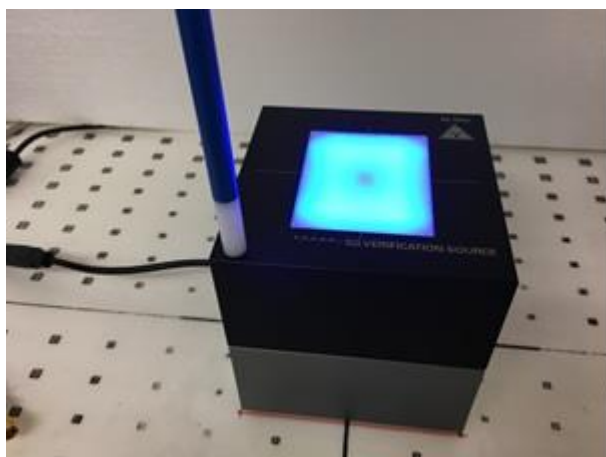

Verification Setup photo

9. System Verification Results

Date	Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm ² (W/m ²)	Targeted 4 cm ² (W/m ²)	Deviation (dB)
2020/12/12	30	30GHz_1007	9441	577	10	32.3	36.3	-0.51
2021/1/4	30	30GHz_1007	9441	376	10	38.8	36.3	0.29
2021/1/12	30	30GHz_1007	9441	376	10	32.5	36.3	-0.48

9.1 Computation of the Electric Field Polarization Ellipse

For the numerical description of an arbitrarily oriented ellipse in three-dimensional space, five parameters are needed: the semi-major axis (a), the semi-minor axis (b), two angles describing the orientation of the normal vector of the ellipse (ϕ , θ), and one angle describing the tilt of the semi-major axis (ψ). For the two extreme cases, i.e., circular and linear polarizations, three parameters only (a , ϕ and θ) are sufficient for the description of the incident field.

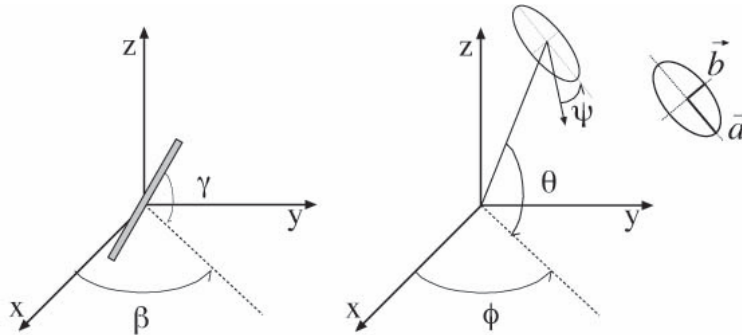


Illustration of the angles used for the numerical description of the sensor and the orientation of an ellipse in 3-D space.

For the reconstruction of the ellipse parameters from measured data, the problem can be reformulated as a nonlinear search problem. The semi-major and semi-minor axes of an elliptical field can be expressed as functions of the three angles (ϕ , θ and ψ). The parameters can be uniquely determined towards minimizing the error based on least-squares for the given set of angles and the measured data. In this way, the number of free parameters is reduced from five to three, which means that at least three sensor readings are necessary to gain sufficient information for the reconstruction of the ellipse parameters. However, to suppress the noise and increase the reconstruction accuracy, it is desirable that the system of equations be over determined. The solution to use a probe consisting of two sensors angled by r_1 and r_2 toward the probe axis and to perform measurements at three angular positions of the probe, i.e., at β_1 , β_2 and β_3 , results in over-determinations by a factor of two. If there is a need for more information or increased accuracy, more rotation angles can be added. The reconstruction of the ellipse parameters can be separated into linear and non-linear parts that are best solved by the Givens algorithm combined with a downhill simplex algorithm. To minimize the mutual coupling, sensor angles are set with a shift of 90 degree ($r_2 = r_1 + 90$ degree), and to simplify, the first rotation angle of the probe (β_1) can be set to 0 degree.

9.2 Total Field and Power Flux Density Reconstruction

Computation of the power density in general requires knowledge of the electric and magnetic field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations. SPEAG have developed a reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUmWV2 probe.

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. Two average power density values can be computed, the average total power density and the average incident power density, and the average total power density is used to determine compliance.

- $|Re\{S\}|$ is the total Poynting vector
- $\mathbf{n} \cdot Re\{S\}$ is the normal Poynting vector

The software post-processing reports to values, "S avg tot" and "S avg inc". "S avg tot" represents average total power density (all three xyz components included), and "S avg inc" represents average normal power density. The average total power density "S avg tot" is reported to determine the device compliance.

9.3 Test Positions

Exposure Position	Measurement Plane					
	Front 2mm	Back 2mm	Left Side 2mm	Right Side 2mm	Top Side 2mm	Bottom Side 2mm
Module 0	No	Yes	Yes	No	No	No
Module 1	No	Yes	Yes	No	No	No
Module 2	No	Yes	No	Yes	No	No

From the Part 0 report, beam IDs with highest PD and corresponding input.power.limit were selected to be tested for each antenna module and for each frequency band

10. RF Exposure Evaluation Results

1. The PD test was performed of a 2mm separation between sensor and EUT surface (the probe tip is 0.5mm to the EUT surface).
2. According to TCBC Workshop in October 2018, 4 cm² averaging area are used.
3. This device is enabled with Qualcomm® Smart Transmit feature, smart transmit will manage and ensure LTE and 5G simultaneous transmission is compliant. The validation of the time-averaging algorithm and compliance under the Tx varying transmission scenario for WWAN technologies are reported in Part 2 report.
4. The device was configured to transmit CW wave signal for testing, due to Qualcomm® Smart Transmit feature, additional testing was not required for different modulations (CP-OFDM QPSK, CP-OFDM 16QAM, CP-OFDM 64QAM), RB configurations, component carriers, channel configurations (low channel, mid channel, high channel).
5. It's illustrated in Part 0 report that , for 5G mmW NR since there is total design-related uncertainty arising from TxAGC and device-to-device variation, the worst-case RF exposure should be determined by accounting for this device uncertainty of 2.1 dB, as well as n258/n260/n261 PD design target of 0.462 mW/cm² for antenna module 0/1/2. Smart Transmit algorithm limits PD exposure to 75% of maximum to provide at least 25% margin allocated for 4G LTE anchor. For EFS version 16 (or higher), secondary radio (5G mmW NR) can get up to 100% reserve factor irrespective of reserve_power_margin setting. Therefore, 5G mmW NR RF exposure for this DUT is evaluated by reported PD calculated as:

$$\text{n258/n260/n261 Reported PD} = \text{PD design target} + 2.1 \text{ dB} = 0.75 \text{ mW/cm}^2$$

Plot No.	antenna module	Beam ID 1	Beam ID 2	Band	Frequency (GHz)	Channel	Exposure Surface	Input Power limit	Power Setting	Test separation	modulation	Measured results Savg inc 4cm ² (W/m ²)	Measured results Savg tot 4cm ² (W/m ²)	Epeak [V/m]	Hpeak [A/m]
	Module0	24	-	N258	25200	High	S2(Back)	2.18	22	2mm	CW	2.58	3.26	66.7	0.184
	Module0	-	163	N258	25200	High	S2(Back)	3.01	30	2mm	CW	3.47	4.20	71.4	0.18
	Module0	23	151	N258	25200	High	S2(Back)	-0.78	-8	2mm	CW	2.17	2.65	55.4	0.135
1	Module1	39	-	N258	25000	Middle	S3(Left Side)	3.88	39	2mm	CW	3.34	4.34	59.3	0.18
	Module1	-	166	N258	25000	Middle	S3(Left Side)	3.9	39	2mm	CW	3.04	3.96	61.4	0.157
	Module1	26	154	N258	25000	Middle	S2(Back)	0.56	6	2mm	CW	1.35	2.06	50.8	0.114
	Module2	42	-	N258	25200	High	S4(Right Side)	1.7	17	2mm	CW	2.73	3.29	60.1	0.162
	Module2	-	161	N258	25000	Middle	S2(Back)	3.02	30	2mm	CW	3.06	4.01	63.9	0.191
	Module2	42	170	N258	25200	High	S4(Right Side)	-0.98	-10	2mm	CW	1.52	2.01	47.3	0.152
	Module1	3	-	N258	25200	High	S3(Left Side)	10.1	101	2mm	CW	1.55	1.85	46.4	0.134
	Module0	36	-	N260	38.5	Middle	S2(Back)	3.94	39	2mm	CW	2.34	3.16	77.6	0.227
	Module0	-	164	N260	38.5	Middle	S2(Back)	3.24	32	2mm	CW	1.93	2.49	65.7	0.169
	Module0	39	167	N260	38.5	Middle	S2(Back)	-0.14	-1	2mm	CW	1.17	1.52	54.4	0.132
	Module1	27	-	N260	38.5	Middle	S3(Left Side)	3.36	34	2mm	CW	1.98	2.90	76.4	0.238
	Module1	-	171	N260	37.05	Low	S3(Left Side)	5.73	57	2mm	CW	2.76	3.67	76.2	0.214
	Module1	40	168	N260	37.05	Low	S2(Back)	-0.11	-1	2mm	CW	0.94	1.18	40.8	0.114
2	Module2	35	-	N260	37.05	Low	S4(Right Side)	4.68	47	2mm	CW	5.11	7.32	117	0.259
	Module2	-	161	N260	37.05	Low	S4(Right Side)	4.7	47	2mm	CW	5.58	6.85	95.8	0.237
	Module2	44	172	N260	38.5	Middle	S4(Right Side)	1.27	13	2mm	CW	2.35	3.24	81.7	0.197
	Module0	39	-	N260	38.5	Middle	S2(Back)	4.19	42	2mm	CW	2.33	2.99	67.7	0.167
	Module0	0	-	N260	38.5	Middle	S2(Back)	10	100	2mm	CW	1.12	1.32	61.3	0.12
	Module0	23	-	N261	27.55	Low	S2(Back)	3.61	36	2mm	CW	5.10	5.93	78.2	0.246
3	Module0	-	165	N261	27.55	Low	S2(Back)	4.94	49	2mm	CW	5.61	7.02	103	0.233
	Module0	23	151	N261	27.55	Low	S2(Back)	0.53	5	2mm	CW	4.78	5.81	83.3	0.209
	Module1	28	-	N261	27.55	Low	S3(Left Side)	3.6	36	2mm	CW	2.86	3.45	58.9	0.153
	Module1	-	156	N261	27.55	Low	S3(Left Side)	3.04	30	2mm	CW	2.64	3.29	62.6	0.161
	Module1	28	156	N261	27.55	Low	S3(Left Side)	-0.41	-4	2mm	CW	2.11	2.61	51.8	0.154
	Module2	45	-	N261	27.55	Low	S4(Right Side)	1.51	15	2mm	CW	2.35	2.89	62.5	0.163
	Module2	-	163	N261	27.55	Low	S2(Back)	3.49	35	2mm	CW	2.64	3.50	68.5	0.195
	Module2	33	161	N261	27.925	Middle	S4(Right Side)	-1.23	-12	2mm	CW	2.24	2.68	57.8	0.154
	Module0	0	-	N261	27.925	Middle	S2(Back)	9.55	96	2mm	CW	2.14	2.46	74	0.167

11. 5G NR + LTE + WLAN + BT Sim-Tx analysis

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR and LTE transmission are managed and controlled by Qualcomm® Smart Transmit, while the RF exposure from WLAN and BT radios is managed using legacy approach, i.e., through a fixed power back-off if needed.

Since WLAN and BT do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN and BT need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values.

For EFS version 16 (or higher), secondary radio (5G mmW NR) can get up to 100% reserve factor irrespective of reserve_power_margin setting. So, in the below analysis, replace 75% with 100% reserve factor in case of EFS version 16 (or higher).

Smart Transmit current implementation assumes hotspots from 5G NR and LTE are collocated. Therefore, for a total of 100% exposure margin, if LTE uses x%, then the exposure margin left for 5G NR is capped to (100-x)%. Thus, the compliance equation for LTE + 5G NR is

$$x\% * A + (100-x)\% * B \leq 1.0,$$

Where, A is normalized reported time-averaged SAR exposure ratio from LTE, and $A \leq 1.0$; B is normalized reported time-averaged exposure ratio from 5G NR (i.e., PD exposure for mmW NR or SAR exposure for sub6 NR), and $B \leq 1.0$.

Let C = normalized reported SAR exposure ratio from WLAN+BT, then for compliance,

$$x\% * A + (100-x)\% * B + C \leq 1.0 \quad (1)$$

$$x\% * A + (100-x)\% * B \leq x\% * \max(A, B) + (100-x)\% * \max(A, B) \leq \max(A, B)$$

$$x\% * A + (100-x)\% * B + C \leq \max(A, B) + C \leq 1.0 \quad (2)$$

if $A + C \leq 1.0$ and $B + C \leq 1.0$ can be proven, then " $x\% * A + (100-x)\% * B + C \leq 1.0$ ". Therefore simultaneous transmission analysis for 5G NR + LTE + WLAN + BT can be performed in two steps

Step 1: Prove total exposure ratio (TER) of LTE + WLAN + BT < 1

Step 2: Prove total exposure ratio (TER) of 5G NR + WLAN + BT < 1

Step 1: it's justified in Part 1 SAR report (Sporton report number FA9D0701A, rev.01)

Step 2: it's justified in section 12.1

During TER analysis, the **reported time-averaged PD** (assuming *input.power.limit* for at least one beam < NV setting *Pmax*) applies only to the worst-surface of the device. For other surfaces, worst-case PD needs to be calculated to assess TER for the corresponding surface. To determine worst-case PD for other surfaces, using simulation results

1. Calculate ratio of simulated PD for desired surface to simulated PD of worstsurface for a given beam
2. Repeat 1 to obtain ratios for all supported beams, and determine maximum ratio
3. Repeat 1~2 to obtain the corresponding worst-case PD for rest of surfaces (non worst-case surfaces) needed for TER analysis.

For example, if the back surface of device has highest PD and is determined as worst-surface, then,

- **Back_surface_worst-case_PD = reported time-averaged PD**
where, **reported time-averaged PD** = *PD_design_target* + mmW device design related uncertainty
- **For other surfaces**
 - **front_surface_worst-case_PD = PD_ratio_front_to_back * reported timeaveraged PD**
where, $PD_ratio_front_to_back = \max \left\{ \frac{simulated\ PD_{front(i)}}{simulated\ P_back(i)}, beam\ i = 1,2 \dots N \right\}$, N= total N beams (all beams) supported by the mmW module being evaluated being evaluated.
 - Follow similar approach to determine worst-case PD for bottom/top/left/right (if applicable).
- **For body-worn and hotspot scenario, if SAR was measured at 15mm and 10mm, respectively, then the worst-case PD at 15mm and 10mm separation distance should be determined per surface as**
 - **15mm_worst-case_PD = PD_ratio_15mm_to_0mm * reported timeaveraged PD**
Here, $PD_ratio_15\ mm_to_0mm = \max \left\{ \frac{simulated\ Pd\ at\ 15\ mm\ (i)}{simulated\ PD\ at\ 0\ mm\ (i)}, beam\ i = 1,2 \dots N \right\}$, , N = total number of beams (**all beams**) supported by the mmW module being evaluated.
 - **10mm_worst-case_PD = PD_ratio_10mm_to_0mm * reported timeaveraged PD**
Here, $PD_ratio_15\ mm_to_0mm = \max \left\{ \frac{simulated\ Pd\ at\ 10\ mm\ (i)}{simulated\ PD\ at\ 0\ mm\ (i)}, beam\ i = 1,2 \dots N \right\}$, , N = total number of beams (**all beams**) supported by the mmW module being evaluated.
 - Note the validated model/simulation should be used in worst-case PD determination.

12. Simultaneous-Tx analysis

NO.	Simultaneous Transmission Configurations	Exposure Positions			
		Head	Hotspot	Body-worn	Extremity
1.	BT + LTE+ 5G FR2	Yes	Yes	Yes	Yes
2.	2.4GHz WLAN + LTE+ 5G FR2	Yes	Yes	Yes	Yes
3.	5GHz WLAN + LTE+ 5G FR2	Yes	Yes	Yes	Yes
4.	2.4GHz WLAN + 5GHz WLAN + LTE+ 5G FR2	Yes	Yes	Yes	Yes
5.	2.4GHz WLAN + BT + LTE+ 5G FR2	Yes	Yes	Yes	Yes
6.	2.4GHz WLAN + 5GHz WLAN + BT + LTE+ 5G FR2	Yes	Yes	Yes	Yes
7.	5GHz WLAN + BT + LTE+ 5G FR2	Yes	Yes	Yes	Yes

General Note:

- The WLAN and Bluetooth SAR test results were referring the report of FCC ID: 2ABZ2-EF14A (Sporton SAR Report No. FA002623-02A).
- Considering n258/n260/n261 transmitter with WLAN and Bluetooth can transmit simultaneously, the basic restrictions are on SAR and power density, and summation of these quantities should follow below formula and the simultaneous transmission analysis was following below step.
 - Use the standalone SAR according original report to collocate with n258/n260/n261 transmitter power density at each exposure positions, if the result < 1, additional analysis is not necessary.

The $\sum$ of (the highest measured or estimated SAR for each standalone antenna configuration, adjusted for maximum tune-up tolerance) / 1.6 W/kg] + $\sum$ of MPE ratios] is ≤ 1.0 .

12.1 Simultaneous transmission analysis for WiFi/BT + 5G NR

NR Band	Antenna Module	Surface	Evaluation Distance (mm)	Ratio*	PD_Design Target +Total uncertainty (W/m ²)	PD_Design Target +Total uncertainty (W/m ²)*Ratio	Remark
n258	0	S2 (Back)	2mm	1	7.5	7.5	Extremity
		S1 (Front)	2mm	0.08	7.5	0.6	Head/Extremity
		S3 (Left Side)	2mm	1.00	7.5	7.5	Extremity
		S5 (Top Side)	2mm	0.34	7.5	2.5	Extremity
		S4 (Right Side)	2mm	Excluded			
		S6 (Bottom side)	2mm	Excluded			
		S2 (Back)	10mm	0.64	7.5	4.83	Body worn/Hotspot
n260	0	S2 (Back)	15 mm	0.52	7.5	3.92	Body worn
		S2 (Back)	2mm	1	7.5	7.5	Extremity
		S1 (Front)	2mm	0.05	7.5	0.4	Head/Extremity
		S3 (Left Side)	2mm	1.00	7.5	7.5	Extremity
		S5 (Top Side)	2mm	0.32	7.5	2.4	Extremity
		S4 (Right Side)	2mm	Excluded			
		S6 (Bottom side)	2mm	Excluded			
n261	0	S2 (Back)	10mm	0.69	7.5	5.2	Body worn/Hotspot
		S2 (Back)	15 mm	0.54	7.5	4.1	Body worn
		S2 (Back)	2mm	1	7.5	7.5	Extremity
		S1 (Front)	2mm	0.01	7.5	0.1	Head/Extremity
		S3 (Left Side)	2mm	1.00	7.5	7.5	Extremity
		S5 (Top Side)	2mm	0.26	7.5	2.0	Extremity
		S4 (Right Side)	2mm	Excluded			
		S6 (Bottom side)	2mm	Excluded			
		S2 (Back)	10mm	0.66	7.5	4.95	Body worn/Hotspot
		S2 (Back)	15 mm	0.53	7.5	4.01	Body worn

Remark:

- WWAN and WLAN, WWAN and BT SPLSR<0.04, "75% mmWave" will be used for simultaneous transmission analysis.
- *Ratio is highest ratio of (PD on desired exposure plane) / (PD on worst-surface at 2mm evaluation distance) out of all beams and out of all channels include in Power Density Simulation Report.

NR Band	Antenna Module	Surface	Evaluation Distance (mm)	Ratio*	PD_Design Target +Total uncertainty (W/m ²)	PD_Design Target +Total uncertainty (W/m ²)*Ratio	Remark
n258	1	S3 (Left Side)	2mm	1	7.5	7.5	Extremity
		S1 (Front)	2mm	0.45	7.5	3.36	Head/Extremity
		S2 (Back)	2mm	1.00	7.5	7.50	Extremity
		S4 (Right Side)	2mm	Excluded			
		S5 (Top Side)	2mm	Excluded			
		S6 (Bottom side)	2mm	Excluded			
		S3 (Left Side)	10mm	0.57	7.5	4.25	Body worn/Hotspot
		S3 (Left Side)	15 mm	0.44	7.5	3.27	Body worn
n260	1	S3 (Left Side)	2mm	1	7.5	7.5	Extremity
		S1 (Front)	2mm	0.36	7.5	2.71	Head/Extremity
		S2 (Back)	2mm	1.00	7.5	7.50	Extremity
		S4 (Right Side)	2mm	Excluded			
		S5 (Top Side)	2mm	Excluded			
		S6 (Bottom side)	2mm	Excluded			
		S3 (Left Side)	10mm	0.66	7.5	4.93	Body worn/Hotspot
		S3 (Left Side)	15 mm	0.50	7.5	3.73	Body worn
n261	1	S3 (Left Side)	2mm	1	7.5	7.5	Extremity
		S1 (Front)	2mm	0.42	7.5	3.19	Head/Extremity
		S2 (Back)	2mm	1.00	7.5	7.50	Extremity
		S4 (Right Side)	2mm	Excluded			
		S5 (Top Side)	2mm	Excluded			
		S6 (Bottom side)	2mm	Excluded			
		S3 (Left Side)	10mm	0.61	7.5	4.57	Body worn/Hotspot
		S3 (Left Side)	15 mm	0.48	7.5	3.63	Body worn
n258	2	S4 (Right Side)	2mm	1	7.5	7.5	Extremity
		S1 (Front)	2mm	0.54	7.5	4.07	Head/Extremity
		S2 (Back)	2mm	1.00	7.5	7.50	Extremity
		S3 (Left Side)	2mm	Excluded			
		S5 (Top Side)	2mm	Excluded			
		S6 (Bottom side)	2mm	Excluded			
		S4 (Right Side)	10mm	0.59	7.5	4.44	Body worn/Hotspot
		S4 (Right Side)	15 mm	0.46	7.5	3.47	Body worn
n260	2	S4 (Right Side)	2mm	1	7.5	7.5	Extremity
		S1 (Front)	2mm	0.52	7.5	3.89	Head/Extremity
		S2 (Back)	2mm	1.00	7.5	7.50	Extremity
		S3 (Left Side)	2mm	Excluded			
		S5 (Top Side)	2mm	Excluded			
		S6 (Bottom side)	2mm	Excluded			
		S4 (Right Side)	10mm	0.63	7.5	4.70	Body worn/Hotspot
		S4 (Right Side)	15 mm	0.48	7.5	3.61	Body worn
n261	2	S4 (Right Side)	2mm	1	7.5	7.5	Extremity
		S1 (Front)	2mm	0.44	7.5	3.30	Head/Extremity
		S2 (Back)	2mm	1.00	7.5	7.50	Extremity
		S3 (Left Side)	2mm	Excluded			
		S5 (Top Side)	2mm	Excluded			
		S6 (Bottom side)	2mm	Excluded			
		S4 (Right Side)	10mm	0.60	7.5	4.48	Body worn/Hotspot
		S4 (Right Side)	15 mm	0.47	7.5	3.50	Body worn

Remark:

1. *Ratio is highest ratio of (PD on desired exposure plane) / (PD on worst-surface at 2mm evaluation distance) out of all beams and out of all channels include in Power Density Simulation Report.

12.2 Head Exposure Condition

<When 5G FR2 transmit with BT>

Band		Exposure Position	1	6	Reported SAR/1.6 + PD/10 Summation
			Bluetooth Ant 1	PD	1+6 Summed Ratio
			1g SAR (W/kg)	4cm ² (W/m ²)	
n258	Antenna Module 0	Right Cheek	0.128	0.600	0.140
		Right Tilted	0.133	0.600	0.143
		Left Cheek	0.137	0.600	0.146
		Left Tilted	0.130	0.600	0.141
n258	Antenna Module 1	Right Cheek	0.128	3.360	0.416
		Right Tilted	0.133	3.360	0.419
		Left Cheek	0.137	3.360	0.422
		Left Tilted	0.130	3.360	0.417
n258	Antenna Module 2	Right Cheek	0.128	4.070	0.487
		Right Tilted	0.133	4.070	0.490
		Left Cheek	0.137	4.070	0.493
		Left Tilted	0.130	4.070	0.488
n260	Antenna Module 0	Right Cheek	0.128	0.400	0.120
		Right Tilted	0.133	0.400	0.123
		Left Cheek	0.137	0.400	0.126
		Left Tilted	0.130	0.400	0.121
n260	Antenna Module 1	Right Cheek	0.128	2.710	0.351
		Right Tilted	0.133	2.710	0.354
		Left Cheek	0.137	2.710	0.357
		Left Tilted	0.130	2.710	0.352
n260	Antenna Module 2	Right Cheek	0.128	3.890	0.469
		Right Tilted	0.133	3.890	0.472
		Left Cheek	0.137	3.890	0.475
		Left Tilted	0.130	3.890	0.470
n261	Antenna Module 0	Right Cheek	0.128	0.100	0.090
		Right Tilted	0.133	0.100	0.093
		Left Cheek	0.137	0.100	0.096
		Left Tilted	0.130	0.100	0.091
n261	Antenna Module 1	Right Cheek	0.128	3.190	0.399
		Right Tilted	0.133	3.190	0.402
		Left Cheek	0.137	3.190	0.405
		Left Tilted	0.130	3.190	0.400
n261	Antenna Module 2	Right Cheek	0.128	3.300	0.410
		Right Tilted	0.133	3.300	0.413
		Left Cheek	0.137	3.300	0.416
		Left Tilted	0.130	3.300	0.411

<When 5G FR2 transmit with 2GHz WLAN or 5GHz WLAN>

WWAN Band		Exposure Position	2	3	6	Reported SAR/1.6 + PD/10 Summation	
			2.4GHz WLAN Ant 1+2 1g SAR (W/kg)	5GHz WLAN Ant 1+2 1g SAR (W/kg)	PD 4cm ² (W/m ²)	2+6 Summed Ratio	3+6 Summed Ratio
n258	Antenna Module 0	Right Cheek	0.424	0.401	0.600	0.325	0.311
		Right Tilted	0.571	0.337	0.600	0.417	0.271
		Left Cheek	0.409	0.546	0.600	0.316	0.401
		Left Tilted	0.498	0.399	0.600	0.371	0.309
n258	Antenna Module 1	Right Cheek	0.424	0.401	3.360	0.601	0.587
		Right Tilted	0.571	0.337	3.360	0.693	0.547
		Left Cheek	0.409	0.546	3.360	0.592	0.677
		Left Tilted	0.498	0.399	3.360	0.647	0.585
n258	Antenna Module 2	Right Cheek	0.424	0.401	4.070	0.672	0.658
		Right Tilted	0.571	0.337	4.070	0.764	0.618
		Left Cheek	0.409	0.546	4.070	0.663	0.748
		Left Tilted	0.498	0.399	4.070	0.718	0.656
n260	Antenna Module 0	Right Cheek	0.424	0.401	0.400	0.305	0.291
		Right Tilted	0.571	0.337	0.400	0.397	0.251
		Left Cheek	0.409	0.546	0.400	0.296	0.381
		Left Tilted	0.498	0.399	0.400	0.351	0.289
n260	Antenna Module 1	Right Cheek	0.424	0.401	2.710	0.536	0.522
		Right Tilted	0.571	0.337	2.710	0.628	0.482
		Left Cheek	0.409	0.546	2.710	0.527	0.612
		Left Tilted	0.498	0.399	2.710	0.582	0.520
n260	Antenna Module 2	Right Cheek	0.424	0.401	3.890	0.654	0.640
		Right Tilted	0.571	0.337	3.890	0.746	0.600
		Left Cheek	0.409	0.546	3.890	0.645	0.730
		Left Tilted	0.498	0.399	3.890	0.700	0.638
n261	Antenna Module 0	Right Cheek	0.424	0.401	0.100	0.275	0.261
		Right Tilted	0.571	0.337	0.100	0.367	0.221
		Left Cheek	0.409	0.546	0.100	0.266	0.351
		Left Tilted	0.498	0.399	0.100	0.321	0.259
n261	Antenna Module 1	Right Cheek	0.424	0.401	3.190	0.584	0.570
		Right Tilted	0.571	0.337	3.190	0.676	0.530
		Left Cheek	0.409	0.546	3.190	0.575	0.660
		Left Tilted	0.498	0.399	3.190	0.630	0.568
n261	Antenna Module 2	Right Cheek	0.424	0.401	3.300	0.595	0.581
		Right Tilted	0.571	0.337	3.300	0.687	0.541
		Left Cheek	0.409	0.546	3.300	0.586	0.671
		Left Tilted	0.498	0.399	3.300	0.641	0.579

<When 5G FR2 transmit with 2GHz WLAN and 5GHz WLAN and BT>

WWAN Band		Exposure Position	1	2	3	4	6	Reported SAR/1.6 + PD/10 Summation			
			2.4GHz WLAN Ant 1+2	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1+2	Bluetooth Ant 1	PD	1+3+6 Summed Ratio	2+4+6 Summed Ratio	3+4+6 Summed Ratio	2+3+4+6 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm^2(W/m^2)				
n258	Antenna Module 0	Right Cheek	0.243	0.061	0.173	0.128	0.600	0.320	0.178	0.248	0.286
		Right Tilted	0.349	0.037	0.169	0.133	0.600	0.384	0.166	0.249	0.272
		Left Cheek	0.246	0.253	0.348	0.137	0.600	0.431	0.304	0.363	0.521
		Left Tilted	0.280	0.070	0.210	0.130	0.600	0.366	0.185	0.273	0.316
n258	Antenna Module 1	Right Cheek	0.243	0.061	0.173	0.128	3.360	0.596	0.454	0.524	0.562
		Right Tilted	0.349	0.037	0.169	0.133	3.360	0.660	0.442	0.525	0.548
		Left Cheek	0.246	0.253	0.348	0.137	3.360	0.707	0.580	0.639	0.797
		Left Tilted	0.280	0.070	0.210	0.130	3.360	0.642	0.461	0.549	0.592
n258	Antenna Module 2	Right Cheek	0.243	0.061	0.173	0.128	4.070	0.667	0.525	0.595	0.633
		Right Tilted	0.349	0.037	0.169	0.133	4.070	0.731	0.513	0.596	0.619
		Left Cheek	0.246	0.253	0.348	0.137	4.070	0.778	0.651	0.710	0.868
		Left Tilted	0.280	0.070	0.210	0.130	4.070	0.713	0.532	0.620	0.663
n260	Antenna Module 0	Right Cheek	0.243	0.061	0.173	0.128	0.400	0.300	0.158	0.228	0.266
		Right Tilted	0.349	0.037	0.169	0.133	0.400	0.364	0.146	0.229	0.252
		Left Cheek	0.246	0.253	0.348	0.137	0.400	0.411	0.284	0.343	0.501
		Left Tilted	0.280	0.070	0.210	0.130	0.400	0.346	0.165	0.253	0.296
n260	Antenna Module 1	Right Cheek	0.243	0.061	0.173	0.128	2.710	0.531	0.389	0.459	0.497
		Right Tilted	0.349	0.037	0.169	0.133	2.710	0.595	0.377	0.460	0.483
		Left Cheek	0.246	0.253	0.348	0.137	2.710	0.642	0.515	0.574	0.732
		Left Tilted	0.280	0.070	0.210	0.130	2.710	0.577	0.396	0.484	0.527
n260	Antenna Module 2	Right Cheek	0.243	0.061	0.173	0.128	3.890	0.649	0.507	0.577	0.615
		Right Tilted	0.349	0.037	0.169	0.133	3.890	0.713	0.495	0.578	0.601
		Left Cheek	0.246	0.253	0.348	0.137	3.890	0.760	0.633	0.692	0.850
		Left Tilted	0.280	0.070	0.210	0.130	3.890	0.695	0.514	0.602	0.645
n261	Antenna Module 0	Right Cheek	0.243	0.061	0.173	0.128	0.100	0.270	0.128	0.198	0.236
		Right Tilted	0.349	0.037	0.169	0.133	0.100	0.334	0.116	0.199	0.222
		Left Cheek	0.246	0.253	0.348	0.137	0.100	0.381	0.254	0.313	0.471
		Left Tilted	0.280	0.070	0.210	0.130	0.100	0.316	0.135	0.223	0.266
n261	Antenna Module 1	Right Cheek	0.243	0.061	0.173	0.128	3.190	0.579	0.437	0.507	0.545
		Right Tilted	0.349	0.037	0.169	0.133	3.190	0.643	0.425	0.508	0.531
		Left Cheek	0.246	0.253	0.348	0.137	3.190	0.690	0.563	0.622	0.780
		Left Tilted	0.280	0.070	0.210	0.130	3.190	0.625	0.444	0.532	0.575
n261	Antenna Module 2	Right Cheek	0.243	0.061	0.173	0.128	3.300	0.590	0.448	0.518	0.556
		Right Tilted	0.349	0.037	0.169	0.133	3.300	0.654	0.436	0.519	0.542
		Left Cheek	0.246	0.253	0.348	0.137	3.300	0.701	0.574	0.633	0.791
		Left Tilted	0.280	0.070	0.210	0.130	3.300	0.636	0.455	0.543	0.586

12.3 Hotspot Exposure Condition

<When 5G FR2 transmit with 2 BT>

WWAN Band		Exposure Position	1	6	Reported SAR/1.6 + PD/10 Summation
			Bluetooth Ant 1 1g SAR (W/kg)	PD 4cm ² (W/m ²)	1+6 Summed Ratio
n258	Antenna Module 0	Front	0.134	4.830	0.567
		Back	0.171	4.830	0.590
		Left side	0.011	4.830	0.490
		Right side	0.018	4.830	0.494
		Top side	0.351	4.830	0.702
		Bottom side		4.830	0.483
n258	Antenna Module 1	Front	0.134	4.250	0.509
		Back	0.171	4.250	0.532
		Left side	0.011	4.250	0.432
		Right side	0.018	4.250	0.436
		Top side	0.351	4.250	0.644
		Bottom side		4.250	0.425
n258	Antenna Module 2	Front	0.134	4.440	0.528
		Back	0.171	4.440	0.551
		Left side	0.011	4.440	0.451
		Right side	0.018	4.440	0.455
		Top side	0.351	4.440	0.663
		Bottom side		4.440	0.444
n260	Antenna Module 0	Front	0.134	5.200	0.604
		Back	0.171	5.200	0.627
		Left side	0.011	5.200	0.527
		Right side	0.018	5.200	0.531
		Top side	0.351	5.200	0.739
		Bottom side		5.200	0.520
n260	Antenna Module 1	Front	0.134	4.930	0.577
		Back	0.171	4.930	0.600
		Left side	0.011	4.930	0.500
		Right side	0.018	4.930	0.504
		Top side	0.351	4.930	0.712
		Bottom side		4.930	0.493
n260	Antenna Module 2	Front	0.134	4.700	0.554
		Back	0.171	4.700	0.577
		Left side	0.011	4.700	0.477
		Right side	0.018	4.700	0.481
		Top side	0.351	4.700	0.689
		Bottom side		4.700	0.470
n261	Antenna Module 0	Front	0.134	4.950	0.579
		Back	0.171	4.950	0.602
		Left side	0.011	4.950	0.502
		Right side	0.018	4.950	0.506
		Top side	0.351	4.950	0.714
		Bottom side		4.950	0.495
n261	Antenna Module 1	Front	0.134	4.570	0.541
		Back	0.171	4.570	0.564
		Left side	0.011	4.570	0.464
		Right side	0.018	4.570	0.468
		Top side	0.351	4.570	0.676
		Bottom side		4.570	0.457
n261	Antenna Module 2	Front	0.134	4.480	0.532
		Back	0.171	4.480	0.555
		Left side	0.011	4.480	0.455
		Right side	0.018	4.480	0.459
		Top side	0.351	4.480	0.667
		Bottom side		4.480	0.448

<When 5G FR2 transmit with 2GHz WLAN or 5GHz WLAN>

WWAN Band		Exposure Position	2	3	6	Reported SAR/1.6 + PD/10 Summation	
			2.4GHz WLAN Ant 1+2 1g SAR (W/kg)	5GHz WLAN Ant 1+2 1g SAR (W/kg)	PD 4cm ² (W/m ²)	2+6 Summed Ratio	3+6 Summed Ratio
n258	Antenna Module 0	Front	0.175	0.068	4.830	0.592	0.526
		Back	0.219	0.643	4.830	0.620	0.885
		Left side	0.003	0.001	4.830	0.485	0.484
		Right side	0.252	0.283	4.830	0.641	0.660
		Top side	0.683	0.212	4.830	0.910	0.616
		Bottom side			4.830	0.483	0.483
n258	Antenna Module 1	Front	0.175	0.068	4.720	0.581	0.515
		Back	0.219	0.643	4.720	0.609	0.874
		Left side	0.003	0.001	4.720	0.474	0.473
		Right side	0.252	0.283	4.720	0.630	0.649
		Top side	0.683	0.212	4.720	0.899	0.605
		Bottom side			4.720	0.472	0.472
n258	Antenna Module 2	Front	0.175	0.068	4.520	0.561	0.495
		Back	0.219	0.643	4.520	0.589	0.854
		Left side	0.003	0.001	4.520	0.454	0.453
		Right side	0.252	0.283	4.520	0.610	0.629
		Top side	0.683	0.212	4.520	0.879	0.585
		Bottom side			4.520	0.452	0.452
n260	Antenna Module 0	Front	0.175	0.068	5.000	0.609	0.543
		Back	0.219	0.643	5.000	0.637	0.902
		Left side	0.003	0.001	5.000	0.502	0.501
		Right side	0.252	0.283	5.000	0.658	0.677
		Top side	0.683	0.212	5.000	0.927	0.633
		Bottom side			5.000	0.500	0.500
n260	Antenna Module 1	Front	0.175	0.068	4.570	0.566	0.500
		Back	0.219	0.643	4.570	0.594	0.859
		Left side	0.003	0.001	4.570	0.459	0.458
		Right side	0.252	0.283	4.570	0.615	0.634
		Top side	0.683	0.212	4.570	0.884	0.590
		Bottom side			4.570	0.457	0.457
n260	Antenna Module 2	Front	0.175	0.068	4.480	0.557	0.491
		Back	0.219	0.643	4.480	0.585	0.850
		Left side	0.003	0.001	4.480	0.450	0.449
		Right side	0.252	0.283	4.480	0.606	0.625
		Top side	0.683	0.212	4.480	0.875	0.581
		Bottom side			4.480	0.448	0.448
n261	Antenna Module 0	Front	0.175	0.068	5.180	0.627	0.561
		Back	0.219	0.643	5.180	0.655	0.920
		Left side	0.003	0.001	5.180	0.520	0.519
		Right side	0.252	0.283	5.180	0.676	0.695
		Top side	0.683	0.212	5.180	0.945	0.651
		Bottom side			5.180	0.518	0.518
n261	Antenna Module 1	Front	0.175	0.068	4.930	0.602	0.536
		Back	0.219	0.643	4.930	0.630	0.895
		Left side	0.003	0.001	4.930	0.495	0.494
		Right side	0.252	0.283	4.930	0.651	0.670
		Top side	0.683	0.212	4.930	0.920	0.626
		Bottom side			4.930	0.493	0.493
n261	Antenna Module 2	Front	0.175	0.068	4.700	0.579	0.513
		Back	0.219	0.643	4.700	0.607	0.872
		Left side	0.003	0.001	4.700	0.472	0.471
		Right side	0.252	0.283	4.700	0.628	0.647
		Top side	0.683	0.212	4.700	0.897	0.603
		Bottom side			4.700	0.470	0.470

<When 5G FR2 transmit with 2GHz WLAN and 5GHz WLAN and BT>

WWAN Band		Exposure Position	1	2	3	4	5	Reported SAR/1.6 + PD/10 Summation			
			2.4GHz WLAN Ant 1+2	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1+2	Bluetooth Ant 1	PD	1+3+6 Summed Ratio	2+4+6 Summed Ratio	3+4+6 Summed Ratio	2+3+4+6 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm^2(W/m^2)				
n258	Antenna Module 0	Front	0.073	0.002	0.001	0.134	4.830	0.529	0.568	0.567	0.569
		Back	0.084	0.093	0.306	0.171	4.830	0.727	0.648	0.781	0.839
		Left side	0.001	0.002	0.001	0.011	4.830	0.484	0.491	0.491	0.492
		Right side	0.107	0.303	0.148	0.018	4.830	0.642	0.684	0.587	0.776
		Top side	0.220	0.002	0.068	0.351	4.830	0.663	0.704	0.745	0.746
		Bottom side					4.830	0.483	0.483	0.483	0.483
n258	Antenna Module 1	Front	0.073	0.002	0.001	0.134	4.720	0.518	0.557	0.556	0.558
		Back	0.084	0.093	0.306	0.171	4.720	0.716	0.637	0.770	0.828
		Left side	0.001	0.002	0.001	0.011	4.720	0.473	0.480	0.480	0.481
		Right side	0.107	0.303	0.148	0.018	4.720	0.631	0.673	0.576	0.765
		Top side	0.220	0.002	0.068	0.351	4.720	0.652	0.693	0.734	0.735
		Bottom side					4.720	0.472	0.472	0.472	0.472
n258	Antenna Module 2	Front	0.073	0.002	0.001	0.134	4.520	0.498	0.537	0.536	0.538
		Back	0.084	0.093	0.306	0.171	4.520	0.696	0.617	0.750	0.808
		Left side	0.001	0.002	0.001	0.011	4.520	0.453	0.460	0.460	0.461
		Right side	0.107	0.303	0.148	0.018	4.520	0.611	0.653	0.556	0.745
		Top side	0.220	0.002	0.068	0.351	4.520	0.632	0.673	0.714	0.715
		Bottom side					4.520	0.452	0.452	0.452	0.452
n260	Antenna Module 0	Front	0.073	0.002	0.001	0.134	5.000	0.546	0.585	0.584	0.586
		Back	0.084	0.093	0.306	0.171	5.000	0.744	0.665	0.798	0.856
		Left side	0.001	0.002	0.001	0.011	5.000	0.501	0.508	0.508	0.509
		Right side	0.107	0.303	0.148	0.018	5.000	0.659	0.701	0.604	0.793
		Top side	0.220	0.002	0.068	0.351	5.000	0.680	0.721	0.762	0.763
		Bottom side					5.000	0.500	0.500	0.500	0.500
n260	Antenna Module 1	Front	0.073	0.002	0.001	0.134	4.570	0.503	0.542	0.541	0.543
		Back	0.084	0.093	0.306	0.171	4.570	0.701	0.622	0.755	0.813
		Left side	0.001	0.002	0.001	0.011	4.570	0.458	0.465	0.465	0.466
		Right side	0.107	0.303	0.148	0.018	4.570	0.616	0.658	0.561	0.750
		Top side	0.220	0.002	0.068	0.351	4.570	0.637	0.678	0.719	0.720
		Bottom side					4.570	0.457	0.457	0.457	0.457
n260	Antenna Module 2	Front	0.073	0.002	0.001	0.134	4.480	0.494	0.533	0.532	0.534
		Back	0.084	0.093	0.306	0.171	4.480	0.692	0.613	0.746	0.804
		Left side	0.001	0.002	0.001	0.011	4.480	0.449	0.456	0.456	0.457
		Right side	0.107	0.303	0.148	0.018	4.480	0.607	0.649	0.552	0.741
		Top side	0.220	0.002	0.068	0.351	4.480	0.628	0.669	0.710	0.711
		Bottom side					4.480	0.448	0.448	0.448	0.448
n261	Antenna Module 0	Front	0.073	0.002	0.001	0.134	5.180	0.564	0.603	0.602	0.604
		Back	0.084	0.093	0.306	0.171	5.180	0.762	0.683	0.816	0.874
		Left side	0.001	0.002	0.001	0.011	5.180	0.519	0.526	0.526	0.527
		Right side	0.107	0.303	0.148	0.018	5.180	0.677	0.719	0.622	0.811
		Top side	0.220	0.002	0.068	0.351	5.180	0.698	0.739	0.780	0.781
		Bottom side					5.180	0.518	0.518	0.518	0.518
n261	Antenna Module 1	Front	0.073	0.002	0.001	0.134	4.930	0.539	0.578	0.577	0.579
		Back	0.084	0.093	0.306	0.171	4.930	0.737	0.658	0.791	0.849
		Left side	0.001	0.002	0.001	0.011	4.930	0.494	0.501	0.501	0.502
		Right side	0.107	0.303	0.148	0.018	4.930	0.652	0.694	0.597	0.786
		Top side	0.220	0.002	0.068	0.351	4.930	0.673	0.714	0.755	0.756
		Bottom side					4.930	0.493	0.493	0.493	0.493
n261	Antenna Module 2	Front	0.073	0.002	0.001	0.134	4.700	0.516	0.555	0.554	0.556
		Back	0.084	0.093	0.306	0.171	4.700	0.714	0.635	0.768	0.826
		Left side	0.001	0.002	0.001	0.011	4.700	0.471	0.478	0.478	0.479
		Right side	0.107	0.303	0.148	0.018	4.700	0.629	0.671	0.574	0.763
		Top side	0.220	0.002	0.068	0.351	4.700	0.650	0.691	0.732	0.733
		Bottom side					4.700	0.470	0.470	0.470	0.470

12.4 Body-worn Exposure Condition

<When 5G FR2 transmit with 2 BT>

WWAN Band		Exposure Position	1	6	Reported SAR/1.6 + PD/10 Summation
			Bluetooth Ant 1	PD	1+6 Summed Ratio
			1g SAR (W/kg)	4cm ² (W/m ²)	
n258	Antenna Module 0	Front	0.066	3.920	0.433
		Back	0.140	3.920	0.480
n258	Antenna Module 1	Front	0.066	3.270	0.368
		Back	0.140	3.270	0.415
n258	Antenna Module 2	Front	0.066	3.470	0.388
		Back	0.140	3.470	0.435
n260	Antenna Module 0	Front	0.066	4.100	0.451
		Back	0.140	4.100	0.498
n260	Antenna Module 1	Front	0.066	3.730	0.414
		Back	0.140	3.730	0.461
n260	Antenna Module 2	Front	0.066	3.610	0.402
		Back	0.140	3.610	0.449
n261	Antenna Module 0	Front	0.066	4.010	0.442
		Back	0.140	4.010	0.489
n261	Antenna Module 1	Front	0.066	3.630	0.404
		Back	0.140	3.630	0.451
n261	Antenna Module 2	Front	0.066	3.500	0.391
		Back	0.140	3.500	0.438

<When 5G FR2 transmit with 2GHz WLAN or 5GHz WLAN>

WWAN Band		Exposure Position	2	3	6	Reported SAR/1.6 + PD/10 Summation	
			2.4GHz WLAN Ant 1+2	5GHz WLAN Ant 1+2	PD	2+6 Summed Ratio	3+6 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	4cm ² (W/m ²)		
n258	Antenna Module 0	Front	0.140	0.083	3.900	0.478	0.442
		Back	0.252	0.765	3.900	0.548	0.868
n258	Antenna Module 1	Front	0.140	0.083	3.400	0.428	0.392
		Back	0.252	0.765	3.400	0.498	0.818
n258	Antenna Module 2	Front	0.140	0.083	4.070	0.495	0.459
		Back	0.252	0.765	4.070	0.565	0.885
n260	Antenna Module 0	Front	0.140	0.083	4.000	0.488	0.452
		Back	0.252	0.765	4.000	0.558	0.878
n260	Antenna Module 1	Front	0.140	0.083	3.630	0.451	0.415
		Back	0.252	0.765	3.630	0.521	0.841
n260	Antenna Module 2	Front	0.140	0.083	3.510	0.439	0.403
		Back	0.252	0.765	3.510	0.509	0.829
n261	Antenna Module 0	Front	0.140	0.083	4.050	0.493	0.457
		Back	0.252	0.765	4.050	0.563	0.883
n261	Antenna Module 1	Front	0.140	0.083	3.730	0.461	0.425
		Back	0.252	0.765	3.730	0.531	0.851
n261	Antenna Module 2	Front	0.140	0.083	3.610	0.449	0.413
		Back	0.252	0.765	3.610	0.519	0.839

<When 5G FR2 transmit with 2GHz WLAN and 5GHz WLAN and BT>

WWAN Band		Exposure Position	1	2	3	4	5	Reported SAR/1.6 + PD/10 Summation			
			2.4GHz WLAN Ant 1+2	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1+2	Bluetooth Ant 1	PD	1+3+6 Summed Ratio	2+4+6 Summed Ratio	3+4+6 Summed Ratio	2+3+4+6 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm ² (W/m ²)				
n258	Antenna Module 0	Front	0.140	0.072	0.045	0.066	3.900	0.506	0.476	0.459	0.504
		Back	0.252	0.106	0.377	0.140	3.900	0.783	0.544	0.713	0.779
n258	Antenna Module 1	Front	0.140	0.072	0.045	0.066	3.400	0.456	0.426	0.409	0.454
		Back	0.252	0.106	0.377	0.140	3.400	0.733	0.494	0.663	0.729
n258	Antenna Module 2	Front	0.140	0.072	0.045	0.066	4.070	0.523	0.493	0.476	0.521
		Back	0.252	0.106	0.377	0.140	4.070	0.800	0.561	0.730	0.796
n260	Antenna Module 0	Front	0.140	0.072	0.045	0.066	4.000	0.516	0.486	0.469	0.514
		Back	0.252	0.106	0.377	0.140	4.000	0.793	0.554	0.723	0.789
n260	Antenna Module 1	Front	0.140	0.072	0.045	0.066	3.630	0.479	0.449	0.432	0.477
		Back	0.252	0.106	0.377	0.140	3.630	0.756	0.517	0.686	0.752
n260	Antenna Module 2	Front	0.140	0.072	0.045	0.066	3.510	0.467	0.437	0.420	0.465
		Back	0.252	0.106	0.377	0.140	3.510	0.744	0.505	0.674	0.740
n261	Antenna Module 0	Front	0.140	0.072	0.045	0.066	4.050	0.521	0.491	0.474	0.519
		Back	0.252	0.106	0.377	0.140	4.050	0.798	0.559	0.728	0.794
n261	Antenna Module 1	Front	0.140	0.072	0.045	0.066	3.730	0.489	0.459	0.442	0.487
		Back	0.252	0.106	0.377	0.140	3.730	0.766	0.527	0.696	0.762
n261	Antenna Module 2	Front	0.140	0.072	0.045	0.066	3.610	0.477	0.447	0.430	0.475
		Back	0.252	0.106	0.377	0.140	3.610	0.754	0.515	0.684	0.750



12.5 Extremity Exposure Condition

WWAN Band		Exposure Position	2	4	6	Reported SAR/4.0 + PD/10 Summation		
			2.4GHz WLAN Ant 1+2 10g SAR (W/kg)	5GHz WLAN Ant 1+2 10g SAR (W/kg)	PD 4cm ² (W/m ²)	2+6 Summed Ratio	4+6 Summed Ratio	2+4+6 Summed Ratio
n258	Antenna Module 0	Front		0.177	0.600	0.060	0.104	0.104
		Back		0.994	7.500	0.750	0.999	0.999
		Left side			7.500	0.750	0.750	0.750
		Right side		0.553		0.000	0.138	0.138
		Top side	0.958	0.179	2.500	0.490	0.295	0.534
		Bottom side				0.000	0.000	0.000
n258	Antenna Module 1	Front		0.177	3.360	0.336	0.380	0.380
		Back		0.994	7.500	0.750	0.999	0.999
		Left side			7.500	0.750	0.750	0.750
		Right side		0.553		0.000	0.138	0.138
		Top side	0.958	0.179		0.240	0.045	0.284
		Bottom side				0.000	0.000	0.000
n258	Antenna Module 2	Front		0.177	4.070	0.407	0.451	0.451
		Back		0.994	7.500	0.750	0.999	0.999
		Left side				0.000	0.000	0.000
		Right side		0.553	7.500	0.750	0.888	0.888
		Top side	0.958	0.179		0.240	0.045	0.284
		Bottom side				0.000	0.000	0.000
n260	Antenna Module 0	Front		0.177	0.400	0.040	0.084	0.084
		Back		0.994	7.500	0.750	0.999	0.999
		Left side			7.500	0.750	0.750	0.750
		Right side		0.553		0.000	0.138	0.138
		Top side	0.958	0.179	2.400	0.480	0.285	0.524
		Bottom side				0.000	0.000	0.000
n260	Antenna Module 1	Front		0.177	2.710	0.271	0.315	0.315
		Back		0.994	7.500	0.750	0.999	0.999
		Left side			7.500	0.750	0.750	0.750
		Right side		0.553		0.000	0.138	0.138
		Top side	0.958	0.179		0.240	0.045	0.284
		Bottom side				0.000	0.000	0.000
n260	Antenna Module 2	Front		0.177	3.890	0.389	0.433	0.433
		Back		0.994	7.500	0.750	0.999	0.999
		Left side				0.000	0.000	0.000
		Right side		0.553	7.500	0.750	0.888	0.888
		Top side	0.958	0.179		0.240	0.045	0.284
		Bottom side				0.000	0.000	0.000
n261	Antenna Module 0	Front		0.177	0.100	0.010	0.054	0.054
		Back		0.994	7.500	0.750	0.999	0.999
		Left side			7.500	0.750	0.750	0.750
		Right side		0.553		0.000	0.138	0.138
		Top side	0.958	0.179	2.000	0.440	0.245	0.484
		Bottom side				0.000	0.000	0.000
n261	Antenna Module 1	Front		0.177	3.190	0.319	0.363	0.363
		Back		0.994	7.500	0.750	0.999	0.999
		Left side			7.500	0.750	0.750	0.750
		Right side		0.553		0.000	0.138	0.138
		Top side	0.958	0.179		0.240	0.045	0.284
		Bottom side				0.000	0.000	0.000
n261	Antenna Module 2	Front		0.177	3.300	0.330	0.374	0.374
		Back		0.994	7.500	0.750	0.999	0.999
		Left side				0.000	0.000	0.000
		Right side		0.553	7.500	0.750	0.888	0.888
		Top side	0.958	0.179		0.240	0.045	0.284
		Bottom side				0.000	0.000	0.000

Test Engineer : Steven Chang and Aaron Chen

13. Uncertainty Assessment

The budget is valid for evaluation distances $> \lambda/2\pi$. For specific tests and configurations, the Uncertainty could be considerably smaller.

Preliminary Module mmWave Uncertainty Budget Evaluation Distances to the Antennas $> \lambda / 2\pi$						
Error Description	Uncertainty Value ($\pm$ dB)	Probability	Divisor	(Ci)	Standard Uncertainty ($\pm$ dB)	(Vi) Veff
Measurement System						
Probe Calibration	0.49	N	1	1	0.49	∞
Hemispherical Isotropy	0.50	R	1.732	1	0.29	∞
Linearity	0.20	R	1.732	0	0.12	∞
System Detection Limits	0.04	R	1.732	1	0.02	∞
Modulation Response	0.40	R	1.732	1	0.23	∞
Readout Electronics	0.03	N	1	1	0.03	∞
Response Time	0.00	R	1.732	1	0.00	∞
Integration Time	0.00	R	1.732	1	0.00	∞
RF Ambient Noise	0.2	R	1.732	1	0.12	∞
RF Ambient Reflections	0.21	R	1.732	1	0.12	∞
Probe Positioner	0.04	R	1.732	1	0.02	∞
Probe Positioning	0.30	R	1.732	1	0.17	∞
Savg Reconstruction	0.60	R	1.732	1	0.35	∞
Test Sample Related						
Power Drift	0.2	R	1.732	1	0.12	∞
Input Power	0	N	1	0	0.00	∞
Combined Std. Uncertainty					0.76 dB	∞
Coverage Factor for 95 %					K=2	
Expanded STD Uncertainty					1.52 dB	



14. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [3] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [4] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.