





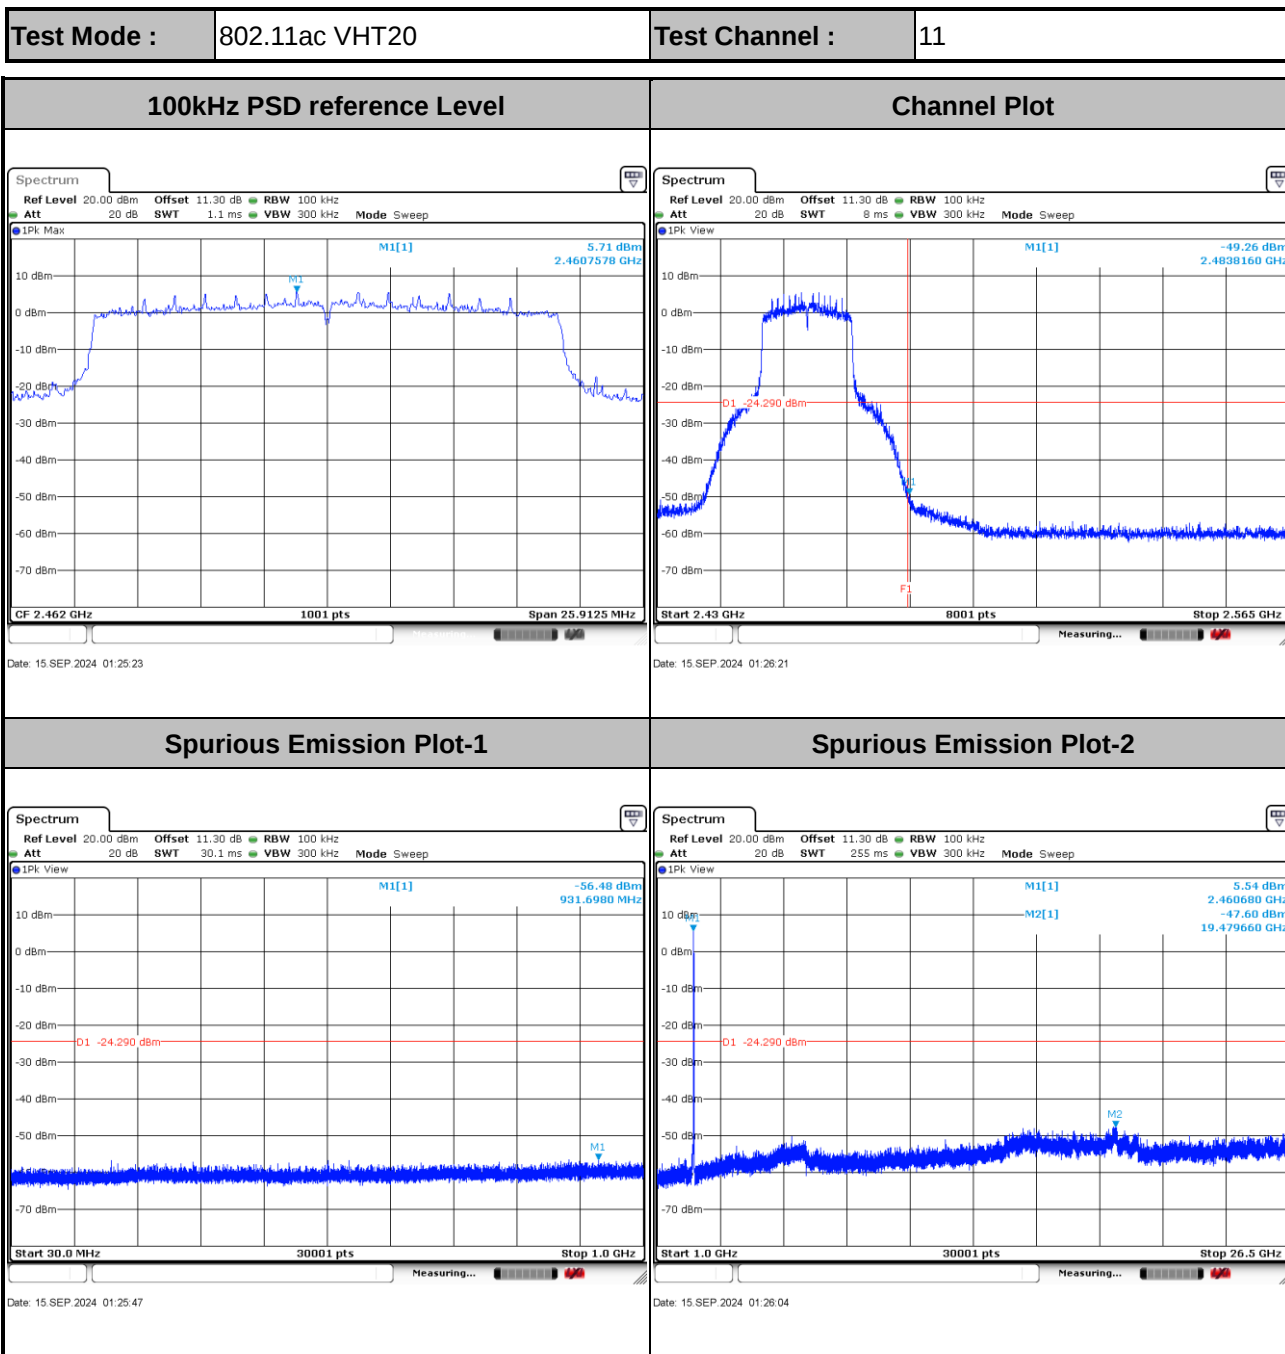

Test Mode :	802.11ax HE40	Test Channel :	03
--------------------	---------------	-----------------------	----

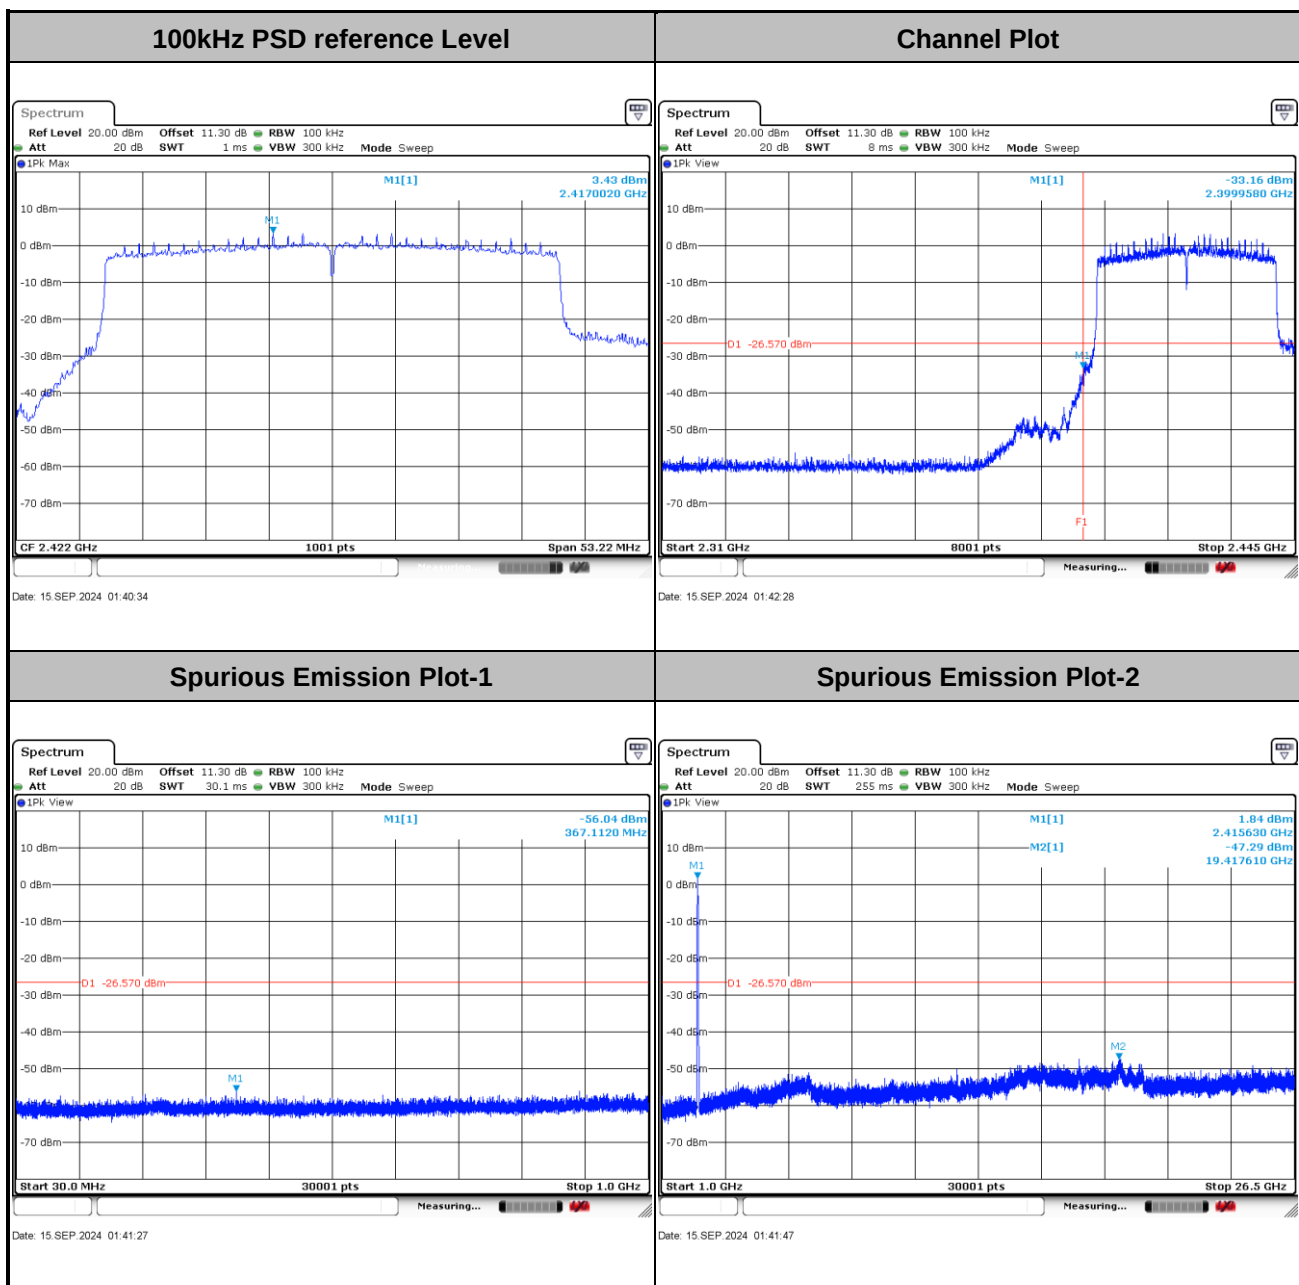

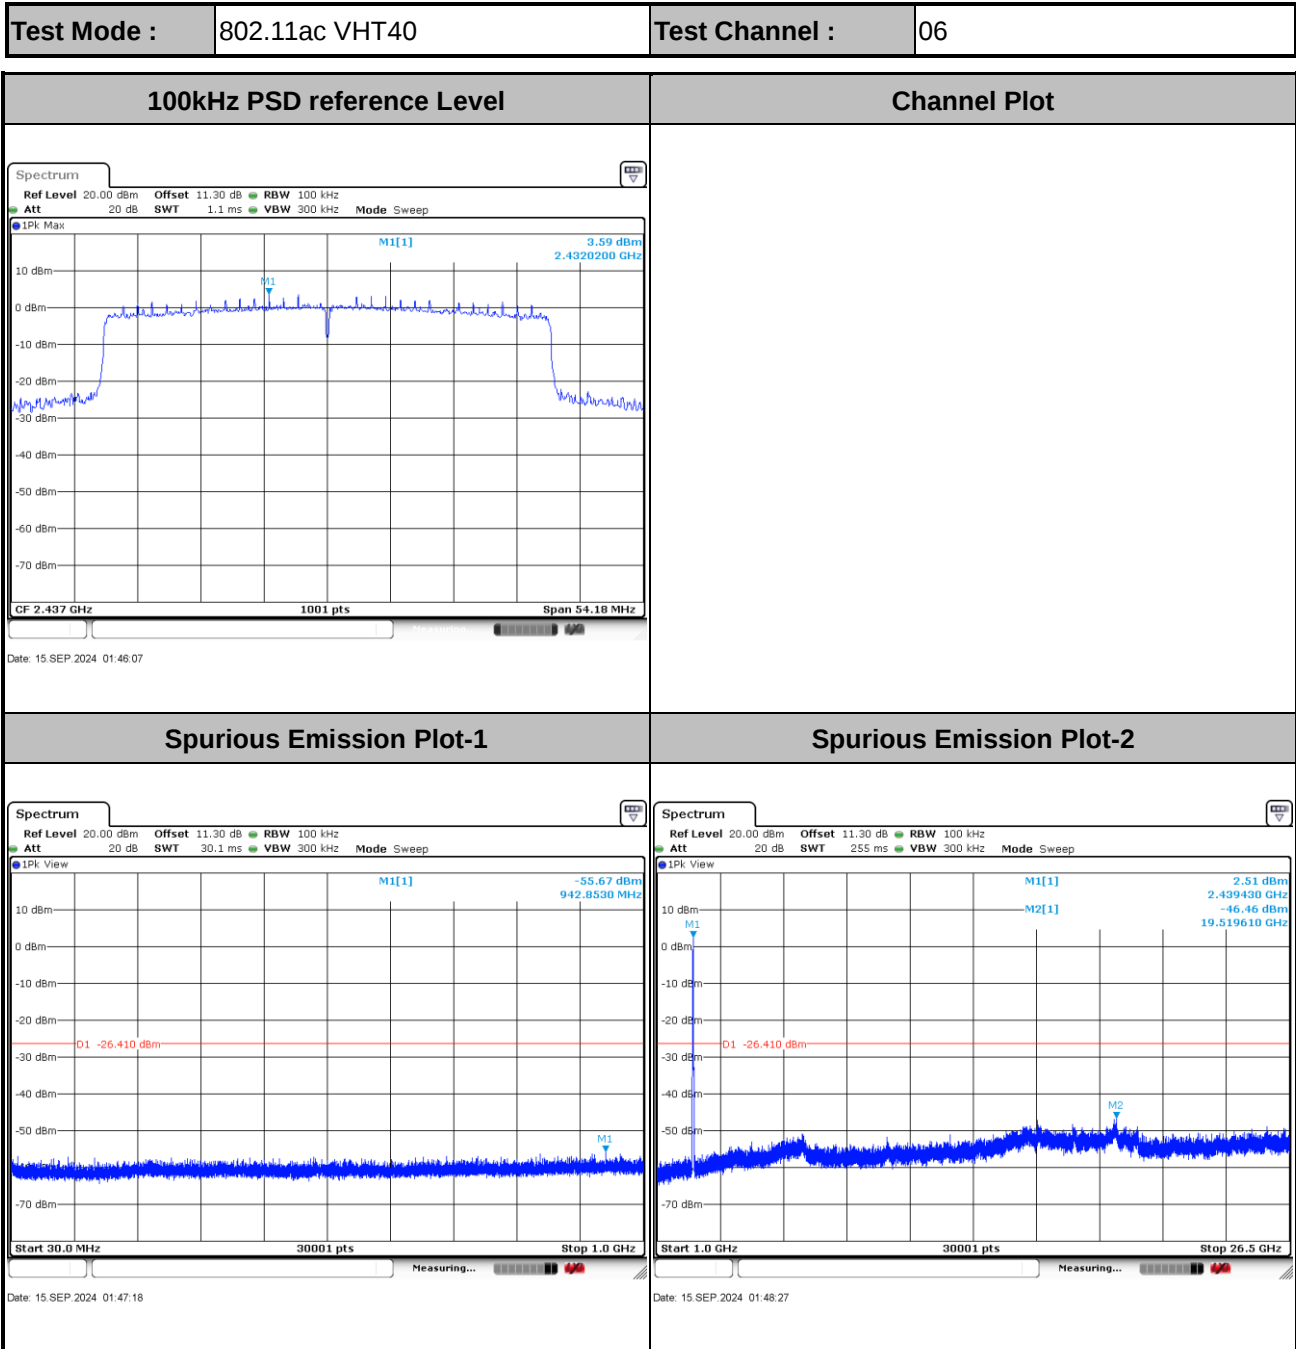

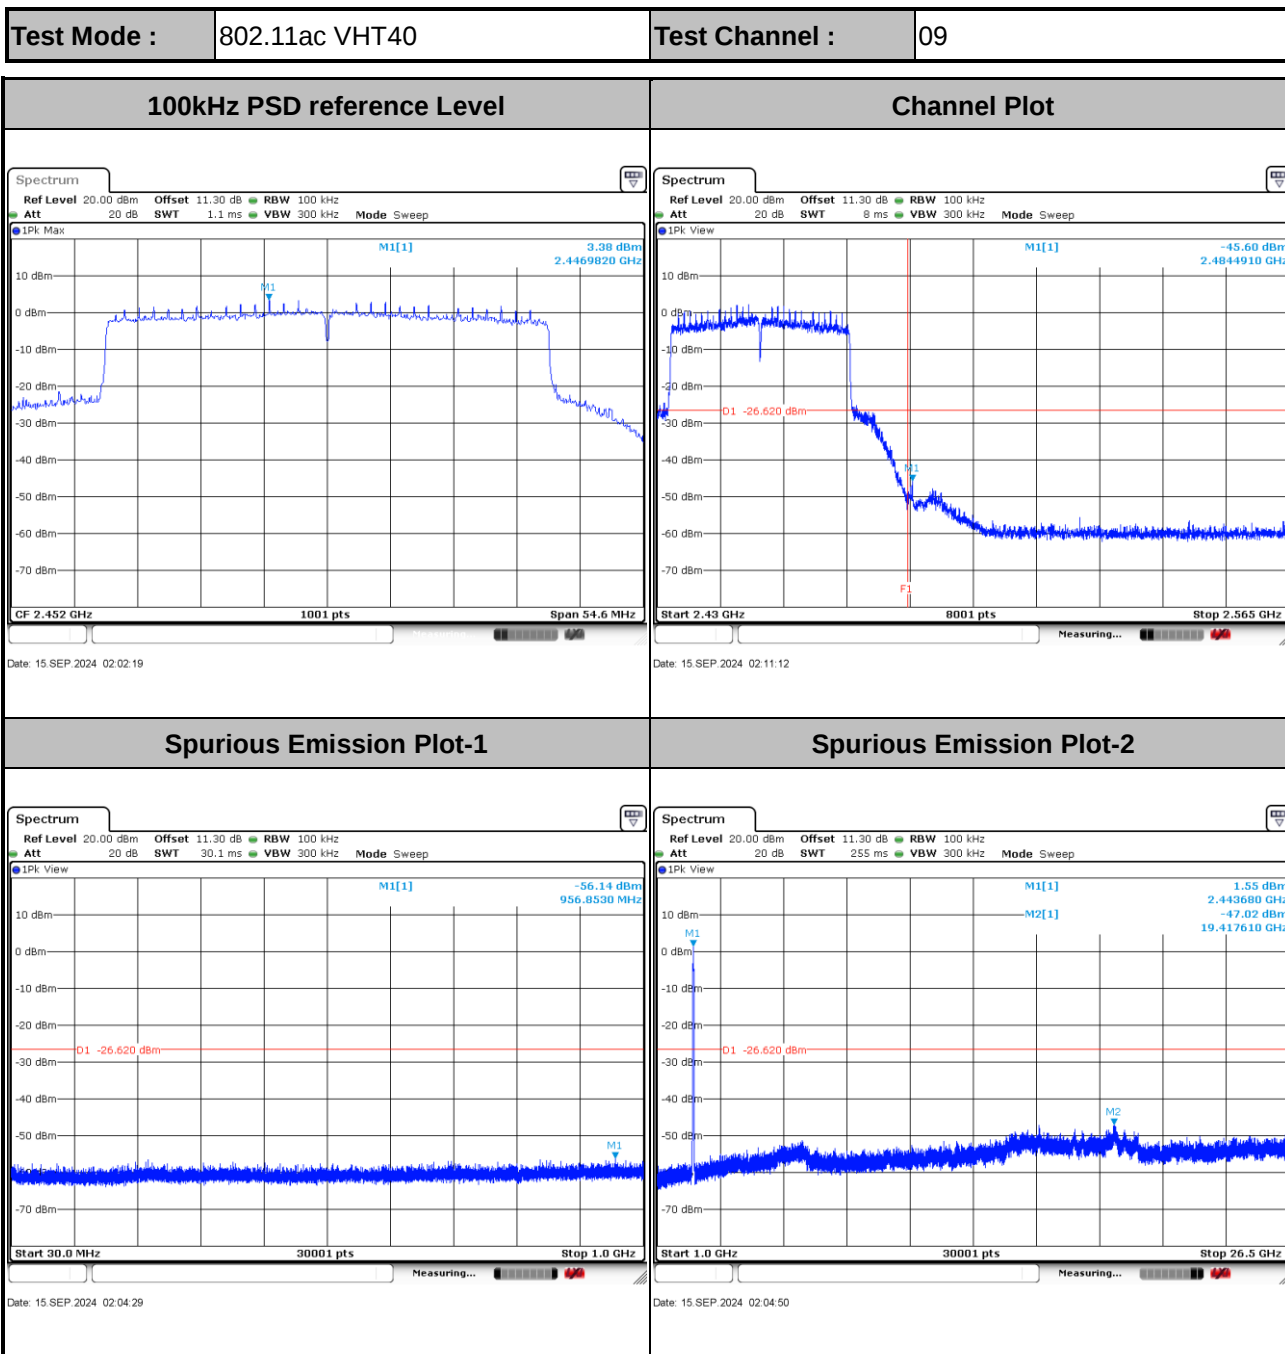

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

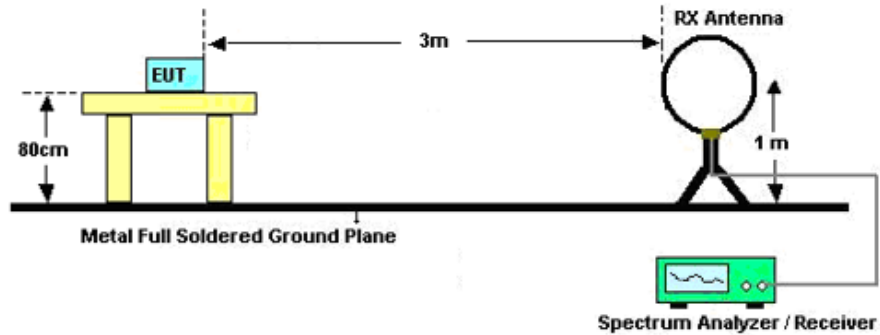

For radiated emissions from 30MHz to 1GHz

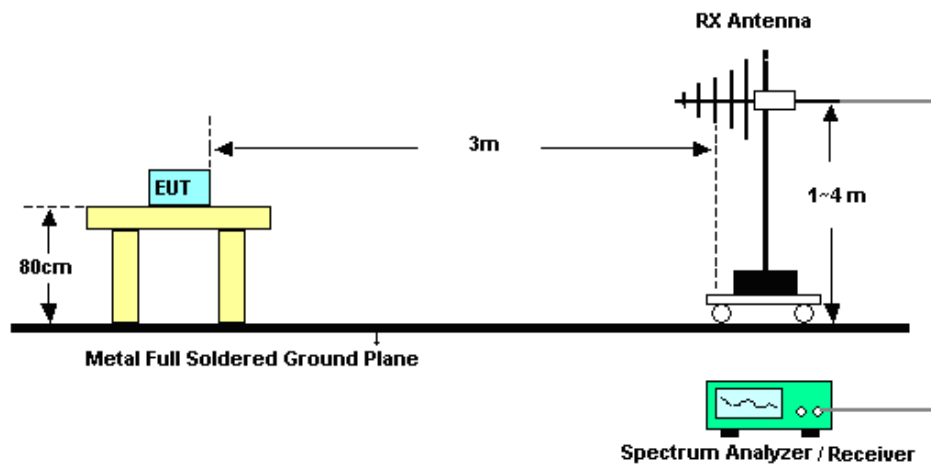

For radiated emissions above 1GHz

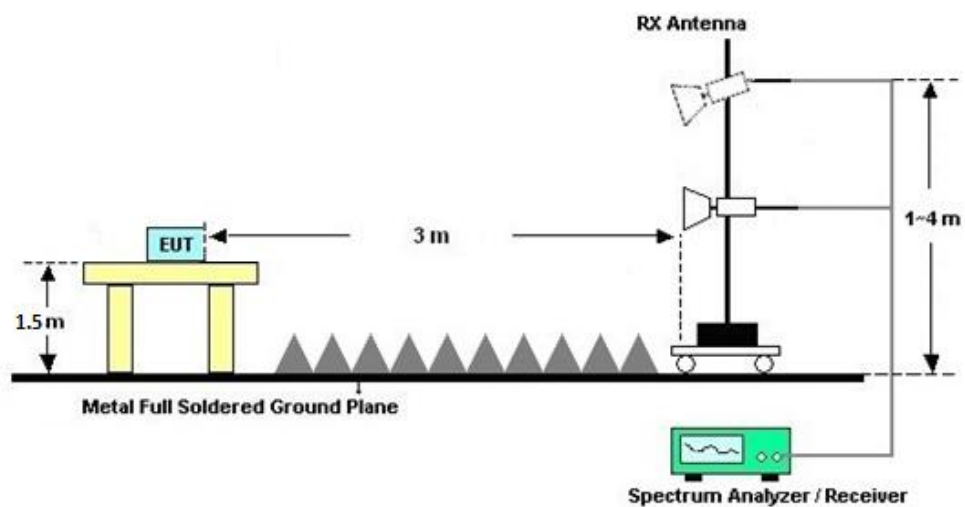

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

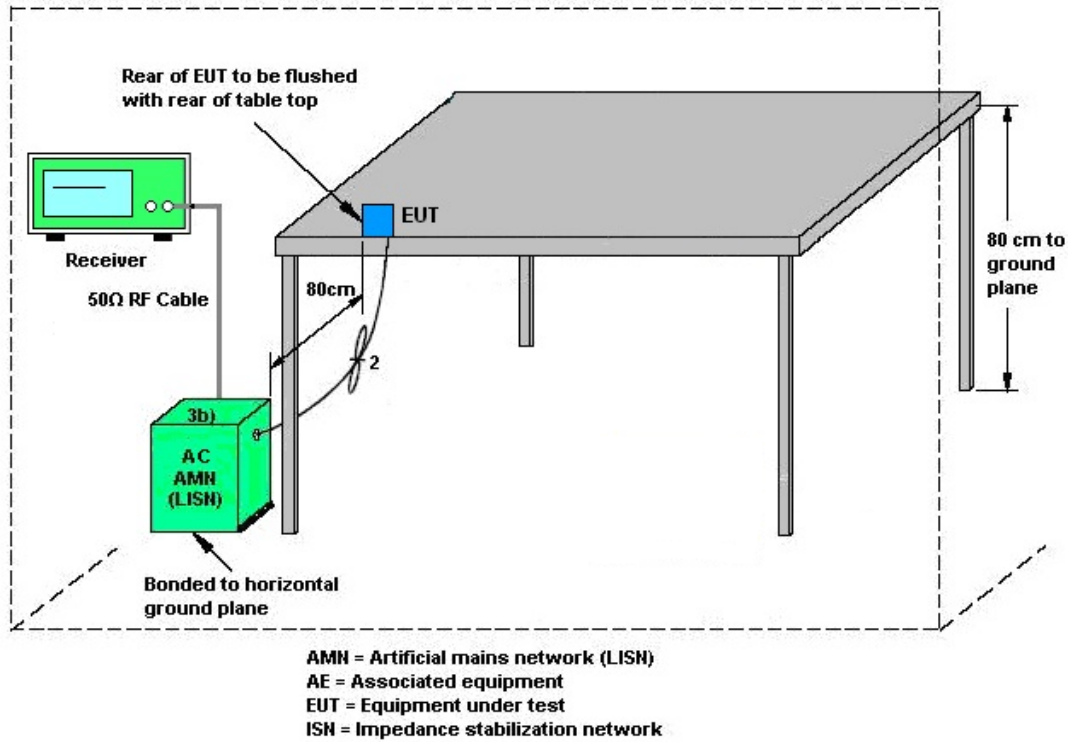

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 0	Ant. 1	DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	-1.40	-1.50	-1.40	1.56	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Sep. 14, 2024~ Sep. 27, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Sep. 14, 2024~ Sep. 27, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 20, 2024	Sep. 14, 2024~ Sep. 27, 2024	Aug. 19, 2025	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10℃ ~ 50℃ 10%RH~99%RH	Apr. 09, 2024	Sep. 14, 2024~ Sep. 27, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 18, 2023	Sep. 21, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Sep. 21, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Sep. 21, 2024	Dec. 28, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 09, 2024	Sep. 21, 2024	May 08, 2025	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Sep. 21, 2024	Jul. 06, 2025	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2024	Sep. 21, 2024	Jul. 03, 2025	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2023	Sep. 21, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Sep. 21, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Sep. 21, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Jul. 03, 2024	Sep. 21, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 18, 2023	Sep. 21, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 21, 2024	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 21, 2024	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 04, 2024	Sep. 18, 2024	Jul. 03, 2025	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Jul. 04, 2024	Sep. 18, 2024	Jul. 03, 2025	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Sep. 18, 2024	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Aug. 14, 2024	Sep. 18, 2024	Aug. 13, 2025	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	He Qingsheng	Temperature:	21~25	°C
Test Date:	2024/9/14~2024/9/27	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant0	Ant1	Ant0	Ant1		
11b	1Mbps	1	1	2412	12.70	12.76	7.60	8.04	0.50	Pass
11b	1Mbps	1	6	2437	12.73	12.81	7.60	7.62	0.50	Pass
11b	1Mbps	1	11	2462	12.73	12.85	7.62	8.10	0.50	Pass
11g	6Mbps	1	1	2412	17.08	17.00	16.06	16.36	0.50	Pass
11g	6Mbps	1	6	2437	16.65	16.64	15.70	16.30	0.50	Pass
11g	6Mbps	1	11	2462	17.03	17.11	15.74	15.72	0.50	Pass
VHT20	MCS0	2	1	2412	18.19	17.95	17.08	17.62	0.50	Pass
VHT20	MCS0	2	6	2437	17.84	17.70	16.84	17.58	0.50	Pass
VHT20	MCS0	2	11	2462	18.15	18.60	15.72	17.60	0.50	Pass
VHT40	MCS0	2	3	2422	37.12	36.91	35.56	35.20	0.50	Pass
VHT40	MCS0	2	6	2437	37.38	37.19	35.20	35.20	0.50	Pass
VHT40	MCS0	2	9	2452	37.15	37.27	35.28	35.80	0.50	Pass

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant0	Ant1	Ant0	Ant1		
HE20	MCS0	1	1	2412	Full	18.88	18.88	18.60	18.65	0.50	Pass
HE20	MCS0	1	6	2437	Full	18.98	18.98	18.55	18.93	0.50	Pass
HE20	MCS0	1	11	2462	Full	19.03	19.02	18.18	17.28	0.50	Pass
HE40	MCS0	1	3	2422	Full	37.96	37.93	37.60	35.48	0.50	Pass
HE40	MCS0	1	6	2437	Full	38.00	37.99	37.32	36.12	0.50	Pass
HE40	MCS0	1	9	2452	Full	37.96	38.01	37.24	36.40	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
11b	1Mbps	1	1	2412	16.40	16.70		30.00	30.00	-1.40	-1.50	15.00	15.20	36.00	36.00	Pass
11b	1Mbps	1	6	2437	16.70	16.90		30.00	30.00	-1.40	-1.50	15.30	15.40	36.00	36.00	Pass
11b	1Mbps	1	11	2462	16.30	16.80		30.00	30.00	-1.40	-1.50	14.90	15.30	36.00	36.00	Pass
11g	6Mbps	1	1	2412	14.70	14.70		30.00	30.00	-1.40	-1.50	13.30	13.20	36.00	36.00	Pass
11g	6Mbps	1	6	2437	16.90	17.00		30.00	30.00	-1.40	-1.50	15.50	15.50	36.00	36.00	Pass
11g	6Mbps	1	10	2457	16.40	16.60		30.00	30.00	-1.40	-1.50	15.00	15.10	36.00	36.00	Pass
11g	6Mbps	1	11	2462	13.00	13.00		30.00	30.00	-1.40	-1.50	11.60	11.50	36.00	36.00	Pass

Setting	
Ant 0	Ant 1
16.00	16.00
16.00	16.00
16.00	16.00
14.00	14.00
16.00	16.00
16.00	16.00
13.00	13.00

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
VHT20	MCS0	2	1	2412	14.80	14.90	17.86	30.00		-1.40		16.46		36.00		Pass
VHT20	MCS0	2	6	2437	17.10	17.10	20.11	30.00		-1.40		18.71		36.00		Pass
VHT20	MCS0	2	10	2457	16.50	16.60	19.56	30.00		-1.40		18.16		36.00		Pass
VHT20	MCS0	2	11	2462	13.00	13.10	16.06	30.00		-1.40		14.66		36.00		Pass
VHT40	MCS0	2	3	2422	13.50	13.40	16.46	30.00		-1.40		15.06		36.00		Pass
VHT40	MCS0	2	4	2427	15.80	15.80	18.81	30.00		-1.40		17.41		36.00		Pass
VHT40	MCS0	2	5	2432	16.80	16.80	19.81	30.00		-1.40		18.41		36.00		Pass
VHT40	MCS0	2	6	2437	17.00	16.90	19.96	30.00		-1.40		18.56		36.00		Pass
VHT40	MCS0	2	7	2442	15.70	15.70	18.71	30.00		-1.40		17.31		36.00		Pass
VHT40	MCS0	2	8	2447	15.20	15.20	18.21	30.00		-1.40		16.81		36.00		Pass
VHT40	MCS0	2	9	2452	11.30	11.20	14.26	30.00		-1.40		12.86		36.00		Pass

Setting	
Ant 0	Ant 1
14.00	
16.00	
16.00	
13.00	
13.00	
15.00	
16.00	
16.00	
15.00	
14.50	
11.00	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
HE20	MCS0	2	1	2412	Full	15.20	15.20	18.21	30.00		-1.40		16.81		36.00		Pass
HE20	MCS0	2	1	2412	26/0	6.90	7.00	9.96	30.00		-1.40		8.56		36.00		Pass
HE20	MCS0	2	1	2412	52/37	9.70	9.80	12.76	30.00		-1.40		11.36		36.00		Pass
HE20	MCS0	2	1	2412	106/53	12.00	12.20	15.11	30.00		-1.40		13.71		36.00		Pass
HE20	MCS0	2	6	2437	Full	17.20	17.30	20.26	30.00		-1.40		18.86		36.00		Pass
HE20	MCS0	2	10	2457	Full	16.70	16.70	19.71	30.00		-1.40		18.31		36.00		Pass
HE20	MCS0	2	11	2462	Full	13.20	13.30	16.26	30.00		-1.40		14.86		36.00		Pass
HE20	MCS0	2	11	2462	26/8	5.20	4.90	8.06	30.00		-1.40		6.66		36.00		Pass
HE20	MCS0	2	11	2462	52/40	7.80	7.30	10.57	30.00		-1.40		9.17		36.00		Pass
HE20	MCS0	2	11	2462	106/54	10.30	10.00	13.16	30.00		-1.40		11.76		36.00		Pass
HE40	MCS0	2	3	2422	Full	13.60	13.50	16.56	30.00		-1.40		15.16		36.00		Pass
HE40	MCS0	2	4	2427	Full	15.60	15.70	18.66	30.00		-1.40		17.26		36.00		Pass
HE40	MCS0	2	5	2432	Full	16.70	16.60	19.66	30.00		-1.40		18.26		36.00		Pass
HE40	MCS0	2	6	2437	Full	17.20	17.20	20.21	30.00		-1.40		18.81		36.00		Pass
HE40	MCS0	2	7	2442	Full	16.00	16.00	19.01	30.00		-1.40		17.61		36.00		Pass
HE40	MCS0	2	8	2447	Full	15.00	15.00	18.01	30.00		-1.40		16.61		36.00		Pass
HE40	MCS0	2	9	2452	Full	11.50	11.30	14.41	30.00		-1.40		13.01		36.00		Pass

Setting	
Ant 0	Ant 1
14.00	
6.00	
8.50	
11.00	
16.00	
16.00	
13.00	
4.50	
7.00	
9.50	
13.00	
14.50	
15.50	
16.00	
15.00	
14.00	
11.00	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant0	Ant1	Worse + 3.01	Ant0	Ant1	Ant0	Ant1	
11b	1Mbps	1	1	2412	-6.56	-4.35		-1.40	-1.50	8.00	8.00	Pass
11b	1Mbps	1	6	2437	-5.49	-5.75		-1.40	-1.50	8.00	8.00	Pass
11b	1Mbps	1	11	2462	-6.66	-6.01		-1.40	-1.50	8.00	8.00	Pass
11g	6Mbps	1	1	2412	-10.72	-10.44		-1.40	-1.50	8.00	8.00	Pass
11g	6Mbps	1	6	2437	-8.57	-6.59		-1.40	-1.50	8.00	8.00	Pass
11g	6Mbps	1	11	2462	-11.97	-12.06		-1.40	-1.50	8.00	8.00	Pass
VHT20	MCS0	2	1	2412	-8.90	-7.71	-4.70	1.56		8.00		Pass
VHT20	MCS0	2	6	2437	-7.44	-7.35	-4.34	1.56		8.00		Pass
VHT20	MCS0	2	11	2462	-8.54	-9.22	-5.53	1.56		8.00		Pass
VHT40	MCS0	2	3	2422	-10.85	-11.72	-7.84	1.56		8.00		Pass
VHT40	MCS0	2	6	2437	-11.24	-10.47	-7.46	1.56		8.00		Pass
VHT40	MCS0	2	9	2452	-11.30	-11.73	-8.29	1.56		8.00		Pass

Measured power density (dBm) has offset with cable loss.


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant0	Ant1	Worse + 3.01	Ant0	Ant1	Ant0	Ant1	
HE20	MCS0	2	1	2412	Full	-7.83	-8.69	-4.82	1.56		8.00		Pass
HE20	MCS0	2	1	2412	26/0	-8.00	-8.01	-4.99	1.56		8.00		Pass
HE20	MCS0	2	1	2412	52/37	-8.36	-8.63	-5.35	1.56		8.00		Pass
HE20	MCS0	2	1	2412	106/53	-8.02	-8.04	-5.01	1.56		8.00		Pass
HE20	MCS0	2	6	2437	Full	-8.71	-9.03	-5.70	1.56		8.00		Pass
HE20	MCS0	2	11	2462	Full	-8.90	-8.95	-5.89	1.56		8.00		Pass
HE20	MCS0	2	11	2462	26/8	-9.22	-9.23	-6.21	1.56		8.00		Pass
HE20	MCS0	2	11	2462	52/40	-9.14	-9.10	-6.09	1.56		8.00		Pass
HE20	MCS0	2	11	2462	106/54	-9.00	-9.28	-5.99	1.56		8.00		Pass
HE40	MCS0	2	3	2422	Full	-12.09	-10.65	-7.64	1.56		8.00		Pass
HE40	MCS0	2	6	2437	Full	-12.13	-11.45	-8.44	1.56		8.00		Pass
HE40	MCS0	2	9	2452	Full	-12.68	-11.73	-8.72	1.56		8.00		Pass

Measured power density (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

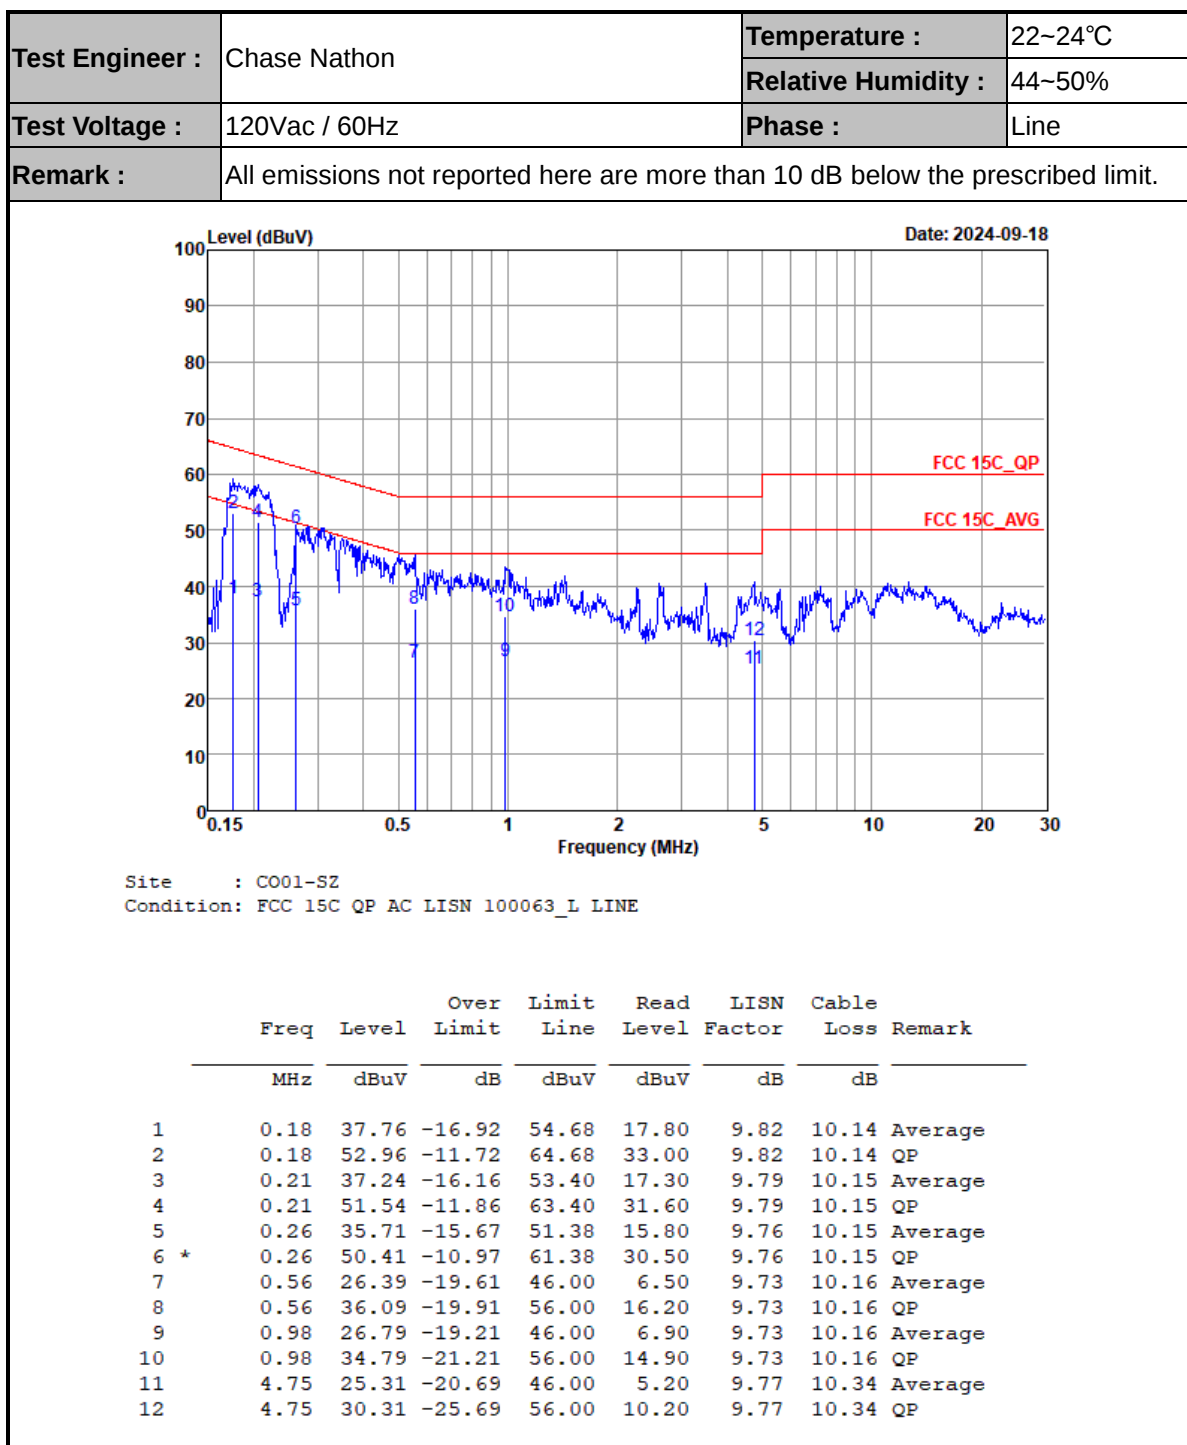



Test Engineer :	Chase Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

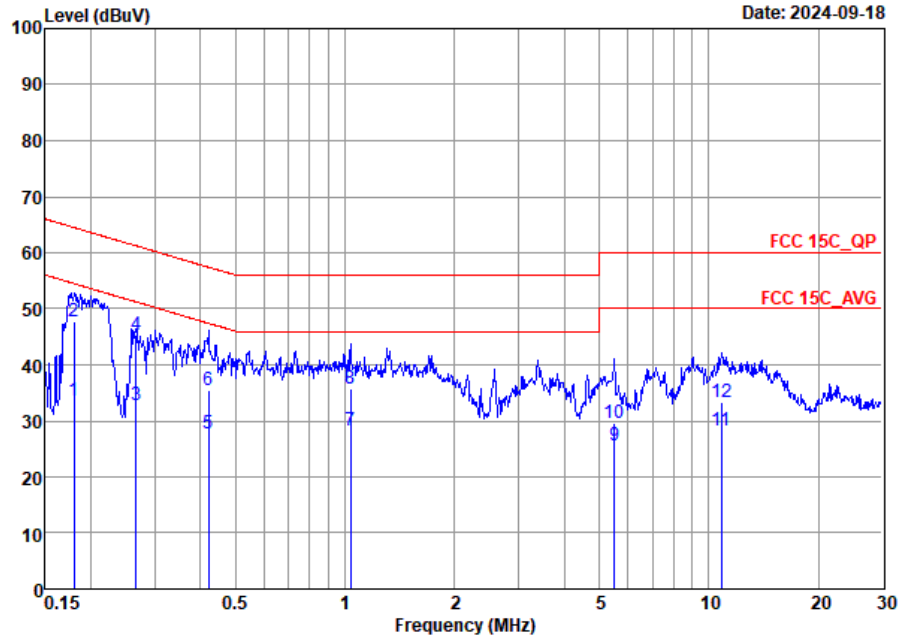

Site : C001-SZ
Condition: FCC 15C_QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.18	33.57	-20.93	54.50	13.61	9.82	10.14	Average
2	0.18	47.77	-16.73	64.50	27.81	9.82	10.14	QP
3	0.27	32.71	-18.54	51.25	12.80	9.76	10.15	Average
4 *	0.27	45.31	-15.94	61.25	25.40	9.76	10.15	QP
5	0.42	27.68	-19.74	47.42	7.80	9.72	10.16	Average
6	0.42	35.58	-21.84	57.42	15.70	9.72	10.16	QP
7	1.04	28.35	-17.65	46.00	8.50	9.69	10.16	Average
8	1.04	35.65	-20.35	56.00	15.80	9.69	10.16	QP
9	5.51	25.49	-24.51	50.00	5.40	9.74	10.35	Average
10	5.51	29.69	-30.31	60.00	9.60	9.74	10.35	QP
11	10.85	28.23	-21.77	50.00	8.10	9.73	10.40	Average
12	10.85	33.23	-26.77	60.00	13.10	9.73	10.40	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Liang HuaCong	Relative Humidity :	50%
		Temperature :	20°C-22°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 11	2400-2483.5	0	802.11b	01	2412	1Mbps	-	-
Mode 12	2400-2483.5	0	802.11b	06	2437	1Mbps	-	-
Mode 13	2400-2483.5	0	802.11b	11	2462	1Mbps	-	-
Mode 14	2400-2483.5	0	802.11g	01	2412	6Mbps	-	-
Mode 15	2400-2483.5	0	802.11g	06	2437	6Mbps	-	-
Mode 16	2400-2483.5	0	802.11g	11	2462	6Mbps	-	-
Mode 17	2400-2483.5	CDD 0+1	802.11ac VHT20	01	2412	MCS0	-	-
Mode 18	2400-2483.5	CDD 0+1	802.11ac VHT20	06	2437	MCS0	-	-
Mode 19	2400-2483.5	CDD 0+1	802.11ac VHT20	11	2462	MCS0	-	-
Mode 20	2400-2483.5	CDD 0+1	802.11ac VHT40	03	2422	MCS0	-	-
Mode 21	2400-2483.5	CDD 0+1	802.11ac VHT40	09	2452	MCS0	-	-
Mode 22	2400-2483.5	CDD 0+1	802.11ax HE20	01	2412	MCS0	-	-
Mode 23	2400-2483.5	CDD 0+1	802.11ax HE20	06	2437	MCS0	-	-
Mode 24	2400-2483.5	CDD 0+1	802.11ax HE20	11	2462	MCS0	-	-
Mode 25	2400-2483.5	CDD 0+1	802.11ax HE40	03	2422	MCS0	-	-
Mode 26	2400-2483.5	CDD 0+1	802.11ax HE40	09	2452	MCS0	-	-
Mode 27	2400-2483.5	CDD 0+1	802.11ax HE20	01	2412	MCS0	Partial RU	26/0
Mode 28	2400-2483.5	CDD 0+1	802.11ax HE20	11	2462	MCS0	Partial RU	106/54
Mode 29	2400-2483.5	CDD 0+1	802.11b	11	2462	1Mbps	-	LF
Mode 30	Co-TX	0	Bluetooth-LE	38	2478	2Mbps	-	-
		SISO 0	802.11ac VHT20	11	2462	MCS0	-	-
Mode 31	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 32	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 33	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 34	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 35	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-



Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 36	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 37	2400-2483.5	1	802.11g	10	2457	6Mbps	-	-
Mode 38	2400-2483.5	1	802.11g	10	2457	6Mbps	-	-
Mode 39	2400-2483.5	CDD 0+1	802.11ac VHT20	10	2457	MCS0	-	-
Mode 40	2400-2483.5	CDD 0+1	802.11ax HE20	10	2457	MCS0	-	-
Mode 41	2400-2483.5	CDD 0+1	802.11ac VHT40	04	2427	MCS0	-	-
Mode 42	2400-2483.5	CDD 0+1	802.11ac VHT40	05	2432	MCS0	-	-
Mode 43	2400-2483.5	CDD 0+1	802.11ac VHT40	08	2447	MCS0	-	-
Mode 44	2400-2483.5	CDD 0+1	802.11ac VHT40	07	2442	MCS0	-	-
Mode 46	2400-2483.5	CDD 0+1	802.11ax HE40	04	2427	MCS0	-	-
Mode 47	2400-2483.5	CDD 0+1	802.11ax HE40	05	2432	MCS0	-	-
Mode 48	2400-2483.5	CDD 0+1	802.11ax HE40	08	2447	MCS0	-	-
Mode 49	2400-2483.5	CDD 0+1	802.11ax HE40	07	2442	MCS0	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
11	802.11b	01	2387.09	36.46	54.00	-17.54	H	AVERAGE	Pass	Band Edge
	802.11b	01	4824.00	43.55	74.00	-30.45	H	Peak	Pass	Harmonic
12	802.11b	06	-	-	-	-	-	-	-	Band Edge
12	802.11b	06	7311.00	45.47	74.00	-28.53	H	Peak	Pass	Harmonic
13	802.11b	11	2483.51	37.09	54.00	-16.91	H	AVERAGE	Pass	Band Edge
13	802.11b	11	7386.00	45.47	74.00	-28.53	H	Peak	Pass	Harmonic
14	802.11g	01	-	-	-	-	-	-	-	Band Edge
14	802.11g	01	4824.00	46.17	74.00	-27.83	H	Peak	Pass	Harmonic
15	802.11g	06	-	-	-	-	-	-	-	Band Edge
15	802.11g	06	7311.00	45.66	74.00	-28.34	H	Peak	Pass	Harmonic
16	802.11g	11	2483.51	40.57	54.00	-13.43	H	AVERAGE	Pass	Band Edge
16	802.11g	11	7386.00	45.97	74.00	-28.03	V	Peak	Pass	Harmonic
17	802.11ac VHT20	01	2389.17	47.21	54.00	-6.79	H	AVERAGE	Pass	Band Edge
	802.11ac VHT20	01	4824.00	44.72	74.00	-29.28	V	Peak	Pass	Harmonic
18	802.11ac VHT20	06	-	-	-	-	-	-	-	Band Edge
18	802.11ac VHT20	06	7311.00	45.92	74.00	-28.08	V	Peak	Pass	Harmonic
19	802.11ac VHT20	11	2483.51	48.98	54.00	-5.02	H	AVERAGE	Pass	Band Edge
19	802.11ac VHT20	11	7386.00	44.93	74.00	-29.07	V	Peak	Pass	Harmonic
20	802.11ac VHT40	03	2389.86	48.03	54.00	-5.97	H	AVERAGE	Pass	Band Edge
20	802.11ac VHT40	03	-	-	-	-	-	-	-	Harmonic
21	802.11ac VHT40	09	2485.60	48.37	54.00	-5.63	H	AVERAGE	Pass	Band Edge
21	802.11ac VHT40	09	-	-	-	-	-	-	-	Harmonic
22	802.11ax HE20	01	2389.82	48.57	54.00	-5.43	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	01	4824.00	44.44	74.00	-29.56	H	Peak	Pass	Harmonic
23	802.11ax HE20	06	-	-	-	-	-	-	-	Band Edge
23	802.11ax HE20	06	7311.00	45.39	74.00	-28.61	H	Peak	Pass	Harmonic
24	802.11ax HE20	11	2483.89	48.18	54.00	-5.82	H	AVERAGE	Pass	Band Edge
24	802.11ax HE20	11	7386.00	45.79	74.00	-28.21	V	Peak	Pass	Harmonic
25	802.11ax HE40	03	2389.97	48.64	54.00	-5.36	H	AVERAGE	Pass	Band Edge
25	802.11ax HE40	03	-	-	-	-	-	-	-	Harmonic
26	802.11ax HE40	09	2486.99	47.93	54.00	-6.07	H	AVERAGE	Pass	Band Edge
26	802.11ax HE40	09	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE20	01	2387.09	38.35	54.00	-15.65	H	AVERAGE	Pass	Band Edge
27	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
28	802.11ax HE20	11	2483.62	43.00	54.00	-11.00	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
29	802.11ac VHT20	11	946.65	31.26	46.00	-14.74	V	Peak	Pass	LF
30	CO-TX	-	2483.51	44.65	54.00	-9.35	H	AVERAGE	Pass	Band Edge
		-	4924	44.58-	74.00	-29.42	V	Peak	Pass	Harmonic
31	802.11b	01	2387.74	37.79	54.00	-16.21	H	AVERAGE	Pass	Band Edge
31	802.11b	01	4824.00	44.80	74.00	-29.20	H	Peak	Pass	Harmonic
32	802.11b	06	-	-	-	-	-	-	-	Band Edge
32	802.11b	06	4874.00	48.25	74.00	-25.75	V	Peak	Pass	Harmonic
33	802.11b	11	2488.79	36.83	54.00	-17.17	H	AVERAGE	Pass	Band Edge
33	802.11b	11	4924.00	45.19	74.00	-28.81	H	Peak	Pass	Harmonic
34	802.11g	01	-	-	-	-	-	-	-	Band Edge
34	802.11g	01	4824.00	45.18	74.00	-28.82	V	Peak	Pass	Harmonic
35	802.11g	06	-	-	-	-	-	-	-	Band Edge
35	802.11g	06	7311.00	45.26	74.00	-28.74	V	Peak	Pass	Harmonic
36	802.11g	11	2483.58	40.65	54.00	-13.35	H	AVERAGE	Pass	Band Edge
36	802.11g	11	7386.00	46.68	74.00	-27.32	V	Peak	Pass	Harmonic
37	802.11g	10	2483.77	41.29	54.00	-12.71	H	AVERAGE	Pass	Band Edge
37	802.11g	10	-	-	-	-	-	-	-	Harmonic
38	802.11g	10	2486.55	38.97	54.00	-15.03	H	AVERAGE	Pass	Band Edge
38	802.11g	10	-	-	-	-	-	-	-	Harmonic
39	802.11ac VHT20	10	2484.53	42.93	54.00	-11.07	H	AVERAGE	Pass	Band Edge
39	802.11ac VHT20	10	-	-	-	-	-	-	-	Harmonic
40	802.11ax HE20	10	2483.74	43.66	54.00	-10.34	H	AVERAGE	Pass	Band Edge
40	802.11ax HE20	10	-	-	-	-	-	-	-	Harmonic
41	802.11ac VHT40	04	2389.74	48.26	54.00	-5.74	H	AVERAGE	Pass	Band Edge
41	802.11ac VHT40	04	-	-	-	-	-	-	-	Harmonic
42	802.11ac VHT40	05	2389.41	46.33	54.00	-7.67	H	AVERAGE	Pass	Band Edge
42	802.11ac VHT40	05	-	-	-	-	-	-	-	Harmonic
43	802.11ac VHT40	08	2484.50	47.69	54.00	-6.31	H	AVERAGE	Pass	Band Edge
43	802.11ac VHT40	08	-	-	-	-	-	-	-	Harmonic
44	802.11ac VHT40	07	2484.19	47.33	54.00	-6.67	H	AVERAGE	Pass	Band Edge
44	802.11ac VHT40	07	-	-	-	-	-	-	-	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
46	802.11ax HE40	04	2389.63	48.15	54.00	-5.85	H	AVERAGE	Pass	Band Edge
46	802.11ax HE40	04	-	-	-	-	-	-	-	Harmonic
47	802.11ax HE40	05	2389.88	48.91	54.00	-5.09	H	AVERAGE	Pass	Band Edge
47	802.11ax HE40	05	-	-	-	-	-	-	-	Harmonic
48	802.11ax HE40	08	2484.16	47.90	54.00	-6.10	H	AVERAGE	Pass	Band Edge
48	802.11ax HE40	08	-	-	-	-	-	-	-	Harmonic
49	802.11ax HE40	07	2484.57	45.48	54.00	-8.52	H	AVERAGE	Pass	Band Edge
49	802.11ax HE40	07	-	-	-	-	-	-	-	Harmonic





Mode	11																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11b_CH01_2412MHz																																																																																											
ANT	0																																																																																											
Pol.	Horizontal					Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2024-09-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.65</td><td>45.63</td><td>74.00</td><td>-28.37</td><td>43.08</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>139 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.65	45.63	74.00	-28.37	43.08	30.72	5.36	33.53	100	139 PEAK	Level (dBuV/m) Date: 2024-09-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.76</td><td>-----</td><td>-----</td><td>99.21</td><td>30.72</td><td>5.38</td><td>33.55</td><td>100</td><td>139 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.76	-----	-----	99.21	30.72	5.38	33.55	100	139 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2388.65	45.63	74.00	-28.37	43.08	30.72	5.36	33.53	100	139 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2412.00	101.76	-----	-----	99.21	30.72	5.38	33.55	100	139 PEAK																																																																																		
Avg	Level (dBuV/m) Date: 2024-09-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.09</td><td>36.46</td><td>54.00</td><td>-17.54</td><td>33.91</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>139 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.09	36.46	54.00	-17.54	33.91	30.72	5.36	33.53	100	139 AVERAGE	Level (dBuV/m) Date: 2024-09-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>99.39</td><td>-----</td><td>-----</td><td>96.84</td><td>30.72</td><td>5.38</td><td>33.55</td><td>100</td><td>139 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.39	-----	-----	96.84	30.72	5.38	33.55	100	139 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2387.09	36.46	54.00	-17.54	33.91	30.72	5.36	33.53	100	139 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2412.00	99.39	-----	-----	96.84	30.72	5.38	33.55	100	139 AVERAGE																																																																																		

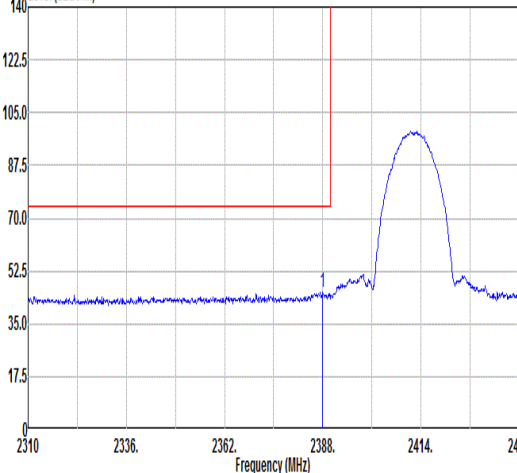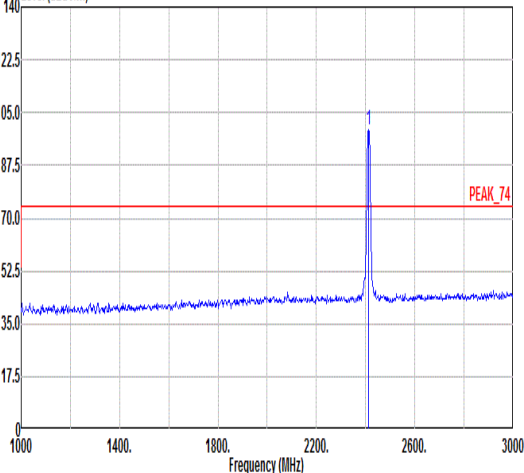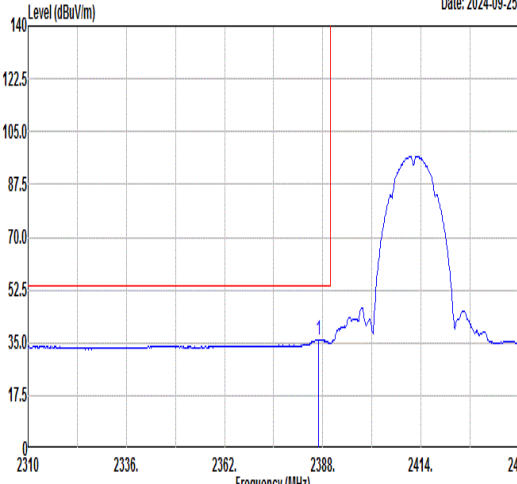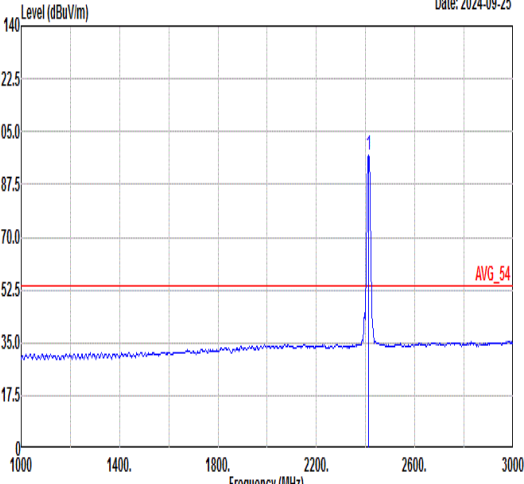

Mode	11																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																	
ANT	0																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-25  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.00</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>42.71</td><td>30.72</td><td>5.36</td><td>33.53</td><td>300 173 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.00	45.26	74.00	-28.74	42.71	30.72	5.36	33.53	300 173 PEAK	Level (dBuV/m) Date: 2024-09-25  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>99.30</td><td>-----</td><td>-----</td><td>96.75</td><td>30.72</td><td>5.38</td><td>33.55</td><td>300 173 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.30	-----	-----	96.75	30.72	5.38	33.55	300 173 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2388.00	45.26	74.00	-28.74	42.71	30.72	5.36	33.53	300 173 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	99.30	-----	-----	96.75	30.72	5.38	33.55	300 173 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-09-25  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.83</td><td>36.10</td><td>54.00</td><td>-17.90</td><td>33.55</td><td>30.72</td><td>5.36</td><td>33.53</td><td>300 173 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2386.83	36.10	54.00	-17.90	33.55	30.72	5.36	33.53	300 173 AVERAGE	Level (dBuV/m) Date: 2024-09-25  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>96.95</td><td>-----</td><td>-----</td><td>94.40</td><td>30.72</td><td>5.38</td><td>33.55</td><td>300 173 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.95	-----	-----	94.40	30.72	5.38	33.55	300 173 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2386.83	36.10	54.00	-17.90	33.55	30.72	5.36	33.53	300 173 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	96.95	-----	-----	94.40	30.72	5.38	33.55	300 173 AVERAGE																																																																									



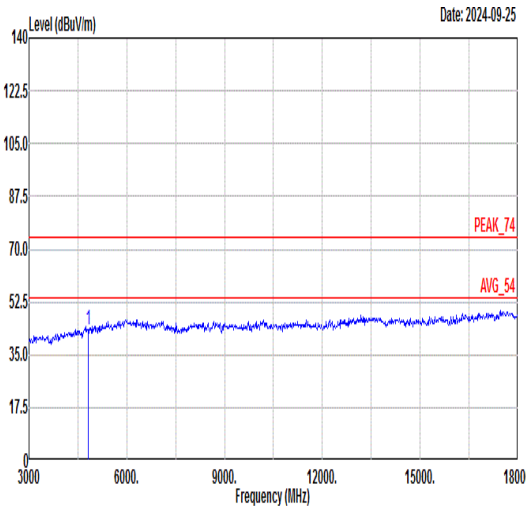
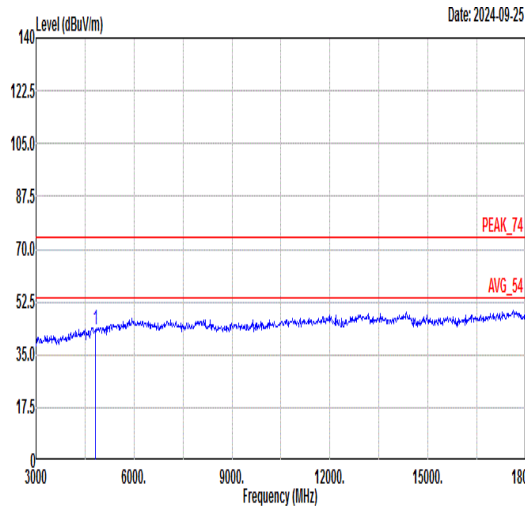


Mode	11																																																																																																
	Harmonic																																																																																																
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																
ANT	0																																																																																																
Pol.	Horizontal					Vertical																																																																																											
Peak Avg																																																																																																	
	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>43.55</td><td>74.00</td><td>-30.45</td><td>63.74</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>--- Peak</td></tr></tbody></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	43.55	74.00	-30.45	63.74	35.78	8.88	64.85	---	--- Peak	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>43.46</td><td>74.00</td><td>-30.54</td><td>63.65</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>--- Peak</td></tr></tbody></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	43.46	74.00	-30.54	63.65	35.78	8.88	64.85	---
		Limit		Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	43.55	74.00	-30.45	63.74	35.78	8.88	64.85	---	--- Peak																																																																																							
		Limit		Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	43.46	74.00	-30.54	63.65	35.78	8.88	64.85	---	--- Peak																																																																																							







Mode	12																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																			
ANT	0																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Date: 2024-09-25 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.24</td><td>74.00</td><td>-29.76</td><td>64.49</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.47</td><td>74.00</td><td>-28.53</td><td>63.27</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	44.24	74.00	-29.76	64.49	35.90	8.72	64.87	---	---	Peak	2	7311.00	45.47	74.00	-28.53	63.27	36.88	10.18	64.86	---	---	Peak	Date: 2024-09-25 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>43.90</td><td>74.00</td><td>-30.10</td><td>64.15</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.18</td><td>74.00</td><td>-29.82</td><td>61.98</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	43.90	74.00	-30.10	64.15	35.90	8.72	64.87	---	---	Peak	2	7311.00	44.18	74.00	-29.82	61.98	36.88	10.18	64.86	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4874.00	44.24	74.00	-29.76	64.49	35.90	8.72	64.87	---	---	Peak																																																																																																									
2	7311.00	45.47	74.00	-28.53	63.27	36.88	10.18	64.86	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4874.00	43.90	74.00	-30.10	64.15	35.90	8.72	64.87	---	---	Peak																																																																																																									
2	7311.00	44.18	74.00	-29.82	61.98	36.88	10.18	64.86	---	---	Peak																																																																																																									

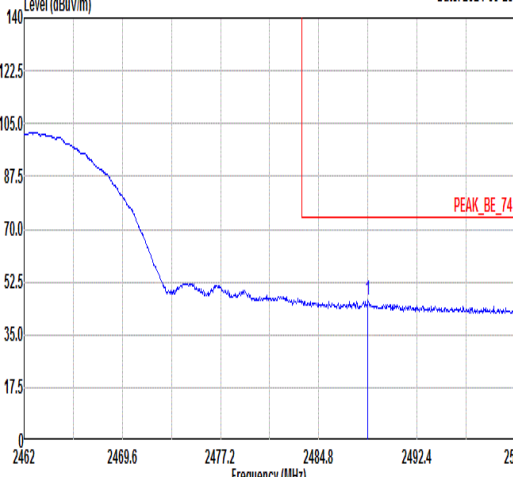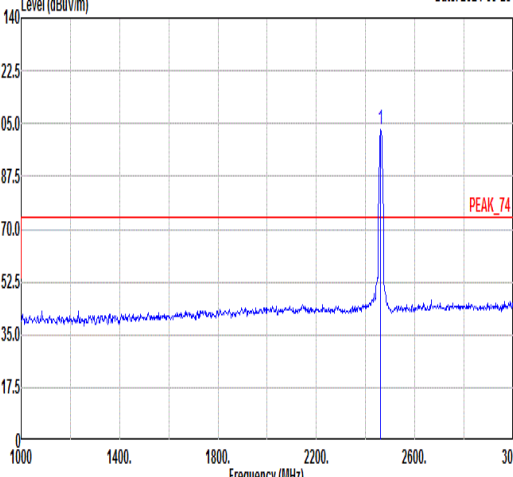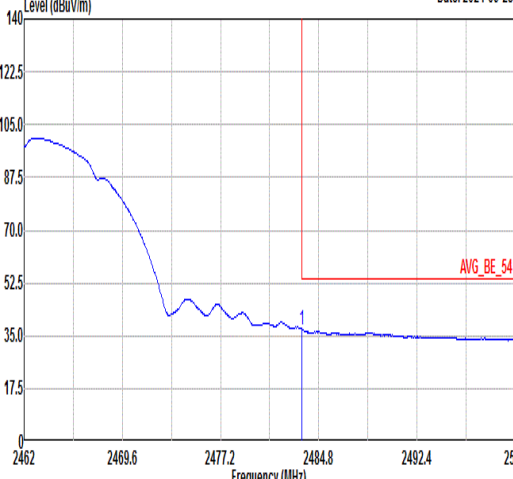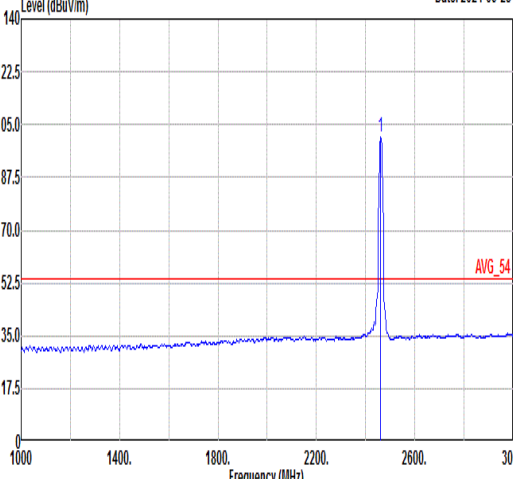

Mode	13																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11b_CH11_2462MHz																																																																																									
ANT	0																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-25  PEAK_BE_74 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2488.60</td><td>46.73</td><td>74.00</td><td>-27.27</td><td>44.15</td><td>30.70</td><td>5.47</td><td>33.59</td><td>119 131 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2488.60	46.73	74.00	-27.27	44.15	30.70	5.47	33.59	119 131 PEAK	Level (dBuV/m) Date: 2024-09-25  PEAK_74 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>103.10</td><td>-----</td><td>-----</td><td>100.53</td><td>30.71</td><td>5.44</td><td>33.58</td><td>119 131 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.10	-----	-----	100.53	30.71	5.44	33.58	119 131 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2488.60	46.73	74.00	-27.27	44.15	30.70	5.47	33.59	119 131 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	103.10	-----	-----	100.53	30.71	5.44	33.58	119 131 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-25  AVG_BE_54 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>37.09</td><td>54.00</td><td>-16.91</td><td>34.52</td><td>30.70</td><td>5.46</td><td>33.59</td><td>119 131 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	37.09	54.00	-16.91	34.52	30.70	5.46	33.59	119 131 AVERAGE	Level (dBuV/m) Date: 2024-09-25  AVG_54 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>100.65</td><td>-----</td><td>-----</td><td>98.08</td><td>30.71</td><td>5.44</td><td>33.58</td><td>119 131 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.65	-----	-----	98.08	30.71	5.44	33.58	119 131 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.51	37.09	54.00	-16.91	34.52	30.70	5.46	33.59	119 131 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	100.65	-----	-----	98.08	30.71	5.44	33.58	119 131 AVERAGE																																																																																	

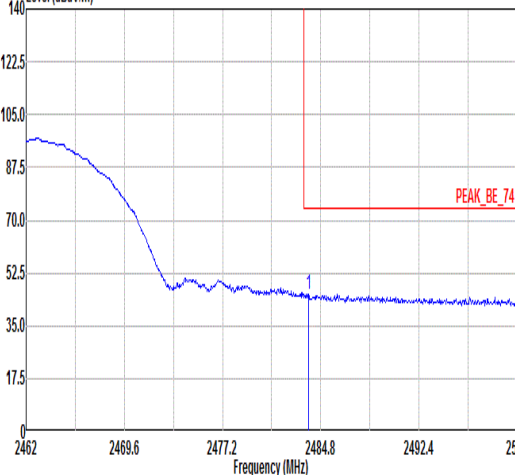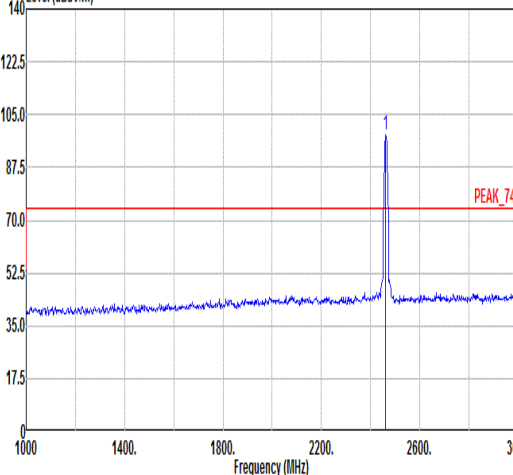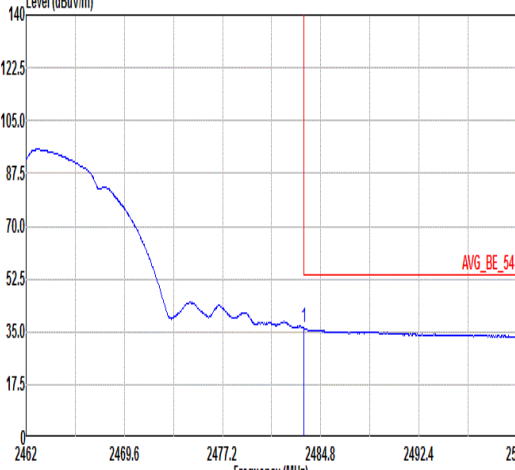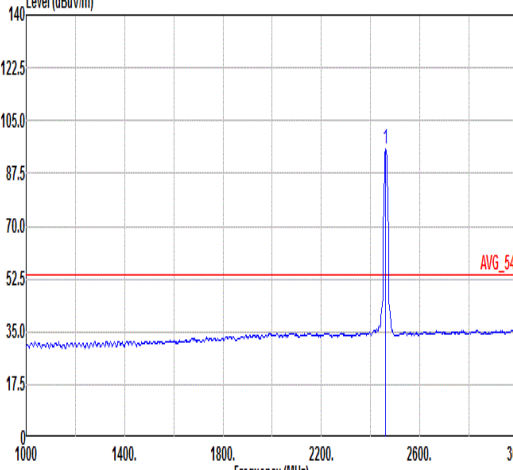

Mode	13																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11b_CH11_2462MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-25 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.85</td><td>45.53</td><td>74.00</td><td>-28.47</td><td>42.96</td><td>30.70</td><td>5.46</td><td>33.59</td><td>200 201 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.85	45.53	74.00	-28.47	42.96	30.70	5.46	33.59	200 201 PEAK	Level (dBuV/m) Date: 2024-09-25 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.16</td><td>-----</td><td>-----</td><td>95.59</td><td>30.71</td><td>5.44</td><td>33.58</td><td>200 201 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.16	-----	-----	95.59	30.71	5.44	33.58	200 201 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.85	45.53	74.00	-28.47	42.96	30.70	5.46	33.59	200 201 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	98.16	-----	-----	95.59	30.71	5.44	33.58	200 201 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-25 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>36.21</td><td>54.00</td><td>-17.79</td><td>33.64</td><td>30.70</td><td>5.46</td><td>33.59</td><td>200 201 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	36.21	54.00	-17.79	33.64	30.70	5.46	33.59	200 201 AVERAGE	Level (dBuV/m) Date: 2024-09-25 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>95.80</td><td>-----</td><td>-----</td><td>93.24</td><td>30.71</td><td>5.43</td><td>33.58</td><td>200 201 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	95.80	-----	-----	93.24	30.71	5.43	33.58	200 201 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.51	36.21	54.00	-17.79	33.64	30.70	5.46	33.59	200 201 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	95.80	-----	-----	93.24	30.71	5.43	33.58	200 201 AVERAGE																																																																																	





Mode	13																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																									
ANT	0																																																																																																									
Pol.	Horizontal								Vertical																																																																																																	
Peak Avg	Date: 2024-09-25 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>44.58</td><td>74.00</td><td>-29.42</td><td>64.88</td><td>36.02</td><td>8.57</td><td>64.89 --- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.47</td><td>74.00</td><td>-28.53</td><td>63.30</td><td>36.85</td><td>10.18</td><td>64.86 --- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4924.00	44.58	74.00	-29.42	64.88	36.02	8.57	64.89 --- Peak	2	7386.00	45.47	74.00	-28.53	63.30	36.85	10.18	64.86 --- Peak	Date: 2024-09-25 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>45.02</td><td>74.00</td><td>-28.98</td><td>65.32</td><td>36.02</td><td>8.57</td><td>64.89 --- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.96</td><td>74.00</td><td>-29.04</td><td>62.79</td><td>36.85</td><td>10.18</td><td>64.86 --- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4924.00	45.02	74.00	-28.98	65.32	36.02	8.57	64.89 --- Peak	2	7386.00	44.96	74.00	-29.04	62.79	36.85	10.18	64.86 --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4924.00	44.58	74.00	-29.42	64.88	36.02	8.57	64.89 --- Peak																																																																																																		
2	7386.00	45.47	74.00	-28.53	63.30	36.85	10.18	64.86 --- Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4924.00	45.02	74.00	-28.98	65.32	36.02	8.57	64.89 --- Peak																																																																																																		
2	7386.00	44.96	74.00	-29.04	62.79	36.85	10.18	64.86 --- Peak																																																																																																		







Mode	14																																																																																												
	Harmonic																																																																																												
	2400-2483.5_802.11g_CH01_2412MHz																																																																																												
ANT	0																																																																																												
Pol.	Horizontal						Vertical																																																																																						
Peak Avg	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>46.17</td><td>74.00</td><td>-27.83</td><td>66.36</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	46.17	74.00	-27.83	66.36	35.78	8.88	64.85	---	---	Peak	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>45.31</td><td>74.00</td><td>-28.69</td><td>65.50</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.31	74.00	-28.69	65.50	35.78	8.88	64.85	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	46.17	74.00	-27.83	66.36	35.78	8.88	64.85	---	---	Peak																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	45.31	74.00	-28.69	65.50	35.78	8.88	64.85	---	---	Peak																																																																																		

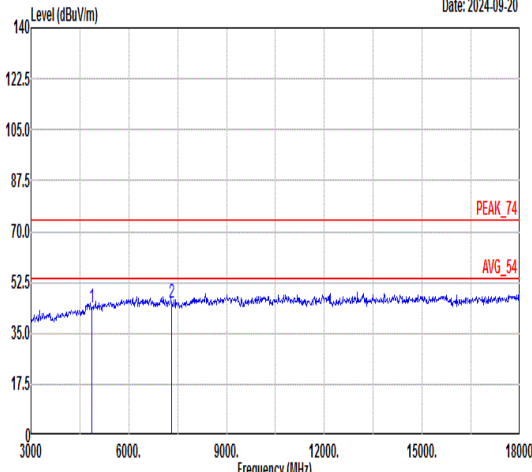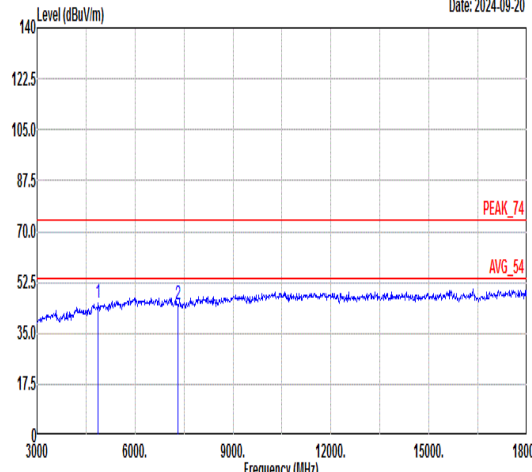

Mode	15																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																	
ANT	0																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg	Date: 2024-09-20 						Date: 2024-09-20 																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.06</td><td>74.00</td><td>-29.94</td><td>64.31</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.66</td><td>74.00</td><td>-28.34</td><td>63.46</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4874.00	44.06	74.00	-29.94	64.31	35.90	8.72	64.87	---	---	Peak	2	7311.00	45.66	74.00	-28.34	63.46	36.88	10.18	64.86	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>45.49</td><td>74.00</td><td>-28.51</td><td>65.74</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.95</td><td>74.00</td><td>-29.05</td><td>62.75</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4874.00	45.49	74.00	-28.51	65.74	35.90	8.72	64.87	---	---	Peak	2	7311.00	44.95	74.00	-29.05	62.75	36.88	10.18	64.86	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1	4874.00	44.06	74.00	-29.94	64.31	35.90	8.72	64.87	---	---	Peak																																																																																																							
2	7311.00	45.66	74.00	-28.34	63.46	36.88	10.18	64.86	---	---	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1	4874.00	45.49	74.00	-28.51	65.74	35.90	8.72	64.87	---	---	Peak																																																																																																							
2	7311.00	44.95	74.00	-29.05	62.75	36.88	10.18	64.86	---	---	Peak																																																																																																							

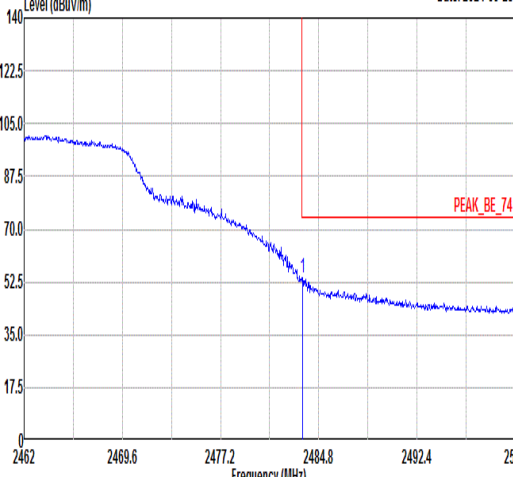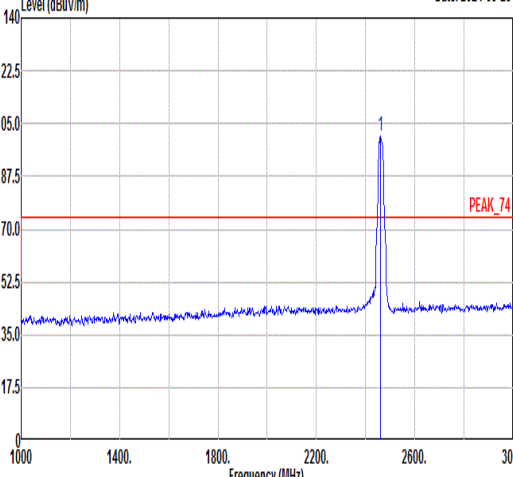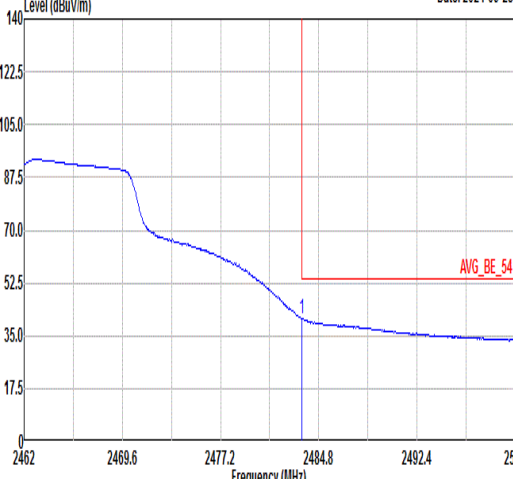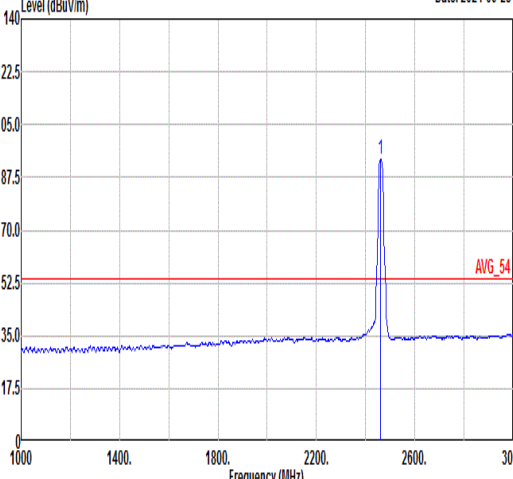

Mode	16																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																									
ANT	0																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-25  PEAK_BE_74 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.55</td><td>54.00</td><td>74.00</td><td>-20.00</td><td>51.43</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100 135 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2483.55	54.00	74.00	-20.00	51.43	30.70	5.46	33.59	100 135 PEAK	Level (dBuV/m) Date: 2024-09-25  PEAK_74 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>101.02</td><td>-----</td><td>-----</td><td>98.46</td><td>30.71</td><td>5.43</td><td>33.58</td><td>100 135 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	101.02	-----	-----	98.46	30.71	5.43	33.58	100 135 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.55	54.00	74.00	-20.00	51.43	30.70	5.46	33.59	100 135 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2462.00	101.02	-----	-----	98.46	30.71	5.43	33.58	100 135 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-25  AVG_BE_54 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>40.57</td><td>54.00</td><td>-13.43</td><td>38.00</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100 135 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2483.51	40.57	54.00	-13.43	38.00	30.70	5.46	33.59	100 135 AVERAGE	Level (dBuV/m) Date: 2024-09-25  AVG_54 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>93.49</td><td>-----</td><td>-----</td><td>90.92</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100 135 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	93.49	-----	-----	90.92	30.71	5.44	33.58	100 135 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.51	40.57	54.00	-13.43	38.00	30.70	5.46	33.59	100 135 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2462.00	93.49	-----	-----	90.92	30.71	5.44	33.58	100 135 AVERAGE																																																																																	







Mode	16																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Date: 2024-09-25 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>52.62</td><td>74.00</td><td>-21.38</td><td>50.05</td><td>30.70</td><td>5.46</td><td>33.59</td><td>200 199 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	52.62	74.00	-21.38	50.05	30.70	5.46	33.59	200 199 PEAK	Date: 2024-09-25 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>96.52</td><td>-----</td><td>-----</td><td>93.95</td><td>30.71</td><td>5.43</td><td>33.57</td><td>200 199 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.52	-----	-----	93.95	30.71	5.43	33.57	200 199 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.51	52.62	74.00	-21.38	50.05	30.70	5.46	33.59	200 199 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	96.52	-----	-----	93.95	30.71	5.43	33.57	200 199 PEAK																																																																																	
Avg	Date: 2024-09-25 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>39.66</td><td>54.00</td><td>-14.34</td><td>37.09</td><td>30.70</td><td>5.46</td><td>33.59</td><td>200 199 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	39.66	54.00	-14.34	37.09	30.70	5.46	33.59	200 199 AVERAGE	Date: 2024-09-25 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>89.10</td><td>-----</td><td>-----</td><td>86.54</td><td>30.71</td><td>5.43</td><td>33.58</td><td>200 199 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	89.10	-----	-----	86.54	30.71	5.43	33.58	200 199 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.51	39.66	54.00	-14.34	37.09	30.70	5.46	33.59	200 199 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	89.10	-----	-----	86.54	30.71	5.43	33.58	200 199 AVERAGE																																																																																	



Mode	16																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																							
ANT	0																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Date: 2024-09-20 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>43.69</td><td>74.00</td><td>-30.31</td><td>63.99</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.76</td><td>74.00</td><td>-29.24</td><td>62.59</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	43.69	74.00	-30.31	63.99	36.02	8.57	64.89	---	---	Peak	2	7386.00	44.76	74.00	-29.24	62.59	36.85	10.18	64.86	---	---	Peak	Date: 2024-09-20 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>43.74</td><td>74.00</td><td>-30.26</td><td>64.04</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.97</td><td>74.00</td><td>-28.03</td><td>63.80</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	43.74	74.00	-30.26	64.04	36.02	8.57	64.89	---	---	Peak	2	7386.00	45.97	74.00	-28.03	63.80	36.85	10.18	64.86	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	43.69	74.00	-30.31	63.99	36.02	8.57	64.89	---	---	Peak																																																																																																													
2	7386.00	44.76	74.00	-29.24	62.59	36.85	10.18	64.86	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	43.74	74.00	-30.26	64.04	36.02	8.57	64.89	---	---	Peak																																																																																																													
2	7386.00	45.97	74.00	-28.03	63.80	36.85	10.18	64.86	---	---	Peak																																																																																																													

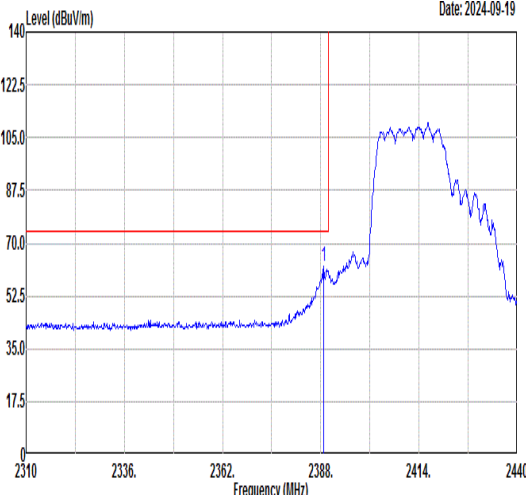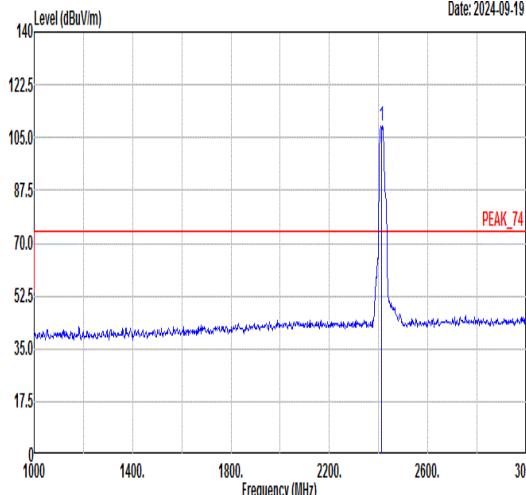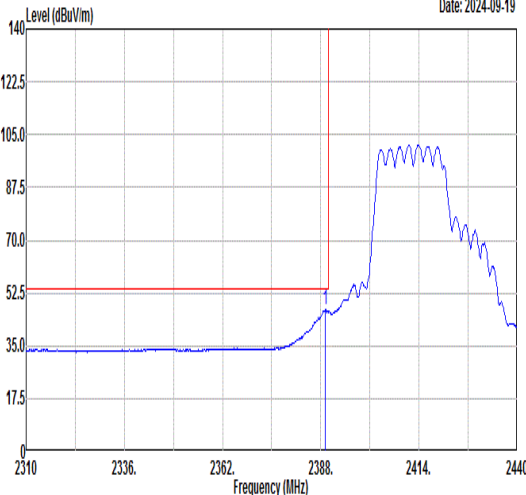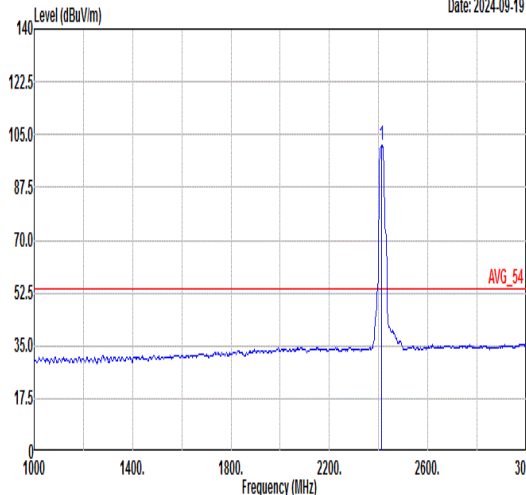

Mode	17																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11ac VHT20_CH01_2412MHz																																																																																	
ANT	CDD 0+1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-19  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.78</td><td>62.11</td><td>74.00</td><td>-11.89</td><td>59.56</td><td>30.72</td><td>5.36</td><td>33.53</td><td>265 127 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2388.78	62.11	74.00	-11.89	59.56	30.72	5.36	33.53	265 127 PEAK	Level (dBuV/m) Date: 2024-09-19  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>108.83</td><td>-----</td><td>-----</td><td>106.28</td><td>30.72</td><td>5.38</td><td>33.55</td><td>265 127 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.83	-----	-----	106.28	30.72	5.38	33.55	265 127 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2388.78	62.11	74.00	-11.89	59.56	30.72	5.36	33.53	265 127 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	108.83	-----	-----	106.28	30.72	5.38	33.55	265 127 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-09-19  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>47.21</td><td>54.00</td><td>-6.79</td><td>44.66</td><td>30.72</td><td>5.36</td><td>33.53</td><td>265 127 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.17	47.21	54.00	-6.79	44.66	30.72	5.36	33.53	265 127 AVERAGE	Level (dBuV/m) Date: 2024-09-19  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.59</td><td>-----</td><td>-----</td><td>99.04</td><td>30.72</td><td>5.38</td><td>33.55</td><td>265 127 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.59	-----	-----	99.04	30.72	5.38	33.55	265 127 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.17	47.21	54.00	-6.79	44.66	30.72	5.36	33.53	265 127 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	101.59	-----	-----	99.04	30.72	5.38	33.55	265 127 AVERAGE																																																																									



Mode	17																																									
	Band Edge																																									
	2400-2483.5_802.11ac VHT20_CH01_2412MHz																																									
ANT	CDD 0+1																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2024-09-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2388.26</td><td>56.17</td><td>74.00</td><td>-17.83</td><td>53.62</td><td>30.72</td><td>5.36</td><td>33.53</td><td>301</td><td>194 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2388.26	56.17	74.00	-17.83	53.62	30.72	5.36	33.53	301	194 PEAK	Level (dBuV/m) Date: 2024-09-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>104.69</td><td>-----</td><td>-----</td><td>102.14</td><td>30.72</td><td>5.38</td><td>33.55</td><td>301</td><td>194 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	104.69	-----	-----	102.14	30.72	5.38	33.55	301	194 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2388.26	56.17	74.00	-17.83	53.62	30.72	5.36	33.53	301	194 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	104.69	-----	-----	102.14	30.72	5.38	33.55	301	194 PEAK																																	
Avg	Level (dBuV/m) Date: 2024-09-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.82</td><td>43.08</td><td>54.00</td><td>-10.92</td><td>40.53</td><td>30.72</td><td>5.36</td><td>33.53</td><td>301</td><td>194 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.82	43.08	54.00	-10.92	40.53	30.72	5.36	33.53	301	194 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>97.36</td><td>-----</td><td>-----</td><td>94.81</td><td>30.72</td><td>5.38</td><td>33.55</td><td>301</td><td>194 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	97.36	-----	-----	94.81	30.72	5.38	33.55	301	194 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2389.82	43.08	54.00	-10.92	40.53	30.72	5.36	33.53	301	194 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	97.36	-----	-----	94.81	30.72	5.38	33.55	301	194 AVERAGE																																	







Mode	17																																																																																													
	Harmonic																																																																																													
	2400-2483.5_802.11ac VHT20_CH01_2412MHz																																																																																													
ANT	CDD 0+1																																																																																													
Pol.	Horizontal						Vertical																																																																																							
Peak Avg	Date: 2024-09-20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.85</td><td>74.00</td><td>-30.15</td><td>64.04</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.85	74.00	-30.15	64.04	35.78	8.88	64.85	---	---	Peak	Date: 2024-09-20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.72</td><td>74.00</td><td>-29.28</td><td>64.91</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.72	74.00	-29.28	64.91	35.78	8.88	64.85	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	4824.00	43.85	74.00	-30.15	64.04	35.78	8.88	64.85	---	---	Peak																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	4824.00	44.72	74.00	-29.28	64.91	35.78	8.88	64.85	---	---	Peak																																																																																			



Mode	18																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11ac VHT20_CH06_2437MHz																																																																																																																							
ANT	CDD 0+1																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-09-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.27</td><td>74.00</td><td>-29.73</td><td>64.52</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.51</td><td>74.00</td><td>-28.49</td><td>63.31</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	44.27	74.00	-29.73	64.52	35.90	8.72	64.87	---	---	Peak	2	7311.00	45.51	74.00	-28.49	63.31	36.88	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-09-20 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.77</td><td>74.00</td><td>-29.23</td><td>65.02</td><td>35.90</td><td>8.72</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.92</td><td>74.00</td><td>-28.08</td><td>63.72</td><td>36.88</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	44.77	74.00	-29.23	65.02	35.90	8.72	64.87	---	---	Peak	2	7311.00	45.92	74.00	-28.08	63.72	36.88	10.18	64.86	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4874.00	44.27	74.00	-29.73	64.52	35.90	8.72	64.87	---	---	Peak																																																																																																													
2	7311.00	45.51	74.00	-28.49	63.31	36.88	10.18	64.86	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4874.00	44.77	74.00	-29.23	65.02	35.90	8.72	64.87	---	---	Peak																																																																																																													
2	7311.00	45.92	74.00	-28.08	63.72	36.88	10.18	64.86	---	---	Peak																																																																																																													

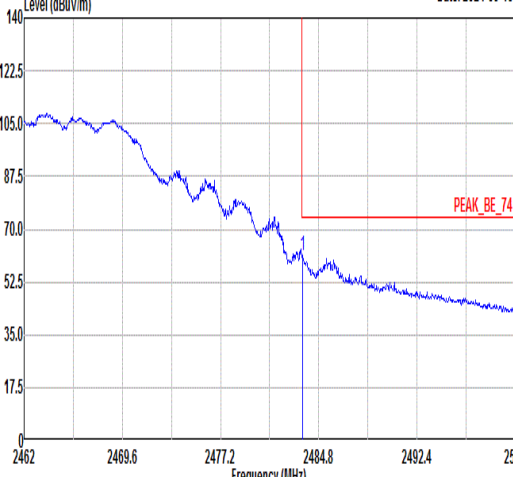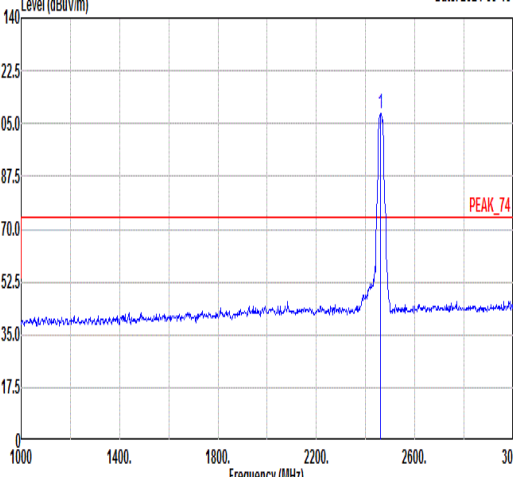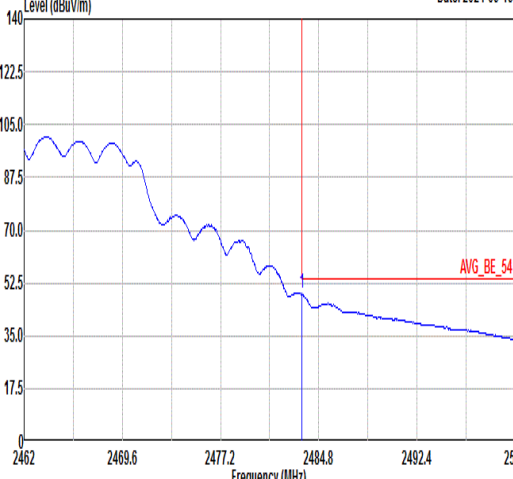
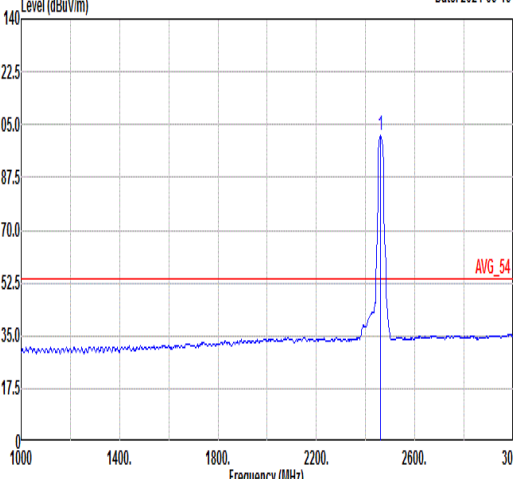


Mode	19																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11ac VHT20_CH11_2462MHz																																																																																									
ANT	CDD 0+1																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-19  PEAK_BE_74 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.55</td><td>61.31</td><td>74.00</td><td>-12.69</td><td>58.74</td><td>30.70</td><td>5.46</td><td>33.59</td><td>141 124 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	61.31	74.00	-12.69	58.74	30.70	5.46	33.59	141 124 PEAK	Level (dBuV/m) Date: 2024-09-19  PEAK_74 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>108.29</td><td>-----</td><td>-----</td><td>105.72</td><td>30.71</td><td>5.44</td><td>33.58</td><td>141 124 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.29	-----	-----	105.72	30.71	5.44	33.58	141 124 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.55	61.31	74.00	-12.69	58.74	30.70	5.46	33.59	141 124 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	108.29	-----	-----	105.72	30.71	5.44	33.58	141 124 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-19  AVG_BE_54 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>48.98</td><td>54.00</td><td>-5.02</td><td>46.41</td><td>30.70</td><td>5.46</td><td>33.59</td><td>141 124 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	48.98	54.00	-5.02	46.41	30.70	5.46	33.59	141 124 AVERAGE	Level (dBuV/m) Date: 2024-09-19  AVG_54 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>101.59</td><td>-----</td><td>-----</td><td>99.02</td><td>30.71</td><td>5.44</td><td>33.58</td><td>141 124 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.59	-----	-----	99.02	30.71	5.44	33.58	141 124 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.51	48.98	54.00	-5.02	46.41	30.70	5.46	33.59	141 124 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	101.59	-----	-----	99.02	30.71	5.44	33.58	141 124 AVERAGE																																																																																	



Mode	19																																																																											
	Band Edge																																																																											
	2400-2483.5_802.11ac VHT20_CH11_2462MHz																																																																											
ANT	CDD 0+1																																																																											
Pol.	Vertical					Fundamental																																																																						
Peak	Level (dBuV/m) Date: 2024-09-19 PEAK_BE_74 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.58</td><td>59.86</td><td>74.00</td><td>-14.14</td><td>57.29</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>193</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.58	59.86	74.00	-14.14	57.29	30.70	5.46	33.59	100	193	PEAK	Level (dBuV/m) Date: 2024-09-19 PEAK_74 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>104.77</td><td>-----</td><td>-----</td><td>102.20</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100</td><td>193</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2462.00	104.77	-----	-----	102.20	30.71	5.44	33.58	100	193	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.58	59.86	74.00	-14.14	57.29	30.70	5.46	33.59	100	193	PEAK																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2462.00	104.77	-----	-----	102.20	30.71	5.44	33.58	100	193	PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-09-19 AVG_BE_54 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.51</td><td>45.35</td><td>54.00</td><td>-8.65</td><td>42.78</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>193</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.51	45.35	54.00	-8.65	42.78	30.70	5.46	33.59	100	193	AVERAGE	Level (dBuV/m) Date: 2024-09-19 AVG_54 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>98.45</td><td>-----</td><td>-----</td><td>95.88</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100</td><td>193</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2462.00	98.45	-----	-----	95.88	30.71	5.44	33.58	100	193	AVERAGE
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.51	45.35	54.00	-8.65	42.78	30.70	5.46	33.59	100	193	AVERAGE																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2462.00	98.45	-----	-----	95.88	30.71	5.44	33.58	100	193	AVERAGE																																																																		

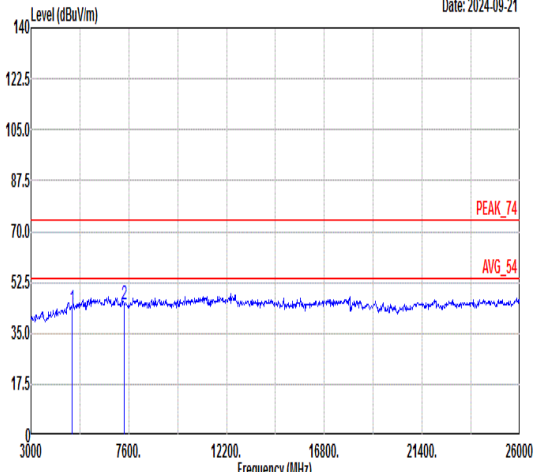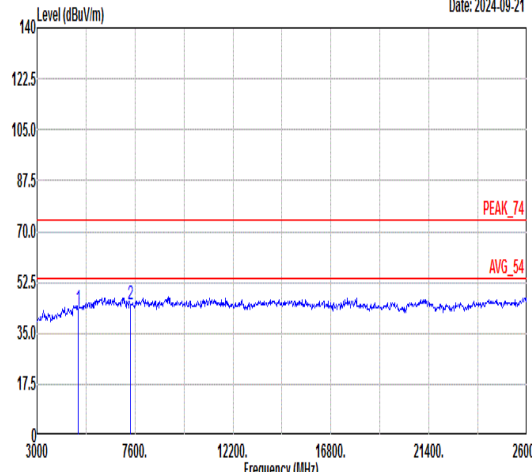

Mode	19																																																																	
	Harmonic																																																																	
	2400-2483.5_802.11ac VHT20_CH11_2462MHz																																																																	
ANT	CDD 0+1																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg	Date: 2024-09-21 						Date: 2024-09-21 																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.36</td><td>74.00</td><td>-30.64</td><td>63.66</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.87</td><td>74.00</td><td>-29.13</td><td>62.70</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	43.36	74.00	-30.64	63.66	36.02	8.57	64.89	---	---	Peak	2	7386.00	44.87	74.00	-29.13	62.70	36.85	10.18	64.86	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4924.00	43.36	74.00	-30.64	63.66	36.02	8.57	64.89	---	---	Peak																																																							
2	7386.00	44.87	74.00	-29.13	62.70	36.85	10.18	64.86	---	---	Peak																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.34</td><td>74.00</td><td>-30.66</td><td>63.64</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.93</td><td>74.00</td><td>-29.07</td><td>62.76</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	43.34	74.00	-30.66	63.64	36.02	8.57	64.89	---	---	Peak	2	7386.00	44.93	74.00	-29.07	62.76	36.85	10.18	64.86	---	---	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4924.00	43.34	74.00	-30.66	63.64	36.02	8.57	64.89	---	---	Peak																																																							
2	7386.00	44.93	74.00	-29.07	62.76	36.85	10.18	64.86	---	---	Peak																																																							



Mode	20																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11ac VHT40_CH03_2422MHz																																																																																	
ANT	CDD 0+1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.26</td><td>56.43</td><td>74.00</td><td>-17.57</td><td>53.89</td><td>30.72</td><td>5.35</td><td>33.53</td><td>264 127 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2384.26	56.43	74.00	-17.57	53.89	30.72	5.35	33.53	264 127 PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>104.87</td><td>-----</td><td>-----</td><td>102.31</td><td>30.72</td><td>5.39</td><td>33.55</td><td>264 127 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	104.87	-----	-----	102.31	30.72	5.39	33.55	264 127 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2384.26	56.43	74.00	-17.57	53.89	30.72	5.35	33.53	264 127 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2422.00	104.87	-----	-----	102.31	30.72	5.39	33.55	264 127 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.86</td><td>48.03</td><td>54.00</td><td>-5.97</td><td>45.48</td><td>30.72</td><td>5.36</td><td>33.53</td><td>264 127 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.86	48.03	54.00	-5.97	45.48	30.72	5.36	33.53	264 127 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>98.04</td><td>-----</td><td>-----</td><td>95.48</td><td>30.72</td><td>5.39</td><td>33.55</td><td>264 127 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	98.04	-----	-----	95.48	30.72	5.39	33.55	264 127 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.86	48.03	54.00	-5.97	45.48	30.72	5.36	33.53	264 127 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2422.00	98.04	-----	-----	95.48	30.72	5.39	33.55	264 127 AVERAGE																																																																									



Mode	20										
	Band Edge - R										
	2400-2483.5_802.11ac VHT40_CH03_2422MHz										
ANT	CDD 0+1										
Pol.	Horizontal										Fundamental
Peak											



Mode	20																																									
	Band Edge - L																																									
	2400-2483.5_802.11ac VHT40_CH03_2422MHz																																									
ANT	CDD 0+1																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2024-09-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.86</td><td>53.35</td><td>74.00</td><td>-20.65</td><td>50.80</td><td>30.72</td><td>5.36</td><td>33.53</td><td>217</td><td>192 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.86	53.35	74.00	-20.65	50.80	30.72	5.36	33.53	217	192 PEAK	Level (dBuV/m) Date: 2024-09-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2422.00</td><td>100.68</td><td>-----</td><td>-----</td><td>98.12</td><td>30.72</td><td>5.39</td><td>33.55</td><td>217</td><td>192 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2422.00	100.68	-----	-----	98.12	30.72	5.39	33.55	217	192 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2389.86	53.35	74.00	-20.65	50.80	30.72	5.36	33.53	217	192 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2422.00	100.68	-----	-----	98.12	30.72	5.39	33.55	217	192 PEAK																																	
Avg	Level (dBuV/m) Date: 2024-09-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.86</td><td>44.68</td><td>54.00</td><td>-9.32</td><td>42.13</td><td>30.72</td><td>5.36</td><td>33.53</td><td>217</td><td>192 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.86	44.68	54.00	-9.32	42.13	30.72	5.36	33.53	217	192 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2422.00</td><td>94.43</td><td>-----</td><td>-----</td><td>91.87</td><td>30.72</td><td>5.39</td><td>33.55</td><td>217</td><td>192 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2422.00	94.43	-----	-----	91.87	30.72	5.39	33.55	217	192 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2389.86	44.68	54.00	-9.32	42.13	30.72	5.36	33.53	217	192 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2422.00	94.43	-----	-----	91.87	30.72	5.39	33.55	217	192 AVERAGE																																	



Mode	20																																										
	Band Edge - R																																										
	2400-2483.5_802.11ac VHT40_CH03_2422MHz																																										
ANT	CDD 0+1																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2024-09-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.57</td><td>45.52</td><td>74.00</td><td>-28.48</td><td>42.95</td><td>30.70</td><td>5.46</td><td>33.59</td><td>217</td><td>192 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.57	45.52	74.00	-28.48	42.95	30.70	5.46	33.59	217	192 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	2485.57	45.52	74.00	-28.48	42.95	30.70	5.46	33.59	217	192 PEAK																																	
Avg	Date: 2024-09-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.95</td><td>35.94</td><td>54.00</td><td>-18.06</td><td>33.37</td><td>30.70</td><td>5.46</td><td>33.59</td><td>217</td><td>192 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.95	35.94	54.00	-18.06	33.37	30.70	5.46	33.59	217	192 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	2484.95	35.94	54.00	-18.06	33.37	30.70	5.46	33.59	217	192 AVERAGE																																	



Mode	21																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11ac VHT40_CH09_2452MHz																																																																																	
ANT	CDD 0+1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-19 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2310 to 2452 MHz. A red limit line is at 74.00 dB. The blue trace shows a rising signal starting around 2395 MHz, reaching approximately 105 dBuV/m at 2452 MHz. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.81</td><td>48.69</td><td>74.00</td><td>-25.31</td><td>46.14</td><td>30.72</td><td>5.36</td><td>33.53</td><td>117 124 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.81	48.69	74.00	-25.31	46.14	30.72	5.36	33.53	117 124 PEAK	Level (dBuV/m) Date: 2024-09-19 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red limit line is at 74.00 dB. The blue trace shows a sharp peak at 2452.00 MHz, reaching approximately 105 dBuV/m. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>102.03</td><td>-----</td><td>-----</td><td>99.46</td><td>30.71</td><td>5.43</td><td>33.57</td><td>117 124 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	102.03	-----	-----	99.46	30.71	5.43	33.57	117 124 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2388.81	48.69	74.00	-25.31	46.14	30.72	5.36	33.53	117 124 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2452.00	102.03	-----	-----	99.46	30.71	5.43	33.57	117 124 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-09-19 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2310 to 2452 MHz. A red limit line is at 54.00 dB. The blue trace shows a rising signal starting around 2395 MHz, reaching approximately 105 dBuV/m at 2452 MHz. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.81</td><td>38.42</td><td>54.00</td><td>-15.58</td><td>35.87</td><td>30.72</td><td>5.36</td><td>33.53</td><td>117 124 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.81	38.42	54.00	-15.58	35.87	30.72	5.36	33.53	117 124 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red limit line is at 54.00 dB. The blue trace shows a sharp peak at 2452.00 MHz, reaching approximately 105 dBuV/m. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>95.32</td><td>-----</td><td>-----</td><td>92.75</td><td>30.71</td><td>5.43</td><td>33.57</td><td>117 124 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	95.32	-----	-----	92.75	30.71	5.43	33.57	117 124 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2388.81	38.42	54.00	-15.58	35.87	30.72	5.36	33.53	117 124 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2452.00	95.32	-----	-----	92.75	30.71	5.43	33.57	117 124 AVERAGE																																																																									



Mode	21																																													
	Band Edge - R																																													
	2400-2483.5_802.11ac VHT40_CH09_2452MHz																																													
ANT	CDD 0+1																																													
Pol.	Horizontal					Fundamental																																								
Peak	Date: 2024-09-19 PEAK_BE_74 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2485.60</td><td>58.06</td><td>74.00</td><td>-15.94</td><td>55.49</td><td>30.70</td><td>5.46</td><td>33.59</td><td>117</td><td>124</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2485.60	58.06	74.00	-15.94	55.49	30.70	5.46	33.59	117	124	PEAK	Blank				
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																				
1	2485.60	58.06	74.00	-15.94	55.49	30.70	5.46	33.59	117	124	PEAK																																			
Avg	Date: 2024-09-19 AVG_BE_54 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2485.60</td><td>48.37</td><td>54.00</td><td>-5.63</td><td>45.80</td><td>30.70</td><td>5.46</td><td>33.59</td><td>117</td><td>124</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2485.60	48.37	54.00	-5.63	45.80	30.70	5.46	33.59	117	124	AVERAGE	Blank				
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																				
1	2485.60	48.37	54.00	-5.63	45.80	30.70	5.46	33.59	117	124	AVERAGE																																			



Mode	21																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11ac VHT40_CH09_2452MHz																																																																																	
ANT	CDD 0+1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.80</td><td>45.81</td><td>74.00</td><td>-28.19</td><td>43.26</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>188 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.80	45.81	74.00	-28.19	43.26	30.72	5.36	33.53	100	188 PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2452.00</td><td>98.82</td><td>-----</td><td>-----</td><td>96.25</td><td>30.71</td><td>5.43</td><td>33.57</td><td>100</td><td>188 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2452.00	98.82	-----	-----	96.25	30.71	5.43	33.57	100	188 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2389.80	45.81	74.00	-28.19	43.26	30.72	5.36	33.53	100	188 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2452.00	98.82	-----	-----	96.25	30.71	5.43	33.57	100	188 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.09</td><td>36.73</td><td>54.00</td><td>-17.27</td><td>34.18</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>188 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.09	36.73	54.00	-17.27	34.18	30.72	5.36	33.53	100	188 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2452.00</td><td>92.11</td><td>-----</td><td>-----</td><td>89.54</td><td>30.71</td><td>5.43</td><td>33.57</td><td>100</td><td>188 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2452.00	92.11	-----	-----	89.54	30.71	5.43	33.57	100	188 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2389.09	36.73	54.00	-17.27	34.18	30.72	5.36	33.53	100	188 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2452.00	92.11	-----	-----	89.54	30.71	5.43	33.57	100	188 AVERAGE																																																																									



Mode	21																																										
	Band Edge - R																																										
	2400-2483.5_802.11ac VHT40_CH09_2452MHz																																										
ANT	CDD 0+1																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2024-09-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.22</td><td>56.48</td><td>74.00</td><td>-17.52</td><td>53.91</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>188 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.22	56.48	74.00	-17.52	53.91	30.70	5.46	33.59	100	188 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	2486.22	56.48	74.00	-17.52	53.91	30.70	5.46	33.59	100	188 PEAK																																	
Avg	Date: 2024-09-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.70</td><td>46.63</td><td>54.00</td><td>-7.37</td><td>44.06</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>188 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.70	46.63	54.00	-7.37	44.06	30.70	5.46	33.59	100	188 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	2485.70	46.63	54.00	-7.37	44.06	30.70	5.46	33.59	100	188 AVERAGE																																	



		22																																																																																								
Mode		Band Edge																																																																																								
		2400-2483.5_802.11ax HE20_CH01_2412MHz																																																																																								
ANT		CDD 0+1																																																																																								
Pol.		Horizontal					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.52</td><td>66.27</td><td>74.00</td><td>-7.73</td><td>63.72</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100 118 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2388.52	66.27	74.00	-7.73	63.72	30.72	5.36	33.53	100 118 PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>111.38</td><td>-----</td><td>-----</td><td>108.83</td><td>30.72</td><td>5.38</td><td>33.55</td><td>100 118 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2412.00	111.38	-----	-----	108.83	30.72	5.38	33.55	100 118 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	2388.52	66.27	74.00	-7.73	63.72	30.72	5.36	33.53	100 118 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	2412.00	111.38	-----	-----	108.83	30.72	5.38	33.55	100 118 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>48.57</td><td>54.00</td><td>-5.43</td><td>46.02</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100 118 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2389.82	48.57	54.00	-5.43	46.02	30.72	5.36	33.53	100 118 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>102.18</td><td>-----</td><td>-----</td><td>99.63</td><td>30.72</td><td>5.38</td><td>33.55</td><td>100 118 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2412.00	102.18	-----	-----	99.63	30.72	5.38	33.55	100 118 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	2389.82	48.57	54.00	-5.43	46.02	30.72	5.36	33.53	100 118 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	2412.00	102.18	-----	-----	99.63	30.72	5.38	33.55	100 118 AVERAGE																																																																																	



Mode	22																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11ax HE20_CH01_2412MHz																																																																																			
ANT	CDD 0+1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.91</td><td>63.66</td><td>74.00</td><td>-10.34</td><td>61.11</td><td>30.72</td><td>5.36</td><td>33.53</td><td>300</td><td>196 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	63.66	74.00	-10.34	61.11	30.72	5.36	33.53	300	196 PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.31</td><td>-----</td><td>-----</td><td>103.76</td><td>30.72</td><td>5.38</td><td>33.55</td><td>300</td><td>196 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.31	-----	-----	103.76	30.72	5.38	33.55	300	196 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2388.91	63.66	74.00	-10.34	61.11	30.72	5.36	33.53	300	196 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	106.31	-----	-----	103.76	30.72	5.38	33.55	300	196 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>46.15</td><td>54.00</td><td>-7.85</td><td>43.60</td><td>30.72</td><td>5.36</td><td>33.53</td><td>300</td><td>196 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.15	54.00	-7.85	43.60	30.72	5.36	33.53	300	196 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>96.89</td><td>-----</td><td>-----</td><td>94.34</td><td>30.72</td><td>5.38</td><td>33.55</td><td>300</td><td>196 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.89	-----	-----	94.34	30.72	5.38	33.55	300	196 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	46.15	54.00	-7.85	43.60	30.72	5.36	33.53	300	196 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	96.89	-----	-----	94.34	30.72	5.38	33.55	300	196 AVERAGE																																																																										



Mode	22																																																																																												
	Harmonic																																																																																												
	2400-2483.5_802.11ax HE20_CH01_2412MHz																																																																																												
ANT	CDD 0+1																																																																																												
Pol.	Horizontal						Vertical																																																																																						
Peak Avg	Level (dBuV/m) Date: 2024-09-21 PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.44</td><td>74.00</td><td>-29.56</td><td>64.63</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table> <td colspan="5"> Level (dBuV/m) Date: 2024-09-21 PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.93</td><td>74.00</td><td>-30.07</td><td>64.12</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table> </td>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.44	74.00	-29.56	64.63	35.78	8.88	64.85	---	---	Peak	Level (dBuV/m) Date: 2024-09-21 PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.93</td><td>74.00</td><td>-30.07</td><td>64.12</td><td>35.78</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.93	74.00	-30.07	64.12	35.78	8.88	64.85	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	44.44	74.00	-29.56	64.63	35.78	8.88	64.85	---	---	Peak																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	43.93	74.00	-30.07	64.12	35.78	8.88	64.85	---	---	Peak																																																																																		







Mode	23																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11ax HE20_CH06_2437MHz																																																																																																									
ANT	CDD 0+1																																																																																																									
Pol.	Horizontal								Vertical																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-09-21 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>43.65</td><td>74.00</td><td>-30.35</td><td>63.90</td><td>35.90</td><td>8.72</td><td>64.87 --- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.39</td><td>74.00</td><td>-28.61</td><td>63.19</td><td>36.88</td><td>10.18</td><td>64.86 --- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4874.00	43.65	74.00	-30.35	63.90	35.90	8.72	64.87 --- Peak	2	7311.00	45.39	74.00	-28.61	63.19	36.88	10.18	64.86 --- Peak	Level (dBuV/m) Date: 2024-09-21 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>43.99</td><td>74.00</td><td>-30.01</td><td>64.24</td><td>35.90</td><td>8.72</td><td>64.87 --- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.46</td><td>74.00</td><td>-29.54</td><td>62.26</td><td>36.88</td><td>10.18</td><td>64.86 --- Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4874.00	43.99	74.00	-30.01	64.24	35.90	8.72	64.87 --- Peak	2	7311.00	44.46	74.00	-29.54	62.26	36.88	10.18	64.86 --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4874.00	43.65	74.00	-30.35	63.90	35.90	8.72	64.87 --- Peak																																																																																																		
2	7311.00	45.39	74.00	-28.61	63.19	36.88	10.18	64.86 --- Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4874.00	43.99	74.00	-30.01	64.24	35.90	8.72	64.87 --- Peak																																																																																																		
2	7311.00	44.46	74.00	-29.54	62.26	36.88	10.18	64.86 --- Peak																																																																																																		



Mode	24																																																																																					
	Band Edge																																																																																					
	2400-2483.5_802.11ax HE20_CH11_2462MHz																																																																																					
ANT	CDD 0+1																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.05</td><td>63.92</td><td>74.00</td><td>-10.08</td><td>61.35</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>129</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.05	63.92	74.00	-10.08	61.35	30.70	5.46	33.59	100	129	PEAK	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>109.44</td><td>-----</td><td>-----</td><td>106.87</td><td>30.71</td><td>5.43</td><td>33.57</td><td>100</td><td>129</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	109.44	-----	-----	106.87	30.71	5.43	33.57	100	129	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2486.05	63.92	74.00	-10.08	61.35	30.70	5.46	33.59	100	129	PEAK																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2462.00	109.44	-----	-----	106.87	30.71	5.43	33.57	100	129	PEAK																																																																											
Avg	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.89</td><td>48.18</td><td>54.00</td><td>-5.82</td><td>45.61</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>129</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.89	48.18	54.00	-5.82	45.61	30.70	5.46	33.59	100	129	AVERAGE	Level (dBuV/m) Date: 2024-09-19 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.97</td><td>-----</td><td>-----</td><td>97.41</td><td>30.71</td><td>5.43</td><td>33.58</td><td>100</td><td>129</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.97	-----	-----	97.41	30.71	5.43	33.58	100	129	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2483.89	48.18	54.00	-5.82	45.61	30.70	5.46	33.59	100	129	AVERAGE																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2462.00	99.97	-----	-----	97.41	30.71	5.43	33.58	100	129	AVERAGE																																																																											

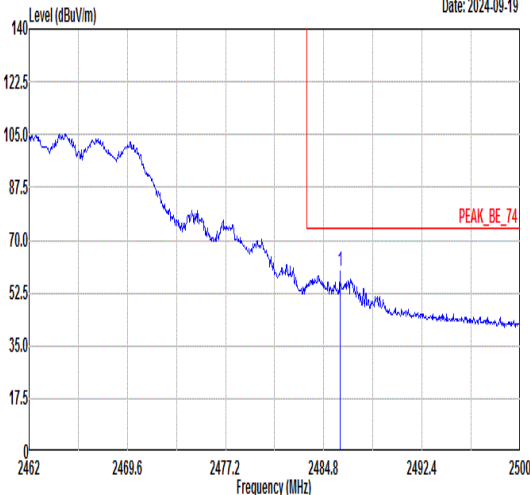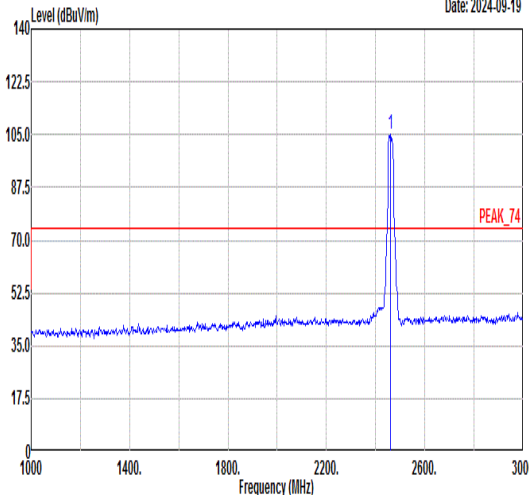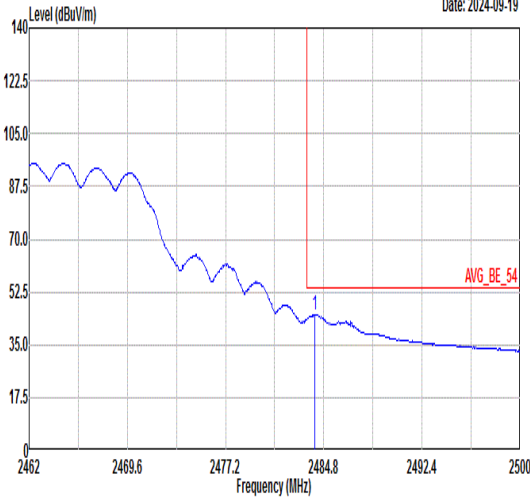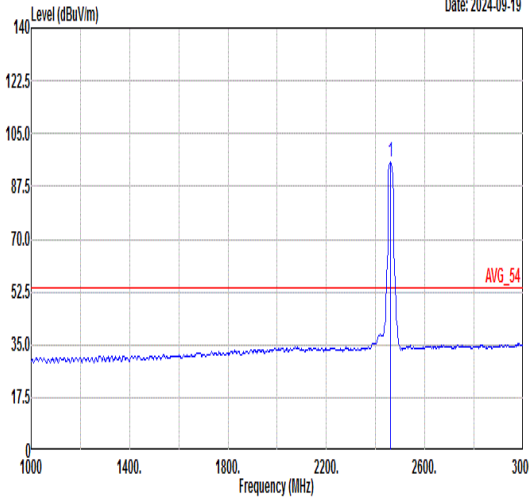

Mode	24																																																																																					
	Band Edge																																																																																					
	2400-2483.5_802.11ax HE20_CH11_2462MHz																																																																																					
ANT	CDD 0+1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-09-19  PEAK_BE_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.05</td><td>59.69</td><td>74.00</td><td>-14.31</td><td>57.12</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>206</td><td>PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2486.05	59.69	74.00	-14.31	57.12	30.70	5.46	33.59	100	206	PEAK	Level (dBuV/m) Date: 2024-09-19  PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>105.14</td><td>-----</td><td>-----</td><td>102.57</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100</td><td>206</td><td>PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.14	-----	-----	102.57	30.71	5.44	33.58	100	206	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2486.05	59.69	74.00	-14.31	57.12	30.70	5.46	33.59	100	206	PEAK																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2462.00	105.14	-----	-----	102.57	30.71	5.44	33.58	100	206	PEAK																																																																											
Avg	Level (dBuV/m) Date: 2024-09-19  AVG_BE_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.12</td><td>45.03</td><td>54.00</td><td>-8.97</td><td>42.46</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>206</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.12	45.03	54.00	-8.97	42.46	30.70	5.46	33.59	100	206	AVERAGE	Level (dBuV/m) Date: 2024-09-19  AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>95.73</td><td>-----</td><td>-----</td><td>93.17</td><td>30.71</td><td>5.43</td><td>33.58</td><td>100</td><td>206</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	95.73	-----	-----	93.17	30.71	5.43	33.58	100	206	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2484.12	45.03	54.00	-8.97	42.46	30.70	5.46	33.59	100	206	AVERAGE																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2462.00	95.73	-----	-----	93.17	30.71	5.43	33.58	100	206	AVERAGE																																																																											



Mode	24																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11ax HE20_CH11_2462MHz																																																																																																																							
ANT	CDD 0+1																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-09-21 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.13</td><td>74.00</td><td>-30.87</td><td>63.43</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.11</td><td>74.00</td><td>-28.89</td><td>62.94</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	43.13	74.00	-30.87	63.43	36.02	8.57	64.89	---	---	Peak	2	7386.00	45.11	74.00	-28.89	62.94	36.85	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-09-21 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>44.24</td><td>74.00</td><td>-29.76</td><td>64.54</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.79</td><td>74.00</td><td>-28.21</td><td>63.62</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	44.24	74.00	-29.76	64.54	36.02	8.57	64.89	---	---	Peak	2	7386.00	45.79	74.00	-28.21	63.62	36.85	10.18	64.86	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	43.13	74.00	-30.87	63.43	36.02	8.57	64.89	---	---	Peak																																																																																																													
2	7386.00	45.11	74.00	-28.89	62.94	36.85	10.18	64.86	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	44.24	74.00	-29.76	64.54	36.02	8.57	64.89	---	---	Peak																																																																																																													
2	7386.00	45.79	74.00	-28.21	63.62	36.85	10.18	64.86	---	---	Peak																																																																																																													



Mode	25																																																																																			
	Band Edge - L																																																																																			
	2400-2483.5_802.11ax HE40_CH03_2422MHz																																																																																			
ANT	CDD 0+1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.06</td><td>60.20</td><td>74.00</td><td>-13.80</td><td>57.65</td><td>30.72</td><td>5.36</td><td>33.53</td><td>126</td><td>125 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2387.06	60.20	74.00	-13.80	57.65	30.72	5.36	33.53	126	125 PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>107.07</td><td>74.00</td><td>33.07</td><td>104.52</td><td>30.71</td><td>5.40</td><td>33.56</td><td>126</td><td>125 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2422.00	107.07	74.00	33.07	104.52	30.71	5.40	33.56	126	125 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2387.06	60.20	74.00	-13.80	57.65	30.72	5.36	33.53	126	125 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2422.00	107.07	74.00	33.07	104.52	30.71	5.40	33.56	126	125 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.97</td><td>48.64</td><td>54.00</td><td>-5.36</td><td>46.09</td><td>30.72</td><td>5.36</td><td>33.53</td><td>126</td><td>125 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.97	48.64	54.00	-5.36	46.09	30.72	5.36	33.53	126	125 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>97.32</td><td>-----</td><td>-----</td><td>94.77</td><td>30.71</td><td>5.40</td><td>33.56</td><td>126</td><td>125 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2422.00	97.32	-----	-----	94.77	30.71	5.40	33.56	126	125 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.97	48.64	54.00	-5.36	46.09	30.72	5.36	33.53	126	125 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2422.00	97.32	-----	-----	94.77	30.71	5.40	33.56	126	125 AVERAGE																																																																										



Mode	25																																										
	Band Edge - R																																										
	2400-2483.5_802.11ax HE40_CH03_2422MHz																																										
ANT	CDD 0+1																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2024-09-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.74</td><td>48.45</td><td>74.00</td><td>-25.55</td><td>45.88</td><td>30.70</td><td>5.46</td><td>33.59</td><td>126</td><td>125 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.74	48.45	74.00	-25.55	45.88	30.70	5.46	33.59	126	125 PEAK	Blank
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	2486.74	48.45	74.00	-25.55	45.88	30.70	5.46	33.59	126	125 PEAK																																	
Avg	Date: 2024-09-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2487.13</td><td>37.69</td><td>54.00</td><td>-16.31</td><td>35.12</td><td>30.70</td><td>5.46</td><td>33.59</td><td>126</td><td>125 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2487.13	37.69	54.00	-16.31	35.12	30.70	5.46	33.59	126	125 AVERAGE	Blank
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	2487.13	37.69	54.00	-16.31	35.12	30.70	5.46	33.59	126	125 AVERAGE																																	



		25																																																																																								
Mode		Band Edge - L																																																																																								
		2400-2483.5_802.11ax HE40_CH03_2422MHz																																																																																								
ANT		CDD 0+1																																																																																								
Pol.		Vertical					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.96</td><td>57.78</td><td>74.00</td><td>-16.22</td><td>55.23</td><td>30.72</td><td>5.36</td><td>33.53</td><td>299 194 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.96	57.78	74.00	-16.22	55.23	30.72	5.36	33.53	299 194 PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>103.24</td><td>-----</td><td>-----</td><td>100.68</td><td>30.72</td><td>5.39</td><td>33.55</td><td>299 194 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	103.24	-----	-----	100.68	30.72	5.39	33.55	299 194 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2388.96	57.78	74.00	-16.22	55.23	30.72	5.36	33.53	299 194 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2422.00	103.24	-----	-----	100.68	30.72	5.39	33.55	299 194 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.86</td><td>45.44</td><td>54.00</td><td>-8.56</td><td>42.89</td><td>30.72</td><td>5.36</td><td>33.53</td><td>299 194 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.86	45.44	54.00	-8.56	42.89	30.72	5.36	33.53	299 194 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>94.15</td><td>-----</td><td>-----</td><td>91.60</td><td>30.71</td><td>5.40</td><td>33.56</td><td>299 194 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	94.15	-----	-----	91.60	30.71	5.40	33.56	299 194 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.86	45.44	54.00	-8.56	42.89	30.72	5.36	33.53	299 194 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2422.00	94.15	-----	-----	91.60	30.71	5.40	33.56	299 194 AVERAGE																																																																																	



Mode	25										
	Band Edge - R										
	2400-2483.5_802.11ax HE40_CH03_2422MHz										
ANT	CDD 0+1										
Pol.	Vertical						Fundamental				
Peak	</										





Mode	26																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11ax HE40_CH09_2452MHz																																																																																	
ANT	CDD 0+1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-09-19 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2310 to 2452 MHz. A red limit line is at 74.00 dB. The blue trace shows a rising signal starting around 2389 MHz, reaching approximately 105 dBuV/m at 2452 MHz. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>51.54</td><td>74.00</td><td>-22.46</td><td>48.99</td><td>30.72</td><td>5.36</td><td>33.53</td><td>102 126 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	51.54	74.00	-22.46	48.99	30.72	5.36	33.53	102 126 PEAK	Level (dBuV/m) Date: 2024-09-19 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red limit line is at 74.00 dB. The blue trace shows a sharp peak at 2452.00 MHz, reaching approximately 104 dBuV/m. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>104.05</td><td>-----</td><td>-----</td><td>101.49</td><td>30.71</td><td>5.42</td><td>33.57</td><td>102 126 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	104.05	-----	-----	101.49	30.71	5.42	33.57	102 126 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.95	51.54	74.00	-22.46	48.99	30.72	5.36	33.53	102 126 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2452.00	104.05	-----	-----	101.49	30.71	5.42	33.57	102 126 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-09-19 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2310 to 2452 MHz. A red limit line is at 54.00 dB. The blue trace shows a rising signal starting around 2389 MHz, reaching approximately 105 dBuV/m at 2452 MHz. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>39.62</td><td>54.00</td><td>-14.38</td><td>37.07</td><td>30.72</td><td>5.36</td><td>33.53</td><td>102 126 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	39.62	54.00	-14.38	37.07	30.72	5.36	33.53	102 126 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red limit line is at 54.00 dB. The blue trace shows a sharp peak at 2452.00 MHz, reaching approximately 95 dBuV/m. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>95.02</td><td>-----</td><td>-----</td><td>92.45</td><td>30.71</td><td>5.43</td><td>33.57</td><td>102 126 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	95.02	-----	-----	92.45	30.71	5.43	33.57	102 126 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.95	39.62	54.00	-14.38	37.07	30.72	5.36	33.53	102 126 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2452.00	95.02	-----	-----	92.45	30.71	5.43	33.57	102 126 AVERAGE																																																																									



Mode	26																																																																																											
	Band Edge - L																																																																																											
	2400-2483.5_802.11ax HE40_CH09_2452MHz																																																																																											
ANT	CDD 0+1																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>46.54</td><td>74.00</td><td>-27.46</td><td>43.99</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100 188 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.54	74.00	-27.46	43.99	30.72	5.36	33.53	100 188 PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>102.62</td><td>-----</td><td>-----</td><td>100.06</td><td>30.71</td><td>5.42</td><td>33.57</td><td>100 188 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	102.62	-----	-----	100.06	30.71	5.42	33.57	100 188 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2389.95	46.54	74.00	-27.46	43.99	30.72	5.36	33.53	100 188 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2452.00	102.62	-----	-----	100.06	30.71	5.42	33.57	100 188 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>36.16</td><td>54.00</td><td>-17.84</td><td>33.61</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100 188 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	36.16	54.00	-17.84	33.61	30.72	5.36	33.53	100 188 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>92.30</td><td>-----</td><td>-----</td><td>89.73</td><td>30.71</td><td>5.43</td><td>33.57</td><td>100 188 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	92.30	-----	-----	89.73	30.71	5.43	33.57	100 188 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2389.95	36.16	54.00	-17.84	33.61	30.72	5.36	33.53	100 188 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2452.00	92.30	-----	-----	89.73	30.71	5.43	33.57	100 188 AVERAGE																																																																																			

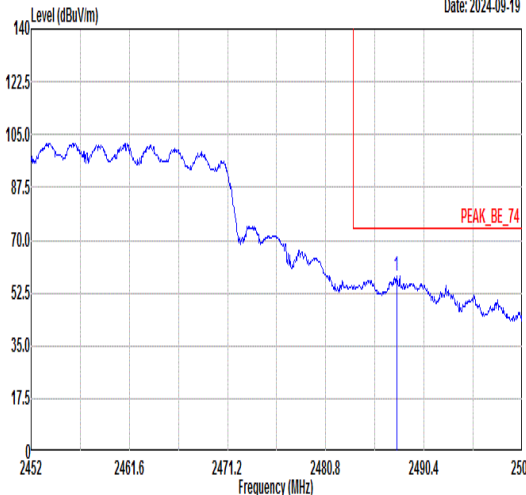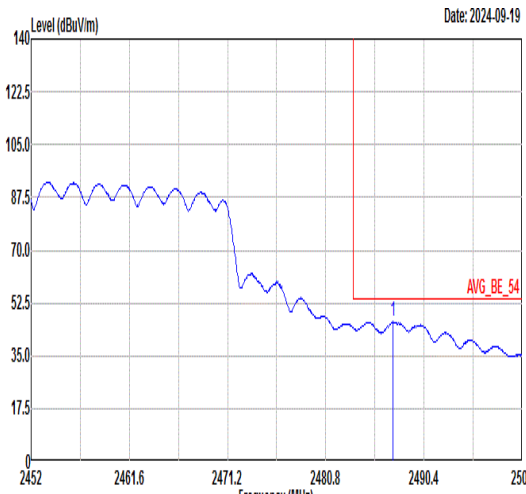

Mode	26																																																				
	Band Edge - R																																																				
	2400-2483.5_802.11ax HE40_CH09_2452MHz																																																				
ANT	CDD 0+1																																																				
Pol.	Vertical						Fundamental																																														
Peak	Date: 2024-09-19 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.71</td><td>58.23</td><td>74.00</td><td>-15.77</td><td>55.66</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>188</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2487.71	58.23	74.00	-15.77	55.66	30.70	5.46	33.59	100	188	PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																												
1	2487.71	58.23	74.00	-15.77	55.66	30.70	5.46	33.59	100	188	PEAK																																										
Avg	Date: 2024-09-19 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.38</td><td>46.30</td><td>54.00</td><td>-7.70</td><td>43.73</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>188</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2487.38	46.30	54.00	-7.70	43.73	30.70	5.46	33.59	100	188	AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																												
1	2487.38	46.30	54.00	-7.70	43.73	30.70	5.46	33.59	100	188	AVERAGE																																										



Mode	27																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11ax HE20_CH01_Partial RU_2412MHz																																																																																			
ANT	CDD 0+1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.35</td><td>53.11</td><td>74.00</td><td>-20.89</td><td>50.56</td><td>30.72</td><td>5.36</td><td>33.53</td><td>169</td><td>124 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.35	53.11	74.00	-20.89	50.56	30.72	5.36	33.53	169	124 PEAK	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>110.92</td><td>-----</td><td>-----</td><td>108.37</td><td>30.72</td><td>5.37</td><td>33.54</td><td>169</td><td>124 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.92	-----	-----	108.37	30.72	5.37	33.54	169	124 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2387.35	53.11	74.00	-20.89	50.56	30.72	5.36	33.53	169	124 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	110.92	-----	-----	108.37	30.72	5.37	33.54	169	124 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.09</td><td>38.35</td><td>54.00</td><td>-15.65</td><td>35.80</td><td>30.72</td><td>5.36</td><td>33.53</td><td>169</td><td>124 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.09	38.35	54.00	-15.65	35.80	30.72	5.36	33.53	169	124 AVERAGE	Level (dBuV/m) Date: 2024-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.22</td><td>-----</td><td>-----</td><td>100.67</td><td>30.72</td><td>5.37</td><td>33.54</td><td>169</td><td>124 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.22	-----	-----	100.67	30.72	5.37	33.54	169	124 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2387.09	38.35	54.00	-15.65	35.80	30.72	5.36	33.53	169	124 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	103.22	-----	-----	100.67	30.72	5.37	33.54	169	124 AVERAGE																																																																										







Mode	27	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH01_Partial RU_2412MHz	
ANT	CDD 0+1	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2024-09-19 <	



Mode	28																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11ax HE20_CH11_Partial RU_2462MHz																																																																																											
ANT	CDD 0+1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-09-19 127 PEAK <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.69</td><td>61.65</td><td>74.00</td><td>-12.35</td><td>59.08</td><td>30.70</td><td>5.46</td><td>33.59</td><td>148</td><td>127</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.69	61.65	74.00	-12.35	59.08	30.70	5.46	33.59	148	127	PEAK	Level (dBuV/m) Date: 2024-09-19 127 PEAK <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>110.05</td><td>-----</td><td>-----</td><td>107.48</td><td>30.71</td><td>5.44</td><td>33.58</td><td>148</td><td>127</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.05	-----	-----	107.48	30.71	5.44	33.58	148	127	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2484.69	61.65	74.00	-12.35	59.08	30.70	5.46	33.59	148	127	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	110.05	-----	-----	107.48	30.71	5.44	33.58	148	127	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-19 127 AVERAGE <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>43.00</td><td>54.00</td><td>-11.00</td><td>40.43</td><td>30.70</td><td>5.46</td><td>33.59</td><td>148</td><td>127</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.62	43.00	54.00	-11.00	40.43	30.70	5.46	33.59	148	127	AVERAGE	Level (dBuV/m) Date: 2024-09-19 127 AVERAGE <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>100.15</td><td>-----</td><td>-----</td><td>97.58</td><td>30.71</td><td>5.44</td><td>33.58</td><td>148</td><td>127</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.15	-----	-----	97.58	30.71	5.44	33.58	148	127	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2483.62	43.00	54.00	-11.00	40.43	30.70	5.46	33.59	148	127	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	100.15	-----	-----	97.58	30.71	5.44	33.58	148	127	AVERAGE																																																																																	

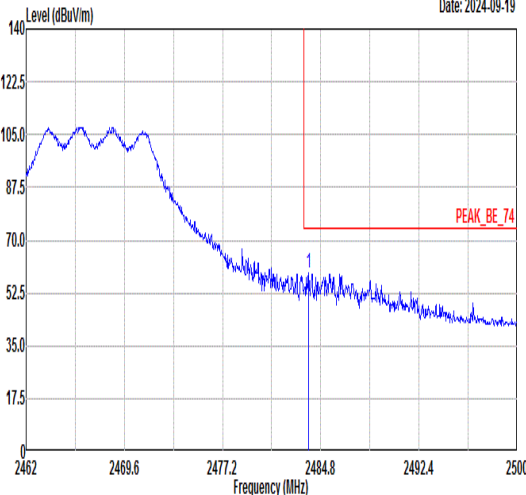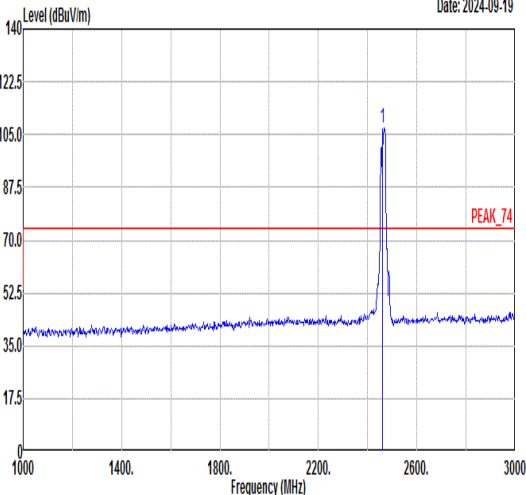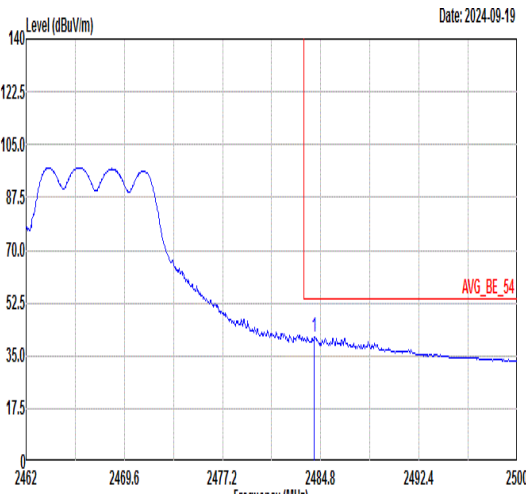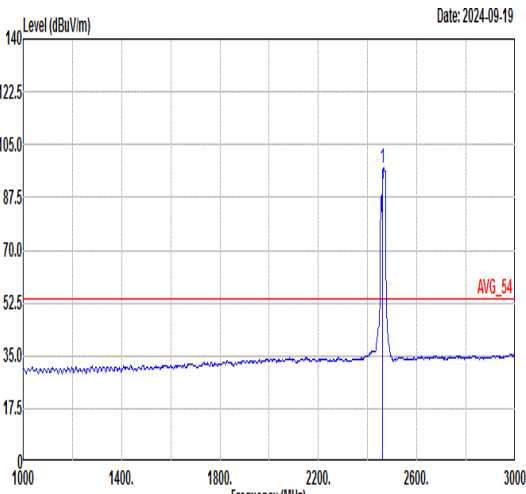

Mode	28																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11ax HE20_CH11_Partial RU_2462MHz																																																																																			
ANT	CDD 0+1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Date: 2024-09-19  Level (dBuV/m) Frequency (MHz) PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.85</td><td>59.10</td><td>74.00</td><td>-14.90</td><td>56.53</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>191 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.85	59.10	74.00	-14.90	56.53	30.70	5.46	33.59	100	191 PEAK	Date: 2024-09-19  Level (dBuV/m) Frequency (MHz) PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>107.36</td><td>-----</td><td>-----</td><td>104.79</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100</td><td>191 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.36	-----	-----	104.79	30.71	5.44	33.58	100	191 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.85	59.10	74.00	-14.90	56.53	30.70	5.46	33.59	100	191 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	107.36	-----	-----	104.79	30.71	5.44	33.58	100	191 PEAK																																																																										
Avg	Date: 2024-09-19  Level (dBuV/m) Frequency (MHz) AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.31</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>38.80</td><td>30.70</td><td>5.46</td><td>33.59</td><td>100</td><td>191 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.31	41.37	54.00	-12.63	38.80	30.70	5.46	33.59	100	191 AVERAGE	Date: 2024-09-19  Level (dBuV/m) Frequency (MHz) AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.20</td><td>-----</td><td>-----</td><td>94.63</td><td>30.71</td><td>5.44</td><td>33.58</td><td>100</td><td>191 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.20	-----	-----	94.63	30.71	5.44	33.58	100	191 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2484.31	41.37	54.00	-12.63	38.80	30.70	5.46	33.59	100	191 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	97.20	-----	-----	94.63	30.71	5.44	33.58	100	191 AVERAGE																																																																										







Mode	29																																																																																																																																																																																																																			
	LF																																																																																																																																																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																																																			
ANT	CDD 0+1																																																																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																																																																													
QPI/ Peak	Level (dBuV/m) Date: 2024-09-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>54.25</td><td>18.67</td><td>40.00</td><td>-21.33</td><td>36.95</td><td>12.80</td><td>0.73</td><td>31.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>159.98</td><td>24.19</td><td>43.50</td><td>-19.31</td><td>38.08</td><td>16.50</td><td>1.29</td><td>31.68</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>214.30</td><td>26.16</td><td>43.50</td><td>-17.34</td><td>41.37</td><td>14.90</td><td>1.49</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>257.95</td><td>25.77</td><td>46.00</td><td>-20.23</td><td>36.24</td><td>19.44</td><td>1.67</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>636.25</td><td>27.57</td><td>46.00</td><td>-18.43</td><td>29.69</td><td>26.42</td><td>2.63</td><td>31.17</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>841.89</td><td>30.69</td><td>46.00</td><td>-15.31</td><td>29.88</td><td>28.88</td><td>3.03</td><td>31.10</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	54.25	18.67	40.00	-21.33	36.95	12.80	0.73	31.81	---	---	Peak	2	159.98	24.19	43.50	-19.31	38.08	16.50	1.29	31.68	---	---	Peak	3	214.30	26.16	43.50	-17.34	41.37	14.90	1.49	31.60	---	---	Peak	4	257.95	25.77	46.00	-20.23	36.24	19.44	1.67	31.58	---	---	Peak	5	636.25	27.57	46.00	-18.43	29.69	26.42	2.63	31.17	---	---	Peak	6	841.89	30.69	46.00	-15.31	29.88	28.88	3.03	31.10	---	---	Peak	Level (dBuV/m) Date: 2024-09-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>36.79</td><td>23.50</td><td>40.00</td><td>-16.50</td><td>33.15</td><td>21.50</td><td>0.59</td><td>31.74</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>178.41</td><td>24.32</td><td>43.50</td><td>-19.18</td><td>39.50</td><td>15.10</td><td>1.36</td><td>31.64</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>214.30</td><td>24.84</td><td>43.50</td><td>-18.66</td><td>40.05</td><td>14.90</td><td>1.49</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>492.69</td><td>24.13</td><td>46.00</td><td>-21.87</td><td>29.37</td><td>23.86</td><td>2.31</td><td>31.41</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>818.61</td><td>30.96</td><td>46.00</td><td>-15.04</td><td>31.08</td><td>28.00</td><td>2.98</td><td>31.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>946.65</td><td>31.26</td><td>46.00</td><td>-14.74</td><td>28.16</td><td>30.68</td><td>3.23</td><td>30.81</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	36.79	23.50	40.00	-16.50	33.15	21.50	0.59	31.74	---	---	Peak	2	178.41	24.32	43.50	-19.18	39.50	15.10	1.36	31.64	---	---	Peak	3	214.30	24.84	43.50	-18.66	40.05	14.90	1.49	31.60	---	---	Peak	4	492.69	24.13	46.00	-21.87	29.37	23.86	2.31	31.41	---	---	Peak	5	818.61	30.96	46.00	-15.04	31.08	28.00	2.98	31.10	---	---	Peak	6	946.65	31.26	46.00	-14.74	28.16	30.68	3.23	30.81	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																											
1	54.25	18.67	40.00	-21.33	36.95	12.80	0.73	31.81	---	---	Peak																																																																																																																																																																																																									
2	159.98	24.19	43.50	-19.31	38.08	16.50	1.29	31.68	---	---	Peak																																																																																																																																																																																																									
3	214.30	26.16	43.50	-17.34	41.37	14.90	1.49	31.60	---	---	Peak																																																																																																																																																																																																									
4	257.95	25.77	46.00	-20.23	36.24	19.44	1.67	31.58	---	---	Peak																																																																																																																																																																																																									
5	636.25	27.57	46.00	-18.43	29.69	26.42	2.63	31.17	---	---	Peak																																																																																																																																																																																																									
6	841.89	30.69	46.00	-15.31	29.88	28.88	3.03	31.10	---	---	Peak																																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																											
1	36.79	23.50	40.00	-16.50	33.15	21.50	0.59	31.74	---	---	Peak																																																																																																																																																																																																									
2	178.41	24.32	43.50	-19.18	39.50	15.10	1.36	31.64	---	---	Peak																																																																																																																																																																																																									
3	214.30	24.84	43.50	-18.66	40.05	14.90	1.49	31.60	---	---	Peak																																																																																																																																																																																																									
4	492.69	24.13	46.00	-21.87	29.37	23.86	2.31	31.41	---	---	Peak																																																																																																																																																																																																									
5	818.61	30.96	46.00	-15.04	31.08	28.00	2.98	31.10	---	---	Peak																																																																																																																																																																																																									
6	946.65	31.26	46.00	-14.74	28.16	30.68	3.23	30.81	---	---	Peak																																																																																																																																																																																																									



Mode	30																																																																																																									
	Band Edge - L																																																																																																									
	2400-2483.5_11ac_VHT20_Ch11+Bluetooth-LE_CH38																																																																																																									
ANT	CDD 0+1																																																																																																									
Pol.	Horizontal																																																																																																									
Peak	Fundamental																																																																																																									
	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz)											Level (dBuV/m) Date: 2024-09-20 Frequency (MHz)																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>58.77</td><td>74.00</td><td>-15.23</td><td>56.20</td><td>30.70</td><td>5.46</td><td>33.59</td><td>361</td><td>119</td><td>PEAK</td></tr></tbody></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.51	58.77	74.00	-15.23	56.20	30.70	5.46	33.59	361	119	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>104.96</td><td>-----</td><td>-----</td><td>102.39</td><td>30.71</td><td>5.44</td><td>33.58</td><td>361</td><td>119</td><td>PEAK</td></tr></tbody></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.96	-----	-----	102.39	30.71	5.44	33.58	361	119	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2483.51	58.77	74.00	-15.23	56.20	30.70	5.46	33.59	361	119	PEAK																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2462.00	104.96	-----	-----	102.39	30.71	5.44	33.58	361	119	PEAK																																																																																															
Avg	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz)											Level (dBuV/m) Date: 2024-09-20 Frequency (MHz)																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>44.65</td><td>54.00</td><td>-9.35</td><td>42.08</td><td>30.70</td><td>5.46</td><td>33.59</td><td>361</td><td>119</td><td>AVERAGE</td></tr></tbody></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.51	44.65	54.00	-9.35	42.08	30.70	5.46	33.59	361	119	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>97.89</td><td>-----</td><td>-----</td><td>95.32</td><td>30.71</td><td>5.44</td><td>33.58</td><td>361</td><td>119</td><td>AVERAGE</td></tr></tbody></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.89	-----	-----	95.32	30.71	5.44	33.58	361	119	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2483.51	44.65	54.00	-9.35	42.08	30.70	5.46	33.59	361	119	AVERAGE																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2462.00	97.89	-----	-----	95.32	30.71	5.44	33.58	361	119	AVERAGE																																																																																															

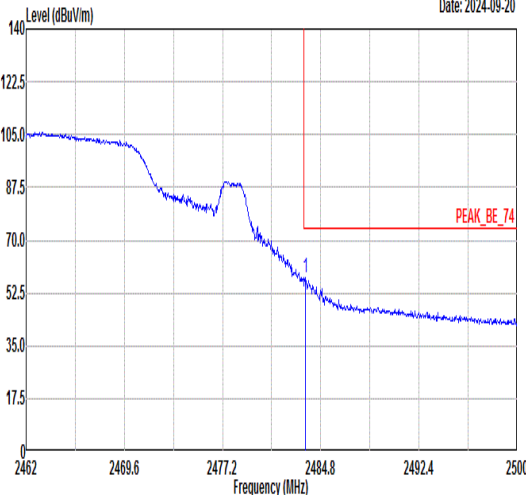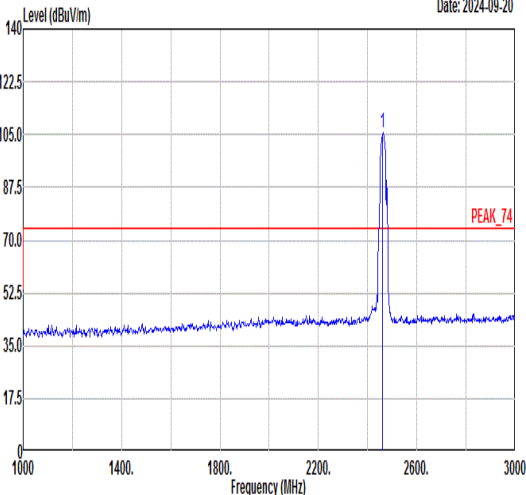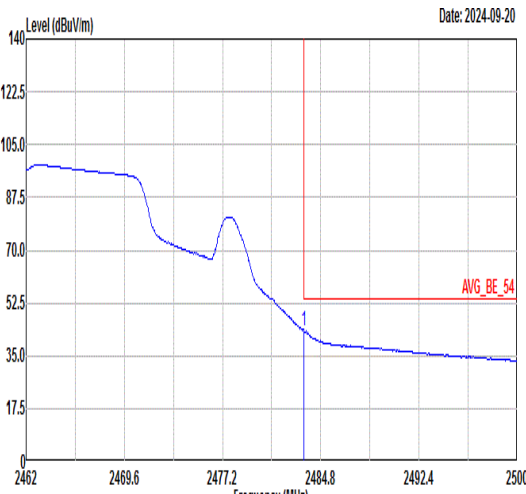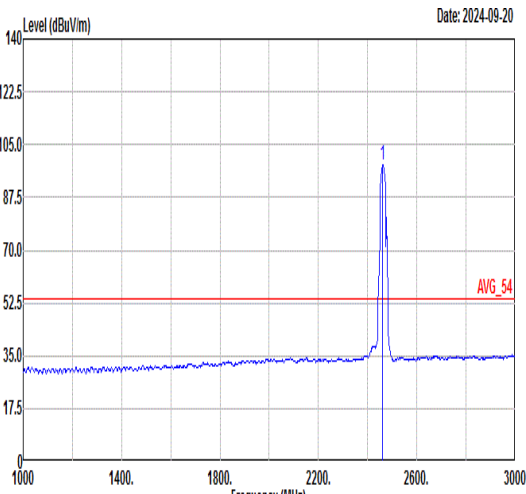

Mode	30																																																																																														
	Band Edge - L																																																																																														
	2400-2483.5_11ac_VHT20_Ch11+Bluetooth-LE_CH38																																																																																														
ANT	CDD 0+1																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak																																																																																															
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>57.54</td><td>74.00</td><td>-16.46</td><td>54.97</td><td>30.70</td><td>5.46</td><td>33.59</td><td>280</td><td>179</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	57.54	74.00	-16.46	54.97	30.70	5.46	33.59	280	179	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>105.68</td><td>-----</td><td>-----</td><td>103.11</td><td>30.71</td><td>5.44</td><td>33.58</td><td>280</td><td>179</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.68	-----	-----	103.11	30.71	5.44	33.58	280	179
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.58	57.54	74.00	-16.46	54.97	30.70	5.46	33.59	280	179	PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	105.68	-----	-----	103.11	30.71	5.44	33.58	280	179	PEAK																																																																																				
Avg																																																																																															
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>43.17</td><td>54.00</td><td>-10.83</td><td>40.60</td><td>30.70</td><td>5.46</td><td>33.59</td><td>280</td><td>179</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	43.17	54.00	-10.83	40.60	30.70	5.46	33.59	280	179	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.23</td><td>-----</td><td>-----</td><td>95.66</td><td>30.71</td><td>5.44</td><td>33.58</td><td>280</td><td>179</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.23	-----	-----	95.66	30.71	5.44	33.58	280	179
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.51	43.17	54.00	-10.83	40.60	30.70	5.46	33.59	280	179	AVERAGE																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	98.23	-----	-----	95.66	30.71	5.44	33.58	280	179	AVERAGE																																																																																				





Mode	30																																																																												
	Band Edge - R																																																																												
	2400-2483.5_11ac_VHT20_Ch11+Bluetooth-LE_CH38																																																																												
ANT	0																																																																												
Pol.	Horizontal						Fundamental																																																																						
Peak	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.59</td><td>58.71</td><td>74.00</td><td>-15.29</td><td>56.14</td><td>30.70</td><td>5.46</td><td>33.59</td><td>367</td><td>123</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.59	58.71	74.00	-15.29	56.14	30.70	5.46	33.59	367	123	PEAK	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2478.00</td><td>104.06</td><td>-----</td><td>-----</td><td>101.50</td><td>30.71</td><td>5.43</td><td>33.58</td><td>367</td><td>123</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2478.00	104.06	-----	-----	101.50	30.71	5.43	33.58	367	123	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.59	58.71	74.00	-15.29	56.14	30.70	5.46	33.59	367	123	PEAK																																																																			
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 2478.00	104.06	-----	-----	101.50	30.71	5.43	33.58	367	123	PEAK																																																																			
Avg	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.52</td><td>47.65</td><td>54.00</td><td>-6.35</td><td>45.08</td><td>30.70</td><td>5.46</td><td>33.59</td><td>367</td><td>123</td><td>AVERAGE</td></tr></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.52	47.65	54.00	-6.35	45.08	30.70	5.46	33.59	367	123	AVERAGE	Level (dBuV/m) Date: 2024-09-20 Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2478.00</td><td>97.33</td><td>-----</td><td>-----</td><td>94.77</td><td>30.71</td><td>5.43</td><td>33.58</td><td>367</td><td>123</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2478.00	97.33	-----	-----	94.77	30.71	5.43	33.58	367	123	AVERAGE
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.52	47.65	54.00	-6.35	45.08	30.70	5.46	33.59	367	123	AVERAGE																																																																			
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 2478.00	97.33	-----	-----	94.77	30.71	5.43	33.58	367	123	AVERAGE																																																																			



Mode	30																																																																											
	Band Edge - R																																																																											
	2400-2483.5_ 11ac_VHT20_Ch11+Bluetooth-LE_CH38																																																																											
ANT	0																																																																											
Pol.	Vertical					Fundamental																																																																						
Peak	Level (dBuV/m) Date: 2024-09-20 PEAK_BE_74 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.81</td><td>56.10</td><td>74.00</td><td>-17.90</td><td>53.53</td><td>30.70</td><td>5.46</td><td>33.59</td><td>244</td><td>182</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.81	56.10	74.00	-17.90	53.53	30.70	5.46	33.59	244	182	PEAK	Level (dBuV/m) Date: 2024-09-20 PEAK_74 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2478.00</td><td>102.43</td><td>-----</td><td>-----</td><td>99.86</td><td>30.71</td><td>5.44</td><td>33.58</td><td>244</td><td>182</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2478.00	102.43	-----	-----	99.86	30.71	5.44	33.58	244	182	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.81	56.10	74.00	-17.90	53.53	30.70	5.46	33.59	244	182	PEAK																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2478.00	102.43	-----	-----	99.86	30.71	5.44	33.58	244	182	PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-09-20 AVG_BE_54 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.54</td><td>45.77</td><td>54.00</td><td>-8.23</td><td>43.20</td><td>30.70</td><td>5.46</td><td>33.59</td><td>244</td><td>182</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.54	45.77	54.00	-8.23	43.20	30.70	5.46	33.59	244	182	AVERAGE	Level (dBuV/m) Date: 2024-09-20 AVG_54 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2478.00</td><td>95.54</td><td>-----</td><td>-----</td><td>92.97</td><td>30.71</td><td>5.44</td><td>33.58</td><td>244</td><td>182</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2478.00	95.54	-----	-----	92.97	30.71	5.44	33.58	244	182	AVERAGE
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.54	45.77	54.00	-8.23	43.20	30.70	5.46	33.59	244	182	AVERAGE																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2478.00	95.54	-----	-----	92.97	30.71	5.44	33.58	244	182	AVERAGE																																																																		



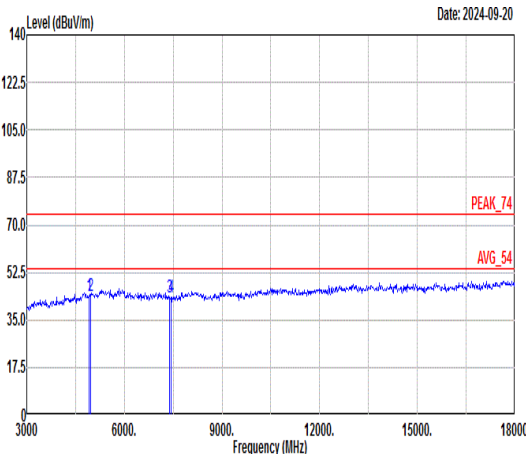
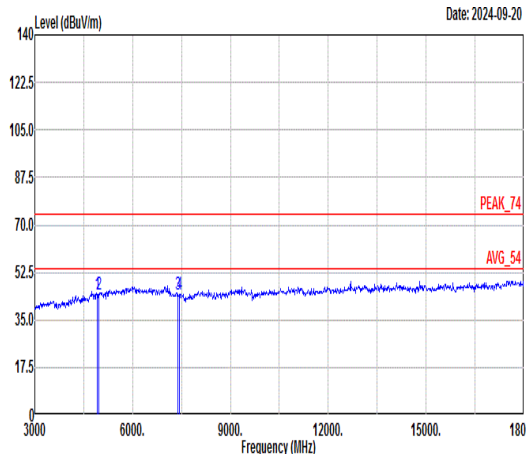


Mode	30																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																	
	2400-2483.5_11ac_VHT20_Ch11+Bluetooth-LE_CH38																																																																																																																																																																																	
ANT	CDD 0+1																																																																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																																																																											
Peak Avg																																																																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.84</td><td>74.00</td><td>-30.16</td><td>64.14</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>44.09</td><td>74.00</td><td>-29.91</td><td>64.43</td><td>36.10</td><td>8.46</td><td>64.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>43.38</td><td>74.00</td><td>-30.62</td><td>61.21</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>43.16</td><td>74.00</td><td>-30.84</td><td>61.03</td><td>36.82</td><td>10.17</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4924.00	43.84	74.00	-30.16	64.14	36.02	8.57	64.89	---	---	Peak	2	4960.00	44.09	74.00	-29.91	64.43	36.10	8.46	64.90	---	---	Peak	3	7386.00	43.38	74.00	-30.62	61.21	36.85	10.18	64.86	---	---	Peak	4	7440.00	43.16	74.00	-30.84	61.03	36.82	10.17	64.86	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4924.00</td><td>44.58</td><td>74.00</td><td>-29.42</td><td>64.88</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>44.53</td><td>74.00</td><td>-29.47</td><td>64.87</td><td>36.10</td><td>8.46</td><td>64.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>44.29</td><td>74.00</td><td>-29.71</td><td>62.12</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>44.18</td><td>74.00</td><td>-29.82</td><td>62.05</td><td>36.82</td><td>10.17</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4924.00	44.58	74.00	-29.42	64.88	36.02	8.57	64.89	---	---	Peak	2	4960.00	44.53	74.00	-29.47	64.87	36.10	8.46	64.90	---	---	Peak	3	7386.00	44.29	74.00	-29.71	62.12	36.85	10.18	64.86	---	---	Peak	4	7440.00	44.18	74.00	-29.82	62.05	36.82	10.17	64.86	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	4924.00	43.84	74.00	-30.16	64.14	36.02	8.57	64.89	---	---	Peak																																																																																																																																																																							
2	4960.00	44.09	74.00	-29.91	64.43	36.10	8.46	64.90	---	---	Peak																																																																																																																																																																							
3	7386.00	43.38	74.00	-30.62	61.21	36.85	10.18	64.86	---	---	Peak																																																																																																																																																																							
4	7440.00	43.16	74.00	-30.84	61.03	36.82	10.17	64.86	---	---	Peak																																																																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	4924.00	44.58	74.00	-29.42	64.88	36.02	8.57	64.89	---	---	Peak																																																																																																																																																																							
2	4960.00	44.53	74.00	-29.47	64.87	36.10	8.46	64.90	---	---	Peak																																																																																																																																																																							
3	7386.00	44.29	74.00	-29.71	62.12	36.85	10.18	64.86	---	---	Peak																																																																																																																																																																							
4	7440.00	44.18	74.00	-29.82	62.05	36.82	10.17	64.86	---	---	Peak																																																																																																																																																																							





Mode	31	
	Band Edge	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2024-09-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2388.00 46.76 74.00 -27.24 44.21 30.72 5.36 33.53 111 131 PEAK	Level (dBuV/m) Date: 2024-09-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2412.00 103.12 ----- 100.57 30.72 5.38 33.55 111 131 PEAK
	Level (dBuV/m) Date: 2024-09-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2387.74 37.79 54.00 -16.21 35.24 30.72 5.36 33.53 111 131 AVERAGE	Level (dBuV/m) Date: 2024-09-25 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2412.00 101.01 ----- 98.46 30.72 5.38 33.55 111 131 AVERAGE

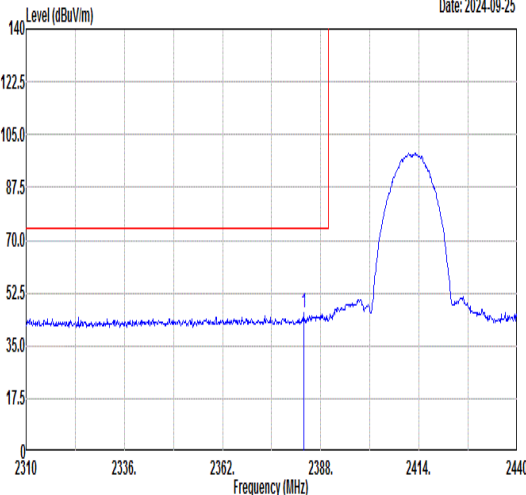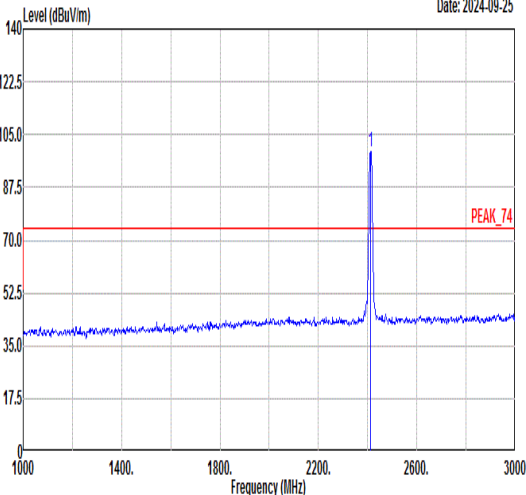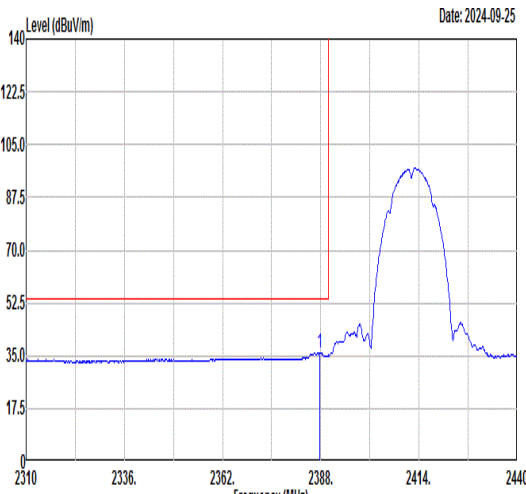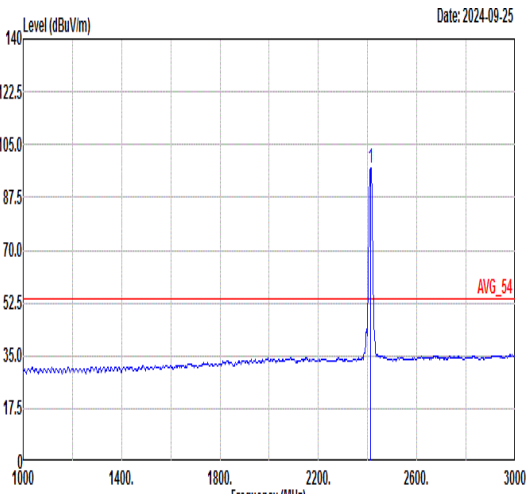

Mode	31																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11b_CH01_2412MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2383.45</td><td>45.79</td><td>74.00</td><td>-28.21</td><td>43.25</td><td>30.72</td><td>5.35</td><td>33.53</td><td>242 182 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2383.45	45.79	74.00	-28.21	43.25	30.72	5.35	33.53	242 182 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>99.38</td><td>-----</td><td>-----</td><td>96.83</td><td>30.72</td><td>5.38</td><td>33.55</td><td>242 182 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.38	-----	-----	96.83	30.72	5.38	33.55
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2383.45	45.79	74.00	-28.21	43.25	30.72	5.35	33.53	242 182 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	99.38	-----	-----	96.83	30.72	5.38	33.55	242 182 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.74</td><td>35.77</td><td>54.00</td><td>-18.23</td><td>33.22</td><td>30.72</td><td>5.36</td><td>33.53</td><td>242 182 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.74	35.77	54.00	-18.23	33.22	30.72	5.36	33.53	242 182 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.12</td><td>-----</td><td>-----</td><td>94.57</td><td>30.72</td><td>5.38</td><td>33.55</td><td>242 182 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.12	-----	-----	94.57	30.72	5.38	33.55
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2387.74	35.77	54.00	-18.23	33.22	30.72	5.36	33.53	242 182 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	97.12	-----	-----	94.57	30.72	5.38	33.55	242 182 AVERAGE																																																																																

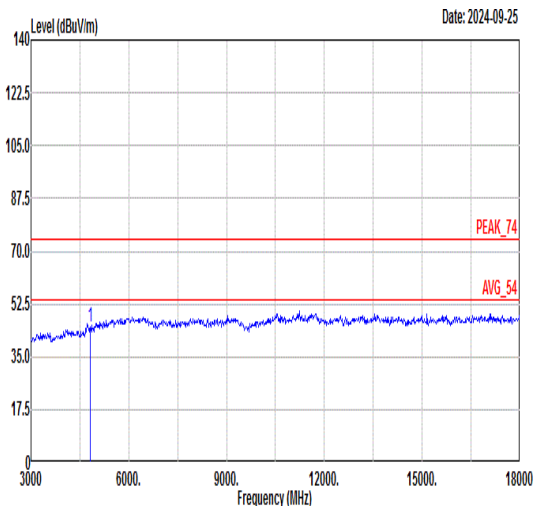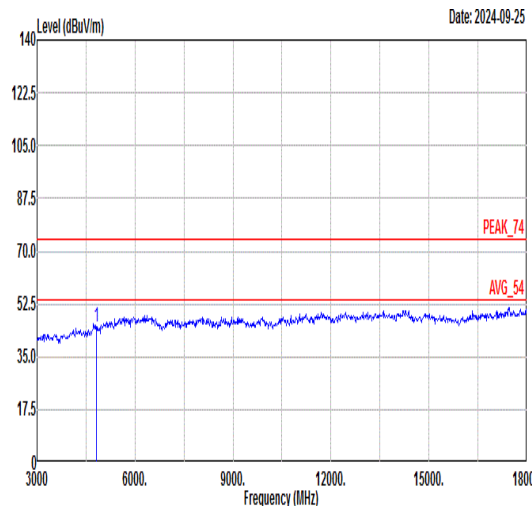

Mode	31																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-09-25  <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4824.00</td><td>44.80</td><td>74.00</td><td>-29.20</td><td>52.90</td><td>35.78</td><td>8.88</td><td>52.76</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4824.00	44.80	74.00	-29.20	52.90	35.78	8.88	52.76	---	---	Peak	Level (dBuV/m) Date: 2024-09-25  <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4824.00</td><td>44.72</td><td>74.00</td><td>-29.28</td><td>52.82</td><td>35.78</td><td>8.88</td><td>52.76</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4824.00	44.72	74.00	-29.28	52.82	35.78	8.88	52.76	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4824.00	44.80	74.00	-29.20	52.90	35.78	8.88	52.76	---	---	Peak																																																																																															
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4824.00	44.72	74.00	-29.28	52.82	35.78	8.88	52.76	---	---	Peak																																																																																															



Mode	32																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal								Vertical																																																																																																	
Peak Avg	Date: 2024-09-25 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>45.56</td><td>74.00</td><td>-28.44</td><td>53.54</td><td>35.90</td><td>8.72</td><td>52.60 --- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.46</td><td>74.00</td><td>-28.54</td><td>50.70</td><td>36.88</td><td>10.18</td><td>52.30 --- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4874.00	45.56	74.00	-28.44	53.54	35.90	8.72	52.60 --- Peak	2	7311.00	45.46	74.00	-28.54	50.70	36.88	10.18	52.30 --- Peak	Date: 2024-09-25 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>48.25</td><td>74.00</td><td>-25.75</td><td>56.23</td><td>35.90</td><td>8.72</td><td>52.60 --- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>46.81</td><td>74.00</td><td>-27.19</td><td>52.05</td><td>36.88</td><td>10.18</td><td>52.30 --- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4874.00	48.25	74.00	-25.75	56.23	35.90	8.72	52.60 --- Peak	2	7311.00	46.81	74.00	-27.19	52.05	36.88	10.18	52.30 --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4874.00	45.56	74.00	-28.44	53.54	35.90	8.72	52.60 --- Peak																																																																																																		
2	7311.00	45.46	74.00	-28.54	50.70	36.88	10.18	52.30 --- Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																			
1	4874.00	48.25	74.00	-25.75	56.23	35.90	8.72	52.60 --- Peak																																																																																																		
2	7311.00	46.81	74.00	-27.19	52.05	36.88	10.18	52.30 --- Peak																																																																																																		



Mode	33																																																																											
	Band Edge																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal					Fundamental																																																																						
Peak	Level (dBuV/m) Date: 2024-09-25 PEAK_BE_74 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2490.08</td><td>47.27</td><td>74.00</td><td>-26.73</td><td>44.69</td><td>30.70</td><td>5.47</td><td>33.59</td><td>295</td><td>136 PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2490.08	47.27	74.00	-26.73	44.69	30.70	5.47	33.59	295	136 PEAK	Level (dBuV/m) Date: 2024-09-25 PEAK_74 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>103.67</td><td>-----</td><td>-----</td><td>101.10</td><td>30.71</td><td>5.44</td><td>33.58</td><td>295</td><td>136 PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	103.67	-----	-----	101.10	30.71	5.44	33.58	295	136 PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2490.08	47.27	74.00	-26.73	44.69	30.70	5.47	33.59	295	136 PEAK																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2462.00	103.67	-----	-----	101.10	30.71	5.44	33.58	295	136 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-09-25 AVG_BE_54 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.79</td><td>36.83</td><td>54.00</td><td>-17.17</td><td>34.25</td><td>30.70</td><td>5.47</td><td>33.59</td><td>295</td><td>136 AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2488.79	36.83	54.00	-17.17	34.25	30.70	5.47	33.59	295	136 AVERAGE	Level (dBuV/m) Date: 2024-09-25 AVG_54 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>101.15</td><td>-----</td><td>-----</td><td>98.58</td><td>30.71</td><td>5.44</td><td>33.58</td><td>295</td><td>136 AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	101.15	-----	-----	98.58	30.71	5.44	33.58	295	136 AVERAGE
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2488.79	36.83	54.00	-17.17	34.25	30.70	5.47	33.59	295	136 AVERAGE																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2462.00	101.15	-----	-----	98.58	30.71	5.44	33.58	295	136 AVERAGE																																																																		



Mode	33																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-09-25 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.12</td><td>45.75</td><td>74.00</td><td>-28.25</td><td>43.17</td><td>30.70</td><td>5.47</td><td>33.59</td><td>272</td><td>172</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2490.12	45.75	74.00	-28.25	43.17	30.70	5.47	33.59	272	172	PEAK	Level (dBuV/m) Date: 2024-09-25 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>100.03</td><td>-----</td><td>-----</td><td>97.46</td><td>30.71</td><td>5.44</td><td>33.58</td><td>272</td><td>172</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.03	-----	-----	97.46	30.71	5.44	33.58	272	172	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2490.12	45.75	74.00	-28.25	43.17	30.70	5.47	33.59	272	172	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	100.03	-----	-----	97.46	30.71	5.44	33.58	272	172	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-25 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.68</td><td>35.58</td><td>54.00</td><td>-18.42</td><td>33.00</td><td>30.70</td><td>5.47</td><td>33.59</td><td>272</td><td>172</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2488.68	35.58	54.00	-18.42	33.00	30.70	5.47	33.59	272	172	AVERAGE	Level (dBuV/m) Date: 2024-09-25 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.60</td><td>-----</td><td>-----</td><td>95.03</td><td>30.71</td><td>5.44</td><td>33.58</td><td>272</td><td>172</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.60	-----	-----	95.03	30.71	5.44	33.58	272	172	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2488.68	35.58	54.00	-18.42	33.00	30.70	5.47	33.59	272	172	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	97.60	-----	-----	95.03	30.71	5.44	33.58	272	172	AVERAGE																																																																																	



Mode	33																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																							
ANT	1																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-09-25 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>45.19</td><td>74.00</td><td>-28.81</td><td>65.49</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.91</td><td>74.00</td><td>-29.09</td><td>62.74</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	45.19	74.00	-28.81	65.49	36.02	8.57	64.89	---	---	Peak	2	7386.00	44.91	74.00	-29.09	62.74	36.85	10.18	64.86	---	---	Peak	Level (dBuV/m) Date: 2024-09-25 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.85</td><td>74.00</td><td>-30.15</td><td>64.15</td><td>36.02</td><td>8.57</td><td>64.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.54</td><td>74.00</td><td>-30.46</td><td>61.37</td><td>36.85</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	43.85	74.00	-30.15	64.15	36.02	8.57	64.89	---	---	Peak	2	7386.00	43.54	74.00	-30.46	61.37	36.85	10.18	64.86	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	45.19	74.00	-28.81	65.49	36.02	8.57	64.89	---	---	Peak																																																																																																													
2	7386.00	44.91	74.00	-29.09	62.74	36.85	10.18	64.86	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	43.85	74.00	-30.15	64.15	36.02	8.57	64.89	---	---	Peak																																																																																																													
2	7386.00	43.54	74.00	-30.46	61.37	36.85	10.18	64.86	---	---	Peak																																																																																																													







Mode	34																																																																																										
	Harmonic																																																																																										
	2400-2483.5_802.11g_CH01_2412MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Vertical																																																																																				
Peak Avg	Level (dBuV/m) Date: 2024-09-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.97</td><td>74.00</td><td>-29.03</td><td>53.07</td><td>35.78</td><td>8.88</td><td>52.76</td><td>---</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.97	74.00	-29.03	53.07	35.78	8.88	52.76	---	0 Peak	Level (dBuV/m) Date: 2024-09-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>45.18</td><td>74.00</td><td>-28.82</td><td>53.28</td><td>35.78</td><td>8.88</td><td>52.76</td><td>---</td><td>--- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.18	74.00	-28.82	53.28	35.78	8.88	52.76	---	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	4824.00	44.97	74.00	-29.03	53.07	35.78	8.88	52.76	---	0 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	4824.00	45.18	74.00	-28.82	53.28	35.78	8.88	52.76	---	--- Peak																																																																																	



Mode	35																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Date: 2024-09-25						Date: 2024-09-25																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.76</td><td>74.00</td><td>-29.24</td><td>52.74</td><td>35.90</td><td>8.72</td><td>52.60</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.19</td><td>74.00</td><td>-28.81</td><td>50.43</td><td>36.88</td><td>10.18</td><td>52.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	44.76	74.00	-29.24	52.74	35.90	8.72	52.60	---	---	Peak	2	7311.00	45.19	74.00	-28.81	50.43	36.88	10.18	52.30	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>45.22</td><td>74.00</td><td>-28.78</td><td>53.20</td><td>35.90</td><td>8.72</td><td>52.60</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>50.50</td><td>36.88</td><td>10.18</td><td>52.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	45.22	74.00	-28.78	53.20	35.90	8.72	52.60	---	---	Peak	2	7311.00	45.26	74.00	-28.74	50.50	36.88	10.18	52.30	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4874.00	44.76	74.00	-29.24	52.74	35.90	8.72	52.60	---	---	Peak																																																																																																									
2	7311.00	45.19	74.00	-28.81	50.43	36.88	10.18	52.30	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4874.00	45.22	74.00	-28.78	53.20	35.90	8.72	52.60	---	---	Peak																																																																																																									
2	7311.00	45.26	74.00	-28.74	50.50	36.88	10.18	52.30	---	---	Peak																																																																																																									

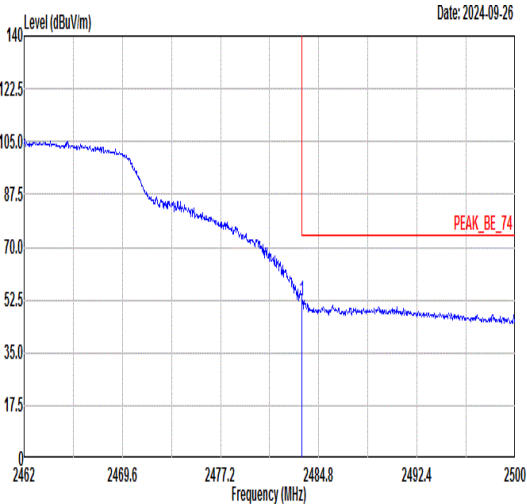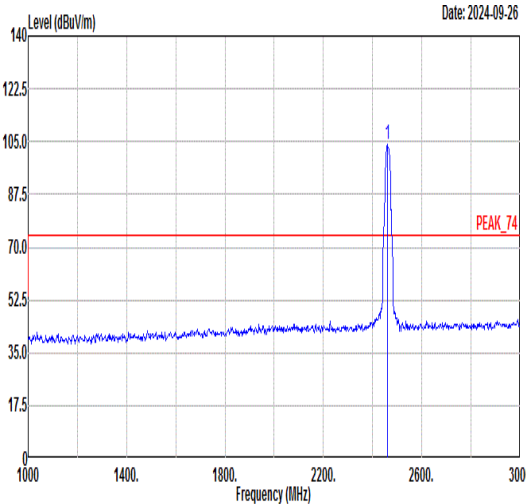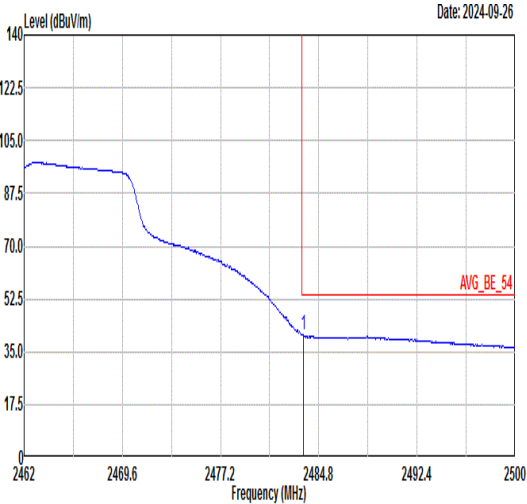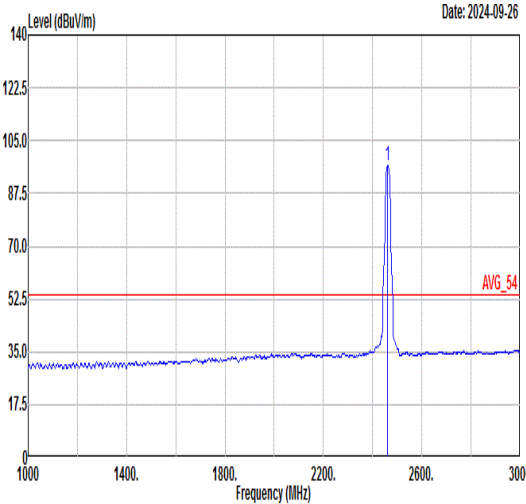

Mode	36																																																																																					
	Band Edge																																																																																					
	2400-2483.5_802.11g_CH11_2462MHz																																																																																					
ANT	1																																																																																					
Pol.	Horizontal					Fundamental																																																																																
Peak	 Level (dBuV/m) Date: 2024-09-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>52.52</td><td>74.00</td><td>-21.48</td><td>49.95</td><td>30.70</td><td>5.46</td><td>33.59</td><td>291 127 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.51	52.52	74.00	-21.48	49.95	30.70	5.46	33.59	291 127 PEAK	 Level (dBuV/m) Date: 2024-09-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.17</td><td>-----</td><td>-----</td><td>101.61</td><td>30.71</td><td>5.43</td><td>33.58</td><td>291 127 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	104.17	-----	-----	101.61	30.71	5.43	33.58	291 127 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2483.51	52.52	74.00	-21.48	49.95	30.70	5.46	33.59	291 127 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2462.00	104.17	-----	-----	101.61	30.71	5.43	33.58	291 127 PEAK																																																																													
Avg	 Level (dBuV/m) Date: 2024-09-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>40.65</td><td>54.00</td><td>-13.35</td><td>38.08</td><td>30.70</td><td>5.46</td><td>33.59</td><td>291 127 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.58	40.65	54.00	-13.35	38.08	30.70	5.46	33.59	291 127 AVERAGE	 Level (dBuV/m) Date: 2024-09-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>96.55</td><td>-----</td><td>-----</td><td>93.98</td><td>30.71</td><td>5.44</td><td>33.58</td><td>291 127 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	96.55	-----	-----	93.98	30.71	5.44	33.58	291 127 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2483.58	40.65	54.00	-13.35	38.08	30.70	5.46	33.59	291 127 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2462.00	96.55	-----	-----	93.98	30.71	5.44	33.58	291 127 AVERAGE																																																																													







Mode	36									
	Band Edge									
	2400-2483.5_802.11g_CH11_2462MHz									
ANT	1									
Pol.	Vertical					Fundamental				
Peak	Level (dBuV/m) Date: 2024-09-25 </									







Mode	36																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																							
ANT	1																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-09-25 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>44.20</td><td>74.00</td><td>-29.80</td><td>52.05</td><td>36.02</td><td>8.57</td><td>52.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.00</td><td>74.00</td><td>-29.00</td><td>50.27</td><td>36.85</td><td>10.18</td><td>52.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	44.20	74.00	-29.80	52.05	36.02	8.57	52.44	---	---	Peak	2	7386.00	45.00	74.00	-29.00	50.27	36.85	10.18	52.30	---	---	Peak	Level (dBuV/m) Date: 2024-09-25 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>44.58</td><td>74.00</td><td>-29.42</td><td>52.43</td><td>36.02</td><td>8.57</td><td>52.44</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.68</td><td>74.00</td><td>-27.32</td><td>51.95</td><td>36.85</td><td>10.18</td><td>52.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	44.58	74.00	-29.42	52.43	36.02	8.57	52.44	---	---	Peak	2	7386.00	46.68	74.00	-27.32	51.95	36.85	10.18	52.30	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	44.20	74.00	-29.80	52.05	36.02	8.57	52.44	---	---	Peak																																																																																																													
2	7386.00	45.00	74.00	-29.00	50.27	36.85	10.18	52.30	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	44.58	74.00	-29.42	52.43	36.02	8.57	52.44	---	---	Peak																																																																																																													
2	7386.00	46.68	74.00	-27.32	51.95	36.85	10.18	52.30	---	---	Peak																																																																																																													

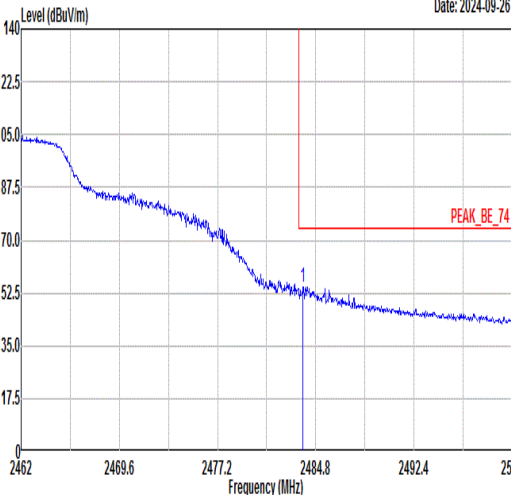
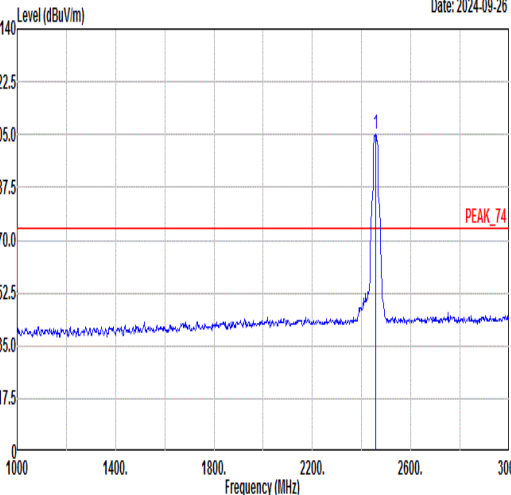
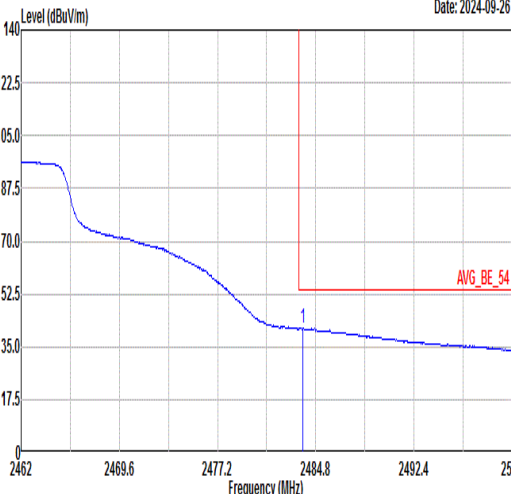
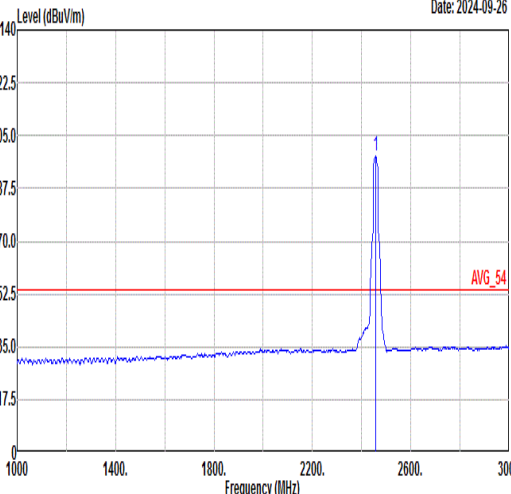


Mode	37																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11g_CH10_2457MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	 Level (dBuV/m) Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.81</td><td>54.48</td><td>74.00</td><td>-19.52</td><td>51.91</td><td>30.70</td><td>5.46</td><td>33.59</td><td>103</td><td>133</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.81	54.48	74.00	-19.52	51.91	30.70	5.46	33.59	103	133	PEAK	 Level (dBuV/m) Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>105.21</td><td>-----</td><td>-----</td><td>102.64</td><td>30.71</td><td>5.43</td><td>33.57</td><td>103</td><td>133</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	105.21	-----	-----	102.64	30.71	5.43	33.57	103	133	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.81	54.48	74.00	-19.52	51.91	30.70	5.46	33.59	103	133	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2457.00	105.21	-----	-----	102.64	30.71	5.43	33.57	103	133	PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.77</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>38.72</td><td>30.70</td><td>5.46</td><td>33.59</td><td>103</td><td>133</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.77	41.29	54.00	-12.71	38.72	30.70	5.46	33.59	103	133	AVERAGE	 Level (dBuV/m) Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>98.18</td><td>-----</td><td>-----</td><td>95.61</td><td>30.71</td><td>5.43</td><td>33.57</td><td>103</td><td>133</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	98.18	-----	-----	95.61	30.71	5.43	33.57	103	133	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.77	41.29	54.00	-12.71	38.72	30.70	5.46	33.59	103	133	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2457.00	98.18	-----	-----	95.61	30.71	5.43	33.57	103	133	AVERAGE																																																																																	

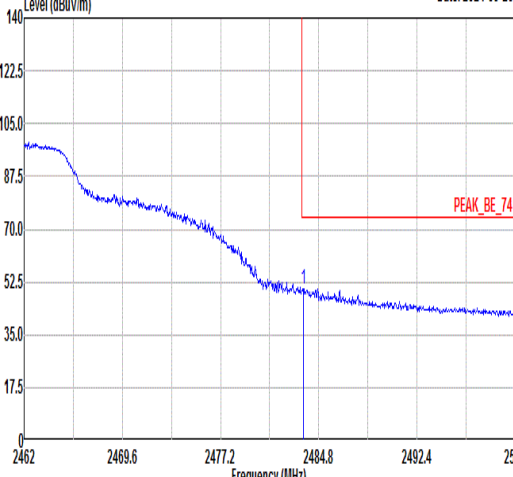
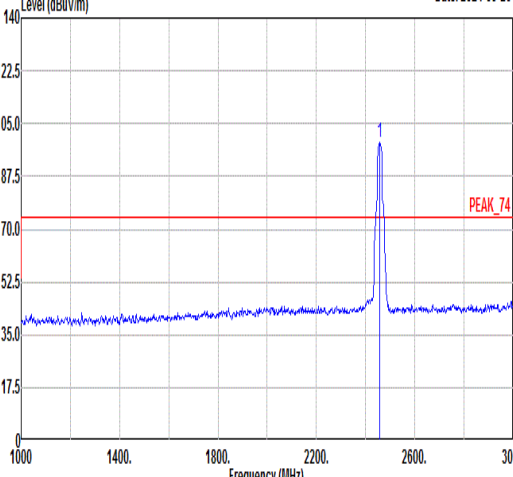
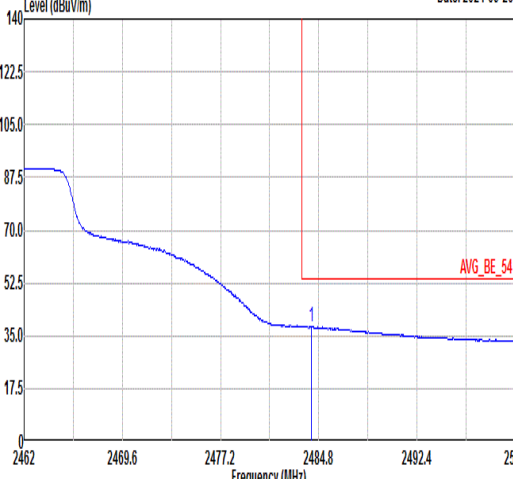
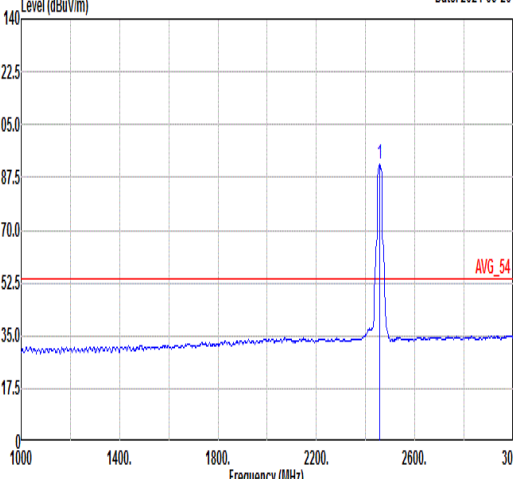


Mode	37																																																																																				
	Band Edge																																																																																				
	2400-2483.5_802.11g_CH10_2457MHz																																																																																				
ANT	1																																																																																				
Pol.	Vertical					Fundamental																																																																															
Peak	Level (dBuV/m) Date: 2024-09-26  PEAK_BE_74					Level (dBuV/m) Date: 2024-09-26  PEAK_74																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.62</td><td>50.43</td><td>74.00</td><td>-23.57</td><td>47.86</td><td>30.70</td><td>5.46</td><td>33.59</td><td>199 193 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.62	50.43	74.00	-23.57	47.86	30.70	5.46	33.59	199 193 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>98.60</td><td>-----</td><td>-----</td><td>96.03</td><td>30.71</td><td>5.43</td><td>33.57</td><td>199 193 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	98.60	-----	-----	96.03	30.71	5.43	33.57
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	2483.62	50.43	74.00	-23.57	47.86	30.70	5.46	33.59	199 193 PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	2457.00	98.60	-----	-----	96.03	30.71	5.43	33.57	199 193 PEAK																																																																												
Avg	Level (dBuV/m) Date: 2024-09-26  AVG_BE_54					Level (dBuV/m) Date: 2024-09-26  AVG_54																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.23</td><td>38.18</td><td>54.00</td><td>-15.82</td><td>35.61</td><td>30.70</td><td>5.46</td><td>33.59</td><td>199 193 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.23	38.18	54.00	-15.82	35.61	30.70	5.46	33.59	199 193 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>91.88</td><td>-----</td><td>-----</td><td>89.31</td><td>30.71</td><td>5.43</td><td>33.57</td><td>199 193 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	91.88	-----	-----	89.31	30.71	5.43	33.57
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	2484.23	38.18	54.00	-15.82	35.61	30.70	5.46	33.59	199 193 AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	2457.00	91.88	-----	-----	89.31	30.71	5.43	33.57	199 193 AVERAGE																																																																												

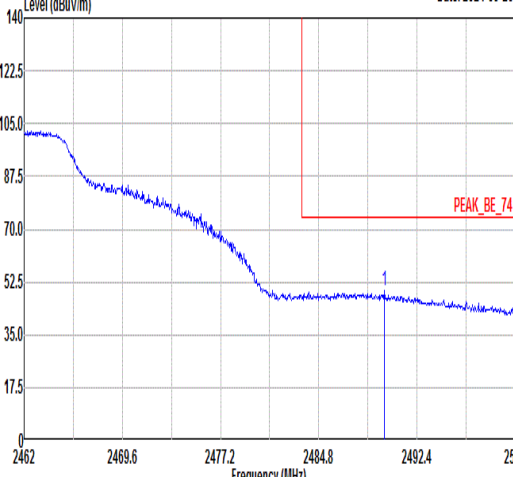
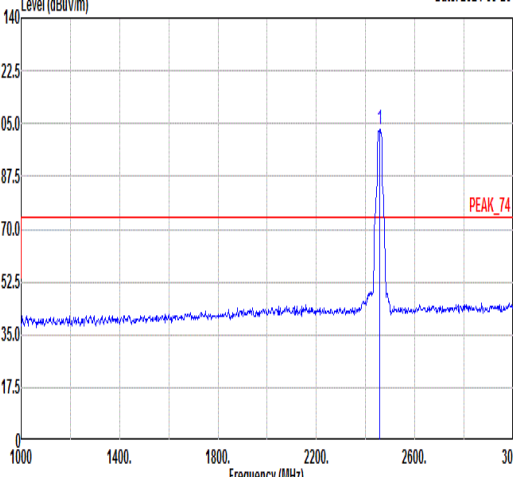
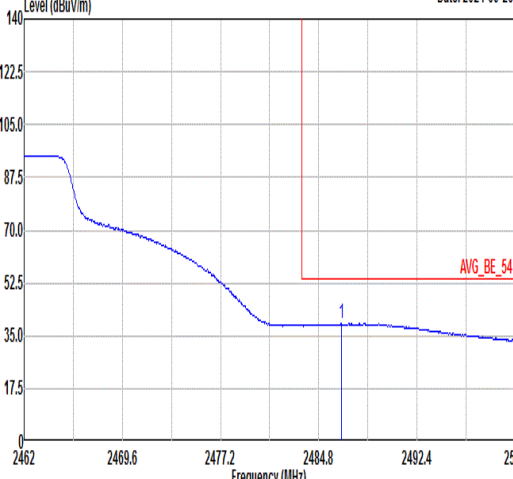
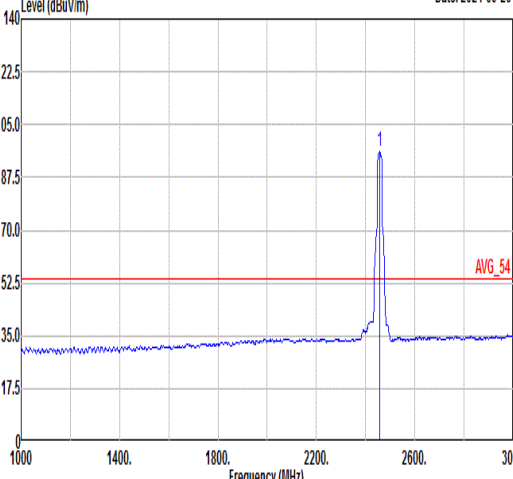


Mode	38																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11g_CH10_2457MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-09-26  PEAK_BE_74 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2489.89</td><td>49.63</td><td>74.00</td><td>-24.37</td><td>47.05</td><td>30.70</td><td>5.47</td><td>33.59</td><td>348</td><td>136</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2489.89	49.63	74.00	-24.37	47.05	30.70	5.47	33.59	348	136	PEAK	Level (dBuV/m) Date: 2024-09-26  PEAK_74 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>102.93</td><td>-----</td><td>-----</td><td>100.36</td><td>30.71</td><td>5.43</td><td>33.57</td><td>348</td><td>136</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	102.93	-----	-----	100.36	30.71	5.43	33.57	348	136	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2489.89	49.63	74.00	-24.37	47.05	30.70	5.47	33.59	348	136	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2457.00	102.93	-----	-----	100.36	30.71	5.43	33.57	348	136	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-09-26  AVG_BE_54 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.55</td><td>38.97</td><td>54.00</td><td>-15.03</td><td>36.40</td><td>30.70</td><td>5.46</td><td>33.59</td><td>348</td><td>136</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2486.55	38.97	54.00	-15.03	36.40	30.70	5.46	33.59	348	136	AVERAGE	Level (dBuV/m) Date: 2024-09-26  AVG_54 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>96.02</td><td>-----</td><td>-----</td><td>93.45</td><td>30.71</td><td>5.43</td><td>33.57</td><td>348</td><td>136</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	96.02	-----	-----	93.45	30.71	5.43	33.57	348	136	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2486.55	38.97	54.00	-15.03	36.40	30.70	5.46	33.59	348	136	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2457.00	96.02	-----	-----	93.45	30.71	5.43	33.57	348	136	AVERAGE																																																																																	

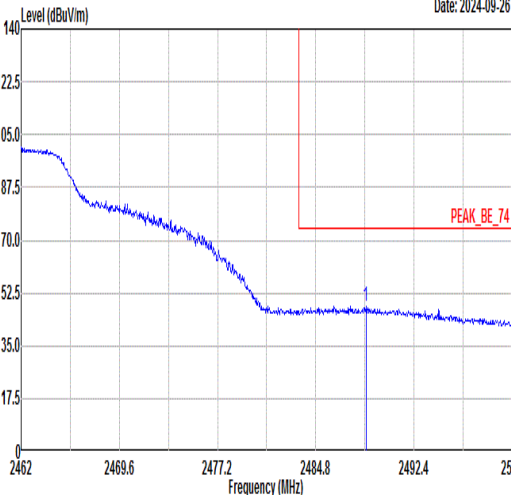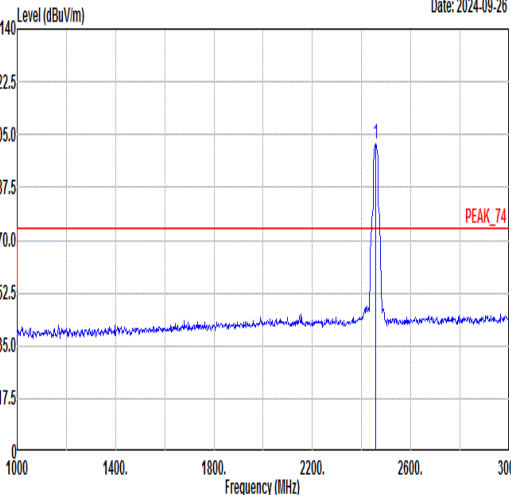
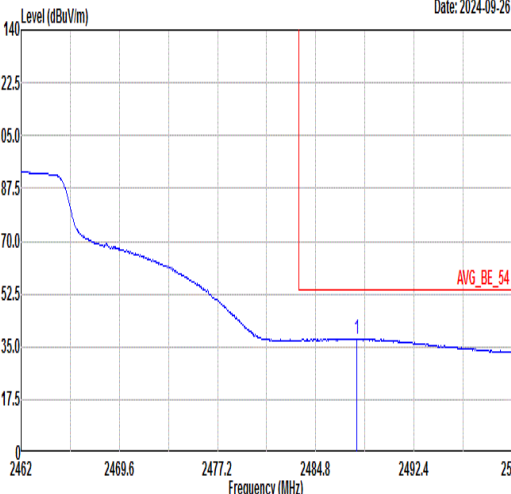
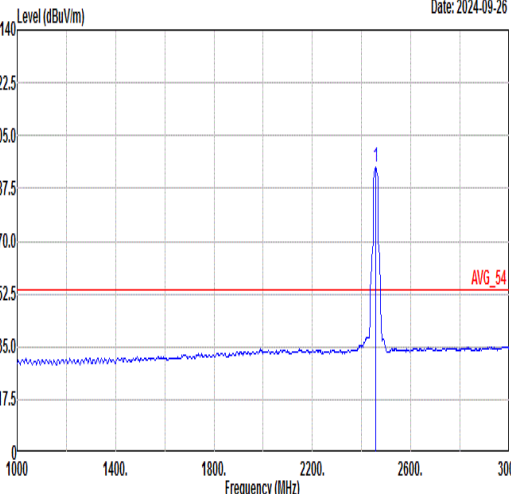


Mode	38																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11g_CH10_2457MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2488.68</td><td>47.98</td><td>74.00</td><td>-26.02</td><td>45.40</td><td>30.70</td><td>5.47</td><td>33.59</td><td>200</td><td>158</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2488.68	47.98	74.00	-26.02	45.40	30.70	5.47	33.59	200	158	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>101.74</td><td>-----</td><td>-----</td><td>99.17</td><td>30.71</td><td>5.43</td><td>33.57</td><td>200</td><td>158</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	101.74	-----	-----	99.17	30.71	5.43	33.57	200	158
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2488.68	47.98	74.00	-26.02	45.40	30.70	5.47	33.59	200	158	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2457.00	101.74	-----	-----	99.17	30.71	5.43	33.57	200	158	PEAK																																																																																
Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2487.95</td><td>37.76</td><td>54.00</td><td>-16.24</td><td>35.19</td><td>30.70</td><td>5.46</td><td>33.59</td><td>200</td><td>158</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2487.95	37.76	54.00	-16.24	35.19	30.70	5.46	33.59	200	158	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>94.59</td><td>-----</td><td>-----</td><td>92.02</td><td>30.71</td><td>5.43</td><td>33.57</td><td>200</td><td>158</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	94.59	-----	-----	92.02	30.71	5.43	33.57	200	158
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2487.95	37.76	54.00	-16.24	35.19	30.70	5.46	33.59	200	158	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2457.00	94.59	-----	-----	92.02	30.71	5.43	33.57	200	158	AVERAGE																																																																																

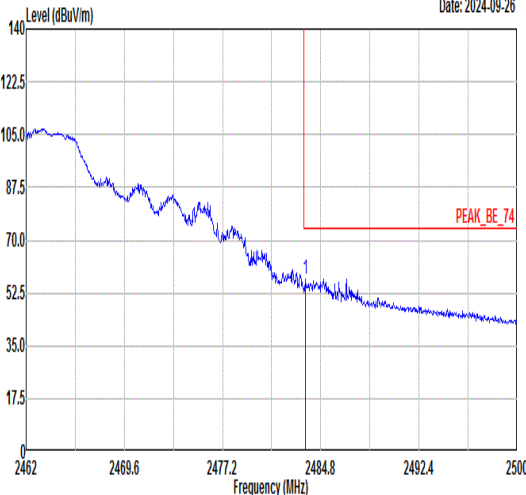
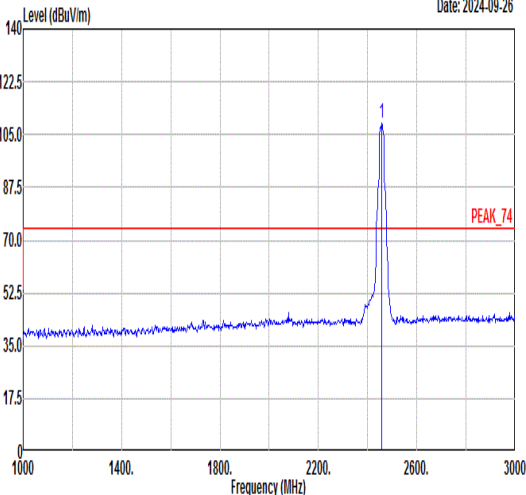
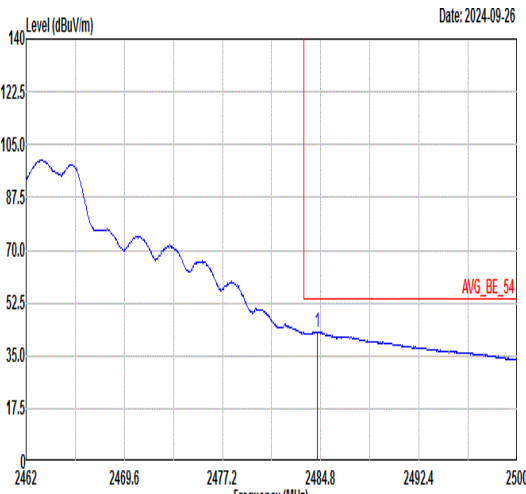
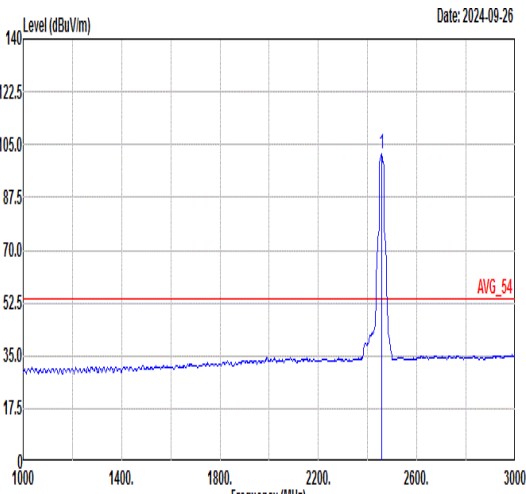


Mode	39																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11ac VHT20_CH10_2457MHz																																																																																										
ANT	CDD 0+1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>56.96</td><td>74.00</td><td>-17.04</td><td>54.39</td><td>30.70</td><td>5.46</td><td>33.59</td><td>105</td><td>128</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.62	56.96	74.00	-17.04	54.39	30.70	5.46	33.59	105	128	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>108.61</td><td>-----</td><td>-----</td><td>106.04</td><td>30.71</td><td>5.43</td><td>33.57</td><td>105</td><td>128</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	108.61	-----	-----	106.04	30.71	5.43	33.57	105	128
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2483.62	56.96	74.00	-17.04	54.39	30.70	5.46	33.59	105	128	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2457.00	108.61	-----	-----	106.04	30.71	5.43	33.57	105	128	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.53</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>40.36</td><td>30.70</td><td>5.46</td><td>33.59</td><td>105</td><td>128</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.53	42.93	54.00	-11.07	40.36	30.70	5.46	33.59	105	128	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>101.83</td><td>-----</td><td>-----</td><td>99.26</td><td>30.71</td><td>5.43</td><td>33.57</td><td>105</td><td>128</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	101.83	-----	-----	99.26	30.71	5.43	33.57	105	128
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2484.53	42.93	54.00	-11.07	40.36	30.70	5.46	33.59	105	128	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2457.00	101.83	-----	-----	99.26	30.71	5.43	33.57	105	128	AVERAGE																																																																																


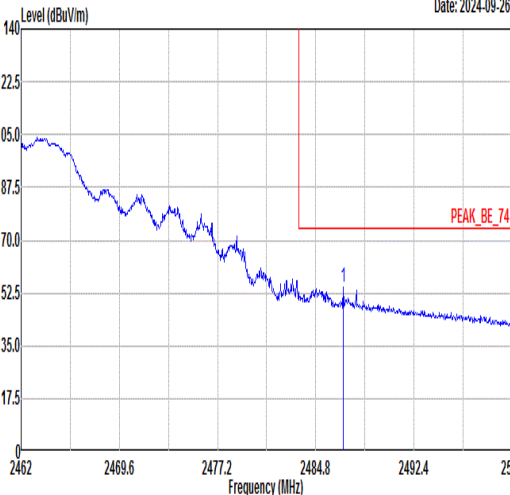
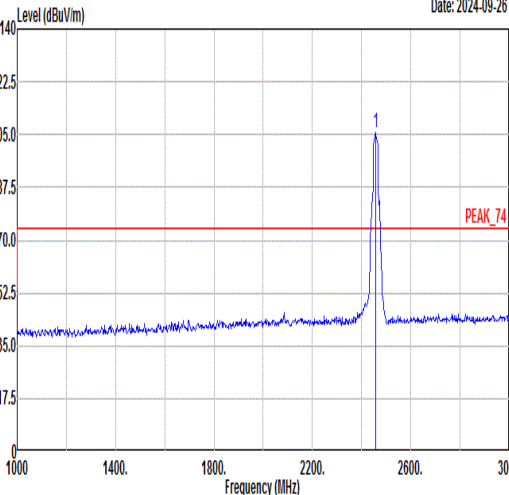
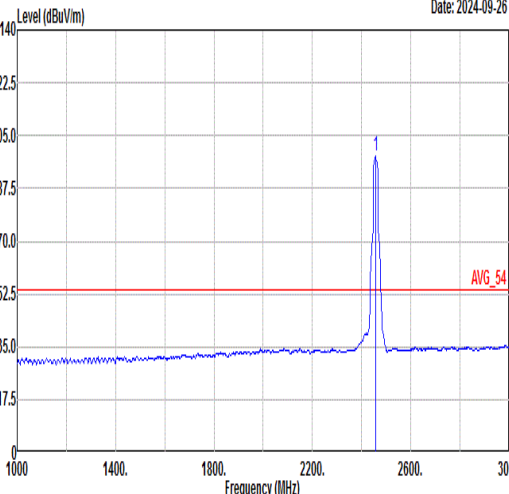


Mode	39																																																																																					
	Band Edge																																																																																					
	2400-2483.5_802.11ac VHT20_CH10_2457MHz																																																																																					
ANT	CDD 0+1																																																																																					
Pol.	Vertical					Fundamental																																																																																
Peak	 Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.93</td><td>54.23</td><td>74.00</td><td>-19.77</td><td>51.66</td><td>30.70</td><td>5.46</td><td>33.59</td><td>198 177 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2486.93	54.23	74.00	-19.77	51.66	30.70	5.46	33.59	198 177 PEAK	 Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>105.79</td><td>-----</td><td>-----</td><td>103.22</td><td>30.71</td><td>5.43</td><td>33.57</td><td>198 177 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	105.79	-----	-----	103.22	30.71	5.43	33.57	198 177 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2486.93	54.23	74.00	-19.77	51.66	30.70	5.46	33.59	198 177 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2457.00	105.79	-----	-----	103.22	30.71	5.43	33.57	198 177 PEAK																																																																													
Avg	 Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.03</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>38.11</td><td>30.70</td><td>5.46</td><td>33.59</td><td>198 177 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2485.03	40.68	54.00	-13.32	38.11	30.70	5.46	33.59	198 177 AVERAGE	 Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>98.08</td><td>-----</td><td>-----</td><td>95.51</td><td>30.71</td><td>5.43</td><td>33.57</td><td>198 177 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	98.08	-----	-----	95.51	30.71	5.43	33.57	198 177 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2485.03	40.68	54.00	-13.32	38.11	30.70	5.46	33.59	198 177 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2457.00	98.08	-----	-----	95.51	30.71	5.43	33.57	198 177 AVERAGE																																																																													

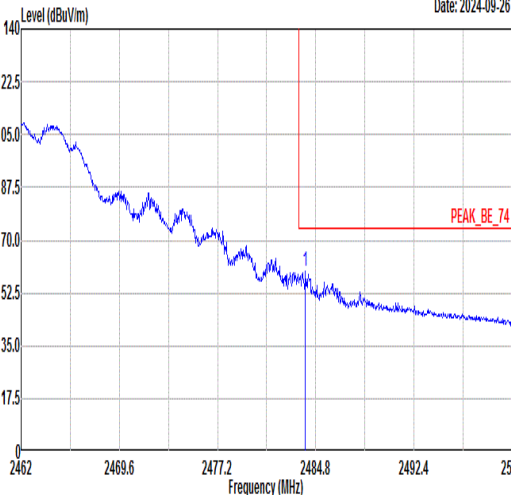
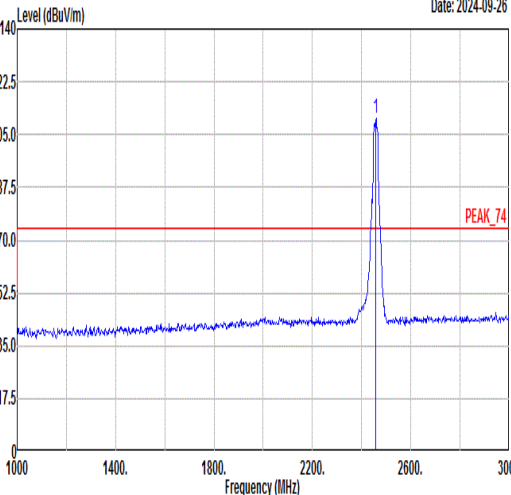
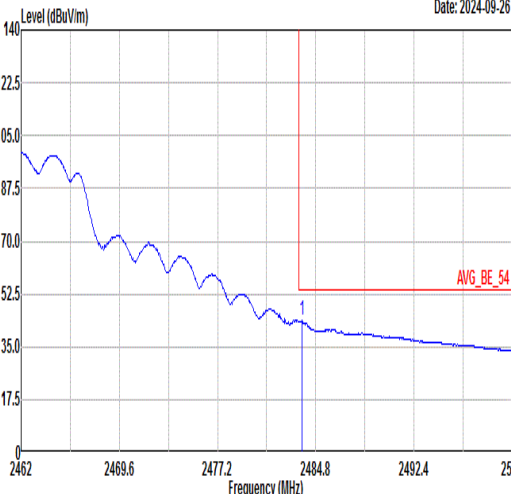
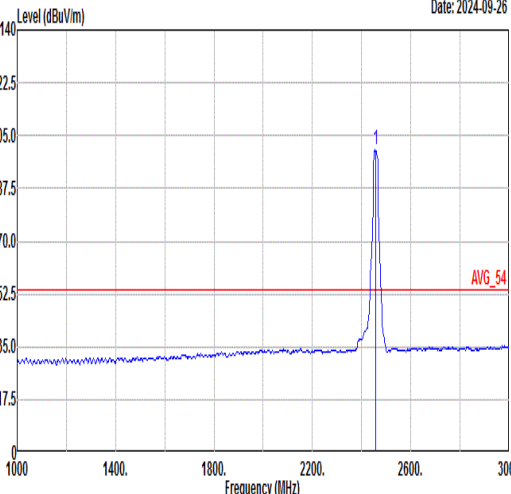


Mode	40																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11ax HE20_CH10_2457MHz																																																																																											
ANT	CDD 0+1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	 Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.00</td><td>59.58</td><td>74.00</td><td>-14.42</td><td>57.01</td><td>30.70</td><td>5.46</td><td>33.59</td><td>200</td><td>141</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.00	59.58	74.00	-14.42	57.01	30.70	5.46	33.59	200	141	PEAK	 Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>110.19</td><td>-----</td><td>-----</td><td>107.63</td><td>30.71</td><td>5.43</td><td>33.58</td><td>200</td><td>141</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	110.19	-----	-----	107.63	30.71	5.43	33.58	200	141	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2484.00	59.58	74.00	-14.42	57.01	30.70	5.46	33.59	200	141	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2457.00	110.19	-----	-----	107.63	30.71	5.43	33.58	200	141	PEAK																																																																																	
Avg	 Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.74</td><td>43.66</td><td>54.00</td><td>-10.34</td><td>41.09</td><td>30.70</td><td>5.46</td><td>33.59</td><td>200</td><td>141</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.74	43.66	54.00	-10.34	41.09	30.70	5.46	33.59	200	141	AVERAGE	 Date: 2024-09-26 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>100.16</td><td>-----</td><td>-----</td><td>97.59</td><td>30.71</td><td>5.43</td><td>33.57</td><td>200</td><td>141</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	100.16	-----	-----	97.59	30.71	5.43	33.57	200	141	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.74	43.66	54.00	-10.34	41.09	30.70	5.46	33.59	200	141	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2457.00	100.16	-----	-----	97.59	30.71	5.43	33.57	200	141	AVERAGE																																																																																	

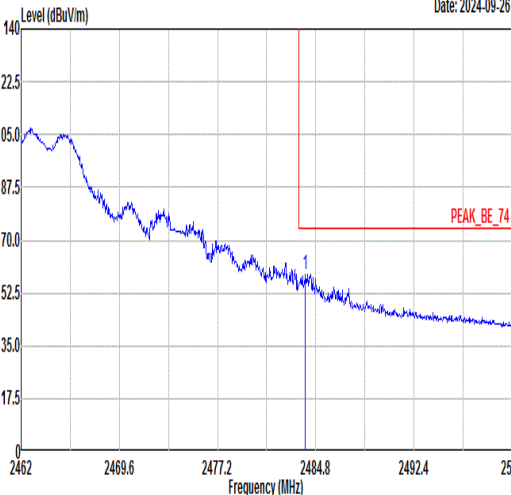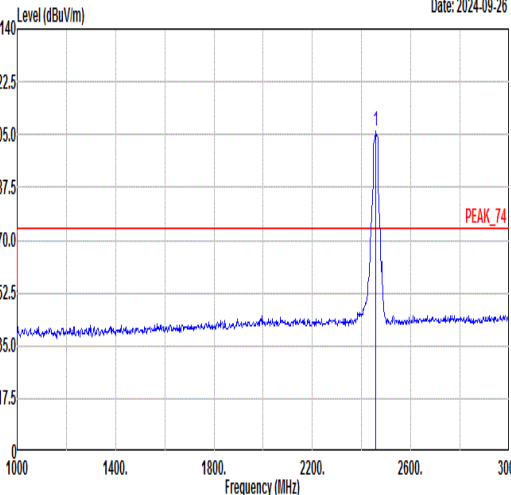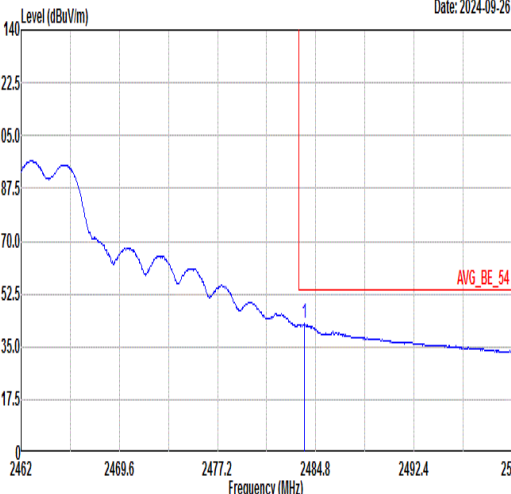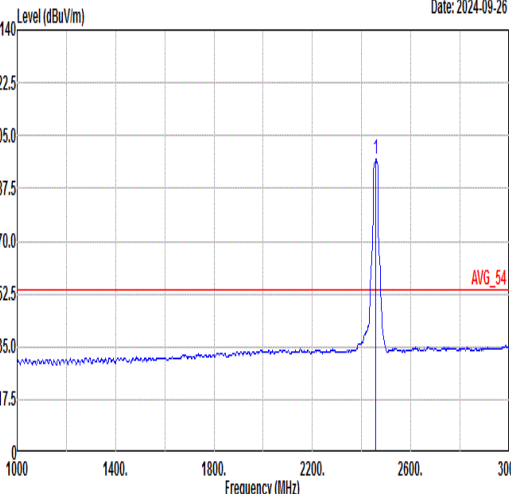

Mode	40																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11ax HE20_CH10_2457MHz																																																																																											
ANT	CDD 0+1																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	 PEAK_BE_74 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.00</td><td>58.84</td><td>74.00</td><td>-15.16</td><td>56.27</td><td>30.70</td><td>5.46</td><td>33.59</td><td>143</td><td>176</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.00	58.84	74.00	-15.16	56.27	30.70	5.46	33.59	143	176	PEAK	 PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>106.21</td><td>-----</td><td>-----</td><td>103.64</td><td>30.71</td><td>5.43</td><td>33.57</td><td>143</td><td>176</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	106.21	-----	-----	103.64	30.71	5.43	33.57	143	176	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2484.00	58.84	74.00	-15.16	56.27	30.70	5.46	33.59	143	176	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2457.00	106.21	-----	-----	103.64	30.71	5.43	33.57	143	176	PEAK																																																																																	
Avg	 AVG_BE_54 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.93</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>40.10</td><td>30.70</td><td>5.46</td><td>33.59</td><td>143</td><td>176</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.93	42.67	54.00	-11.33	40.10	30.70	5.46	33.59	143	176	AVERAGE	 AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>97.43</td><td>-----</td><td>-----</td><td>94.86</td><td>30.71</td><td>5.43</td><td>33.57</td><td>143</td><td>176</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2457.00	97.43	-----	-----	94.86	30.71	5.43	33.57	143	176	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.93	42.67	54.00	-11.33	40.10	30.70	5.46	33.59	143	176	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2457.00	97.43	-----	-----	94.86	30.71	5.43	33.57	143	176	AVERAGE																																																																																	

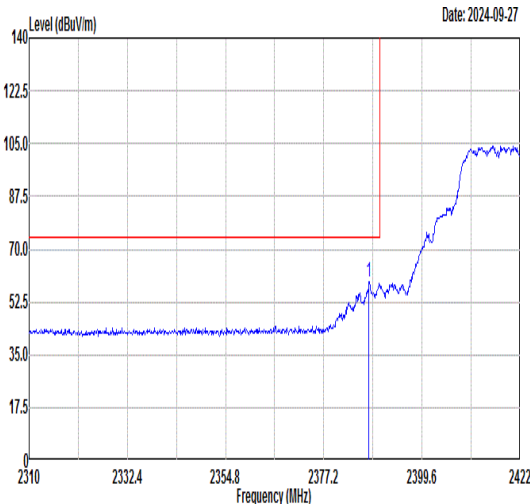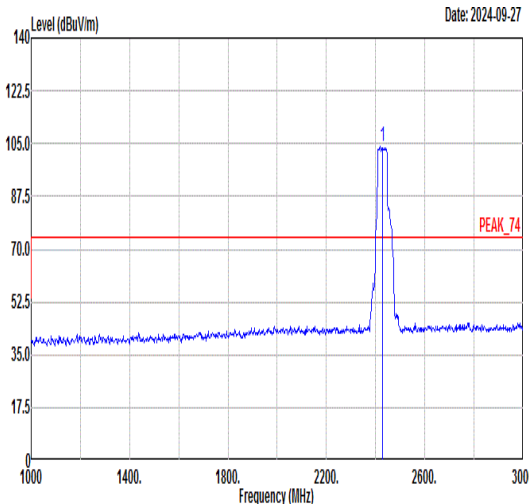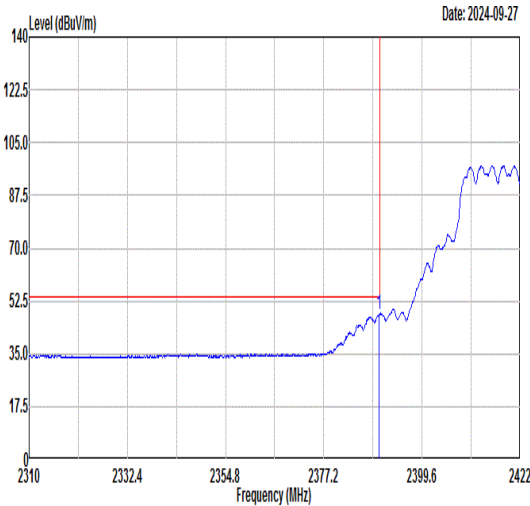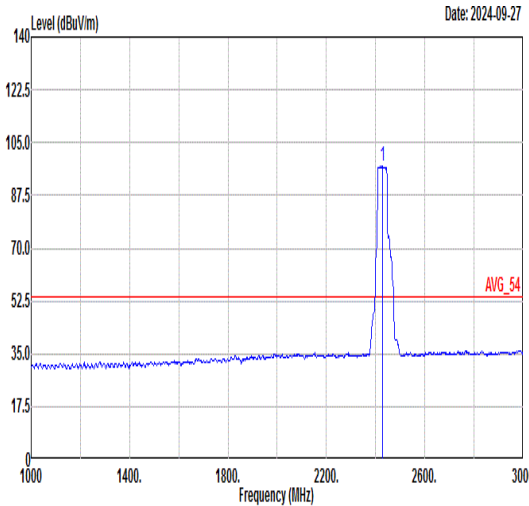

		41																																																																																								
Mode		Band Edge - L																																																																																								
		2400-2483.5_802.11ac VHT40_CH04_2427MHz																																																																																								
ANT		CDD 0+1																																																																																								
Pol.		Horizontal					Fundamental																																																																																			
Peak	 Level (dBuV/m) Date: 2024-09-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.50</td><td>58.94</td><td>74.00</td><td>-15.06</td><td>56.39</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>130</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2387.50	58.94	74.00	-15.06	56.39	30.72	5.36	33.53	100	130	PEAK	 Level (dBuV/m) Date: 2024-09-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2427.00</td><td>104.11</td><td>-----</td><td>-----</td><td>101.55</td><td>30.72</td><td>5.39</td><td>33.55</td><td>100</td><td>130</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2427.00	104.11	-----	-----	101.55	30.72	5.39	33.55	100	130	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2387.50	58.94	74.00	-15.06	56.39	30.72	5.36	33.53	100	130	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2427.00	104.11	-----	-----	101.55	30.72	5.39	33.55	100	130	PEAK																																																																															
Avg	 Level (dBuV/m) Date: 2024-09-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.74</td><td>48.26</td><td>54.00</td><td>-5.74</td><td>45.71</td><td>30.72</td><td>5.36</td><td>33.53</td><td>100</td><td>130</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.74	48.26	54.00	-5.74	45.71	30.72	5.36	33.53	100	130	AVERAGE	 Level (dBuV/m) Date: 2024-09-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2427.00</td><td>97.29</td><td>-----</td><td>-----</td><td>94.74</td><td>30.71</td><td>5.40</td><td>33.56</td><td>100</td><td>130</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2427.00	97.29	-----	-----	94.74	30.71	5.40	33.56	100	130	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2389.74	48.26	54.00	-5.74	45.71	30.72	5.36	33.53	100	130	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2427.00	97.29	-----	-----	94.74	30.71	5.40	33.56	100	130	AVERAGE																																																																															