



Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	26dB bandwidth (MHz)	Limit MHz	Result
			ANT B	ANT B		
802.11a	CH36	5180	16.636	20.69	N/A	Pass
	CH40	5200	16.626	20.71	N/A	Pass
	CH48	5240	16.665	20.67	N/A	Pass
802.11 n20	CH36	5180	17.651	21.02	N/A	Pass
	CH40	5200	17.665	21.25	N/A	Pass
	CH48	5240	17.650	20.95	N/A	Pass
802.11 n40	CH 38	5190	36.956	45.01	N/A	Pass
	CH 46	5230	36.882	52.24	N/A	Pass
802.11 ac20	CH36	5180	17.651	21.04	N/A	Pass
	CH40	5200	17.677	21.07	N/A	Pass
	CH48	5240	17.652	20.85	N/A	Pass
802.11 ac40	CH 38	5190	37.017	44.79	N/A	Pass
	CH 46	5230	36.914	46.70	N/A	Pass
802.11 AC80	CH 42	5210	75.409	83.32	N/A	Pass

### Test plot


(802.11a) 26dB&99%Bandwidth plot on channel 36

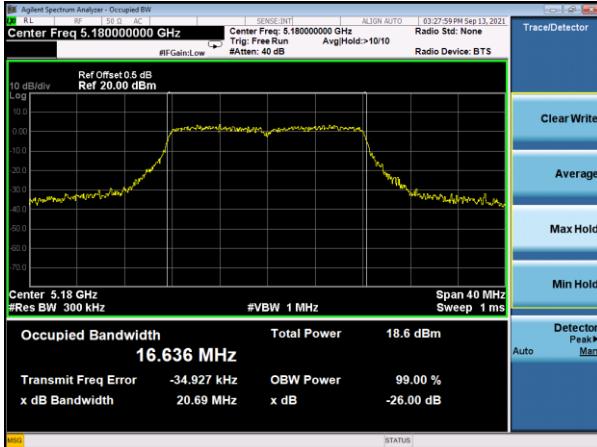


(802.11 n20) 26dB&99%Bandwidth plot on channel 36

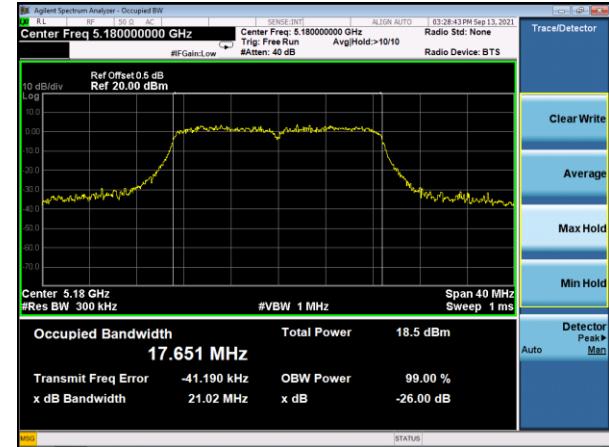


(802.11a) 26dB&99%Bandwidth plot on channel 40

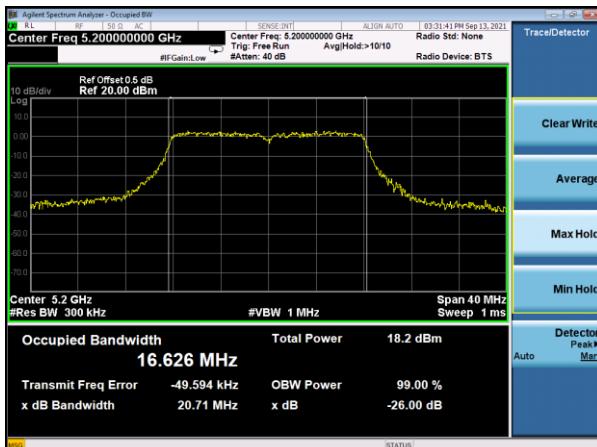


(802.11 n20) 26dB&99%Bandwidth plot on channel 40

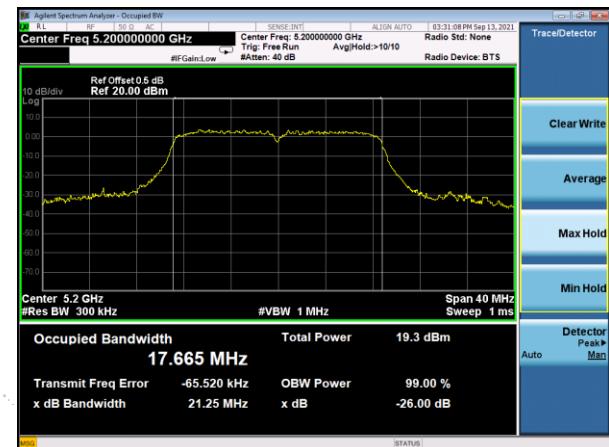

(802.11a) 26dB&99%Bandwidth plot on channel 48

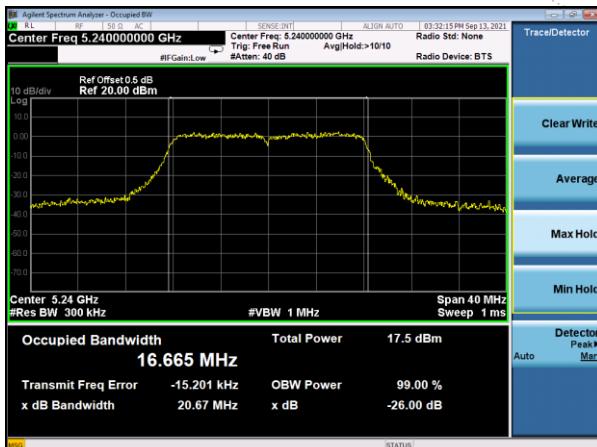

(802.11 n20) 26dB&99%Bandwidth plot on channel 48

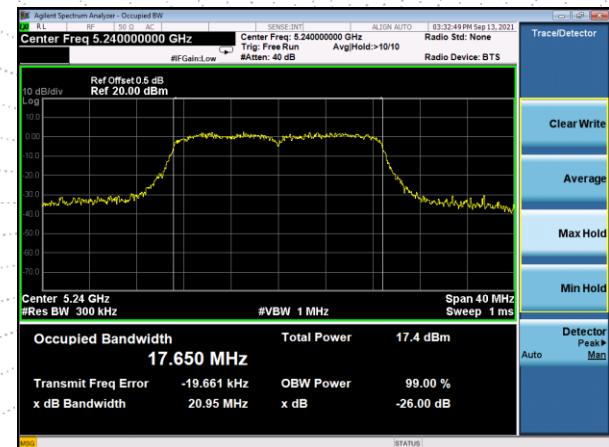


### Test plot


(802.11 n40) 26dB&99%Bandwidth plot on channel 38




(802.11 AC20) 26dB&99%Bandwidth plot on channel 36

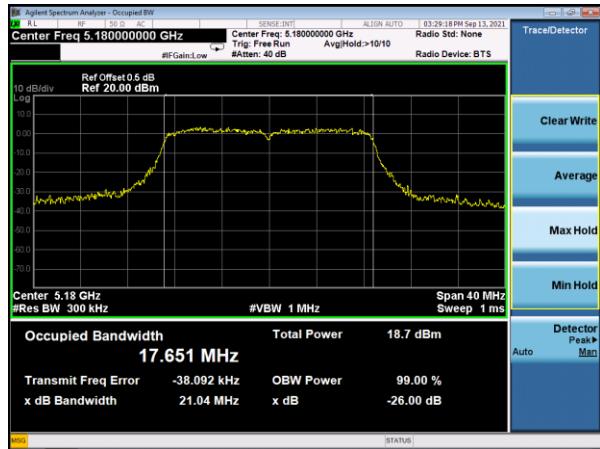


(802.11 n40) 26dB&99%Bandwidth plot on channel 46

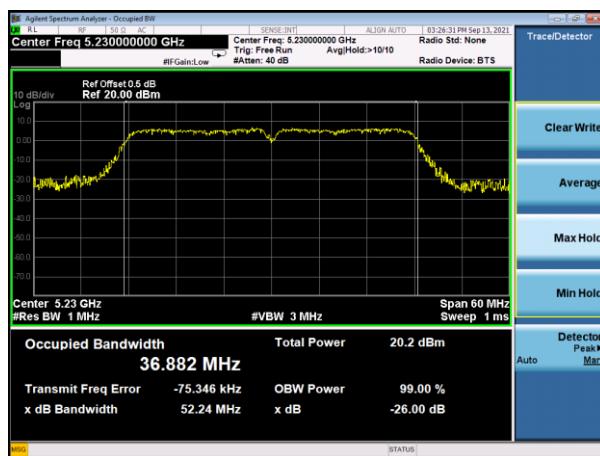

(802.11 AC20) 26dB&99%Bandwidth plot on channel 40

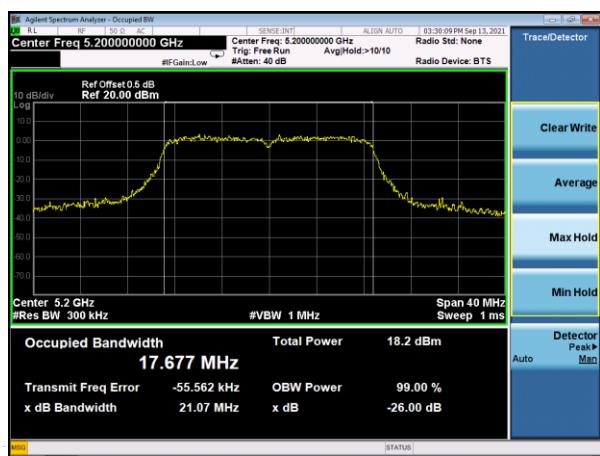


(802.11 AC20) 26dB&99%Bandwidth plot on channel 40

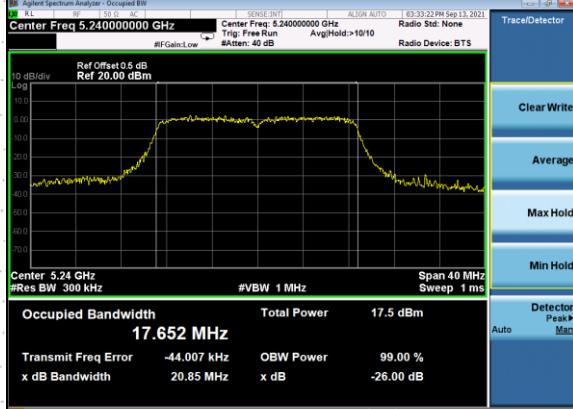


### Test plot

(802.11 AC40) 26dB&99%Bandwidth plot on channel 38    (802.11 AC80) 26dB&99%Bandwidth plot on channel 42

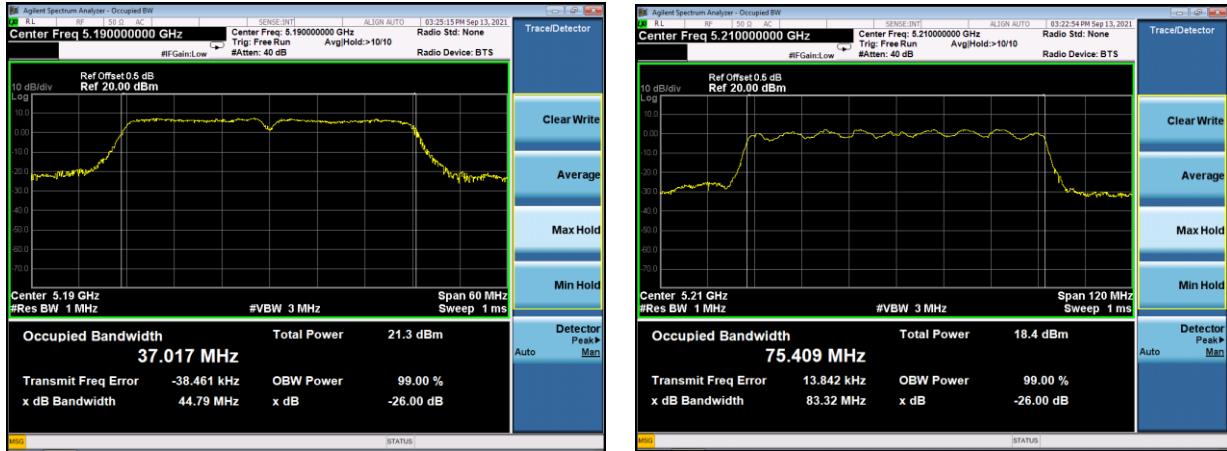

(802.11 AC40) 26dB&99%Bandwidth plot on channel 46

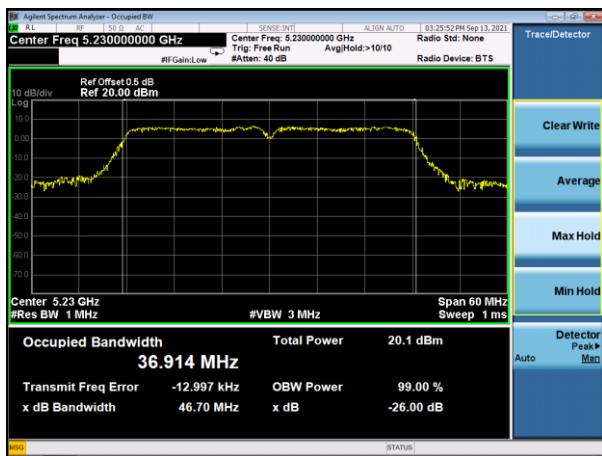

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	TX Frequency U-NII-3(5745-5825MHz)		


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.

Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Limit MHz	Result
			ANT A	ANT A		
802.11a	CH149	5745	16.639	16.34	≥500	Pass
	CH157	5785	16.643	16.30	≥500	Pass
	CH165	5825	16.607	16.32	≥500	Pass
802.11 n20	CH149	5745	17.649	16.79	≥500	Pass
	CH157	5785	17.641	16.84	≥500	Pass
	CH165	5825	17.627	16.83	≥500	Pass
802.11 n40	CH151	5755	36.041	35.76	≥500	Pass
	CH159	5795	37.128	35.62	≥500	Pass
802.11 ac20	CH149	5745	17.639	17.08	≥500	Pass
	CH157	5785	17.627	16.78	≥500	Pass
	CH165	5825	17.622	16.96	≥500	Pass
802.11 ac40	CH151	5755	37.078	35.57	≥500	Pass
	CH159	5795	37.128	35.63	≥500	Pass
802.11 AC80	CH155	5775	75.307	73.95	≥500	Pass


Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Limit MHz	Result
			ANT B	ANT B		
802.11a	CH149	5745	16.616	16.37	≥500	Pass
	CH157	5785	16.608	16.32	≥500	Pass
	CH165	5825	16.645	16.32	≥500	Pass
802.11 n20	CH149	5745	17.647	16.54	≥500	Pass
	CH157	5785	17.631	16.79	≥500	Pass
	CH165	5825	17.656	17.06	≥500	Pass
802.11 n40	CH151	5755	36.717	35.69	≥500	Pass
	CH159	5795	36.815	36.62	≥500	Pass
802.11 ac20	CH149	5745	17.624	16.83	≥500	Pass
	CH157	5785	17.636	16.78	≥500	Pass
	CH165	5825	17.681	16.60	≥500	Pass
802.11 ac40	CH151	5755	36.813	35.35	≥500	Pass
	CH159	5795	36.814	35.86	≥500	Pass
802.11 AC80	CH155	5775	75.187	75.23	≥500	Pass

Antenna A: 5725-5850MHz


## 802.11a 5745MHz 99% bandwidth

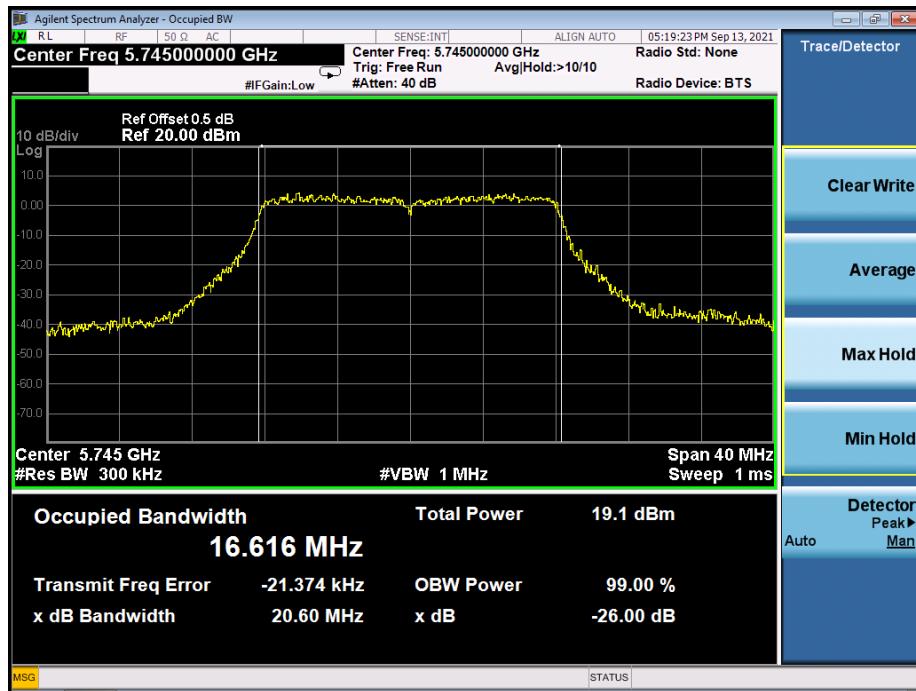


## 802.11a 5785MHz 99% bandwidth

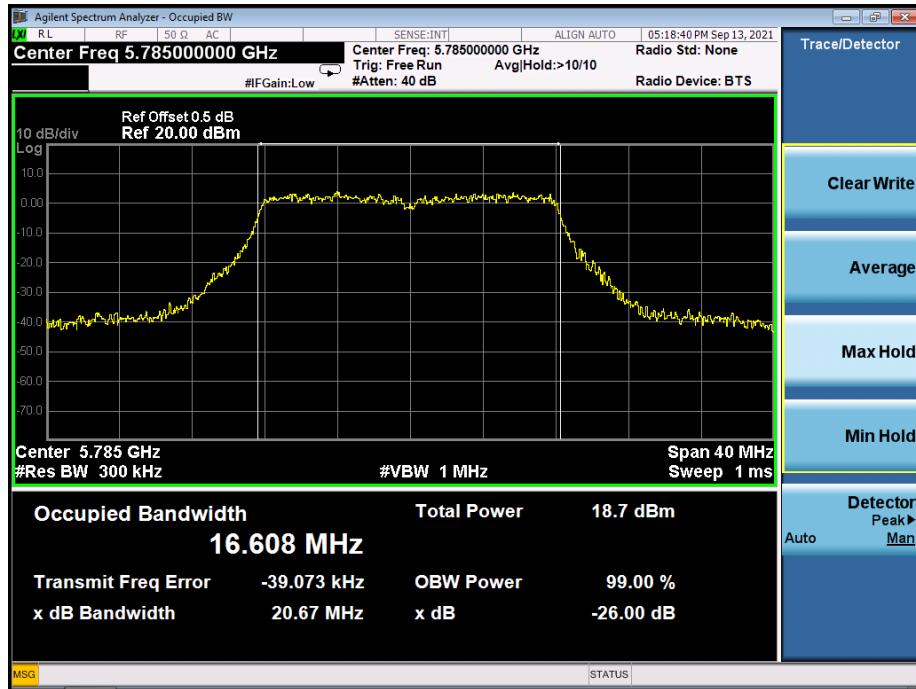


## 802.11a 5825MHz 99% bandwidth

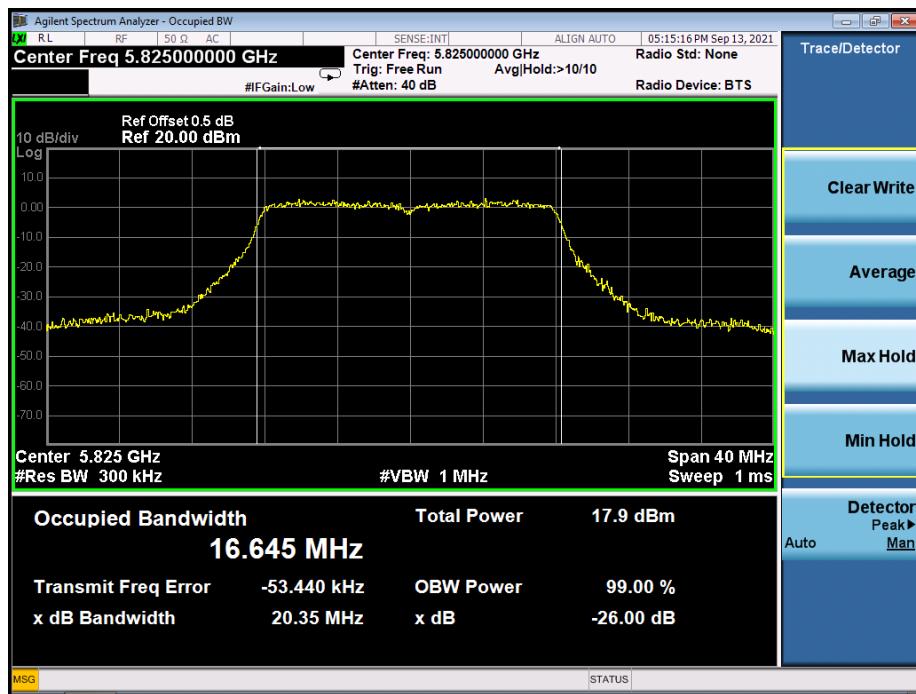


## 802.11n20 5745MHz 99% bandwidth

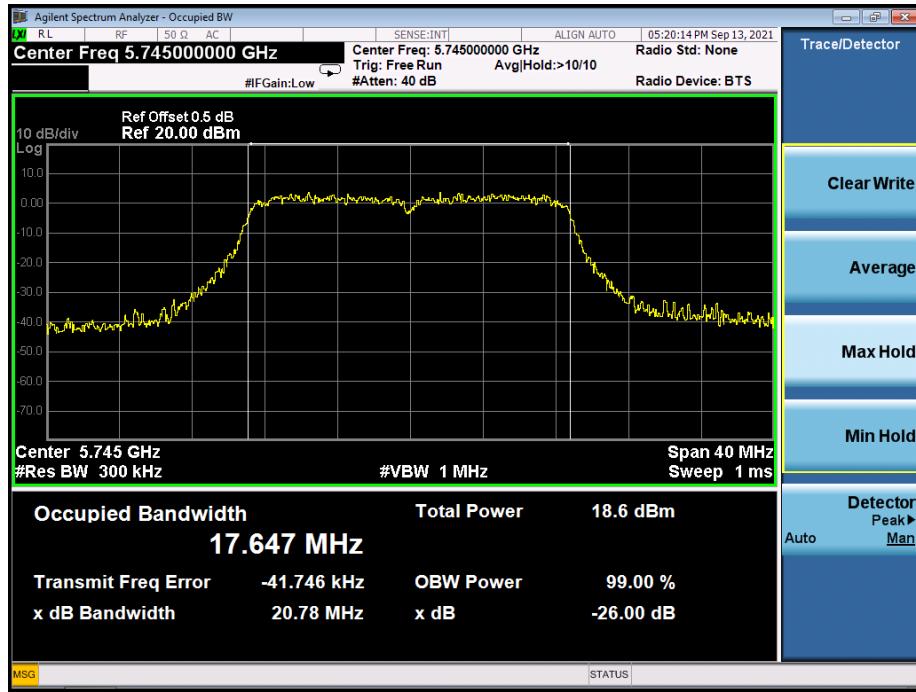


## 802.11n20 5785MHz 99% bandwidth

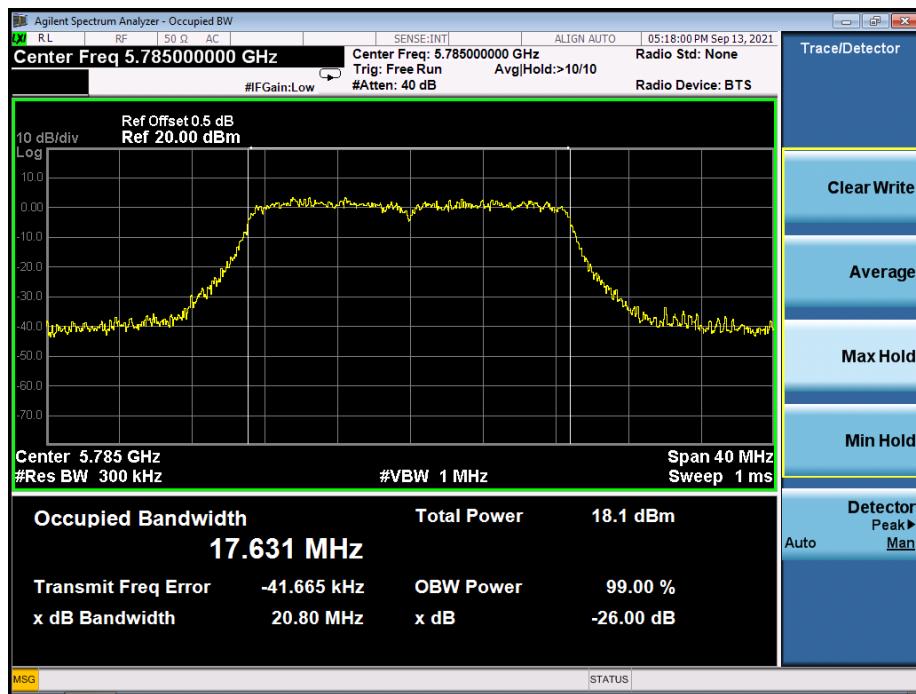


## 802.11n20 5825MHz 99% bandwidth

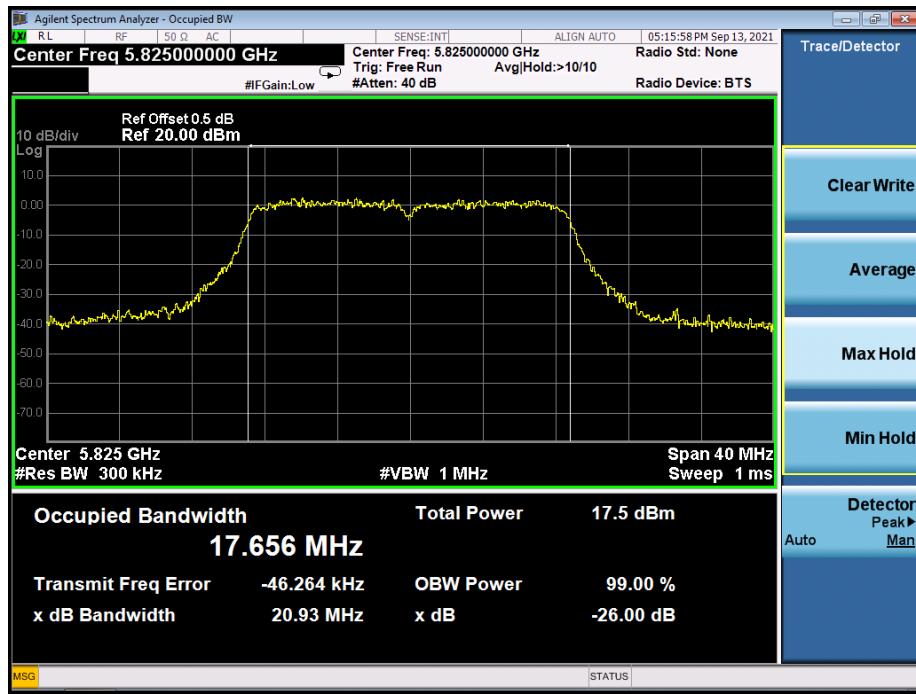


802.11 n40 5755MHz 99% bandwidth

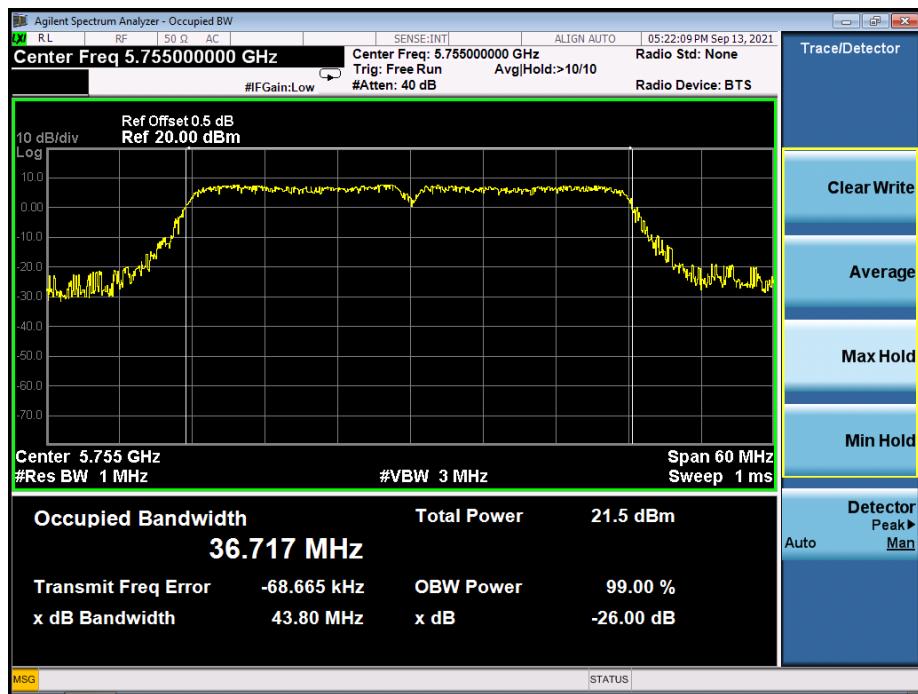



802.11 n40 5795MHz 99% bandwidth

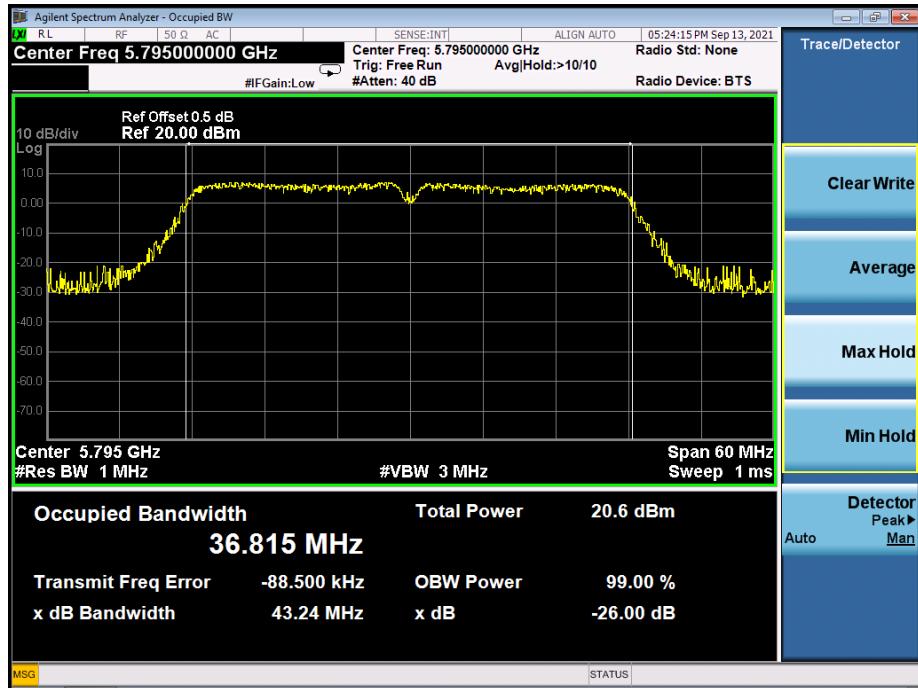

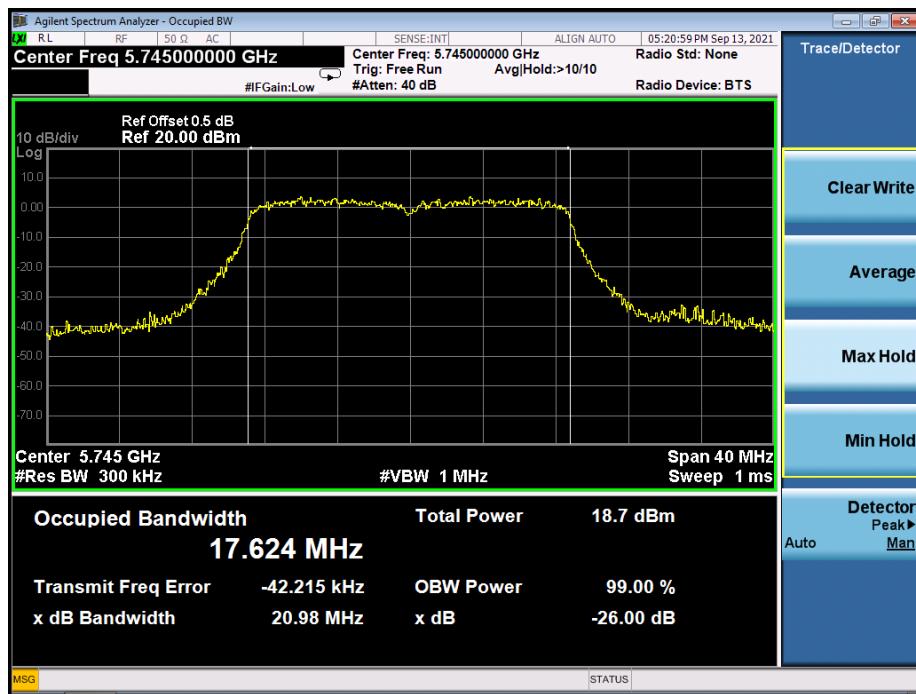



## 802.11ac20 5785MHz 99% bandwidth

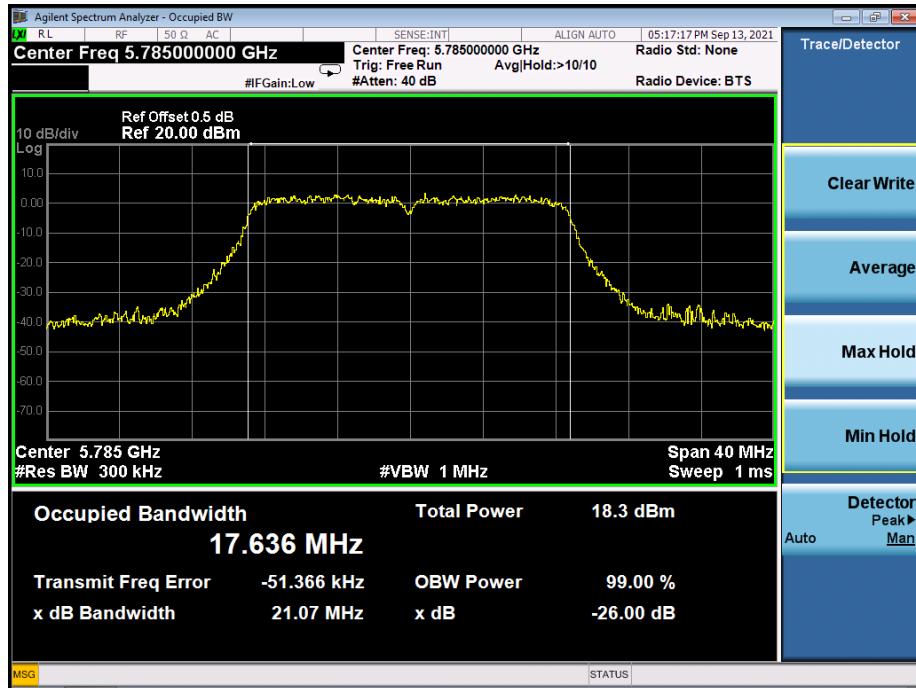

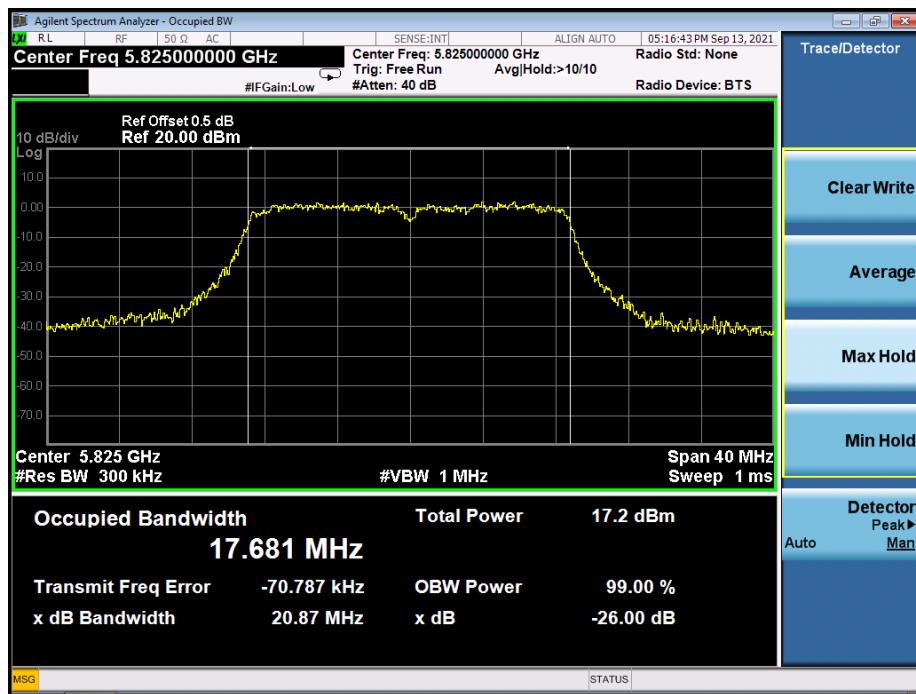


## 802.11 ac40 5755MHz 99% bandwidth

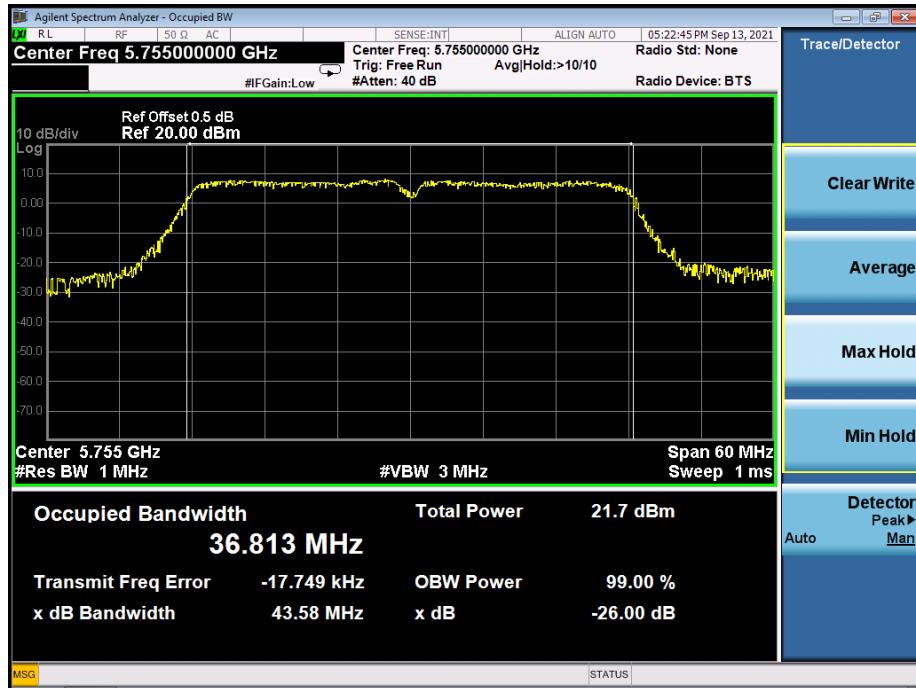


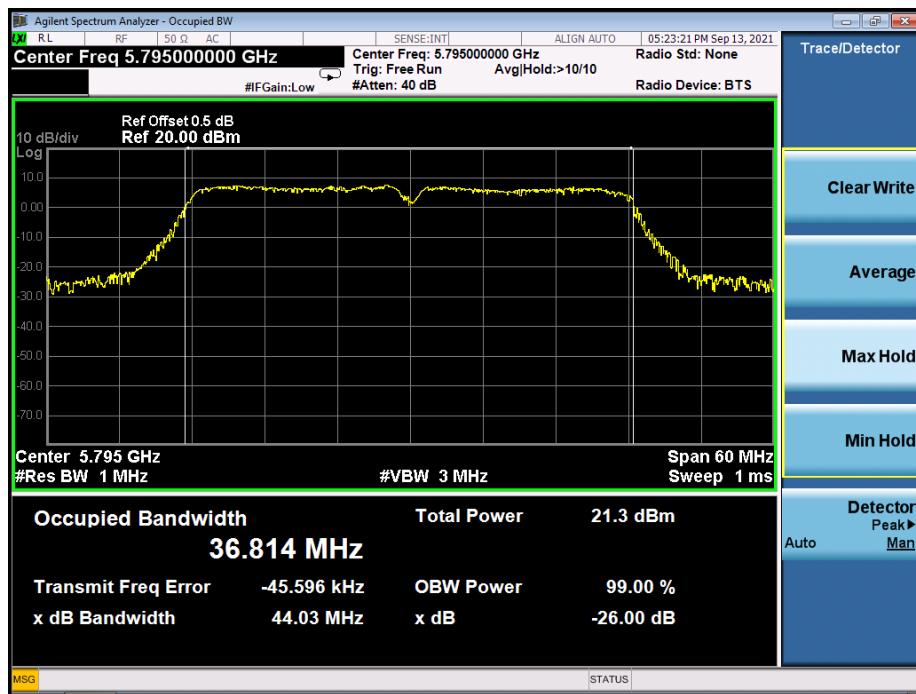


## 802.11 ac80 5775MHz 99% bandwidth

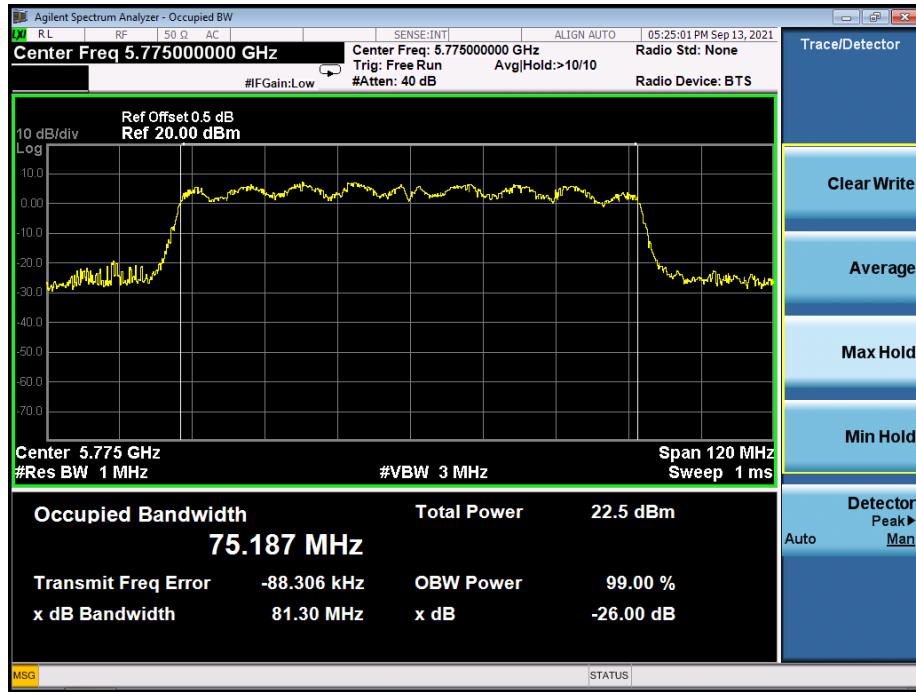


## 802.11a 5745MHz 6dB bandwidth

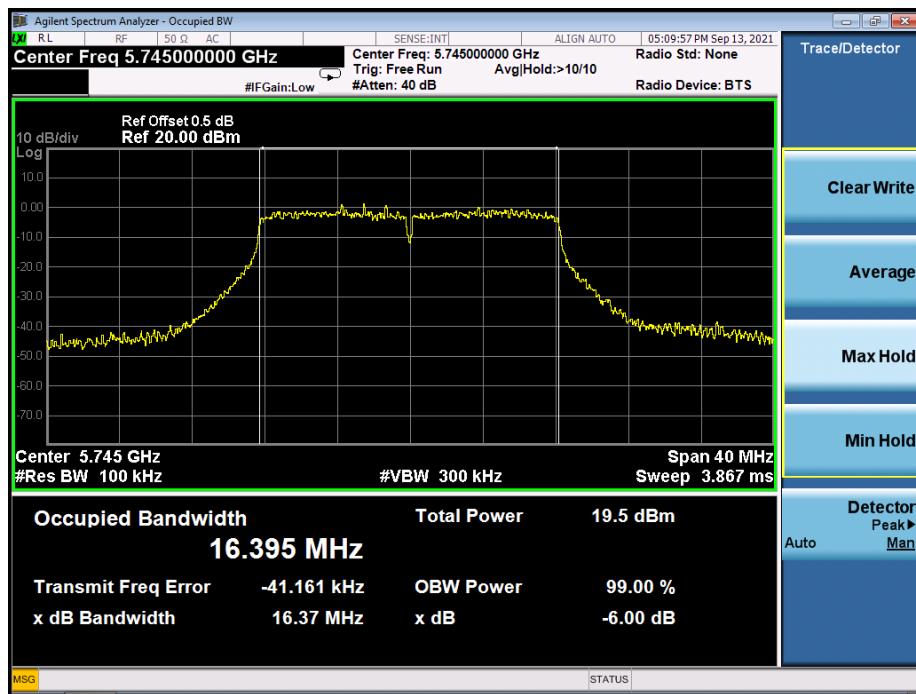


## 802.11a 5785MHz 6dB bandwidth

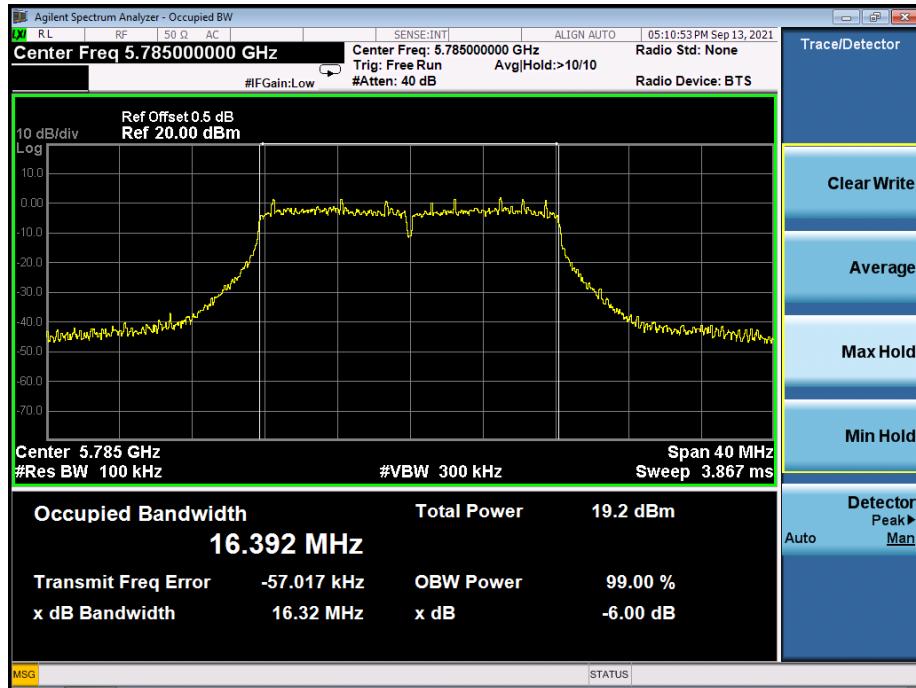


## 802.11a 5825MHz 6dB bandwidth

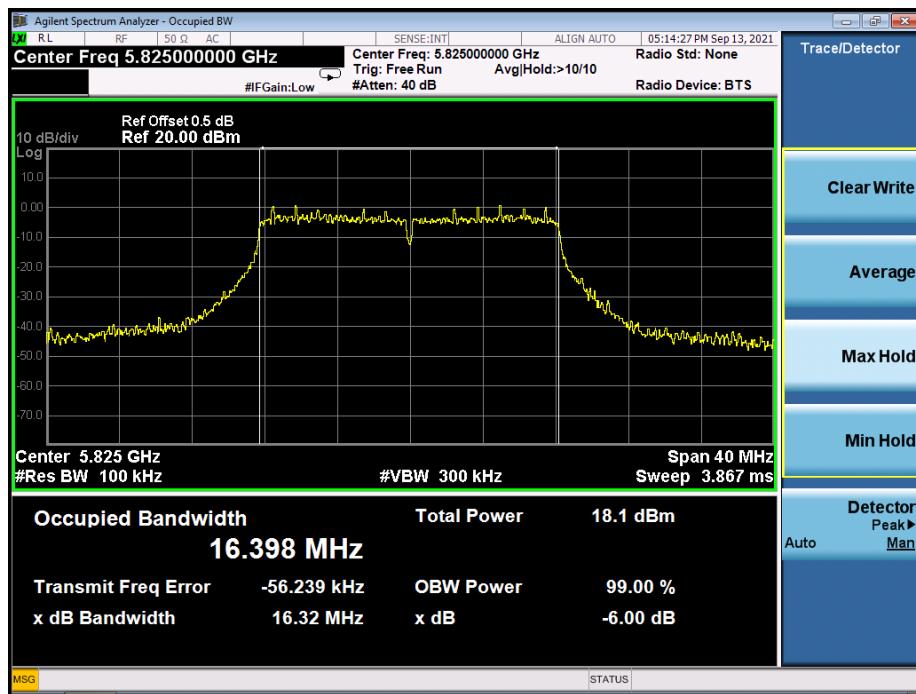


## 802.11n20 5745MHz 6dB bandwidth

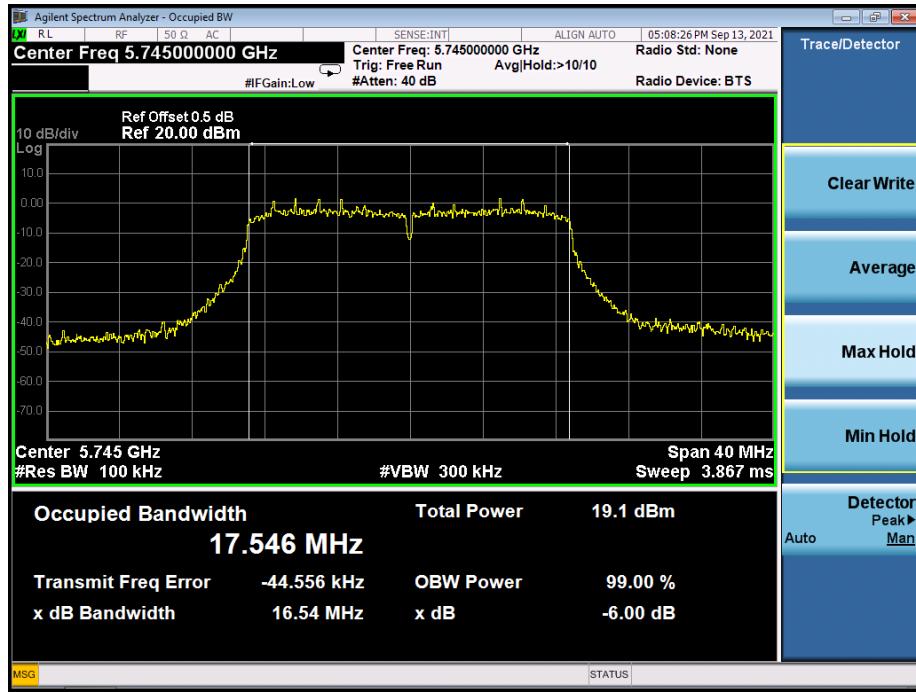


## 802.11n20 5785MHz 6dB bandwidth

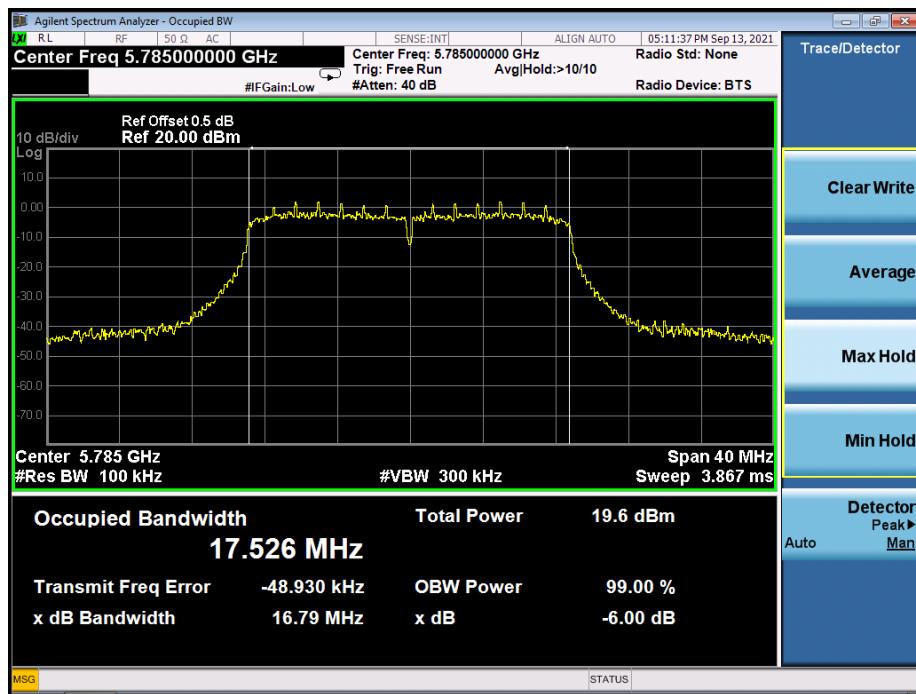


## 802.11n20 5825MHz 6dB bandwidth

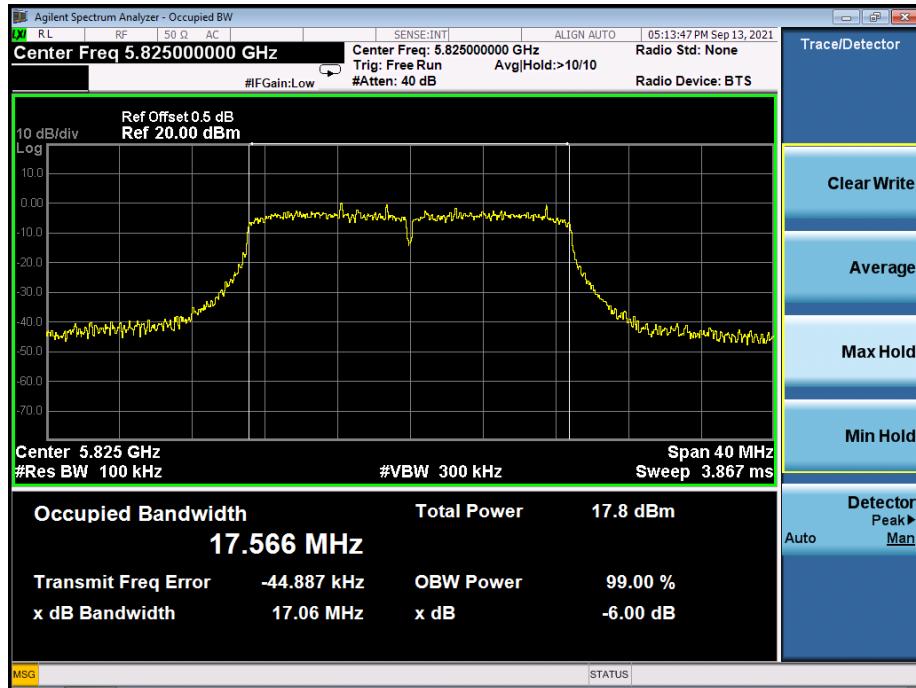


## 802.11 n40 5755MHz 6dB bandwidth

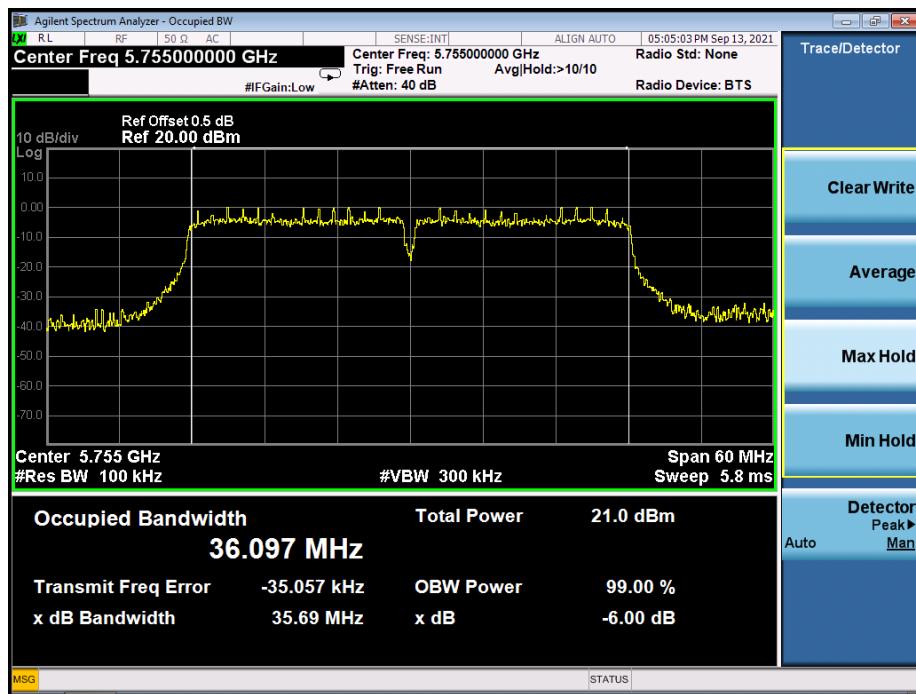


## 802.11 n40 5795MHz 6dB bandwidth

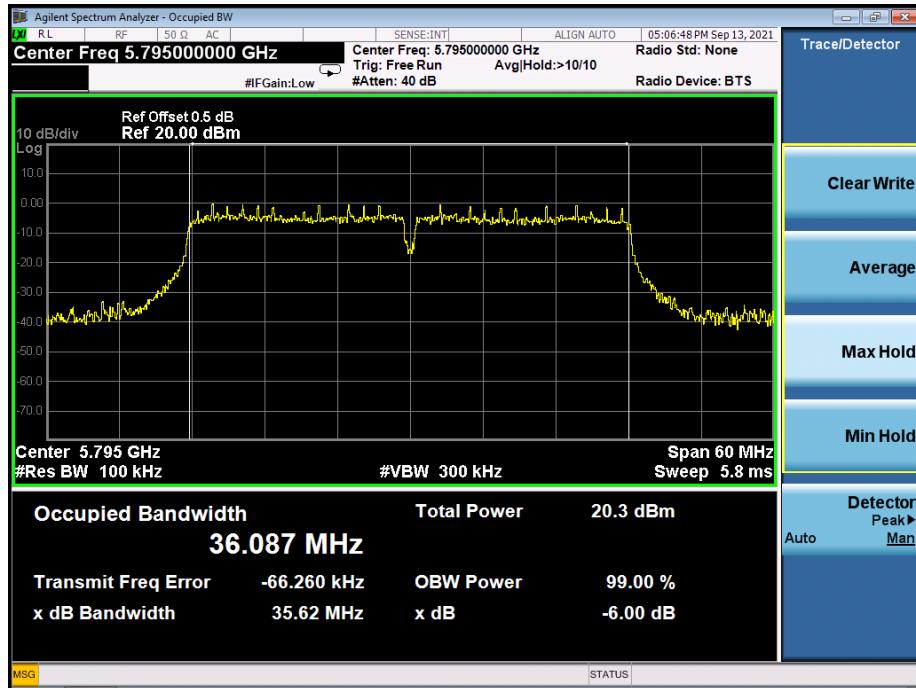


## 802.11ac20 5745MHz 6dB bandwidth

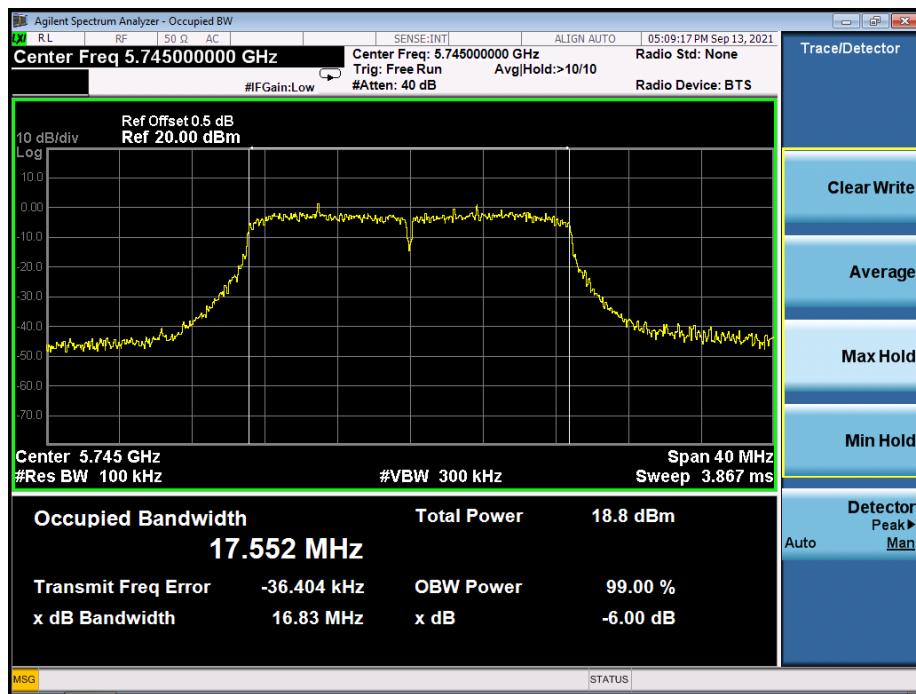


## 802.11ac20 5785MHz 6dB bandwidth

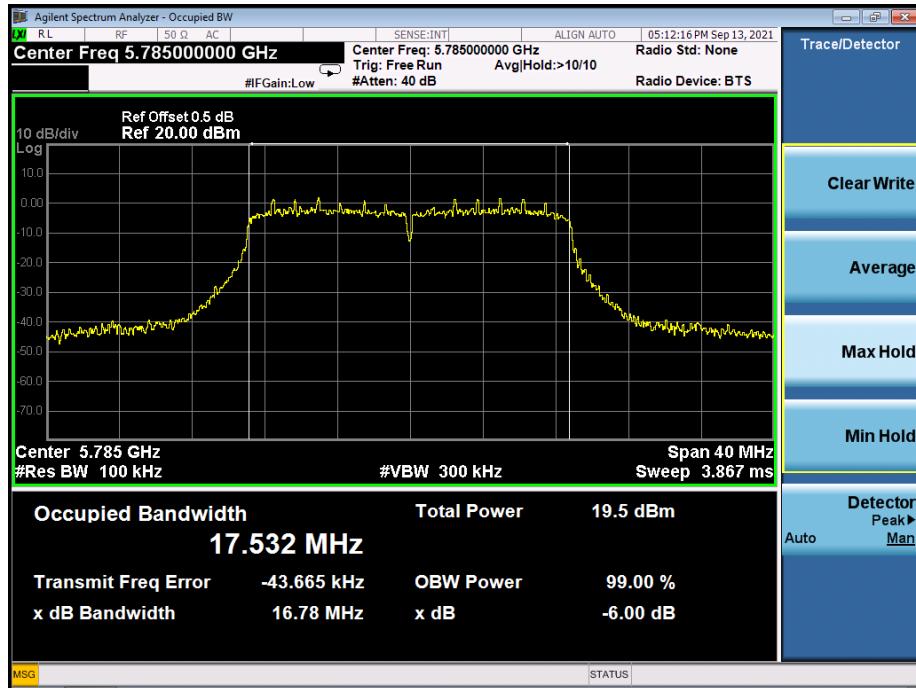


## 802.11ac20 5825MHz 6dB bandwidth

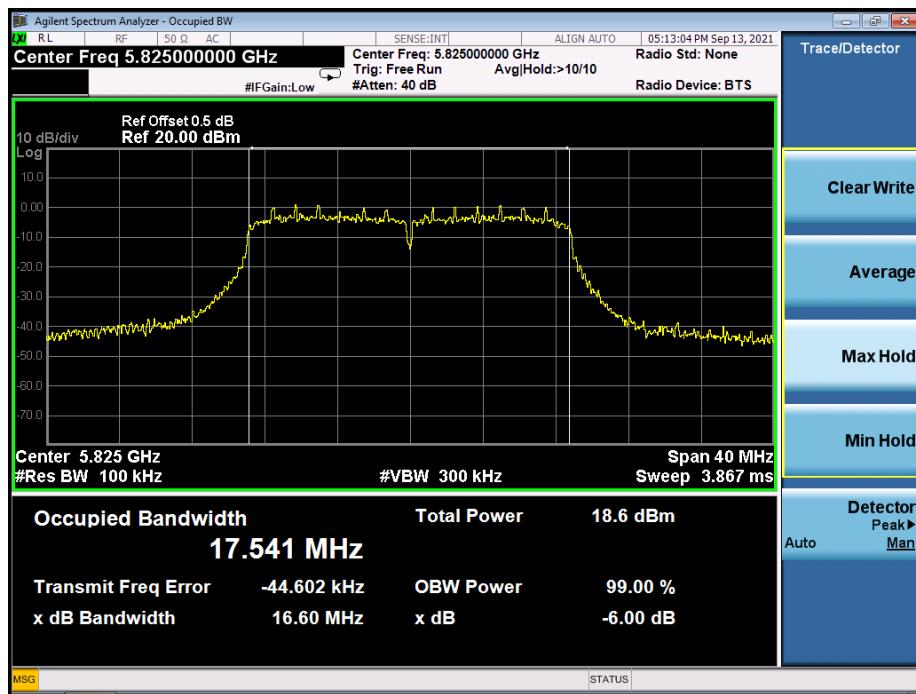


## 802.11 ac40 5755MHz 6dB bandwidth

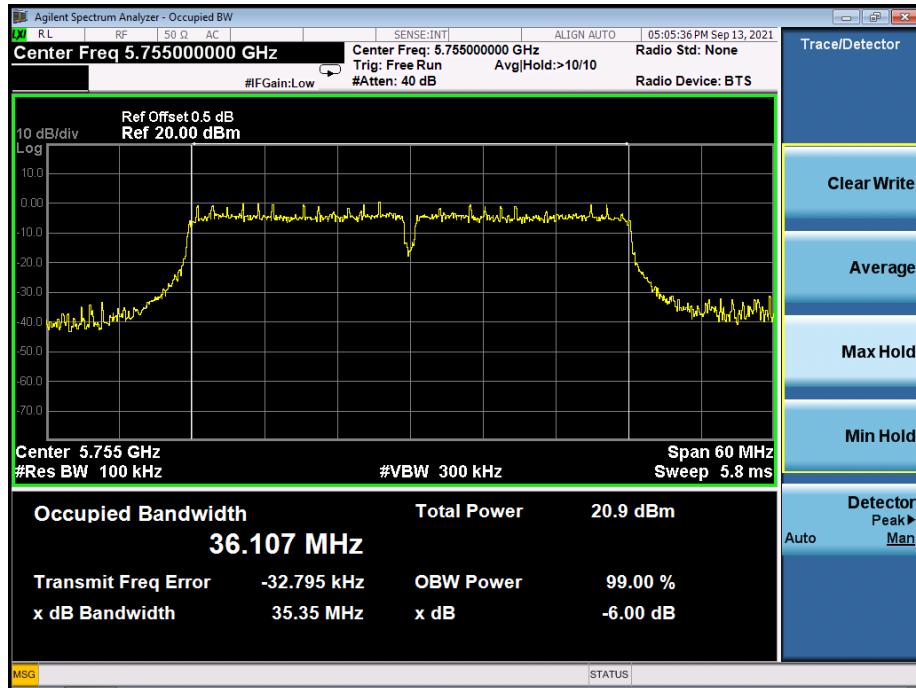

## 802.11 ac40 5795MHz 6dB bandwidth

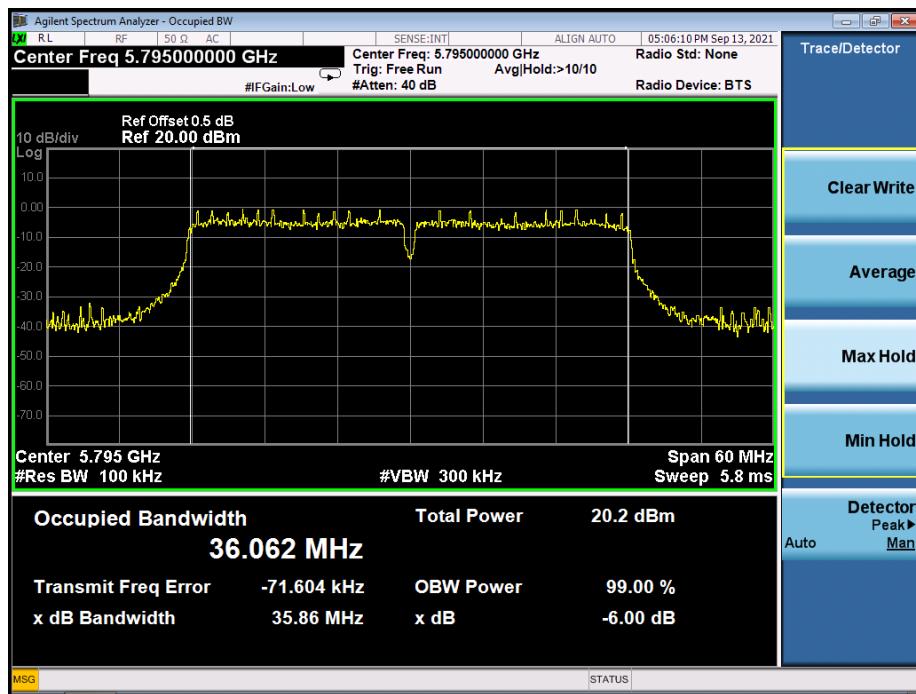

## 802.11 ac80 5775MHz 6dB bandwidth

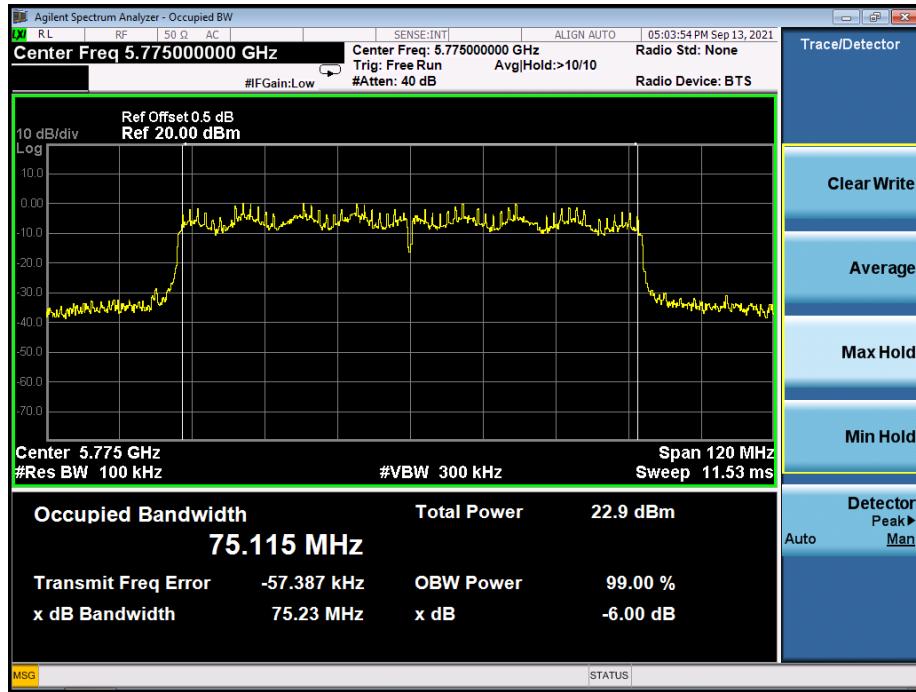

## 10. Maximum Conducted Output Power

### 10.1 Block Diagram Of Test Setup



### 10.2 Limit

#### According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

### 10.3 Test procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.<sup>1</sup> However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq$  98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm$  2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

- (ii) Set RBW = 1 MHz.
- (iii) Set VBW  $\geq$  3 MHz.
- (iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle  $<$  98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

#### 10.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 10.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)			LIMIT	Result
	(MHz)	ANT A(dBm)	ANT B(dBm)	Total(dBm)		
<b>TX 802.11a Mode</b>						
CH36	5180	16.367	16.495	/	30	Pass
CH40	5200	16.387	16.068	/	30	Pass
CH48	5240	16.166	16.357	/	30	Pass
<b>TX 802.11 n20M Mode</b>						
CH36	5180	15.104	14.974	18.050	30	Pass
CH40	5200	14.661	14.518	17.600	30	Pass
CH48	5240	14.039	14.264	17.163	30	Pass
<b>TX 802.11 n40M Mode</b>						
CH38	5190	13.583	13.858	16.733	30	Pass
CH46	5230	12.864	12.957	15.921	30	Pass
<b>TX 802.11 AC20M Mode</b>						
CH36	5180	14.561	14.757	17.670	30	Pass
CH40	5200	14.234	14.279	17.267	30	Pass
CH48	5240	14.074	13.959	17.027	30	Pass
<b>TX 802.11 AC40M Mode</b>						
CH38	5190	13.408	13.636	16.534	30	Pass
CH46	5230	12.555	12.664	15.620	30	Pass
<b>TX 802.11 AC80M Mode</b>						
CH42	5210	12.454	12.411	15.443	30	Pass

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Test Channel	Frequency (MHz)	Maximum output power. Antenna port (AV)			LIMIT	Result
		ANT A(dBm)	ANT B(dBm)	Total(dBm)		
<b>TX 802.11a Mode</b>						
CH 149	5745	16.810	16.881	/	30	Pass
CH 157	5785	16.536	16.537	/	30	Pass
CH 165	5825	15.921	15.693	/	30	Pass
<b>TX 802.11 n20M Mode</b>						
CH 149	5745	15.166	15.348	18.268	30	Pass
CH 157	5785	15.047	14.776	17.924	30	Pass
CH 165	5825	13.700	13.844	16.783	30	Pass
<b>TX 802.11 n40M Mode</b>						
CH 151	5755	14.306	14.364	17.345	30	Pass
CH 159	5795	13.889	14.134	17.024	30	Pass
<b>TX 802.11 AC20M Mode</b>						
CH 149	5745	15.136	15.388	18.274	30	Pass
CH 157	5785	14.650	15.111	17.897	30	Pass
CH 165	5825	13.354	13.933	16.663	30	Pass
<b>TX 802.11 AC40M Mode</b>						
CH 151	5755	13.830	13.978	16.915	30	Pass
CH 159	5795	13.310	13.478	16.405	30	Pass
<b>TX 802.11 AC80M Mode</b>						
CH 155	5775	12.932	13.131	16.043	30	Pass

## 11. Out Of Band Emissions

### 11.1 Block Diagram Of Test Setup



### 11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

### 11.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 11.4 EUT operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data

## 11.5 Test Result


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B,only shown Antenna B Plot.

### 5.180~5.240 GHz (802.11a) Band Edge, Left Side

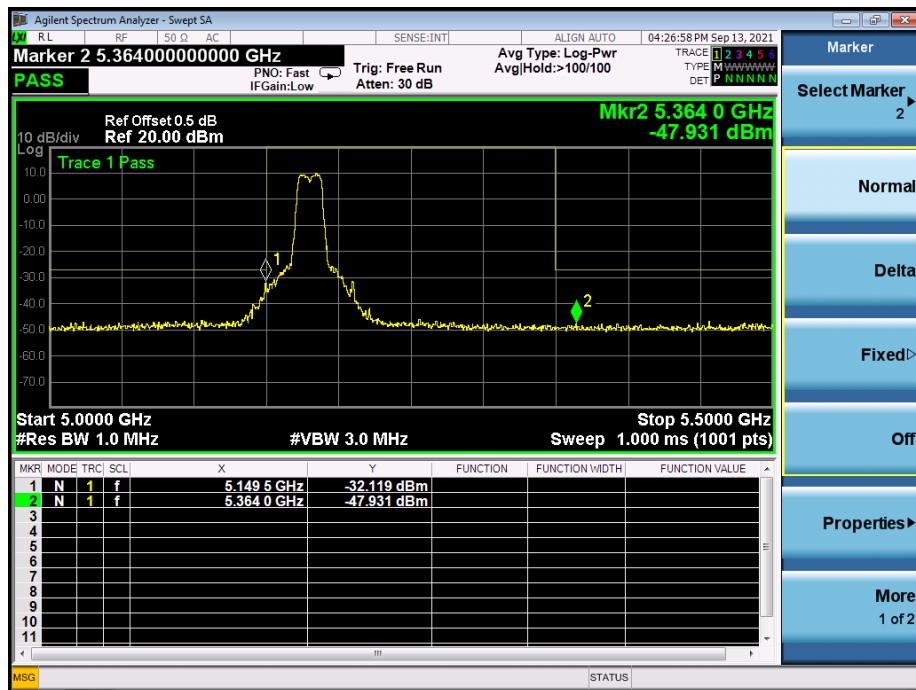


### (802.11a) Band Edge, Right Side

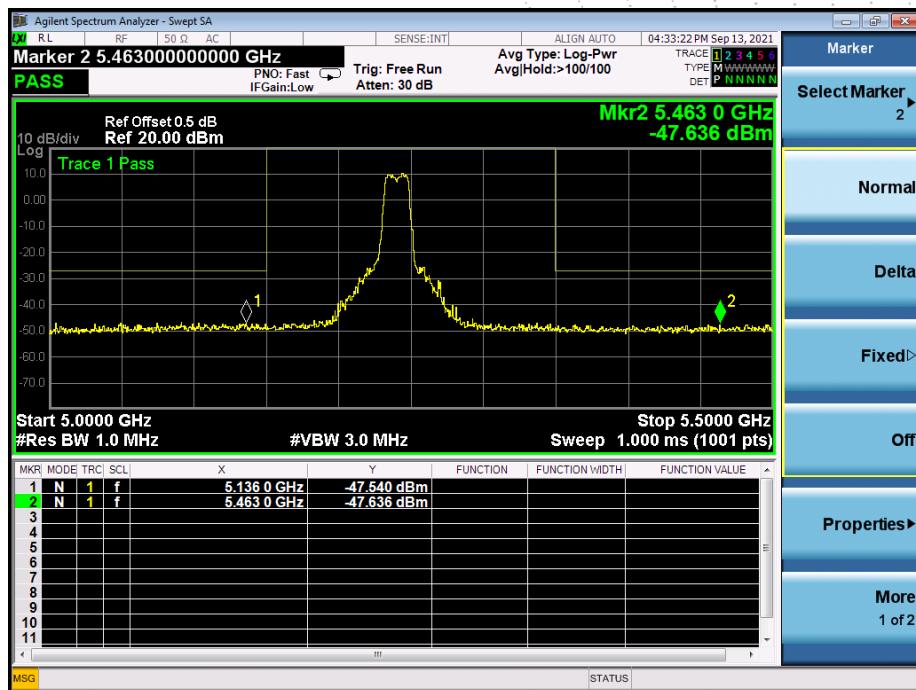


**5.180~5.240 GHz**

(802.11n20) Band Edge, Left Side

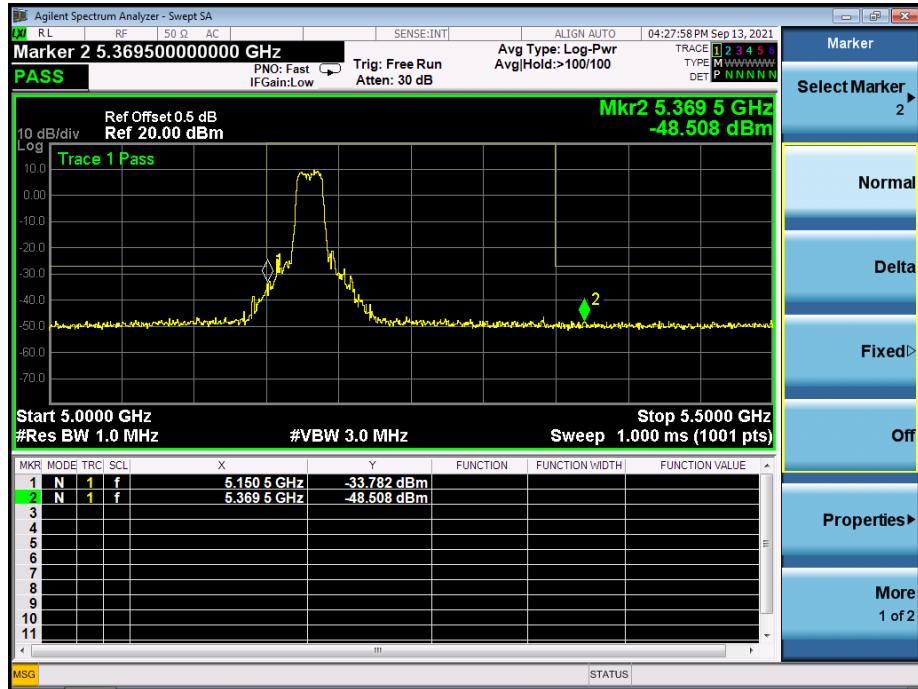


(802.11n20) Band Edge, Right Side

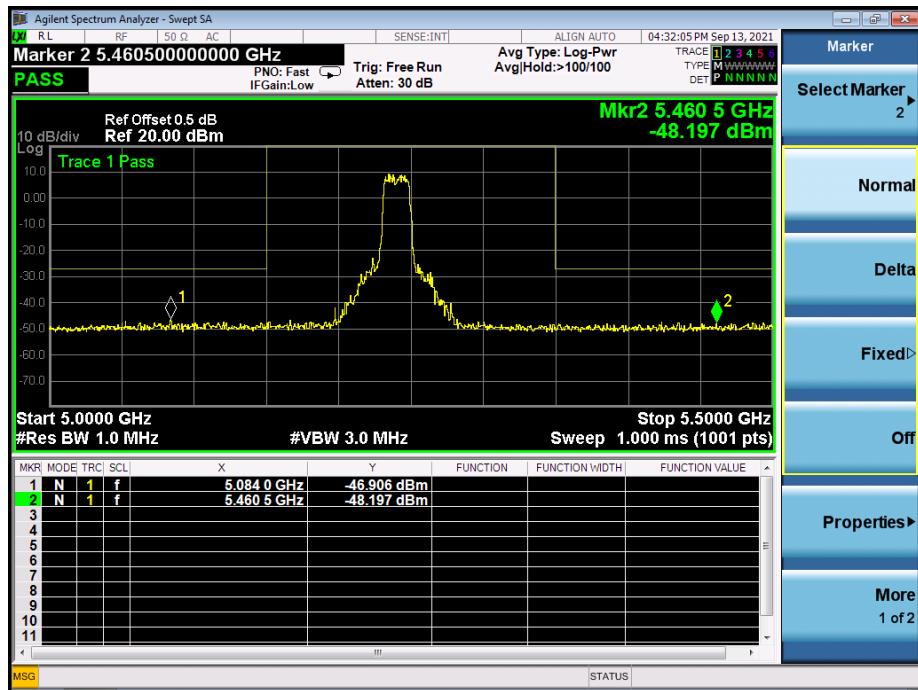


**5.180~5.240 GHz**

(802.11n40) Band Edge, Left Side

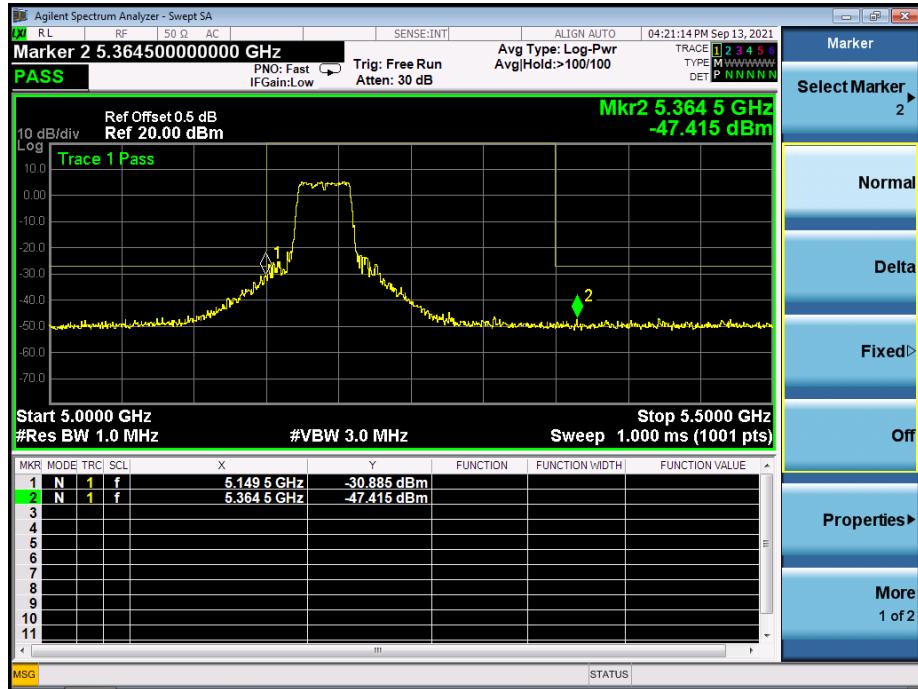


(802.11n40) Band Edge, Right Side

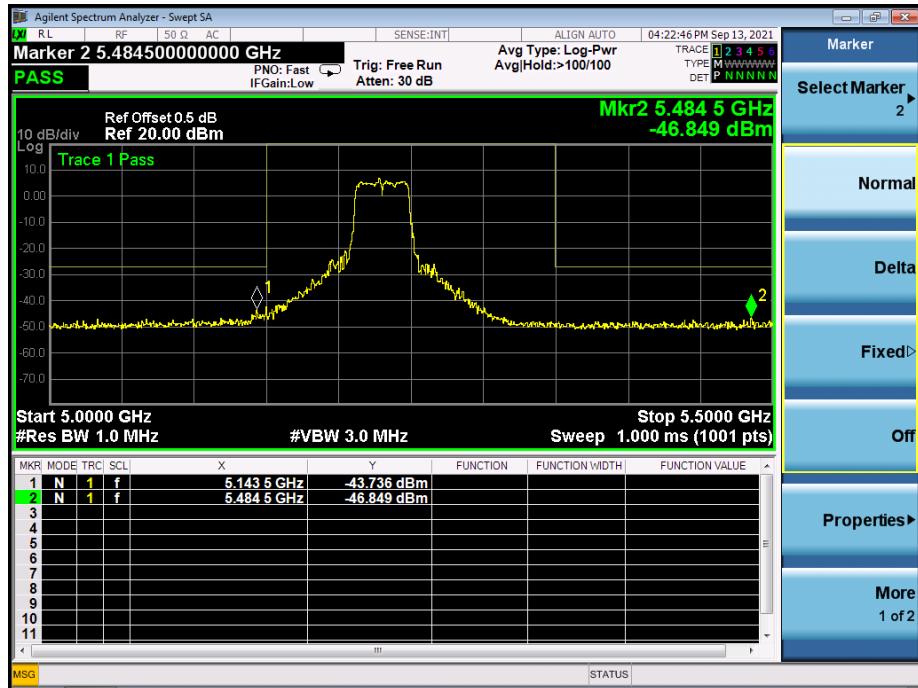


**5.180~5.240 GHz**

(802.11ac20) Band Edge, Left Side

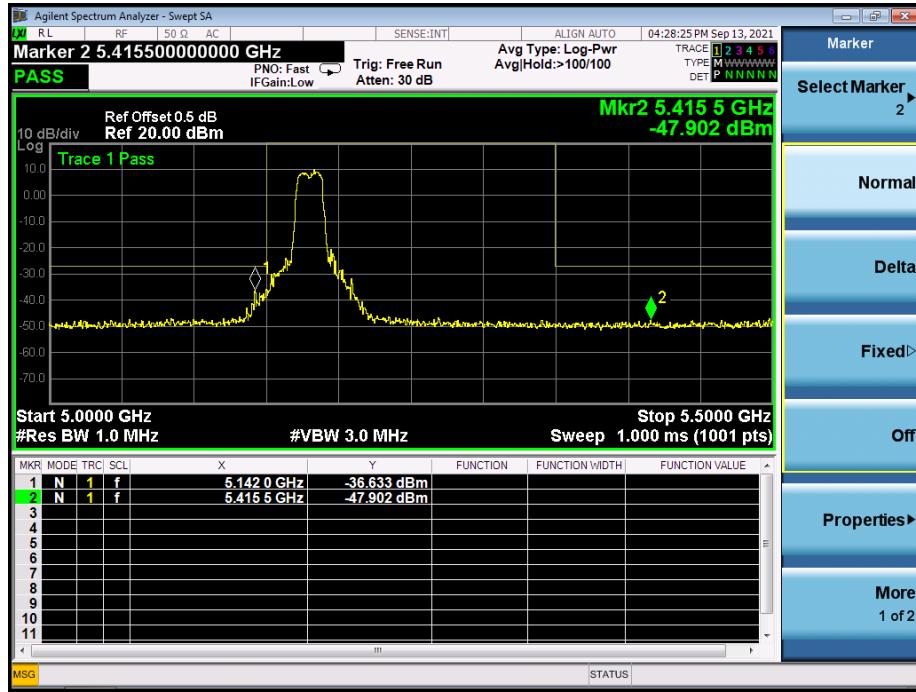


(802.11ac20) Band Edge, Right Side

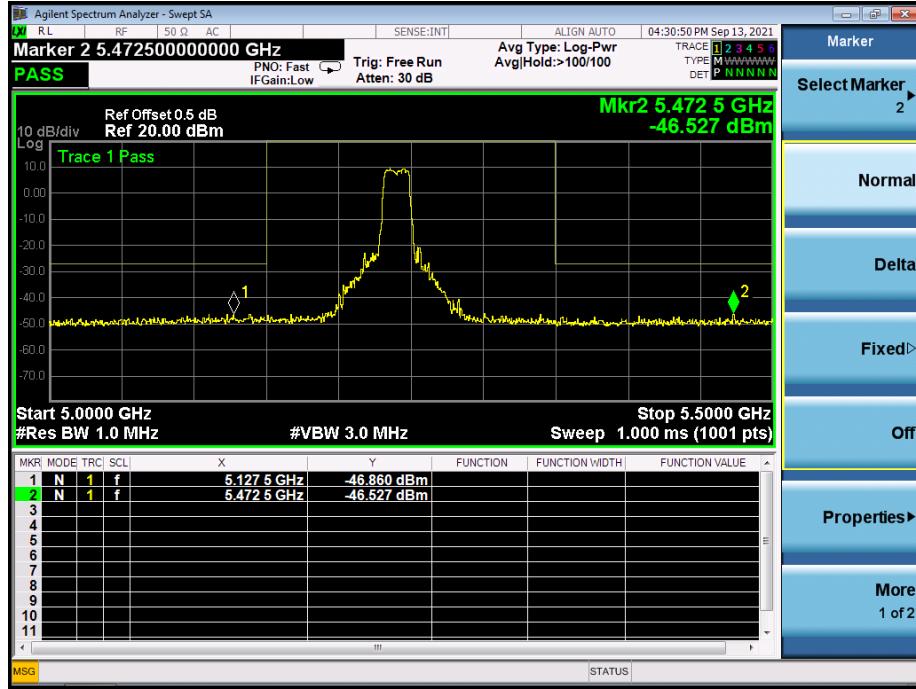


**5.180~5.240 GHz**

(802.11ac40) Band Edge, Left Side

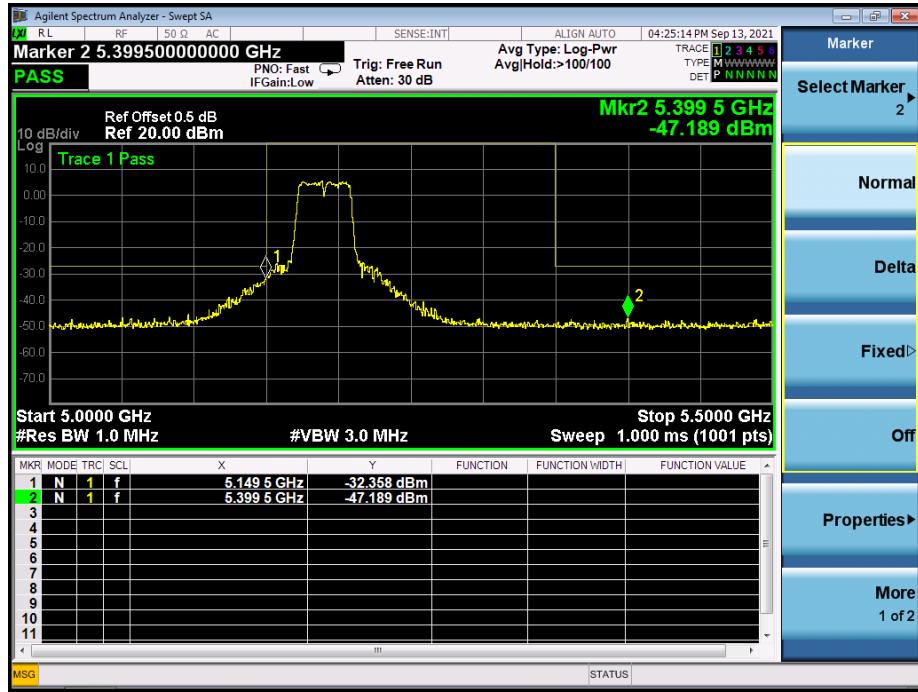


(802.11ac40) Band Edge, Right Side

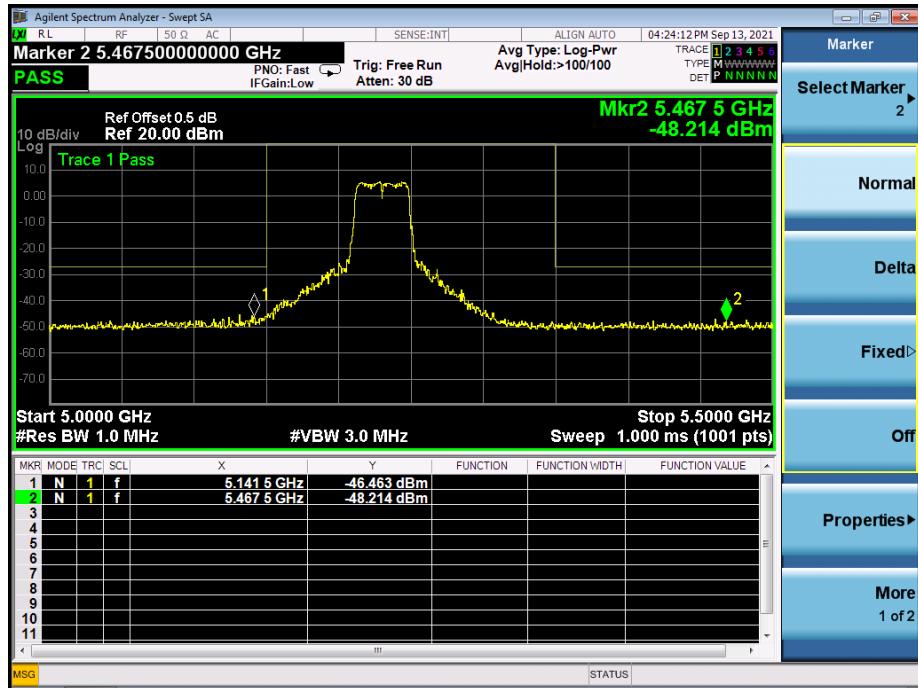

**5.180~5.240 GHz**

(802.11ac80) Band Edge, Left Side

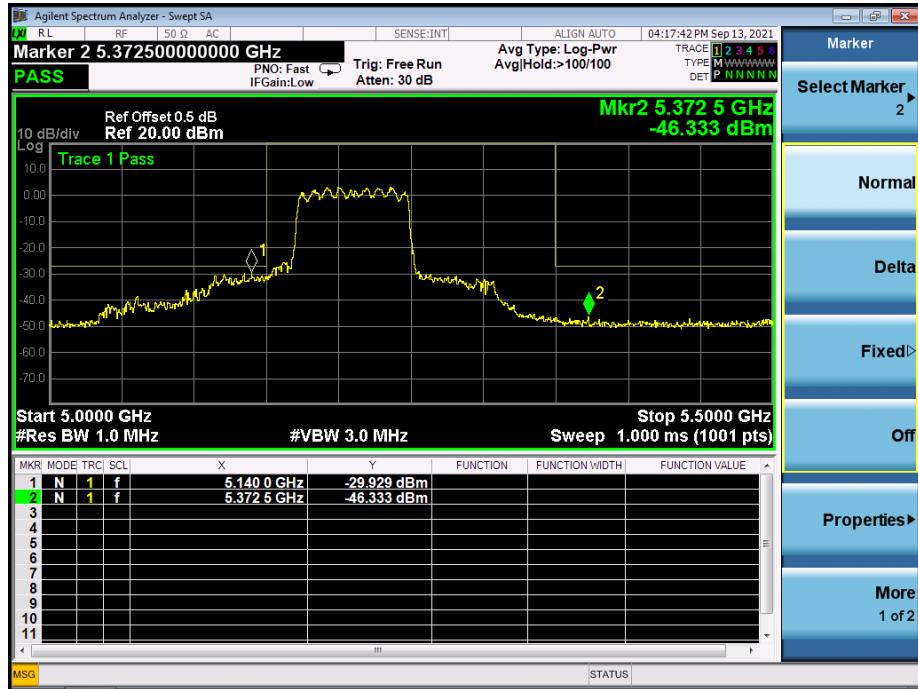


(802.11ac80) Band Edge, Right Side




**5.745~5.825 GHz**


(802.11a) Band Edge, Left Side

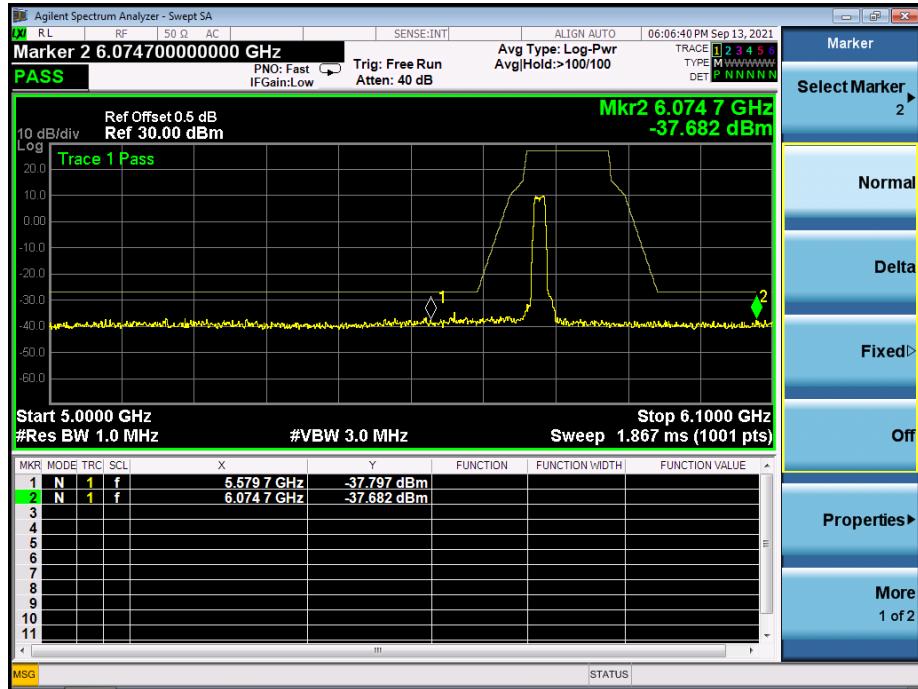


(802.11a) Band Edge, Right Side

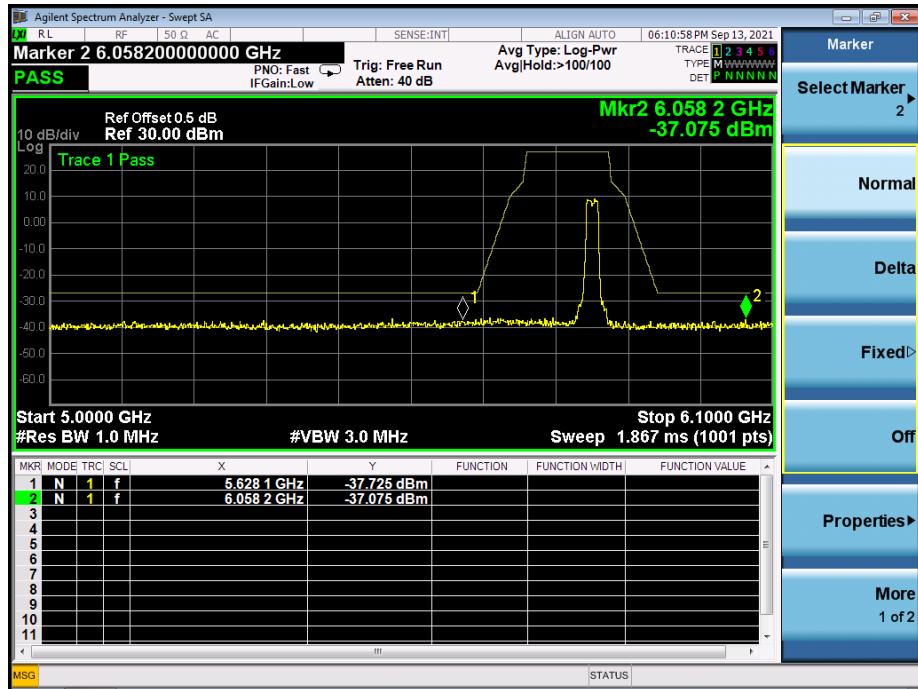

**5.745~5.825 GHz**  
(802.11n20) Band Edge, Left Side

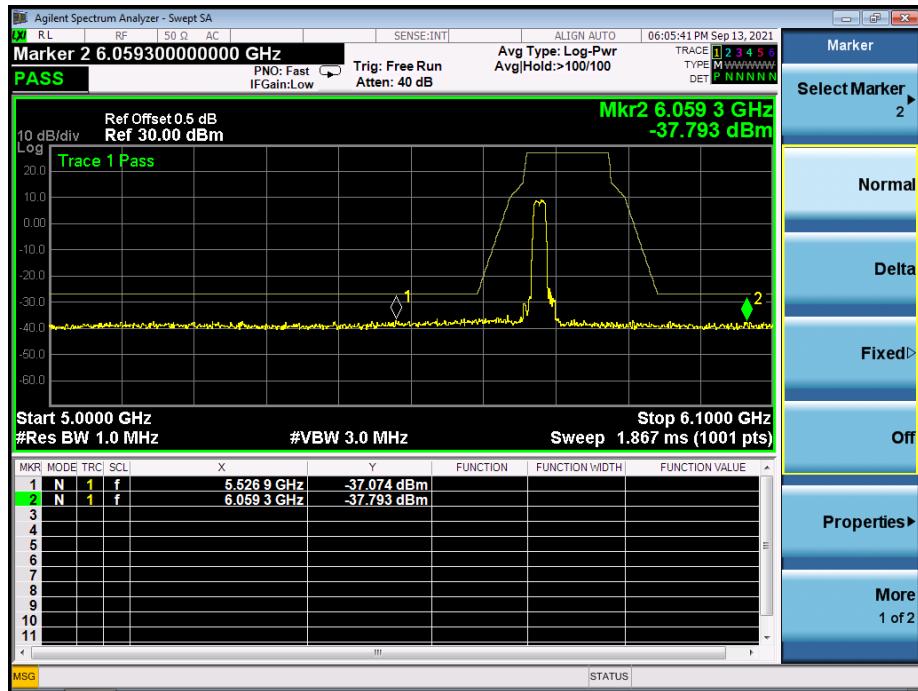


(802.11n20) Band Edge, Right Side

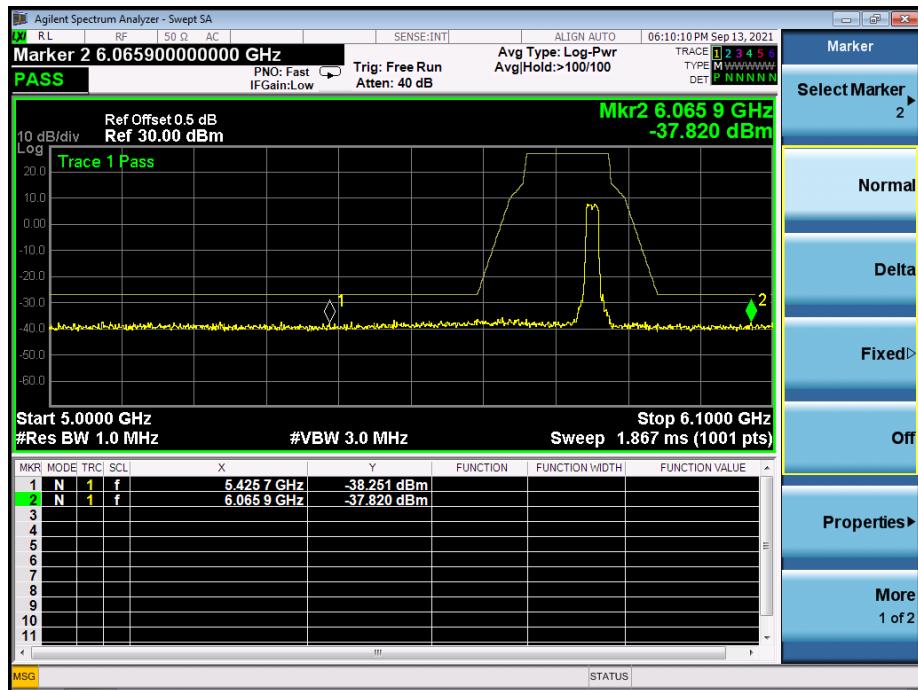


**5.745~5.825 GHz**

(802.11n40) Band Edge, Left Side

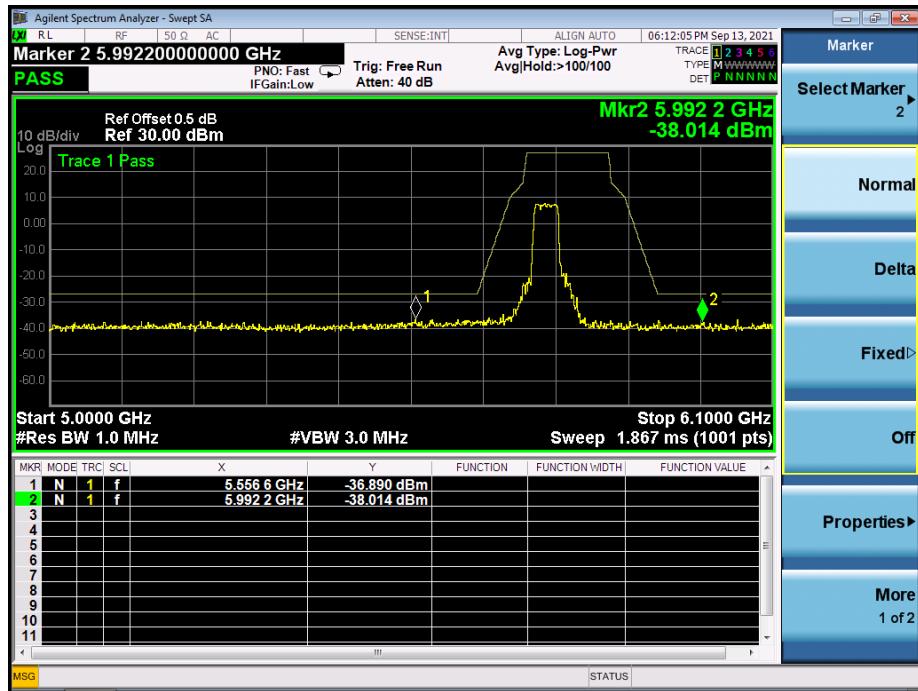


(802.11n40) Band Edge, Right Side

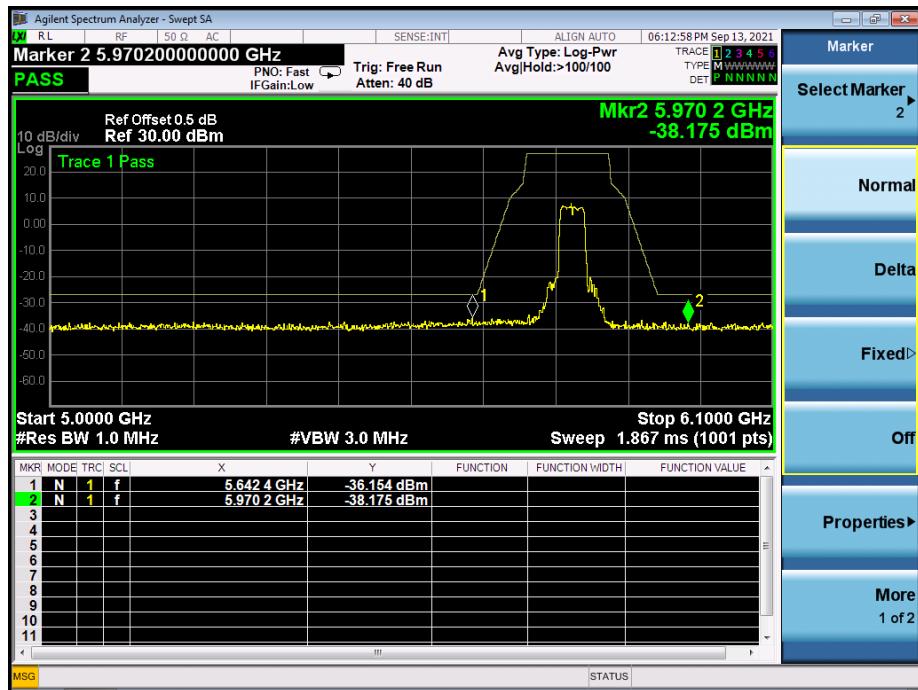


**5.745~5.825 GHz**

(802.11ac20) Band Edge, Left Side

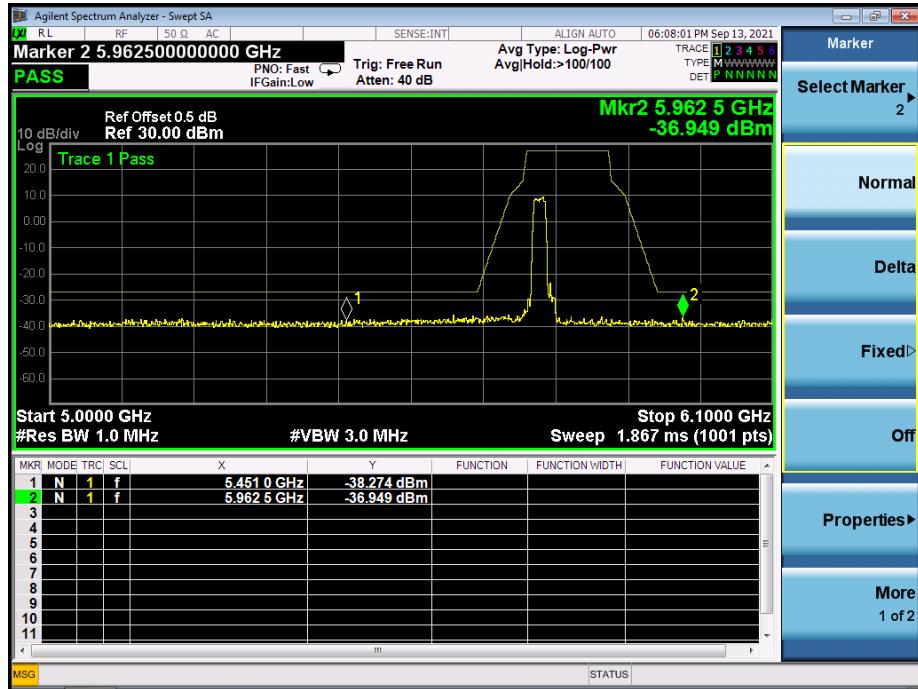


(802.11ac20) Band Edge, Right Side

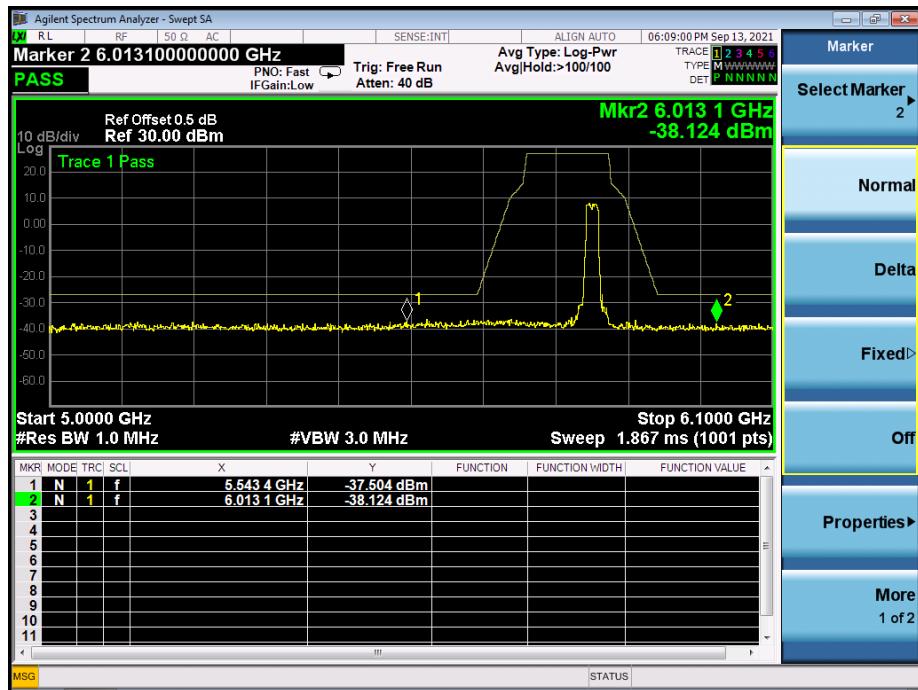

**5.745~5.825 GHz**

(802.11ac40) Band Edge, Left Side

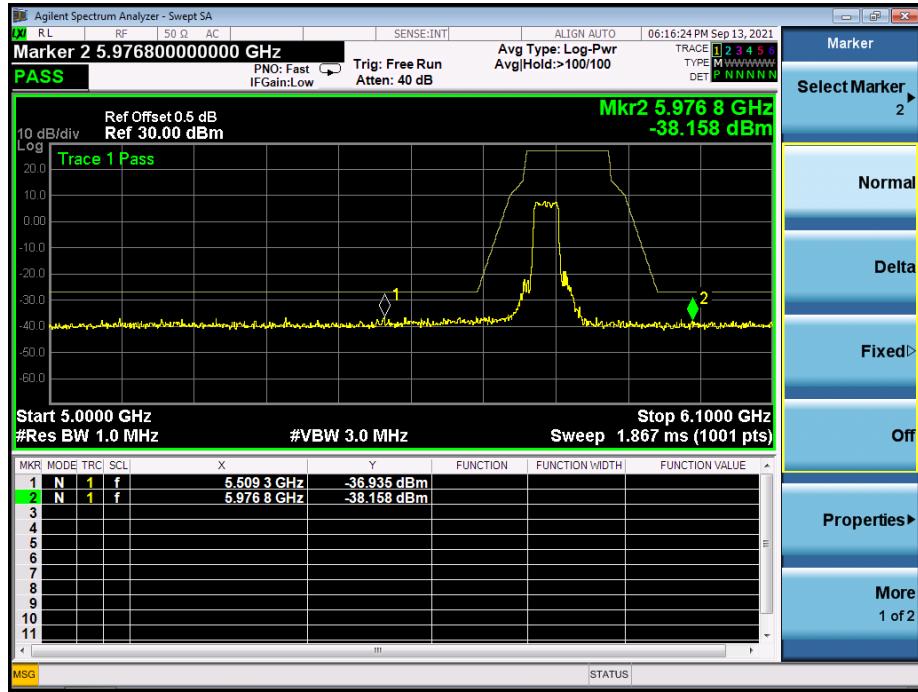

(802.11ac40) Band Edge, Right Side

