



# RF TEST REPORT

**Applicant**      Espressif Systems (Shanghai) Co.,Ltd.

**FCC ID**          2AC7Z-EK057

**Product**        Wi-Fi & Bluetooth Internet of Things Module

**Brand**           ESPRESSIF

**Model**           EK057

**Marketing**      EK057

**Report No.**     R2011A0768-R2

**Issue Date**    December 17, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Prepared by: Peng Tao*

*Approved by: Kai Xu*

## TA Technology (Shanghai) Co., Ltd.

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## TABLE OF CONTENT

|                                                      |    |
|------------------------------------------------------|----|
| 1. Test Laboratory .....                             | 4  |
| 1.1. Notes of the test report .....                  | 4  |
| 1.2. Test facility .....                             | 4  |
| 1.3. Testing Location .....                          | 4  |
| 2. General Description of Equipment under Test ..... | 5  |
| 2.1. Applicant and Manufacturer Information .....    | 5  |
| 2.2. General information .....                       | 5  |
| 3. Applied Standards .....                           | 6  |
| 4. Test Configuration .....                          | 7  |
| 5. Test Case Results .....                           | 8  |
| 5.1. Maximum output power .....                      | 8  |
| 5.2. 99% Bandwidth and 6dB Bandwidth .....           | 11 |
| 5.3. Band Edge .....                                 | 19 |
| 5.4. Power Spectral Density .....                    | 22 |
| 5.5. Spurious RF Conducted Emissions .....           | 28 |
| 5.6. Unwanted Emission .....                         | 33 |
| 5.7. Conducted Emission .....                        | 72 |
| 6. Main Test Instruments .....                       | 75 |
| ANNEX A: The EUT Appearance .....                    | 76 |
| ANNEX B: Test Setup Photos .....                     | 77 |

## Summary of measurement results

| Number                                                                                                                                                                                                                                                                                | Test Case                        | Clause in FCC rules     | Verdict |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-------------------------|---------|
| 1                                                                                                                                                                                                                                                                                     | Maximum output power             | 15.247(b)(3)            | PASS    |
| 2                                                                                                                                                                                                                                                                                     | 99% Bandwidth and 6 dB bandwidth | 15.247(a)(2)            | PASS    |
| 3                                                                                                                                                                                                                                                                                     | Power spectral density           | 15.247(e)               | PASS    |
| 4                                                                                                                                                                                                                                                                                     | Band Edge                        | 15.247(d)               | PASS    |
| 5                                                                                                                                                                                                                                                                                     | Spurious RF Conducted Emissions  | 15.247(d)               | PASS    |
| 6                                                                                                                                                                                                                                                                                     | Unwanted Emissions               | 15.247(d),15.205,15.209 | PASS    |
| 7                                                                                                                                                                                                                                                                                     | Conducted Emissions              | 15.207                  | PASS    |
| Date of Testing: November 19, 2020 ~ November 30, 2020                                                                                                                                                                                                                                |                                  |                         |         |
| Date of Sample Received: November 11, 2020                                                                                                                                                                                                                                            |                                  |                         |         |
| Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. |                                  |                         |         |

## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

|                      |                                                                              |
|----------------------|------------------------------------------------------------------------------|
| Applicant            | Espressif Systems (Shanghai) Co.,Ltd.                                        |
| Applicant address    | Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China |
| Manufacturer         | Espressif Systems (Shanghai) Co.,Ltd.                                        |
| Manufacturer address | Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China |

### 2.2. General information

| EUT Description                                                                                                |                                                                                             |
|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| Model                                                                                                          | EK057                                                                                       |
| SN                                                                                                             | 1#                                                                                          |
| Hardware Version                                                                                               | V1.4                                                                                        |
| Software Version                                                                                               | V1.1.3.0                                                                                    |
| Power Supply                                                                                                   | External power supply                                                                       |
| Antenna Type                                                                                                   | PCB Antenna                                                                                 |
| Antenna Connector                                                                                              | A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)         |
| Antenna Gain                                                                                                   | 3.14dBi                                                                                     |
| Additional beamforming gain                                                                                    | NA                                                                                          |
| Test Mode                                                                                                      | 802.11b<br>802.11g, 802.11n(HT20/HT40);<br>Bluetooth V4.2 LE                                |
| Modulation Type                                                                                                | 802.11b: DSSS;<br>802.11g/n(HT20/HT40): OFDM<br>BLE :GFSK                                   |
| Max. Conducted Power                                                                                           | Wi-Fi 2.4G :17.28dBm<br>BLE: 4.83dBm                                                        |
| Operating Frequency Range(s)                                                                                   | 802.11b/g/n(HT20): 2412 ~ 2462 MHz<br>802.11n(HT40): 2422 ~ 2452 MHz<br>BLE: 2402 ~2480 MHz |
| Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. |                                                                                             |



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15C (2019) Radio Frequency Devices**

**ANSI C63.10 (2013)**

**Reference standard:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

| Test Mode             | Data Rate |
|-----------------------|-----------|
| 802.11b               | 1 Mbps    |
| 802.11g               | 6 Mbps    |
| 802.11n HT20          | MCS0      |
| 802.11n HT40          | MCS0      |
| Bluetooth(Low Energy) | 1Mbps     |

## 5. Test Case Results

### 5.1. Maximum output power


#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

#### Test Setup



#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

|                      |                   |
|----------------------|-------------------|
| Average Output Power | $\leq 1W$ (30dBm) |
|----------------------|-------------------|

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.



## Test Results

| Single Antenna Power Index |     |     |      |
|----------------------------|-----|-----|------|
| Test Mode                  | CH1 | CH6 | CH11 |
| 802.11b                    | 0   | 0   | 0    |
| 802.11g                    | 0   | 0   | 0    |
| 802.11n HT20               | 0   | 0   | 0    |
| Mode                       | CH3 | CH6 | CH9  |
| 802.11n HT40               | 8   | 0   | 0    |

| Test Mode                                                              | T <sub>on</sub> (ms) | T <sub>(on+off)</sub> (ms) | Duty cycle | Duty cycle correction Factor(dB) |
|------------------------------------------------------------------------|----------------------|----------------------------|------------|----------------------------------|
| 802.11b                                                                | 1.00                 | 1.00                       | 1.00       | NA                               |
| 802.11g                                                                | 1.00                 | 1.00                       | 1.00       | NA                               |
| 802.11n HT20                                                           | 1.00                 | 1.00                       | 1.00       | NA                               |
| 802.11n HT40                                                           | 1.00                 | 1.00                       | 1.00       | NA                               |
| BLE                                                                    | 2.10                 | 2.49                       | 0.84       | 0.74                             |
| Note: when Duty cycle≥0.98, Duty cycle correction Factor not required. |                      |                            |            |                                  |

| Test Mode                                                                                   | Carrier frequency (MHz) | Average Power Measured (dBm) | Average Power with duty factor (dBm) | Limit (dBm) | Conclusion |
|---------------------------------------------------------------------------------------------|-------------------------|------------------------------|--------------------------------------|-------------|------------|
| 802.11b                                                                                     | 2412                    | 17.07                        | 17.07                                | 30          | PASS       |
|                                                                                             | 2437                    | 17.28                        | 17.28                                | 30          | PASS       |
|                                                                                             | 2462                    | 16.97                        | 16.97                                | 30          | PASS       |
| 802.11g                                                                                     | 2412                    | 16.20                        | 16.20                                | 30          | PASS       |
|                                                                                             | 2437                    | 16.41                        | 16.41                                | 30          | PASS       |
|                                                                                             | 2462                    | 16.15                        | 16.15                                | 30          | PASS       |
| 802.11n HT20                                                                                | 2412                    | 16.14                        | 16.14                                | 30          | PASS       |
|                                                                                             | 2437                    | 16.37                        | 16.37                                | 30          | PASS       |
|                                                                                             | 2462                    | 15.97                        | 15.97                                | 30          | PASS       |
| 802.11n HT40                                                                                | 2422                    | 15.23                        | 15.23                                | 30          | PASS       |
|                                                                                             | 2437                    | 16.45                        | 16.45                                | 30          | PASS       |
|                                                                                             | 2452                    | 16.31                        | 16.31                                | 30          | PASS       |
| Bluetooth (Low Energy)                                                                      | 2402                    | 2.93                         | 3.67                                 | 30          | PASS       |
|                                                                                             | 2440                    | 3.65                         | 4.39                                 | 30          | PASS       |
|                                                                                             | 2480                    | 4.09                         | 4.83                                 | 30          | PASS       |
| Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor |                         |                              |                                      |             |            |

## 5.2. 99% Bandwidth and 6dB Bandwidth

### Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.  
Detector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

### Test Setup



### Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

|                        |           |
|------------------------|-----------|
| minimum 6 dB bandwidth | ≥ 500 kHz |
|------------------------|-----------|

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.


**Test Results:**

| Test Mode                 | Carrier frequency (MHz) | 99% bandwidth (MHz) | Minimum 6 dB bandwidth (MHz) | Limit (MHz) | Conclusion |
|---------------------------|-------------------------|---------------------|------------------------------|-------------|------------|
| 802.11b                   | 2412                    | 13.038              | 10.08                        | 0.5         | PASS       |
|                           | 2437                    | 13.019              | 10.08                        | 0.5         | PASS       |
|                           | 2462                    | 13.064              | 10.03                        | 0.5         | PASS       |
| 802.11g                   | 2412                    | 16.828              | 16.50                        | 0.5         | PASS       |
|                           | 2437                    | 16.765              | 16.53                        | 0.5         | PASS       |
|                           | 2462                    | 16.827              | 16.50                        | 0.5         | PASS       |
| 802.11n<br>HT20           | 2412                    | 17.692              | 17.68                        | 0.5         | PASS       |
|                           | 2437                    | 17.675              | 17.66                        | 0.5         | PASS       |
|                           | 2462                    | 17.712              | 17.67                        | 0.5         | PASS       |
| 802.11n<br>HT40           | 2422                    | 35.922              | 36.37                        | 0.5         | PASS       |
|                           | 2437                    | 36.587              | 36.56                        | 0.5         | PASS       |
|                           | 2452                    | 36.670              | 36.53                        | 0.5         | PASS       |
| Bluetooth<br>(Low Energy) | 2402                    | 1.021               | 0.65                         | 0.5         | PASS       |
|                           | 2440                    | 1.024               | 0.65                         | 0.5         | PASS       |
|                           | 2480                    | 1.026               | 0.65                         | 0.5         | PASS       |




## 99%bandwidth


802.11b, Carrier frequency (MHz): 2412

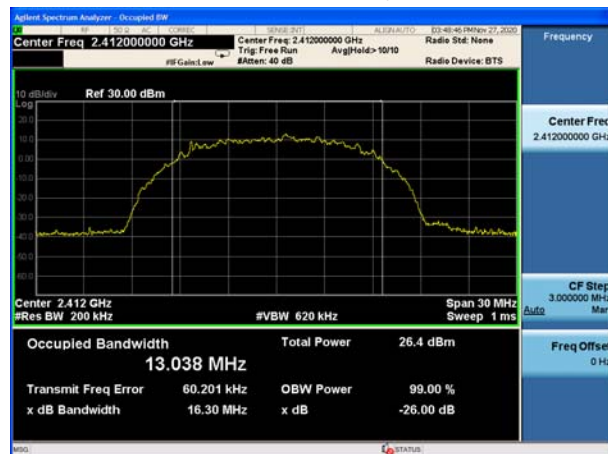

802.11g, Carrier frequency (MHz): 2412

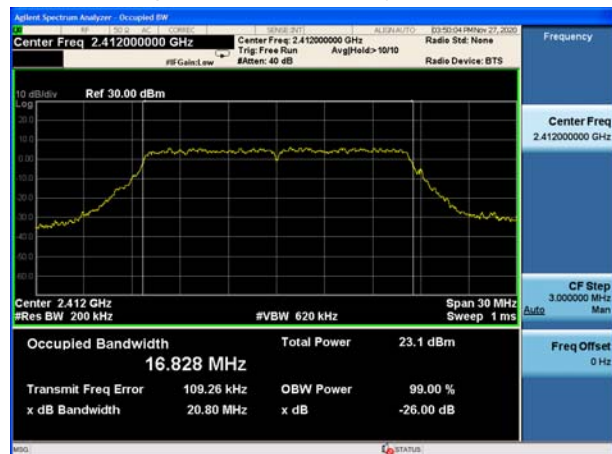


802.11b, Carrier frequency (MHz): 2437

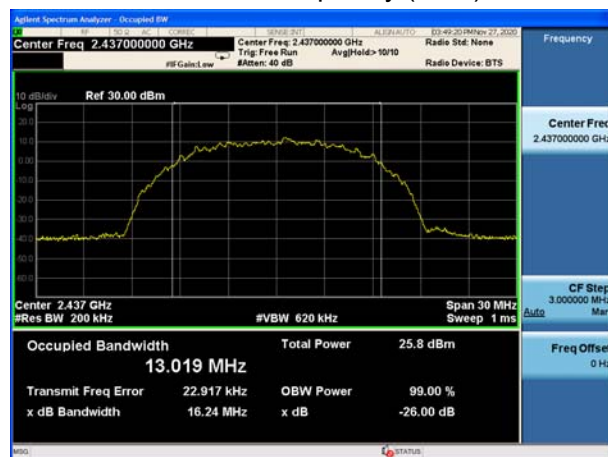

802.11g, Carrier frequency (MHz): 2437



802.11b, Carrier frequency (MHz): 2462

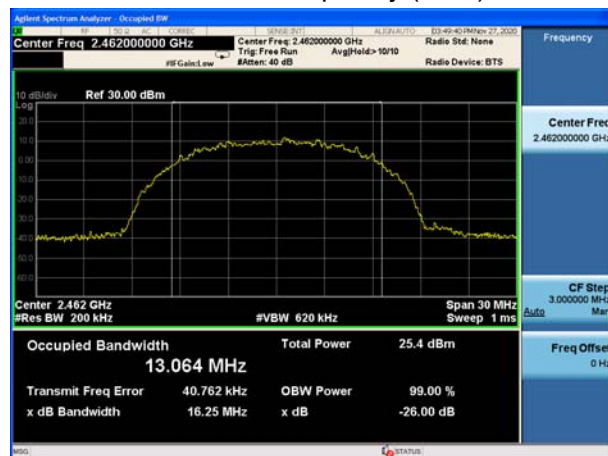

802.11g, Carrier frequency (MHz): 2462




## 802.11n(HT20), Carrier frequency (MHz): 2412




## 802.11n(HT40), Carrier frequency (MHz): 2422




## 802.11n(HT20), Carrier frequency (MHz): 2437

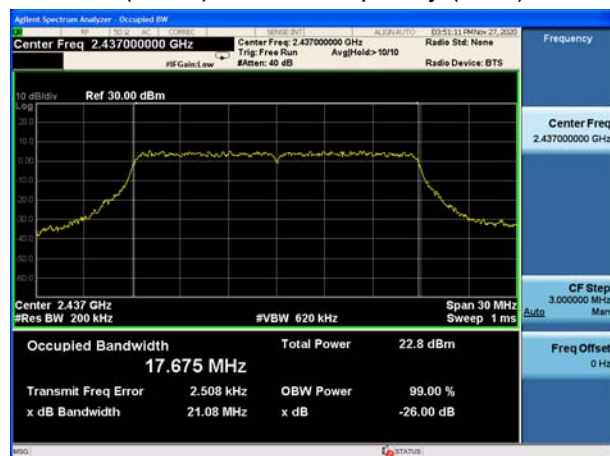


## 802.11n(HT40), Carrier frequency (MHz): 2437

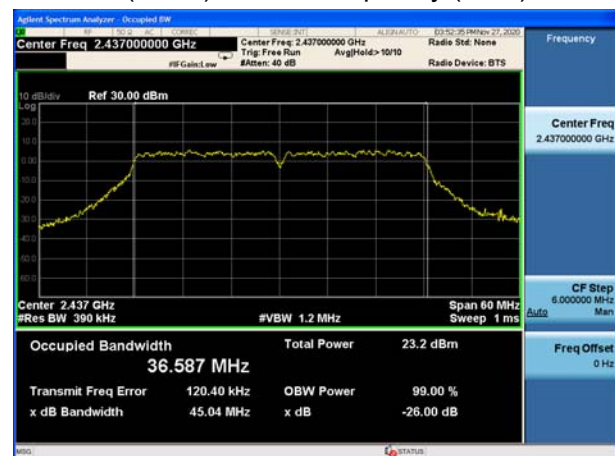

## 802.11n(HT20), Carrier frequency (MHz): 2462

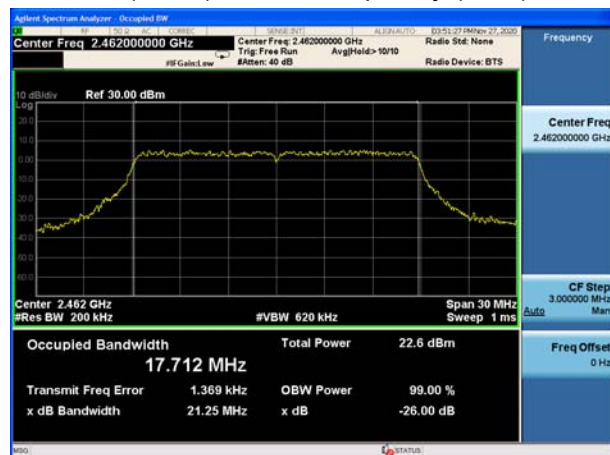


## 802.11n(HT40), Carrier frequency (MHz): 2452

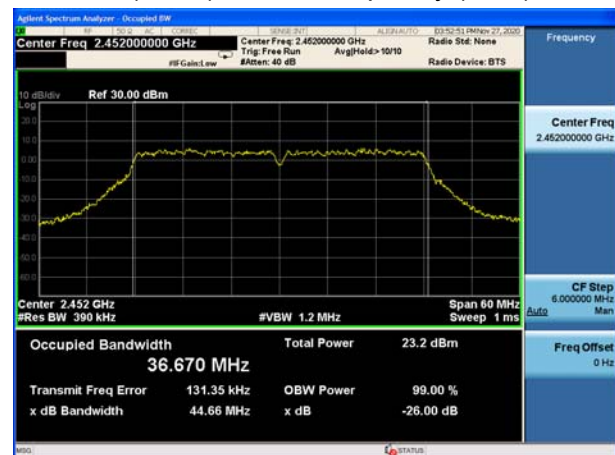

### BLE Carrier frequency (MHz): 2402



### BLE Carrier frequency (MHz): 2440

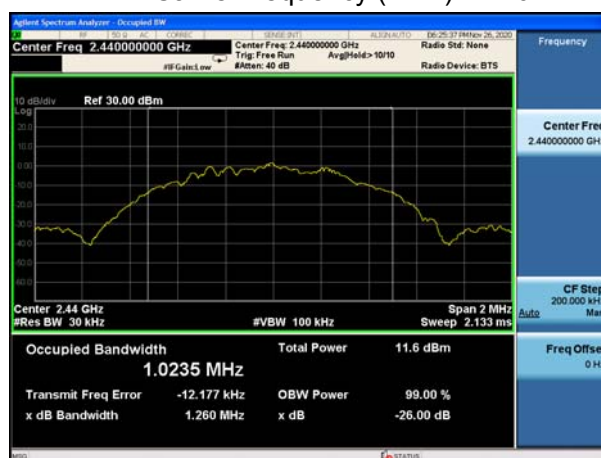

### BLE Carrier frequency (MHz): 2480









## 6 dB bandwidth


802.11b, Carrier frequency (MHz): 2412

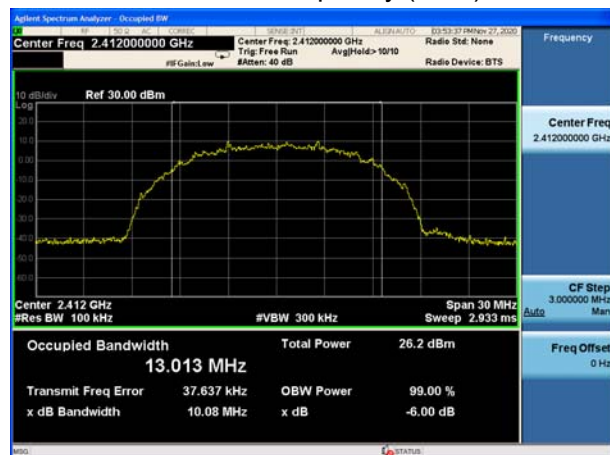


802.11g, Carrier frequency (MHz): 2412

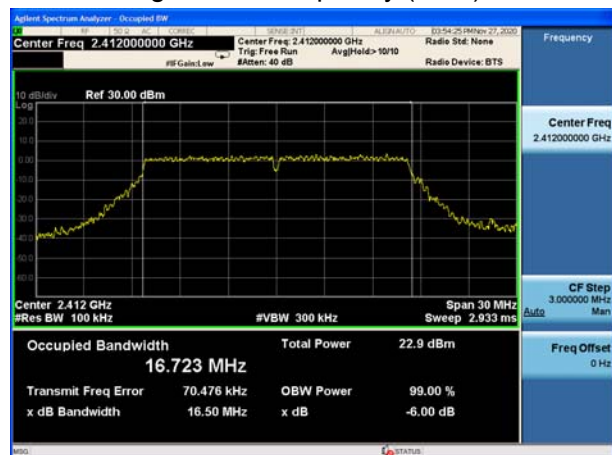


802.11b, Carrier frequency (MHz): 2437

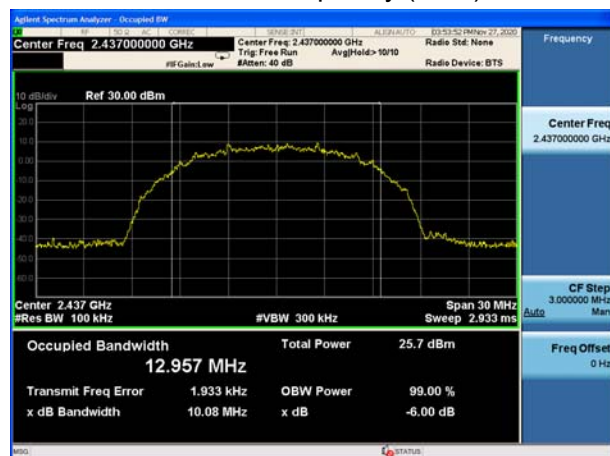


802.11g, Carrier frequency (MHz): 2437

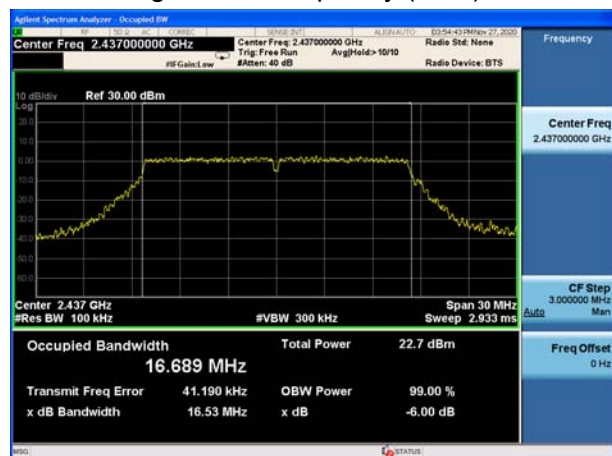

802.11b, Carrier frequency (MHz): 2462

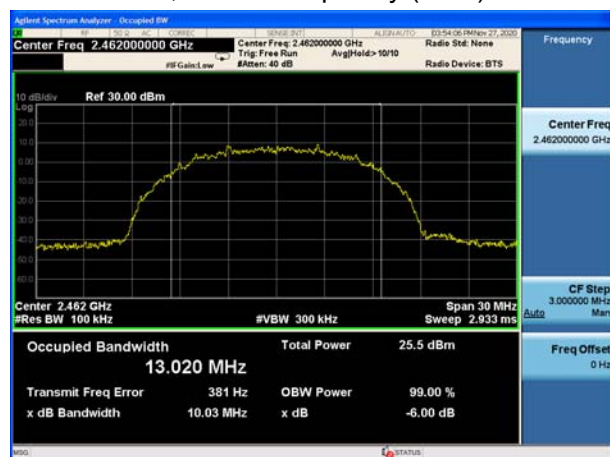


802.11g, Carrier frequency (MHz): 2462

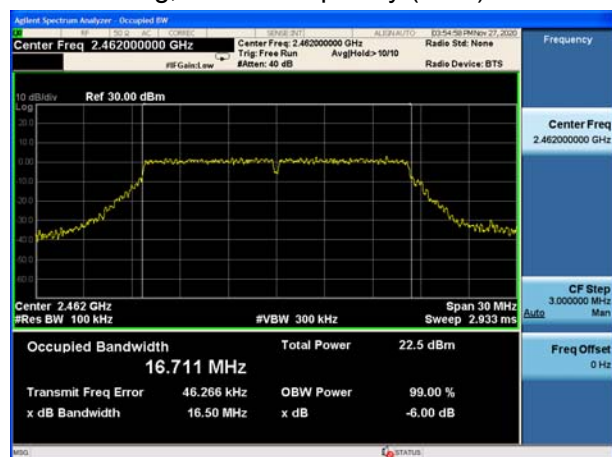





802.11n(HT20), Carrier frequency (MHz): 2412

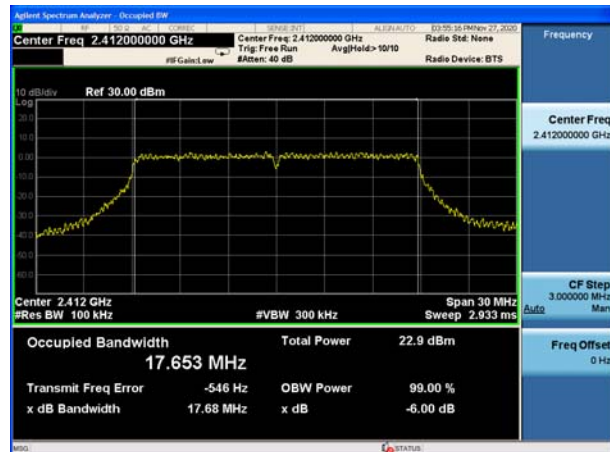


802.11n(HT40), Carrier frequency (MHz): 2422

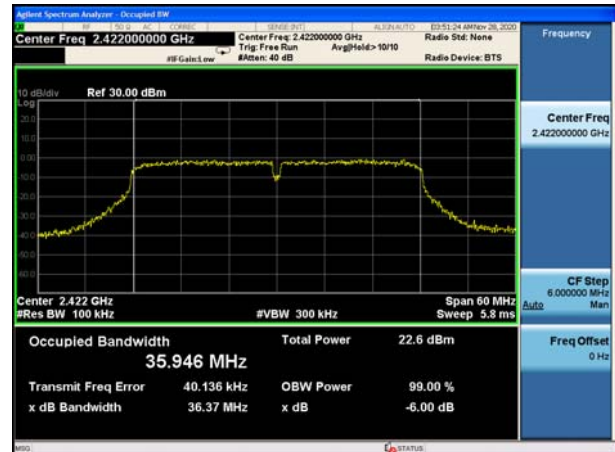


802.11n(HT20), Carrier frequency (MHz): 2437

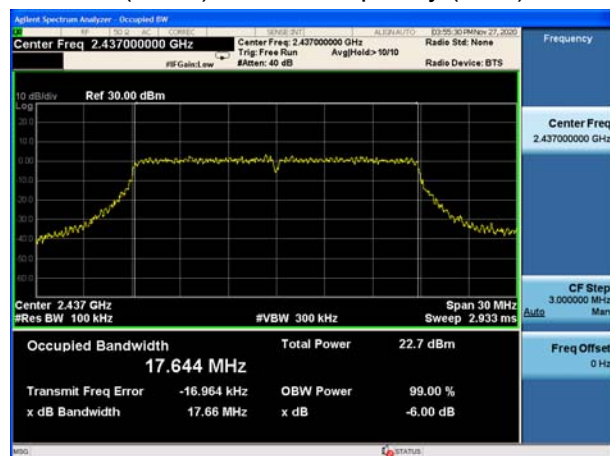


802.11n(HT40), Carrier frequency (MHz): 2437

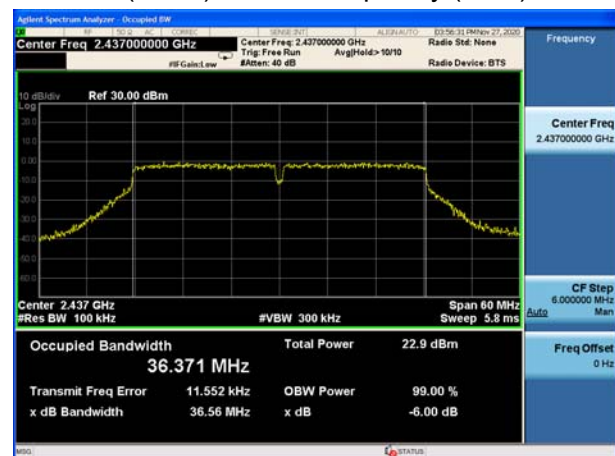


802.11n(HT20), Carrier frequency (MHz): 2462

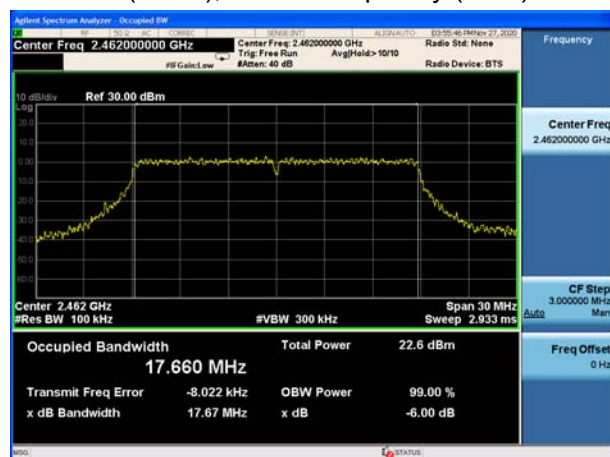

802.11n(HT40), Carrier frequency (MHz): 2452

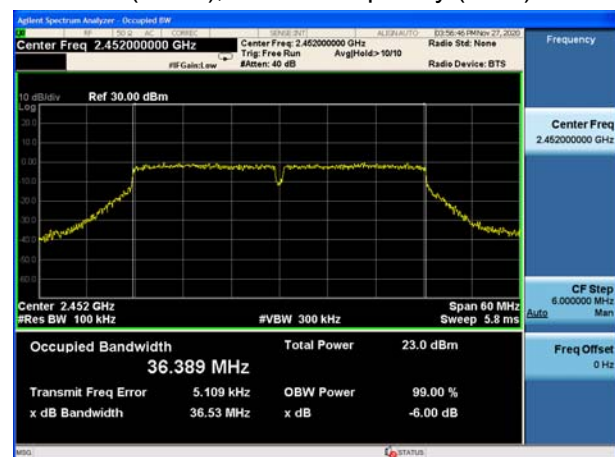


### BLE Carrier frequency (MHz): 2402

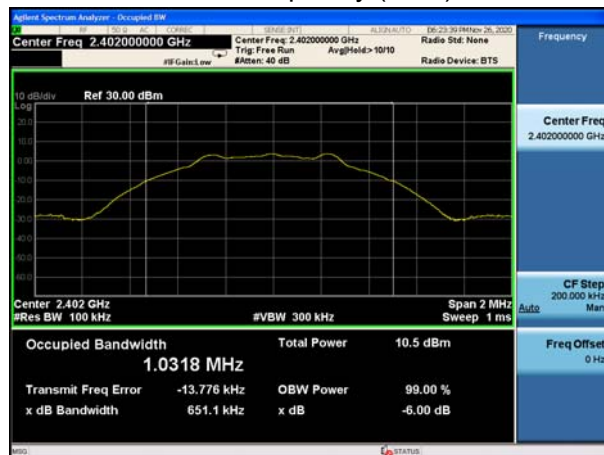

### BLE Carrier frequency (MHz): 2440



### BLE Carrier frequency (MHz): 2480

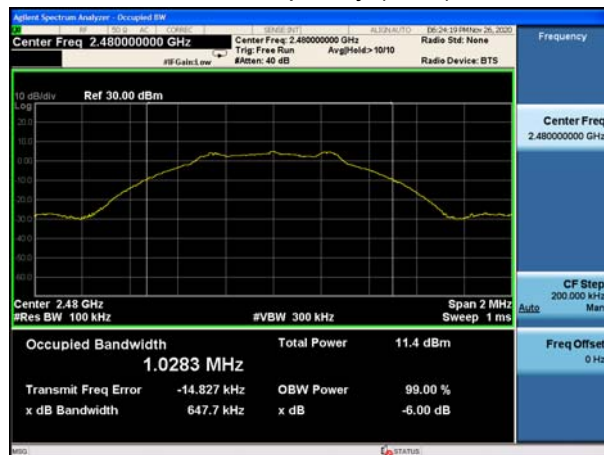

### 5.3. Band Edge


#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup



#### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

#### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

| Frequency | Uncertainty |
|-----------|-------------|
| 2GHz-3GHz | 1.407 dB    |




## Test Results: PASS


802.11b, Channel No.: 1

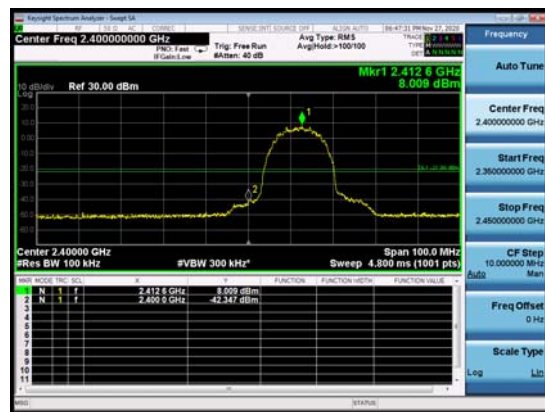


802.11b, Channel No.: 11

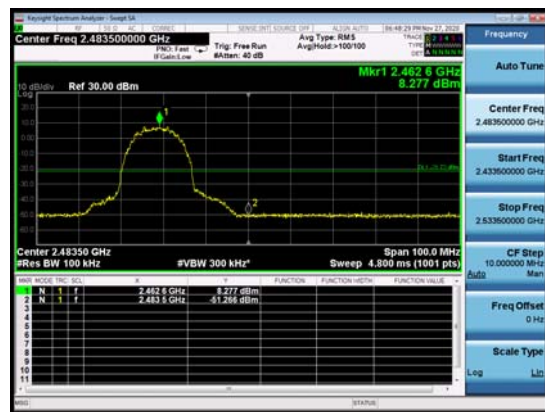


802.11g, Channel No.: 1

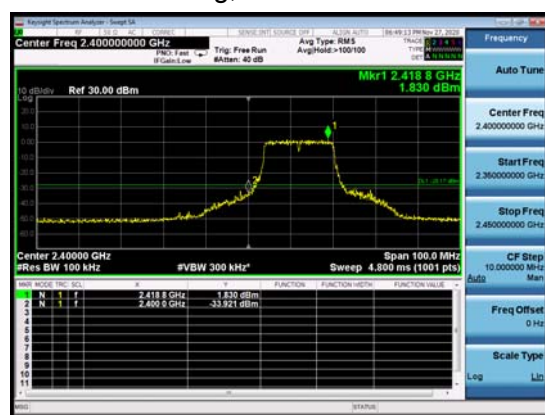


802.11g, Channel No.: 11

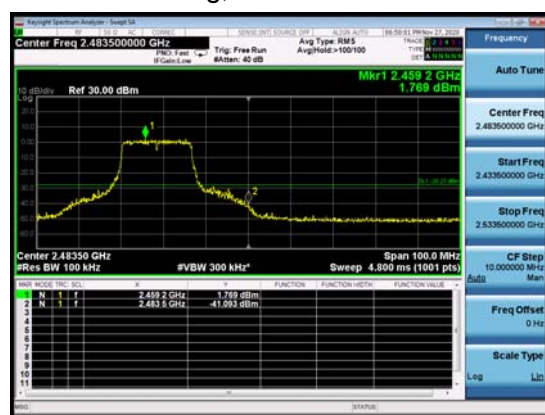


802.11n(HT20), Channel No.: 1

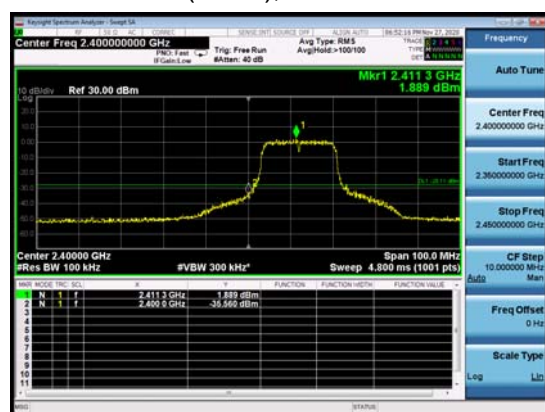

802.11n(HT20), Channel No.: 11

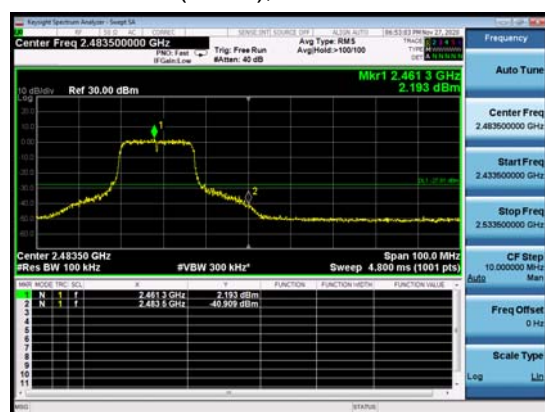


802.11n(HT40), Channel No.: 3

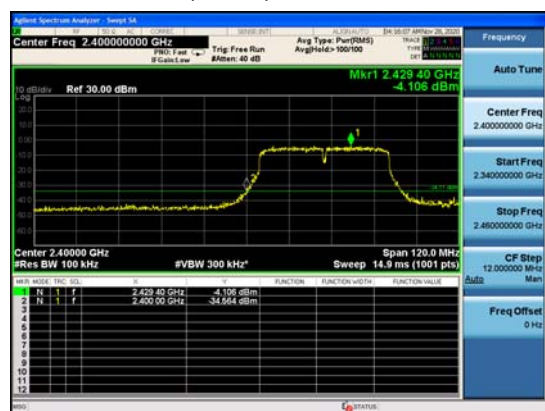

802.11n(HT40), Channel No.: 9





## 5.4. Power Spectral Density

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss.

The EUT is max power transmission with proper modulation.

Method AVGPSD-1 was used for this test.

- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- Set VBW  $\geq [3 \times \text{RBW}]$
- Detector=power averaging(rms) or sample detector(when rms not available)
- Ensure that the number of measurement points in the sweep  $2[2 \times \text{span}/\text{RBW}]$
- Sweep time auto couple
- Employ trace averaging(rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level.
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat(note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Method AVGPSD-2 was used for this test.


- Measure the duty cycle(D)of the transmitter output signal as described in 11.6
- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{Kh}$
- Set VBW  $\geq [3 \times \text{RBW}]$
- Detector= power averaging(rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep  $2[2 \times \text{span}/\text{RBW}]$
- Sweep time =auto couple
- Do not use sweep triggering; allow sweep to "free run"
- Employ trace averaging(rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level
- Add  $[10 \log(1/ D)]$ , where D is the duty cycle measured in step a), to the measured PSD to



compute the average PSD during the actual transmission time

m) If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

### Test setup



### Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. "

|        |                                    |
|--------|------------------------------------|
| Limits | $\leq 8 \text{ dBm} / 3\text{kHz}$ |
|--------|------------------------------------|

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:**


| Test Mode                                                             | Channel Number | Read Value (dBm / 3kHz) | Power Spectral Density (dBm / 3kHz) | Limit (dBm / 3kHz) | Conclusion |
|-----------------------------------------------------------------------|----------------|-------------------------|-------------------------------------|--------------------|------------|
| 802.11b                                                               | 1              | -15.98                  | -15.98                              | 8                  | PASS       |
|                                                                       | 6              | -16.10                  | -16.10                              | 8                  | PASS       |
|                                                                       | 11             | -16.15                  | -16.15                              | 8                  | PASS       |
| 802.11g                                                               | 1              | -18.80                  | -18.80                              | 8                  | PASS       |
|                                                                       | 6              | -18.89                  | -18.89                              | 8                  | PASS       |
|                                                                       | 11             | -19.12                  | -19.12                              | 8                  | PASS       |
| 802.11n<br>HT20                                                       | 1              | -18.81                  | -18.81                              | 8                  | PASS       |
|                                                                       | 6              | -19.21                  | -19.21                              | 8                  | PASS       |
|                                                                       | 11             | -19.26                  | -19.26                              | 8                  | PASS       |
| 802.11n<br>HT40                                                       | 3              | -22.84                  | -22.84                              | 8                  | PASS       |
|                                                                       | 6              | -22.75                  | -22.75                              | 8                  | PASS       |
|                                                                       | 9              | -22.61                  | -22.61                              | 8                  | PASS       |
| Bluetooth<br>(Low Energy)                                             | 0              | -17.64                  | -16.90                              | 8                  | PASS       |
|                                                                       | 19             | -17.94                  | -17.20                              | 8                  | PASS       |
|                                                                       | 39             | -15.73                  | -14.99                              | 8                  | PASS       |
| Note: Power Spectral Density =Read Value+Duty cycle correction factor |                |                         |                                     |                    |            |




802.11b, Channel No.: 1

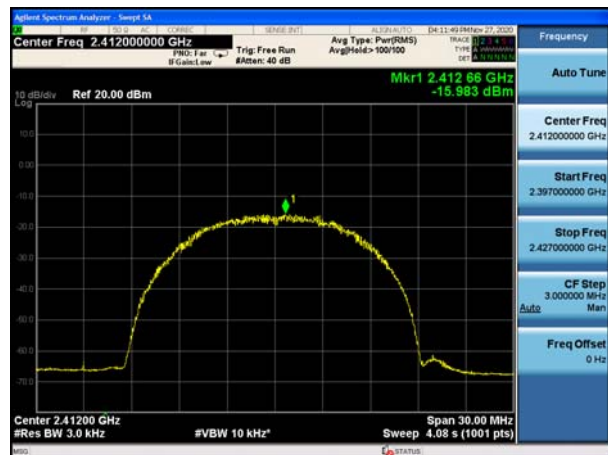


802.11g, Channel No.: 1

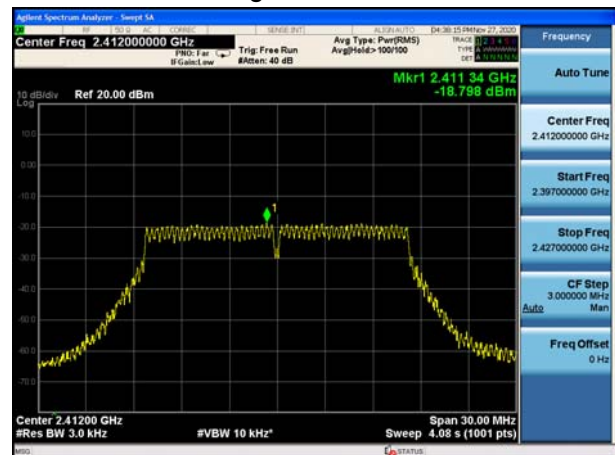


802.11b, Channel No.: 6

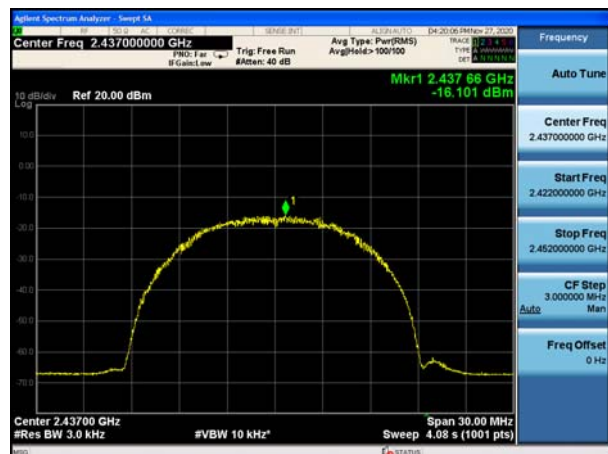


802.11g, Channel No.: 6

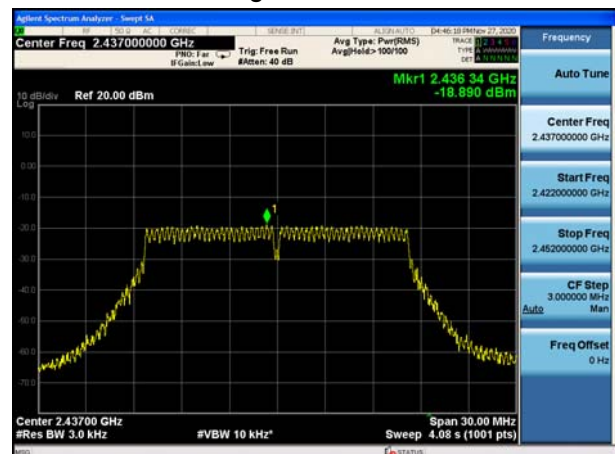


802.11b, Channel No.: 11

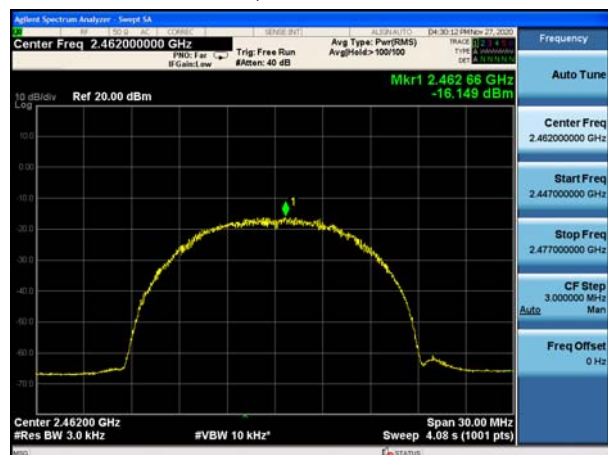


802.11g, Channel No.: 11

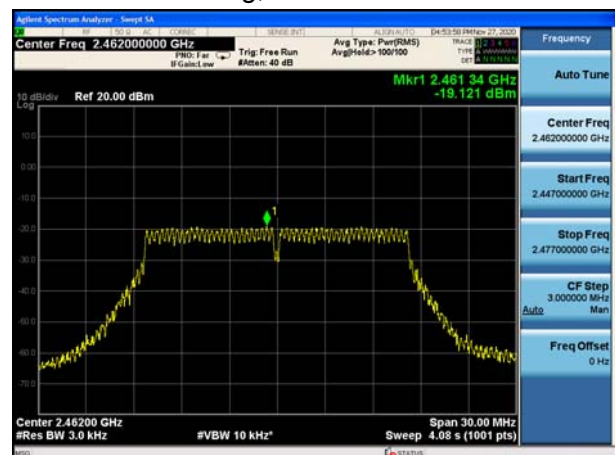


802.11n(HT20), Channel No. 1

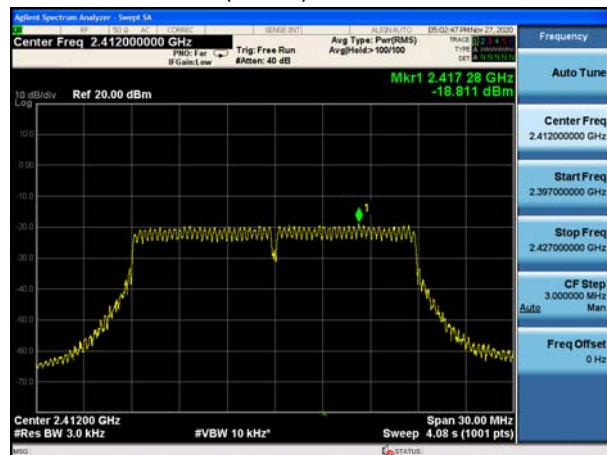


802.11n(HT40), Channel No. 3

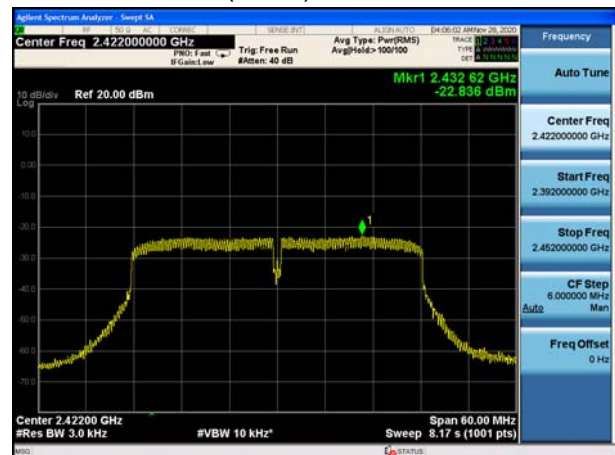


802.11n(HT20), Channel No. 6

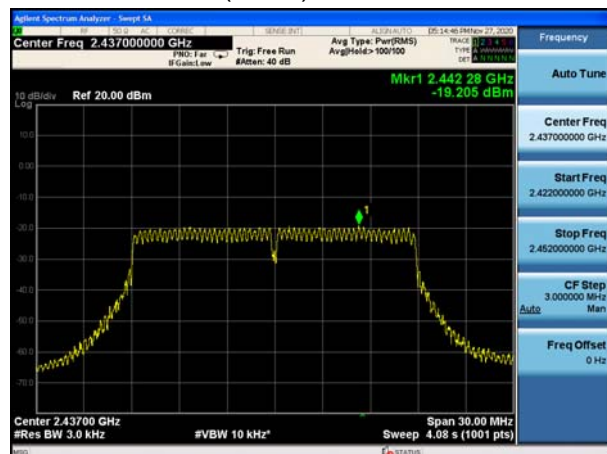


802.11n(HT40), Channel No. 6

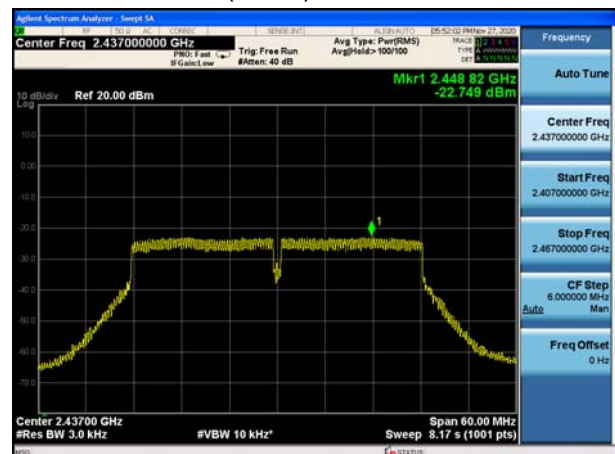

802.11n(HT20), Channel No. 11

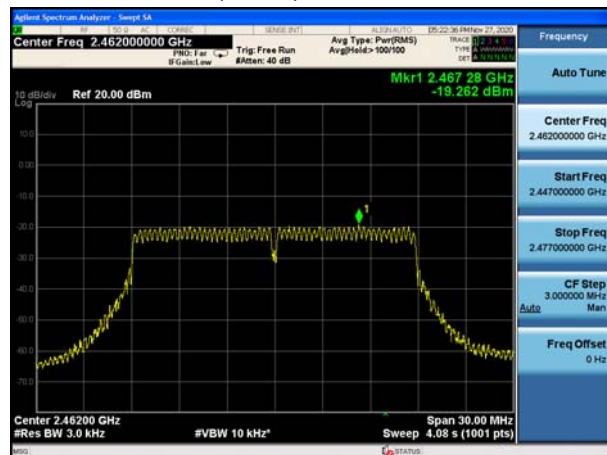


802.11n(HT40), Channel No. 9

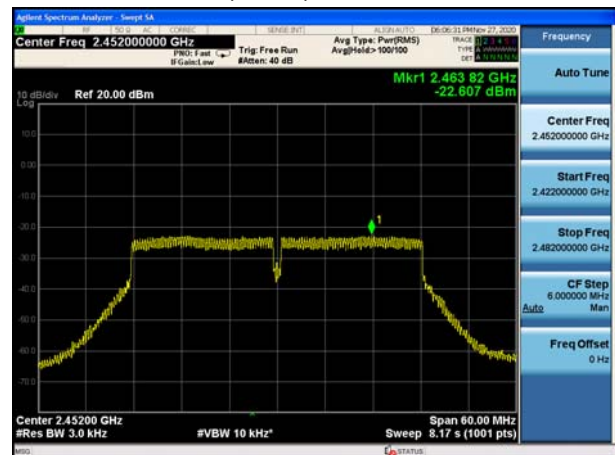

### BLE, Channel No.: 0



### BLE, Channel No.: 19

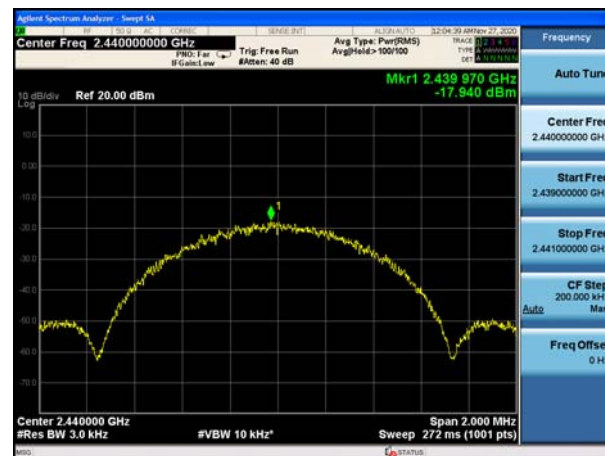

### BLE, Channel No.: 39



## 5.5. Spurious RF Conducted Emissions

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

### Test setup



### Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. ”

| Test Mode                 | Carrier frequency (MHz) | Reference value (dBm) | Limit  |
|---------------------------|-------------------------|-----------------------|--------|
| 802.11b                   | 2412                    | -5.34                 | -35.34 |
|                           | 2437                    | -5.45                 | -35.45 |
|                           | 2462                    | -4.96                 | -34.96 |
| 802.11g                   | 2412                    | -7.21                 | -37.21 |
|                           | 2437                    | -7.26                 | -37.26 |
|                           | 2462                    | -7.17                 | -37.17 |
| 802.11n<br>HT20           | 2412                    | -7.54                 | -37.54 |
|                           | 2437                    | -7.27                 | -37.27 |
|                           | 2462                    | -7.34                 | -37.34 |
| 802.11n<br>HT40           | 2422                    | -10.96                | -40.96 |
|                           | 2437                    | -8.30                 | -38.30 |
|                           | 2452                    | -9.51                 | -39.51 |
| Bluetooth<br>(Low Energy) | 2402                    | -15.70                | -45.70 |
|                           | 2440                    | -15.19                | -45.19 |
|                           | 2480                    | -15.21                | -45.21 |

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

| Frequency   | Uncertainty |
|-------------|-------------|
| 100kHz-2GHz | 0.684 dB    |
| 2GHz-26GHz  | 1.407 dB    |






## Test Results:


802.11b, Channel No.: 1




802.11g, Channel No.: 1

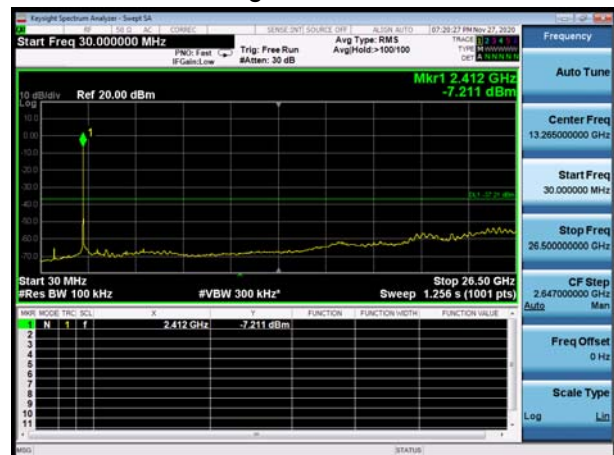


802.11b, Channel No.: 6

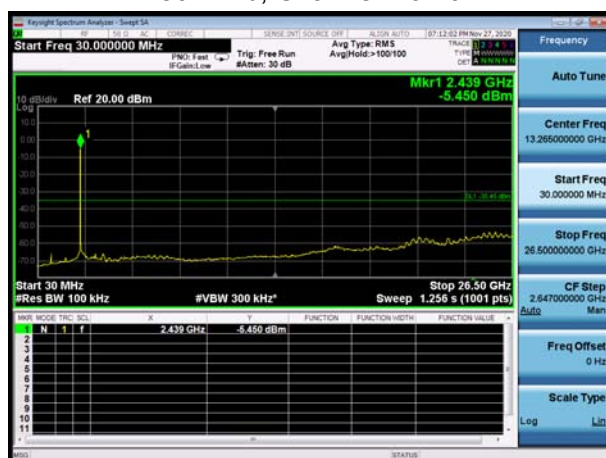


802.11g, Channel No.: 6

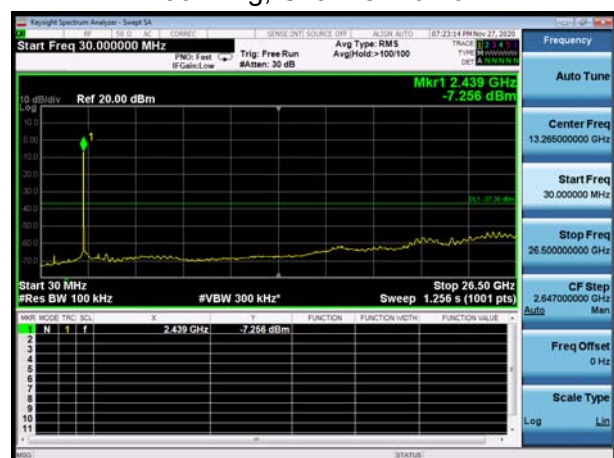

802.11b, Channel No.: 11

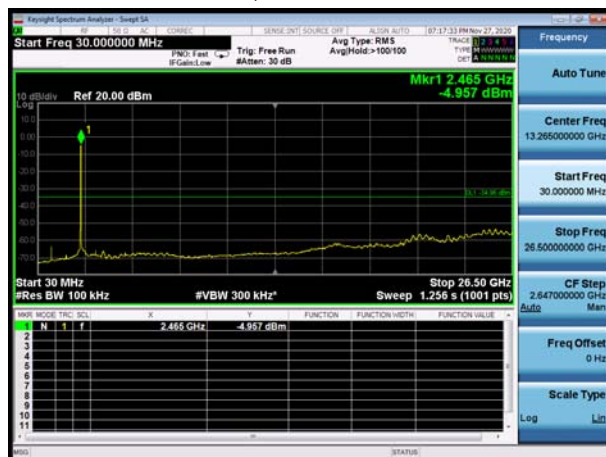


802.11g, Channel No.: 11

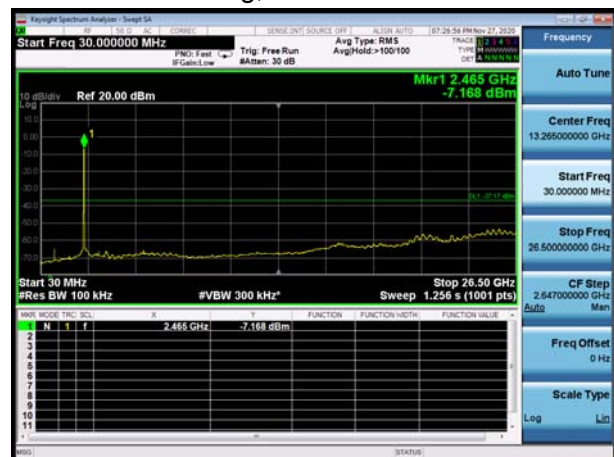





802.11n(HT20), Channel No. 1

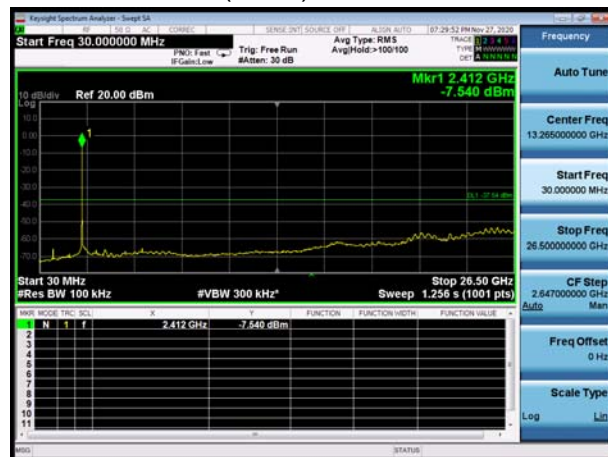


802.11n(HT40), Channel No. 3

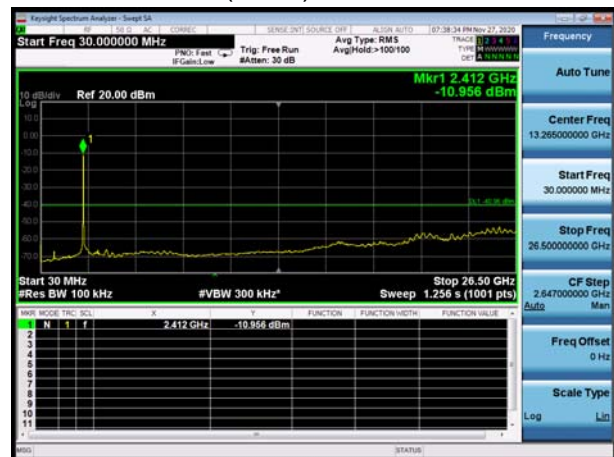


802.11n(HT20), Channel No. 6

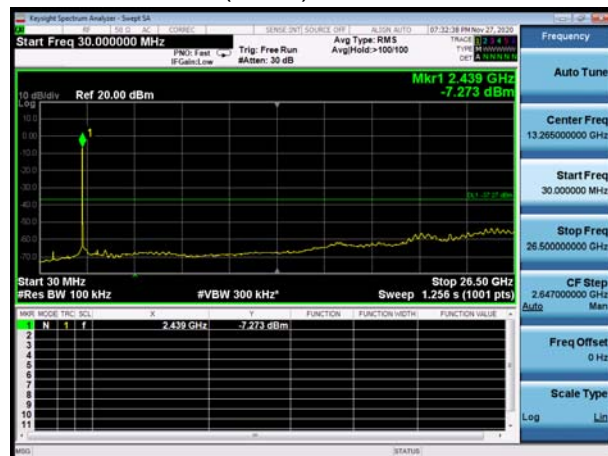


802.11n(HT40), Channel No. 6

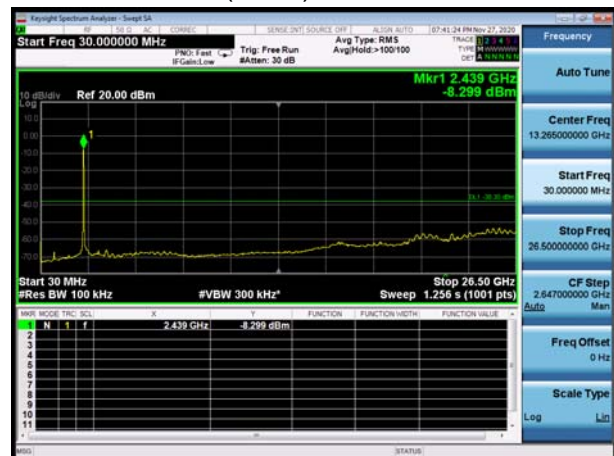

802.11n(HT20), Channel No. 11

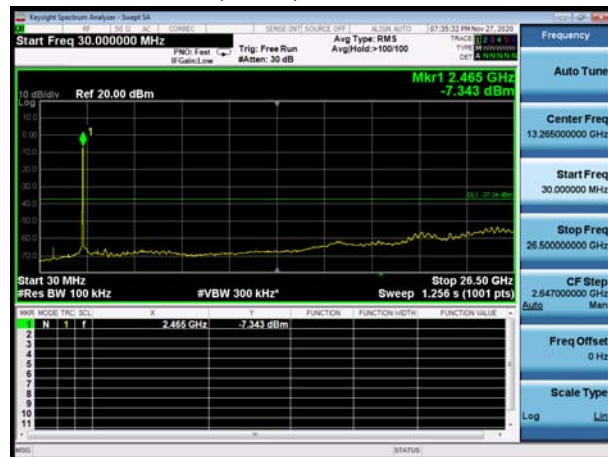


802.11n(HT40), Channel No. 9

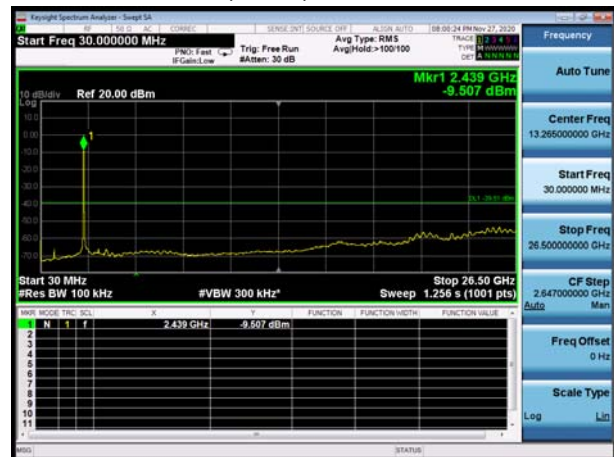





BLE, Channel No.: 0

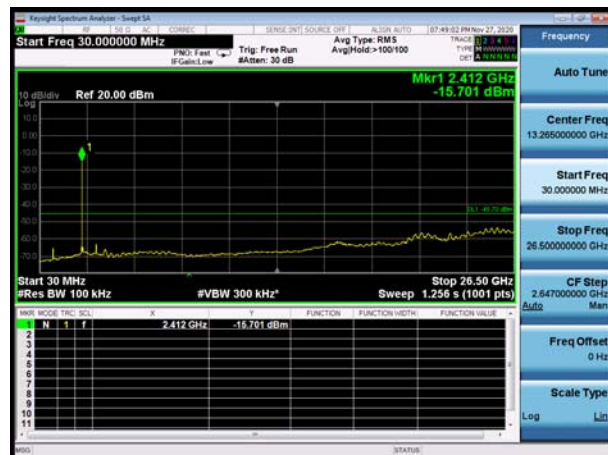

BLE, Channel No.: 19

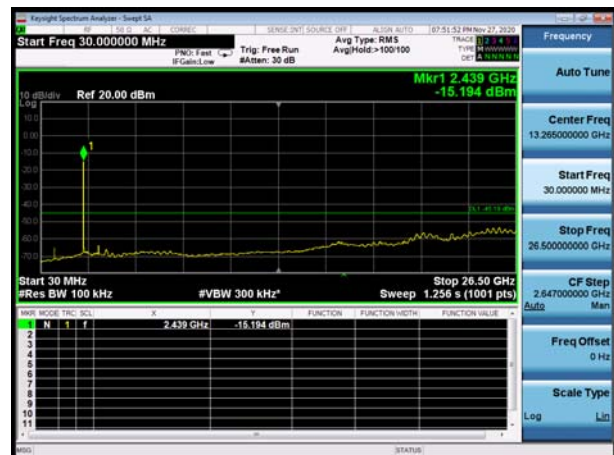

BLE, Channel No.: 39

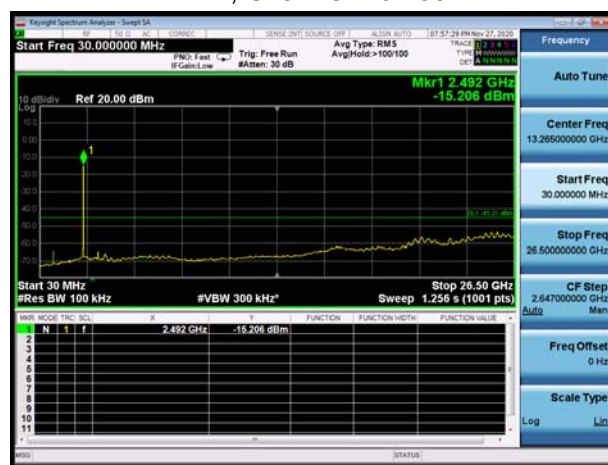



## 5.6. Unwanted Emission

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 102.5kPa |

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10-2013.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where  $D$  is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where  $D$  is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where  $D$  is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.

# Test setup


9KHz ~ 30MHz

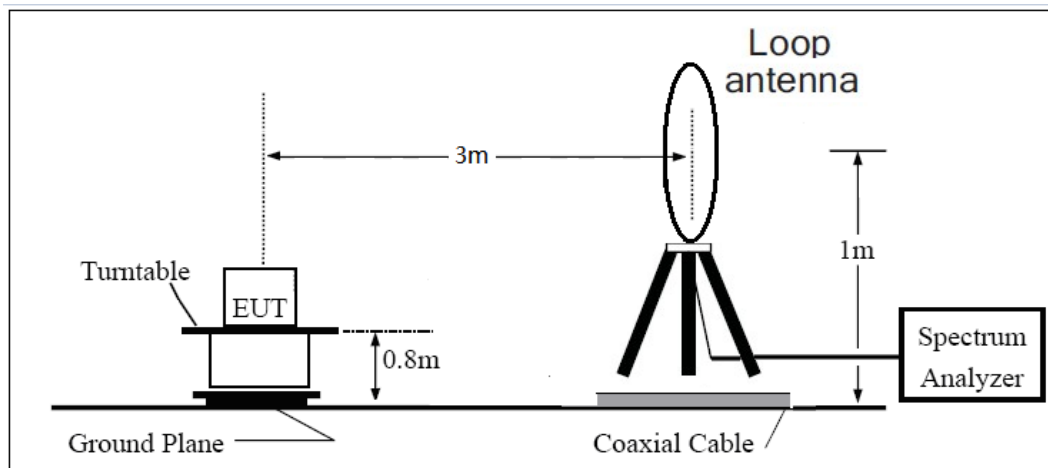

30MHz ~ 1GHz

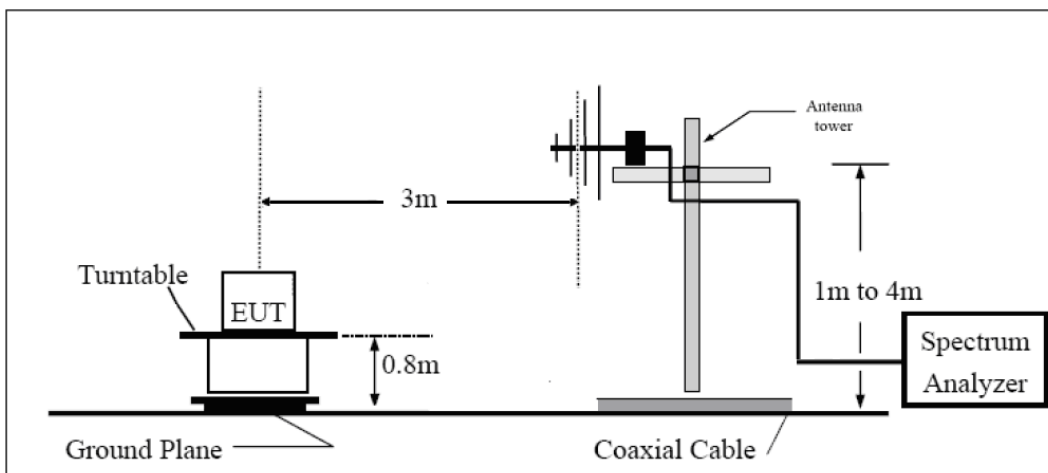

Above 1GHz

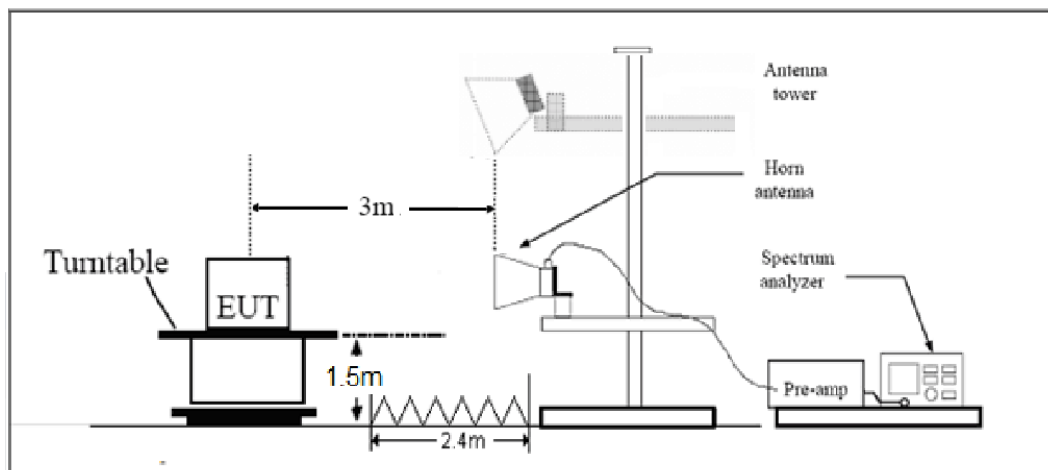

Note: Area side:2.4mX3.6m

## Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 0.009–0.490                 | 2400/F(kHz)          | /                      |
| 0.490–1.705                 | 24000/F(kHz)         | /                      |
| 1.705–30.0                  | 30                   | /                      |
| 30–88                       | 100                  | 40                     |
| 88–216                      | 150                  | 43.5                   |
| 216–960                     | 200                  | 46                     |
| Above960                    | 500                  | 54                     |

### §15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              |                       |                 |                  |


**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


| Frequency     | Uncertainty |
|---------------|-------------|
| 9KHz-30MHz    | 3.55 dB     |
| 30MHz-200MHz  | 4.17 dB     |
| 200MHz-1GHz   | 4.84 dB     |
| 1-18GHz       | 4.35 dB     |
| 18-26.5GHz    | 5.90 dB     |
| 26.5GHz~40GHz | 5.92 dB     |




## Test Results:

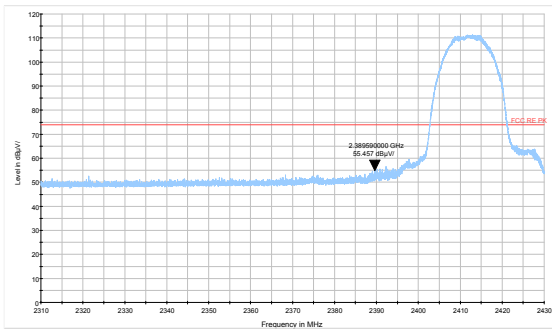


802.11b-Channel 1 Peak

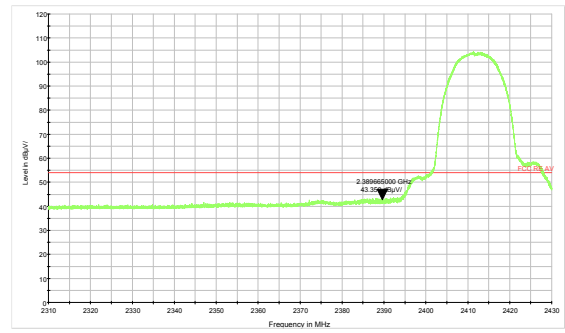


802.11b-Channel 1 Average

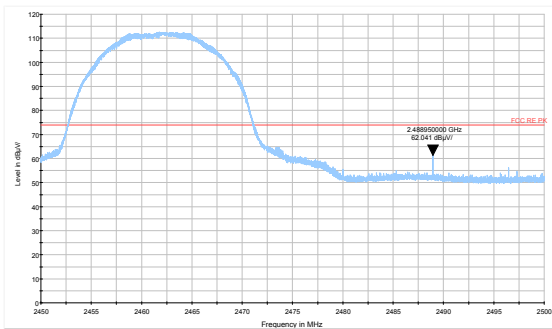


802.11b-Channel 11 Peak

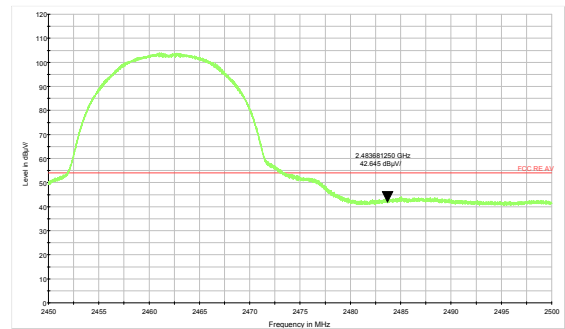


802.11b-Channel 11 Average

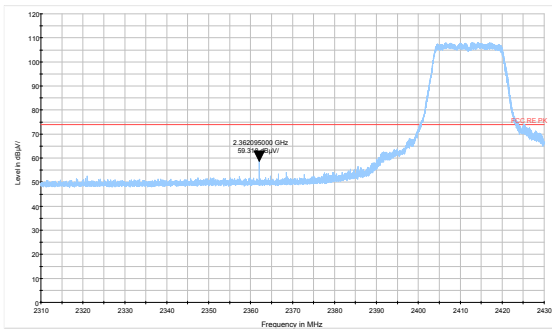


802.11g-Channel 1 Peak

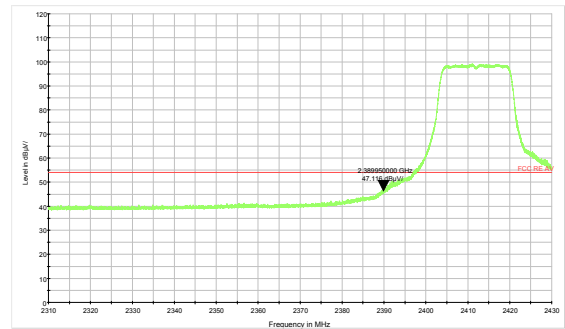


802.11g-Channel 1 Average

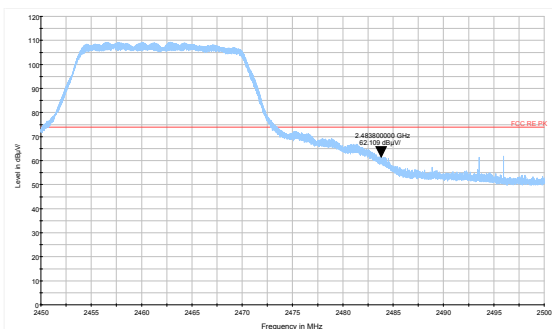


802.11g-Channel 11 Peak

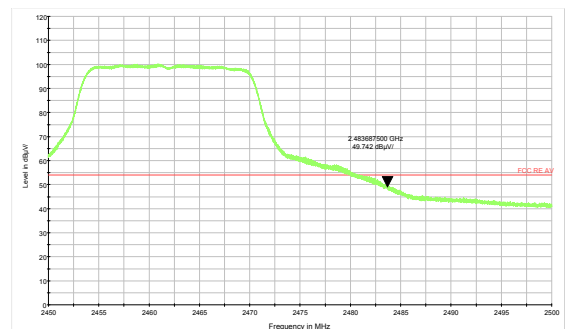


802.11g-Channel 11 Average

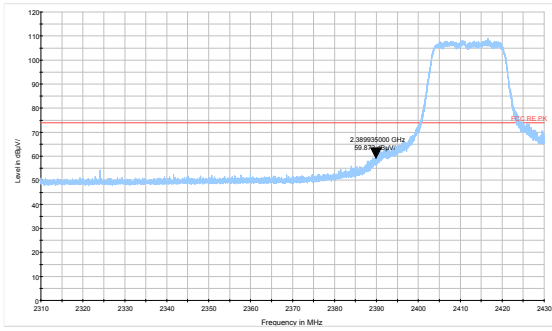


802.11n HT20 -Channel 1 Peak

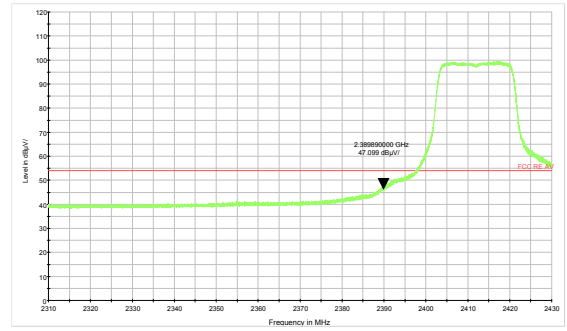


802.11n HT20 -Channel 1 Average

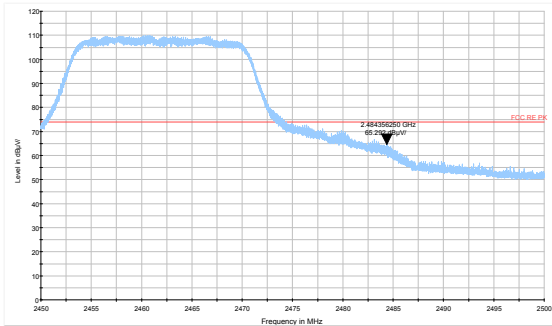


802.11n HT20 -Channel 11 Peak

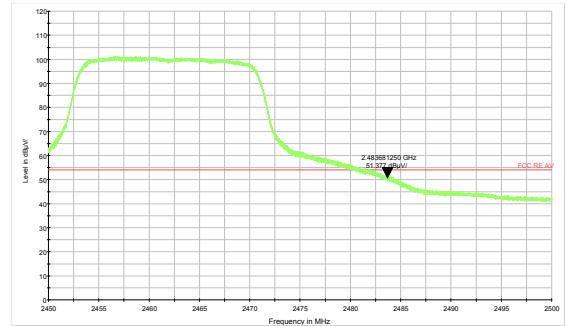


802.11n HT20 -Channel 11 Average

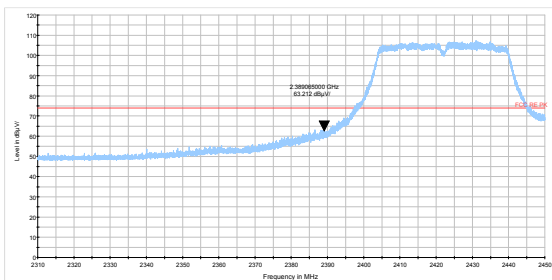


802.11n HT40 -Channel 3 Peak

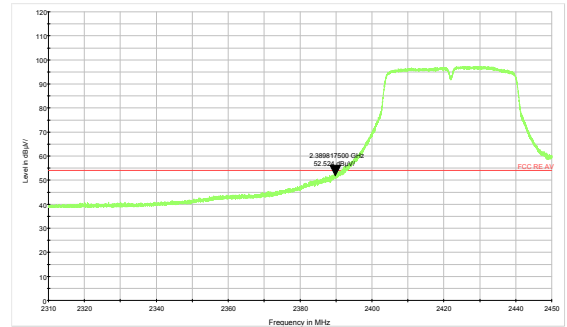

802.11n HT40 -Channel 3 Average

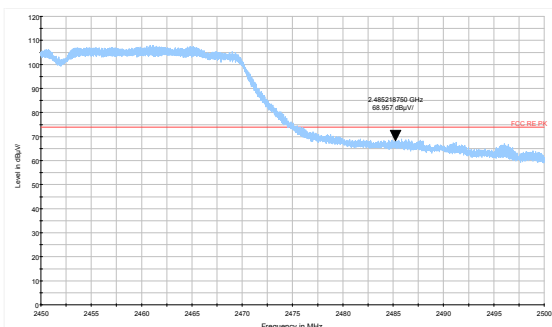


802.11n HT40 -Channel 9 Peak

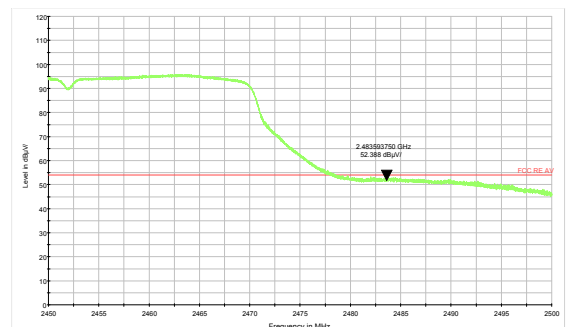


802.11n HT40 -Channel 9 Average




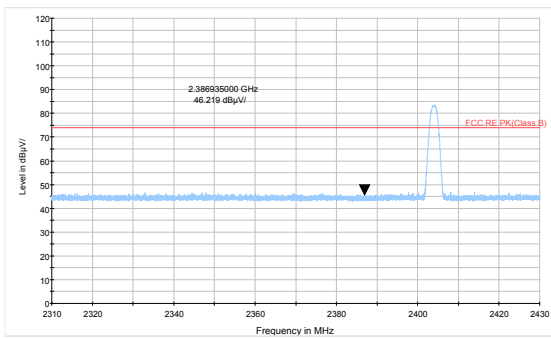


BLE Channel 0 Peak

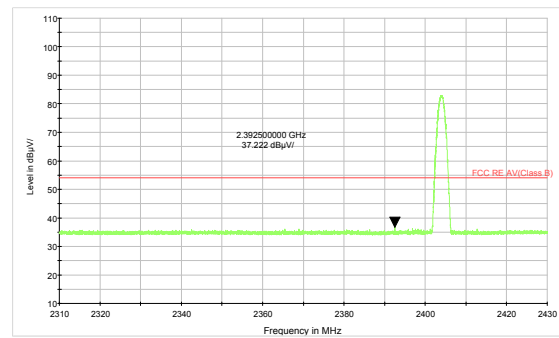

BLE Channel 0 Average

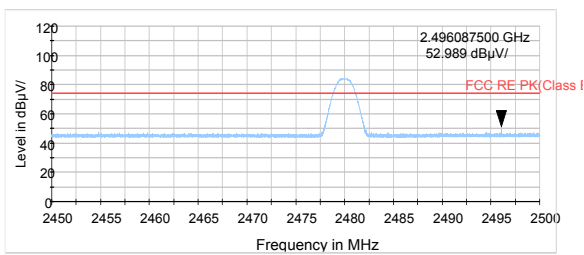

BLE Channel 39 Peak

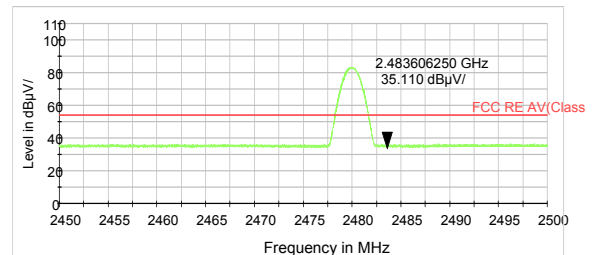

BLE Channel 39 Average

## Result of RE


### Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 18GHz-26.5GHz are more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.  
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, BLE-Channel 0 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

### Continuous TX mode:

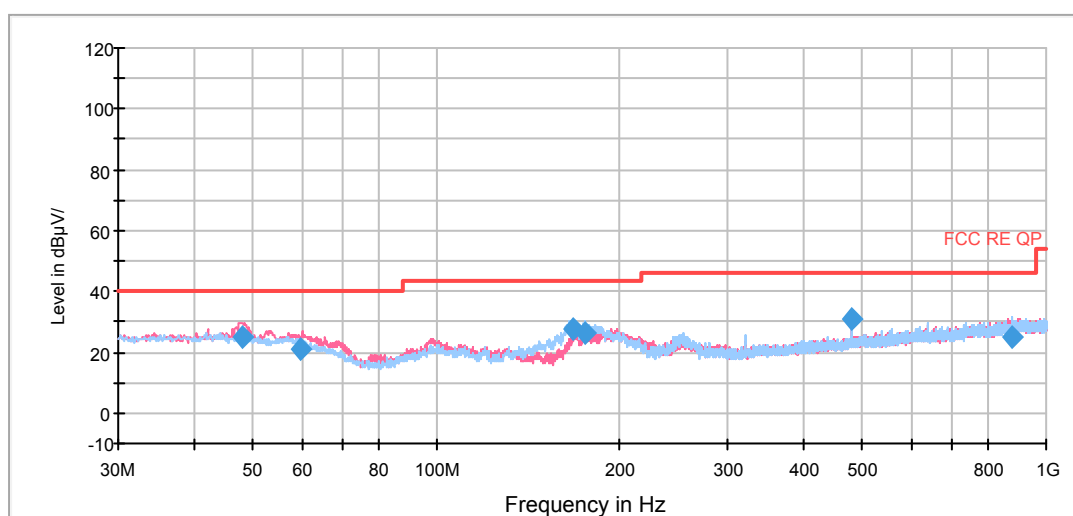


Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 48.025000       | 25.0                | 100.0       | V            | 10.0          | -13.2               | 15.0        | 40.0           |
| 59.912500       | 21.3                | 100.0       | V            | 336.0         | -14.4               | 18.7        | 40.0           |
| 167.578750      | 27.4                | 225.0       | H            | 268.0         | -20.5               | 16.1        | 43.5           |
| 175.577500      | 26.2                | 200.0       | H            | 83.0          | -20.3               | 17.3        | 43.5           |
| 479.998750      | 30.9                | 175.0       | H            | 317.0         | -12.4               | 15.1        | 46.0           |
| 881.420000      | 24.7                | 175.0       | H            | 330.0         | -5.8                | 21.3        | 46.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

## 802.11b CH1

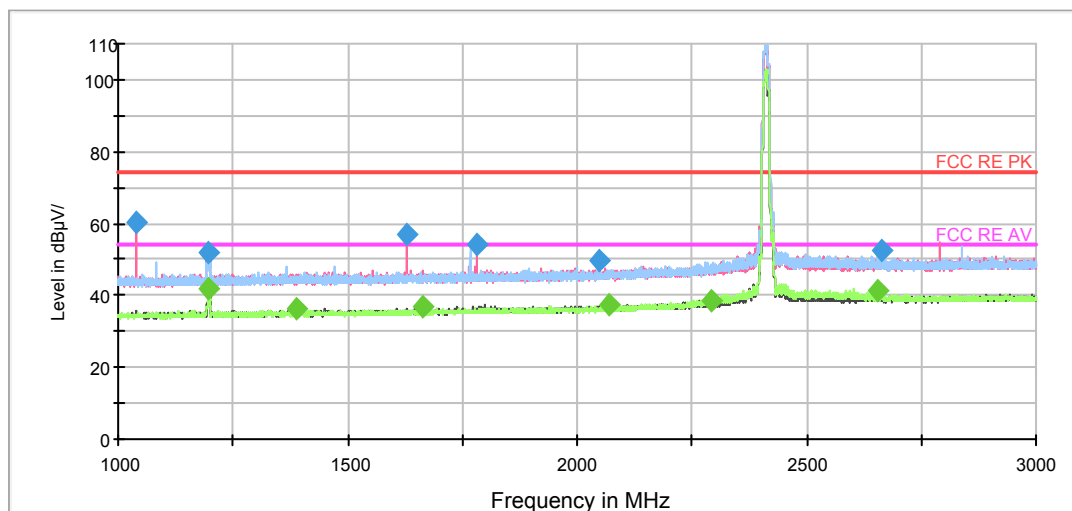

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1040.250000     | 60.1          | 100.0       | V            | 216.0         | -1.7                | 13.9        | 74.0           |
| 1196.250000     | 51.7          | 100.0       | V            | 130.0         | -1.2                | 22.3        | 74.0           |
| 1629.500000     | 56.8          | 100.0       | V            | 216.0         | 0.1                 | 17.2        | 74.0           |
| 1780.000000     | 54.0          | 100.0       | V            | 216.0         | 0.6                 | 20.0        | 74.0           |
| 2048.500000     | 49.6          | 100.0       | V            | 216.0         | 1.4                 | 24.4        | 74.0           |
| 2662.250000     | 52.3          | 100.0       | V            | 355.0         | 3.9                 | 21.7        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1195.250000     | 41.9             | 100.0       | H            | 200.0         | -1.2                | 12.1        | 54.0           |
| 1390.750000     | 36.2             | 200.0       | V            | 132.0         | -0.7                | 17.8        | 54.0           |
| 1663.000000     | 36.8             | 200.0       | V            | 36.0          | 0.2                 | 17.2        | 54.0           |
| 2069.500000     | 37.3             | 100.0       | H            | 15.0          | 1.5                 | 16.7        | 54.0           |
| 2292.750000     | 38.7             | 100.0       | H            | 176.0         | 2.7                 | 15.3        | 54.0           |
| 2656.250000     | 41.1             | 100.0       | V            | 39.0          | 3.9                 | 12.9        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

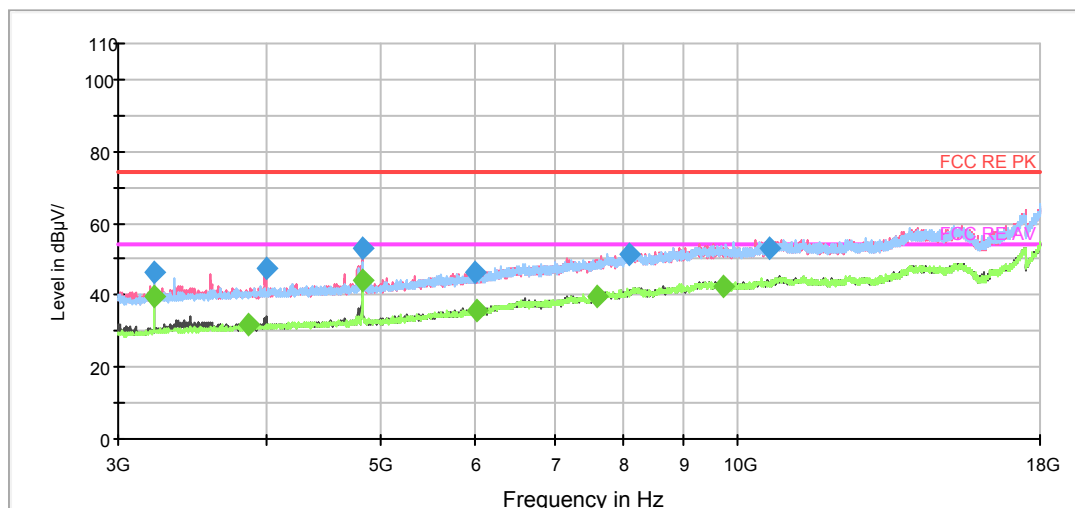

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3215.625000     | 46.1          | 100.0       | H            | 352.0         | -4.7                | 27.9        | 74.0           |
| 3995.625000     | 47.2          | 100.0       | V            | 247.0         | -2.7                | 26.8        | 74.0           |
| 4822.500000     | 53.1          | 200.0       | V            | 0.0           | -0.6                | 20.9        | 74.0           |
| 5996.250000     | 46.4          | 200.0       | V            | 56.0          | 2.1                 | 27.6        | 74.0           |
| 8113.125000     | 51.3          | 200.0       | V            | 56.0          | 8.4                 | 22.7        | 74.0           |
| 10655.625000    | 52.9          | 200.0       | V            | 123.0         | 13.2                | 21.1        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3215.625000     | 39.8             | 100.0       | H            | 352.0         | -4.7                | 14.2        | 54.0           |
| 3871.875000     | 31.8             | 200.0       | H            | 191.0         | -3.0                | 22.2        | 54.0           |
| 4822.500000     | 44.0             | 200.0       | V            | 0.0           | -0.6                | 10.0        | 54.0           |
| 6015.000000     | 35.6             | 200.0       | V            | 0.0           | 2.2                 | 18.4        | 54.0           |
| 7620.000000     | 39.9             | 200.0       | V            | 106.0         | 6.5                 | 14.1        | 54.0           |
| 9746.250000     | 42.3             | 100.0       | V            | 336.0         | 12.0                | 11.7        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

# 802.11b CH6

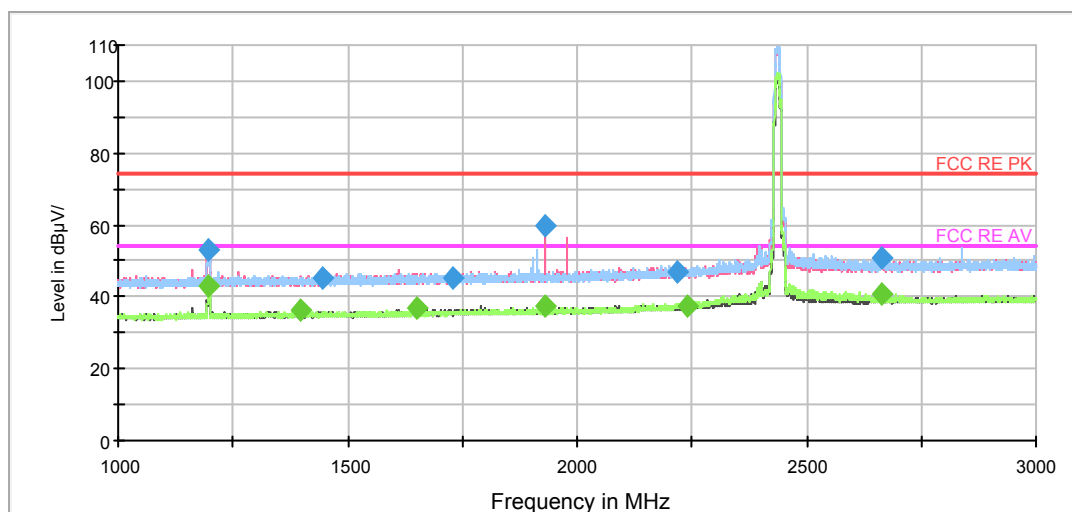

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1195.750000     | 53.3          | 100.0       | V            | 154.0         | -1.2                | 20.7        | 74.0           |
| 1443.500000     | 45.3          | 100.0       | V            | 349.0         | -0.6                | 28.7        | 74.0           |
| 1727.500000     | 45.3          | 100.0       | V            | 274.0         | 0.4                 | 28.7        | 74.0           |
| 1931.500000     | 59.5          | 200.0       | V            | 231.0         | 1.0                 | 14.5        | 74.0           |
| 2219.750000     | 46.8          | 200.0       | V            | 0.0           | 2.3                 | 27.2        | 74.0           |
| 2661.750000     | 51.0          | 200.0       | V            | 37.0          | 3.9                 | 23.0        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1197.250000     | 42.9             | 100.0       | V            | 117.0         | -1.2                | 11.1        | 54.0           |
| 1398.500000     | 36.0             | 100.0       | V            | 359.0         | -0.7                | 18.0        | 54.0           |
| 1651.250000     | 36.8             | 100.0       | V            | 22.0          | 0.2                 | 17.2        | 54.0           |
| 1931.500000     | 37.6             | 200.0       | V            | 231.0         | 1.0                 | 16.4        | 54.0           |
| 2241.500000     | 37.6             | 100.0       | V            | 337.0         | 2.4                 | 16.4        | 54.0           |
| 2661.750000     | 41.0             | 200.0       | V            | 37.0          | 3.9                 | 13.0        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

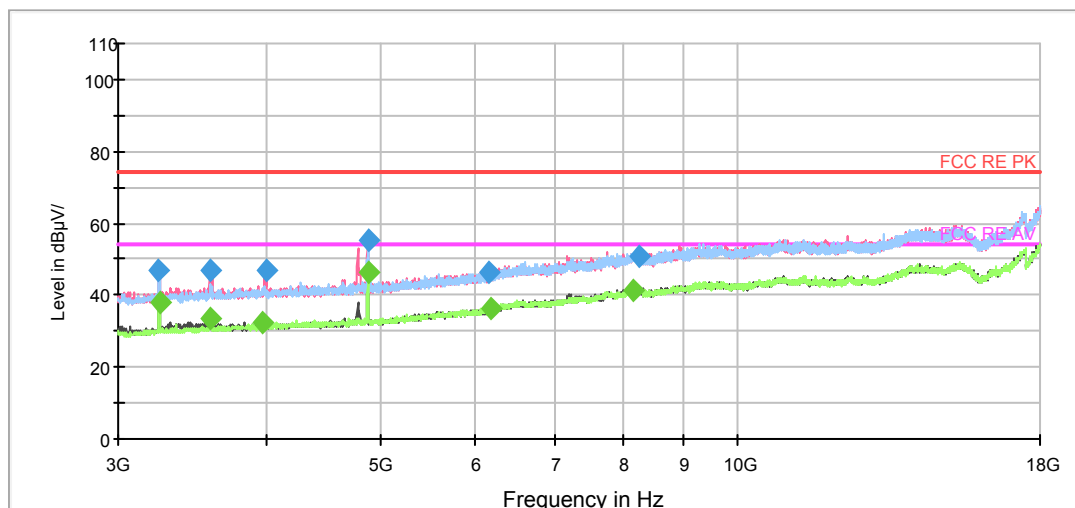

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3247.500000     | 46.9          | 200.0       | H            | 353.0         | -4.6                | 27.1        | 74.0           |
| 3583.125000     | 47.1          | 200.0       | V            | 28.0          | -3.7                | 26.9        | 74.0           |
| 3997.500000     | 47.0          | 200.0       | V            | 28.0          | -2.7                | 27.0        | 74.0           |
| 4873.125000     | 55.1          | 200.0       | V            | 5.0           | -0.5                | 18.9        | 74.0           |
| 6163.125000     | 46.2          | 200.0       | H            | 358.0         | 2.9                 | 27.8        | 74.0           |
| 8255.625000     | 50.9          | 100.0       | V            | 225.0         | 8.6                 | 23.1        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3249.375000     | 38.2             | 200.0       | H            | 353.0         | -4.5                | 15.8        | 54.0           |
| 3592.500000     | 33.4             | 100.0       | V            | 174.0         | -3.7                | 20.6        | 54.0           |
| 3971.250000     | 32.2             | 100.0       | V            | 65.0          | -2.9                | 21.8        | 54.0           |
| 4873.125000     | 46.2             | 200.0       | V            | 5.0           | -0.5                | 7.8         | 54.0           |
| 6193.125000     | 36.4             | 200.0       | H            | 349.0         | 3.1                 | 17.6        | 54.0           |
| 8173.125000     | 41.1             | 100.0       | V            | 359.0         | 8.6                 | 12.9        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11b CH11

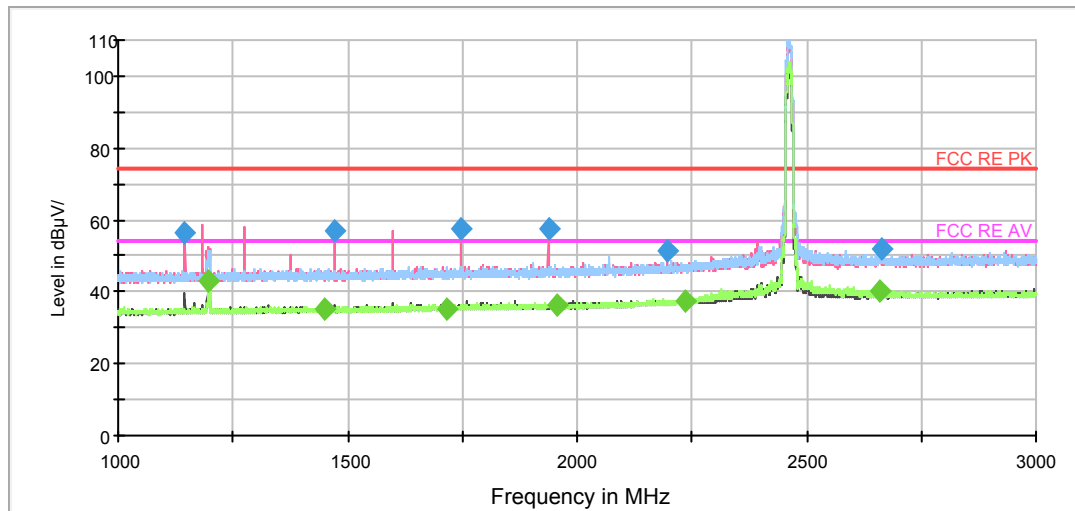

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1146.250000     | 56.3          | 100.0       | V            | 186.0         | -1.3                | 17.7        | 74.0           |
| 1471.000000     | 56.9          | 100.0       | V            | 186.0         | -0.5                | 17.1        | 74.0           |
| 1745.250000     | 57.7          | 100.0       | V            | 186.0         | 0.5                 | 16.3        | 74.0           |
| 1936.750000     | 57.5          | 100.0       | V            | 186.0         | 1.0                 | 16.5        | 74.0           |
| 2198.250000     | 51.1          | 100.0       | V            | 186.0         | 2.2                 | 22.9        | 74.0           |
| 2665.250000     | 51.9          | 100.0       | V            | 125.0         | 3.9                 | 22.1        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1197.750000     | 43.0             | 100.0       | V            | 162.0         | -1.2                | 11.0        | 54.0           |
| 1448.750000     | 35.4             | 100.0       | V            | 12.0          | -0.6                | 18.6        | 54.0           |
| 1717.500000     | 35.3             | 200.0       | V            | 168.0         | 0.4                 | 18.7        | 54.0           |
| 1957.500000     | 36.3             | 100.0       | H            | 59.0          | 1.0                 | 17.7        | 54.0           |
| 2234.250000     | 37.6             | 100.0       | V            | 210.0         | 2.4                 | 16.4        | 54.0           |
| 2658.250000     | 40.1             | 200.0       | V            | 47.0          | 3.9                 | 13.9        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



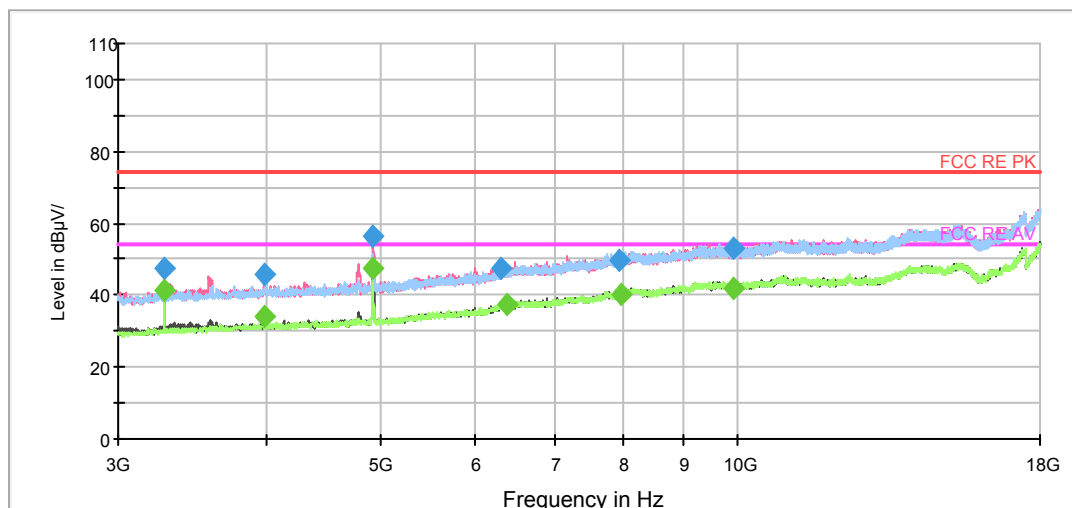

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3281.250000     | 47.4          | 100.0       | H            | 344.0         | -4.5                | 26.6        | 74.0           |
| 3984.375000     | 46.0          | 100.0       | V            | 237.0         | -2.8                | 28.0        | 74.0           |
| 4923.750000     | 56.1          | 100.0       | V            | 36.0          | -0.5                | 17.9        | 74.0           |
| 6324.375000     | 47.3          | 200.0       | V            | 138.0         | 4.0                 | 26.7        | 74.0           |
| 7938.750000     | 49.6          | 100.0       | V            | 0.0           | 7.8                 | 24.4        | 74.0           |
| 9918.750000     | 52.8          | 200.0       | V            | 156.0         | 11.9                | 21.2        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3281.250000     | 41.4             | 200.0       | H            | 354.0         | -4.5                | 12.6        | 54.0           |
| 3990.000000     | 34.0             | 200.0       | V            | 30.0          | -2.8                | 20.0        | 54.0           |
| 4923.750000     | 47.6             | 200.0       | V            | 0.0           | -0.5                | 6.4         | 54.0           |
| 6386.250000     | 37.3             | 100.0       | V            | 150.0         | 4.3                 | 16.7        | 54.0           |
| 7968.750000     | 40.2             | 200.0       | V            | 209.0         | 8.0                 | 13.8        | 54.0           |
| 9922.500000     | 42.1             | 100.0       | V            | 339.0         | 11.9                | 11.9        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

# 802.11g CH1

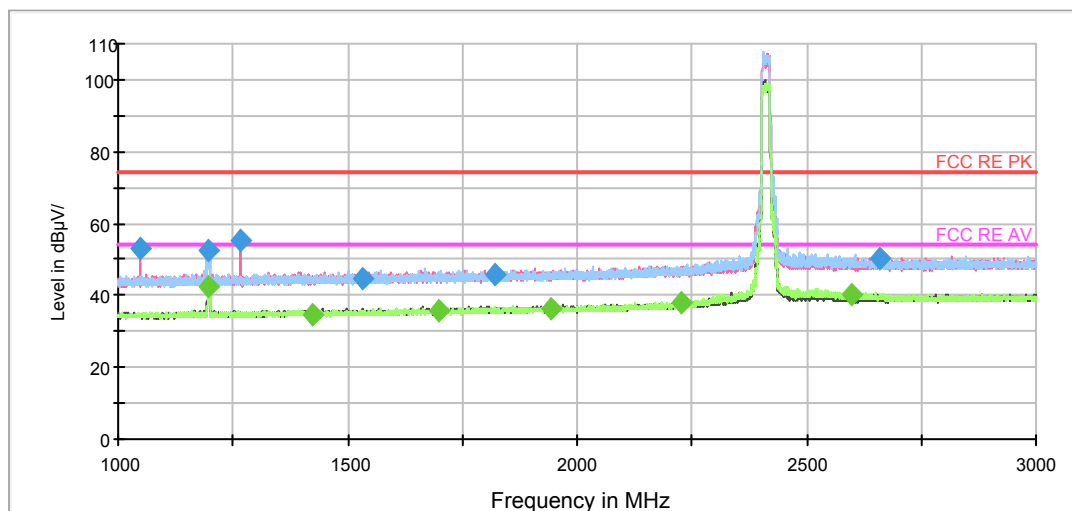

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1048.250000     | 53.3          | 200.0       | V            | 199.0         | -1.7                | 20.7        | 74.0           |
| 1195.250000     | 52.4          | 100.0       | V            | 344.0         | -1.2                | 21.6        | 74.0           |
| 1266.250000     | 55.0          | 100.0       | V            | 191.0         | -1.1                | 19.0        | 74.0           |
| 1533.000000     | 44.9          | 200.0       | H            | 356.0         | -0.3                | 29.1        | 74.0           |
| 1820.250000     | 45.6          | 100.0       | V            | 358.0         | 0.7                 | 28.4        | 74.0           |
| 2660.500000     | 50.1          | 100.0       | V            | 358.0         | 3.9                 | 23.9        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1197.000000     | 42.6             | 100.0       | V            | 167.0         | -1.2                | 11.4        | 54.0           |
| 1421.750000     | 34.5             | 100.0       | V            | 0.0           | -0.6                | 19.5        | 54.0           |
| 1700.750000     | 36.0             | 200.0       | H            | 350.0         | 0.4                 | 18.0        | 54.0           |
| 1943.250000     | 36.4             | 200.0       | H            | 314.0         | 1.0                 | 17.6        | 54.0           |
| 2229.250000     | 37.7             | 100.0       | V            | 191.0         | 2.4                 | 16.3        | 54.0           |
| 2596.500000     | 40.3             | 200.0       | H            | 255.0         | 3.8                 | 13.7        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

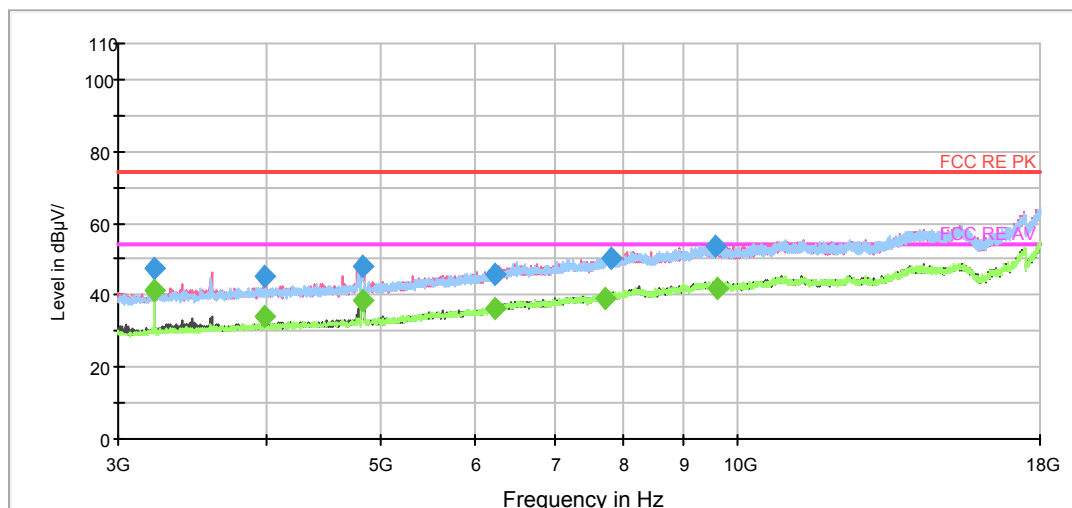

Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3215.625000     | 47.3          | 200.0       | H            | 57.0          | -4.7                | 26.7        | 74.0           |
| 3988.125000     | 45.2          | 100.0       | V            | 252.0         | -2.8                | 28.8        | 74.0           |
| 4822.500000     | 48.2          | 200.0       | V            | 0.0           | -0.6                | 25.8        | 74.0           |
| 6230.625000     | 45.9          | 100.0       | H            | 284.0         | 3.4                 | 28.1        | 74.0           |
| 7835.625000     | 50.0          | 100.0       | V            | 0.0           | 7.4                 | 24.0        | 74.0           |
| 9586.875000     | 53.8          | 100.0       | V            | 350.0         | 11.9                | 20.2        | 74.0           |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3215.625000     | 41.5             | 200.0       | H            | 57.0          | -4.7                | 12.5        | 54.0           |
| 3990.000000     | 33.9             | 100.0       | V            | 252.0         | -2.8                | 20.1        | 54.0           |
| 4828.125000     | 38.7             | 200.0       | V            | 0.0           | -0.6                | 15.3        | 54.0           |
| 6241.875000     | 36.1             | 200.0       | V            | 74.0          | 3.4                 | 17.9        | 54.0           |
| 7730.625000     | 39.2             | 200.0       | V            | 3.0           | 7.1                 | 14.8        | 54.0           |
| 9628.125000     | 41.9             | 200.0       | V            | 15.0          | 12.1                | 12.1        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11g CH6

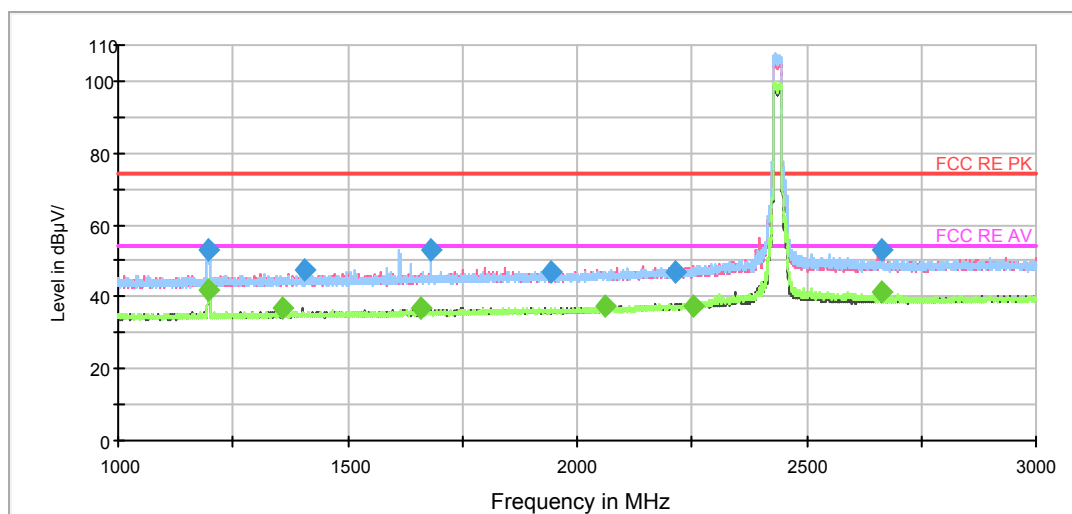

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1196.250000     | 52.8          | 100.0       | V            | 155.0         | -1.2                | 21.2        | 74.0           |
| 1408.250000     | 47.3          | 200.0       | V            | 99.0          | -0.7                | 26.7        | 74.0           |
| 1680.250000     | 53.2          | 200.0       | H            | 198.0         | 0.3                 | 20.8        | 74.0           |
| 1941.500000     | 46.7          | 100.0       | H            | 226.0         | 1.0                 | 27.3        | 74.0           |
| 2212.000000     | 46.9          | 100.0       | V            | 298.0         | 2.3                 | 27.1        | 74.0           |
| 2662.500000     | 53.1          | 200.0       | V            | 38.0          | 3.9                 | 20.9        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1196.250000     | 42.1             | 100.0       | V            | 155.0         | -1.2                | 11.9        | 54.0           |
| 1358.250000     | 36.7             | 100.0       | V            | 354.0         | -0.8                | 17.3        | 54.0           |
| 1661.000000     | 37.0             | 200.0       | V            | 38.0          | 0.2                 | 17.0        | 54.0           |
| 2063.000000     | 37.6             | 100.0       | V            | 351.0         | 1.5                 | 16.4        | 54.0           |
| 2254.500000     | 37.5             | 200.0       | V            | 201.0         | 2.5                 | 16.5        | 54.0           |
| 2662.000000     | 41.4             | 100.0       | V            | 53.0          | 3.9                 | 12.6        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

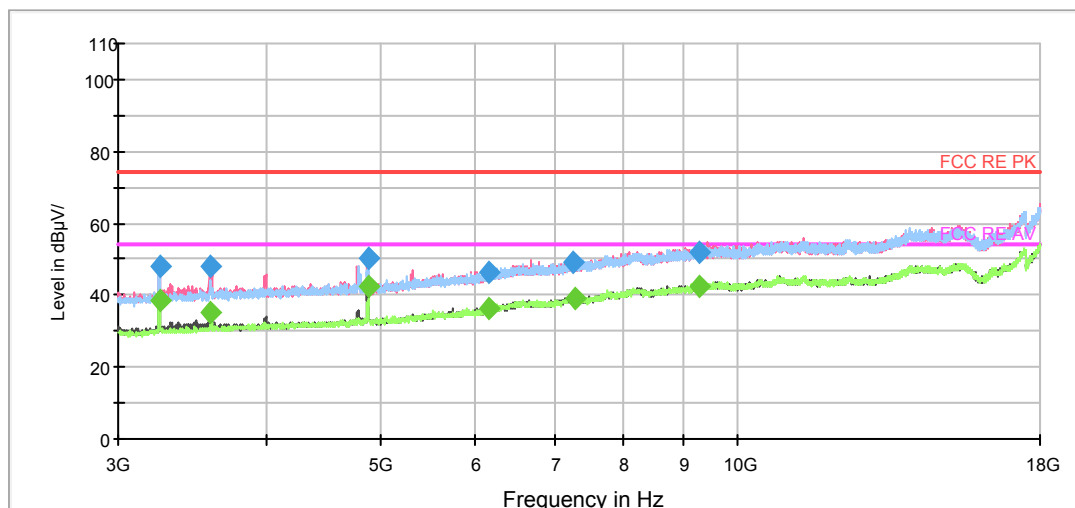

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3249.375000     | 47.8          | 200.0       | H            | 56.0          | -4.5                | 26.2        | 74.0           |
| 3583.125000     | 48.3          | 200.0       | V            | 23.0          | -3.7                | 25.7        | 74.0           |
| 4878.750000     | 50.5          | 200.0       | V            | 0.0           | -0.5                | 23.5        | 74.0           |
| 6165.000000     | 46.3          | 200.0       | V            | 286.0         | 2.9                 | 27.7        | 74.0           |
| 7276.875000     | 49.4          | 200.0       | V            | 108.0         | 5.6                 | 24.6        | 74.0           |
| 9268.125000     | 51.8          | 100.0       | V            | 314.0         | 11.1                | 22.2        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3249.375000     | 38.6             | 200.0       | H            | 56.0          | -4.5                | 15.4        | 54.0           |
| 3586.875000     | 35.4             | 100.0       | V            | 163.0         | -3.7                | 18.6        | 54.0           |
| 4875.000000     | 42.5             | 200.0       | V            | 10.0          | -0.5                | 11.5        | 54.0           |
| 6178.125000     | 36.3             | 200.0       | V            | 108.0         | 3.0                 | 17.7        | 54.0           |
| 7278.750000     | 39.2             | 100.0       | V            | 359.0         | 5.6                 | 14.8        | 54.0           |
| 9279.375000     | 42.5             | 100.0       | V            | 284.0         | 11.1                | 11.5        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

# 802.11g CH11

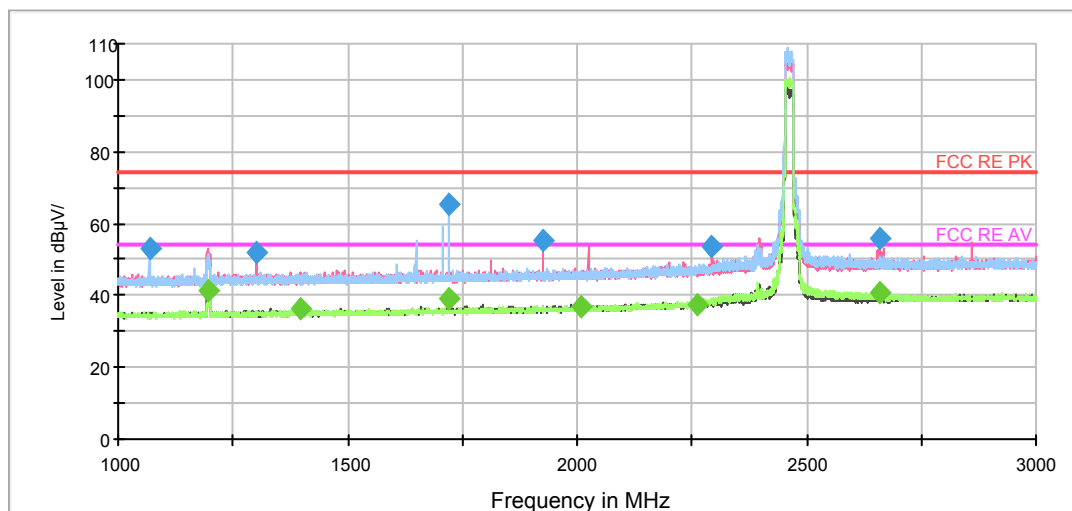

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1067.750000     | 52.8          | 100.0       | H            | 1.0           | -1.5                | 21.2        | 74.0           |
| 1301.750000     | 52.0          | 200.0       | V            | 231.0         | -1.0                | 22.0        | 74.0           |
| 1720.000000     | 65.1          | 100.0       | H            | 226.0         | 0.4                 | 8.9         | 74.0           |
| 1926.750000     | 55.2          | 100.0       | V            | 233.0         | 1.0                 | 18.8        | 74.0           |
| 2294.750000     | 53.4          | 100.0       | V            | 334.0         | 2.7                 | 20.6        | 74.0           |
| 2659.750000     | 55.8          | 200.0       | V            | 36.0          | 3.9                 | 18.2        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1197.250000     | 41.5             | 100.0       | V            | 351.0         | -1.2                | 12.5        | 54.0           |
| 1399.000000     | 36.3             | 100.0       | V            | 0.0           | -0.7                | 17.7        | 54.0           |
| 1720.000000     | 39.3             | 100.0       | H            | 226.0         | 0.4                 | 14.7        | 54.0           |
| 2007.000000     | 36.8             | 100.0       | V            | 358.0         | 1.1                 | 17.2        | 54.0           |
| 2263.750000     | 37.2             | 200.0       | V            | 10.0          | 2.6                 | 16.8        | 54.0           |
| 2659.750000     | 41.0             | 200.0       | V            | 36.0          | 3.9                 | 13.0        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

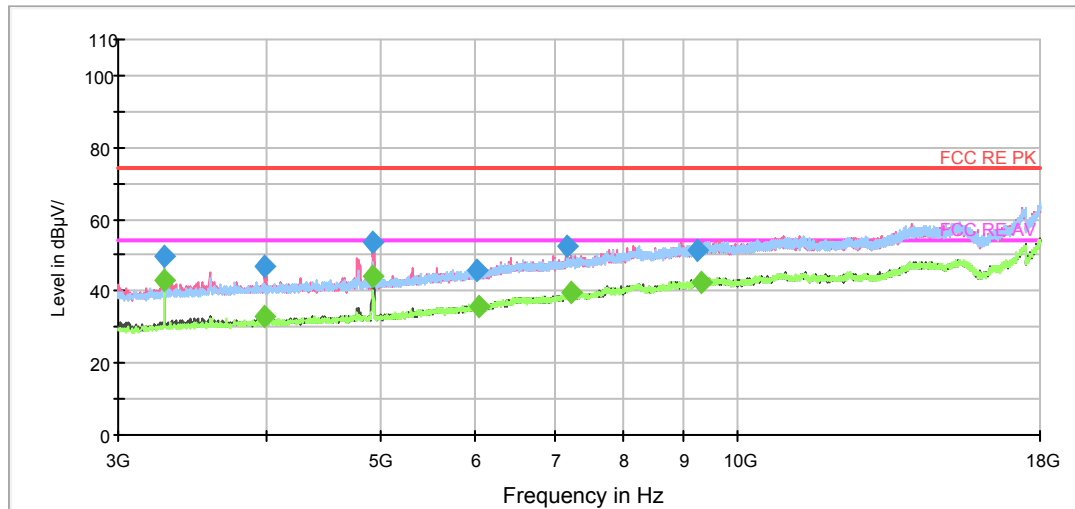

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3281.250000     | 49.5          | 200.0       | H            | 56.0          | -4.5                | 24.5        | 74.0           |
| 3986.250000     | 47.2          | 200.0       | V            | 32.0          | -2.8                | 26.8        | 74.0           |
| 4923.750000     | 53.7          | 200.0       | V            | 2.0           | -0.5                | 20.3        | 74.0           |
| 6026.250000     | 46.1          | 200.0       | V            | 0.0           | 2.3                 | 27.9        | 74.0           |
| 7166.250000     | 52.3          | 100.0       | V            | 130.0         | 5.4                 | 21.7        | 74.0           |
| 9260.625000     | 51.5          | 200.0       | V            | 0.0           | 11.1                | 22.5        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3281.250000     | 42.9             | 200.0       | H            | 56.0          | -4.5                | 11.1        | 54.0           |
| 3991.875000     | 33.2             | 200.0       | V            | 32.0          | -2.8                | 20.8        | 54.0           |
| 4929.375000     | 44.3             | 200.0       | V            | 2.0           | -0.5                | 9.7         | 54.0           |
| 6048.750000     | 35.5             | 200.0       | V            | 144.0         | 2.4                 | 18.5        | 54.0           |
| 7224.375000     | 39.5             | 200.0       | H            | 291.0         | 5.6                 | 14.5        | 54.0           |
| 9307.500000     | 42.3             | 100.0       | V            | 234.0         | 11.2                | 11.7        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT20) CH1

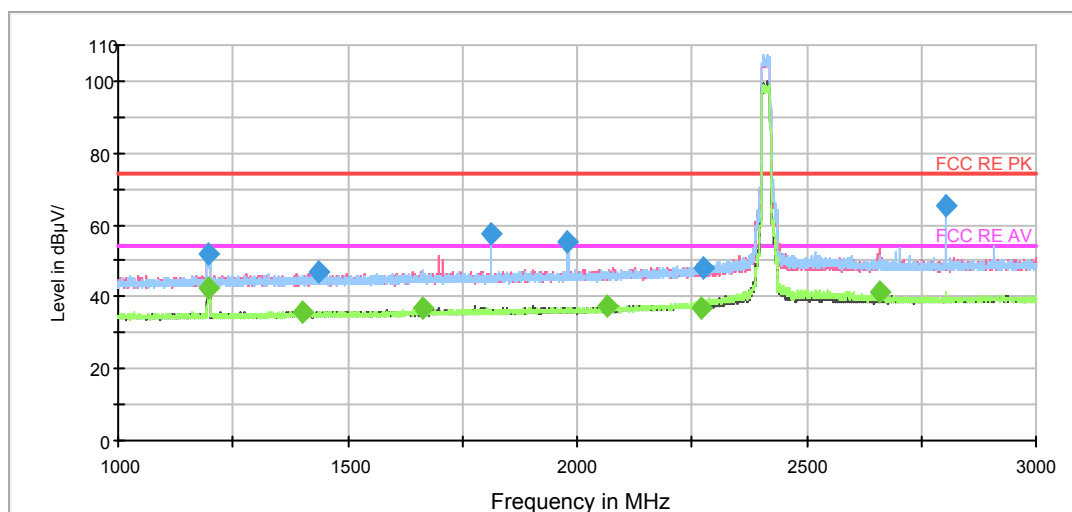

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1196.500000     | 52.1          | 100.0       | V            | 349.0         | -1.2                | 21.9        | 74.0           |
| 1438.250000     | 46.8          | 200.0       | V            | 0.0           | -0.6                | 27.2        | 74.0           |
| 1811.250000     | 57.6          | 100.0       | H            | 200.0         | 0.7                 | 16.4        | 74.0           |
| 1980.000000     | 55.5          | 100.0       | H            | 46.0          | 1.1                 | 18.5        | 74.0           |
| 2275.500000     | 48.2          | 100.0       | V            | 8.0           | 2.7                 | 25.8        | 74.0           |
| 2803.500000     | 65.4          | 100.0       | H            | 200.0         | 4.3                 | 8.6         | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1196.500000     | 42.2             | 100.0       | V            | 349.0         | -1.2                | 11.8        | 54.0           |
| 1402.250000     | 35.9             | 200.0       | V            | 58.0          | -0.7                | 18.1        | 54.0           |
| 1663.250000     | 37.1             | 100.0       | V            | 53.0          | 0.2                 | 16.9        | 54.0           |
| 2063.500000     | 37.6             | 100.0       | V            | 358.0         | 1.5                 | 16.4        | 54.0           |
| 2272.000000     | 37.1             | 200.0       | V            | 70.0          | 2.7                 | 16.9        | 54.0           |
| 2659.250000     | 41.5             | 200.0       | V            | 46.0          | 3.9                 | 12.5        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



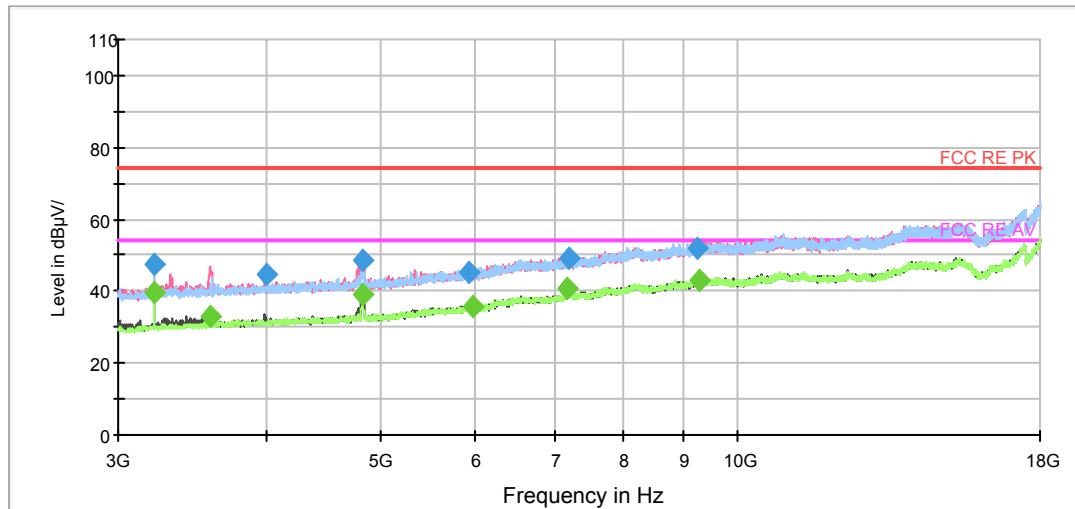

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3215.625000     | 47.3          | 100.0       | H            | 344.0         | -4.7                | 26.7        | 74.0           |
| 3995.625000     | 44.8          | 100.0       | V            | 112.0         | -2.7                | 29.2        | 74.0           |
| 4826.250000     | 48.4          | 200.0       | V            | 39.0          | -0.6                | 25.6        | 74.0           |
| 5921.250000     | 45.1          | 100.0       | V            | 356.0         | 2.0                 | 28.9        | 74.0           |
| 7218.750000     | 49.4          | 200.0       | V            | 176.0         | 5.6                 | 24.6        | 74.0           |
| 9241.875000     | 52.0          | 100.0       | V            | 344.0         | 11.0                | 22.0        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3215.625000     | 39.8             | 100.0       | H            | 344.0         | -4.7                | 14.2        | 54.0           |
| 3586.875000     | 33.2             | 200.0       | V            | 193.0         | -3.7                | 20.8        | 54.0           |
| 4828.125000     | 39.0             | 200.0       | V            | 0.0           | -0.6                | 15.0        | 54.0           |
| 5970.000000     | 35.5             | 100.0       | H            | 106.0         | 2.0                 | 18.5        | 54.0           |
| 7181.250000     | 40.5             | 100.0       | V            | 131.0         | 5.5                 | 13.5        | 54.0           |
| 9271.875000     | 42.8             | 200.0       | V            | 102.0         | 11.1                | 11.2        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT20) CH6

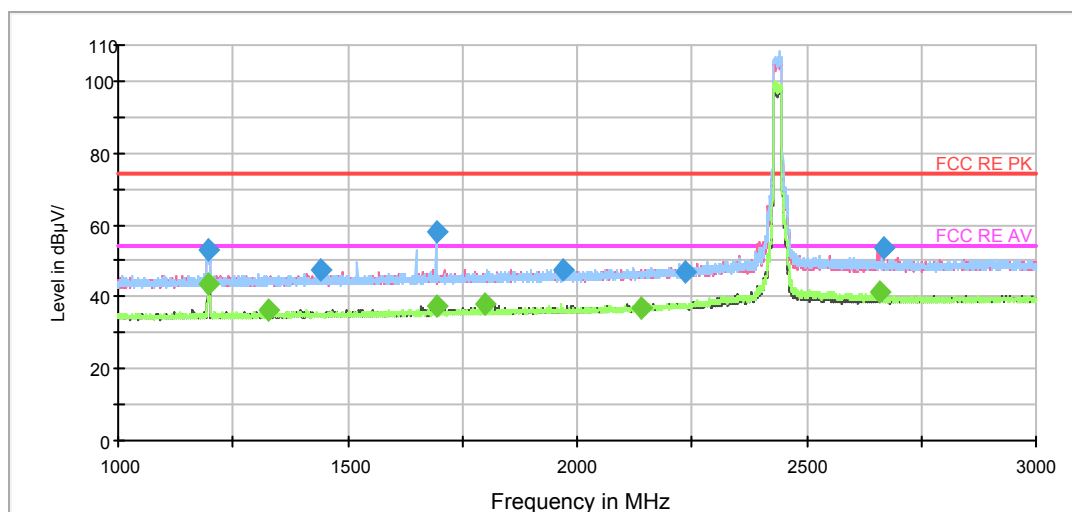

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1195.750000     | 53.1          | 100.0       | V            | 168.0         | -1.2                | 20.9        | 74.0           |
| 1439.000000     | 47.6          | 200.0       | H            | 218.0         | -0.6                | 26.4        | 74.0           |
| 1692.250000     | 58.3          | 200.0       | H            | 180.0         | 0.4                 | 15.7        | 74.0           |
| 1971.000000     | 47.7          | 200.0       | V            | 217.0         | 1.0                 | 26.3        | 74.0           |
| 2234.250000     | 46.8          | 200.0       | V            | 3.0           | 2.4                 | 27.2        | 74.0           |
| 2666.500000     | 53.8          | 200.0       | V            | 41.0          | 3.9                 | 20.2        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1196.250000     | 43.3             | 100.0       | V            | 168.0         | -1.2                | 10.7        | 54.0           |
| 1327.750000     | 36.2             | 100.0       | V            | 239.0         | -0.9                | 17.8        | 54.0           |
| 1692.250000     | 37.6             | 200.0       | H            | 180.0         | 0.4                 | 16.4        | 54.0           |
| 1798.250000     | 37.8             | 200.0       | V            | 41.0          | 0.6                 | 16.2        | 54.0           |
| 2139.000000     | 37.1             | 200.0       | V            | 144.0         | 1.9                 | 16.9        | 54.0           |
| 2660.250000     | 41.2             | 200.0       | V            | 32.0          | 3.9                 | 12.8        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

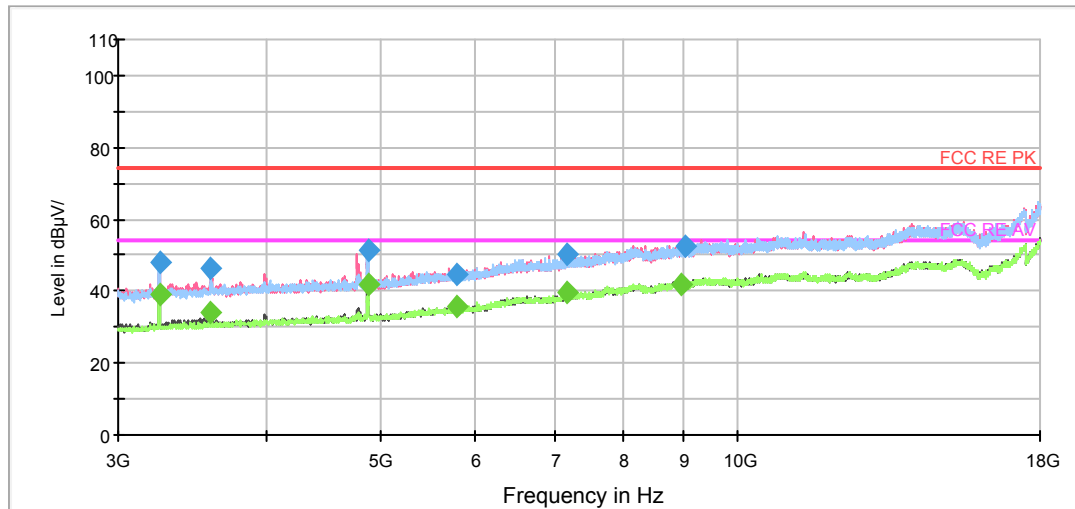

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3249.375000     | 48.3          | 200.0       | H            | 56.0          | -4.5                | 25.7        | 74.0           |
| 3590.625000     | 46.3          | 100.0       | V            | 16.0          | -3.7                | 27.7        | 74.0           |
| 4876.875000     | 51.1          | 200.0       | V            | 3.0           | -0.5                | 22.9        | 74.0           |
| 5803.125000     | 44.7          | 200.0       | V            | 22.0          | 1.7                 | 29.3        | 74.0           |
| 7173.750000     | 50.4          | 100.0       | V            | 132.0         | 5.4                 | 23.6        | 74.0           |
| 9020.625000     | 52.4          | 200.0       | H            | 131.0         | 10.3                | 21.6        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3249.375000     | 39.2             | 200.0       | H            | 56.0          | -4.5                | 14.8        | 54.0           |
| 3588.750000     | 34.0             | 100.0       | V            | 16.0          | -3.7                | 20.0        | 54.0           |
| 4876.875000     | 41.7             | 200.0       | V            | 3.0           | -0.5                | 12.3        | 54.0           |
| 5784.375000     | 35.7             | 100.0       | V            | 219.0         | 1.6                 | 18.3        | 54.0           |
| 7190.625000     | 39.5             | 100.0       | V            | 77.0          | 5.5                 | 14.5        | 54.0           |
| 8953.125000     | 41.9             | 100.0       | V            | 114.0         | 10.2                | 12.1        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT20) CH11

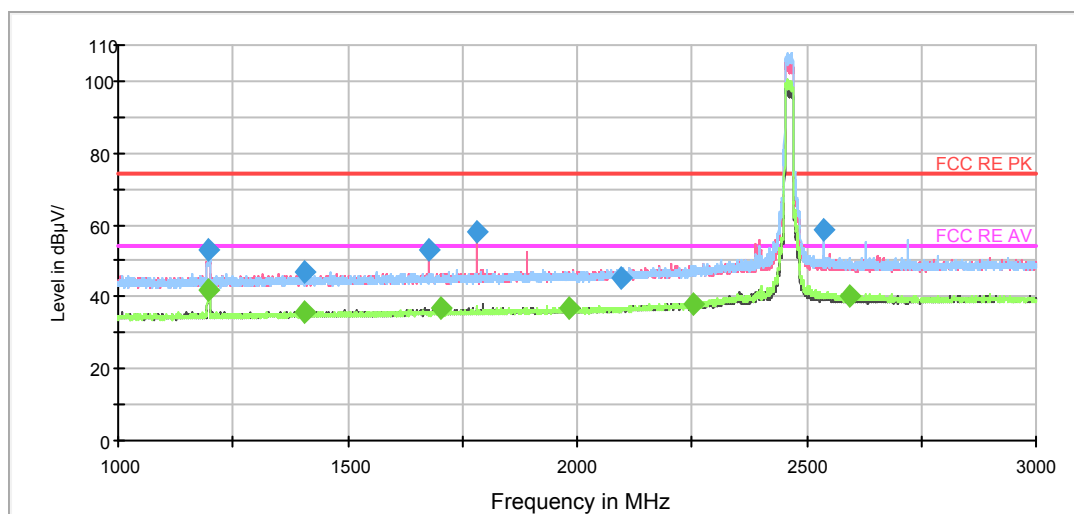

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1197.250000     | 53.1          | 100.0       | V            | 160.0         | -1.2                | 20.9        | 74.0           |
| 1405.500000     | 46.9          | 200.0       | V            | 107.0         | -0.7                | 27.1        | 74.0           |
| 1675.500000     | 53.3          | 200.0       | V            | 70.0          | 0.3                 | 20.7        | 74.0           |
| 1782.000000     | 57.9          | 100.0       | V            | 185.0         | 0.6                 | 16.1        | 74.0           |
| 2094.750000     | 45.3          | 100.0       | H            | 0.0           | 1.6                 | 28.7        | 74.0           |
| 2538.750000     | 58.8          | 100.0       | H            | 203.0         | 3.7                 | 15.2        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1197.250000     | 41.8             | 100.0       | V            | 160.0         | -1.2                | 12.2        | 54.0           |
| 1407.000000     | 35.9             | 200.0       | V            | 0.0           | -0.7                | 18.1        | 54.0           |
| 1703.000000     | 36.8             | 200.0       | V            | 20.0          | 0.4                 | 17.2        | 54.0           |
| 1984.000000     | 36.8             | 200.0       | V            | 27.0          | 1.1                 | 17.2        | 54.0           |
| 2251.250000     | 37.7             | 100.0       | H            | 280.0         | 2.4                 | 16.3        | 54.0           |
| 2593.000000     | 40.2             | 200.0       | H            | 313.0         | 3.8                 | 13.8        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

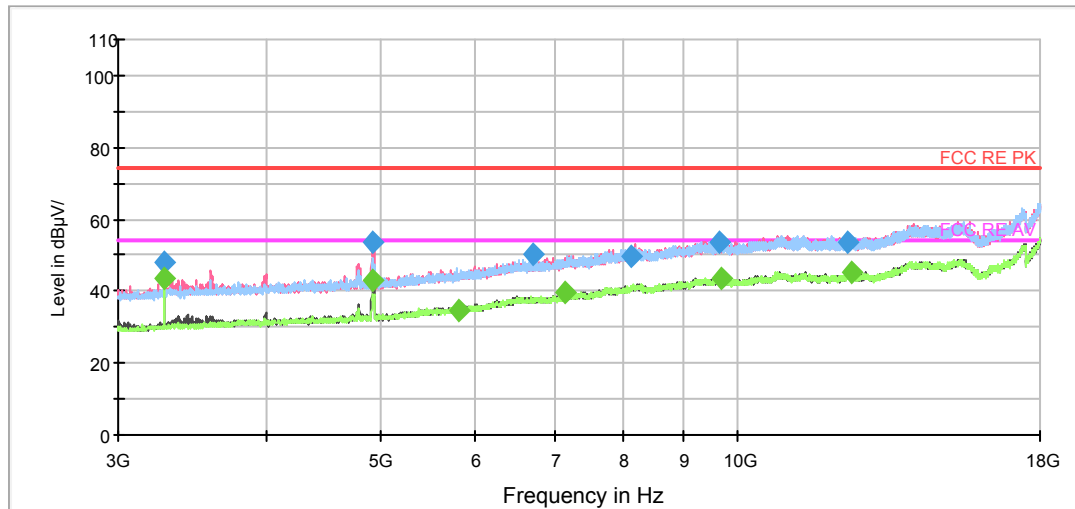

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3281.250000     | 48.0          | 200.0       | H            | 59.0          | -4.5                | 26.0        | 74.0           |
| 4921.875000     | 53.6          | 200.0       | V            | 0.0           | -0.5                | 20.4        | 74.0           |
| 6710.625000     | 50.1          | 200.0       | H            | 117.0         | 5.0                 | 23.9        | 74.0           |
| 8126.250000     | 49.8          | 100.0       | V            | 219.0         | 8.4                 | 24.2        | 74.0           |
| 9667.500000     | 53.8          | 200.0       | V            | 76.0          | 12.1                | 20.2        | 74.0           |
| 12406.875000    | 53.6          | 200.0       | V            | 265.0         | 13.6                | 20.4        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3281.250000     | 43.4             | 200.0       | H            | 59.0          | -4.5                | 10.6        | 54.0           |
| 4916.250000     | 43.3             | 200.0       | V            | 4.0           | -0.5                | 10.7        | 54.0           |
| 5816.250000     | 34.7             | 200.0       | V            | 304.0         | 1.7                 | 19.3        | 54.0           |
| 7156.875000     | 39.4             | 100.0       | V            | 0.0           | 5.4                 | 14.6        | 54.0           |
| 9691.875000     | 43.8             | 100.0       | H            | 192.0         | 12.1                | 10.2        | 54.0           |
| 12461.250000    | 45.2             | 200.0       | H            | 340.0         | 13.6                | 8.8         | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT40) CH3

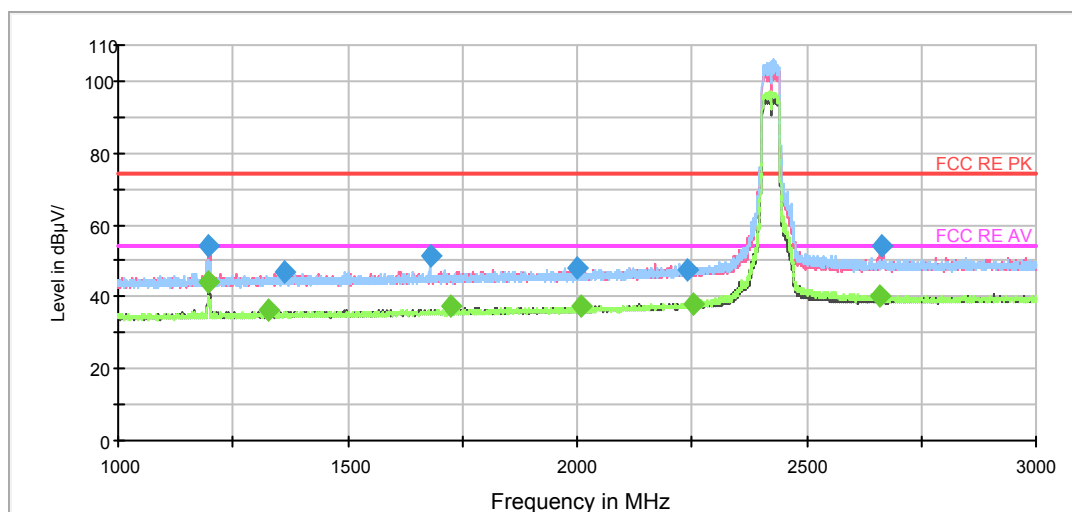

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1196.250000     | 54.3          | 100.0       | V            | 169.0         | -1.2                | 19.7        | 74.0           |
| 1364.000000     | 46.7          | 100.0       | V            | 68.0          | -0.8                | 27.3        | 74.0           |
| 1679.250000     | 51.6          | 200.0       | H            | 174.0         | 0.3                 | 22.4        | 74.0           |
| 2000.500000     | 48.1          | 100.0       | H            | 10.0          | 1.1                 | 25.9        | 74.0           |
| 2238.500000     | 47.7          | 200.0       | H            | 352.0         | 2.4                 | 26.3        | 74.0           |
| 2665.500000     | 54.0          | 100.0       | V            | 40.0          | 3.9                 | 20.0        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1196.000000     | 44.1             | 100.0       | V            | 169.0         | -1.2                | 9.9         | 54.0           |
| 1328.750000     | 36.3             | 100.0       | H            | 337.0         | -0.9                | 17.7        | 54.0           |
| 1726.250000     | 37.2             | 100.0       | V            | 218.0         | 0.4                 | 16.8        | 54.0           |
| 2007.000000     | 37.2             | 100.0       | V            | 145.0         | 1.1                 | 16.8        | 54.0           |
| 2255.000000     | 37.8             | 100.0       | V            | 332.0         | 2.5                 | 16.2        | 54.0           |
| 2658.750000     | 40.2             | 200.0       | V            | 55.0          | 3.9                 | 13.8        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

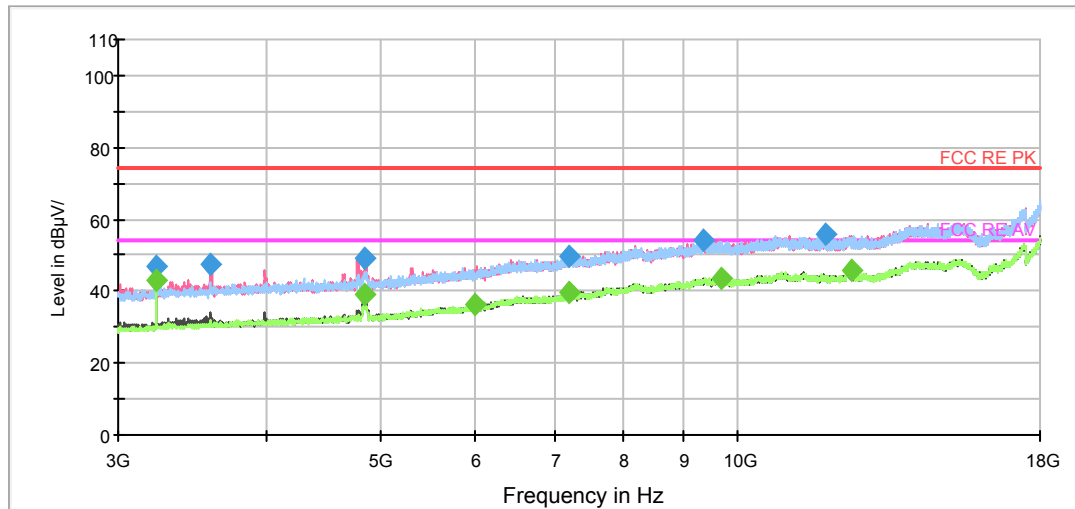

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3228.750000     | 47.2          | 200.0       | H            | 57.0          | -4.7                | 26.8        | 74.0           |
| 3588.750000     | 47.6          | 200.0       | V            | 28.0          | -3.7                | 26.4        | 74.0           |
| 4843.125000     | 49.2          | 200.0       | V            | 5.0           | -0.6                | 24.8        | 74.0           |
| 7205.625000     | 49.7          | 100.0       | V            | 131.0         | 5.5                 | 24.3        | 74.0           |
| 9358.125000     | 54.2          | 100.0       | H            | 73.0          | 11.3                | 19.8        | 74.0           |
| 11881.875000    | 55.6          | 200.0       | H            | 236.0         | 13.0                | 18.4        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3228.750000     | 42.9             | 200.0       | H            | 57.0          | -4.7                | 11.1        | 54.0           |
| 4843.125000     | 39.3             | 200.0       | V            | 5.0           | -0.6                | 14.7        | 54.0           |
| 5996.250000     | 36.2             | 200.0       | H            | 358.0         | 2.1                 | 17.8        | 54.0           |
| 7205.625000     | 39.4             | 100.0       | V            | 131.0         | 5.5                 | 14.6        | 54.0           |
| 9690.000000     | 43.7             | 200.0       | V            | 12.0          | 12.1                | 10.3        | 54.0           |
| 12463.125000    | 45.5             | 100.0       | V            | 36.0          | 13.6                | 8.5         | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT40) CH6

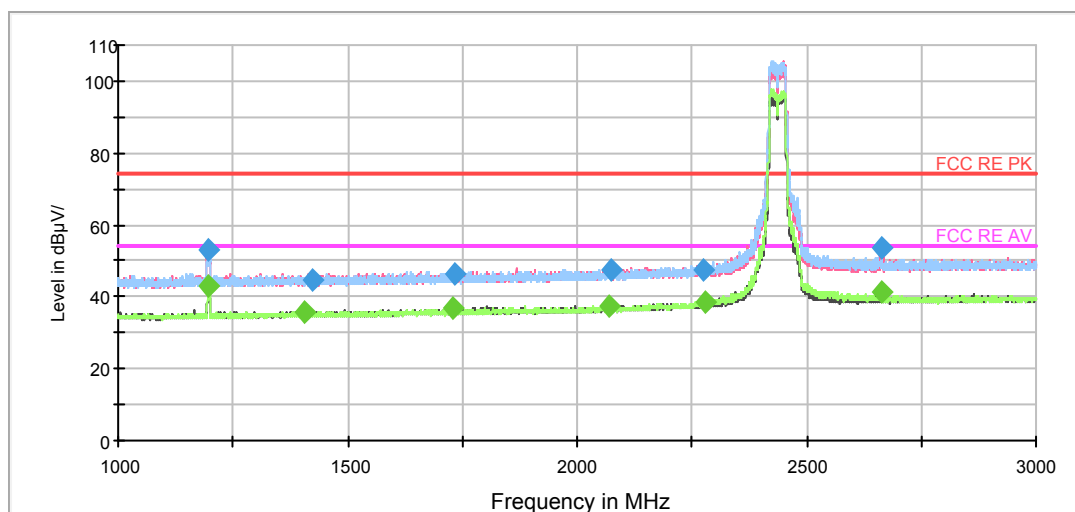

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1195.000000     | 53.2          | 100.0       | V            | 168.0         | -1.2                | 20.8        | 74.0           |
| 1424.500000     | 44.8          | 100.0       | V            | 180.0         | -0.6                | 29.2        | 74.0           |
| 1732.250000     | 46.1          | 200.0       | H            | 350.0         | 0.5                 | 27.9        | 74.0           |
| 2075.500000     | 47.4          | 200.0       | V            | 0.0           | 1.5                 | 26.6        | 74.0           |
| 2275.250000     | 47.6          | 100.0       | H            | 128.0         | 2.7                 | 26.4        | 74.0           |
| 2663.500000     | 53.6          | 200.0       | V            | 35.0          | 3.9                 | 20.4        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1196.500000     | 42.8             | 100.0       | V            | 168.0         | -1.2                | 11.2        | 54.0           |
| 1405.750000     | 36.0             | 100.0       | V            | 342.0         | -0.7                | 18.0        | 54.0           |
| 1727.250000     | 36.6             | 200.0       | V            | 20.0          | 0.4                 | 17.4        | 54.0           |
| 2071.250000     | 37.4             | 100.0       | H            | 0.0           | 1.5                 | 16.6        | 54.0           |
| 2281.250000     | 38.7             | 100.0       | H            | 176.0         | 2.7                 | 15.3        | 54.0           |
| 2664.000000     | 41.1             | 100.0       | V            | 39.0          | 3.9                 | 12.9        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



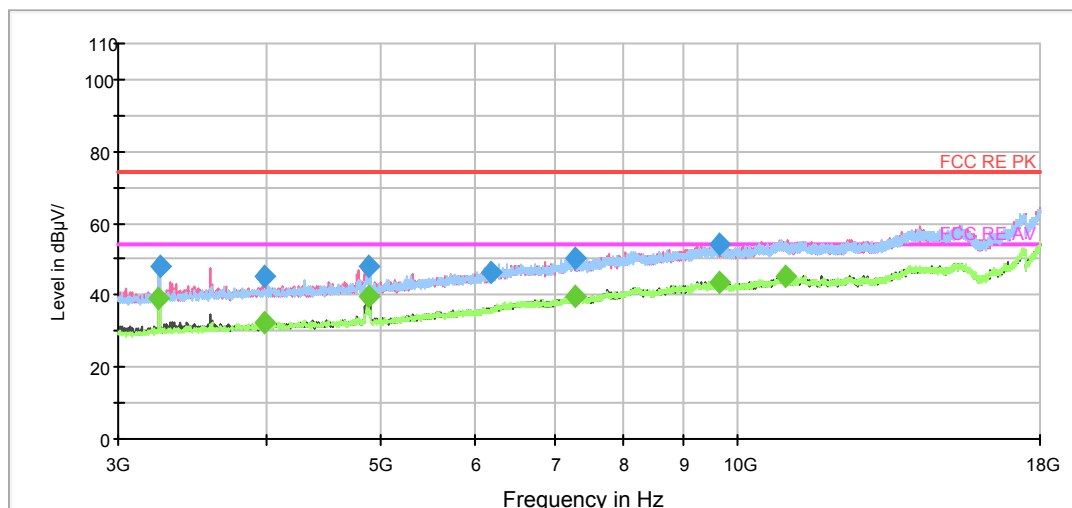

Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3249.375000     | 48.1          | 200.0       | H            | 57.0          | -4.5                | 25.9        | 74.0           |
| 3991.875000     | 45.3          | 100.0       | V            | 329.0         | -2.8                | 28.7        | 74.0           |
| 4876.875000     | 48.0          | 200.0       | V            | 3.0           | -0.5                | 26.0        | 74.0           |
| 6196.875000     | 46.4          | 100.0       | H            | 153.0         | 3.1                 | 27.6        | 74.0           |
| 7305.000000     | 50.0          | 200.0       | H            | 332.0         | 5.6                 | 24.0        | 74.0           |
| 9661.875000     | 54.0          | 200.0       | H            | 359.0         | 12.1                | 20.0        | 74.0           |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3247.500000     | 39.3             | 200.0       | H            | 57.0          | -4.6                | 14.7        | 54.0           |
| 3991.875000     | 32.5             | 100.0       | V            | 329.0         | -2.8                | 21.5        | 54.0           |
| 4880.625000     | 39.6             | 200.0       | V            | 3.0           | -0.5                | 14.4        | 54.0           |
| 7282.500000     | 39.7             | 100.0       | H            | 0.0           | 5.6                 | 14.3        | 54.0           |
| 9639.375000     | 43.7             | 200.0       | V            | 141.0         | 12.1                | 10.3        | 54.0           |
| 10959.375000    | 45.4             | 100.0       | H            | 3.0           | 13.5                | 8.6         | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT40) CH9

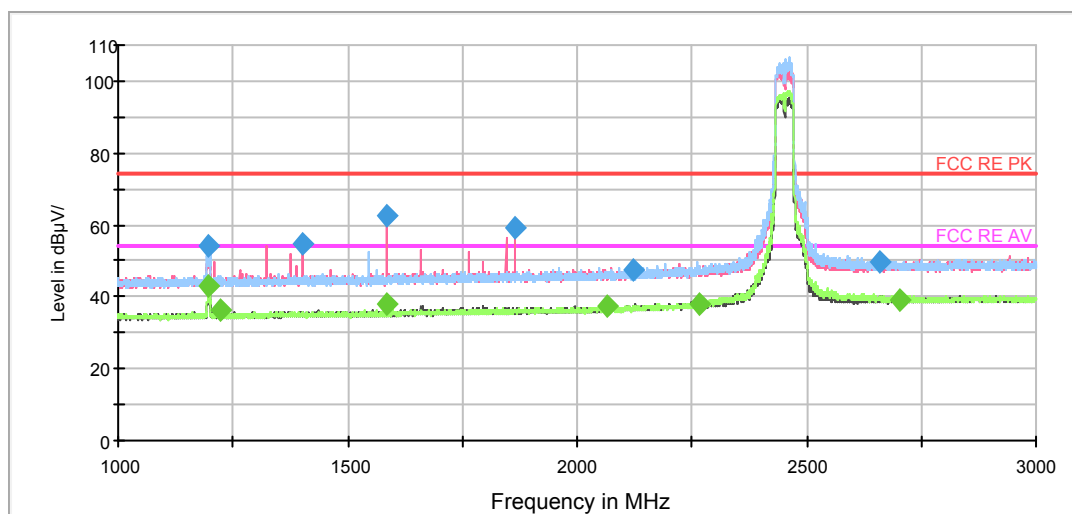

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1198.250000     | 54.3          | 100.0       | V            | 168.0         | -1.2                | 19.7        | 74.0           |
| 1402.750000     | 54.6          | 200.0       | V            | 202.0         | -0.7                | 19.4        | 74.0           |
| 1583.500000     | 62.6          | 200.0       | V            | 202.0         | -0.1                | 11.4        | 74.0           |
| 1866.500000     | 59.0          | 200.0       | V            | 202.0         | 0.8                 | 15.0        | 74.0           |
| 2124.250000     | 47.6          | 200.0       | H            | 244.0         | 1.8                 | 26.4        | 74.0           |
| 2657.750000     | 49.9          | 100.0       | H            | 200.0         | 3.9                 | 24.1        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1197.500000     | 43.2             | 100.0       | V            | 168.0         | -1.2                | 10.8        | 54.0           |
| 1223.000000     | 36.2             | 100.0       | V            | 359.0         | -1.2                | 17.8        | 54.0           |
| 1583.500000     | 38.2             | 200.0       | V            | 202.0         | -0.1                | 15.8        | 54.0           |
| 2067.250000     | 37.6             | 100.0       | V            | 356.0         | 1.5                 | 16.4        | 54.0           |
| 2265.500000     | 38.0             | 100.0       | V            | 180.0         | 2.6                 | 16.0        | 54.0           |
| 2704.500000     | 38.8             | 100.0       | V            | 306.0         | 4.0                 | 15.2        | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

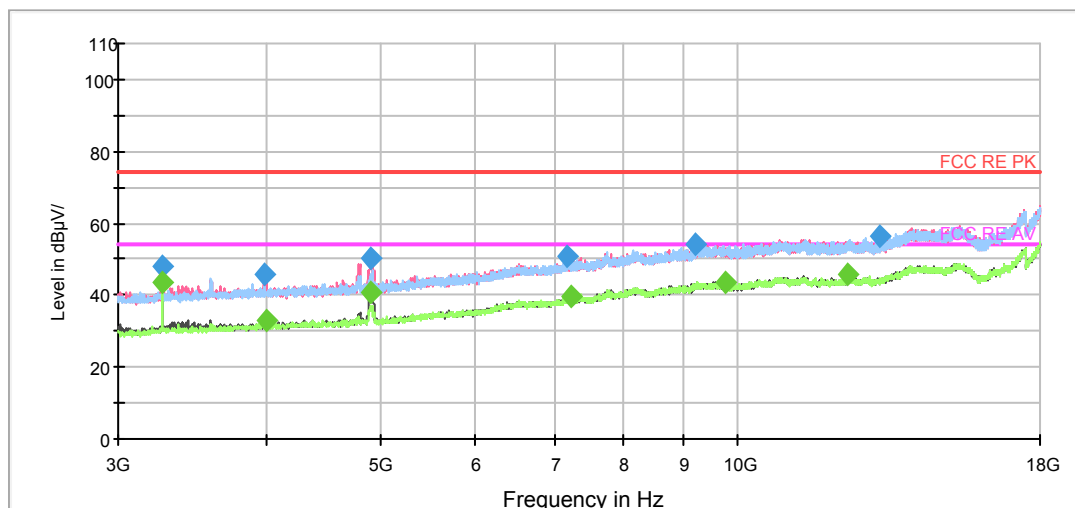

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3268.125000     | 48.0          | 200.0       | H            | 57.0          | -4.5                | 26.0        | 74.0           |
| 3993.750000     | 46.1          | 200.0       | V            | 111.0         | -2.8                | 27.9        | 74.0           |
| 4903.125000     | 50.2          | 200.0       | V            | 6.0           | -0.5                | 23.8        | 74.0           |
| 7175.625000     | 50.8          | 100.0       | V            | 300.0         | 5.4                 | 23.2        | 74.0           |
| 9219.375000     | 54.4          | 100.0       | H            | 246.0         | 10.9                | 19.6        | 74.0           |
| 13205.625000    | 56.5          | 100.0       | H            | 14.0          | 13.8                | 17.5        | 74.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3268.125000     | 43.5             | 200.0       | H            | 57.0          | -4.5                | 10.5        | 54.0           |
| 3997.500000     | 33.0             | 100.0       | V            | 344.0         | -2.7                | 21.0        | 54.0           |
| 4903.125000     | 40.5             | 200.0       | V            | 6.0           | -0.5                | 13.5        | 54.0           |
| 7226.250000     | 39.6             | 100.0       | V            | 300.0         | 5.6                 | 14.4        | 54.0           |
| 9768.750000     | 43.7             | 100.0       | H            | 174.0         | 12.0                | 10.3        | 54.0           |
| 12365.625000    | 45.6             | 100.0       | V            | 232.0         | 13.5                | 8.4         | 54.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## BLE-Channel 0

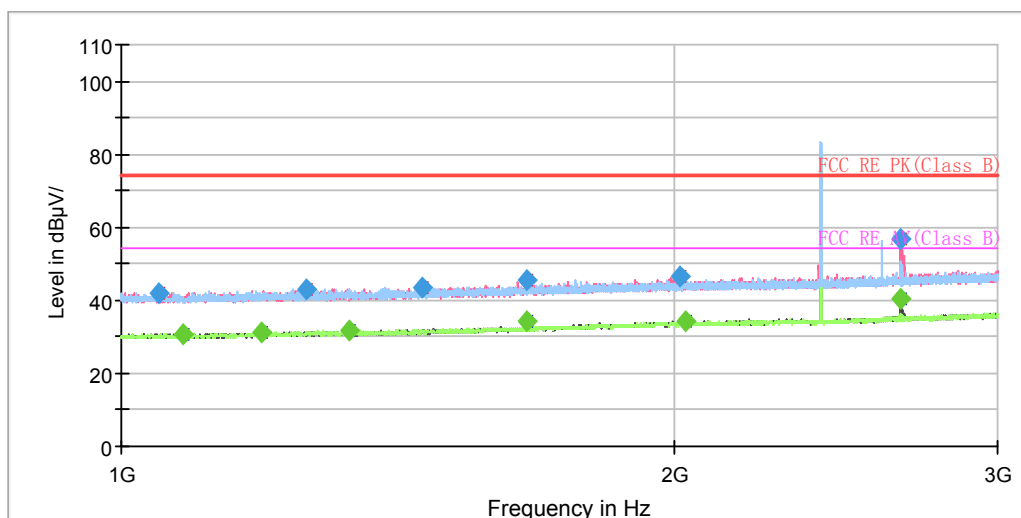


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1047.000000     | 41.97         | ---              | 100.0       | H            | 0.0           | -8.6                | 32.03       | 74.00          |
| 1081.500000     | ---           | 30.87            | 200.0       | H            | 196.0         | -8.4                | 23.13       | 54.00          |
| 1192.500000     | ---           | 31.07            | 100.0       | V            | 59.0          | -7.8                | 22.93       | 54.00          |
| 1262.000000     | 42.80         | ---              | 100.0       | V            | 74.0          | -7.5                | 31.20       | 74.00          |
| 1332.250000     | ---           | 31.95            | 200.0       | V            | 103.0         | -7.1                | 22.05       | 54.00          |
| 1459.250000     | 43.53         | ---              | 100.0       | V            | 185.0         | -6.4                | 30.47       | 74.00          |
| 1661.250000     | 45.45         | ---              | 200.0       | V            | 208.0         | -5.2                | 28.55       | 74.00          |
| 1663.000000     | ---           | 34.36            | 200.0       | V            | 208.0         | -5.2                | 19.64       | 54.00          |
| 2015.750000     | 46.42         | ---              | 100.0       | V            | 0.0           | -3.3                | 27.58       | 74.00          |
| 2030.250000     | ---           | 34.37            | 100.0       | V            | 0.0           | -3.2                | 19.63       | 54.00          |
| 2654.750000     | ---           | 40.63            | 100.0       | V            | 170.0         | -0.7                | 13.37       | 54.00          |
| 2654.750000     | 56.57         | ---              | 200.0       | V            | 179.0         | -0.7                | 17.43       | 74.00          |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

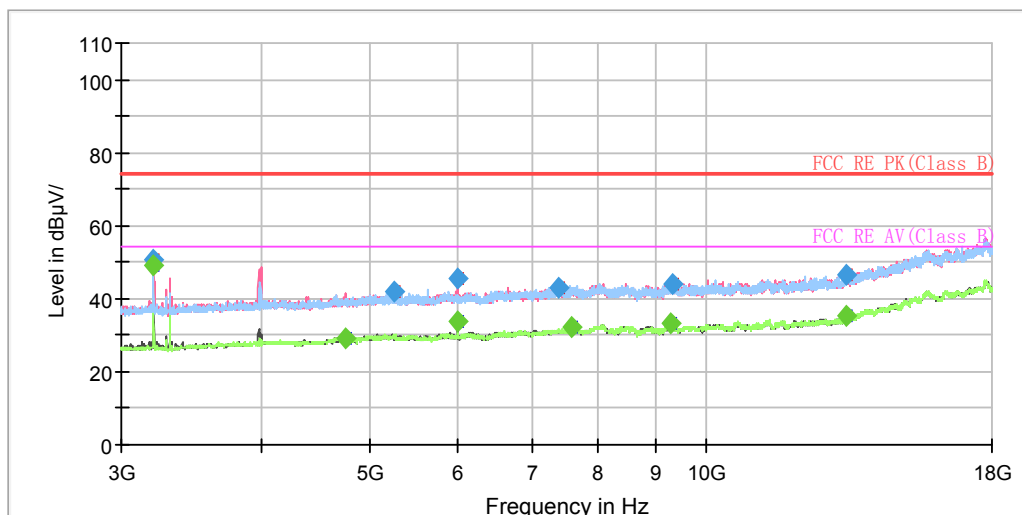


Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3205.258750     | 50.42         | ---              | 200.0       | V            | 259.0         | -8.3                | 23.58       | 74.00          |
| 3205.367500     | ---           | 48.98            | 100.0       | V            | 246.0         | -8.3                | 5.02        | 54.00          |
| 4763.211250     | ---           | 29.15            | 200.0       | V            | 185.0         | -4.2                | 24.85       | 54.00          |
| 5268.772500     | 41.73         | ---              | 100.0       | V            | 90.0          | -3.1                | 32.27       | 74.00          |
| 5995.108750     | ---           | 33.97            | 200.0       | V            | 210.0         | -2.1                | 20.03       | 54.00          |
| 5997.570000     | 45.34         | ---              | 200.0       | V            | 210.0         | -2.1                | 28.66       | 74.00          |
| 7387.157500     | 43.21         | ---              | 200.0       | H            | 65.0          | -0.2                | 30.79       | 74.00          |
| 7564.090000     | ---           | 32.11            | 200.0       | V            | 234.0         | 0.0                 | 21.89       | 54.00          |
| 9304.596250     | ---           | 33.49            | 100.0       | V            | 205.0         | 1.5                 | 20.51       | 54.00          |
| 9324.330000     | 44.09         | ---              | 100.0       | V            | 293.0         | 1.5                 | 29.91       | 74.00          |
| 13310.356250    | 46.45         | ---              | 200.0       | H            | 82.0          | 6.1                 | 27.55       | 74.00          |
| 13340.008750    | ---           | 35.40            | 100.0       | H            | 332.0         | 6.3                 | 18.60       | 54.00          |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## BLE-Channel 19

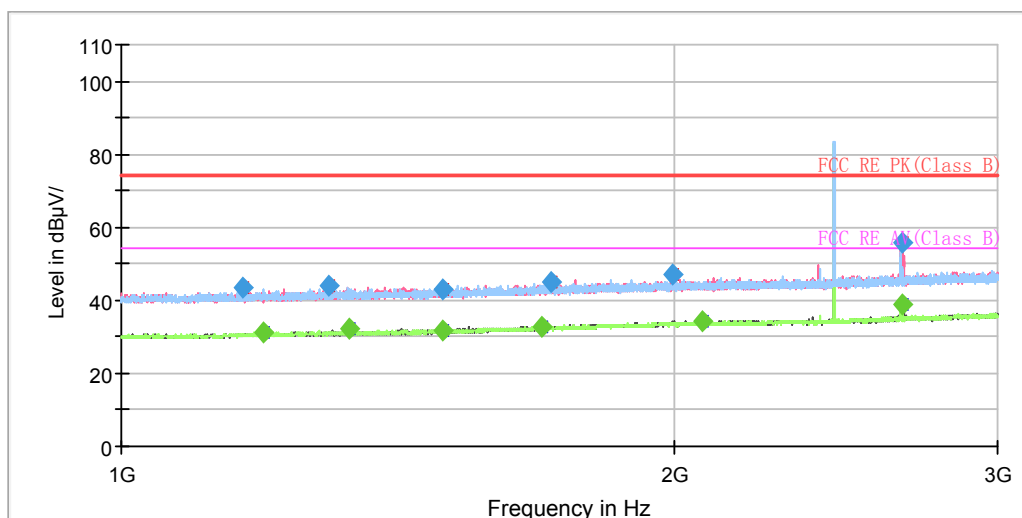


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1163.500000     | 43.59         | ---              | 100.0       | V            | 177.0         | -8.0                | 30.41       | 74.00          |
| 1195.500000     | ---           | 30.98            | 200.0       | H            | 158.0         | -7.8                | 23.02       | 54.00          |
| 1297.500000     | 44.03         | ---              | 100.0       | H            | 301.0         | -7.3                | 29.97       | 74.00          |
| 1329.500000     | ---           | 32.22            | 200.0       | H            | 288.0         | -7.1                | 21.78       | 54.00          |
| 1494.500000     | 42.96         | ---              | 200.0       | V            | 266.0         | -6.2                | 31.04       | 74.00          |
| 1497.500000     | ---           | 31.73            | 200.0       | V            | 189.0         | -6.2                | 22.27       | 54.00          |
| 1695.250000     | ---           | 32.98            | 200.0       | V            | 196.0         | -5.1                | 21.02       | 54.00          |
| 1714.500000     | 45.27         | ---              | 200.0       | H            | 191.0         | -5.0                | 28.73       | 74.00          |
| 1994.000000     | 46.83         | ---              | 200.0       | V            | 332.0         | -3.4                | 27.17       | 74.00          |
| 2070.750000     | ---           | 34.21            | 100.0       | H            | 308.0         | -3.1                | 19.79       | 54.00          |
| 2664.250000     | ---           | 38.99            | 100.0       | V            | 156.0         | -0.7                | 15.01       | 54.00          |
| 2664.250000     | 55.84         | ---              | 200.0       | V            | 160.0         | -0.7                | 18.16       | 74.00          |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

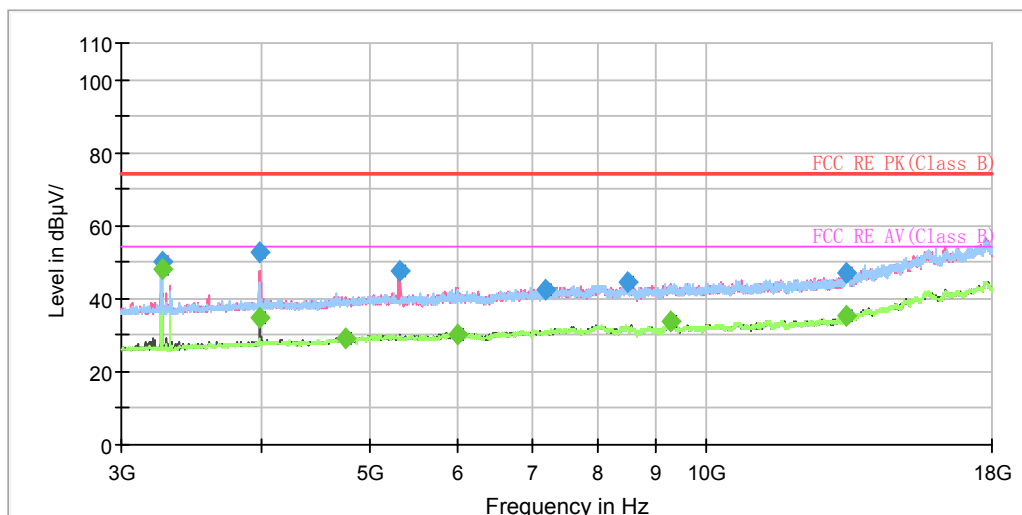


Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3258.582500     | ---           | 48.34            | 200.0       | V            | 261.0         | -8.3                | 5.66        | 54.00          |
| 3258.658750     | 49.95         | ---              | 200.0       | V            | 261.0         | -8.3                | 24.05       | 74.00          |
| 3985.790000     | 52.73         | ---              | 100.0       | V            | 244.0         | -6.0                | 21.27       | 74.00          |
| 3990.847500     | ---           | 34.88            | 100.0       | V            | 244.0         | -6.0                | 19.12       | 54.00          |
| 4761.908750     | ---           | 29.17            | 200.0       | V            | 309.0         | -4.2                | 24.83       | 54.00          |
| 5313.011250     | 47.57         | ---              | 200.0       | V            | 30.0          | -3.2                | 26.43       | 74.00          |
| 5994.316250     | ---           | 30.14            | 100.0       | V            | 139.0         | -2.1                | 23.86       | 54.00          |
| 7190.643750     | 42.60         | ---              | 100.0       | H            | 81.0          | -0.5                | 31.40       | 74.00          |
| 8519.261250     | 44.52         | ---              | 200.0       | V            | 40.0          | 0.8                 | 29.48       | 74.00          |
| 9302.237500     | ---           | 33.91            | 100.0       | V            | 123.0         | 1.5                 | 20.09       | 54.00          |
| 13324.366250    | 47.10         | ---              | 200.0       | V            | 211.0         | 6.2                 | 26.90       | 74.00          |
| 13347.127500    | ---           | 35.32            | 100.0       | H            | 89.0          | 6.3                 | 18.68       | 54.00          |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## BLE-Channel 39

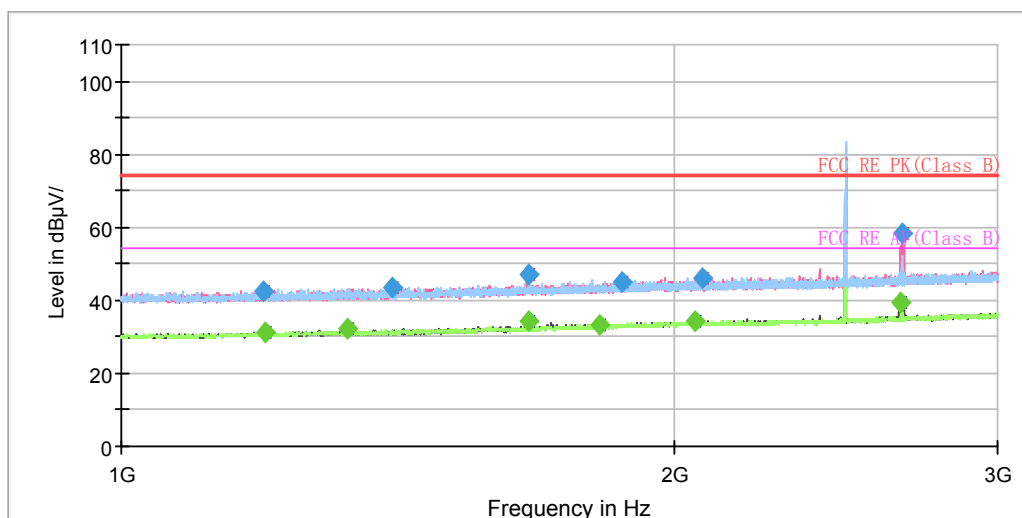


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1193.500000     | 42.69         | ---              | 200.0       | V            | 247.0         | -7.8                | 31.31       | 74.00          |
| 1197.500000     | ---           | 31.07            | 100.0       | V            | 127.0         | -7.8                | 22.93       | 54.00          |
| 1328.750000     | ---           | 32.39            | 200.0       | V            | 84.0          | -7.1                | 21.61       | 54.00          |
| 1405.750000     | 43.63         | ---              | 200.0       | V            | 156.0         | -6.7                | 30.37       | 74.00          |
| 1664.750000     | 47.29         | ---              | 200.0       | V            | 212.0         | -5.2                | 26.71       | 74.00          |
| 1665.750000     | ---           | 34.32            | 200.0       | V            | 212.0         | -5.2                | 19.68       | 54.00          |
| 1821.750000     | ---           | 33.42            | 200.0       | V            | 219.0         | -4.3                | 20.58       | 54.00          |
| 1873.750000     | 44.85         | ---              | 200.0       | V            | 156.0         | -4.1                | 29.15       | 74.00          |
| 2051.500000     | ---           | 34.17            | 200.0       | H            | 95.0          | -3.1                | 19.83       | 54.00          |
| 2071.500000     | 46.21         | ---              | 200.0       | V            | 133.0         | -3.1                | 27.79       | 74.00          |
| 2656.500000     | ---           | 39.63            | 100.0       | V            | 169.0         | -0.7                | 14.37       | 54.00          |
| 2659.500000     | 58.23         | ---              | 100.0       | V            | 176.0         | -0.7                | 15.77       | 74.00          |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



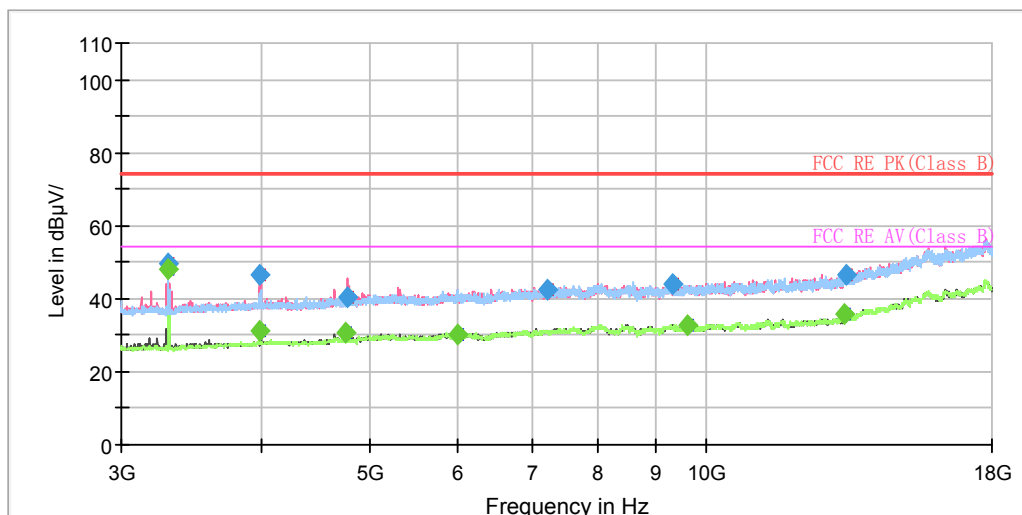

Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 3306.593750     | 49.82         | ---              | 100.0       | V            | 281.0         | -8.6                | 24.18       | 74.00          |
| 3306.658750     | ---           | 48.15            | 100.0       | V            | 281.0         | -8.6                | 5.85        | 54.00          |
| 3982.750000     | 46.66         | ---              | 100.0       | V            | 134.0         | -6.0                | 27.34       | 74.00          |
| 3992.190000     | ---           | 31.36            | 100.0       | V            | 150.0         | -6.0                | 22.64       | 54.00          |
| 4763.347500     | ---           | 30.82            | 100.0       | H            | 162.0         | -4.2                | 23.18       | 54.00          |
| 4780.520000     | 40.46         | ---              | 100.0       | V            | 351.0         | -4.2                | 33.54       | 74.00          |
| 5992.413750     | ---           | 30.26            | 100.0       | H            | 162.0         | -2.1                | 23.74       | 54.00          |
| 7218.813750     | 42.31         | ---              | 200.0       | H            | 152.0         | -0.5                | 31.69       | 74.00          |
| 9319.376250     | 44.09         | ---              | 100.0       | V            | 228.0         | 1.5                 | 29.91       | 74.00          |
| 9623.777500     | ---           | 32.59            | 100.0       | V            | 103.0         | 1.6                 | 21.41       | 54.00          |
| 13309.332500    | ---           | 35.66            | 100.0       | V            | 0.0           | 6.1                 | 18.34       | 54.00          |
| 13336.705000    | 46.68         | ---              | 100.0       | V            | 0.0           | 6.3                 | 27.32       | 74.00          |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 5.7. Conducted Emission

### Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

### Test Setup

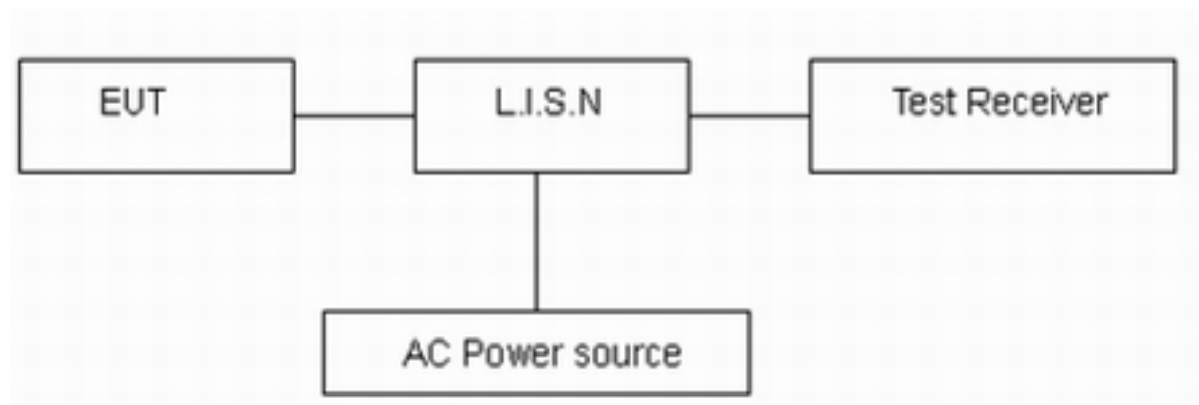

Note: AC Power source is used to change the voltage 110V/60Hz.

### Limits

| Frequency<br>(MHz) | Conducted Limits(dBμV) |            |
|--------------------|------------------------|------------|
|                    | Quasi-peak             | Average    |
| 0.15 - 0.5         | 66 to 56 *             | 56 to 46 * |
| 0.5 - 5            | 56                     | 46         |
| 5 - 30             | 60                     | 50         |


\*: Decreases with the logarithm of the frequency.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.

### Test Results:


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes (WIFI 2.4G /BLE) with all channels, BLE-Channel 0 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

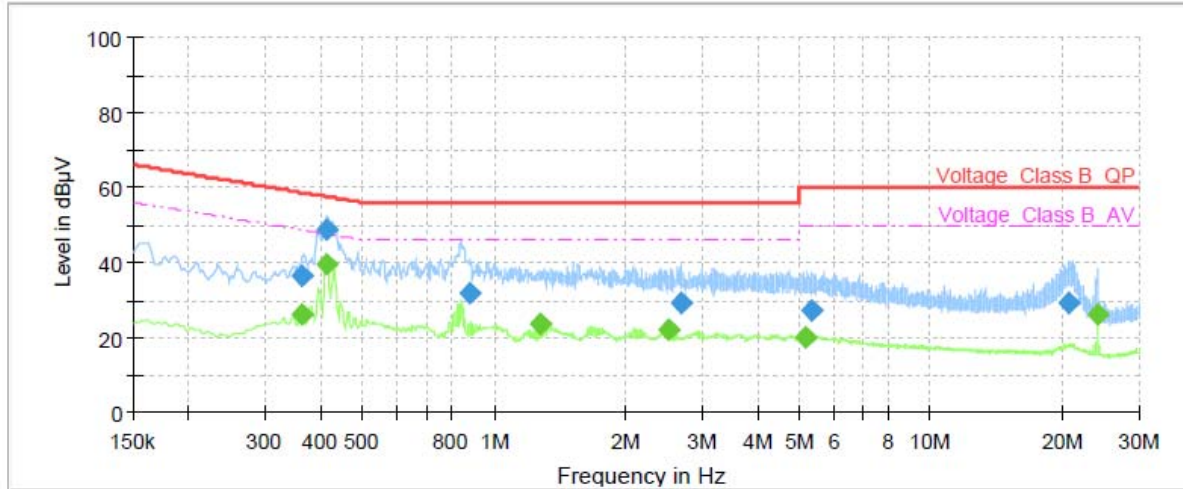

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.36            | ---              | 26.19          | 48.69        | 22.50       | 1000.0          | 9.000           | L1   | ON     | 19         |
| 0.36            | 36.42            | ---            | 58.69        | 22.27       | 1000.0          | 9.000           | L1   | ON     | 19         |
| 0.41            | ---              | 39.33          | 47.58        | 8.25        | 1000.0          | 9.000           | L1   | ON     | 19         |
| 0.42            | 48.85            | ---            | 57.54        | 8.69        | 1000.0          | 9.000           | L1   | ON     | 19         |
| 0.88            | 31.96            | ---            | 56.00        | 24.04       | 1000.0          | 9.000           | L1   | ON     | 19         |
| 1.28            | ---              | 23.72          | 46.00        | 22.28       | 1000.0          | 9.000           | L1   | ON     | 19         |
| 2.51            | ---              | 22.17          | 46.00        | 23.83       | 1000.0          | 9.000           | L1   | ON     | 19         |
| 2.67            | 29.32            | ---            | 56.00        | 26.68       | 1000.0          | 9.000           | L1   | ON     | 19         |
| 5.15            | ---              | 20.00          | 50.00        | 30.00       | 1000.0          | 9.000           | L1   | ON     | 19         |
| 5.36            | 27.30            | ---            | 60.00        | 32.70       | 1000.0          | 9.000           | L1   | ON     | 19         |
| 20.79           | 29.40            | ---            | 60.00        | 30.60       | 1000.0          | 9.000           | L1   | ON     | 20         |
| 24.00           | ---              | 26.16          | 50.00        | 23.84       | 1000.0          | 9.000           | L1   | ON     | 20         |

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

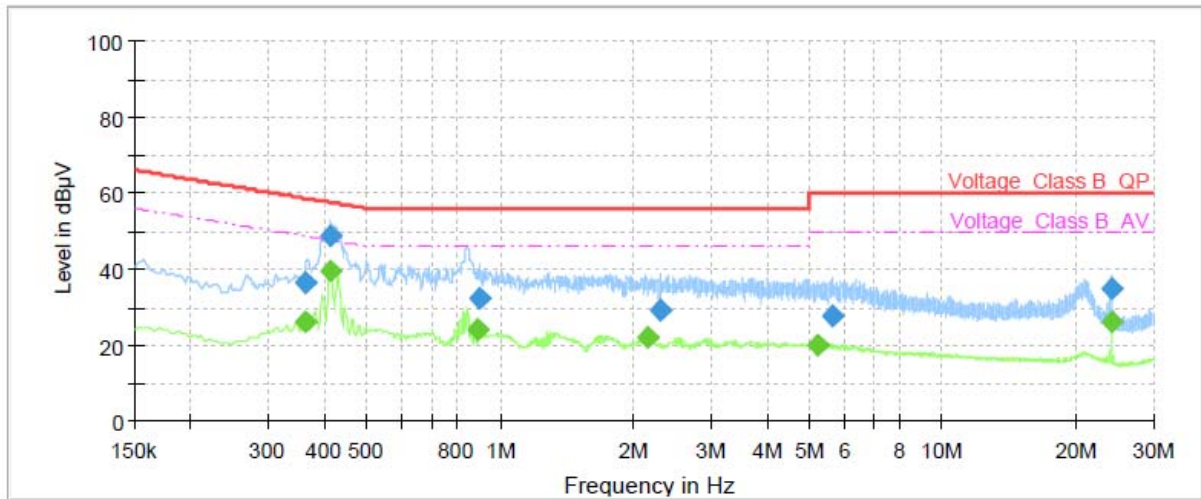

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.36            | ---              | 26.13          | 48.69        | 22.56       | 1000.0          | 9.000           | N    | ON     | 19         |
| 0.36            | 36.36            | ---            | 58.69        | 22.33       | 1000.0          | 9.000           | N    | ON     | 19         |
| 0.41            | ---              | 39.35          | 47.58        | 8.23        | 1000.0          | 9.000           | N    | ON     | 19         |
| 0.42            | 48.90            | ---            | 57.54        | 8.64        | 1000.0          | 9.000           | N    | ON     | 19         |
| 0.89            | ---              | 23.93          | 46.00        | 22.07       | 1000.0          | 9.000           | N    | ON     | 19         |
| 0.90            | 32.07            | ---            | 56.00        | 23.93       | 1000.0          | 9.000           | N    | ON     | 19         |
| 2.15            | ---              | 22.24          | 46.00        | 23.76       | 1000.0          | 9.000           | N    | ON     | 19         |
| 2.31            | 29.10            | ---            | 56.00        | 26.90       | 1000.0          | 9.000           | N    | ON     | 19         |
| 5.24            | ---              | 20.15          | 50.00        | 29.85       | 1000.0          | 9.000           | N    | ON     | 19         |
| 5.61            | 27.83            | ---            | 60.00        | 32.17       | 1000.0          | 9.000           | N    | ON     | 19         |
| 24.00           | ---              | 25.93          | 50.00        | 24.07       | 1000.0          | 9.000           | N    | ON     | 20         |
| 24.00           | 34.88            | ---            | 60.00        | 25.12       | 1000.0          | 9.000           | N    | ON     | 20         |

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz

## 6. Main Test Instruments

| Name                     | Manufacturer         | Type        | Serial Number | Calibration Date | Expiration Date |
|--------------------------|----------------------|-------------|---------------|------------------|-----------------|
| Spectrum Analyzer        | R&S                  | FSV30       | 100815        | 2019-12-15       | 2020-12-14      |
| EMI Test Receiver        | R&S                  | ESCI        | 100948        | 2020-05-18       | 2021-05-17      |
| Loop Antenna             | SCHWARZBECK          | FMZB1519    | 1519-047      | 2020-04-02       | 2023-04-01      |
| TRILOG Broadband Antenna | SCHWARZBECK          | VULB 9163   | 391           | 2019-12-16       | 2021-12-15      |
| Horn Antenna             | R&S                  | HF907       | 102723        | 2018-08-11       | 2021-08-10      |
| Horn Antenna             | ETS-Lindgren         | 3160-09     | 00102643      | 2018-06-20       | 2021-06-19      |
| EMI Test Receiver        | R&S                  | ESR         | 101667        | 2020-05-18       | 2021-05-17      |
| LISN                     | R&S                  | ENV216      | 101171        | 2018-12-15       | 2021-12-14      |
| Spectrum Analyzer        | Agilent              | N9010A      | MY47191109    | 2020-05-18       | 2021-05-17      |
| Power Meter              | R&S                  | NRP2        | 104306        | 2020-05-18       | 2021-05-17      |
| Power Sensor             | R&S                  | NRP-Z21     | 104799        | 2020-05-18       | 2021-05-17      |
| 20dB Attenuator          | Star River Highlight | UCL-TS2S-20 | 18013001      | 2019-12-15       | 2020-12-14      |
| RF Cable                 | Agilent              | SMA 15cm    | 0001          | 2020-06-12       | 2020-12-11      |
| Software                 | R&S                  | EMC32       | 9.26.0        | /                | /               |

\*\*\*\*\*END OF REPORT \*\*\*\*\*



## **ANNEX A: The EUT Appearance**

The EUT Appearance are submitted separately.



## **ANNEX B: Test Setup Photos**

The Test Setup Photos are submitted separately.