



No. 24T04Z100071-010



# SAR TEST REPORT

No. 24T04Z100071-010

For

**TCL Communication Ltd.**

**Tablet PC**

**Model Name: 8193A**

**with**

**Hardware Version: 05**

**Software Version: KAYM1**

**FCC ID: 2ACCJB205**

**Issued Date: 2024-1-30**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

**CTTL, Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [cttl\\_terminals@caict.ac.cn](mailto:cttl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

**REPORT HISTORY**

| Report Number    | Revision | Issue Date | Description                                      |
|------------------|----------|------------|--------------------------------------------------|
| 24T04Z100071-010 | Rev.0    | 2024-1-25  | Initial creation of test report                  |
| 24T04Z100071-010 | Rev.1    | 2024-1-30  | 1.Revise a typo in the file of Annex on page118. |

## TABLE OF CONTENT

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>1 TEST LABORATORY .....</b>                                         | <b>5</b>  |
| 1.1 INTRODUCTION & ACCREDITATION .....                                 | 5         |
| 1.2 TESTING LOCATION .....                                             | 5         |
| 1.3 TESTING ENVIRONMENT.....                                           | 6         |
| 1.4 PROJECT DATA .....                                                 | 6         |
| 1.5 SIGNATURE.....                                                     | 6         |
| <b>2 STATEMENT OF COMPLIANCE .....</b>                                 | <b>7</b>  |
| <b>3 CLIENT INFORMATION.....</b>                                       | <b>9</b>  |
| 3.1 APPLICANT INFORMATION .....                                        | 9         |
| 3.2 MANUFACTURER INFORMATION .....                                     | 9         |
| <b>4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b> | <b>10</b> |
| 4.1 ABOUT EUT .....                                                    | 10        |
| 4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....          | 11        |
| 4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....           | 11        |
| <b>5 TEST METHODOLOGY .....</b>                                        | <b>12</b> |
| 5.1 APPLICABLE LIMIT REGULATIONS .....                                 | 12        |
| 5.2 APPLICABLE MEASUREMENT STANDARDS .....                             | 12        |
| <b>6 SPECIFIC ABSORPTION RATE (SAR).....</b>                           | <b>13</b> |
| 6.1 INTRODUCTION.....                                                  | 13        |
| 6.2 SAR DEFINITION.....                                                | 13        |
| <b>7 TISSUE SIMULATING LIQUIDS .....</b>                               | <b>14</b> |
| 7.1 TARGETS FOR TISSUE SIMULATING LIQUID .....                         | 14        |
| 7.2 DIELECTRIC PERFORMANCE .....                                       | 14        |
| <b>8 SYSTEM VERIFICATION.....</b>                                      | <b>16</b> |
| 8.1 SYSTEM SETUP.....                                                  | 16        |
| 8.2 SYSTEM VERIFICATION.....                                           | 17        |
| <b>9 MEASUREMENT PROCEDURES .....</b>                                  | <b>18</b> |
| 9.1 TESTS TO BE PERFORMED .....                                        | 18        |
| 9.2 GENERAL MEASUREMENT PROCEDURE .....                                | 20        |
| 9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR .....                         | 21        |
| 9.4 SAR MEASUREMENT FOR LTE .....                                      | 22        |
| 9.5 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR .....             | 24        |
| 9.6 POWER DRIFT .....                                                  | 24        |
| <b>10 AREA SCAN BASED 1-G SAR .....</b>                                | <b>25</b> |
| 10.1 REQUIREMENT OF KDB.....                                           | 25        |

|                                                                       |            |
|-----------------------------------------------------------------------|------------|
| 10.2 FAST SAR ALGORITHMS .....                                        | 25         |
| <b>11 CONDUCTED OUTPUT POWER.....</b>                                 | <b>26</b>  |
| 11.1 GSM MEASUREMENT RESULT .....                                     | 27         |
| 11.2 WCDMA MEASUREMENT RESULT .....                                   | 31         |
| 11.3 LTE MEASUREMENT RESULT .....                                     | 34         |
| 11.4 WI-FI AND BT MEASUREMENT RESULT .....                            | 83         |
| <b>12 SIMULTANEOUS TX SAR CONSIDERATIONS .....</b>                    | <b>117</b> |
| 12.1 INTRODUCTION.....                                                | 117        |
| 12.2 TRANSMIT ANTENNA SEPARATION DISTANCES.....                       | 117        |
| 12.3 SAR MEASUREMENT POSITIONS .....                                  | 117        |
| <b>13 EVALUATION OF SIMULTANEOUS.....</b>                             | <b>118</b> |
| <b>14 SAR TEST RESULT .....</b>                                       | <b>119</b> |
| 14.1 SAR RESULTS FOR 2G/3G/4G .....                                   | 120        |
| 14.2 SAR EVALUATION FOR WIFI.....                                     | 124        |
| 14.3 WLAN EVALUATION FOR BT.....                                      | 127        |
| <b>15 SAR MEASUREMENT VARIABILITY.....</b>                            | <b>128</b> |
| <b>16 MEASUREMENT UNCERTAINTY .....</b>                               | <b>129</b> |
| 16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz) ..... | 129        |
| 16.2 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz) .....      | 130        |
| 16.3 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz) .....   | 131        |
| 16.4 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz) .....        | 132        |
| <b>17 MAIN TEST INSTRUMENTS .....</b>                                 | <b>134</b> |
| <b>APPENDIXES .....</b>                                               | <b>135</b> |



No. 24T04Z100071-010

## 1 Test Laboratory

### 1.1 Introduction & Accreditation

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

### 1.2 Testing Location

|               |                                                                            |
|---------------|----------------------------------------------------------------------------|
| Company Name: | CTTL                                                                       |
| Address:      | No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191. |

### 1.3 Testing Environment

|                             |                |
|-----------------------------|----------------|
| Temperature:                | 18°C~25°C,     |
| Relative humidity:          | 30%~ 70%       |
| Ground system resistance:   | < 0.5 $\Omega$ |
| Ambient noise & Reflection: | < 0.012 W/kg   |

### 1.4 Project Data


|                     |                  |
|---------------------|------------------|
| Project Leader:     | Qi Dianyuan      |
| Test Engineer:      | Yao Juming       |
| Testing Start Date: | August 7, 2023   |
| Testing End Date:   | January 21, 2024 |

### 1.5 Signature




---

**Yao Juming**  
(Prepared this test report)

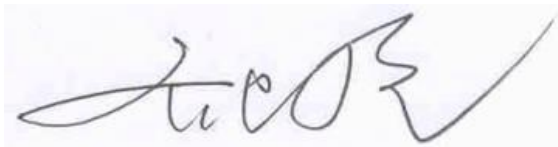

---

**Qi Dianyuan**  
(Reviewed this test report)



---

**Lu Bingsong**  
Deputy Director of the laboratory  
(Approved this test report)

## 2 Statement of Compliance

This EUT is a variant product and the report of original sample is No. I23Z61433-SEM01. We full test for newly add bands –LTE B26. The results of LTE B26 are presented on page123.

The maximum results of Specific Absorption Rate (SAR) found during testing for TCL Communication Ltd. Tablet PC 8193A are as follows:

**Table 2.1: Highest Reported SAR (1g)**

| Technology Band | Body SAR 1g<br>(W/kg) | Equipment Class |
|-----------------|-----------------------|-----------------|
| GSM850          | <b>0.56</b>           | PCT             |
| GSM1900         | <b>0.62</b>           |                 |
| WCDMA1900       | <b>0.62</b>           |                 |
| WCDMA1700       | <b>0.66</b>           |                 |
| WCDMA 850       | <b>0.54</b>           |                 |
| LTE Band2       | <b>0.60</b>           |                 |
| LTE Band5       | <b>0.68</b>           |                 |
| LTE Band7       | <b>1.18</b>           |                 |
| LTE Band12      | <b>0.67</b>           |                 |
| LTE Band13      | <b>0.67</b>           |                 |
| LTE Band26      | <b>0.72</b>           |                 |
| LTE Band41      | <b>1.16</b>           |                 |
| LTE Band66      | <b>1.14</b>           |                 |
| WLAN 2.4GHz     | <b>1.03</b>           | DTS             |
| WLAN 5GHz       | <b>1.16</b>           | NII             |
| BT              | <b>0.24</b>           | DSS             |

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 0mm/5mm/11mm/17mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report. The highest reported SAR value is obtained at the case of **(Table 2.1)**, and the values are:

**Body: 1.18 W/kg(1g) (Rear 17mm)**

Remark:

This device supports both LTE B17/B4/B38 and LTE B12/B66/B41. Since the supported frequency span for LTE B17/B4/B38 falls completely within the supports frequency span for LTE B12/B66/B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B12/B66/B41.

**Table 2.2: The sum of SAR values for Main antenna + WiFi-2.4G**

|                                   | Position                 | Main antenna | WiFi-2.4G | Sum         |
|-----------------------------------|--------------------------|--------------|-----------|-------------|
| <b>Highest SAR value for Body</b> | Rear 0mm<br>(LTE B66)    | 0.72         | 0.64      | <b>1.36</b> |
| <b>Highest SAR value for Body</b> | Left 0mm<br>(WCDMA 1900) | 0.53         | 0.98      | <b>1.51</b> |

**Table 2.3: The sum of SAR values for Main antenna + WiFi-5G +BT**

|                                   | Position                 | Main antenna | WiFi-5G | BT   | Sum         |
|-----------------------------------|--------------------------|--------------|---------|------|-------------|
| <b>Highest SAR value for Body</b> | Rear 0mm<br>(LTE B66)    | 0.72         | 0.68    | 0.08 | <b>1.48</b> |
| <b>Highest SAR value for Body</b> | Left 0mm<br>(WCDMA 1900) | 0.53         | 0.65    | 0.24 | <b>1.42</b> |

According to the above tables, the highest sum of reported SAR values is **1.51 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

#### **Conclusion:**

According to the above tables, the sum of reported SAR values is <1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.



### 3 Client Information

#### 3.1 Applicant Information

|                 |                                                                                               |
|-----------------|-----------------------------------------------------------------------------------------------|
| Company Name:   | TCL Communication Ltd.                                                                        |
| Address/Post:   | 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong |
| Contact Person: | Annie Jiang                                                                                   |
| Contact Email:  | nianxiang.jiang@tcl.com                                                                       |
| Telephone:      | +86 755 3661 1621                                                                             |

#### 3.2 Manufacturer Information

|                 |                                                                                               |
|-----------------|-----------------------------------------------------------------------------------------------|
| Company Name:   | TCL Communication Ltd.                                                                        |
| Address/Post:   | 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong |
| Contact Person: | Annie Jiang                                                                                   |
| Contact Email:  | nianxiang.jiang@tcl.com                                                                       |
| Telephone:      | +86 755 3661 1621                                                                             |

## 4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

### 4.1 About EUT

|                                     |                                                                                                                               |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Description:                        | Tablet PC                                                                                                                     |
| Model name:                         | 8193A                                                                                                                         |
| Operating mode(s):                  | GSM850/900/1800/1900, WCDMA850/900/1700/1900/2100<br>LTEBand1/2/3/4/5/7/8/12/13/17/20/26/28/38/40/41/66<br>Wi-Fi(2.4G&5G), BT |
| Tested Tx Frequency:                | 824 – 849 MHz (GSM 850)                                                                                                       |
|                                     | 1850 – 1910 MHz (GSM 1900)                                                                                                    |
|                                     | 824 – 849 MHz (WCDMA 850 Band V)                                                                                              |
|                                     | 1850 – 1910 MHz (WCDMA1900 Band II)                                                                                           |
|                                     | 1710-1755 MHz (WCDMA1700 Band IV)                                                                                             |
|                                     | 1850 – 1910 MHz (LTE Band 2)                                                                                                  |
|                                     | 824 – 849 MHz (LTE Band 5)                                                                                                    |
|                                     | 2500 – 2570 MHz (LTE Band 7)                                                                                                  |
|                                     | 699.7 – 715.3 MHz (LTE Band 12)                                                                                               |
|                                     | 779.5 – 784.5 MHz (LTE Band 13)                                                                                               |
|                                     | 814.7–848.3 MHz (LTE Band 26)                                                                                                 |
|                                     | 2496 – 2690 MHz (LTE Band41)                                                                                                  |
|                                     | 1710 –1780 MHz (LTE Band 66)                                                                                                  |
|                                     | 2412 – 2462 MHz (Wi-Fi 2.4G)                                                                                                  |
|                                     | 2400 – 2483.5 MHz (Bluetooth)                                                                                                 |
|                                     | 5180 – 5240 MHz (Wi-Fi 5.2G)                                                                                                  |
|                                     | 5260 – 5320 MHz (Wi-Fi 5.3G)                                                                                                  |
|                                     | 5500 – 5720 MHz (Wi-Fi 5.5G)                                                                                                  |
|                                     | 5745 – 5825 MHz (Wi-Fi 5.8G)                                                                                                  |
| GPRS/EGPRS Multislot Class:         | 12                                                                                                                            |
| Test device production information: | Production unit                                                                                                               |
| Device type:                        | Portable device                                                                                                               |
| Antenna type:                       | Integrated antenna                                                                                                            |
| Hotspot mode:                       | Support                                                                                                                       |

**4.2 Internal Identification of EUT used during the test**

| EUT ID* | IMEI/SN         | HW Version | SW Version |
|---------|-----------------|------------|------------|
| EUT1    | 350367040000142 | 05         | KAYM1      |
| EUT2    | 350367040000159 | 05         | KAYM1      |
| EUT3    | 350367040000043 | 05         | KAYM1      |

\*EUT ID: is used to identify the test sample in the lab internally.

**Note:** It is performed to test SAR with the EUT1-2 and conducted power with the EUT3.

**4.3 Internal Identification of AE used during the test**

| AE ID* | Description | Model         | SN | Manufacturer                          |
|--------|-------------|---------------|----|---------------------------------------|
| AE1    | Battery     | 2853B7PL - 2P | /  | HUNAN GAOYUAN BATTERY COMPANY LIMITED |

\*AE ID: is used to identify the test sample in the lab internally.

## 5 TEST METHODOLOGY

### 5.1 Applicable Limit Regulations

**ANSI C95.1–1992:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2 Applicable Measurement Standards

**IEEE 1528–2013:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

**KDB447498 D01: General RF Exposure Guidance v06:** Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

**KDB616217 D04 SAR for laptop and tablets v01r02** SAR Evaluation Considerations for Laptop, Notebook, Notebook and Tablet Computers.

**KDB648474 D04 Handset SAR v01r03:** SAR Evaluation Considerations for Wireless Handsets.

**KDB941225 D01 SAR test for 3G devices v03r01:** SAR Measurement Procedures for 3G Devices

**KDB941225 D05 SAR for LTE Devices v02r05:** SAR Evaluation Considerations for LTE Devices

**KDB941225 D06 Hotspot Mode SAR v02r01:** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

**KDB248227 D01 802.11 Wi-Fi SAR v02r02:** SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

**KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04:** SAR Measurement Requirements for 100 MHz to 6 GHz.

**KDB865664 D02 RF Exposure Reporting v01r02:** RF Exposure Compliance Reporting and Documentation Considerations

## 6 Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (  $dW$  ) absorbed by (dissipated in) an incremental mass (  $dm$  ) contained in a volume element (  $dv$  ) of a given density (  $\rho$  ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left( \frac{\delta T}{\delta t} \right)$$

Where:  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of tissue and  $E$  is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 7 Tissue Simulating Liquids

### 7.1 Targets for tissue simulating liquid

**Table 7.1: Targets for tissue simulating liquid**


| Frequency(MHz) | Liquid Type | Conductivity( $\sigma$ ) | $\pm 5\%$ Range | Permittivity( $\epsilon$ ) | $\pm 5\%$ Range |
|----------------|-------------|--------------------------|-----------------|----------------------------|-----------------|
| 750            | Head        | 0.89                     | 0.85~0.93       | 41.94                      | 39.8~44.0       |
| 835            | Head        | 0.90                     | 0.86~0.95       | 41.5                       | 39.4~43.6       |
| 1750           | Head        | 1.37                     | 1.30~1.44       | 40.08                      | 38.1~42.1       |
| 1900           | Head        | 1.40                     | 1.33~1.47       | 40.0                       | 38.0~42.0       |
| 2450           | Head        | 1.67                     | 1.59~1.75       | 39.47                      | 37.5~41.4       |
| 2600           | Head        | 1.96                     | 1.86~2.06       | 39.01                      | 37.1~41.0       |
| 5250           | Head        | 4.71                     | 4.47~4.95       | 35.93                      | 34.13~37.73     |
| 5600           | Head        | 5.07                     | 4.82~5.32       | 35.53                      | 33.8~37.3       |
| 5750           | Head        | 5.22                     | 4.96~5.48       | 35.36                      | 33.59~37.13     |

### 7.2 Dielectric Performance


**Table 7.2: Dielectric Performance of Tissue Simulating Liquid**

| Measurement Date<br>(yyyy-mm-dd) | Type | Frequency | Permittivity<br>$\epsilon$ | Drift<br>(%) | Conductivity<br>$\sigma$ (S/m) | Drift<br>(%) |
|----------------------------------|------|-----------|----------------------------|--------------|--------------------------------|--------------|
| 2023-8-15                        | Head | 750 MHz   | 42.712                     | 1.84         | 0.897                          | 0.79         |
| 2023-8-7                         | Head | 835 MHz   | 42.31                      | 1.95         | 0.911                          | 1.22         |
| 2023-8-9                         | Head | 1800 MHz  | 39.423                     | -1.44        | 1.36                           | -2.86        |
| 2023-8-12                        | Head | 1900 MHz  | 39.336                     | -1.66        | 1.393                          | -0.50        |
| 2023-8-18                        | Head | 2450 MHz  | 40.234                     | 2.64         | 1.847                          | 2.61         |
| 2023-8-16                        | Head | 2550 MHz  | 38.912                     | -0.40        | 1.951                          | 2.15         |
| 2023-8-22                        | Head | 5250 MHz  | 35.783                     | -0.41        | 4.641                          | -1.46        |
| 2023-8-24                        | Head | 5600 MHz  | 35.13                      | -1.13        | 4.96                           | -2.17        |
| 2023-8-25                        | Head | 5750 MHz  | 35.864                     | 1.43         | 5.079                          | -2.70        |
| 2024-1-21                        | Head | 835 MHz   | 41.214                     | -0.69%       | 0.897                          | -0.33%       |

Note: The liquid temperature is 22.0°C

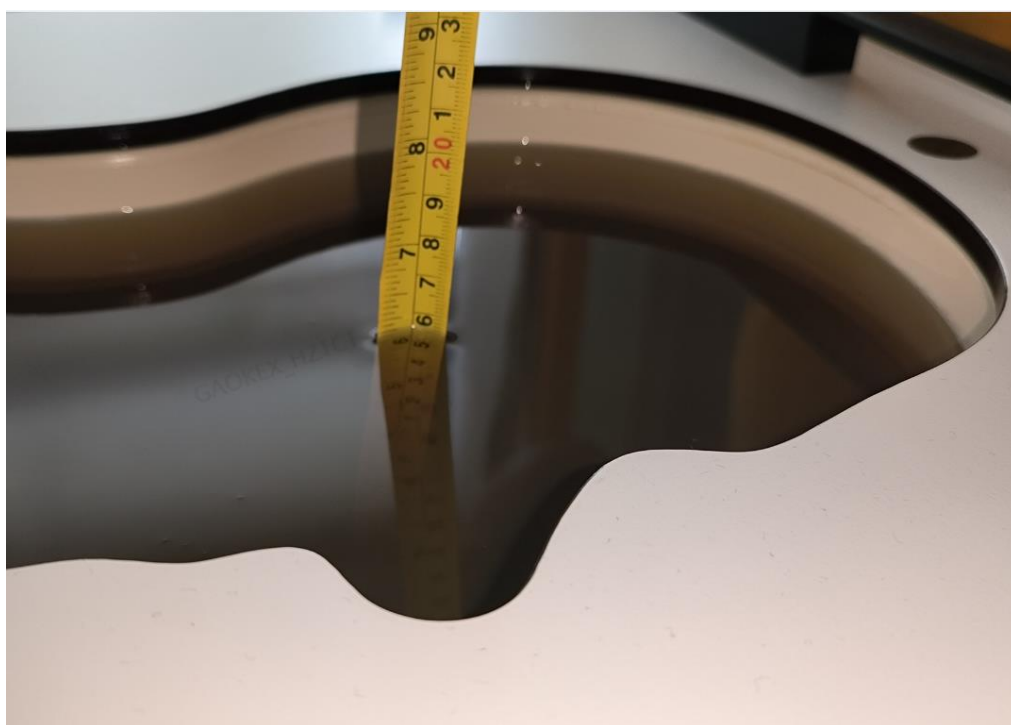

Picture 7-1 Liquid depth in the Head Phantom

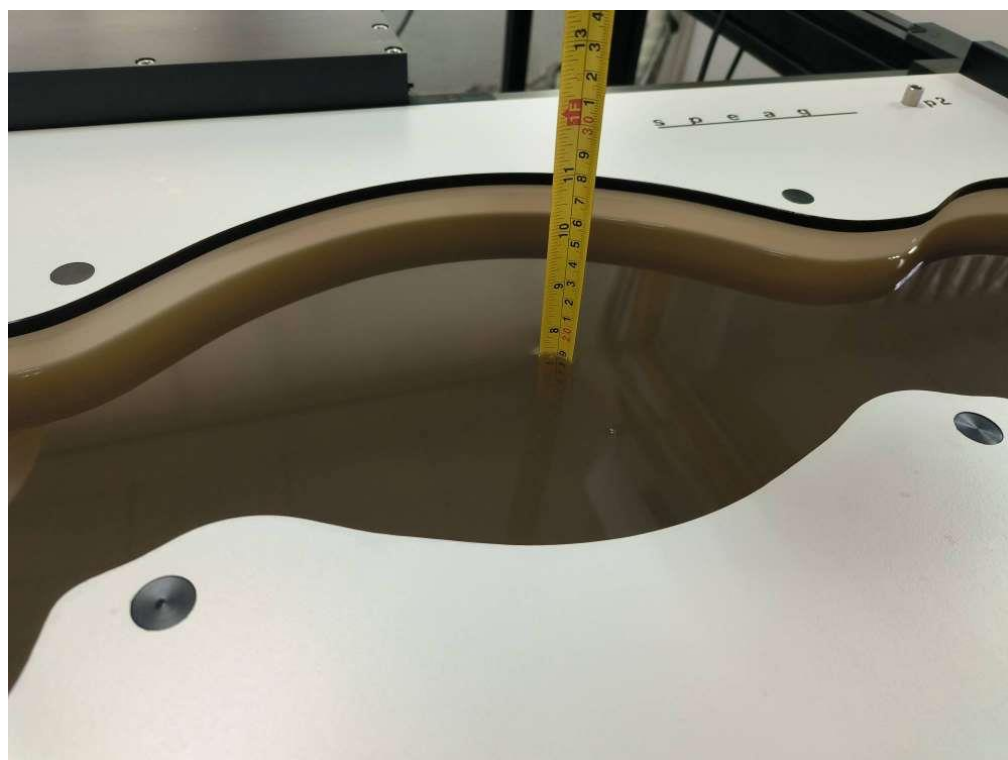


Picture 7-2 Liquid depth in the Head Phantom


## 8 System verification

### 8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

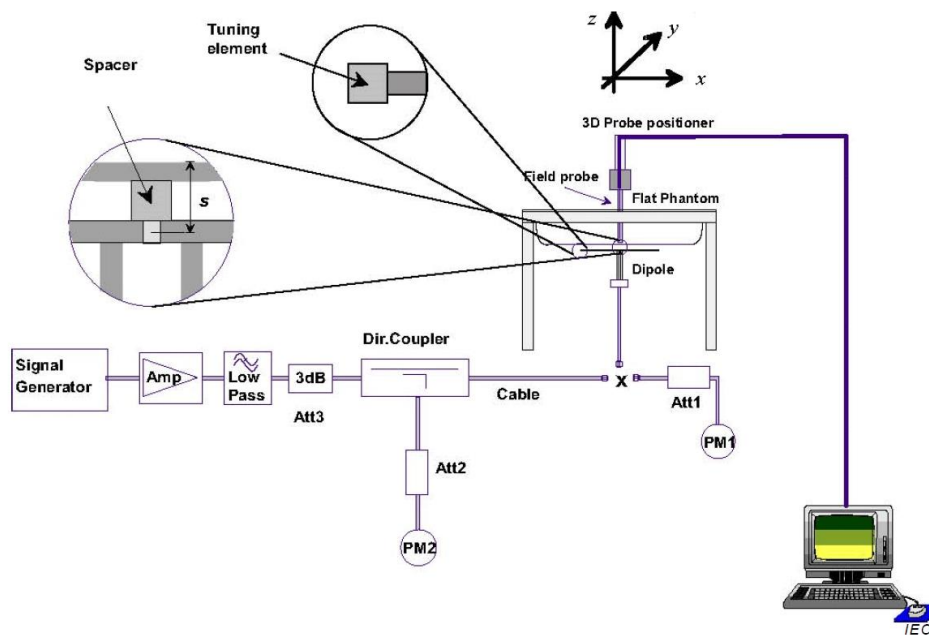

Picture 8.1 System Setup for System Evaluation

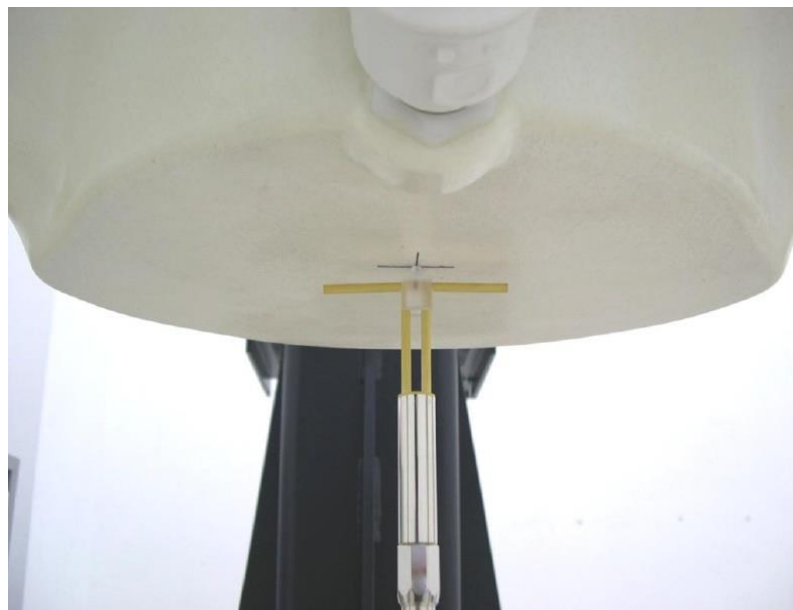

Picture 8.2 Photo of Dipole Setup



## 8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

**Table 8.1: System Verification of Head**

| Measurement Date<br>(yyyy-mm-dd) | Frequency | Target value (W/kg) |                | Measured value(W/kg) |                | Deviation       |                |
|----------------------------------|-----------|---------------------|----------------|----------------------|----------------|-----------------|----------------|
|                                  |           | 10 g<br>Average     | 1 g<br>Average | 10 g<br>Average      | 1 g<br>Average | 10 g<br>Average | 1 g<br>Average |
| 2023-8-15                        | 750 MHz   | 5.54                | 8.48           | 5.36                 | 8.28           | -3.25%          | -2.36%         |
| 2023-8-7                         | 835 MHz   | 6.32                | 9.55           | 6.16                 | 9.28           | -2.53%          | -2.83%         |
| 2023-8-9                         | 1800 MHz  | 20.8                | 39.1           | 21.24                | 39.88          | 2.12%           | 1.99%          |
| 2023-8-12                        | 1900 MHz  | 21                  | 40.4           | 20.44                | 39.4           | -2.67%          | -2.48%         |
| 2023-8-18                        | 2450 MHz  | 24.5                | 52.4           | 25.08                | 53.72          | 2.37%           | 2.52%          |
| 2023-8-16                        | 2550 MHz  | 24.6                | 55.5           | 24.28                | 54.68          | -1.30%          | -1.48%         |
| 2023-8-22                        | 5250 MHz  | 22.8                | 79.6           | 21.8                 | 76.2           | -4.39%          | -4.27%         |
| 2023-8-24                        | 5600 MHz  | 23.8                | 83.6           | 24.1                 | 84.4           | 1.26%           | 0.96%          |
| 2023-8-25                        | 5750 MHz  | 22.7                | 80.5           | 23.3                 | 81.8           | 2.64%           | 1.61%          |
| 2024-1-21                        | 835 MHz   | 6.25                | 9.62           | 6.36                 | 9.72           | 1.76%           | 1.04%          |

## 9 Measurement Procedures

### 9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


**Step 1:** The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band ( $f_c$ ) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

**Step 2:** For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

**Step 3:** Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

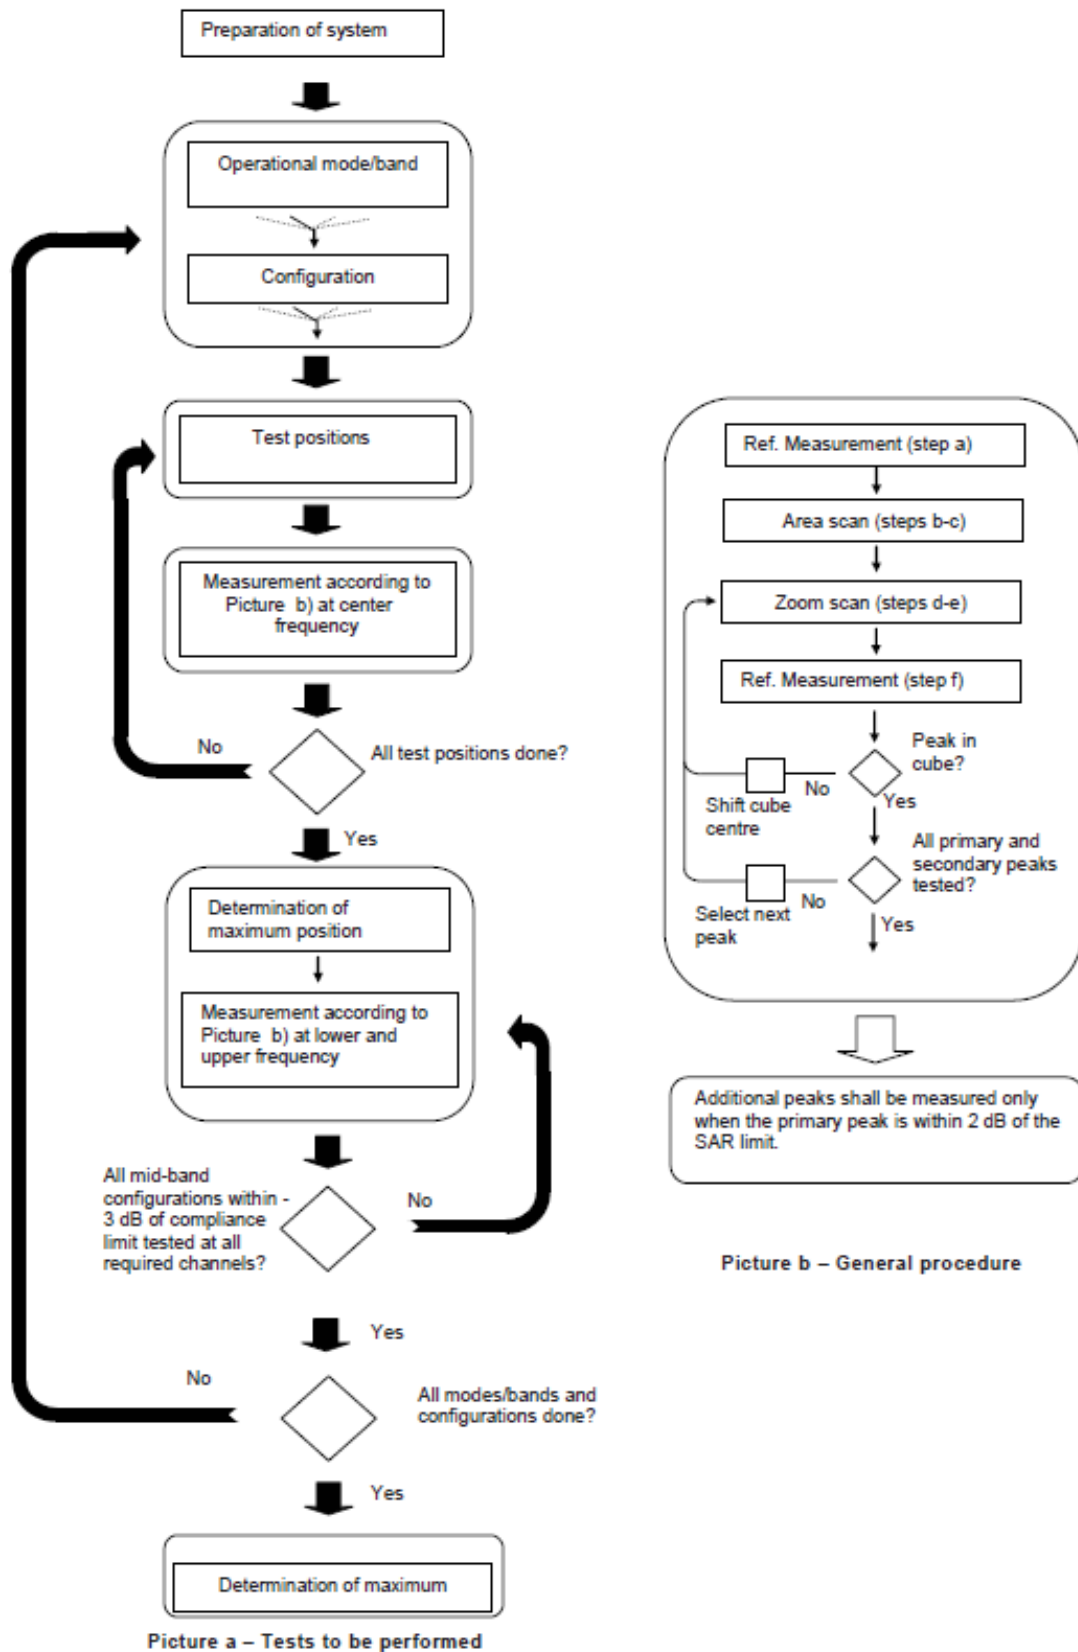

Picture 9.1Block diagram of the tests to be performed

## 9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

|                                                                                                                                                                                                                                                                                                      |                                    |                                                                                      | $\leq 3$ GHz                                                                                                                                                                                                                                                           | $> 3$ GHz                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface                                                                                                                                                                                               |                                    |                                                                                      | $5 \pm 1$ mm                                                                                                                                                                                                                                                           | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm                            |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location                                                                                                                                                                                                            |                                    |                                                                                      | $30^\circ \pm 1^\circ$                                                                                                                                                                                                                                                 | $20^\circ \pm 1^\circ$                                                        |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                                                                                                                                                                                                                          |                                    |                                                                                      | $\leq 2$ GHz: $\leq 15$ mm<br>2 – 3 GHz: $\leq 12$ mm                                                                                                                                                                                                                  | 3 – 4 GHz: $\leq 12$ mm<br>4 – 6 GHz: $\leq 10$ mm                            |
|                                                                                                                                                                                                                                                                                                      |                                    |                                                                                      | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                                               |
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$                                                                                                                                                                                                                          |                                    |                                                                                      | $\leq 2$ GHz: $\leq 8$ mm<br>2 – 3 GHz: $\leq 5$ mm*                                                                                                                                                                                                                   | 3 – 4 GHz: $\leq 5$ mm*<br>4 – 6 GHz: $\leq 4$ mm*                            |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                                                      | uniform grid: $\Delta z_{Zoom}(n)$ |                                                                                      | $\leq 5$ mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: $\leq 4$ mm<br>4 – 5 GHz: $\leq 3$ mm<br>5 – 6 GHz: $\leq 2$ mm    |
|                                                                                                                                                                                                                                                                                                      | graded grid                        | $\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4$ mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: $\leq 3$ mm<br>4 – 5 GHz: $\leq 2.5$ mm<br>5 – 6 GHz: $\leq 2$ mm  |
|                                                                                                                                                                                                                                                                                                      |                                    | $\Delta z_{Zoom}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$                                                                                                                                                                                                                                  |                                                                               |
| Minimum zoom scan volume                                                                                                                                                                                                                                                                             | x, y, z                            |                                                                                      | $\geq 30$ mm                                                                                                                                                                                                                                                           | 3 – 4 GHz: $\geq 28$ mm<br>4 – 5 GHz: $\geq 25$ mm<br>5 – 6 GHz: $\geq 22$ mm |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.                                                                                                                                                    |                                    |                                                                                      |                                                                                                                                                                                                                                                                        |                                                                               |
| * When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                    |                                                                                      |                                                                                                                                                                                                                                                                        |                                                                               |

### 9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

#### For Release 5 HSDPA Data Devices:

| Sub-test | $\beta_c$ | $\beta_d$ | $\beta_d$ (SF) | $\beta_c / \beta_d$ | $\beta_{hs}$ | CM/dB |
|----------|-----------|-----------|----------------|---------------------|--------------|-------|
| 1        | 2/15      | 15/15     | 64             | 2/15                | 4/15         | 0.0   |
| 2        | 12/15     | 15/15     | 64             | 12/15               | 24/25        | 1.0   |
| 3        | 15/15     | 8/15      | 64             | 15/8                | 30/15        | 1.5   |
| 4        | 15/15     | 4/15      | 64             | 15/4                | 30/15        | 1.5   |

#### For Release 6 HSPA Data Devices

| Sub-test | $\beta_c$ | $\beta_d$ | $\beta_d$ (SF) | $\beta_c / \beta_d$ | $\beta_{hs}$ | $\beta_{ec}$ | $\beta_{ed}$                               | $\beta_{ed}$ (SF) | $\beta_{ed}$ (codes) | CM (dB) | MPR (dB) | AG Index | E-TFCI |
|----------|-----------|-----------|----------------|---------------------|--------------|--------------|--------------------------------------------|-------------------|----------------------|---------|----------|----------|--------|
| 1        | 11/15     | 15/15     | 64             | 11/15               | 22/15        | 209/225      | 1039/225                                   | 4                 | 1                    | 1.5     | 1.5      | 20       | 75     |
| 2        | 6/15      | 15/15     | 64             | 6/15                | 12/15        | 12/15        | 12/15                                      | 4                 | 1                    | 1.5     | 1.5      | 12       | 67     |
| 3        | 15/15     | 9/15      | 64             | 15/9                | 30/15        | 30/15        | $\beta_{ed1}:47/15$<br>$\beta_{ed2}:47/15$ | 4                 | 2                    | 1.5     | 1.5      | 15       | 92     |
| 4        | 2/15      | 15/15     | 64             | 2/15                | 4/15         | 4/15         | 56/75                                      | 4                 | 1                    | 1.5     | 1.5      | 17       | 71     |
| 5        | 15/15     | 15/15     | 64             | 15/15               | 24/15        | 30/15        | 134/15                                     | 4                 | 1                    | 1.5     | 1.5      | 21       | 81     |

#### Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

## 9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Schwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

### 1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

### 2) QPSK with 50% RB allocation


The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

### 3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

## TDD test:

TDD testing is performed using guidance from FCC KDB 941225 D05 and the SAR test guidance provided in April 2013 TCB works hop notes. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211.

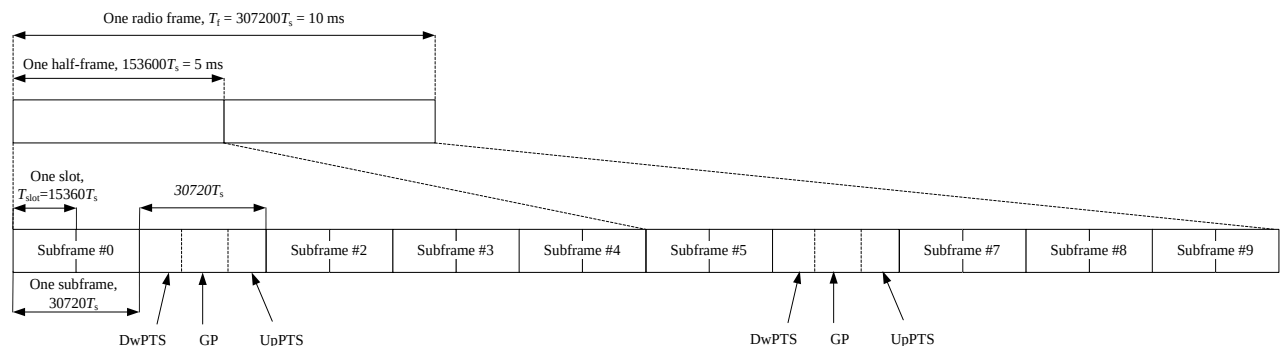

**Figure 9.2: Frame structure type 2 (for 5 ms switch-point periodicity)**

**Table 9.1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)**

| Special subframe configuration | Normal cyclic prefix in downlink |                                |                                  | Extended cyclic prefix in downlink |                                |                                  |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
|                                | DwPTS                            | UpPTS                          |                                  | DwPTS                              | UpPTS                          |                                  |
|                                |                                  | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |                                    | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| 0                              | $6592 \cdot T_s$                 | $2192 \cdot T_s$               | $2560 \cdot T_s$                 | $7680 \cdot T_s$                   | $2192 \cdot T_s$               | $2560 \cdot T_s$                 |
| 1                              | $19760 \cdot T_s$                |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 2                              | $21952 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 3                              | $24144 \cdot T_s$                |                                |                                  | $25600 \cdot T_s$                  |                                |                                  |
| 4                              | $26336 \cdot T_s$                | $4384 \cdot T_s$               | $5120 \cdot T_s$                 | $7680 \cdot T_s$                   | $4384 \cdot T_s$               | $5120 \cdot T_s$                 |
| 5                              | $6592 \cdot T_s$                 |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 6                              | $19760 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 7                              | $21952 \cdot T_s$                |                                |                                  | $12800 \cdot T_s$                  |                                |                                  |
| 8                              | $24144 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |
| 9                              | $13168 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |

**Table 9.2: Uplink-downlink configurations**

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D |
| 6                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | D |

Duty factor is calculated by:

$$\begin{aligned}
 \text{Duty factor} &= \text{uplink frame} \cdot 6 + \text{UpPTS} \cdot 2 / \text{one frame length} \\
 &= (30720 \cdot T_s \cdot 6 + 5120 \cdot T_s \cdot 2) / 307200 \cdot T_s \\
 &= 0.633
 \end{aligned}$$

## 9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

## 9.6 Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.



## 10 Area Scan Based 1-g SAR

### 10.1 Requirement of KDB

According to the KDB447498 D01, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-gSAR is  $\leq 1.2$  W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

### 10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

## 11 Conducted Output Power

**Table11.1: Summary of Sensor detection mechanism – Main Antenna**

| Antenna      | Sar sensor off+<br>WWAN transmit<br>alone | Sar sensor on +<br>WWAN transmit<br>alone | Sar sensor off+<br>WWAN transmit<br>with WIFI | Sar sensor on+<br>WWAN transmit<br>with WIFI |
|--------------|-------------------------------------------|-------------------------------------------|-----------------------------------------------|----------------------------------------------|
| Main Antenna | DSI0                                      | DSI1                                      | DSI2                                          | DSI3                                         |

**Table11.2: Summary of Sensor detection mechanism – WIFI Antenna**

| Antenna      | Sar sensor off+<br>WIFI transmit<br>alone | Sar sensor on +<br>WIFI transmit<br>alone | Sar sensor off+<br>WIFI transmit with<br>WWAN | Sar sensor on+<br>WIFI transmit with<br>WWAN |
|--------------|-------------------------------------------|-------------------------------------------|-----------------------------------------------|----------------------------------------------|
| WIFI Antenna | DSI0                                      | DSI1                                      | DSI2                                          | DSI3                                         |

Note: The detail of proximity sensor is presented in Annex I.

## 11.1 GSM Measurement result

**Table 11.1-1: The conducted power for GSM850 - DSI0/DSI2**

| GSM 850<br>GPRS (GMSK)     | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|----------------------------|--------------------------------------------------|-------|-------|---------|-------------|--------------------------------------------------|-------|-------|
|                            | 251                                              | 190   | 128   |         |             | 251                                              | 190   | 128   |
| 1 Txslot                   | 32.46                                            | 32.39 | 32.34 | 33.50   | -9.03       | 23.43                                            | 23.36 | 23.31 |
| <b>2 Txslots</b>           | 30.03                                            | 30.03 | 30.02 | 31.00   | -6.02       | 24.01                                            | 24.01 | 24.00 |
| 3 Txslots                  | 27.92                                            | 27.96 | 28.07 | 29.00   | -4.26       | 23.66                                            | 23.70 | 23.81 |
| 4 Txslots                  | 26.71                                            | 26.81 | 26.94 | 28.00   | -3.01       | 23.70                                            | 23.80 | 23.93 |
| GSM 850<br>EGPRS<br>(GMSK) | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|                            | 251                                              | 190   | 128   |         |             | 251                                              | 190   | 128   |
| 1 Txslot                   | 32.33                                            | 32.33 | 32.32 | 33.50   | -9.03       | 23.30                                            | 23.30 | 23.29 |
| <b>2 Txslots</b>           | 30.02                                            | 30.03 | 30.04 | 31.00   | -6.02       | 24.00                                            | 24.01 | 24.02 |
| 3 Txslots                  | 28.01                                            | 28.02 | 28.05 | 29.00   | -4.26       | 23.75                                            | 23.76 | 23.79 |
| 4 Txslots                  | 26.65                                            | 26.78 | 26.93 | 28.00   | -3.01       | 23.64                                            | 23.77 | 23.92 |
| GSM 850<br>EGPRS (8PSK)    | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|                            | 251                                              | 190   | 128   |         |             | 251                                              | 190   | 128   |
| 1 Txslot                   | 26.42                                            | 26.55 | 26.66 | 27.00   | -9.03       | 17.39                                            | 17.52 | 17.63 |
| 2 Txslots                  | 23.51                                            | 23.54 | 23.67 | 24.50   | -6.02       | 17.49                                            | 17.52 | 17.65 |
| 3Txslots                   | 21.73                                            | 21.55 | 21.68 | 22.50   | -4.26       | 17.47                                            | 17.29 | 17.42 |
| 4 Txslots                  | 20.38                                            | 20.45 | 20.59 | 21.50   | -3.01       | 17.37                                            | 17.44 | 17.58 |

### NOTES:

#### 1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**Table 11.1-2: The conducted power for GSM850 - DSI1/DSI3**

| GSM 850<br>GPRS (GMSK)     | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|----------------------------|--------------------------------------------------|-------|-------|---------|-------------|--------------------------------------------------|-------|-------|
|                            | 251                                              | 190   | 128   |         |             | 251                                              | 190   | 128   |
| 1 Txslot                   | 26.06                                            | 26.18 | 26.28 | 27.00   | -9.03       | 17.03                                            | 17.15 | 17.25 |
| <b>2 Txslots</b>           | 23.99                                            | 24.13 | 24.29 | 25.00   | -6.02       | 17.97                                            | 18.11 | 18.27 |
| 3 Txslots                  | 21.99                                            | 22.14 | 22.29 | 23.00   | -4.26       | 17.73                                            | 17.88 | 18.03 |
| 4 Txslots                  | 20.89                                            | 21.06 | 21.23 | 22.00   | -3.01       | 17.88                                            | 18.05 | 18.22 |
| GSM 850<br>EGPRS<br>(GMSK) | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|                            | 251                                              | 190   | 128   |         |             | 251                                              | 190   | 128   |
| 1 Txslot                   | 25.95                                            | 26.14 | 26.25 | 27.00   | -9.03       | 16.92                                            | 17.11 | 17.22 |
| <b>2 Txslots</b>           | 23.94                                            | 24.09 | 24.27 | 25.00   | -6.02       | 17.92                                            | 18.07 | 18.25 |
| 3 Txslots                  | 21.96                                            | 22.13 | 22.27 | 23.00   | -4.26       | 17.70                                            | 17.87 | 18.01 |
| 4 Txslots                  | 20.87                                            | 21.04 | 21.22 | 22.00   | -3.01       | 17.86                                            | 18.03 | 18.21 |
| GSM 850<br>EGPRS (8PSK)    | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|                            | 251                                              | 190   | 128   |         |             | 251                                              | 190   | 128   |
| 1 Txslot                   | 23.64                                            | 23.57 | 23.71 | 24.50   | -9.03       | 14.61                                            | 14.54 | 14.68 |
| 2 Txslots                  | 23.66                                            | 23.54 | 23.70 | 24.50   | -6.02       | 17.64                                            | 17.52 | 17.68 |
| 3Txslots                   | 21.56                                            | 21.53 | 21.70 | 22.50   | -4.26       | 17.30                                            | 17.27 | 17.44 |
| 4 Txslots                  | 20.47                                            | 20.43 | 20.61 | 21.50   | -3.01       | 17.46                                            | 17.42 | 17.60 |

**NOTES:**
**1) Division Factors**

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**Table 11.1-3: The conducted power for GSM1900 - DSI0/DSI2**

| PCS1900<br>GPRS (GMSK)  | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|-------------------------|--------------------------------------------------|-------|-------|---------|-------------|--------------------------------------------------|-------|-------|
|                         | 810                                              | 661   | 512   |         |             | 810                                              | 661   | 512   |
| 1 Txslot                | 29.89                                            | 29.85 | 29.66 | 30.50   | -9.03       | 20.86                                            | 20.82 | 20.63 |
| <b>2 Txslots</b>        | 27.61                                            | 27.46 | 27.18 | 28.50   | -6.02       | 21.59                                            | 21.44 | 21.16 |
| 3 Txslots               | 25.60                                            | 25.42 | 25.13 | 26.50   | -4.26       | 21.34                                            | 21.16 | 20.87 |
| 4 Txslots               | 24.49                                            | 24.33 | 24.00 | 25.50   | -3.01       | 21.48                                            | 21.32 | 20.99 |
| PCS1900<br>EGPRS (GMSK) | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|                         | 810                                              | 661   | 512   |         |             | 810                                              | 661   | 512   |
| 1 Txslot                | 29.78                                            | 29.78 | 29.61 | 30.50   | -9.03       | 20.75                                            | 20.75 | 20.58 |
| <b>2 Txslots</b>        | 27.49                                            | 27.39 | 27.12 | 28.50   | -6.02       | 21.47                                            | 21.37 | 21.10 |
| 3 Txslots               | 25.50                                            | 25.36 | 25.09 | 26.50   | -4.26       | 21.24                                            | 21.10 | 20.83 |
| 4 Txslots               | 24.42                                            | 24.28 | 23.96 | 25.50   | -3.01       | 21.41                                            | 21.27 | 20.95 |
| PCS1900<br>EGPRS (8PSK) | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|                         | 810                                              | 661   | 512   |         |             | 810                                              | 661   | 512   |
| 1 Txslot                | 26.06                                            | 26.22 | 25.85 | 27.00   | -9.03       | 17.03                                            | 17.19 | 16.82 |
| 2 Txslots               | 23.86                                            | 23.10 | 23.27 | 24.50   | -6.02       | 17.84                                            | 17.08 | 17.25 |
| 3Txslots                | 21.25                                            | 21.21 | 20.95 | 22.00   | -4.26       | 16.99                                            | 16.95 | 16.69 |
| 4 Txslots               | 20.18                                            | 20.35 | 19.93 | 21.00   | -3.01       | 17.17                                            | 17.34 | 16.92 |

**NOTES:**
**1) Division Factors**

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**Table 11.1-4: The conducted power for GSM1900 - DSI1/DSI3**

| PCS1900<br>GPRS (GMSK)  | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|-------------------------|--------------------------------------------------|-------|-------|---------|-------------|--------------------------------------------------|-------|-------|
|                         | 810                                              | 661   | 512   |         |             | 810                                              | 661   | 512   |
| 1 Txslot                | 21.94                                            | 21.74 | 21.27 | 22.50   | -9.03       | 12.91                                            | 12.71 | 12.24 |
| <b>2 Txslots</b>        | 20.01                                            | 19.75 | 19.54 | 21.00   | -6.02       | 13.99                                            | 13.73 | 13.52 |
| 3 Txslots               | 18.05                                            | 17.84 | 17.19 | 19.00   | -4.26       | 13.79                                            | 13.58 | 12.93 |
| 4 Txslots               | 17.12                                            | 16.79 | 15.93 | 17.50   | -3.01       | 14.11                                            | 13.78 | 12.92 |
| PCS1900<br>EGPRS (GMSK) | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|                         | 810                                              | 661   | 512   |         |             | 810                                              | 661   | 512   |
| 1 Txslot                | 21.88                                            | 21.71 | 21.26 | 22.50   | -9.03       | 12.85                                            | 12.68 | 12.23 |
| <b>2 Txslots</b>        | 19.98                                            | 19.72 | 19.52 | 21.00   | -6.02       | 13.96                                            | 13.70 | 13.50 |
| 3 Txslots               | 18.02                                            | 17.82 | 17.18 | 19.00   | -4.26       | 13.76                                            | 13.56 | 12.92 |
| 4 Txslots               | 17.10                                            | 16.77 | 15.93 | 17.50   | -3.01       | 14.09                                            | 13.76 | 12.92 |
| PCS1900<br>EGPRS (8PSK) | Measured timeslot-averaged<br>output power (dBm) |       |       | Tune up | calculation | Source-based time-averaged<br>output power (dBm) |       |       |
|                         | 810                                              | 661   | 512   |         |             | 810                                              | 661   | 512   |
| 1 Txslot                | 17.57                                            | 17.50 | 17.26 | 18.50   | -9.03       | 8.54                                             | 8.47  | 8.23  |
| 2 Txslots               | 17.55                                            | 17.49 | 17.27 | 18.50   | -6.02       | 11.53                                            | 11.47 | 11.25 |
| 3Txslots                | 17.51                                            | 17.49 | 17.24 | 18.50   | -4.26       | 13.25                                            | 13.23 | 12.98 |
| 4 Txslots               | 17.39                                            | 17.46 | 17.21 | 18.50   | -3.01       | 14.38                                            | 14.45 | 14.20 |

**NOTES:**
**1) Division Factors**

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

## 11.2 WCDMA Measurement result

**Table 11.2-1: The conducted Power for WCDMA B2 - DSI0/DSI2**

| WCDMA1900 | FDDII result (dBm) |           |             | Tune up |
|-----------|--------------------|-----------|-------------|---------|
|           | 9538/9938          | 9400/9800 | 9262/9662   |         |
|           | (1907.6MHz)        | (1880MHz) | (1852.4MHz) |         |
|           | 23.24              | 23.28     | 23.26       | 24.00   |
| HSUPA     | 20.93              | 21.32     | 21.22       | 22.00   |
|           | 21.02              | 21.34     | 21.19       | 22.00   |
|           | 21.04              | 21.25     | 21.19       | 22.00   |
|           | 20.91              | 21.31     | 21.16       | 22.00   |
|           | 20.66              | 21.29     | 21.15       | 22.00   |
| HSPA+     | 20.71              | 20.65     | 20.67       | 22.00   |
| DC-HSDPA  | 21.01              | 21.05     | 21.06       | 22.00   |
|           | 20.81              | 20.62     | 20.61       | 22.00   |
|           | 20.43              | 20.52     | 20.49       | 22.00   |
|           | 20.42              | 20.51     | 20.48       | 22.00   |

**Table 11.2-2: The conducted Power for WCDMA B4 - DSI0/DSI2**

| WCDMA1700 | FDDIV result (dBm) |             |             | Tune up |
|-----------|--------------------|-------------|-------------|---------|
|           | 1513/1738          | 1412/1637   | 1312/1537   |         |
|           | (1752.6MHz)        | (1732.4MHz) | (1712.4MHz) |         |
|           | 23.01              | 22.97       | 22.93       | 24.00   |
| HSUPA     | 20.92              | 20.85       | 20.83       | 22.00   |
|           | 20.98              | 20.89       | 20.95       | 22.00   |
|           | 20.92              | 20.93       | 20.95       | 22.00   |
|           | 20.94              | 20.88       | 20.92       | 22.00   |
|           | 20.89              | 20.96       | 20.93       | 22.00   |
| HSPA+     | 20.42              | 20.39       | 20.43       | 22.00   |
| DC-HSDPA  | 20.85              | 20.86       | 20.93       | 22.00   |
|           | 20.57              | 20.44       | 20.39       | 21.50   |
|           | 20.31              | 20.38       | 20.38       | 21.50   |
|           | 20.28              | 20.32       | 20.37       | 21.50   |

**Table 11.2-3: The conducted Power for WCDMA B5 - DSI0/DSI2**

| WCDMA850 | FDDV result (dBm)       |                         |                         | Tune up |
|----------|-------------------------|-------------------------|-------------------------|---------|
|          | 4233/4458<br>(846.6MHz) | 4183/4408<br>(836.6MHz) | 4132/4357<br>(826.4MHz) |         |
|          | 23.34                   | 23.29                   | 23.26                   |         |
| HSUPA    | 21.53                   | 21.37                   | 21.51                   | 22.00   |
|          | 21.51                   | 21.42                   | 21.48                   | 22.00   |
|          | 21.52                   | 21.45                   | 21.47                   | 22.00   |
|          | 21.43                   | 21.44                   | 21.49                   | 22.00   |
|          | 21.49                   | 21.46                   | 21.47                   | 22.00   |
| HSPA+    | 21.05                   | 20.97                   | 21.12                   | 22.00   |
| DC-HSDPA | 21.49                   | 21.47                   | 21.48                   | 22.00   |
|          | 21.31                   | 21.32                   | 21.27                   | 22.00   |
|          | 20.96                   | 20.97                   | 20.99                   | 22.00   |
|          | 20.94                   | 20.95                   | 20.98                   | 22.00   |

**Table 11.2-4: The conducted Power for WCDMA B2 - DSI1/DSI3**

| WCDMA1900 | FDDII result (dBm)       |                        |                          | Tune up |
|-----------|--------------------------|------------------------|--------------------------|---------|
|           | 9538/9938<br>(1907.6MHz) | 9400/9800<br>(1880MHz) | 9262/9662<br>(1852.4MHz) |         |
|           | 14.41                    | 14.37                  | 14.34                    |         |
| HSUPA     | 14.27                    | 14.27                  | 14.13                    | 15.00   |
|           | 14.17                    | 14.12                  | 14.04                    | 15.00   |
|           | 13.75                    | 13.56                  | 13.61                    | 14.50   |
|           | 14.33                    | 14.15                  | 14.16                    | 15.00   |
|           | 13.18                    | 13.02                  | 13.08                    | 14.00   |
| HSPA+     | 13.76                    | 13.62                  | 13.59                    | 15.00   |
| DC-HSDPA  | 14.17                    | 14.16                  | 14.07                    | 15.00   |
|           | 14.28                    | 14.27                  | 14.15                    | 15.00   |
|           | 13.78                    | 13.71                  | 13.58                    | 14.50   |
|           | 13.67                    | 13.59                  | 13.60                    | 14.50   |



**Table 11.2-5: The conducted Power for WCDMA B4 - DSI1/DSI3**

| WCDMA1700 | FDDIV result (dBm) |             |             | Tune up |
|-----------|--------------------|-------------|-------------|---------|
|           | 1513/1738          | 1412/1637   | 1312/1537   |         |
|           | (1752.6MHz)        | (1732.4MHz) | (1712.4MHz) |         |
|           | 14.06              | 14.12       | 14.13       | 15.50   |
| HSUPA     | 14.25              | 14.10       | 14.07       | 15.00   |
|           | 14.16              | 14.02       | 14.16       | 15.00   |
|           | 13.52              | 13.38       | 13.38       | 14.50   |
|           | 14.12              | 14.06       | 13.96       | 15.00   |
|           | 13.06              | 13.01       | 13.02       | 14.00   |
| HSPA+     | 13.72              | 13.60       | 13.61       | 15.00   |
| DC-HSDPA  | 14.24              | 14.21       | 14.05       | 15.00   |
|           | 14.15              | 13.98       | 13.98       | 15.00   |
|           | 13.62              | 13.48       | 13.62       | 14.50   |
|           | 13.69              | 13.66       | 13.51       | 14.50   |

**Table 11.2-6: The conducted Power for WCDMA B5 - DSI1/DSI3**

| WCDMA850 | FDDV result (dBm) |            |            | Tune up |
|----------|-------------------|------------|------------|---------|
|          | 4233/4458         | 4183/4408  | 4132/4357  |         |
|          | (846.6MHz)        | (836.6MHz) | (826.4MHz) |         |
|          | 15.93             | 15.87      | 15.85      | 16.50   |
| HSUPA    | 15.83             | 15.72      | 15.63      | 16.50   |
|          | 15.73             | 15.69      | 15.68      | 16.50   |
|          | 15.44             | 15.31      | 15.37      | 16.50   |
|          | 15.82             | 15.65      | 15.75      | 16.50   |
|          | 14.73             | 14.54      | 14.53      | 15.50   |
| HSPA+    | 15.38             | 15.26      | 15.38      | 16.50   |
| DC-HSDPA | 15.85             | 15.82      | 15.67      | 16.50   |
|          | 15.79             | 15.59      | 15.62      | 16.50   |
|          | 15.39             | 15.21      | 15.28      | 16.00   |
|          | 15.18             | 15.11      | 15.03      | 16.00   |

### 11.3 LTE Measurement result

**Table 11.3-1: Maximum Power Reduction (MPR) for LTE**

| Modulation | Channel bandwidth / Transmission bandwidth configuration [RB] |     |     |      |      |      | MPR (dB) |
|------------|---------------------------------------------------------------|-----|-----|------|------|------|----------|
|            | 1.4                                                           | 3   | 5   | 10   | 15   | 20   |          |
|            | MHz                                                           | MHz | MHz | MHz  | MHz  | MHz  |          |
| QPSK       | > 5                                                           | > 4 | > 8 | > 12 | > 16 | > 18 | 1        |
| 16 QAM     | ≤ 5                                                           | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | 1        |
| 16 QAM     | > 5                                                           | > 4 | > 8 | > 12 | > 16 | > 18 | 2        |
| 64 QAM     | ≤ 5                                                           | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | 2        |
| 64 QAM     | > 5                                                           | > 4 | > 8 | > 12 | > 16 | > 18 | 3        |

**Table 11.3-2: The tune up for LTE**

| Band    | Tune up                                   |                                           |                                               |                                              |
|---------|-------------------------------------------|-------------------------------------------|-----------------------------------------------|----------------------------------------------|
|         | Sar sensor off+<br>WWAN transmit<br>alone | Sar sensor on +<br>WWAN transmit<br>alone | Sar sensor off+<br>WWAN transmit<br>with WIFI | Sar sensor on+<br>WWAN transmit with<br>WIFI |
|         | DSI0                                      | DSI1                                      | DSI2                                          | DSI3                                         |
| LTE B2  | 24                                        | 16                                        | 24                                            | 16                                           |
| LTE B5  | 24.5                                      | 17.5                                      | 24.5                                          | 17.5                                         |
| LTE B7  | 24                                        | 13                                        | 24                                            | 11.5                                         |
| LTE B12 | 24.5                                      | 18.5                                      | 24.5                                          | 18.5                                         |
| LTE B13 | 24.5                                      | 19                                        | 24.5                                          | 19                                           |
| LTE B26 | 24.5                                      | 17.5                                      | 24.5                                          | 17.5                                         |
| LTE B41 | 24                                        | 15.5                                      | 24                                            | 13.5                                         |
| LTE B66 | 24                                        | 18                                        | 24                                            | 16.5                                         |

#### LTE B2 - DSI0/DSI2

| LTE B2    |                |                |       |       |       |
|-----------|----------------|----------------|-------|-------|-------|
| BANDWIDTH | Number of RBs  | Frequency      | QPSK  | 16QAM | 64QAM |
| 1.4MHz    | 1RB-High (5)   | 1909.3 (19193) | 22.84 | 22.18 | 21.03 |
|           |                | 1880 (18900)   | 22.79 | 22.09 | 21.02 |
|           |                | 1850.7 (18607) | 22.80 | 22.09 | 21.03 |
|           | 1RB-Middle (3) | 1909.3 (19193) | 22.98 | 22.26 | 21.17 |
|           |                | 1880 (18900)   | 22.95 | 22.27 | 21.14 |
|           |                | 1850.7 (18607) | 22.95 | 22.15 | 21.16 |
|           | 1RB-Low (0)    | 1909.3 (19193) | 22.84 | 22.03 | 21.07 |
|           |                | 1880 (18900)   | 22.80 | 21.99 | 21.11 |
|           |                | 1850.7 (18607) | 22.82 | 22.09 | 20.99 |
|           | 3RB-High (3)   | 1909.3 (19193) | 22.96 | 21.91 | 21.05 |
|           |                | 1880 (18900)   | 22.92 | 21.92 | 21.05 |
|           |                | 1850.7 (18607) | 22.93 | 21.86 | 21.01 |

|      |                 |                |       |       |       |
|------|-----------------|----------------|-------|-------|-------|
|      | 3RB-Middle (1)  | 1909.3 (19193) | 23.03 | 21.98 | 21.10 |
|      |                 | 1880 (18900)   | 22.98 | 21.99 | 21.06 |
|      |                 | 1850.7 (18607) | 22.98 | 21.91 | 21.08 |
|      | 3RB-Low (0)     | 1909.3 (19193) | 22.97 | 21.99 | 21.06 |
|      |                 | 1880 (18900)   | 22.91 | 21.94 | 21.00 |
|      |                 | 1850.7 (18607) | 22.95 | 21.90 | 21.04 |
|      | 6RB (0)         | 1909.3 (19193) | 22.00 | 21.11 | 20.01 |
|      |                 | 1880 (18900)   | 22.00 | 21.04 | 19.97 |
|      |                 | 1850.7 (18607) | 22.00 | 20.99 | 19.95 |
| 3MHz | 1RB-High (14)   | 1908.5 (19185) | 22.86 | 22.19 | 21.11 |
|      |                 | 1880 (18900)   | 22.86 | 22.27 | 21.13 |
|      |                 | 1851.5 (18615) | 22.84 | 22.16 | 21.14 |
|      | 1RB-Middle (7)  | 1908.5 (19185) | 22.98 | 22.30 | 21.20 |
|      |                 | 1880 (18900)   | 23.03 | 22.28 | 21.18 |
|      |                 | 1851.5 (18615) | 23.04 | 22.28 | 21.15 |
|      | 1RB-Low (0)     | 1908.5 (19185) | 22.88 | 22.16 | 21.06 |
|      |                 | 1880 (18900)   | 22.87 | 22.08 | 21.04 |
|      |                 | 1851.5 (18615) | 22.83 | 22.12 | 21.12 |
|      | 8RB-High (7)    | 1908.5 (19185) | 21.95 | 21.02 | 19.98 |
|      |                 | 1880 (18900)   | 21.92 | 20.99 | 19.98 |
|      |                 | 1851.5 (18615) | 21.89 | 20.90 | 19.96 |
|      | 8RB-Middle (4)  | 1908.5 (19185) | 22.00 | 21.08 | 20.01 |
|      |                 | 1880 (18900)   | 21.93 | 20.98 | 19.96 |
|      |                 | 1851.5 (18615) | 21.92 | 20.97 | 19.98 |
|      | 8RB-Low (0)     | 1908.5 (19185) | 21.98 | 21.05 | 20.06 |
|      |                 | 1880 (18900)   | 21.93 | 20.97 | 19.92 |
|      |                 | 1851.5 (18615) | 21.90 | 20.93 | 19.97 |
|      | 15RB (0)        | 1908.5 (19185) | 21.97 | 20.98 | 20.00 |
|      |                 | 1880 (18900)   | 21.95 | 20.93 | 19.90 |
|      |                 | 1851.5 (18615) | 21.92 | 20.93 | 19.88 |
| 5MHz | 1RB-High (24)   | 1907.5 (19175) | 22.80 | 22.00 | 21.05 |
|      |                 | 1880 (18900)   | 22.73 | 21.93 | 20.96 |
|      |                 | 1852.5 (18625) | 22.77 | 22.05 | 21.00 |
|      | 1RB-Middle (12) | 1907.5 (19175) | 23.02 | 22.27 | 21.24 |
|      |                 | 1880 (18900)   | 23.02 | 22.21 | 21.20 |
|      |                 | 1852.5 (18625) | 23.06 | 22.15 | 21.23 |
|      | 1RB-Low (0)     | 1907.5 (19175) | 22.79 | 22.05 | 20.93 |
|      |                 | 1880 (18900)   | 22.76 | 22.00 | 21.02 |
|      |                 | 1852.5 (18625) | 22.72 | 22.05 | 20.95 |
|      | 12RB-High (13)  | 1907.5 (19175) | 21.87 | 20.85 | 19.88 |
|      |                 | 1880 (18900)   | 21.90 | 20.87 | 19.93 |
|      |                 | 1852.5 (18625) | 21.91 | 20.91 | 19.95 |

|       |                  |                |       |       |       |
|-------|------------------|----------------|-------|-------|-------|
|       | 12RB-Middle (6)  | 1907.5 (19175) | 22.03 | 21.00 | 20.07 |
|       |                  | 1880 (18900)   | 21.95 | 20.96 | 19.99 |
|       |                  | 1852.5 (18625) | 21.94 | 20.93 | 19.97 |
|       | 12RB-Low (0)     | 1907.5 (19175) | 22.03 | 21.01 | 20.04 |
|       |                  | 1880 (18900)   | 21.95 | 20.94 | 19.99 |
|       |                  | 1852.5 (18625) | 21.91 | 20.91 | 19.97 |
|       | 25RB (0)         | 1907.5 (19175) | 22.00 | 20.99 | 20.01 |
|       |                  | 1880 (18900)   | 21.95 | 20.95 | 19.96 |
|       |                  | 1852.5 (18625) | 21.94 | 20.95 | 19.94 |
| 10MHz | 1RB-High (49)    | 1905 (19150)   | 22.88 | 22.17 | 21.05 |
|       |                  | 1880 (18900)   | 22.80 | 22.00 | 21.03 |
|       |                  | 1855 (18650)   | 22.84 | 22.17 | 20.99 |
|       | 1RB-Middle (24)  | 1905 (19150)   | 22.93 | 22.19 | 21.10 |
|       |                  | 1880 (18900)   | 22.96 | 22.27 | 21.13 |
|       |                  | 1855 (18650)   | 22.96 | 22.24 | 21.14 |
|       | 1RB-Low (0)      | 1905 (19150)   | 22.86 | 22.14 | 21.10 |
|       |                  | 1880 (18900)   | 22.80 | 22.11 | 21.09 |
|       |                  | 1855 (18650)   | 22.82 | 22.08 | 21.07 |
|       | 25RB-High (25)   | 1905 (19150)   | 21.82 | 20.82 | 19.82 |
|       |                  | 1880 (18900)   | 21.92 | 20.93 | 19.91 |
|       |                  | 1855 (18650)   | 21.92 | 20.92 | 19.93 |
|       | 25RB-Middle (12) | 1905 (19150)   | 22.02 | 20.99 | 20.01 |
|       |                  | 1880 (18900)   | 21.97 | 20.93 | 19.94 |
|       |                  | 1855 (18650)   | 21.99 | 20.99 | 19.99 |
|       | 25RB-Low (0)     | 1905 (19150)   | 22.03 | 20.99 | 20.05 |
|       |                  | 1880 (18900)   | 21.95 | 20.94 | 19.94 |
|       |                  | 1855 (18650)   | 22.00 | 20.98 | 20.02 |
|       | 50RB (0)         | 1905 (19150)   | 21.94 | 20.92 | 19.95 |
|       |                  | 1880 (18900)   | 21.93 | 20.94 | 19.92 |
|       |                  | 1855 (18650)   | 21.99 | 21.00 | 20.01 |
| 15MHz | 1RB-High (74)    | 1902.5 (19125) | 22.91 | 22.13 | 21.05 |
|       |                  | 1880 (18900)   | 22.78 | 22.13 | 20.98 |
|       |                  | 1857.5 (18675) | 22.78 | 22.07 | 21.04 |
|       | 1RB-Middle (37)  | 1902.5 (19125) | 22.88 | 22.16 | 21.15 |
|       |                  | 1880 (18900)   | 22.87 | 22.21 | 21.12 |
|       |                  | 1857.5 (18675) | 22.88 | 22.14 | 21.13 |
|       | 1RB-Low (0)      | 1902.5 (19125) | 22.84 | 22.13 | 21.04 |
|       |                  | 1880 (18900)   | 22.79 | 22.02 | 21.05 |
|       |                  | 1857.5 (18675) | 22.81 | 21.98 | 20.99 |
|       | 36RB-High (38)   | 1902.5 (19125) | 21.91 | 20.89 | 19.94 |
|       |                  | 1880 (18900)   | 21.91 | 20.89 | 19.92 |
|       |                  | 1857.5 (18675) | 21.96 | 20.92 | 19.94 |

|       |                  |                |       |       |       |
|-------|------------------|----------------|-------|-------|-------|
|       | 36RB-Middle (19) | 1902.5 (19125) | 22.03 | 20.99 | 20.00 |
|       |                  | 1880 (18900)   | 21.95 | 20.93 | 19.96 |
|       |                  | 1857.5 (18675) | 22.01 | 20.95 | 20.01 |
|       | 36RB-Low (0)     | 1902.5 (19125) | 21.99 | 20.97 | 19.96 |
|       |                  | 1880 (18900)   | 21.96 | 20.91 | 19.96 |
|       |                  | 1857.5 (18675) | 22.00 | 20.98 | 20.02 |
|       | 75RB (0)         | 1902.5 (19125) | 21.94 | 20.96 | 19.91 |
|       |                  | 1880 (18900)   | 21.96 | 20.94 | 19.93 |
|       |                  | 1857.5 (18675) | 22.01 | 20.97 | 19.99 |
| 20MHz | 1RB-High (99)    | 1900 (19100)   | 22.68 | 21.96 | 20.91 |
|       |                  | 1880 (18900)   | 22.63 | 22.00 | 20.81 |
|       |                  | 1860 (18700)   | 22.67 | 22.00 | 20.89 |
|       | 1RB-Middle (50)  | 1900 (19100)   | 22.98 | 22.24 | 21.16 |
|       |                  | 1880 (18900)   | 22.97 | 22.26 | 21.16 |
|       |                  | 1860 (18700)   | 22.95 | 21.90 | 21.25 |
|       | 1RB-Low (0)      | 1900 (19100)   | 22.67 | 21.91 | 20.93 |
|       |                  | 1880 (18900)   | 22.65 | 21.95 | 20.93 |
|       |                  | 1860 (18700)   | 22.63 | 21.84 | 20.91 |
|       | 50RB-High (50)   | 1900 (19100)   | 21.82 | 20.84 | 19.85 |
|       |                  | 1880 (18900)   | 21.86 | 20.91 | 19.88 |
|       |                  | 1860 (18700)   | 22.01 | 21.02 | 20.01 |
|       | 50RB-Middle (25) | 1900 (19100)   | 22.02 | 20.98 | 19.99 |
|       |                  | 1880 (18900)   | 21.97 | 20.95 | 19.94 |
|       |                  | 1860 (18700)   | 22.01 | 21.00 | 19.99 |
|       | 50RB-Low (0)     | 1900 (19100)   | 22.11 | 21.02 | 20.05 |
|       |                  | 1880 (18900)   | 21.98 | 20.94 | 19.93 |
|       |                  | 1860 (18700)   | 22.10 | 21.04 | 20.09 |
|       | 100RB (0)        | 1900 (19100)   | 21.97 | 20.94 | 19.97 |
|       |                  | 1880 (18900)   | 21.91 | 20.90 | 19.89 |
|       |                  | 1860 (18700)   | 22.03 | 21.02 | 20.04 |

#### LTE B2 – DSI1/DSI3

| LTE B2    |                |                |       |       |       |
|-----------|----------------|----------------|-------|-------|-------|
| BANDWIDTH | Number of RBs  | Frequency      | QPSK  | 16QAM | 64QAM |
| 1.4MHz    | 1RB-High (5)   | 1909.3 (19193) | 14.63 | 15.02 | 14.95 |
|           |                | 1880 (18900)   | 14.55 | 14.89 | 14.96 |
|           |                | 1850.7 (18607) | 14.55 | 15.11 | 14.92 |
|           | 1RB-Middle (3) | 1909.3 (19193) | 14.89 | 15.47 | 15.35 |
|           |                | 1880 (18900)   | 15.03 | 15.35 | 15.05 |
|           |                | 1850.7 (18607) | 15.05 | 15.40 | 15.36 |
|           | 1RB-Low (0)    | 1909.3 (19193) | 14.55 | 14.95 | 14.89 |

|      |                 |                |       |       |       |
|------|-----------------|----------------|-------|-------|-------|
|      |                 | 1880 (18900)   | 14.63 | 15.04 | 15.00 |
|      |                 | 1850.7 (18607) | 14.80 | 15.14 | 14.91 |
|      | 3RB-High (3)    | 1909.3 (19193) | 14.91 | 15.01 | 15.04 |
|      |                 | 1880 (18900)   | 14.81 | 14.96 | 15.03 |
|      |                 | 1850.7 (18607) | 14.87 | 15.04 | 14.96 |
|      | 3RB-Middle (1)  | 1909.3 (19193) | 14.84 | 14.91 | 15.06 |
|      |                 | 1880 (18900)   | 15.09 | 14.87 | 15.06 |
|      |                 | 1850.7 (18607) | 15.12 | 14.93 | 15.09 |
|      | 3RB-Low (0)     | 1909.3 (19193) | 15.16 | 14.98 | 14.97 |
|      |                 | 1880 (18900)   | 15.04 | 15.09 | 15.00 |
|      |                 | 1850.7 (18607) | 15.13 | 15.16 | 15.15 |
|      | 6RB (0)         | 1909.3 (19193) | 14.91 | 15.10 | 14.86 |
|      |                 | 1880 (18900)   | 14.88 | 14.86 | 14.90 |
|      |                 | 1850.7 (18607) | 15.02 | 15.16 | 15.11 |
| 3MHz | 1RB-High (14)   | 1908.5 (19185) | 14.76 | 15.07 | 15.11 |
|      |                 | 1880 (18900)   | 14.59 | 15.08 | 14.74 |
|      |                 | 1851.5 (18615) | 14.66 | 15.03 | 14.89 |
|      | 1RB-Middle (7)  | 1908.5 (19185) | 15.03 | 15.43 | 15.28 |
|      |                 | 1880 (18900)   | 14.91 | 15.44 | 15.16 |
|      |                 | 1851.5 (18615) | 15.03 | 15.27 | 15.23 |
|      | 1RB-Low (0)     | 1908.5 (19185) | 14.55 | 15.20 | 14.84 |
|      |                 | 1880 (18900)   | 14.56 | 15.10 | 14.93 |
|      |                 | 1851.5 (18615) | 14.79 | 15.09 | 15.04 |
|      | 8RB-High (7)    | 1908.5 (19185) | 14.93 | 14.85 | 14.85 |
|      |                 | 1880 (18900)   | 14.82 | 15.06 | 14.84 |
|      |                 | 1851.5 (18615) | 15.05 | 15.09 | 14.92 |
|      | 8RB-Middle (4)  | 1908.5 (19185) | 15.03 | 14.88 | 15.15 |
|      |                 | 1880 (18900)   | 14.86 | 15.02 | 14.96 |
|      |                 | 1851.5 (18615) | 15.03 | 14.91 | 15.03 |
|      | 8RB-Low (0)     | 1908.5 (19185) | 14.98 | 15.07 | 15.12 |
|      |                 | 1880 (18900)   | 15.11 | 15.01 | 15.07 |
|      |                 | 1851.5 (18615) | 15.18 | 15.06 | 15.17 |
|      | 15RB (0)        | 1908.5 (19185) | 14.94 | 15.08 | 14.87 |
|      |                 | 1880 (18900)   | 14.90 | 14.90 | 15.04 |
|      |                 | 1851.5 (18615) | 14.92 | 15.04 | 14.97 |
| 5MHz | 1RB-High (24)   | 1907.5 (19175) | 14.80 | 15.10 | 14.81 |
|      |                 | 1880 (18900)   | 14.73 | 14.99 | 14.94 |
|      |                 | 1852.5 (18625) | 14.54 | 15.20 | 14.85 |
|      | 1RB-Middle (12) | 1907.5 (19175) | 14.90 | 15.40 | 15.20 |
|      |                 | 1880 (18900)   | 14.96 | 15.33 | 15.31 |
|      |                 | 1852.5 (18625) | 14.81 | 15.39 | 15.11 |
|      | 1RB-Low (0)     | 1907.5 (19175) | 14.72 | 15.02 | 14.81 |

|       |                  |                |       |       |       |
|-------|------------------|----------------|-------|-------|-------|
|       |                  | 1880 (18900)   | 14.84 | 15.04 | 14.86 |
|       |                  | 1852.5 (18625) | 14.57 | 14.94 | 14.96 |
|       |                  | 1907.5 (19175) | 14.98 | 14.85 | 15.02 |
|       | 12RB-High (13)   | 1880 (18900)   | 14.78 | 14.80 | 14.80 |
|       |                  | 1852.5 (18625) | 15.10 | 15.01 | 15.06 |
|       |                  | 1907.5 (19175) | 15.11 | 15.09 | 15.16 |
|       | 12RB-Middle (6)  | 1880 (18900)   | 14.92 | 14.89 | 14.87 |
|       |                  | 1852.5 (18625) | 15.06 | 15.12 | 14.82 |
|       |                  | 1907.5 (19175) | 15.20 | 15.16 | 14.99 |
|       | 12RB-Low (0)     | 1880 (18900)   | 14.92 | 14.96 | 14.94 |
|       |                  | 1852.5 (18625) | 14.94 | 15.02 | 15.05 |
|       |                  | 1907.5 (19175) | 14.87 | 14.93 | 15.07 |
|       | 25RB (0)         | 1880 (18900)   | 14.81 | 14.94 | 15.07 |
|       |                  | 1852.5 (18625) | 15.13 | 14.90 | 14.92 |
|       |                  | 1905 (19150)   | 14.82 | 15.06 | 14.88 |
| 10MHz | 1RB-High (49)    | 1880 (18900)   | 14.53 | 14.97 | 14.76 |
|       |                  | 1855 (18650)   | 14.71 | 14.96 | 14.74 |
|       |                  | 1905 (19150)   | 15.03 | 15.20 | 15.34 |
|       | 1RB-Middle (24)  | 1880 (18900)   | 15.09 | 15.27 | 15.32 |
|       |                  | 1855 (18650)   | 14.85 | 15.29 | 15.14 |
|       |                  | 1905 (19150)   | 14.65 | 15.11 | 14.94 |
|       | 1RB-Low (0)      | 1880 (18900)   | 14.81 | 15.27 | 14.83 |
|       |                  | 1855 (18650)   | 14.72 | 15.00 | 14.93 |
|       |                  | 1905 (19150)   | 15.06 | 15.06 | 14.81 |
|       | 25RB-High (25)   | 1880 (18900)   | 14.85 | 14.84 | 14.98 |
|       |                  | 1855 (18650)   | 15.04 | 14.92 | 14.96 |
|       |                  | 1905 (19150)   | 15.10 | 15.17 | 14.95 |
|       | 25RB-Middle (12) | 1880 (18900)   | 14.84 | 15.10 | 14.96 |
|       |                  | 1855 (18650)   | 14.93 | 14.86 | 15.09 |
|       |                  | 1905 (19150)   | 14.92 | 15.24 | 15.01 |
|       | 25RB-Low (0)     | 1880 (18900)   | 14.99 | 15.03 | 14.84 |
|       |                  | 1855 (18650)   | 15.03 | 15.01 | 15.08 |
|       |                  | 1905 (19150)   | 15.07 | 15.06 | 14.98 |
|       | 50RB (0)         | 1880 (18900)   | 14.89 | 14.94 | 14.93 |
|       |                  | 1855 (18650)   | 15.03 | 15.06 | 14.89 |
|       |                  | 1902.5 (19125) | 14.55 | 14.93 | 15.02 |
| 15MHz | 1RB-High (74)    | 1880 (18900)   | 14.57 | 14.86 | 14.87 |
|       |                  | 1857.5 (18675) | 14.50 | 15.22 | 14.91 |
|       |                  | 1902.5 (19125) | 15.03 | 15.34 | 15.36 |
|       | 1RB-Middle (37)  | 1880 (18900)   | 14.82 | 15.33 | 15.05 |
|       |                  | 1857.5 (18675) | 14.78 | 15.36 | 15.25 |
|       |                  | 1902.5 (19125) | 14.53 | 15.07 | 15.02 |
|       | 1RB-Low (0)      | 1902.5 (19125) | 14.53 | 15.07 | 15.02 |

|  |                  |                |       |       |       |
|--|------------------|----------------|-------|-------|-------|
|  |                  | 1880 (18900)   | 14.62 | 15.16 | 14.89 |
|  |                  | 1857.5 (18675) | 14.75 | 15.13 | 14.96 |
|  | 36RB-High (38)   | 1902.5 (19125) | 14.82 | 14.96 | 15.06 |
|  |                  | 1880 (18900)   | 14.81 | 15.08 | 15.08 |
|  |                  | 1857.5 (18675) | 15.06 | 14.91 | 15.01 |
|  | 36RB-Middle (19) | 1902.5 (19125) | 15.14 | 15.16 | 14.88 |
|  |                  | 1880 (18900)   | 14.84 | 14.90 | 15.01 |
|  |                  | 1857.5 (18675) | 14.99 | 15.13 | 14.94 |
|  | 36RB-Low (0)     | 1902.5 (19125) | 15.05 | 15.19 | 15.00 |
|  |                  | 1880 (18900)   | 15.06 | 15.11 | 14.94 |
|  |                  | 1857.5 (18675) | 15.00 | 15.09 | 15.09 |
|  | 75RB (0)         | 1902.5 (19125) | 14.96 | 15.02 | 14.85 |
|  |                  | 1880 (18900)   | 14.93 | 14.82 | 14.91 |
|  |                  | 1857.5 (18675) | 15.05 | 14.97 | 14.90 |
|  | 1RB-High (99)    | 1900 (19100)   | 14.73 | 15.11 | 15.01 |
|  |                  | 1880 (18900)   | 14.67 | 15.05 | 14.94 |
|  |                  | 1860 (18700)   | 14.70 | 15.16 | 14.94 |
|  | 1RB-Middle (50)  | 1900 (19100)   | 15.01 | 15.37 | 15.35 |
|  |                  | 1880 (18900)   | 15.00 | 15.39 | 15.22 |
|  |                  | 1860 (18700)   | 14.97 | 15.37 | 15.27 |
|  | 1RB-Low (0)      | 1900 (19100)   | 14.68 | 15.12 | 15.01 |
|  |                  | 1880 (18900)   | 14.74 | 15.18 | 15.00 |
|  |                  | 1860 (18700)   | 14.74 | 15.05 | 14.99 |
|  | 50RB-High (50)   | 1900 (19100)   | 14.96 | 14.98 | 14.99 |
|  |                  | 1880 (18900)   | 14.98 | 15.00 | 14.98 |
|  |                  | 1860 (18700)   | 15.07 | 15.08 | 15.08 |
|  | 50RB-Middle (25) | 1900 (19100)   | 15.04 | 15.08 | 15.06 |
|  |                  | 1880 (18900)   | 15.02 | 15.07 | 15.06 |
|  |                  | 1860 (18700)   | 15.03 | 15.04 | 15.02 |
|  | 50RB-Low (0)     | 1900 (19100)   | 15.12 | 15.15 | 15.14 |
|  |                  | 1880 (18900)   | 15.01 | 15.01 | 15.00 |
|  |                  | 1860 (18700)   | 15.11 | 15.15 | 15.14 |
|  | 100RB (0)        | 1900 (19100)   | 15.04 | 15.06 | 15.04 |
|  |                  | 1880 (18900)   | 15.00 | 15.00 | 15.01 |
|  |                  | 1860 (18700)   | 15.05 | 15.08 | 15.08 |



**LTE B5 - DSI0/DSI2**

| <b>LTE B5</b>    |                       |                  |             |              |              |
|------------------|-----------------------|------------------|-------------|--------------|--------------|
| <b>BANDWIDTH</b> | <b>Number of RBs</b>  | <b>Frequency</b> | <b>QPSK</b> | <b>16QAM</b> | <b>64QAM</b> |
| <b>1.4MHz</b>    | <b>1RB-High (5)</b>   | 848.3 (20643)    | 23.54       | 22.84        | 21.76        |
|                  |                       | 836.5 (20525)    | 23.49       | 22.70        | 21.62        |
|                  |                       | 824.7 (20407)    | 23.46       | 22.75        | 21.65        |
|                  | <b>1RB-Middle (3)</b> | 848.3 (20643)    | 23.65       | 22.99        | 21.88        |
|                  |                       | 836.5 (20525)    | 23.63       | 22.81        | 21.68        |
|                  |                       | 824.7 (20407)    | 23.59       | 22.80        | 21.80        |
|                  | <b>1RB-Low (0)</b>    | 848.3 (20643)    | 23.55       | 22.73        | 21.65        |
|                  |                       | 836.5 (20525)    | 23.49       | 22.75        | 21.66        |
|                  |                       | 824.7 (20407)    | 23.46       | 22.77        | 21.67        |
|                  | <b>3RB-High (3)</b>   | 848.3 (20643)    | 23.65       | 22.58        | 21.71        |
|                  |                       | 836.5 (20525)    | 23.58       | 22.55        | 21.66        |
|                  |                       | 824.7 (20407)    | 23.60       | 22.54        | 21.65        |
|                  | <b>3RB-Middle (1)</b> | 848.3 (20643)    | 23.67       | 22.62        | 21.75        |
|                  |                       | 836.5 (20525)    | 23.64       | 22.62        | 21.72        |
|                  |                       | 824.7 (20407)    | 23.63       | 22.62        | 21.66        |
|                  | <b>3RB-Low (0)</b>    | 848.3 (20643)    | 23.63       | 22.63        | 21.74        |
|                  |                       | 836.5 (20525)    | 23.60       | 22.57        | 21.74        |
|                  |                       | 824.7 (20407)    | 23.60       | 22.60        | 21.66        |
|                  | <b>6RB (0)</b>        | 848.3 (20643)    | 22.66       | 21.74        | 20.66        |
|                  |                       | 836.5 (20525)    | 22.62       | 21.67        | 20.61        |
|                  |                       | 824.7 (20407)    | 22.62       | 21.66        | 20.60        |
| <b>3MHz</b>      | <b>1RB-High (14)</b>  | 847.5 (20635)    | 23.58       | 22.77        | 21.78        |
|                  |                       | 836.5 (20525)    | 23.54       | 22.73        | 21.71        |
|                  |                       | 825.5 (20415)    | 23.54       | 22.77        | 20.66        |
|                  | <b>1RB-Middle (7)</b> | 847.5 (20635)    | 23.77       | 23.07        | 21.91        |
|                  |                       | 836.5 (20525)    | 23.71       | 22.94        | 21.87        |
|                  |                       | 825.5 (20415)    | 23.62       | 22.02        | 21.82        |
|                  | <b>1RB-Low (0)</b>    | 847.5 (20635)    | 23.58       | 22.79        | 21.75        |
|                  |                       | 836.5 (20525)    | 23.57       | 22.94        | 21.75        |
|                  |                       | 825.5 (20415)    | 23.52       | 22.83        | 21.69        |
|                  | <b>8RB-High (7)</b>   | 847.5 (20635)    | 22.64       | 21.67        | 20.68        |
|                  |                       | 836.5 (20525)    | 22.62       | 21.63        | 20.62        |
|                  |                       | 825.5 (20415)    | 22.56       | 21.56        | 20.57        |
|                  | <b>8RB-Middle (4)</b> | 847.5 (20635)    | 22.68       | 21.76        | 20.69        |
|                  |                       | 836.5 (20525)    | 22.67       | 21.69        | 20.66        |
|                  |                       | 825.5 (20415)    | 22.59       | 21.66        | 20.65        |
|                  | <b>8RB-Low (0)</b>    | 847.5 (20635)    | 22.68       | 21.72        | 20.70        |
|                  |                       | 836.5 (20525)    | 22.62       | 21.66        | 20.62        |

|       |                  |               |       |       |       |
|-------|------------------|---------------|-------|-------|-------|
|       | 15RB (0)         | 825.5 (20415) | 22.59 | 21.61 | 20.59 |
|       |                  | 847.5 (20635) | 22.65 | 21.64 | 20.63 |
|       |                  | 836.5 (20525) | 22.63 | 21.60 | 20.59 |
|       |                  | 825.5 (20415) | 22.57 | 21.56 | 20.53 |
| 5MHz  | 1RB-High (24)    | 846.5 (20625) | 23.47 | 22.80 | 21.64 |
|       |                  | 836.5 (20525) | 23.40 | 22.57 | 21.55 |
|       |                  | 826.5 (20425) | 23.47 | 22.71 | 21.75 |
|       | 1RB-Middle (12)  | 846.5 (20625) | 23.67 | 22.94 | 21.86 |
|       |                  | 836.5 (20525) | 23.71 | 22.93 | 21.88 |
|       |                  | 826.5 (20425) | 23.69 | 22.96 | 21.85 |
|       | 1RB-Low (0)      | 846.5 (20625) | 23.44 | 22.75 | 21.58 |
|       |                  | 836.5 (20525) | 23.53 | 22.81 | 21.69 |
|       |                  | 826.5 (20425) | 23.41 | 22.70 | 21.59 |
|       | 12RB-High (13)   | 846.5 (20625) | 22.59 | 21.57 | 20.62 |
|       |                  | 836.5 (20525) | 22.66 | 21.57 | 20.63 |
|       |                  | 826.5 (20425) | 22.54 | 21.48 | 20.51 |
|       | 12RB-Middle (6)  | 846.5 (20625) | 22.70 | 21.66 | 20.69 |
|       |                  | 836.5 (20525) | 22.67 | 21.64 | 20.62 |
|       |                  | 826.5 (20425) | 22.63 | 21.62 | 20.61 |
|       | 12RB-Low (0)     | 846.5 (20625) | 22.69 | 21.67 | 20.64 |
|       |                  | 836.5 (20525) | 22.59 | 21.53 | 20.53 |
|       |                  | 826.5 (20425) | 22.63 | 21.63 | 20.61 |
|       | 25RB (0)         | 846.5 (20625) | 22.66 | 21.66 | 20.62 |
|       |                  | 836.5 (20525) | 22.65 | 21.62 | 20.62 |
|       |                  | 826.5 (20425) | 22.58 | 21.58 | 20.56 |
| 10MHz | 1RB-High (49)    | 844 (20600)   | 23.56 | 22.82 | 21.79 |
|       |                  | 836.5 (20525) | 23.52 | 22.71 | 21.60 |
|       |                  | 829 (20450)   | 23.52 | 22.77 | 21.68 |
|       | 1RB-Middle (24)  | 844 (20600)   | 23.61 | 22.78 | 21.78 |
|       |                  | 836.5 (20525) | 23.62 | 22.82 | 21.73 |
|       |                  | 829 (20450)   | 23.64 | 22.99 | 21.80 |
|       | 1RB-Low (0)      | 844 (20600)   | 23.56 | 22.71 | 21.68 |
|       |                  | 836.5 (20525) | 23.58 | 22.92 | 21.80 |
|       |                  | 829 (20450)   | 23.51 | 22.74 | 21.69 |
|       | 25RB-High (25)   | 844 (20600)   | 22.60 | 21.55 | 20.52 |
|       |                  | 836.5 (20525) | 22.75 | 21.73 | 20.72 |
|       |                  | 829 (20450)   | 22.66 | 21.67 | 20.64 |
|       | 25RB-Middle (12) | 844 (20600)   | 22.72 | 21.67 | 20.68 |
|       |                  | 836.5 (20525) | 22.67 | 21.68 | 20.64 |
|       |                  | 829 (20450)   | 22.64 | 21.63 | 20.62 |
|       | 25RB-Low (0)     | 844 (20600)   | 22.76 | 21.73 | 20.70 |
|       |                  | 836.5 (20525) | 22.61 | 21.64 | 20.59 |

|  |          |               |       |       |       |
|--|----------|---------------|-------|-------|-------|
|  |          | 829 (20450)   | 22.78 | 21.76 | 20.73 |
|  | 50RB (0) | 844 (20600)   | 22.67 | 21.66 | 20.63 |
|  |          | 836.5 (20525) | 22.70 | 21.66 | 20.66 |
|  |          | 829 (20450)   | 22.72 | 21.70 | 20.68 |

### LTE B5 – DSI1/DSI3

| LTE B5    |                |               |       |       |       |
|-----------|----------------|---------------|-------|-------|-------|
| BANDWIDTH | Number of RBs  | Frequency     | QPSK  | 16QAM | 64QAM |
| 1.4MHz    | 1RB-High (5)   | 848.3 (20643) | 15.95 | 16.30 | 16.40 |
|           |                | 836.5 (20525) | 15.93 | 16.37 | 16.10 |
|           |                | 824.7 (20407) | 16.04 | 16.41 | 16.08 |
|           | 1RB-Middle (3) | 848.3 (20643) | 16.05 | 16.28 | 16.36 |
|           |                | 836.5 (20525) | 16.13 | 16.48 | 16.15 |
|           |                | 824.7 (20407) | 16.10 | 16.56 | 16.33 |
|           | 1RB-Low (0)    | 848.3 (20643) | 16.10 | 16.37 | 16.31 |
|           |                | 836.5 (20525) | 16.07 | 16.27 | 16.28 |
|           |                | 824.7 (20407) | 15.93 | 16.20 | 16.06 |
|           | 3RB-High (3)   | 848.3 (20643) | 16.07 | 16.06 | 15.99 |
|           |                | 836.5 (20525) | 16.12 | 16.18 | 16.02 |
|           |                | 824.7 (20407) | 15.99 | 16.05 | 16.14 |
|           | 3RB-Middle (1) | 848.3 (20643) | 16.08 | 15.99 | 16.02 |
|           |                | 836.5 (20525) | 16.07 | 16.09 | 16.05 |
|           |                | 824.7 (20407) | 16.14 | 16.02 | 16.18 |
|           | 3RB-Low (0)    | 848.3 (20643) | 16.19 | 16.22 | 16.20 |
|           |                | 836.5 (20525) | 15.90 | 16.17 | 16.11 |
|           |                | 824.7 (20407) | 16.12 | 16.33 | 16.25 |
|           | 6RB (0)        | 848.3 (20643) | 15.90 | 16.14 | 15.96 |
|           |                | 836.5 (20525) | 16.15 | 16.14 | 16.23 |
|           |                | 824.7 (20407) | 15.97 | 16.05 | 16.18 |
| 3MHz      | 1RB-High (14)  | 847.5 (20635) | 15.96 | 16.36 | 16.39 |
|           |                | 836.5 (20525) | 15.79 | 16.17 | 16.11 |
|           |                | 825.5 (20415) | 16.11 | 16.37 | 16.17 |
|           | 1RB-Middle (7) | 847.5 (20635) | 15.99 | 16.52 | 16.32 |
|           |                | 836.5 (20525) | 15.99 | 16.33 | 16.18 |
|           |                | 825.5 (20415) | 16.16 | 16.42 | 16.25 |
|           | 1RB-Low (0)    | 847.5 (20635) | 15.92 | 16.43 | 16.34 |
|           |                | 836.5 (20525) | 16.17 | 16.27 | 16.24 |
|           |                | 825.5 (20415) | 16.15 | 16.46 | 15.98 |
|           | 8RB-High (7)   | 847.5 (20635) | 15.88 | 16.06 | 15.97 |
|           |                | 836.5 (20525) | 16.30 | 16.22 | 16.21 |
|           |                | 825.5 (20415) | 16.16 | 16.07 | 15.97 |

|       |                 |               |       |       |       |
|-------|-----------------|---------------|-------|-------|-------|
|       | 8RB-Middle (4)  | 847.5 (20635) | 16.17 | 16.14 | 16.12 |
|       |                 | 836.5 (20525) | 15.98 | 16.05 | 15.98 |
|       |                 | 825.5 (20415) | 15.96 | 16.01 | 15.99 |
|       | 8RB-Low (0)     | 847.5 (20635) | 16.14 | 16.30 | 16.05 |
|       |                 | 836.5 (20525) | 16.12 | 16.19 | 16.11 |
|       |                 | 825.5 (20415) | 16.28 | 16.14 | 16.21 |
|       | 15RB (0)        | 847.5 (20635) | 15.94 | 16.06 | 16.19 |
|       |                 | 836.5 (20525) | 16.02 | 16.00 | 15.98 |
|       |                 | 825.5 (20415) | 16.10 | 16.28 | 16.00 |
| 5MHz  | 1RB-High (24)   | 846.5 (20625) | 16.09 | 16.27 | 16.18 |
|       |                 | 836.5 (20525) | 15.79 | 16.23 | 16.31 |
|       |                 | 826.5 (20425) | 16.09 | 16.32 | 16.34 |
|       | 1RB-Middle (12) | 846.5 (20625) | 16.05 | 16.36 | 16.22 |
|       |                 | 836.5 (20525) | 15.99 | 16.47 | 16.11 |
|       |                 | 826.5 (20425) | 16.15 | 16.27 | 16.33 |
|       | 1RB-Low (0)     | 846.5 (20625) | 15.98 | 16.30 | 16.15 |
|       |                 | 836.5 (20525) | 16.05 | 16.23 | 16.40 |
|       |                 | 826.5 (20425) | 16.06 | 16.34 | 16.11 |
|       | 12RB-High (13)  | 846.5 (20625) | 15.88 | 15.98 | 16.11 |
|       |                 | 836.5 (20525) | 16.21 | 16.33 | 16.03 |
|       |                 | 826.5 (20425) | 16.05 | 15.93 | 16.06 |
|       | 12RB-Middle (6) | 846.5 (20625) | 16.02 | 16.00 | 16.13 |
|       |                 | 836.5 (20525) | 16.01 | 16.02 | 15.97 |
|       |                 | 826.5 (20425) | 16.12 | 15.97 | 16.20 |
|       | 12RB-Low (0)    | 846.5 (20625) | 16.20 | 16.15 | 16.30 |
|       |                 | 836.5 (20525) | 15.93 | 16.05 | 16.09 |
|       |                 | 826.5 (20425) | 16.06 | 16.06 | 16.11 |
|       | 25RB (0)        | 846.5 (20625) | 16.08 | 16.15 | 16.11 |
|       |                 | 836.5 (20525) | 16.00 | 16.24 | 16.17 |
|       |                 | 826.5 (20425) | 16.21 | 16.07 | 16.24 |
| 10MHz | 1RB-High (49)   | 844 (20600)   | 16.10 | 16.47 | 16.33 |
|       |                 | 836.5 (20525) | 15.99 | 16.30 | 16.25 |
|       |                 | 829 (20450)   | 16.07 | 16.46 | 16.27 |
|       | 1RB-Middle (24) | 844 (20600)   | 16.18 | 16.48 | 16.40 |
|       |                 | 836.5 (20525) | 16.17 | 16.41 | 16.30 |
|       |                 | 829 (20450)   | 16.19 | 16.47 | 16.34 |
|       | 1RB-Low (0)     | 844 (20600)   | 16.07 | 16.45 | 16.25 |
|       |                 | 836.5 (20525) | 16.08 | 16.41 | 16.31 |
|       |                 | 829 (20450)   | 16.05 | 16.40 | 16.15 |
|       | 25RB-High (25)  | 844 (20600)   | 16.06 | 16.10 | 16.09 |
|       |                 | 836.5 (20525) | 16.20 | 16.26 | 16.21 |
|       |                 | 829 (20450)   | 16.09 | 16.10 | 16.08 |

|  |                  |               |       |       |       |
|--|------------------|---------------|-------|-------|-------|
|  | 25RB-Middle (12) | 844 (20600)   | 16.15 | 16.18 | 16.17 |
|  |                  | 836.5 (20525) | 16.10 | 16.13 | 16.12 |
|  |                  | 829 (20450)   | 16.10 | 16.12 | 16.13 |
|  | 25RB-Low (0)     | 844 (20600)   | 16.21 | 16.21 | 16.22 |
|  |                  | 836.5 (20525) | 16.08 | 16.14 | 16.12 |
|  |                  | 829 (20450)   | 16.23 | 16.25 | 16.25 |
|  | 50RB (0)         | 844 (20600)   | 16.08 | 16.16 | 16.16 |
|  |                  | 836.5 (20525) | 16.15 | 16.17 | 16.15 |
|  |                  | 829 (20450)   | 16.15 | 16.19 | 16.20 |

### LTE B7 - DSI0/DSI2

| LTE B7    |                 |                |       |       |       |
|-----------|-----------------|----------------|-------|-------|-------|
| BANDWIDTH | Number of RBs   | Frequency      | QPSK  | 16QAM | 64QAM |
| 5MHz      | 1RB-High (24)   | 2567.5 (21425) | 22.98 | 21.78 | 21.30 |
|           |                 | 2535 (21100)   | 23.05 | 22.35 | 21.23 |
|           |                 | 2502.5 (20775) | 22.96 | 22.35 | 21.34 |
|           | 1RB-Middle (12) | 2567.5 (21425) | 23.21 | 22.15 | 21.56 |
|           |                 | 2535 (21100)   | 23.28 | 22.55 | 21.49 |
|           |                 | 2502.5 (20775) | 23.21 | 22.54 | 21.53 |
|           | 1RB-Low (0)     | 2567.5 (21425) | 23.00 | 21.93 | 21.17 |
|           |                 | 2535 (21100)   | 23.11 | 22.42 | 21.29 |
|           |                 | 2502.5 (20775) | 22.64 | 22.31 | 21.20 |
|           | 12RB-High (13)  | 2567.5 (21425) | 22.13 | 20.92 | 20.21 |
|           |                 | 2535 (21100)   | 22.18 | 21.17 | 20.16 |
|           |                 | 2502.5 (20775) | 22.11 | 21.21 | 20.16 |
|           | 12RB-Middle (6) | 2567.5 (21425) | 22.26 | 21.16 | 20.29 |
|           |                 | 2535 (21100)   | 22.27 | 21.24 | 20.25 |
|           |                 | 2502.5 (20775) | 22.16 | 21.20 | 20.15 |
|           | 12RB-Low (0)    | 2567.5 (21425) | 22.29 | 21.30 | 20.31 |
|           |                 | 2535 (21100)   | 22.26 | 21.20 | 20.21 |
|           |                 | 2502.5 (20775) | 22.08 | 21.08 | 20.09 |
|           | 25RB (0)        | 2567.5 (21425) | 22.20 | 21.25 | 20.21 |
|           |                 | 2535 (21100)   | 22.21 | 21.20 | 20.17 |
|           |                 | 2502.5 (20775) | 22.09 | 21.13 | 20.09 |
| 10MHz     | 1RB-High (49)   | 2565 (21400)   | 23.11 | 22.25 | 21.33 |
|           |                 | 2535 (21100)   | 23.11 | 22.49 | 21.29 |
|           |                 | 2505 (20800)   | 23.06 | 22.37 | 21.36 |
|           | 1RB-Middle (24) | 2565 (21400)   | 23.22 | 22.45 | 21.49 |
|           |                 | 2535 (21100)   | 23.27 | 22.57 | 21.52 |
|           |                 | 2505 (20800)   | 23.19 | 22.53 | 21.41 |
|           | 1RB-Low (0)     | 2565 (21400)   | 23.17 | 22.48 | 21.43 |

|       |                  |                  |                |       |       |       |
|-------|------------------|------------------|----------------|-------|-------|-------|
|       |                  |                  | 2535 (21100)   | 23.19 | 22.39 | 21.27 |
|       |                  |                  | 2505 (20800)   | 23.00 | 22.41 | 21.33 |
|       |                  | 25RB-High (25)   | 2565 (21400)   | 22.10 | 21.10 | 20.09 |
|       |                  |                  | 2535 (21100)   | 22.22 | 21.20 | 20.19 |
|       |                  |                  | 2505 (20800)   | 22.21 | 21.24 | 20.19 |
|       |                  | 25RB-Middle (12) | 2565 (21400)   | 22.25 | 21.23 | 20.23 |
|       |                  |                  | 2535 (21100)   | 22.24 | 21.26 | 20.24 |
|       |                  |                  | 2505 (20800)   | 22.15 | 21.20 | 20.13 |
|       |                  | 25RB-Low (0)     | 2565 (21400)   | 22.37 | 21.36 | 20.32 |
|       |                  |                  | 2535 (21100)   | 22.32 | 21.29 | 20.29 |
|       |                  |                  | 2505 (20800)   | 22.12 | 21.15 | 20.06 |
|       |                  | 50RB (0)         | 2565 (21400)   | 22.22 | 21.23 | 20.17 |
|       |                  |                  | 2535 (21100)   | 22.26 | 21.23 | 20.23 |
|       |                  |                  | 2505 (20800)   | 22.18 | 21.20 | 20.14 |
| 15MHz | 1RB-High (74)    |                  | 2562.5 (21375) | 23.04 | 22.27 | 21.34 |
|       |                  |                  | 2535 (21100)   | 23.08 | 22.43 | 21.32 |
|       |                  |                  | 2507.5 (20825) | 23.05 | 22.42 | 21.31 |
|       | 1RB-Middle (37)  |                  | 2562.5 (21375) | 23.17 | 22.42 | 21.38 |
|       |                  |                  | 2535 (21100)   | 23.21 | 22.49 | 21.45 |
|       |                  |                  | 2507.5 (20825) | 23.13 | 22.51 | 21.42 |
|       | 1RB-Low (0)      |                  | 2562.5 (21375) | 23.16 | 22.38 | 21.36 |
|       |                  |                  | 2535 (21100)   | 23.16 | 22.36 | 21.34 |
|       |                  |                  | 2507.5 (20825) | 22.99 | 22.28 | 21.22 |
|       | 36RB-High (38)   |                  | 2562.5 (21375) | 22.16 | 21.11 | 20.12 |
|       |                  |                  | 2535 (21100)   | 22.26 | 21.19 | 20.22 |
|       |                  |                  | 2507.5 (20825) | 22.24 | 21.20 | 20.17 |
|       | 36RB-Middle (19) |                  | 2562.5 (21375) | 22.28 | 21.25 | 20.22 |
|       |                  |                  | 2535 (21100)   | 22.32 | 21.22 | 20.21 |
|       |                  |                  | 2507.5 (20825) | 22.20 | 21.18 | 20.17 |
|       | 36RB-Low (0)     |                  | 2562.5 (21375) | 22.33 | 21.24 | 20.26 |
|       |                  |                  | 2535 (21100)   | 22.32 | 21.24 | 20.26 |
|       |                  |                  | 2507.5 (20825) | 22.14 | 21.11 | 20.06 |
|       | 75RB (0)         |                  | 2562.5 (21375) | 22.25 | 21.20 | 20.17 |
|       |                  |                  | 2535 (21100)   | 22.29 | 21.23 | 20.22 |
|       |                  |                  | 2507.5 (20825) | 22.21 | 21.18 | 20.14 |
| 20MHz | 1RB-High (99)    |                  | 2560 (21350)   | 22.94 | 22.27 | 21.23 |
|       |                  |                  | 2535 (21100)   | 23.01 | 22.37 | 21.23 |
|       |                  |                  | 2510 (20850)   | 23.00 | 22.29 | 21.08 |
|       | 1RB-Middle (50)  |                  | 2560 (21350)   | 23.30 | 22.58 | 21.50 |
|       |                  |                  | 2535 (21100)   | 23.38 | 22.58 | 21.50 |
|       |                  |                  | 2510 (20850)   | 23.23 | 22.55 | 21.45 |
|       | 1RB-Low (0)      |                  | 2560 (21350)   | 23.10 | 22.45 | 21.31 |

|  |                  |              |       |       |       |
|--|------------------|--------------|-------|-------|-------|
|  |                  | 2535 (21100) | 23.05 | 22.33 | 21.15 |
|  |                  | 2510 (20850) | 22.88 | 22.19 | 21.10 |
|  | 50RB-High (50)   | 2560 (21350) | 22.06 | 21.04 | 20.04 |
|  |                  | 2535 (21100) | 22.20 | 21.18 | 20.13 |
|  |                  | 2510 (20850) | 22.29 | 21.28 | 20.21 |
|  | 50RB-Middle (25) | 2560 (21350) | 22.33 | 21.29 | 20.28 |
|  |                  | 2535 (21100) | 22.33 | 21.30 | 20.27 |
|  |                  | 2510 (20850) | 22.26 | 21.25 | 20.22 |
|  | 50RB-Low (0)     | 2560 (21350) | 22.33 | 21.25 | 20.21 |
|  |                  | 2535 (21100) | 22.35 | 21.30 | 20.33 |
|  |                  | 2510 (20850) | 22.31 | 21.14 | 20.10 |
|  | 100RB (0)        | 2560 (21350) | 22.20 | 21.12 | 20.10 |
|  |                  | 2535 (21100) | 22.30 | 21.22 | 20.22 |
|  |                  | 2510 (20850) | 22.22 | 21.20 | 20.13 |

#### LTE B7 – DSI1

| LTE B7    |                 |                |       |       |       |
|-----------|-----------------|----------------|-------|-------|-------|
| BANDWIDTH | Number of RBs   | Frequency      | QPSK  | 16QAM | 64QAM |
| 5MHz      | 1RB-High (24)   | 2567.5 (21425) | 11.70 | 11.65 | 11.55 |
|           |                 | 2535 (21100)   | 11.63 | 11.56 | 11.76 |
|           |                 | 2502.5 (20775) | 11.47 | 11.67 | 11.48 |
|           | 1RB-Middle (12) | 2567.5 (21425) | 11.94 | 12.03 | 11.81 |
|           |                 | 2535 (21100)   | 11.90 | 11.89 | 11.98 |
|           |                 | 2502.5 (20775) | 11.81 | 11.82 | 11.73 |
|           | 1RB-Low (0)     | 2567.5 (21425) | 11.58 | 11.78 | 11.78 |
|           |                 | 2535 (21100)   | 11.71 | 11.73 | 11.72 |
|           |                 | 2502.5 (20775) | 11.58 | 11.72 | 11.52 |
|           | 12RB-High (13)  | 2567.5 (21425) | 11.90 | 11.68 | 11.80 |
|           |                 | 2535 (21100)   | 11.71 | 11.70 | 11.77 |
|           |                 | 2502.5 (20775) | 11.92 | 11.73 | 11.86 |
|           | 12RB-Middle (6) | 2567.5 (21425) | 11.86 | 11.96 | 11.82 |
|           |                 | 2535 (21100)   | 12.01 | 11.81 | 11.77 |
|           |                 | 2502.5 (20775) | 11.84 | 11.80 | 11.62 |
|           | 12RB-Low (0)    | 2567.5 (21425) | 11.78 | 11.94 | 11.82 |
|           |                 | 2535 (21100)   | 11.97 | 11.81 | 11.87 |
|           |                 | 2502.5 (20775) | 11.79 | 11.68 | 11.75 |
|           | 25RB (0)        | 2567.5 (21425) | 11.96 | 11.77 | 11.76 |
|           |                 | 2535 (21100)   | 11.89 | 11.84 | 11.74 |
|           |                 | 2502.5 (20775) | 11.69 | 11.62 | 11.80 |
| 10MHz     | 1RB-High (49)   | 2565 (21400)   | 11.70 | 11.78 | 11.54 |
|           |                 | 2535 (21100)   | 11.58 | 11.64 | 11.66 |

|       |                  |                |       |       |       |
|-------|------------------|----------------|-------|-------|-------|
|       |                  | 2505 (20800)   | 11.52 | 11.70 | 11.69 |
|       |                  | 2565 (21400)   | 11.87 | 12.11 | 11.85 |
|       |                  | 2535 (21100)   | 11.91 | 11.97 | 11.94 |
|       |                  | 2505 (20800)   | 11.86 | 11.88 | 11.92 |
|       |                  | 2565 (21400)   | 11.65 | 11.63 | 11.75 |
|       |                  | 2535 (21100)   | 11.59 | 11.75 | 11.73 |
|       |                  | 2505 (20800)   | 11.53 | 11.75 | 11.59 |
|       |                  | 2565 (21400)   | 11.69 | 11.68 | 11.78 |
|       |                  | 2535 (21100)   | 11.73 | 11.77 | 11.89 |
|       |                  | 2505 (20800)   | 11.76 | 11.72 | 11.88 |
|       |                  | 2565 (21400)   | 12.00 | 11.88 | 11.87 |
|       |                  | 2535 (21100)   | 11.96 | 11.95 | 11.91 |
|       |                  | 2505 (20800)   | 11.79 | 11.80 | 11.62 |
|       |                  | 2565 (21400)   | 11.77 | 11.80 | 11.83 |
|       |                  | 2535 (21100)   | 11.85 | 11.95 | 11.94 |
|       |                  | 2505 (20800)   | 11.75 | 11.77 | 11.61 |
|       |                  | 2565 (21400)   | 11.83 | 11.85 | 11.73 |
|       |                  | 2535 (21100)   | 11.75 | 11.86 | 11.73 |
|       |                  | 2505 (20800)   | 11.71 | 11.68 | 11.75 |
| 15MHz | 1RB-High (74)    | 2562.5 (21375) | 11.63 | 11.86 | 11.44 |
|       |                  | 2535 (21100)   | 11.47 | 11.78 | 11.54 |
|       |                  | 2507.5 (20825) | 11.49 | 11.77 | 11.52 |
|       | 1RB-Middle (37)  | 2562.5 (21375) | 11.90 | 12.15 | 12.02 |
|       |                  | 2535 (21100)   | 11.92 | 12.00 | 11.88 |
|       |                  | 2507.5 (20825) | 11.91 | 12.03 | 11.74 |
|       | 1RB-Low (0)      | 2562.5 (21375) | 11.57 | 11.67 | 11.73 |
|       |                  | 2535 (21100)   | 11.51 | 11.84 | 11.68 |
|       |                  | 2507.5 (20825) | 11.59 | 11.54 | 11.57 |
|       | 36RB-High (38)   | 2562.5 (21375) | 11.75 | 11.87 | 11.87 |
|       |                  | 2535 (21100)   | 11.81 | 11.73 | 11.69 |
|       |                  | 2507.5 (20825) | 11.73 | 11.71 | 11.72 |
|       | 36RB-Middle (19) | 2562.5 (21375) | 11.82 | 11.92 | 11.94 |
|       |                  | 2535 (21100)   | 11.88 | 11.84 | 11.70 |
|       |                  | 2507.5 (20825) | 11.78 | 11.63 | 11.80 |
|       | 36RB-Low (0)     | 2562.5 (21375) | 11.86 | 11.81 | 11.73 |
|       |                  | 2535 (21100)   | 11.84 | 11.87 | 11.87 |
|       |                  | 2507.5 (20825) | 11.72 | 11.70 | 11.60 |
|       | 75RB (0)         | 2562.5 (21375) | 11.89 | 11.80 | 11.78 |
|       |                  | 2535 (21100)   | 11.71 | 11.80 | 11.74 |
|       |                  | 2507.5 (20825) | 11.87 | 11.72 | 11.61 |
| 20MHz | 1RB-High (99)    | 2560 (21350)   | 11.64 | 11.76 | 11.57 |
|       |                  | 2535 (21100)   | 11.56 | 11.70 | 11.68 |



|  |                  |              |       |       |       |
|--|------------------|--------------|-------|-------|-------|
|  |                  | 2510 (20850) | 11.57 | 11.76 | 11.61 |
|  | 1RB-Middle (50)  | 2560 (21350) | 11.91 | 12.05 | 11.93 |
|  |                  | 2535 (21100) | 11.92 | 12.02 | 11.93 |
|  |                  | 2510 (20850) | 11.81 | 11.94 | 11.84 |
|  | 1RB-Low (0)      | 2560 (21350) | 11.66 | 11.75 | 11.70 |
|  |                  | 2535 (21100) | 11.63 | 11.75 | 11.70 |
|  |                  | 2510 (20850) | 11.57 | 11.68 | 11.56 |
|  | 50RB-High (50)   | 2560 (21350) | 11.84 | 11.79 | 11.77 |
|  |                  | 2535 (21100) | 11.80 | 11.80 | 11.81 |
|  |                  | 2510 (20850) | 11.83 | 11.81 | 11.78 |
|  | 50RB-Middle (25) | 2560 (21350) | 11.94 | 11.88 | 11.86 |
|  |                  | 2535 (21100) | 11.95 | 11.90 | 11.85 |
|  |                  | 2510 (20850) | 11.83 | 11.75 | 11.74 |
|  | 50RB-Low (0)     | 2560 (21350) | 11.90 | 11.88 | 11.85 |
|  |                  | 2535 (21100) | 11.92 | 11.93 | 11.92 |
|  |                  | 2510 (20850) | 11.74 | 11.68 | 11.68 |
|  | 100RB (0)        | 2560 (21350) | 11.86 | 11.78 | 11.79 |
|  |                  | 2535 (21100) | 11.85 | 11.84 | 11.82 |
|  |                  | 2510 (20850) | 11.77 | 11.70 | 11.71 |

### LTE B7 – DSI3

| LTE B7    |                 |                |      |       |       |
|-----------|-----------------|----------------|------|-------|-------|
| BANDWIDTH | Number of RBs   | Frequency      | QPSK | 16QAM | 64QAM |
| 5MHz      | 1RB-High (24)   | 2567.5 (21425) | 9.43 | 9.68  | 9.73  |
|           |                 | 2535 (21100)   | 9.33 | 9.82  | 9.74  |
|           |                 | 2502.5 (20775) | 9.41 | 9.60  | 9.41  |
|           | 1RB-Middle (12) | 2567.5 (21425) | 9.73 | 9.89  | 9.90  |
|           |                 | 2535 (21100)   | 9.94 | 10.13 | 9.84  |
|           |                 | 2502.5 (20775) | 9.83 | 9.70  | 9.73  |
|           | 1RB-Low (0)     | 2567.5 (21425) | 9.58 | 9.82  | 9.80  |
|           |                 | 2535 (21100)   | 9.33 | 9.69  | 9.48  |
|           |                 | 2502.5 (20775) | 9.22 | 9.54  | 9.69  |
|           | 12RB-High (13)  | 2567.5 (21425) | 9.75 | 9.70  | 9.58  |
|           |                 | 2535 (21100)   | 9.75 | 9.62  | 9.56  |
|           |                 | 2502.5 (20775) | 9.59 | 9.67  | 9.58  |
|           | 12RB-Middle (6) | 2567.5 (21425) | 9.88 | 9.81  | 9.89  |
|           |                 | 2535 (21100)   | 9.87 | 9.64  | 9.78  |
|           |                 | 2502.5 (20775) | 9.65 | 9.57  | 9.60  |
|           | 12RB-Low (0)    | 2567.5 (21425) | 9.75 | 9.86  | 9.83  |
|           |                 | 2535 (21100)   | 9.80 | 9.73  | 9.87  |
|           |                 | 2502.5 (20775) | 9.63 | 9.57  | 9.39  |

|       |                  |                |      |       |       |
|-------|------------------|----------------|------|-------|-------|
|       | 25RB (0)         | 2567.5 (21425) | 9.62 | 9.68  | 9.56  |
|       |                  | 2535 (21100)   | 9.81 | 9.57  | 9.65  |
|       |                  | 2502.5 (20775) | 9.55 | 9.65  | 9.65  |
| 10MHz | 1RB-High (49)    | 2565 (21400)   | 9.59 | 9.83  | 9.63  |
|       |                  | 2535 (21100)   | 9.38 | 9.69  | 9.69  |
|       |                  | 2505 (20800)   | 9.50 | 9.77  | 9.62  |
|       | 1RB-Middle (24)  | 2565 (21400)   | 9.69 | 9.99  | 10.04 |
|       |                  | 2535 (21100)   | 9.94 | 10.10 | 9.82  |
|       |                  | 2505 (20800)   | 9.55 | 9.69  | 9.86  |
|       | 1RB-Low (0)      | 2565 (21400)   | 9.59 | 9.82  | 9.69  |
|       |                  | 2535 (21100)   | 9.34 | 9.56  | 9.60  |
|       |                  | 2505 (20800)   | 9.29 | 9.70  | 9.73  |
|       | 25RB-High (25)   | 2565 (21400)   | 9.60 | 9.67  | 9.73  |
|       |                  | 2535 (21100)   | 9.72 | 9.59  | 9.45  |
|       |                  | 2505 (20800)   | 9.80 | 9.75  | 9.69  |
|       | 25RB-Middle (12) | 2565 (21400)   | 9.93 | 9.63  | 9.84  |
|       |                  | 2535 (21100)   | 9.96 | 9.64  | 9.63  |
|       |                  | 2505 (20800)   | 9.67 | 9.75  | 9.67  |
|       | 25RB-Low (0)     | 2565 (21400)   | 9.64 | 9.67  | 9.78  |
|       |                  | 2535 (21100)   | 9.86 | 9.69  | 9.83  |
|       |                  | 2505 (20800)   | 9.66 | 9.64  | 9.51  |
|       | 50RB (0)         | 2565 (21400)   | 9.61 | 9.56  | 9.83  |
|       |                  | 2535 (21100)   | 9.76 | 9.53  | 9.78  |
|       |                  | 2505 (20800)   | 9.65 | 9.44  | 9.56  |
| 15MHz | 1RB-High (74)    | 2562.5 (21375) | 9.46 | 9.81  | 9.60  |
|       |                  | 2535 (21100)   | 9.29 | 9.54  | 9.57  |
|       |                  | 2507.5 (20825) | 9.28 | 9.72  | 9.43  |
|       | 1RB-Middle (37)  | 2562.5 (21375) | 9.81 | 10.02 | 9.81  |
|       |                  | 2535 (21100)   | 9.94 | 10.14 | 9.92  |
|       |                  | 2507.5 (20825) | 9.78 | 9.81  | 9.93  |
|       | 1RB-Low (0)      | 2562.5 (21375) | 9.38 | 9.77  | 9.67  |
|       |                  | 2535 (21100)   | 9.48 | 9.54  | 9.50  |
|       |                  | 2507.5 (20825) | 9.35 | 9.79  | 9.70  |
|       | 36RB-High (38)   | 2562.5 (21375) | 9.80 | 9.79  | 9.80  |
|       |                  | 2535 (21100)   | 9.62 | 9.56  | 9.47  |
|       |                  | 2507.5 (20825) | 9.60 | 9.67  | 9.72  |
|       | 36RB-Middle (19) | 2562.5 (21375) | 9.90 | 9.77  | 9.78  |
|       |                  | 2535 (21100)   | 9.72 | 9.84  | 9.81  |
|       |                  | 2507.5 (20825) | 9.50 | 9.58  | 9.54  |
|       | 36RB-Low (0)     | 2562.5 (21375) | 9.73 | 9.72  | 9.69  |
|       |                  | 2535 (21100)   | 9.61 | 9.57  | 9.77  |
|       |                  | 2507.5 (20825) | 9.68 | 9.59  | 9.49  |

|       |                  |                |      |       |      |
|-------|------------------|----------------|------|-------|------|
| 20MHz | 75RB (0)         | 2562.5 (21375) | 9.78 | 9.74  | 9.72 |
|       |                  | 2535 (21100)   | 9.73 | 9.74  | 9.71 |
|       |                  | 2507.5 (20825) | 9.54 | 9.43  | 9.68 |
|       | 1RB-High (99)    | 2560 (21350)   | 9.54 | 9.77  | 9.67 |
|       |                  | 2535 (21100)   | 9.44 | 9.74  | 9.64 |
|       |                  | 2510 (20850)   | 9.43 | 9.68  | 9.53 |
|       | 1RB-Middle (50)  | 2560 (21350)   | 9.85 | 10.05 | 9.97 |
|       |                  | 2535 (21100)   | 9.88 | 10.10 | 9.85 |
|       |                  | 2510 (20850)   | 9.73 | 9.89  | 9.84 |
|       | 1RB-Low (0)      | 2560 (21350)   | 9.56 | 9.81  | 9.73 |
|       |                  | 2535 (21100)   | 9.48 | 9.68  | 9.62 |
|       |                  | 2510 (20850)   | 9.41 | 9.69  | 9.63 |
|       | 50RB-High (50)   | 2560 (21350)   | 9.74 | 9.76  | 9.73 |
|       |                  | 2535 (21100)   | 9.66 | 9.63  | 9.62 |
|       |                  | 2510 (20850)   | 9.72 | 9.70  | 9.68 |
|       | 50RB-Middle (25) | 2560 (21350)   | 9.83 | 9.80  | 9.79 |
|       |                  | 2535 (21100)   | 9.87 | 9.76  | 9.75 |
|       |                  | 2510 (20850)   | 9.69 | 9.69  | 9.65 |
|       | 50RB-Low (0)     | 2560 (21350)   | 9.77 | 9.79  | 9.77 |
|       |                  | 2535 (21100)   | 9.79 | 9.75  | 9.77 |
|       |                  | 2510 (20850)   | 9.60 | 9.58  | 9.57 |
|       | 100RB (0)        | 2560 (21350)   | 9.76 | 9.73  | 9.74 |
|       |                  | 2535 (21100)   | 9.72 | 9.68  | 9.68 |
|       |                  | 2510 (20850)   | 9.64 | 9.61  | 9.64 |

#### LTE B12 - DSI0/DSI2

| LTE B12   |                |           |       |       |       |
|-----------|----------------|-----------|-------|-------|-------|
| BANDWIDTH | Number of RBs  | Frequency | QPSK  | 16QAM | 64QAM |
| 1.4MHz    | 1RB-High (5)   | 715.3     | 23.43 | 22.58 | 21.55 |
|           |                | 707.5     | 23.45 | 22.70 | 21.60 |
|           |                | 699.7     | 23.53 | 22.72 | 20.71 |
|           | 1RB-Middle (3) | 715.3     | 23.54 | 22.76 | 21.69 |
|           |                | 707.5     | 23.56 | 22.83 | 21.72 |
|           |                | 699.7     | 23.60 | 22.96 | 21.86 |
|           | 1RB-Low (0)    | 715.3     | 23.44 | 22.69 | 21.59 |
|           |                | 707.5     | 23.44 | 22.72 | 21.66 |
|           |                | 699.7     | 23.48 | 22.75 | 21.68 |
|           | 3RB-High (3)   | 715.3     | 23.62 | 22.44 | 21.63 |
|           |                | 707.5     | 23.58 | 22.51 | 21.61 |
|           |                | 699.7     | 23.67 | 22.58 | 21.70 |
|           | 3RB-Middle (1) | 715.3     | 23.63 | 22.53 | 21.67 |

|      |                 |       |       |       |       |
|------|-----------------|-------|-------|-------|-------|
|      |                 | 707.5 | 23.63 | 22.56 | 21.68 |
|      |                 | 699.7 | 23.62 | 22.55 | 21.76 |
|      | 3RB-Low (0)     | 715.3 | 23.57 | 22.50 | 21.61 |
|      |                 | 707.5 | 23.56 | 22.47 | 21.66 |
|      |                 | 699.7 | 23.61 | 22.51 | 21.66 |
|      | 6RB (0)         | 715.3 | 22.59 | 21.60 | 20.56 |
|      |                 | 707.5 | 22.59 | 21.68 | 20.58 |
|      |                 | 699.7 | 22.61 | 21.69 | 20.59 |
| 3MHz | 1RB-High (14)   | 714.5 | 23.45 | 22.63 | 21.53 |
|      |                 | 707.5 | 23.47 | 22.66 | 21.72 |
|      |                 | 700.5 | 23.51 | 22.67 | 21.73 |
|      | 1RB-Middle (7)  | 714.5 | 23.66 | 22.84 | 21.76 |
|      |                 | 707.5 | 23.62 | 22.89 | 21.87 |
|      |                 | 700.5 | 23.72 | 22.83 | 21.83 |
|      | 1RB-Low (0)     | 714.5 | 23.49 | 22.68 | 21.63 |
|      |                 | 707.5 | 23.52 | 22.72 | 21.65 |
|      |                 | 700.5 | 23.54 | 22.71 | 21.66 |
|      | 8RB-High (7)    | 714.5 | 22.50 | 21.54 | 20.54 |
|      |                 | 707.5 | 22.50 | 21.59 | 20.58 |
|      |                 | 700.5 | 22.56 | 21.65 | 20.64 |
|      | 8RB-Middle (4)  | 714.5 | 22.58 | 21.59 | 20.61 |
|      |                 | 707.5 | 22.55 | 21.65 | 20.62 |
|      |                 | 700.5 | 22.61 | 21.66 | 20.67 |
|      | 8RB-Low (0)     | 714.5 | 22.53 | 21.60 | 20.60 |
|      |                 | 707.5 | 22.54 | 21.59 | 20.61 |
|      |                 | 700.5 | 22.55 | 21.63 | 20.62 |
|      | 15RB (0)        | 714.5 | 22.54 | 21.53 | 20.53 |
|      |                 | 707.5 | 22.52 | 21.55 | 20.53 |
|      |                 | 700.5 | 22.56 | 21.60 | 20.57 |
| 5MHz | 1RB-High (24)   | 713.5 | 23.37 | 22.59 | 21.52 |
|      |                 | 707.5 | 23.37 | 22.61 | 21.57 |
|      |                 | 701.5 | 23.37 | 22.54 | 21.58 |
|      | 1RB-Middle (12) | 713.5 | 23.61 | 22.86 | 21.78 |
|      |                 | 707.5 | 23.66 | 22.75 | 21.76 |
|      |                 | 701.5 | 23.65 | 22.90 | 21.83 |
|      | 1RB-Low (0)     | 713.5 | 23.37 | 22.69 | 21.60 |
|      |                 | 707.5 | 23.41 | 22.58 | 21.61 |
|      |                 | 701.5 | 23.44 | 22.65 | 21.60 |
|      | 12RB-High (13)  | 713.5 | 22.50 | 21.49 | 20.52 |
|      |                 | 707.5 | 22.53 | 21.52 | 20.55 |
|      |                 | 701.5 | 22.53 | 21.55 | 20.60 |
|      | 12RB-Middle (6) | 713.5 | 22.57 | 21.55 | 20.58 |

|                  |       |              |               |       |       |       |
|------------------|-------|--------------|---------------|-------|-------|-------|
|                  |       |              | 707.5         | 22.57 | 21.58 | 20.59 |
|                  |       |              | 701.5         | 22.60 | 21.61 | 20.64 |
|                  |       | 12RB-Low (0) | 713.5         | 22.57 | 21.57 | 20.61 |
|                  |       |              | 707.5         | 22.53 | 21.54 | 20.52 |
|                  |       |              | 701.5         | 22.61 | 21.62 | 20.65 |
|                  |       | 25RB (0)     | 713.5         | 22.58 | 21.56 | 20.58 |
|                  |       |              | 707.5         | 22.55 | 21.55 | 20.52 |
|                  |       |              | 701.5         | 22.61 | 21.61 | 20.63 |
|                  |       | 10MHz        | 1RB-High (49) | 711   | 23.38 | 22.68 |
| 707.5            | 23.44 |              |               | 22.68 | 21.64 |       |
| 704              | 23.39 |              |               | 22.71 | 21.55 |       |
| 1RB-Middle (24)  | 711   |              | 23.53         | 22.78 | 21.71 |       |
|                  | 707.5 |              | 23.55         | 22.70 | 21.69 |       |
|                  | 704   |              | 23.52         | 22.78 | 21.74 |       |
| 1RB-Low (0)      | 711   |              | 23.48         | 22.73 | 21.66 |       |
|                  | 707.5 |              | 23.44         | 22.62 | 21.73 |       |
|                  | 704   |              | 23.49         | 22.77 | 21.67 |       |
| 25RB-High (25)   | 711   |              | 22.50         | 21.50 | 20.49 |       |
|                  | 707.5 |              | 22.58         | 21.59 | 20.61 |       |
|                  | 704   |              | 22.61         | 21.71 | 20.65 |       |
| 25RB-Middle (12) | 711   |              | 22.54         | 21.55 | 20.58 |       |
|                  | 707.5 |              | 22.56         | 21.59 | 20.60 |       |
|                  | 704   |              | 22.58         | 21.61 | 20.62 |       |
| 25RB-Low (0)     | 711   |              | 22.58         | 21.54 | 20.57 |       |
|                  | 707.5 |              | 22.65         | 21.53 | 20.52 |       |
|                  | 704   |              | 22.63         | 21.66 | 20.65 |       |
| 50RB (0)         | 711   |              | 22.53         | 21.54 | 20.53 |       |
|                  | 707.5 |              | 22.54         | 21.59 | 20.57 |       |
|                  | 704   |              | 22.66         | 21.65 | 20.67 |       |

### LTE B12 – DSI1/DSI3

| LTE B12   |                |           |       |       |       |
|-----------|----------------|-----------|-------|-------|-------|
| BANDWIDTH | Number of RBs  | Frequency | QPSK  | 16QAM | 64QAM |
| 1.4MHz    | 1RB-High (5)   | 715.3     | 16.37 | 16.67 | 16.64 |
|           |                | 707.5     | 16.26 | 16.72 | 16.75 |
|           |                | 699.7     | 16.38 | 16.66 | 16.56 |
|           | 1RB-Middle (3) | 715.3     | 16.53 | 16.79 | 16.73 |
|           |                | 707.5     | 16.61 | 16.88 | 16.85 |
|           |                | 699.7     | 16.56 | 16.89 | 16.84 |
|           | 1RB-Low (0)    | 715.3     | 16.56 | 16.69 | 16.67 |
|           |                | 707.5     | 16.44 | 16.83 | 16.75 |

|      |                 |                |       |       |       |       |
|------|-----------------|----------------|-------|-------|-------|-------|
|      |                 |                | 699.7 | 16.35 | 16.67 | 16.62 |
|      |                 | 3RB-High (3)   | 715.3 | 16.54 | 16.61 | 16.63 |
|      |                 |                | 707.5 | 16.58 | 16.67 | 16.59 |
|      |                 |                | 699.7 | 16.74 | 16.69 | 16.61 |
|      |                 | 3RB-Middle (1) | 715.3 | 16.67 | 16.49 | 16.41 |
|      |                 |                | 707.5 | 16.40 | 16.44 | 16.57 |
|      |                 |                | 699.7 | 16.52 | 16.49 | 16.56 |
|      |                 | 3RB-Low (0)    | 715.3 | 16.59 | 16.40 | 16.63 |
|      |                 |                | 707.5 | 16.49 | 16.43 | 16.55 |
|      |                 |                | 699.7 | 16.63 | 16.67 | 16.67 |
|      |                 | 6RB (0)        | 715.3 | 16.52 | 16.62 | 16.65 |
|      |                 |                | 707.5 | 16.60 | 16.44 | 16.59 |
|      |                 |                | 699.7 | 16.44 | 16.61 | 16.55 |
| 3MHz | 1RB-High (14)   |                | 714.5 | 16.48 | 16.67 | 16.63 |
|      |                 |                | 707.5 | 16.50 | 16.79 | 16.67 |
|      |                 |                | 700.5 | 16.35 | 16.86 | 16.73 |
|      | 1RB-Middle (7)  |                | 714.5 | 16.46 | 16.68 | 16.74 |
|      |                 |                | 707.5 | 16.60 | 17.09 | 16.88 |
|      |                 |                | 700.5 | 16.62 | 16.92 | 16.61 |
|      | 1RB-Low (0)     |                | 714.5 | 16.54 | 16.90 | 16.83 |
|      |                 |                | 707.5 | 16.59 | 16.72 | 16.66 |
|      |                 |                | 700.5 | 16.43 | 16.75 | 16.51 |
|      | 8RB-High (7)    |                | 714.5 | 16.47 | 16.51 | 16.56 |
|      |                 |                | 707.5 | 16.70 | 16.61 | 16.48 |
|      |                 |                | 700.5 | 16.46 | 16.49 | 16.68 |
|      | 8RB-Middle (4)  |                | 714.5 | 16.62 | 16.49 | 16.51 |
|      |                 |                | 707.5 | 16.47 | 16.57 | 16.40 |
|      |                 |                | 700.5 | 16.64 | 16.54 | 16.54 |
|      | 8RB-Low (0)     |                | 714.5 | 16.32 | 16.58 | 16.43 |
|      |                 |                | 707.5 | 16.59 | 16.58 | 16.58 |
|      |                 |                | 700.5 | 16.56 | 16.65 | 16.63 |
|      | 15RB (0)        |                | 714.5 | 16.55 | 16.46 | 16.65 |
|      |                 |                | 707.5 | 16.54 | 16.69 | 16.62 |
|      |                 |                | 700.5 | 16.66 | 16.52 | 16.48 |
| 5MHz | 1RB-High (24)   |                | 713.5 | 16.25 | 16.59 | 16.71 |
|      |                 |                | 707.5 | 16.32 | 16.85 | 16.61 |
|      |                 |                | 701.5 | 16.41 | 16.72 | 16.59 |
|      | 1RB-Middle (12) |                | 713.5 | 16.62 | 16.92 | 16.63 |
|      |                 |                | 707.5 | 16.54 | 17.04 | 16.74 |
|      |                 |                | 701.5 | 16.75 | 16.89 | 16.80 |
|      | 1RB-Low (0)     |                | 713.5 | 16.31 | 16.82 | 16.81 |
|      |                 |                | 707.5 | 16.37 | 16.78 | 16.59 |

|       |                  |       |       |       |       |
|-------|------------------|-------|-------|-------|-------|
|       | 12RB-High (13)   | 701.5 | 16.46 | 16.84 | 16.51 |
|       |                  | 713.5 | 16.47 | 16.61 | 16.63 |
|       |                  | 707.5 | 16.71 | 16.54 | 16.66 |
|       |                  | 701.5 | 16.44 | 16.73 | 16.60 |
|       | 12RB-Middle (6)  | 713.5 | 16.60 | 16.63 | 16.67 |
|       |                  | 707.5 | 16.49 | 16.38 | 16.42 |
|       |                  | 701.5 | 16.49 | 16.63 | 16.49 |
|       | 12RB-Low (0)     | 713.5 | 16.46 | 16.53 | 16.37 |
|       |                  | 707.5 | 16.50 | 16.61 | 16.62 |
|       |                  | 701.5 | 16.58 | 16.64 | 16.62 |
|       | 25RB (0)         | 713.5 | 16.33 | 16.57 | 16.57 |
|       |                  | 707.5 | 16.51 | 16.56 | 16.59 |
|       |                  | 701.5 | 16.71 | 16.67 | 16.65 |
| 10MHz | 1RB-High (49)    | 711   | 16.45 | 16.74 | 16.65 |
|       |                  | 707.5 | 16.43 | 16.80 | 16.66 |
|       |                  | 704   | 16.44 | 16.78 | 16.67 |
|       | 1RB-Middle (24)  | 711   | 16.57 | 16.84 | 16.81 |
|       |                  | 707.5 | 16.68 | 17.01 | 16.81 |
|       |                  | 704   | 16.67 | 17.00 | 16.78 |
|       | 1RB-Low (0)      | 711   | 16.49 | 16.87 | 16.73 |
|       |                  | 707.5 | 16.54 | 16.89 | 16.79 |
|       |                  | 704   | 16.48 | 16.80 | 16.63 |
|       | 25RB-High (25)   | 711   | 16.54 | 16.54 | 16.53 |
|       |                  | 707.5 | 16.65 | 16.62 | 16.56 |
|       |                  | 704   | 16.64 | 16.68 | 16.65 |
|       | 25RB-Middle (12) | 711   | 16.58 | 16.60 | 16.59 |
|       |                  | 707.5 | 16.55 | 16.58 | 16.57 |
|       |                  | 704   | 16.61 | 16.64 | 16.63 |
|       | 25RB-Low (0)     | 711   | 16.52 | 16.57 | 16.55 |
|       |                  | 707.5 | 16.52 | 16.54 | 16.57 |
|       |                  | 704   | 16.62 | 16.70 | 16.69 |
|       | 50RB (0)         | 711   | 16.53 | 16.56 | 16.56 |
|       |                  | 707.5 | 16.58 | 16.61 | 16.60 |
|       |                  | 704   | 16.62 | 16.68 | 16.67 |

#### LTE B13 - DSI0/DSI2

| LTE B13   |               |               |       |       |       |
|-----------|---------------|---------------|-------|-------|-------|
| BANDWIDTH | Number of RBs | Frequency     | QPSK  | 16QAM | 64QAM |
| 5MHz      | 1RB-High (24) | 784.5 (23255) | 23.44 | 22.66 | 21.57 |
|           |               | 782 (23230)   | 23.43 | 22.76 | 21.60 |
|           |               | 779.5 (23205) | 23.40 | 22.68 | 21.54 |

|       |                  |               |       |       |       |
|-------|------------------|---------------|-------|-------|-------|
|       | 1RB-Middle (12)  | 784.5 (23255) | 23.76 | 23.05 | 21.94 |
|       |                  | 782 (23230)   | 23.73 | 22.90 | 21.87 |
|       |                  | 779.5 (23205) | 23.71 | 22.91 | 21.89 |
|       | 1RB-Low (0)      | 784.5 (23255) | 23.46 | 22.68 | 21.63 |
|       |                  | 782 (23230)   | 23.44 | 22.69 | 21.54 |
|       |                  | 779.5 (23205) | 23.46 | 22.60 | 21.59 |
|       | 12RB-High (13)   | 784.5 (23255) | 22.69 | 21.67 | 20.76 |
|       |                  | 782 (23230)   | 22.54 | 21.55 | 20.60 |
|       |                  | 779.5 (23205) | 22.45 | 21.47 | 20.52 |
|       | 12RB-Middle (6)  | 784.5 (23255) | 22.68 | 21.65 | 20.70 |
|       |                  | 782 (23230)   | 22.65 | 21.63 | 20.69 |
|       |                  | 779.5 (23205) | 22.61 | 21.58 | 20.65 |
|       | 12RB-Low (0)     | 784.5 (23255) | 22.67 | 21.64 | 20.75 |
|       |                  | 782 (23230)   | 22.65 | 21.64 | 20.68 |
|       |                  | 779.5 (23205) | 22.54 | 21.54 | 20.56 |
|       | 25RB (0)         | 784.5 (23255) | 22.67 | 21.68 | 20.72 |
|       |                  | 782 (23230)   | 22.62 | 21.64 | 20.64 |
|       |                  | 779.5 (23205) | 22.51 | 21.50 | 20.55 |
| 10MHz | 1RB-High (49)    | 782 (23230)   | 23.54 | 22.84 | 21.69 |
|       | 1RB-Middle (24)  | 782 (23230)   | 23.63 | 22.89 | 21.79 |
|       | 1RB-Low (0)      | 782 (23230)   | 23.55 | 22.82 | 21.69 |
|       | 25RB-High (25)   | 782 (23230)   | 22.66 | 21.65 | 20.68 |
|       | 25RB-Middle (12) | 782 (23230)   | 22.66 | 21.65 | 20.69 |
|       | 25RB-Low (0)     | 782 (23230)   | 22.69 | 21.69 | 20.73 |
|       | 50RB (0)         | 782 (23230)   | 22.71 | 21.66 | 20.69 |

### LTE B13 – DSI1/DSI3

| LTE B13   |                 |               |       |       |       |
|-----------|-----------------|---------------|-------|-------|-------|
| BANDWIDTH | Number of RBs   | Frequency     | QPSK  | 16QAM | 64QAM |
| 5MHz      | 1RB-High (24)   | 784.5 (23255) | 17.44 | 17.73 | 17.69 |
|           |                 | 782 (23230)   | 17.45 | 17.77 | 17.74 |
|           |                 | 779.5 (23205) | 17.41 | 17.83 | 17.58 |
|           | 1RB-Middle (12) | 784.5 (23255) | 17.71 | 18.05 | 18.00 |
|           |                 | 782 (23230)   | 17.69 | 18.02 | 17.91 |
|           |                 | 779.5 (23205) | 17.62 | 18.04 | 17.89 |
|           | 1RB-Low (0)     | 784.5 (23255) | 17.45 | 17.73 | 17.71 |
|           |                 | 782 (23230)   | 17.42 | 17.70 | 17.64 |
|           |                 | 779.5 (23205) | 17.43 | 17.86 | 17.69 |
|           | 12RB-High (13)  | 784.5 (23255) | 17.60 | 17.66 | 17.67 |
|           |                 | 782 (23230)   | 17.50 | 17.53 | 17.58 |
|           |                 | 779.5 (23205) | 17.48 | 17.49 | 17.52 |



|       |                  |               |       |       |       |
|-------|------------------|---------------|-------|-------|-------|
|       | 12RB-Middle (6)  | 784.5 (23255) | 17.61 | 17.63 | 17.68 |
|       |                  | 782 (23230)   | 17.60 | 17.64 | 17.66 |
|       |                  | 779.5 (23205) | 17.62 | 17.65 | 17.66 |
|       | 12RB-Low (0)     | 784.5 (23255) | 17.65 | 17.70 | 17.70 |
|       |                  | 782 (23230)   | 17.59 | 17.63 | 17.65 |
|       |                  | 779.5 (23205) | 17.48 | 17.48 | 17.52 |
|       | 25RB (0)         | 784.5 (23255) | 17.64 | 17.68 | 17.69 |
|       |                  | 782 (23230)   | 17.59 | 17.62 | 17.60 |
|       |                  | 779.5 (23205) | 17.52 | 17.54 | 17.51 |
| 10MHz | 1RB-High (49)    | 782 (23230)   | 17.49 | 17.92 | 17.71 |
|       | 1RB-Middle (24)  | 782 (23230)   | 17.66 | 18.01 | 17.86 |
|       | 1RB-Low (0)      | 782 (23230)   | 17.56 | 17.86 | 17.82 |
|       | 25RB-High (25)   | 782 (23230)   | 17.61 | 17.66 | 17.65 |
|       | 25RB-Middle (12) | 782 (23230)   | 17.65 | 17.66 | 17.65 |
|       | 25RB-Low (0)     | 782 (23230)   | 17.66 | 17.69 | 17.69 |
|       | 50RB (0)         | 782 (23230)   | 17.64 | 17.68 | 17.66 |

#### LTE B26 - DSI0/DSI2

| LTE B26   |                |               |       |       |       |
|-----------|----------------|---------------|-------|-------|-------|
| BANDWIDTH | Number of RBs  | Frequency     | QPSK  | 16QAM | 64QAM |
| 1.4MHz    | 1RB-High (5)   | 848.3 (27033) | 23.59 | 22.65 | 21.59 |
|           |                | 831.5 (26865) | 23.39 | 22.86 | 21.67 |
|           |                | 814.7 (26697) | 23.59 | 22.60 | 21.46 |
|           | 1RB-Middle (3) | 848.3 (27033) | 23.70 | 22.72 | 21.73 |
|           |                | 831.5 (26865) | 23.64 | 22.81 | 21.86 |
|           |                | 814.7 (26697) | 23.65 | 22.82 | 21.78 |
|           | 1RB-Low (0)    | 848.3 (27033) | 23.40 | 22.69 | 21.44 |
|           |                | 831.5 (26865) | 23.60 | 22.74 | 21.73 |
|           |                | 814.7 (26697) | 23.54 | 22.92 | 21.76 |
|           | 3RB-High (3)   | 848.3 (27033) | 23.33 | 22.73 | 21.47 |
|           |                | 831.5 (26865) | 23.52 | 22.75 | 21.47 |
|           |                | 814.7 (26697) | 23.47 | 22.71 | 21.64 |
|           | 3RB-Middle (1) | 848.3 (27033) | 23.70 | 22.94 | 21.77 |
|           |                | 831.5 (26865) | 23.54 | 22.81 | 21.81 |
|           |                | 814.7 (26697) | 23.65 | 22.69 | 21.82 |
|           | 3RB-Low (0)    | 848.3 (27033) | 23.50 | 22.59 | 21.60 |
|           |                | 831.5 (26865) | 23.41 | 22.78 | 21.69 |
|           |                | 814.7 (26697) | 23.36 | 22.86 | 21.75 |
|           | 6RB (0)        | 848.3 (27033) | 22.74 | 21.77 | 20.62 |
|           |                | 831.5 (26865) | 22.62 | 21.51 | 20.45 |
|           |                | 814.7 (26697) | 22.74 | 21.70 | 20.65 |

|      |                 |               |       |       |       |
|------|-----------------|---------------|-------|-------|-------|
| 3MHz | 1RB-High (14)   | 847.5 (27025) | 23.41 | 22.66 | 21.58 |
|      |                 | 831.5 (26865) | 23.46 | 22.82 | 21.45 |
|      |                 | 815.5 (26705) | 23.58 | 22.84 | 21.44 |
|      | 1RB-Middle (7)  | 847.5 (27025) | 23.59 | 22.94 | 21.87 |
|      |                 | 831.5 (26865) | 23.40 | 22.84 | 21.68 |
|      |                 | 815.5 (26705) | 23.68 | 22.83 | 21.72 |
|      | 1RB-Low (0)     | 847.5 (27025) | 23.44 | 22.63 | 21.62 |
|      |                 | 831.5 (26865) | 23.56 | 22.79 | 21.82 |
|      |                 | 815.5 (26705) | 23.46 | 22.77 | 21.69 |
|      | 8RB-High (7)    | 847.5 (27025) | 22.79 | 21.73 | 20.68 |
|      |                 | 831.5 (26865) | 22.54 | 21.40 | 20.67 |
|      |                 | 815.5 (26705) | 22.69 | 21.59 | 20.48 |
|      | 8RB-Middle (4)  | 847.5 (27025) | 22.74 | 21.57 | 20.56 |
|      |                 | 831.5 (26865) | 22.80 | 21.69 | 20.73 |
|      |                 | 815.5 (26705) | 22.82 | 21.54 | 20.70 |
|      | 8RB-Low (0)     | 847.5 (27025) | 22.77 | 21.74 | 20.79 |
|      |                 | 831.5 (26865) | 22.68 | 21.57 | 20.74 |
|      |                 | 815.5 (26705) | 22.63 | 21.55 | 20.55 |
|      | 15RB (0)        | 847.5 (27025) | 22.70 | 21.66 | 20.57 |
|      |                 | 831.5 (26865) | 22.57 | 21.54 | 20.48 |
|      |                 | 815.5 (26705) | 22.70 | 21.50 | 20.58 |
| 5MHz | 1RB-High (24)   | 846.5 (27015) | 23.61 | 22.69 | 21.73 |
|      |                 | 831.5 (26865) | 23.48 | 22.77 | 21.68 |
|      |                 | 816.5 (26715) | 23.30 | 22.79 | 21.64 |
|      | 1RB-Middle (12) | 846.5 (27015) | 23.58 | 22.75 | 21.59 |
|      |                 | 831.5 (26865) | 23.41 | 22.66 | 21.85 |
|      |                 | 816.5 (26715) | 23.65 | 22.89 | 21.85 |
|      | 1RB-Low (0)     | 846.5 (27015) | 23.39 | 22.75 | 21.71 |
|      |                 | 831.5 (26865) | 23.45 | 22.79 | 21.59 |
|      |                 | 816.5 (26715) | 23.57 | 22.70 | 21.77 |
|      | 12RB-High (13)  | 846.5 (27015) | 22.78 | 21.49 | 20.64 |
|      |                 | 831.5 (26865) | 22.77 | 21.48 | 20.64 |
|      |                 | 816.5 (26715) | 22.50 | 21.72 | 20.55 |
|      | 12RB-Middle (6) | 846.5 (27015) | 22.86 | 21.81 | 20.80 |
|      |                 | 831.5 (26865) | 22.81 | 21.58 | 20.50 |
|      |                 | 816.5 (26715) | 22.57 | 21.64 | 20.56 |
|      | 12RB-Low (0)    | 846.5 (27015) | 22.77 | 21.72 | 20.83 |
|      |                 | 831.5 (26865) | 22.58 | 21.55 | 20.79 |
|      |                 | 816.5 (26715) | 22.54 | 21.47 | 20.57 |
|      | 25RB (0)        | 846.5 (27015) | 22.63 | 21.66 | 20.57 |
|      |                 | 831.5 (26865) | 22.70 | 21.63 | 20.54 |
|      |                 | 816.5 (26715) | 22.55 | 21.66 | 20.53 |

|       |                  |               |       |       |       |
|-------|------------------|---------------|-------|-------|-------|
| 10MHz | 1RB-High (49)    | 844 (26990)   | 23.46 | 22.71 | 21.69 |
|       |                  | 831.5 (26865) | 23.51 | 22.82 | 21.62 |
|       |                  | 820 (26750)   | 23.47 | 22.82 | 21.46 |
|       | 1RB-Middle (24)  | 844 (26990)   | 23.56 | 22.90 | 21.57 |
|       |                  | 831.5 (26865) | 23.45 | 22.76 | 21.77 |
|       |                  | 820 (26750)   | 23.72 | 22.87 | 21.84 |
|       | 1RB-Low (0)      | 844 (26990)   | 23.57 | 22.74 | 21.44 |
|       |                  | 831.5 (26865) | 23.53 | 22.68 | 21.81 |
|       |                  | 820 (26750)   | 23.59 | 22.64 | 21.65 |
|       | 25RB-High (25)   | 844 (26990)   | 22.81 | 21.49 | 20.58 |
|       |                  | 831.5 (26865) | 22.66 | 21.41 | 20.67 |
|       |                  | 820 (26750)   | 22.60 | 21.58 | 20.63 |
|       | 25RB-Middle (12) | 844 (26990)   | 22.83 | 21.82 | 20.79 |
|       |                  | 831.5 (26865) | 22.61 | 21.61 | 20.53 |
|       |                  | 820 (26750)   | 22.58 | 21.76 | 20.62 |
|       | 25RB-Low (0)     | 844 (26990)   | 22.63 | 21.69 | 20.82 |
|       |                  | 831.5 (26865) | 22.67 | 21.65 | 20.79 |
|       |                  | 820 (26750)   | 22.56 | 21.54 | 20.38 |
|       | 50RB (0)         | 844 (26990)   | 22.76 | 21.83 | 20.66 |
|       |                  | 831.5 (26865) | 22.56 | 21.60 | 20.60 |
|       |                  | 820 (26750)   | 22.65 | 21.61 | 20.69 |
| 15MHz | 1RB-High (74)    | 841.5 (26965) | 23.53 | 22.78 | 21.67 |
|       |                  | 831.5 (26865) | 23.50 | 22.80 | 21.64 |
|       |                  | 822.5 (26775) | 23.50 | 22.79 | 21.62 |
|       | 1RB-Middle (37)  | 841.5 (26965) | 23.65 | 22.84 | 21.77 |
|       |                  | 831.5 (26865) | 23.59 | 22.86 | 21.76 |
|       |                  | 822.5 (26775) | 23.67 | 22.89 | 21.82 |
|       | 1RB-Low (0)      | 841.5 (26965) | 23.48 | 22.78 | 21.64 |
|       |                  | 831.5 (26865) | 23.56 | 22.74 | 21.73 |
|       |                  | 822.5 (26775) | 23.55 | 22.82 | 21.74 |
|       | 36RB-High (38)   | 841.5 (26965) | 22.77 | 21.69 | 20.69 |
|       |                  | 831.5 (26865) | 22.71 | 21.60 | 20.66 |
|       |                  | 822.5 (26775) | 22.68 | 21.62 | 20.63 |
|       | 36RB-Middle (19) | 841.5 (26965) | 22.77 | 21.72 | 20.71 |
|       |                  | 831.5 (26865) | 22.75 | 21.66 | 20.70 |
|       |                  | 822.5 (26775) | 22.73 | 21.68 | 20.68 |
|       | 36RB-Low (0)     | 841.5 (26965) | 22.83 | 21.80 | 20.78 |
|       |                  | 831.5 (26865) | 22.74 | 21.69 | 20.72 |
|       |                  | 822.5 (26775) | 22.86 | 21.57 | 20.58 |
|       | 75RB (0)         | 841.5 (26965) | 22.82 | 21.78 | 20.75 |
|       |                  | 831.5 (26865) | 22.72 | 21.69 | 20.64 |
|       |                  | 822.5 (26775) | 22.65 | 21.62 | 20.60 |

## LTE B26 – DSI1/DSI3

| LTE B26   |                |               |       |       |       |
|-----------|----------------|---------------|-------|-------|-------|
| BANDWIDTH | Number of RBs  | Frequency     | QPSK  | 16QAM | 64QAM |
| 1.4MHz    | 1RB-High (5)   | 848.3 (27033) | 16.35 | 16.75 | 16.65 |
|           |                | 831.5 (26865) | 16.60 | 16.87 | 16.69 |
|           |                | 814.7 (26697) | 16.32 | 16.65 | 16.60 |
|           | 1RB-Middle (3) | 848.3 (27033) | 16.78 | 17.01 | 16.77 |
|           |                | 831.5 (26865) | 16.48 | 19.84 | 16.58 |
|           |                | 814.7 (26697) | 16.51 | 16.95 | 16.81 |
|           | 1RB-Low (0)    | 848.3 (27033) | 16.38 | 16.80 | 16.61 |
|           |                | 831.5 (26865) | 16.42 | 16.66 | 16.77 |
|           |                | 814.7 (26697) | 16.66 | 16.92 | 16.67 |
|           | 3RB-High (3)   | 848.3 (27033) | 16.59 | 16.67 | 16.56 |
|           |                | 831.5 (26865) | 16.61 | 16.60 | 16.76 |
|           |                | 814.7 (26697) | 16.67 | 16.51 | 16.57 |
|           | 3RB-Middle (1) | 848.3 (27033) | 16.77 | 16.80 | 16.66 |
|           |                | 831.5 (26865) | 16.53 | 16.75 | 16.57 |
|           |                | 814.7 (26697) | 16.75 | 16.60 | 16.67 |
|           | 3RB-Low (0)    | 848.3 (27033) | 16.62 | 16.64 | 16.79 |
|           |                | 831.5 (26865) | 16.82 | 16.57 | 16.78 |
|           |                | 814.7 (26697) | 16.69 | 16.69 | 16.64 |
|           | 6RB (0)        | 848.3 (27033) | 16.67 | 16.85 | 16.83 |
|           |                | 831.5 (26865) | 16.67 | 16.54 | 16.54 |
|           |                | 814.7 (26697) | 16.57 | 16.47 | 16.52 |
| 3MHz      | 1RB-High (14)  | 847.5 (27025) | 16.48 | 16.86 | 16.82 |
|           |                | 831.5 (26865) | 16.56 | 16.72 | 16.71 |
|           |                | 815.5 (26705) | 16.47 | 16.56 | 16.81 |
|           | 1RB-Middle (7) | 847.5 (27025) | 16.64 | 17.06 | 16.91 |
|           |                | 831.5 (26865) | 16.53 | 19.77 | 16.78 |
|           |                | 815.5 (26705) | 16.63 | 16.80 | 16.78 |
|           | 1RB-Low (0)    | 847.5 (27025) | 16.41 | 16.94 | 16.84 |
|           |                | 831.5 (26865) | 16.59 | 16.78 | 16.59 |
|           |                | 815.5 (26705) | 16.67 | 16.93 | 16.81 |
|           | 8RB-High (7)   | 847.5 (27025) | 16.76 | 16.53 | 16.63 |
|           |                | 831.5 (26865) | 16.74 | 16.68 | 16.71 |
|           |                | 815.5 (26705) | 16.45 | 16.61 | 16.71 |
|           | 8RB-Middle (4) | 847.5 (27025) | 16.52 | 16.63 | 16.68 |
|           |                | 831.5 (26865) | 16.80 | 16.64 | 16.82 |
|           |                | 815.5 (26705) | 16.62 | 16.61 | 16.65 |
|           | 8RB-Low (0)    | 847.5 (27025) | 16.90 | 16.81 | 16.72 |
|           |                | 831.5 (26865) | 16.58 | 16.71 | 16.80 |

|       |                  |               |       |       |       |
|-------|------------------|---------------|-------|-------|-------|
|       | 15RB (0)         | 815.5 (26705) | 16.60 | 16.62 | 16.71 |
|       |                  | 847.5 (27025) | 16.72 | 16.86 | 16.68 |
|       |                  | 831.5 (26865) | 16.55 | 16.66 | 16.77 |
|       |                  | 815.5 (26705) | 16.43 | 16.61 | 16.64 |
| 5MHz  | 1RB-High (24)    | 846.5 (27015) | 16.36 | 16.73 | 16.73 |
|       |                  | 831.5 (26865) | 16.54 | 16.73 | 16.75 |
|       |                  | 816.5 (26715) | 16.51 | 16.64 | 16.78 |
|       | 1RB-Middle (12)  | 846.5 (27015) | 16.66 | 16.99 | 16.87 |
|       |                  | 831.5 (26865) | 16.42 | 20.03 | 16.76 |
|       |                  | 816.5 (26715) | 16.69 | 16.90 | 16.96 |
|       | 1RB-Low (0)      | 846.5 (27015) | 16.43 | 16.83 | 16.72 |
|       |                  | 831.5 (26865) | 16.37 | 16.77 | 16.77 |
|       |                  | 816.5 (26715) | 16.55 | 16.87 | 16.81 |
|       | 12RB-High (13)   | 846.5 (27015) | 16.57 | 16.50 | 16.59 |
|       |                  | 831.5 (26865) | 16.50 | 16.48 | 16.64 |
|       |                  | 816.5 (26715) | 16.67 | 16.47 | 16.70 |
|       | 12RB-Middle (6)  | 846.5 (27015) | 16.67 | 16.74 | 16.57 |
|       |                  | 831.5 (26865) | 16.65 | 16.67 | 16.76 |
|       |                  | 816.5 (26715) | 16.77 | 16.60 | 16.64 |
|       | 12RB-Low (0)     | 846.5 (27015) | 16.75 | 16.84 | 16.69 |
|       |                  | 831.5 (26865) | 16.62 | 16.55 | 16.58 |
|       |                  | 816.5 (26715) | 16.60 | 16.62 | 16.67 |
|       | 25RB (0)         | 846.5 (27015) | 16.84 | 16.63 | 16.86 |
|       |                  | 831.5 (26865) | 16.68 | 16.50 | 16.63 |
|       |                  | 816.5 (26715) | 16.45 | 16.50 | 16.50 |
| 10MHz | 1RB-High (49)    | 844 (26990)   | 16.58 | 16.83 | 16.82 |
|       |                  | 831.5 (26865) | 16.50 | 16.87 | 16.61 |
|       |                  | 820 (26750)   | 16.35 | 16.73 | 16.82 |
|       | 1RB-Middle (24)  | 844 (26990)   | 16.53 | 16.80 | 16.70 |
|       |                  | 831.5 (26865) | 16.71 | 19.95 | 16.64 |
|       |                  | 820 (26750)   | 16.49 | 16.75 | 16.74 |
|       | 1RB-Low (0)      | 844 (26990)   | 16.60 | 16.89 | 16.76 |
|       |                  | 831.5 (26865) | 16.63 | 16.73 | 16.68 |
|       |                  | 820 (26750)   | 16.41 | 16.66 | 16.65 |
|       | 25RB-High (25)   | 844 (26990)   | 16.69 | 16.73 | 16.55 |
|       |                  | 831.5 (26865) | 16.64 | 16.52 | 16.74 |
|       |                  | 820 (26750)   | 16.60 | 16.58 | 16.49 |
|       | 25RB-Middle (12) | 844 (26990)   | 16.67 | 16.74 | 16.82 |
|       |                  | 831.5 (26865) | 16.68 | 16.55 | 16.70 |
|       |                  | 820 (26750)   | 16.54 | 16.65 | 16.80 |
|       | 25RB-Low (0)     | 844 (26990)   | 16.72 | 16.72 | 16.72 |
|       |                  | 831.5 (26865) | 16.58 | 16.62 | 16.71 |

|       |                  |               |       |       |       |
|-------|------------------|---------------|-------|-------|-------|
|       |                  | 820 (26750)   | 16.49 | 16.66 | 16.50 |
|       | 50RB (0)         | 844 (26990)   | 16.80 | 16.81 | 16.76 |
|       |                  | 831.5 (26865) | 16.48 | 16.66 | 16.53 |
|       |                  | 820 (26750)   | 16.46 | 16.59 | 16.58 |
| 15MHz | 1RB-High (74)    | 841.5 (26965) | 16.54 | 16.80 | 16.76 |
|       |                  | 831.5 (26865) | 16.52 | 16.81 | 16.71 |
|       |                  | 822.5 (26775) | 16.51 | 16.75 | 16.73 |
|       | 1RB-Middle (37)  | 841.5 (26965) | 16.68 | 16.97 | 16.90 |
|       |                  | 831.5 (26865) | 16.61 | 19.94 | 16.77 |
|       |                  | 822.5 (26775) | 16.70 | 16.92 | 16.88 |
|       | 1RB-Low (0)      | 841.5 (26965) | 16.56 | 16.87 | 16.75 |
|       |                  | 831.5 (26865) | 16.55 | 16.86 | 16.71 |
|       |                  | 822.5 (26775) | 16.58 | 16.84 | 16.80 |
|       | 36RB-High (38)   | 841.5 (26965) | 16.72 | 16.70 | 16.75 |
|       |                  | 831.5 (26865) | 16.68 | 16.66 | 16.67 |
|       |                  | 822.5 (26775) | 16.65 | 16.63 | 16.66 |
|       | 36RB-Middle (19) | 841.5 (26965) | 16.72 | 16.73 | 16.75 |
|       |                  | 831.5 (26865) | 16.72 | 16.70 | 16.72 |
|       |                  | 822.5 (26775) | 16.71 | 16.69 | 16.72 |
|       | 36RB-Low (0)     | 841.5 (26965) | 16.72 | 16.79 | 16.81 |
|       |                  | 831.5 (26865) | 16.74 | 16.71 | 16.73 |
|       |                  | 822.5 (26775) | 16.75 | 16.64 | 16.64 |
|       | 75RB (0)         | 841.5 (26965) | 16.79 | 16.82 | 16.76 |
|       |                  | 831.5 (26865) | 16.68 | 16.68 | 16.68 |
|       |                  | 822.5 (26775) | 16.61 | 16.65 | 16.62 |

#### LTE B41 - DSI0/DSI2

| LTE B41   |                 |                |       |       |       |
|-----------|-----------------|----------------|-------|-------|-------|
| BANDWIDTH | Number of RBs   | Frequency      | QPSK  | 16QAM | 64QAM |
| 5MHz      | 1RB-High (24)   | 2687.5 (41565) | 23.10 | 22.16 | 20.78 |
|           |                 | 2640.3(41093)  | 23.16 | 22.23 | 20.87 |
|           |                 | 2593 (40620)   | 23.06 | 22.16 | 20.81 |
|           |                 | 2545.8(40148)  | 23.10 | 22.20 | 20.83 |
|           |                 | 2498.5 (39675) | 22.91 | 21.99 | 20.61 |
|           | 1RB-Middle (12) | 2687.5 (41565) | 23.29 | 22.36 | 20.97 |
|           |                 | 2640.3(41093)  | 23.30 | 22.40 | 21.10 |
|           |                 | 2593 (40620)   | 23.25 | 22.39 | 21.00 |
|           |                 | 2545.8(40148)  | 23.26 | 22.48 | 21.06 |
|           |                 | 2498.5 (39675) | 23.10 | 22.19 | 20.85 |
|           | 1RB-Low (0)     | 2687.5 (41565) | 23.12 | 22.23 | 20.81 |
|           |                 | 2640.3(41093)  | 23.20 | 22.25 | 20.87 |

|       |                 |                |       |       |       |
|-------|-----------------|----------------|-------|-------|-------|
|       |                 | 2593 (40620)   | 23.10 | 22.20 | 20.82 |
|       |                 | 2545.8(40148)  | 23.14 | 22.24 | 20.89 |
|       |                 | 2498.5 (39675) | 22.87 | 22.01 | 20.60 |
|       | 12RB-High (13)  | 2687.5 (41565) | 22.20 | 21.15 | 20.24 |
|       |                 | 2640.3(41093)  | 22.27 | 21.21 | 20.32 |
|       |                 | 2593 (40620)   | 22.18 | 21.15 | 20.27 |
|       |                 | 2545.8(40148)  | 22.20 | 21.16 | 20.30 |
|       |                 | 2498.5 (39675) | 22.05 | 20.98 | 20.08 |
|       | 12RB-Middle (6) | 2687.5 (41565) | 22.31 | 21.24 | 20.28 |
|       |                 | 2640.3(41093)  | 22.33 | 21.24 | 20.30 |
|       |                 | 2593 (40620)   | 22.26 | 21.21 | 20.28 |
|       |                 | 2545.8(40148)  | 22.30 | 21.27 | 20.34 |
|       |                 | 2498.5 (39675) | 22.09 | 21.02 | 20.13 |
|       | 12RB-Low (0)    | 2687.5 (41565) | 22.26 | 21.17 | 20.28 |
|       |                 | 2640.3(41093)  | 22.28 | 21.20 | 20.31 |
|       |                 | 2593 (40620)   | 22.22 | 21.18 | 20.27 |
|       |                 | 2545.8(40148)  | 22.28 | 21.23 | 20.30 |
|       |                 | 2498.5 (39675) | 22.08 | 20.97 | 20.08 |
|       | 25RB (0)        | 2687.5 (41565) | 22.21 | 21.22 | 20.26 |
|       |                 | 2640.3(41093)  | 22.29 | 21.29 | 20.35 |
|       |                 | 2593 (40620)   | 22.23 | 21.25 | 20.29 |
|       |                 | 2545.8(40148)  | 22.24 | 21.31 | 20.35 |
|       |                 | 2498.5 (39675) | 22.06 | 21.06 | 20.13 |
| 10MHz | 1RB-High (49)   | 2685 (41540)   | 23.16 | 22.23 | 20.85 |
|       |                 | 2639(41080)    | 23.18 | 22.26 | 20.90 |
|       |                 | 2593 (40620)   | 23.14 | 22.22 | 20.85 |
|       |                 | 2547(40160)    | 23.21 | 22.29 | 20.89 |
|       |                 | 2501 (39700)   | 22.99 | 22.09 | 20.77 |
|       | 1RB-Middle (24) | 2685 (41540)   | 23.31 | 22.36 | 21.00 |
|       |                 | 2639(41080)    | 23.34 | 22.39 | 21.00 |
|       |                 | 2593 (40620)   | 23.30 | 22.33 | 20.98 |
|       |                 | 2547(40160)    | 23.32 | 22.38 | 21.01 |
|       |                 | 2501 (39700)   | 23.08 | 22.11 | 20.73 |
|       | 1RB-Low (0)     | 2685 (41540)   | 23.22 | 22.30 | 20.94 |
|       |                 | 2639(41080)    | 23.29 | 22.36 | 20.98 |
|       |                 | 2593 (40620)   | 23.21 | 22.26 | 20.92 |
|       |                 | 2547(40160)    | 23.27 | 22.32 | 20.98 |
|       |                 | 2501 (39700)   | 22.95 | 22.02 | 20.67 |
|       | 25RB-High (25)  | 2685 (41540)   | 22.19 | 21.20 | 20.26 |
|       |                 | 2639(41080)    | 22.29 | 21.29 | 20.35 |
|       |                 | 2593 (40620)   | 22.22 | 21.23 | 20.31 |
|       |                 | 2547(40160)    | 22.27 | 21.26 | 20.35 |

|       |                  |                  |                |       |       |       |
|-------|------------------|------------------|----------------|-------|-------|-------|
|       |                  |                  | 2501 (39700)   | 22.05 | 21.11 | 20.12 |
|       |                  | 25RB-Middle (12) | 2685 (41540)   | 22.30 | 21.26 | 20.29 |
|       |                  |                  | 2639(41080)    | 22.28 | 21.29 | 20.32 |
|       |                  |                  | 2593 (40620)   | 22.25 | 21.27 | 20.32 |
|       |                  |                  | 2547(40160)    | 22.24 | 21.33 | 20.38 |
|       |                  |                  | 2501 (39700)   | 22.06 | 21.11 | 20.17 |
|       |                  | 25RB-Low (0)     | 2685 (41540)   | 22.27 | 21.27 | 20.34 |
|       |                  |                  | 2639(41080)    | 22.31 | 21.30 | 20.36 |
|       |                  |                  | 2593 (40620)   | 22.28 | 21.24 | 20.33 |
|       |                  |                  | 2547(40160)    | 22.31 | 21.31 | 20.42 |
|       |                  |                  | 2501 (39700)   | 22.09 | 21.12 | 20.15 |
|       | 50RB (0)         |                  | 2685 (41540)   | 22.21 | 21.25 | 20.20 |
|       |                  |                  | 2639(41080)    | 22.29 | 21.29 | 20.31 |
|       |                  |                  | 2593 (40620)   | 22.24 | 21.24 | 20.26 |
|       |                  |                  | 2547(40160)    | 22.29 | 21.33 | 20.33 |
|       |                  |                  | 2501 (39700)   | 22.07 | 21.15 | 20.09 |
| 15MHz | 1RB-High (74)    |                  | 2682.5 (41515) | 23.06 | 22.17 | 20.77 |
|       |                  |                  | 2637.8(41068)  | 23.14 | 22.22 | 20.83 |
|       |                  |                  | 2593 (40620)   | 23.06 | 22.13 | 20.77 |
|       |                  |                  | 2548.3(40173)  | 23.10 | 22.16 | 20.79 |
|       |                  |                  | 2503.5 (39725) | 22.94 | 22.03 | 20.69 |
|       | 1RB-Middle (37)  |                  | 2682.5 (41515) | 23.21 | 22.28 | 20.85 |
|       |                  |                  | 2637.8(41068)  | 23.25 | 22.32 | 20.94 |
|       |                  |                  | 2593 (40620)   | 23.19 | 22.25 | 20.89 |
|       |                  |                  | 2548.3(40173)  | 23.25 | 22.31 | 20.93 |
|       |                  |                  | 2503.5 (39725) | 22.97 | 22.08 | 20.70 |
|       | 1RB-Low (0)      |                  | 2682.5 (41515) | 23.20 | 22.25 | 20.87 |
|       |                  |                  | 2637.8(41068)  | 23.22 | 22.32 | 20.92 |
|       |                  |                  | 2593 (40620)   | 23.17 | 22.23 | 20.89 |
|       |                  |                  | 2548.3(40173)  | 23.15 | 22.28 | 20.88 |
|       |                  |                  | 2503.5 (39725) | 22.89 | 22.00 | 20.63 |
|       | 36RB-High (38)   |                  | 2682.5 (41515) | 22.20 | 21.14 | 20.19 |
|       |                  |                  | 2637.8(41068)  | 22.31 | 21.26 | 20.27 |
|       |                  |                  | 2593 (40620)   | 22.16 | 21.18 | 20.21 |
|       |                  |                  | 2548.3(40173)  | 22.25 | 21.24 | 20.27 |
|       |                  |                  | 2503.5 (39725) | 22.13 | 21.08 | 20.10 |
|       | 36RB-Middle (19) |                  | 2682.5 (41515) | 22.26 | 21.17 | 20.24 |
|       |                  |                  | 2637.8(41068)  | 22.33 | 21.25 | 20.27 |
|       |                  |                  | 2593 (40620)   | 22.22 | 21.19 | 20.26 |
|       |                  |                  | 2548.3(40173)  | 22.25 | 21.25 | 20.27 |
|       |                  |                  | 2503.5 (39725) | 22.07 | 21.05 | 20.07 |
|       | 36RB-Low (0)     |                  | 2682.5 (41515) | 22.31 | 21.25 | 20.29 |



|       |                  |                |       |       |       |
|-------|------------------|----------------|-------|-------|-------|
| 20MHz |                  | 2637.8(41068)  | 22.35 | 21.28 | 20.30 |
|       |                  | 2593 (40620)   | 22.25 | 21.17 | 20.25 |
|       |                  | 2548.3(40173)  | 22.30 | 21.27 | 20.29 |
|       |                  | 2503.5 (39725) | 22.07 | 21.06 | 20.03 |
|       |                  | 2682.5 (41515) | 22.22 | 21.22 | 20.22 |
|       | 75RB (0)         | 2637.8(41068)  | 22.28 | 21.29 | 20.30 |
|       |                  | 2593 (40620)   | 22.23 | 21.27 | 20.25 |
|       |                  | 2548.3(40173)  | 22.26 | 21.29 | 20.30 |
|       |                  | 2503.5 (39725) | 22.08 | 21.11 | 20.09 |
|       |                  | 2680 (41490)   | 22.92 | 21.97 | 20.59 |
|       | 1RB-High (99)    | 2636.5(41055)  | 23.00 | 22.05 | 20.64 |
|       |                  | 2593 (40620)   | 22.86 | 21.97 | 20.58 |
|       |                  | 2549.5(40185)  | 22.87 | 22.06 | 20.60 |
|       |                  | 2506 (39750)   | 22.78 | 21.95 | 20.56 |
|       |                  | 2680 (41490)   | 23.33 | 22.33 | 21.00 |
|       | 1RB-Middle (50)  | 2636.5(41055)  | 23.35 | 22.38 | 21.04 |
|       |                  | 2593 (40620)   | 23.24 | 22.31 | 20.98 |
|       |                  | 2549.5(40185)  | 23.31 | 22.39 | 21.02 |
|       |                  | 2506 (39750)   | 23.09 | 22.20 | 20.86 |
|       |                  | 2680 (41490)   | 23.06 | 22.15 | 20.73 |
|       | 1RB-Low (0)      | 2636.5(41055)  | 23.15 | 22.21 | 20.79 |
|       |                  | 2593 (40620)   | 23.03 | 22.09 | 20.71 |
|       |                  | 2549.5(40185)  | 23.00 | 22.11 | 20.74 |
|       |                  | 2506 (39750)   | 22.76 | 21.85 | 20.49 |
|       |                  | 2680 (41490)   | 22.08 | 21.11 | 20.11 |
|       | 50RB-High (50)   | 2636.5(41055)  | 22.21 | 21.22 | 20.23 |
|       |                  | 2593 (40620)   | 22.17 | 21.25 | 20.19 |
|       |                  | 2549.5(40185)  | 22.23 | 21.31 | 20.24 |
|       |                  | 2506 (39750)   | 22.11 | 21.21 | 20.15 |
|       |                  | 2680 (41490)   | 22.20 | 21.19 | 20.23 |
|       | 50RB-Middle (25) | 2636.5(41055)  | 22.28 | 21.27 | 20.29 |
|       |                  | 2593 (40620)   | 22.16 | 21.27 | 20.25 |
|       |                  | 2549.5(40185)  | 22.26 | 21.34 | 20.30 |
|       |                  | 2506 (39750)   | 22.02 | 21.15 | 20.10 |
|       |                  | 2680 (41490)   | 22.22 | 21.30 | 20.27 |
|       | 50RB-Low (0)     | 2636.5(41055)  | 22.24 | 21.27 | 20.27 |
|       |                  | 2593 (40620)   | 22.17 | 21.23 | 20.19 |
|       |                  | 2549.5(40185)  | 22.25 | 21.34 | 20.30 |
|       |                  | 2506 (39750)   | 21.99 | 21.10 | 20.07 |
|       |                  | 2680 (41490)   | 22.24 | 21.23 | 20.27 |
|       | 100RB (0)        | 2636.5(41055)  | 22.33 | 21.30 | 20.31 |
|       |                  | 2593 (40620)   | 22.21 | 21.25 | 20.23 |

|  |  |               |       |       |       |
|--|--|---------------|-------|-------|-------|
|  |  | 2549.5(40185) | 22.28 | 21.34 | 20.25 |
|  |  | 2506 (39750)  | 22.11 | 21.14 | 20.15 |

# LTE B41 – DSI1

| LTE B41   |                 |                |       |       |       |
|-----------|-----------------|----------------|-------|-------|-------|
| BANDWIDTH | Number of RBs   | Frequency      | QPSK  | 16QAM | 64QAM |
| 5MHz      | 1RB-High (24)   | 2687.5 (41565) | 14.05 | 13.99 | 13.58 |
|           |                 | 2640.3(41093)  | 14.01 | 14.25 | 13.87 |
|           |                 | 2593 (40620)   | 13.99 | 13.98 | 13.73 |
|           |                 | 2545.8(40148)  | 13.94 | 14.18 | 13.83 |
|           |                 | 2498.5 (39675) | 14.10 | 14.02 | 13.63 |
|           | 1RB-Middle (12) | 2687.5 (41565) | 14.44 | 14.57 | 13.99 |
|           |                 | 2640.3(41093)  | 14.45 | 14.63 | 14.10 |
|           |                 | 2593 (40620)   | 14.39 | 14.40 | 13.87 |
|           |                 | 2545.8(40148)  | 14.28 | 14.35 | 13.95 |
|           |                 | 2498.5 (39675) | 14.35 | 14.19 | 13.92 |
|           | 1RB-Low (0)     | 2687.5 (41565) | 14.21 | 14.27 | 13.79 |
|           |                 | 2640.3(41093)  | 14.23 | 14.28 | 13.91 |
|           |                 | 2593 (40620)   | 14.03 | 14.25 | 13.90 |
|           |                 | 2545.8(40148)  | 14.21 | 14.15 | 13.89 |
|           |                 | 2498.5 (39675) | 13.91 | 13.99 | 13.65 |
|           | 12RB-High (13)  | 2687.5 (41565) | 14.08 | 14.33 | 14.26 |
|           |                 | 2640.3(41093)  | 14.34 | 14.50 | 14.38 |
|           |                 | 2593 (40620)   | 14.09 | 14.40 | 14.28 |
|           |                 | 2545.8(40148)  | 14.10 | 14.38 | 14.31 |
|           |                 | 2498.5 (39675) | 13.99 | 14.15 | 14.08 |
|           | 12RB-Middle (6) | 2687.5 (41565) | 14.17 | 14.28 | 14.27 |
|           |                 | 2640.3(41093)  | 14.39 | 14.48 | 14.32 |
|           |                 | 2593 (40620)   | 14.15 | 14.17 | 14.36 |
|           |                 | 2545.8(40148)  | 14.17 | 14.17 | 14.09 |
|           |                 | 2498.5 (39675) | 14.13 | 13.92 | 13.95 |
|           | 12RB-Low (0)    | 2687.5 (41565) | 14.27 | 14.42 | 14.45 |
|           |                 | 2640.3(41093)  | 14.22 | 14.55 | 14.34 |
|           |                 | 2593 (40620)   | 14.17 | 14.24 | 14.23 |
|           |                 | 2545.8(40148)  | 14.28 | 14.35 | 14.35 |
|           |                 | 2498.5 (39675) | 14.09 | 13.99 | 14.08 |
|           | 25RB (0)        | 2687.5 (41565) | 14.27 | 14.44 | 14.49 |
|           |                 | 2640.3(41093)  | 14.30 | 14.36 | 14.31 |
|           |                 | 2593 (40620)   | 14.35 | 14.21 | 14.19 |
|           |                 | 2545.8(40148)  | 14.26 | 14.34 | 14.28 |
|           |                 | 2498.5 (39675) | 14.22 | 14.16 | 14.16 |

|       |                  |                |       |       |       |
|-------|------------------|----------------|-------|-------|-------|
| 10MHz | 1RB-High (49)    | 2685 (41540)   | 14.16 | 13.99 | 13.69 |
|       |                  | 2639(41080)    | 14.10 | 14.14 | 13.67 |
|       |                  | 2593 (40620)   | 14.11 | 14.12 | 13.70 |
|       |                  | 2547(40160)    | 14.02 | 14.20 | 13.81 |
|       |                  | 2501 (39700)   | 13.91 | 13.95 | 13.55 |
|       | 1RB-Middle (24)  | 2685 (41540)   | 14.36 | 14.43 | 14.01 |
|       |                  | 2639(41080)    | 14.30 | 14.59 | 14.15 |
|       |                  | 2593 (40620)   | 14.24 | 14.41 | 13.84 |
|       |                  | 2547(40160)    | 14.50 | 14.45 | 14.18 |
|       |                  | 2501 (39700)   | 14.31 | 14.19 | 13.86 |
|       | 1RB-Low (0)      | 2685 (41540)   | 14.24 | 14.27 | 13.95 |
|       |                  | 2639(41080)    | 14.11 | 14.20 | 13.88 |
|       |                  | 2593 (40620)   | 14.07 | 14.17 | 13.80 |
|       |                  | 2547(40160)    | 14.01 | 14.18 | 13.82 |
|       |                  | 2501 (39700)   | 13.90 | 14.06 | 13.66 |
|       | 25RB-High (25)   | 2685 (41540)   | 14.18 | 14.42 | 14.28 |
|       |                  | 2639(41080)    | 14.12 | 14.43 | 14.49 |
|       |                  | 2593 (40620)   | 14.19 | 14.31 | 14.19 |
|       |                  | 2547(40160)    | 14.21 | 14.29 | 14.16 |
|       |                  | 2501 (39700)   | 14.05 | 14.19 | 14.07 |
|       | 25RB-Middle (12) | 2685 (41540)   | 14.23 | 14.34 | 14.38 |
|       |                  | 2639(41080)    | 14.21 | 14.47 | 14.36 |
|       |                  | 2593 (40620)   | 14.24 | 14.14 | 14.17 |
|       |                  | 2547(40160)    | 14.11 | 14.15 | 14.27 |
|       |                  | 2501 (39700)   | 13.95 | 13.92 | 14.03 |
|       | 25RB-Low (0)     | 2685 (41540)   | 14.16 | 14.56 | 14.34 |
|       |                  | 2639(41080)    | 14.37 | 14.40 | 14.50 |
|       |                  | 2593 (40620)   | 14.17 | 14.37 | 14.18 |
|       |                  | 2547(40160)    | 14.27 | 14.23 | 14.33 |
|       |                  | 2501 (39700)   | 14.01 | 14.09 | 14.08 |
|       | 50RB (0)         | 2685 (41540)   | 14.22 | 14.45 | 14.40 |
|       |                  | 2639(41080)    | 14.32 | 14.52 | 14.40 |
|       |                  | 2593 (40620)   | 14.22 | 14.23 | 14.17 |
|       |                  | 2547(40160)    | 14.32 | 14.28 | 14.34 |
|       |                  | 2501 (39700)   | 14.21 | 14.12 | 13.94 |
| 15MHz | 1RB-High (74)    | 2682.5 (41515) | 14.07 | 13.94 | 13.54 |
|       |                  | 2637.8(41068)  | 14.17 | 14.07 | 13.76 |
|       |                  | 2593 (40620)   | 14.00 | 14.04 | 13.56 |
|       |                  | 2548.3(40173)  | 14.04 | 14.15 | 13.73 |
|       |                  | 2503.5 (39725) | 13.97 | 13.99 | 13.72 |
|       | 1RB-Middle (37)  | 2682.5 (41515) | 14.34 | 14.57 | 13.98 |
|       |                  | 2637.8(41068)  | 14.28 | 14.46 | 14.12 |

|       |                  |                |       |       |       |
|-------|------------------|----------------|-------|-------|-------|
|       |                  | 2593 (40620)   | 14.42 | 14.31 | 13.97 |
|       |                  | 2548.3(40173)  | 14.27 | 14.56 | 14.17 |
|       |                  | 2503.5 (39725) | 14.33 | 14.31 | 13.90 |
|       | 1RB-Low (0)      | 2682.5 (41515) | 14.10 | 14.11 | 13.82 |
|       |                  | 2637.8(41068)  | 14.31 | 14.26 | 13.85 |
|       |                  | 2593 (40620)   | 14.06 | 14.13 | 13.74 |
|       |                  | 2548.3(40173)  | 14.24 | 14.28 | 13.85 |
|       |                  | 2503.5 (39725) | 13.98 | 13.95 | 13.56 |
|       | 36RB-High (38)   | 2682.5 (41515) | 14.01 | 14.35 | 14.32 |
|       |                  | 2637.8(41068)  | 14.37 | 14.28 | 14.40 |
|       |                  | 2593 (40620)   | 14.20 | 14.44 | 14.26 |
|       |                  | 2548.3(40173)  | 14.11 | 14.20 | 14.26 |
|       |                  | 2503.5 (39725) | 14.07 | 14.03 | 14.18 |
|       | 36RB-Middle (19) | 2682.5 (41515) | 14.10 | 14.36 | 14.30 |
|       |                  | 2637.8(41068)  | 14.23 | 14.54 | 14.30 |
|       |                  | 2593 (40620)   | 14.07 | 14.30 | 14.15 |
|       |                  | 2548.3(40173)  | 14.22 | 14.23 | 14.07 |
|       |                  | 2503.5 (39725) | 14.07 | 13.97 | 14.14 |
|       | 36RB-Low (0)     | 2682.5 (41515) | 14.30 | 14.55 | 14.42 |
|       |                  | 2637.8(41068)  | 14.25 | 14.42 | 14.45 |
|       |                  | 2593 (40620)   | 14.14 | 14.34 | 14.24 |
|       |                  | 2548.3(40173)  | 14.26 | 14.23 | 14.22 |
|       |                  | 2503.5 (39725) | 14.14 | 14.02 | 13.94 |
|       | 75RB (0)         | 2682.5 (41515) | 14.22 | 14.26 | 14.37 |
|       |                  | 2637.8(41068)  | 14.47 | 14.47 | 14.29 |
|       |                  | 2593 (40620)   | 14.26 | 14.29 | 14.27 |
|       |                  | 2548.3(40173)  | 14.25 | 14.39 | 14.28 |
|       |                  | 2503.5 (39725) | 14.13 | 14.18 | 14.01 |
| 20MHz | 1RB-High (99)    | 2680 (41490)   | 14.07 | 14.06 | 13.59 |
|       |                  | 2636.5(41055)  | 14.11 | 14.19 | 13.77 |
|       |                  | 2593 (40620)   | 14.04 | 14.12 | 13.69 |
|       |                  | 2549.5(40185)  | 14.08 | 14.15 | 13.73 |
|       |                  | 2506 (39750)   | 14.03 | 14.05 | 13.66 |
|       | 1RB-Middle (50)  | 2680 (41490)   | 14.35 | 14.48 | 14.07 |
|       |                  | 2636.5(41055)  | 14.42 | 14.55 | 14.13 |
|       |                  | 2593 (40620)   | 14.33 | 14.39 | 13.97 |
|       |                  | 2549.5(40185)  | 14.41 | 14.46 | 14.08 |
|       |                  | 2506 (39750)   | 14.33 | 14.33 | 13.93 |
|       | 1RB-Low (0)      | 2680 (41490)   | 14.22 | 14.23 | 13.87 |
|       |                  | 2636.5(41055)  | 14.25 | 14.31 | 13.91 |
|       |                  | 2593 (40620)   | 14.14 | 14.23 | 13.85 |
|       |                  | 2549.5(40185)  | 14.15 | 14.25 | 13.81 |

|  |                  |               |       |       |       |
|--|------------------|---------------|-------|-------|-------|
|  | 50RB-High (50)   | 2506 (39750)  | 13.99 | 13.98 | 13.63 |
|  |                  | 2680 (41490)  | 14.16 | 14.36 | 14.32 |
|  |                  | 2636.5(41055) | 14.27 | 14.43 | 14.40 |
|  |                  | 2593 (40620)  | 14.15 | 14.34 | 14.30 |
|  |                  | 2549.5(40185) | 14.14 | 14.29 | 14.27 |
|  | 50RB-Middle (25) | 2506 (39750)  | 14.12 | 14.13 | 14.13 |
|  |                  | 2680 (41490)  | 14.24 | 14.43 | 14.40 |
|  |                  | 2636.5(41055) | 14.29 | 14.45 | 14.44 |
|  |                  | 2593 (40620)  | 14.16 | 14.28 | 14.26 |
|  |                  | 2549.5(40185) | 14.22 | 14.24 | 14.22 |
|  | 50RB-Low (0)     | 2506 (39750)  | 14.07 | 14.07 | 14.07 |
|  |                  | 2680 (41490)  | 14.31 | 14.48 | 14.46 |
|  |                  | 2636.5(41055) | 14.32 | 14.46 | 14.45 |
|  |                  | 2593 (40620)  | 14.18 | 14.31 | 14.28 |
|  |                  | 2549.5(40185) | 14.22 | 14.28 | 14.27 |
|  | 100RB (0)        | 2506 (39750)  | 14.08 | 14.10 | 14.07 |
|  |                  | 2680 (41490)  | 14.34 | 14.39 | 14.40 |
|  |                  | 2636.5(41055) | 14.40 | 14.45 | 14.44 |
|  |                  | 2593 (40620)  | 14.31 | 14.30 | 14.28 |
|  |                  | 2549.5(40185) | 14.29 | 14.33 | 14.29 |
|  |                  | 2506 (39750)  | 14.18 | 14.10 | 14.08 |

#### LTE B41 – DSI3

| LTE B41   |                 |                |       |       |       |
|-----------|-----------------|----------------|-------|-------|-------|
| BANDWIDTH | Number of RBs   | Frequency      | QPSK  | 16QAM | 64QAM |
| 5MHz      | 1RB-High (24)   | 2687.5 (41565) | 11.52 | 11.52 | 10.99 |
|           |                 | 2640.3(41093)  | 11.56 | 11.65 | 11.09 |
|           |                 | 2593 (40620)   | 11.65 | 11.57 | 11.16 |
|           |                 | 2545.8(40148)  | 11.62 | 11.55 | 11.10 |
|           |                 | 2498.5 (39675) | 11.47 | 11.63 | 11.00 |
|           | 1RB-Middle (12) | 2687.5 (41565) | 11.81 | 11.80 | 11.64 |
|           |                 | 2640.3(41093)  | 11.80 | 12.02 | 11.44 |
|           |                 | 2593 (40620)   | 11.86 | 11.86 | 11.48 |
|           |                 | 2545.8(40148)  | 12.01 | 11.76 | 11.44 |
|           |                 | 2498.5 (39675) | 11.96 | 11.70 | 11.46 |
|           | 1RB-Low (0)     | 2687.5 (41565) | 11.60 | 11.69 | 11.21 |
|           |                 | 2640.3(41093)  | 11.65 | 11.77 | 11.42 |
|           |                 | 2593 (40620)   | 11.51 | 11.68 | 11.38 |
|           |                 | 2545.8(40148)  | 11.60 | 11.77 | 11.35 |
|           |                 | 2498.5 (39675) | 11.50 | 11.36 | 11.09 |
|           | 12RB-High (13)  | 2687.5 (41565) | 11.46 | 11.88 | 11.67 |

|       |                  |                |       |       |       |
|-------|------------------|----------------|-------|-------|-------|
|       |                  | 2640.3(41093)  | 11.70 | 11.98 | 11.80 |
|       |                  | 2593 (40620)   | 11.57 | 11.65 | 11.81 |
|       |                  | 2545.8(40148)  | 11.77 | 11.69 | 11.85 |
|       |                  | 2498.5 (39675) | 11.44 | 11.47 | 11.69 |
|       | 12RB-Middle (6)  | 2687.5 (41565) | 11.84 | 11.83 | 11.62 |
|       |                  | 2640.3(41093)  | 11.82 | 11.81 | 11.68 |
|       |                  | 2593 (40620)   | 11.74 | 11.73 | 11.79 |
|       |                  | 2545.8(40148)  | 11.62 | 11.78 | 11.82 |
|       |                  | 2498.5 (39675) | 11.66 | 11.66 | 11.55 |
|       | 12RB-Low (0)     | 2687.5 (41565) | 11.90 | 11.85 | 11.99 |
|       |                  | 2640.3(41093)  | 11.70 | 11.78 | 11.73 |
|       |                  | 2593 (40620)   | 11.52 | 11.71 | 11.79 |
|       |                  | 2545.8(40148)  | 11.67 | 11.87 | 11.83 |
|       |                  | 2498.5 (39675) | 11.36 | 11.52 | 11.69 |
|       | 25RB (0)         | 2687.5 (41565) | 11.69 | 11.98 | 11.71 |
|       |                  | 2640.3(41093)  | 11.72 | 11.77 | 12.00 |
|       |                  | 2593 (40620)   | 11.69 | 11.62 | 11.74 |
|       |                  | 2545.8(40148)  | 11.63 | 11.70 | 11.88 |
|       |                  | 2498.5 (39675) | 11.60 | 11.57 | 11.56 |
| 10MHz | 1RB-High (49)    | 2685 (41540)   | 11.67 | 11.60 | 11.16 |
|       |                  | 2639(41080)    | 11.55 | 11.69 | 11.12 |
|       |                  | 2593 (40620)   | 11.52 | 11.45 | 11.15 |
|       |                  | 2547(40160)    | 11.70 | 11.59 | 11.15 |
|       |                  | 2501 (39700)   | 11.49 | 11.55 | 11.03 |
|       | 1RB-Middle (24)  | 2685 (41540)   | 11.75 | 11.85 | 11.52 |
|       |                  | 2639(41080)    | 11.96 | 12.10 | 11.54 |
|       |                  | 2593 (40620)   | 11.63 | 11.76 | 11.51 |
|       |                  | 2547(40160)    | 11.75 | 11.78 | 11.33 |
|       |                  | 2501 (39700)   | 11.79 | 11.80 | 11.20 |
|       | 1RB-Low (0)      | 2685 (41540)   | 11.56 | 11.90 | 11.23 |
|       |                  | 2639(41080)    | 11.84 | 11.87 | 11.39 |
|       |                  | 2593 (40620)   | 11.54 | 11.56 | 11.16 |
|       |                  | 2547(40160)    | 11.69 | 11.63 | 11.35 |
|       |                  | 2501 (39700)   | 11.34 | 11.51 | 10.99 |
|       | 25RB-High (25)   | 2685 (41540)   | 11.71 | 11.60 | 11.54 |
|       |                  | 2639(41080)    | 11.64 | 11.94 | 11.85 |
|       |                  | 2593 (40620)   | 11.70 | 11.71 | 11.73 |
|       |                  | 2547(40160)    | 11.65 | 11.61 | 11.68 |
|       |                  | 2501 (39700)   | 11.67 | 11.52 | 11.62 |
|       | 25RB-Middle (12) | 2685 (41540)   | 11.68 | 11.65 | 11.66 |
|       |                  | 2639(41080)    | 11.69 | 11.89 | 11.89 |
|       |                  | 2593 (40620)   | 11.46 | 11.66 | 11.75 |

|       |                  |                |       |       |       |
|-------|------------------|----------------|-------|-------|-------|
|       |                  | 2547(40160)    | 11.68 | 11.59 | 11.62 |
|       |                  | 2501 (39700)   | 11.54 | 11.43 | 11.49 |
|       | 25RB-Low (0)     | 2685 (41540)   | 11.74 | 11.72 | 11.94 |
|       |                  | 2639(41080)    | 11.91 | 11.89 | 11.89 |
|       |                  | 2593 (40620)   | 11.76 | 11.82 | 11.77 |
|       |                  | 2547(40160)    | 11.77 | 11.71 | 11.86 |
|       |                  | 2501 (39700)   | 11.53 | 11.67 | 11.55 |
|       | 50RB (0)         | 2685 (41540)   | 11.92 | 11.78 | 11.70 |
|       |                  | 2639(41080)    | 11.76 | 11.96 | 11.80 |
|       |                  | 2593 (40620)   | 11.73 | 11.92 | 11.77 |
|       |                  | 2547(40160)    | 11.70 | 11.71 | 11.86 |
|       |                  | 2501 (39700)   | 11.51 | 11.51 | 11.61 |
| 15MHz | 1RB-High (74)    | 2682.5 (41515) | 11.39 | 11.53 | 11.23 |
|       |                  | 2637.8(41068)  | 11.47 | 11.73 | 11.31 |
|       |                  | 2593 (40620)   | 11.49 | 11.53 | 11.20 |
|       |                  | 2548.3(40173)  | 11.69 | 11.52 | 11.19 |
|       |                  | 2503.5 (39725) | 11.43 | 11.48 | 10.98 |
|       | 1RB-Middle (37)  | 2682.5 (41515) | 11.99 | 11.89 | 11.50 |
|       |                  | 2637.8(41068)  | 11.98 | 11.96 | 11.53 |
|       |                  | 2593 (40620)   | 11.73 | 11.95 | 11.48 |
|       |                  | 2548.3(40173)  | 11.91 | 11.84 | 11.44 |
|       |                  | 2503.5 (39725) | 11.93 | 11.75 | 11.39 |
|       | 1RB-Low (0)      | 2682.5 (41515) | 11.71 | 11.77 | 11.30 |
|       |                  | 2637.8(41068)  | 11.81 | 11.85 | 11.26 |
|       |                  | 2593 (40620)   | 11.52 | 11.57 | 11.23 |
|       |                  | 2548.3(40173)  | 11.63 | 11.73 | 11.22 |
|       |                  | 2503.5 (39725) | 11.61 | 11.57 | 11.13 |
|       | 36RB-High (38)   | 2682.5 (41515) | 11.74 | 11.85 | 11.78 |
|       |                  | 2637.8(41068)  | 11.71 | 11.83 | 11.92 |
|       |                  | 2593 (40620)   | 11.78 | 11.78 | 11.55 |
|       |                  | 2548.3(40173)  | 11.62 | 11.86 | 11.75 |
|       |                  | 2503.5 (39725) | 11.42 | 11.72 | 11.69 |
|       | 36RB-Middle (19) | 2682.5 (41515) | 11.57 | 11.83 | 11.67 |
|       |                  | 2637.8(41068)  | 11.80 | 11.67 | 11.81 |
|       |                  | 2593 (40620)   | 11.46 | 11.63 | 11.65 |
|       |                  | 2548.3(40173)  | 11.72 | 11.78 | 11.64 |
|       |                  | 2503.5 (39725) | 11.43 | 11.59 | 11.52 |
|       | 36RB-Low (0)     | 2682.5 (41515) | 11.73 | 11.70 | 11.84 |
|       |                  | 2637.8(41068)  | 11.72 | 11.91 | 11.81 |
|       |                  | 2593 (40620)   | 11.66 | 11.73 | 11.62 |
|       |                  | 2548.3(40173)  | 11.59 | 11.77 | 11.76 |
|       |                  | 2503.5 (39725) | 11.40 | 11.52 | 11.53 |

|       |                  |                |       |       |       |
|-------|------------------|----------------|-------|-------|-------|
|       | 75RB (0)         | 2682.5 (41515) | 11.81 | 11.73 | 11.82 |
|       |                  | 2637.8(41068)  | 11.71 | 11.90 | 11.74 |
|       |                  | 2593 (40620)   | 11.83 | 11.88 | 11.91 |
|       |                  | 2548.3(40173)  | 11.89 | 11.71 | 11.88 |
|       |                  | 2503.5 (39725) | 11.61 | 11.80 | 11.67 |
| 20MHz | 1RB-High (99)    | 2680 (41490)   | 11.58 | 11.57 | 11.18 |
|       |                  | 2636.5(41055)  | 11.64 | 11.70 | 11.27 |
|       |                  | 2593 (40620)   | 11.58 | 11.59 | 11.19 |
|       |                  | 2549.5(40185)  | 11.63 | 11.62 | 11.26 |
|       |                  | 2506 (39750)   | 11.58 | 11.59 | 11.18 |
|       | 1RB-Middle (50)  | 2680 (41490)   | 11.89 | 11.95 | 11.57 |
|       |                  | 2636.5(41055)  | 11.91 | 12.01 | 11.60 |
|       |                  | 2593 (40620)   | 11.83 | 11.88 | 11.48 |
|       |                  | 2549.5(40185)  | 11.92 | 11.92 | 11.53 |
|       |                  | 2506 (39750)   | 11.95 | 11.78 | 11.39 |
|       | 1RB-Low (0)      | 2680 (41490)   | 11.73 | 11.80 | 11.35 |
|       |                  | 2636.5(41055)  | 11.78 | 11.82 | 11.43 |
|       |                  | 2593 (40620)   | 11.71 | 11.74 | 11.32 |
|       |                  | 2549.5(40185)  | 11.75 | 11.71 | 11.31 |
|       |                  | 2506 (39750)   | 11.51 | 11.56 | 11.16 |
|       | 50RB-High (50)   | 2680 (41490)   | 11.66 | 11.79 | 11.74 |
|       |                  | 2636.5(41055)  | 11.72 | 11.88 | 11.84 |
|       |                  | 2593 (40620)   | 11.68 | 11.75 | 11.72 |
|       |                  | 2549.5(40185)  | 11.67 | 11.79 | 11.76 |
|       |                  | 2506 (39750)   | 11.61 | 11.66 | 11.69 |
|       | 50RB-Middle (25) | 2680 (41490)   | 11.74 | 11.83 | 11.80 |
|       |                  | 2636.5(41055)  | 11.78 | 11.86 | 11.87 |
|       |                  | 2593 (40620)   | 11.65 | 11.78 | 11.73 |
|       |                  | 2549.5(40185)  | 11.75 | 11.75 | 11.75 |
|       |                  | 2506 (39750)   | 11.62 | 11.60 | 11.59 |
|       | 50RB-Low (0)     | 2680 (41490)   | 11.81 | 11.89 | 11.89 |
|       |                  | 2636.5(41055)  | 11.84 | 11.93 | 11.89 |
|       |                  | 2593 (40620)   | 11.70 | 11.80 | 11.77 |
|       |                  | 2549.5(40185)  | 11.70 | 11.83 | 11.77 |
|       |                  | 2506 (39750)   | 11.55 | 11.66 | 11.65 |
|       | 100RB (0)        | 2680 (41490)   | 11.84 | 11.92 | 11.88 |
|       |                  | 2636.5(41055)  | 11.84 | 11.96 | 11.94 |
|       |                  | 2593 (40620)   | 11.78 | 11.82 | 11.87 |
|       |                  | 2549.5(40185)  | 11.81 | 11.85 | 11.84 |
|       |                  | 2506 (39750)   | 11.71 | 11.70 | 11.71 |



## LTE B66 - DSI0/DSI2

| LTE B66   |                |                 |       |       |       |
|-----------|----------------|-----------------|-------|-------|-------|
| BANDWIDTH | Number of RBs  | Frequency       | QPSK  | 16QAM | 64QAM |
| 1.4MHz    | 1RB-High (5)   | 1779.3 (132665) | 23.13 | 22.33 | 21.36 |
|           |                | 1745 (132322)   | 23.02 | 22.32 | 21.29 |
|           |                | 1710.7 (131979) | 23.10 | 22.30 | 21.42 |
|           | 1RB-Middle (3) | 1779.3 (132665) | 23.27 | 22.42 | 21.50 |
|           |                | 1745 (132322)   | 23.15 | 22.54 | 21.41 |
|           |                | 1710.7 (131979) | 23.23 | 22.46 | 21.39 |
|           | 1RB-Low (0)    | 1779.3 (132665) | 23.14 | 22.38 | 21.36 |
|           |                | 1745 (132322)   | 23.01 | 22.34 | 21.21 |
|           |                | 1710.7 (131979) | 23.08 | 22.41 | 21.24 |
|           | 3RB-High (3)   | 1779.3 (132665) | 23.21 | 22.22 | 21.36 |
|           |                | 1745 (132322)   | 23.11 | 22.09 | 21.28 |
|           |                | 1710.7 (131979) | 23.20 | 22.21 | 21.30 |
|           | 3RB-Middle (1) | 1779.3 (132665) | 23.31 | 22.25 | 21.44 |
|           |                | 1745 (132322)   | 23.18 | 22.21 | 21.34 |
|           |                | 1710.7 (131979) | 23.24 | 22.22 | 21.35 |
|           | 3RB-Low (0)    | 1779.3 (132665) | 23.26 | 22.18 | 21.32 |
|           |                | 1745 (132322)   | 23.10 | 22.11 | 21.28 |
|           |                | 1710.7 (131979) | 23.21 | 22.21 | 21.34 |
|           | 6RB (0)        | 1779.3 (132665) | 22.27 | 21.36 | 20.29 |
|           |                | 1745 (132322)   | 22.17 | 21.27 | 20.15 |
|           |                | 1710.7 (131979) | 22.24 | 21.32 | 20.24 |
| 3MHz      | 1RB-High (14)  | 1778.5 (132657) | 23.17 | 22.38 | 21.41 |
|           |                | 1745 (132322)   | 23.09 | 22.41 | 21.38 |
|           |                | 1711.5 (131987) | 23.13 | 22.39 | 21.43 |
|           | 1RB-Middle (7) | 1778.5 (132657) | 23.36 | 22.70 | 21.60 |
|           |                | 1745 (132322)   | 23.27 | 22.44 | 21.46 |
|           |                | 1711.5 (131987) | 23.24 | 22.65 | 21.57 |
|           | 1RB-Low (0)    | 1778.5 (132657) | 23.18 | 22.55 | 21.38 |
|           |                | 1745 (132322)   | 23.05 | 22.33 | 21.40 |
|           |                | 1711.5 (131987) | 23.14 | 22.35 | 21.37 |
|           | 8RB-High (7)   | 1778.5 (132657) | 22.25 | 21.36 | 20.29 |
|           |                | 1745 (132322)   | 22.15 | 21.24 | 20.19 |
|           |                | 1711.5 (131987) | 22.21 | 21.27 | 20.26 |
|           | 8RB-Middle (4) | 1778.5 (132657) | 22.31 | 21.36 | 20.34 |
|           |                | 1745 (132322)   | 22.20 | 21.27 | 20.22 |
|           |                | 1711.5 (131987) | 22.23 | 21.32 | 20.32 |
|           | 8RB-Low (0)    | 1778.5 (132657) | 22.27 | 20.00 | 20.34 |
|           |                | 1745 (132322)   | 22.17 | 21.24 | 20.20 |

|       |                  |                 |       |       |       |
|-------|------------------|-----------------|-------|-------|-------|
|       | 15RB (0)         | 1711.5 (131987) | 22.21 | 21.29 | 20.27 |
|       |                  | 1778.5 (132657) | 22.29 | 21.28 | 20.24 |
|       |                  | 1745 (132322)   | 22.17 | 21.17 | 20.14 |
|       |                  | 1711.5 (131987) | 22.22 | 21.25 | 20.25 |
| 5MHz  | 1RB-High (24)    | 1777.5 (132647) | 23.07 | 22.28 | 21.25 |
|       |                  | 1745 (132322)   | 23.02 | 22.35 | 21.12 |
|       |                  | 1712.5 (131997) | 23.02 | 22.30 | 21.31 |
|       | 1RB-Middle (12)  | 1777.5 (132647) | 23.43 | 22.53 | 21.56 |
|       |                  | 1745 (132322)   | 23.23 | 22.39 | 21.45 |
|       |                  | 1712.5 (131997) | 23.34 | 22.50 | 21.55 |
|       | 1RB-Low (0)      | 1777.5 (132647) | 23.04 | 22.46 | 21.33 |
|       |                  | 1745 (132322)   | 23.00 | 22.30 | 21.14 |
|       |                  | 1712.5 (131997) | 23.03 | 22.27 | 21.24 |
|       | 12RB-High (13)   | 1777.5 (132647) | 22.23 | 21.18 | 20.26 |
|       |                  | 1745 (132322)   | 22.13 | 21.11 | 20.17 |
|       |                  | 1712.5 (131997) | 22.23 | 21.24 | 20.21 |
|       | 12RB-Middle (6)  | 1777.5 (132647) | 22.34 | 21.19 | 20.29 |
|       |                  | 1745 (132322)   | 22.22 | 21.21 | 20.24 |
|       |                  | 1712.5 (131997) | 22.28 | 21.27 | 20.29 |
|       | 12RB-Low (0)     | 1777.5 (132647) | 22.25 | 21.26 | 20.24 |
|       |                  | 1745 (132322)   | 22.14 | 21.11 | 20.16 |
|       |                  | 1712.5 (131997) | 22.18 | 21.20 | 20.22 |
|       | 25RB (0)         | 1777.5 (132647) | 22.27 | 21.26 | 20.26 |
|       |                  | 1745 (132322)   | 22.18 | 21.17 | 20.16 |
|       |                  | 1712.5 (131997) | 22.24 | 21.28 | 20.23 |
| 10MHz | 1RB-High (49)    | 1775 (132622)   | 23.15 | 22.46 | 21.36 |
|       |                  | 1745 (132322)   | 23.08 | 22.38 | 21.26 |
|       |                  | 1715 (132022)   | 23.12 | 22.48 | 21.39 |
|       | 1RB-Middle (24)  | 1775 (132622)   | 23.21 | 22.51 | 21.47 |
|       |                  | 1745 (132322)   | 23.17 | 22.42 | 21.38 |
|       |                  | 1715 (132022)   | 23.26 | 22.38 | 21.49 |
|       | 1RB-Low (0)      | 1775 (132622)   | 23.15 | 22.39 | 21.25 |
|       |                  | 1745 (132322)   | 23.09 | 22.46 | 21.31 |
|       |                  | 1715 (132022)   | 23.13 | 22.42 | 21.35 |
|       | 25RB-High (25)   | 1775 (132622)   | 22.26 | 21.24 | 20.24 |
|       |                  | 1745 (132322)   | 22.19 | 21.18 | 20.20 |
|       |                  | 1715 (132022)   | 22.29 | 21.33 | 20.22 |
|       | 25RB-Middle (12) | 1775 (132622)   | 22.27 | 21.28 | 20.25 |
|       |                  | 1745 (132322)   | 22.22 | 21.21 | 20.18 |
|       |                  | 1715 (132022)   | 22.28 | 21.27 | 20.26 |
|       | 25RB-Low (0)     | 1775 (132622)   | 22.27 | 21.27 | 20.25 |
|       |                  | 1745 (132322)   | 22.14 | 21.18 | 20.16 |

|       |                  |                 |       |       |       |
|-------|------------------|-----------------|-------|-------|-------|
|       | 50RB (0)         | 1715 (132022)   | 22.28 | 21.29 | 20.23 |
|       |                  | 1775 (132622)   | 22.25 | 21.24 | 20.24 |
|       |                  | 1745 (132322)   | 22.17 | 21.18 | 20.20 |
|       |                  | 1715 (132022)   | 22.30 | 21.30 | 20.22 |
| 15MHz | 1RB-High (74)    | 1772.5 (132597) | 23.07 | 22.28 | 21.31 |
|       |                  | 1745 (132322)   | 22.97 | 22.32 | 21.21 |
|       |                  | 1717.5 (132047) | 23.05 | 22.44 | 21.34 |
|       | 1RB-Middle (37)  | 1772.5 (132597) | 22.20 | 22.50 | 21.35 |
|       |                  | 1745 (132322)   | 23.09 | 22.34 | 21.35 |
|       |                  | 1717.5 (132047) | 23.15 | 22.41 | 21.47 |
|       | 1RB-Low (0)      | 1772.5 (132597) | 23.05 | 22.36 | 21.32 |
|       |                  | 1745 (132322)   | 23.10 | 22.36 | 21.20 |
|       |                  | 1717.5 (132047) | 23.07 | 22.41 | 21.31 |
|       | 36RB-High (38)   | 1772.5 (132597) | 22.28 | 21.23 | 20.23 |
|       |                  | 1745 (132322)   | 22.19 | 21.14 | 20.19 |
|       |                  | 1717.5 (132047) | 22.28 | 21.27 | 20.22 |
|       | 36RB-Middle (19) | 1772.5 (132597) | 22.24 | 21.24 | 20.23 |
|       |                  | 1745 (132322)   | 22.20 | 21.17 | 20.21 |
|       |                  | 1717.5 (132047) | 22.28 | 21.23 | 20.23 |
|       | 36RB-Low (0)     | 1772.5 (132597) | 22.27 | 21.22 | 20.26 |
|       |                  | 1745 (132322)   | 22.19 | 21.14 | 20.17 |
|       |                  | 1717.5 (132047) | 22.26 | 21.27 | 20.24 |
|       | 75RB (0)         | 1772.5 (132597) | 22.23 | 21.22 | 20.20 |
|       |                  | 1745 (132322)   | 22.18 | 21.16 | 20.16 |
|       |                  | 1717.5 (132047) | 22.24 | 21.28 | 20.24 |
| 20MHz | 1RB-High (99)    | 1770 (132572)   | 22.93 | 22.22 | 21.10 |
|       |                  | 1745 (132322)   | 22.82 | 22.08 | 20.98 |
|       |                  | 1720 (132072)   | 22.89 | 22.19 | 21.22 |
|       | 1RB-Middle (50)  | 1770 (132572)   | 23.23 | 22.46 | 21.44 |
|       |                  | 1745 (132322)   | 23.16 | 22.51 | 21.43 |
|       |                  | 1720 (132072)   | 23.25 | 22.63 | 21.48 |
|       | 1RB-Low (0)      | 1770 (132572)   | 22.82 | 22.19 | 21.02 |
|       |                  | 1745 (132322)   | 22.90 | 22.22 | 21.12 |
|       |                  | 1720 (132072)   | 22.93 | 22.15 | 21.15 |
|       | 50RB-High (50)   | 1770 (132572)   | 22.23 | 21.22 | 20.18 |
|       |                  | 1745 (132322)   | 22.24 | 21.21 | 20.17 |
|       |                  | 1720 (132072)   | 22.25 | 21.27 | 20.26 |
|       | 50RB-Middle (25) | 1770 (132572)   | 22.26 | 21.29 | 20.25 |
|       |                  | 1745 (132322)   | 22.22 | 21.22 | 20.22 |
|       |                  | 1720 (132072)   | 22.25 | 21.25 | 20.23 |
|       | 50RB-Low (0)     | 1770 (132572)   | 22.28 | 21.30 | 20.27 |
|       |                  | 1745 (132322)   | 22.19 | 21.18 | 20.17 |

|  |           |               |       |       |       |
|--|-----------|---------------|-------|-------|-------|
|  |           | 1720 (132072) | 22.29 | 21.25 | 20.29 |
|  | 100RB (0) | 1770 (132572) | 22.24 | 21.23 | 20.23 |
|  |           | 1745 (132322) | 22.20 | 21.19 | 20.16 |
|  |           | 1720 (132072) | 22.24 | 21.23 | 20.25 |

# LTE B66 – DSI1

| LTE B66   |                |                 |       |       |       |
|-----------|----------------|-----------------|-------|-------|-------|
| BANDWIDTH | Number of RBs  | Frequency       | QPSK  | 16QAM | 64QAM |
| 1.4MHz    | 1RB-High (5)   | 1779.3 (132665) | 16.99 | 17.29 | 17.22 |
|           |                | 1745 (132322)   | 17.08 | 17.10 | 16.90 |
|           |                | 1710.7 (131979) | 17.00 | 17.27 | 16.97 |
|           | 1RB-Middle (3) | 1779.3 (132665) | 17.38 | 17.45 | 17.38 |
|           |                | 1745 (132322)   | 17.16 | 17.62 | 17.43 |
|           |                | 1710.7 (131979) | 17.42 | 17.76 | 17.51 |
|           | 1RB-Low (0)    | 1779.3 (132665) | 16.96 | 17.35 | 17.04 |
|           |                | 1745 (132322)   | 16.88 | 17.37 | 17.09 |
|           |                | 1710.7 (131979) | 16.95 | 17.23 | 17.16 |
|           | 3RB-High (3)   | 1779.3 (132665) | 17.26 | 17.16 | 17.31 |
|           |                | 1745 (132322)   | 17.15 | 17.13 | 17.17 |
|           |                | 1710.7 (131979) | 17.33 | 17.10 | 17.30 |
|           | 3RB-Middle (1) | 1779.3 (132665) | 17.26 | 17.20 | 17.12 |
|           |                | 1745 (132322)   | 17.11 | 17.22 | 17.04 |
|           |                | 1710.7 (131979) | 17.23 | 17.14 | 17.08 |
|           | 3RB-Low (0)    | 1779.3 (132665) | 17.42 | 17.35 | 17.27 |
|           |                | 1745 (132322)   | 17.33 | 17.12 | 17.11 |
|           |                | 1710.7 (131979) | 17.28 | 17.27 | 17.19 |
|           | 6RB (0)        | 1779.3 (132665) | 17.35 | 17.11 | 17.07 |
|           |                | 1745 (132322)   | 17.14 | 17.16 | 17.18 |
|           |                | 1710.7 (131979) | 17.25 | 17.11 | 17.11 |
| 3MHz      | 1RB-High (14)  | 1778.5 (132657) | 17.17 | 17.30 | 17.08 |
|           |                | 1745 (132322)   | 17.04 | 17.19 | 17.08 |
|           |                | 1711.5 (131987) | 16.97 | 17.29 | 17.14 |
|           | 1RB-Middle (7) | 1778.5 (132657) | 17.36 | 17.56 | 17.39 |
|           |                | 1745 (132322)   | 17.11 | 17.63 | 17.41 |
|           |                | 1711.5 (131987) | 17.30 | 17.65 | 17.48 |
|           | 1RB-Low (0)    | 1778.5 (132657) | 17.08 | 17.37 | 17.28 |
|           |                | 1745 (132322)   | 16.93 | 17.35 | 17.16 |
|           |                | 1711.5 (131987) | 17.03 | 17.17 | 17.25 |
|           | 8RB-High (7)   | 1778.5 (132657) | 17.28 | 17.35 | 17.12 |
|           |                | 1745 (132322)   | 17.22 | 17.28 | 17.10 |
|           |                | 1711.5 (131987) | 17.17 | 17.20 | 17.12 |

|       |                 |                 |       |       |       |
|-------|-----------------|-----------------|-------|-------|-------|
|       | 8RB-Middle (4)  | 1778.5 (132657) | 17.30 | 17.18 | 17.29 |
|       |                 | 1745 (132322)   | 17.18 | 17.21 | 17.20 |
|       |                 | 1711.5 (131987) | 17.32 | 17.09 | 17.25 |
|       | 8RB-Low (0)     | 1778.5 (132657) | 17.43 | 17.34 | 17.22 |
|       |                 | 1745 (132322)   | 17.35 | 17.15 | 17.12 |
|       |                 | 1711.5 (131987) | 17.37 | 17.23 | 17.09 |
|       | 15RB (0)        | 1778.5 (132657) | 17.24 | 17.21 | 17.08 |
|       |                 | 1745 (132322)   | 17.18 | 17.02 | 17.11 |
|       |                 | 1711.5 (131987) | 17.13 | 17.08 | 17.10 |
| 5MHz  | 1RB-High (24)   | 1777.5 (132647) | 17.01 | 17.52 | 17.15 |
|       |                 | 1745 (132322)   | 16.91 | 17.21 | 16.94 |
|       |                 | 1712.5 (131997) | 17.08 | 17.52 | 17.10 |
|       | 1RB-Middle (12) | 1777.5 (132647) | 17.20 | 17.40 | 17.39 |
|       |                 | 1745 (132322)   | 17.26 | 17.58 | 17.43 |
|       |                 | 1712.5 (131997) | 17.21 | 17.80 | 17.61 |
|       | 1RB-Low (0)     | 1777.5 (132647) | 17.00 | 17.20 | 17.13 |
|       |                 | 1745 (132322)   | 17.11 | 17.28 | 17.22 |
|       |                 | 1712.5 (131997) | 17.13 | 17.36 | 17.06 |
|       | 12RB-High (13)  | 1777.5 (132647) | 17.42 | 17.29 | 17.29 |
|       |                 | 1745 (132322)   | 17.22 | 17.20 | 17.07 |
|       |                 | 1712.5 (131997) | 17.32 | 17.20 | 17.14 |
|       | 12RB-Middle (6) | 1777.5 (132647) | 17.28 | 17.22 | 17.12 |
|       |                 | 1745 (132322)   | 17.33 | 17.10 | 17.17 |
|       |                 | 1712.5 (131997) | 17.21 | 17.19 | 17.06 |
|       | 12RB-Low (0)    | 1777.5 (132647) | 17.25 | 17.28 | 17.18 |
|       |                 | 1745 (132322)   | 17.20 | 17.23 | 17.01 |
|       |                 | 1712.5 (131997) | 17.41 | 17.13 | 17.25 |
|       | 25RB (0)        | 1777.5 (132647) | 17.20 | 17.30 | 17.06 |
|       |                 | 1745 (132322)   | 17.14 | 17.07 | 17.18 |
|       |                 | 1712.5 (131997) | 17.13 | 17.07 | 17.13 |
| 10MHz | 1RB-High (49)   | 1775 (132622)   | 17.00 | 17.49 | 17.23 |
|       |                 | 1745 (132322)   | 16.89 | 17.11 | 16.93 |
|       |                 | 1715 (132022)   | 17.00 | 17.33 | 17.12 |
|       | 1RB-Middle (24) | 1775 (132622)   | 17.21 | 17.54 | 17.46 |
|       |                 | 1745 (132322)   | 17.25 | 17.64 | 17.23 |
|       |                 | 1715 (132022)   | 17.35 | 17.58 | 17.40 |
|       | 1RB-Low (0)     | 1775 (132622)   | 17.03 | 17.40 | 17.25 |
|       |                 | 1745 (132322)   | 17.11 | 17.44 | 17.05 |
|       |                 | 1715 (132022)   | 17.09 | 17.24 | 17.10 |
|       | 25RB-High (25)  | 1775 (132622)   | 17.35 | 17.33 | 17.10 |
|       |                 | 1745 (132322)   | 17.29 | 17.17 | 17.18 |
|       |                 | 1715 (132022)   | 17.25 | 17.31 | 17.20 |

|       |                  |                 |       |       |       |
|-------|------------------|-----------------|-------|-------|-------|
|       | 25RB-Middle (12) | 1775 (132622)   | 17.31 | 17.19 | 17.10 |
|       |                  | 1745 (132322)   | 17.12 | 17.17 | 17.24 |
|       |                  | 1715 (132022)   | 17.19 | 17.14 | 17.22 |
|       | 25RB-Low (0)     | 1775 (132622)   | 17.21 | 17.28 | 17.24 |
|       |                  | 1745 (132322)   | 17.14 | 17.10 | 17.08 |
|       |                  | 1715 (132022)   | 17.41 | 17.25 | 17.15 |
|       | 50RB (0)         | 1775 (132622)   | 17.39 | 17.27 | 17.29 |
|       |                  | 1745 (132322)   | 17.17 | 17.23 | 17.23 |
|       |                  | 1715 (132022)   | 17.27 | 17.17 | 17.11 |
| 15MHz | 1RB-High (74)    | 1772.5 (132597) | 17.08 | 17.45 | 17.10 |
|       |                  | 1745 (132322)   | 16.91 | 17.06 | 17.01 |
|       |                  | 1717.5 (132047) | 17.00 | 17.51 | 17.19 |
|       | 1RB-Middle (37)  | 1772.5 (132597) | 17.31 | 17.48 | 17.52 |
|       |                  | 1745 (132322)   | 17.18 | 17.40 | 17.24 |
|       |                  | 1717.5 (132047) | 17.42 | 17.78 | 17.60 |
|       | 1RB-Low (0)      | 1772.5 (132597) | 16.90 | 17.25 | 17.26 |
|       |                  | 1745 (132322)   | 16.87 | 17.31 | 17.17 |
|       |                  | 1717.5 (132047) | 17.05 | 17.36 | 17.16 |
|       | 36RB-High (38)   | 1772.5 (132597) | 17.30 | 17.19 | 17.28 |
|       |                  | 1745 (132322)   | 17.26 | 17.08 | 17.02 |
|       |                  | 1717.5 (132047) | 17.25 | 17.17 | 17.28 |
|       | 36RB-Middle (19) | 1772.5 (132597) | 17.20 | 17.37 | 17.29 |
|       |                  | 1745 (132322)   | 17.13 | 17.09 | 17.18 |
|       |                  | 1717.5 (132047) | 17.27 | 17.27 | 17.19 |
|       | 36RB-Low (0)     | 1772.5 (132597) | 17.41 | 17.22 | 17.30 |
|       |                  | 1745 (132322)   | 17.14 | 17.05 | 17.08 |
|       |                  | 1717.5 (132047) | 17.42 | 17.26 | 17.22 |
|       | 75RB (0)         | 1772.5 (132597) | 17.39 | 17.27 | 17.25 |
|       |                  | 1745 (132322)   | 17.10 | 17.20 | 17.20 |
|       |                  | 1717.5 (132047) | 17.22 | 17.06 | 17.20 |
| 20MHz | 1RB-High (99)    | 1770 (132572)   | 17.08 | 17.44 | 17.15 |
|       |                  | 1745 (132322)   | 16.98 | 17.21 | 17.05 |
|       |                  | 1720 (132072)   | 17.03 | 17.42 | 17.12 |
|       | 1RB-Middle (50)  | 1770 (132572)   | 17.32 | 17.49 | 17.53 |
|       |                  | 1745 (132322)   | 17.24 | 17.55 | 17.38 |
|       |                  | 1720 (132072)   | 17.35 | 17.73 | 17.51 |
|       | 1RB-Low (0)      | 1770 (132572)   | 17.04 | 17.35 | 17.18 |
|       |                  | 1745 (132322)   | 17.01 | 17.37 | 17.18 |
|       |                  | 1720 (132072)   | 17.07 | 17.29 | 17.19 |
|       | 50RB-High (50)   | 1770 (132572)   | 17.32 | 17.27 | 17.21 |
|       |                  | 1745 (132322)   | 17.25 | 17.20 | 17.16 |
|       |                  | 1720 (132072)   | 17.28 | 17.25 | 17.21 |

|  |                  |               |       |       |       |
|--|------------------|---------------|-------|-------|-------|
|  | 50RB-Middle (25) | 1770 (132572) | 17.32 | 17.27 | 17.24 |
|  |                  | 1745 (132322) | 17.24 | 17.19 | 17.14 |
|  |                  | 1720 (132072) | 17.22 | 17.23 | 17.17 |
|  | 50RB-Low (0)     | 1770 (132572) | 17.33 | 17.30 | 17.24 |
|  |                  | 1745 (132322) | 17.25 | 17.17 | 17.13 |
|  |                  | 1720 (132072) | 17.34 | 17.27 | 17.22 |
|  | 100RB (0)        | 1770 (132572) | 17.29 | 17.25 | 17.19 |
|  |                  | 1745 (132322) | 17.25 | 17.15 | 17.13 |
|  |                  | 1720 (132072) | 17.28 | 17.20 | 17.16 |

### LTE B66 – DSI3

| LTE B66   |                |                 |       |       |       |
|-----------|----------------|-----------------|-------|-------|-------|
| BANDWIDTH | Number of RBs  | Frequency       | QPSK  | 16QAM | 64QAM |
| 1.4MHz    | 1RB-High (5)   | 1779.3 (132665) | 14.74 | 14.99 | 14.91 |
|           |                | 1745 (132322)   | 14.72 | 15.18 | 14.98 |
|           |                | 1710.7 (131979) | 14.87 | 15.04 | 14.99 |
|           | 1RB-Middle (3) | 1779.3 (132665) | 15.03 | 15.43 | 15.27 |
|           |                | 1745 (132322)   | 14.85 | 15.32 | 15.10 |
|           |                | 1710.7 (131979) | 15.22 | 15.20 | 15.27 |
|           | 1RB-Low (0)    | 1779.3 (132665) | 14.57 | 15.20 | 14.76 |
|           |                | 1745 (132322)   | 14.70 | 15.06 | 14.95 |
|           |                | 1710.7 (131979) | 14.67 | 15.32 | 15.18 |
|           | 3RB-High (3)   | 1779.3 (132665) | 15.01 | 14.96 | 15.11 |
|           |                | 1745 (132322)   | 15.02 | 14.90 | 14.91 |
|           |                | 1710.7 (131979) | 15.08 | 15.18 | 14.94 |
|           | 3RB-Middle (1) | 1779.3 (132665) | 14.99 | 15.10 | 15.20 |
|           |                | 1745 (132322)   | 15.00 | 15.07 | 14.82 |
|           |                | 1710.7 (131979) | 14.90 | 14.95 | 15.09 |
|           | 3RB-Low (0)    | 1779.3 (132665) | 14.98 | 15.22 | 15.15 |
|           |                | 1745 (132322)   | 14.98 | 15.06 | 15.11 |
|           |                | 1710.7 (131979) | 15.17 | 15.15 | 15.21 |
|           | 6RB (0)        | 1779.3 (132665) | 14.97 | 15.15 | 15.15 |
|           |                | 1745 (132322)   | 14.85 | 15.09 | 14.87 |
|           |                | 1710.7 (131979) | 15.04 | 14.96 | 15.12 |
| 3MHz      | 1RB-High (14)  | 1778.5 (132657) | 14.65 | 15.01 | 15.06 |
|           |                | 1745 (132322)   | 14.56 | 15.10 | 14.80 |
|           |                | 1711.5 (131987) | 14.88 | 15.05 | 15.03 |
|           | 1RB-Middle (7) | 1778.5 (132657) | 14.99 | 15.16 | 15.28 |
|           |                | 1745 (132322)   | 14.94 | 15.43 | 15.04 |
|           |                | 1711.5 (131987) | 14.95 | 15.21 | 15.15 |
|           | 1RB-Low (0)    | 1778.5 (132657) | 14.57 | 15.05 | 14.76 |

|       |                 |                 |       |       |       |
|-------|-----------------|-----------------|-------|-------|-------|
|       |                 | 1745 (132322)   | 14.87 | 14.98 | 15.02 |
|       |                 | 1711.5 (131987) | 14.68 | 15.09 | 15.04 |
|       | 8RB-High (7)    | 1778.5 (132657) | 15.12 | 15.03 | 15.04 |
|       |                 | 1745 (132322)   | 14.99 | 15.09 | 14.87 |
|       |                 | 1711.5 (131987) | 14.99 | 14.99 | 14.93 |
|       | 8RB-Middle (4)  | 1778.5 (132657) | 14.98 | 15.12 | 15.01 |
|       |                 | 1745 (132322)   | 14.97 | 14.93 | 14.97 |
|       |                 | 1711.5 (131987) | 15.04 | 14.94 | 15.13 |
|       | 8RB-Low (0)     | 1778.5 (132657) | 15.19 | 14.99 | 15.02 |
|       |                 | 1745 (132322)   | 15.10 | 15.12 | 14.87 |
|       |                 | 1711.5 (131987) | 15.12 | 15.24 | 15.10 |
|       | 15RB (0)        | 1778.5 (132657) | 15.10 | 14.90 | 15.16 |
|       |                 | 1745 (132322)   | 15.09 | 14.86 | 14.92 |
|       |                 | 1711.5 (131987) | 15.06 | 15.16 | 15.04 |
| 5MHz  | 1RB-High (24)   | 1777.5 (132647) | 14.63 | 15.24 | 15.18 |
|       |                 | 1745 (132322)   | 14.64 | 15.15 | 14.98 |
|       |                 | 1712.5 (131997) | 14.86 | 15.02 | 14.88 |
|       | 1RB-Middle (12) | 1777.5 (132647) | 15.02 | 15.25 | 15.26 |
|       |                 | 1745 (132322)   | 14.85 | 15.27 | 15.13 |
|       |                 | 1712.5 (131997) | 15.02 | 15.23 | 15.16 |
|       | 1RB-Low (0)     | 1777.5 (132647) | 14.58 | 15.03 | 14.86 |
|       |                 | 1745 (132322)   | 14.78 | 14.93 | 15.07 |
|       |                 | 1712.5 (131997) | 14.69 | 15.08 | 14.92 |
|       | 12RB-High (13)  | 1777.5 (132647) | 14.95 | 15.01 | 14.99 |
|       |                 | 1745 (132322)   | 15.00 | 14.94 | 15.04 |
|       |                 | 1712.5 (131997) | 15.13 | 15.04 | 14.94 |
|       | 12RB-Middle (6) | 1777.5 (132647) | 15.01 | 14.96 | 15.03 |
|       |                 | 1745 (132322)   | 14.96 | 14.82 | 14.99 |
|       |                 | 1712.5 (131997) | 15.14 | 15.17 | 14.98 |
|       | 12RB-Low (0)    | 1777.5 (132647) | 15.01 | 14.98 | 15.10 |
|       |                 | 1745 (132322)   | 15.14 | 14.98 | 14.91 |
|       |                 | 1712.5 (131997) | 15.18 | 15.09 | 15.03 |
|       | 25RB (0)        | 1777.5 (132647) | 15.07 | 15.00 | 15.08 |
|       |                 | 1745 (132322)   | 15.10 | 15.04 | 15.13 |
|       |                 | 1712.5 (131997) | 14.97 | 15.05 | 14.90 |
| 10MHz | 1RB-High (49)   | 1775 (132622)   | 14.65 | 15.29 | 14.94 |
|       |                 | 1745 (132322)   | 14.66 | 14.99 | 14.95 |
|       |                 | 1715 (132022)   | 14.71 | 15.23 | 15.08 |
|       | 1RB-Middle (24) | 1775 (132622)   | 15.14 | 15.27 | 15.18 |
|       |                 | 1745 (132322)   | 14.86 | 15.37 | 15.18 |
|       |                 | 1715 (132022)   | 15.20 | 15.47 | 15.33 |
|       | 1RB-Low (0)     | 1775 (132622)   | 14.57 | 15.11 | 14.86 |



|       |                  |                  |                 |       |       |       |
|-------|------------------|------------------|-----------------|-------|-------|-------|
|       |                  |                  | 1745 (132322)   | 14.75 | 15.08 | 14.78 |
|       |                  |                  | 1715 (132022)   | 14.71 | 15.09 | 14.94 |
|       |                  | 25RB-High (25)   | 1775 (132622)   | 15.02 | 15.14 | 15.13 |
|       |                  |                  | 1745 (132322)   | 15.06 | 15.10 | 14.91 |
|       |                  |                  | 1715 (132022)   | 14.97 | 14.94 | 14.96 |
|       |                  | 25RB-Middle (12) | 1775 (132622)   | 15.21 | 15.17 | 14.98 |
|       |                  |                  | 1745 (132322)   | 15.08 | 15.04 | 14.93 |
|       |                  |                  | 1715 (132022)   | 15.14 | 15.11 | 14.92 |
|       |                  | 25RB-Low (0)     | 1775 (132622)   | 15.23 | 15.02 | 14.96 |
|       |                  |                  | 1745 (132322)   | 14.88 | 14.98 | 15.11 |
|       |                  |                  | 1715 (132022)   | 15.04 | 15.04 | 14.98 |
|       |                  | 50RB (0)         | 1775 (132622)   | 14.98 | 15.18 | 15.02 |
|       |                  |                  | 1745 (132322)   | 14.95 | 15.12 | 15.02 |
|       |                  |                  | 1715 (132022)   | 15.07 | 15.17 | 15.03 |
| 15MHz | 1RB-High (74)    |                  | 1772.5 (132597) | 14.91 | 15.23 | 15.07 |
|       |                  |                  | 1745 (132322)   | 14.66 | 14.93 | 14.86 |
|       |                  |                  | 1717.5 (132047) | 14.63 | 15.14 | 15.03 |
|       | 1RB-Middle (37)  |                  | 1772.5 (132597) | 14.97 | 15.34 | 15.37 |
|       |                  |                  | 1745 (132322)   | 14.96 | 15.20 | 15.23 |
|       |                  |                  | 1717.5 (132047) | 15.04 | 15.21 | 15.34 |
|       | 1RB-Low (0)      |                  | 1772.5 (132597) | 14.78 | 15.18 | 14.86 |
|       |                  |                  | 1745 (132322)   | 14.80 | 14.99 | 14.85 |
|       |                  |                  | 1717.5 (132047) | 14.95 | 15.23 | 14.91 |
|       | 36RB-High (38)   |                  | 1772.5 (132597) | 14.97 | 15.05 | 15.10 |
|       |                  |                  | 1745 (132322)   | 14.92 | 15.14 | 15.13 |
|       |                  |                  | 1717.5 (132047) | 15.02 | 15.07 | 15.05 |
|       | 36RB-Middle (19) |                  | 1772.5 (132597) | 15.12 | 15.01 | 15.09 |
|       |                  |                  | 1745 (132322)   | 15.10 | 14.98 | 15.08 |
|       |                  |                  | 1717.5 (132047) | 15.08 | 15.15 | 15.13 |
|       | 36RB-Low (0)     |                  | 1772.5 (132597) | 15.05 | 15.05 | 15.13 |
|       |                  |                  | 1745 (132322)   | 14.95 | 14.88 | 15.06 |
|       |                  |                  | 1717.5 (132047) | 14.98 | 15.24 | 15.05 |
|       | 75RB (0)         |                  | 1772.5 (132597) | 15.11 | 14.97 | 15.06 |
|       |                  |                  | 1745 (132322)   | 14.93 | 15.12 | 15.01 |
|       |                  |                  | 1717.5 (132047) | 15.06 | 15.05 | 15.19 |
| 20MHz | 1RB-High (99)    |                  | 1770 (132572)   | 14.83 | 15.19 | 15.08 |
|       |                  |                  | 1745 (132322)   | 14.70 | 15.11 | 14.99 |
|       |                  |                  | 1720 (132072)   | 14.80 | 15.16 | 15.01 |
|       | 1RB-Middle (50)  |                  | 1770 (132572)   | 15.11 | 15.33 | 15.29 |
|       |                  |                  | 1745 (132322)   | 15.01 | 15.38 | 15.16 |
|       |                  |                  | 1720 (132072)   | 15.12 | 15.39 | 15.27 |
|       | 1RB-Low (0)      |                  | 1770 (132572)   | 14.77 | 15.12 | 14.94 |

|  |                  |               |       |       |       |
|--|------------------|---------------|-------|-------|-------|
|  |                  | 1745 (132322) | 14.77 | 15.10 | 14.97 |
|  |                  | 1720 (132072) | 14.87 | 15.27 | 15.08 |
|  | 50RB-High (50)   | 1770 (132572) | 15.11 | 15.11 | 15.09 |
|  |                  | 1745 (132322) | 15.06 | 15.04 | 15.06 |
|  |                  | 1720 (132072) | 15.09 | 15.12 | 15.08 |
|  | 50RB-Middle (25) | 1770 (132572) | 15.12 | 15.11 | 15.11 |
|  |                  | 1745 (132322) | 15.03 | 15.02 | 15.01 |
|  |                  | 1720 (132072) | 15.07 | 15.07 | 15.06 |
|  | 50RB-Low (0)     | 1770 (132572) | 15.13 | 15.14 | 15.14 |
|  |                  | 1745 (132322) | 15.05 | 15.03 | 15.05 |
|  |                  | 1720 (132072) | 15.15 | 15.16 | 15.15 |
|  | 100RB (0)        | 1770 (132572) | 15.09 | 15.09 | 15.09 |
|  |                  | 1745 (132322) | 15.00 | 15.03 | 15.03 |
|  |                  | 1720 (132072) | 15.09 | 15.10 | 15.09 |

## 11.4 Wi-Fi and BT Measurement result

The maximum output power of BT antenna is 11dBm.

The maximum tune up of BT antenna is 11dBm.

| Antenna      | Sar sensor off+<br>WIFI transmit<br>alone | Sar sensor on +<br>WIFI transmit<br>alone | Sar sensor off+<br>WIFI transmit with<br>WWAN | Sar sensor on+<br>WIFI transmit with<br>WWAN |
|--------------|-------------------------------------------|-------------------------------------------|-----------------------------------------------|----------------------------------------------|
| WIFI Antenna | DSI0                                      | DSI1                                      | DSI2                                          | DSI3                                         |

The average conducted power for Wi-Fi 2.4G is as following - DSI0/DSI2

| 802.11b           |       |
|-------------------|-------|
| Channel\data rate | 1Mbps |
| 11(2462MHz)       | 19.78 |
| 6(2437(MHz)       | 19.94 |
| 1(2412MHz)        | 19.65 |
| Tune up           | 20.50 |
| 802.11g           |       |
| Channel\data rate | 6Mbps |
| 11(2462MHz)       | 17.74 |
| 6(2437(MHz)       | 17.84 |
| 1(2412MHz)        | 17.45 |
| Tune up           | 18.00 |
| 802.11n-20MHz     |       |
| Channel\data rate | MCS0  |
| 11(2462MHz)       | 17.48 |
| 6(2437(MHz)       | 17.78 |
| 1(2412MHz)        | 17.28 |
| Tune up           | 18.00 |
| 802.11n-40MHz     |       |
| Channel\data rate | MCS0  |
| 9(2452MHz)        | 16.15 |
| 6(2437MHz)        | 16.16 |
| 3(2422MHz)        | 16.06 |
| Tune up           | 18.00 |

The average conducted power for Wi-Fi 2.4G is as following – DSI1/DSI3

| 802.11b           |       |
|-------------------|-------|
| Channel\data rate | 1Mbps |
| 11(2462MHz)       | 14.79 |
| 6(2437(MHz)       | 14.82 |
| 1(2412MHz)        | 14.43 |
| Tune up           | 15.00 |
| 802.11g           |       |
| Channel\data rate | 6Mbps |
| 11(2462MHz)       | 12.56 |
| 6(2437(MHz)       | 12.81 |
| 1(2412MHz)        | 12.21 |
| Tune up           | 13.50 |
| 802.11n-20MHz     |       |
| Channel\data rate | MCS0  |
| 11(2462MHz)       | 12.46 |
| 6(2437(MHz)       | 12.76 |
| 1(2412MHz)        | 12.25 |
| Tune up           | 13.50 |
| 802.11n-40MHz     |       |
| Channel\data rate | MCS0  |
| 9(2452MHz)        | 12.91 |
| 6(2437MHz)        | 12.92 |
| 3(2422MHz)        | 12.85 |
| Tune up           | 13.50 |

**The tune up power for Wi-Fi 5G is as following – DSI0**

| WiFi 802.11a (5GHz) Normal |                  |                    |                    |                    |                    |
|----------------------------|------------------|--------------------|--------------------|--------------------|--------------------|
| 6Mbps~12Mbps               |                  |                    |                    |                    |                    |
| Channel                    | Channel<br>36~48 | Channel<br>100~108 | Channel<br>112~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)            | 18.5             | 18.5               | 18.5               | 18.5               | 18.5               |
| Tune-<br>up(dB)            | 18.5± 1          | 18.5± 1            | 18.5± 1            | 18.5± 1            | 18.5± 1            |
| 18Mbps~36Mbps              |                  |                    |                    |                    |                    |
| Channel                    | Channel<br>36~48 | Channel<br>100~108 | Channel<br>112~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)            | 17               | 17                 | 17                 | 17                 | 17                 |
| Tune-<br>up(dB)            | 17± 1            | 17± 1              | 17± 1              | 17± 1              | 17± 1              |
| 48Mbps~54Mbps              |                  |                    |                    |                    |                    |
| Data<br>Rate               | Channel<br>36~48 | Channel<br>100~108 | Channel<br>112~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)            | 17               | 17                 | 17                 | 17                 | 17                 |
| Tune-<br>up(dB)            | 17± 1            | 17± 1              | 17± 1              | 17± 1              | 17± 1              |

| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |               |                  |               |  |
|----------------------------------|---------------|------------------|---------------|--|
| Channel                          | Channel<br>36 | Channel<br>40/44 | Channel<br>48 |  |
| Target<br>(dBm)                  | 16            | 16               | 16            |  |
| Tune-<br>up(dB)                  | 16± 1         | 16± 1            | 16± 1         |  |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |               |                  |               |  |
| Channel                          | Channel<br>36 | Channel<br>40/44 | Channel<br>48 |  |
| Target<br>(dBm)                  | 15.5          | 15.5             | 15.5          |  |
| Tune-<br>up(dB)                  | 15.5± 1       | 15.5± 1          | 15.5± 1       |  |
| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |               |                  |               |  |

| Channel                          | Channel<br>52/56 | Channel<br>60/64 | Channel<br>100~136 | Channel<br>140/144 |
|----------------------------------|------------------|------------------|--------------------|--------------------|
| Target<br>(dBm)                  | 16               | 16               | 16                 | 16                 |
| Tune-<br>up(dB)                  | 16± 1            | 16± 1            | 16± 1              | 16± 1              |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |                  |                  |                    |                    |
| Channel                          | Channel<br>52/56 | Channel<br>60/64 | Channel<br>100~136 | Channel<br>140/144 |
| Target<br>(dBm)                  | 15.5             | 15.5             | 15.5               | 15.5               |
| Tune-<br>up(dB)                  | 15.5± 1          | 15.5± 1          | 15.5± 1            | 15.5± 1            |
| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |                  |                  |                    |                    |
| Channel                          | Channel<br>149   | Channel<br>153   | Channel<br>157/161 | Channel<br>165     |
| Target<br>(dBm)                  | 16               | 16               | 16                 | 16                 |
| Tune-<br>up(dB)                  | 16± 1            | 16± 1            | 16± 1              | 16± 1              |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |                  |                  |                    |                    |
| Channel                          | Channel<br>149   | Channel<br>153   | Channel<br>157/161 | Channel<br>165     |
| Target<br>(dBm)                  | 15.5             | 15.5             | 15.5               | 15.5               |
| Tune-<br>up(dB)                  | 15.5± 1          | 15.5± 1          | 15.5± 1            | 15.5± 1            |

| WiFi 802.11n-40 (5GHz) MCS0~MCS4 |               |               |               |               |
|----------------------------------|---------------|---------------|---------------|---------------|
| Channel                          | Channel<br>38 | Channel<br>46 | Channel<br>54 | Channel<br>62 |
| Target<br>(dBm)                  | 14            | 14            | 14            | 14            |
| Tune-<br>up(dB)                  | 14± 1         | 14± 1         | 14± 1         | 14± 1         |
| WiFi 802.11n-40 (5GHz) MCS5~MCS7 |               |               |               |               |

| Channel                            | Channel<br>38  | Channel<br>46      | Channel<br>54  | Channel<br>62  |
|------------------------------------|----------------|--------------------|----------------|----------------|
| Target<br>(dBm)                    | 14             | 14                 | 14             | 14             |
| Tune-<br>up(dB)                    | 14± 1          | 14± 1              | 14± 1          | 14± 1          |
| WiFi 802.11n-40 (5GHz) MCS0~MCS4   |                |                    |                |                |
| Channel                            | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                    | 14             | 14                 | 14             | 14             |
| Tune-<br>up(dB)                    | 14± 1          | 14± 1              | 14± 1          | 14± 1          |
| WiFi 802.11n-40 (5GHz) MCS5~MCS7   |                |                    |                |                |
| Channel                            | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                    | 14             | 14                 | 14             | 14             |
| Tune-<br>up(dB)                    | 14± 1          | 14± 1              | 14± 1          | 14± 1          |
| WiFi 802.11n-40 (5.7GHz) MCS0~MCS4 |                |                    |                |                |
| Channel                            | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                    | 14             | 14                 |                |                |
| Tune-<br>up(dB)                    | 14± 1          | 14± 1              |                |                |
| WiFi 802.11n-40 (5.7GHz) MCS5~MCS7 |                |                    |                |                |
| Channel                            | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                    | 14             | 14                 |                |                |
| Tune-<br>up(dB)                    | 14± 1          | 14± 1              |                |                |

WiFi 802.11ac-20 (5.2GHz)MCS0~4

|                                     |               |               |                 |                 |             |
|-------------------------------------|---------------|---------------|-----------------|-----------------|-------------|
| Channel                             | Channel 36    | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 14            | 14            | 14              |                 |             |
| Tune-up(dB)                         | 14± 1         | 14± 1         | 14± 1           |                 |             |
|                                     |               |               |                 |                 |             |
| WiFi 802.11ac-20 (5.2GHz)MCS5~MCS8  |               |               |                 |                 |             |
| Channel                             | Channel 36    | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 14            | 14            | 14              |                 |             |
| Tune-up(dB)                         | 14± 1         | 14± 1         | 14± 1           |                 |             |
|                                     |               |               |                 |                 |             |
| WiFi 802.11ac-20 (5.2GHz)MCS9       |               |               |                 |                 |             |
| Channel                             | Channel 36    | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 14            | 14            | 14              |                 |             |
| Tune-up(dB)                         | 14± 1         | 14± 1         | 14± 1           |                 |             |
|                                     |               |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz)MCS0~4     |               |               |                 |                 |             |
| Channel                             | Channel 52/56 | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 14            | 14            | 14              | 14              |             |
| Tune-up(dB)                         | 14± 1         | 14± 1         | 14± 1           | 14± 1           |             |
|                                     |               |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz)MCS5~ MCS8 |               |               |                 |                 |             |
| Channel                             | Channel 52/56 | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 14            | 14            | 14              | 14              |             |
| Tune-up(dB)                         | 14± 1         | 14± 1         | 14± 1           | 14± 1           |             |
|                                     |               |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz) MCS9      |               |               |                 |                 |             |
| Channel                             | Channel 56    | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 14            | 14            | 14              | 14              |             |
| Tune-up(dB)                         | 14± 1         | 14± 1         | 14± 1           | 14± 1           |             |
|                                     |               |               |                 |                 |             |
| WiFi 802.11ac-20 (5.8GHz)MCS0~4     |               |               |                 |                 |             |
| Channel                             | Channel 149   | Channel 153   | Channel 157     | Channel 161     | Channel 165 |
| Target (dBm)                        | 14            | 14            | 14              | 14              | 14          |



|                                    |             |             |             |             |             |
|------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Tune-up(dB)                        | 14± 1       | 14± 1       | 14± 1       | 14± 1       | 14± 1       |
| WiFi 802.11ac-20 (5.8GHz)MCS5~MCS8 |             |             |             |             |             |
| Channel                            | Channel 149 | Channel 153 | Channel 157 | Channel 161 | Channel 165 |
| Target (dBm)                       | 14          | 14          | 14          | 14          | 14          |
| Tune-up(dB)                        | 14± 1       | 14± 1       | 14± 1       | 14± 1       | 14± 1       |
| WiFi 802.11ac-20 (5.8GHz)MCS9      |             |             |             |             |             |
| Channel                            | Channel 149 | Channel 153 | Channel 157 | Channel 161 | Channel 165 |
| Target (dBm)                       | 14          | 14          | 14          | 14          | 14          |
| Tune-up(dB)                        | 14± 1       | 14± 1       | 14± 1       | 14± 1       | 14± 1       |

|                                          |            |            |            |            |
|------------------------------------------|------------|------------|------------|------------|
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS0~ MCS4 |            |            |            |            |
| Channel                                  | Channel 38 | Channel 46 | Channel 54 | Channel 62 |
| Target (dBm)                             | 14         | 14         | 14         | 14         |
| Tune-up(dB)                              | 14± 1      | 14± 1      | 14± 1      | 14± 1      |
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS5~CS8   |            |            |            |            |
| Channel                                  | Channel 38 | Channel 46 | Channel 54 | Channel 62 |
| Target (dBm)                             | 14         | 14         | 14         | 14         |
| Tune-up(dB)                              | 14± 1      | 14± 1      | 14± 1      | 14± 1      |
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS9       |            |            |            |            |
| Channel                                  | Channel 38 | Channel 46 | Channel 54 | Channel 62 |
| Target (dBm)                             | 14         | 14         | 14         | 14         |
| Tune-up(dB)                              | 14± 1      | 14± 1      | 14± 1      | 14± 1      |

|                                          |                |                    |                |                |
|------------------------------------------|----------------|--------------------|----------------|----------------|
| WiFi 802.11ac-40 (5.5~5.6GHz) MCS0~ MCS4 |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 14             | 14                 | 14             | 14             |
| Tune-<br>up(dB)                          | 14± 1          | 14± 1              | 14± 1          | 14± 1          |
| WiFi 802.11ac-40 (5.5~5.6GHz) MCS5~ MCS8 |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 14             | 14                 | 14             | 14             |
| Tune-<br>up(dB)                          | 14± 1          | 14± 1              | 14± 1          | 14± 1          |
| WiFi 802.11ac-40 (5.5~5.6GHz) CS9        |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 14             | 14                 | 14             | 14             |
| Tune-<br>up(dB)                          | 14± 1          | 14± 1              | 14± 1          | 14± 1          |
| WiFi 802.11ac-40 (5.8GHz) MCS0~ MCS4     |                |                    |                |                |
| Data<br>Rate                             | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                          | 14             | 14                 |                |                |
| Tune-<br>up(dB)                          | 14± 1          | 14± 1              |                |                |
| WiFi 802.11ac-40 (5.8GHz) MCS5~ MCS8     |                |                    |                |                |
| Data<br>Rate                             | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                          | 14             | 14                 |                |                |
| Tune-<br>up(dB)                          | 14± 1          | 14± 1              |                |                |
| WiFi 802.11ac-40 (5.8GHz) MCS9           |                |                    |                |                |

|                 |                |                |  |  |
|-----------------|----------------|----------------|--|--|
| Channel         | Channel<br>151 | Channel<br>159 |  |  |
| Target<br>(dBm) | 14             | 14             |  |  |
| Tune-<br>up(dB) | 14± 1          | 14± 1          |  |  |
|                 |                |                |  |  |

|                             |                |                |                |                |
|-----------------------------|----------------|----------------|----------------|----------------|
| WiFi 802.11ac-80 MCS0~ MCS4 |                |                |                |                |
| Data<br>Rate                | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 14             | 14             | 14             | 14             |
| Tune-<br>up(dB)             | 14± 1          | 14± 1          | 14± 1          | 14± 1          |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS5~S8    |                |                |                |                |
| Data<br>Rate                | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 14             | 14             | 14             | 14             |
| Tune-<br>up(dB)             | 14± 1          | 14± 1          | 14± 1          | 14± 1          |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS9       |                |                |                |                |
| Channel                     | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 14             | 14             | 14             | 14             |
| Tune-<br>up(dB)             | 14± 1          | 14± 1          | 14± 1          | 14± 1          |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS0~ MCS4 |                |                |                |                |
| Data<br>Rate                | Channel<br>138 | Channel<br>155 |                |                |
| Target<br>(dBm)             | 14             | 14             |                |                |
| Tune-<br>up(dB)             | 14± 1          | 14± 1          |                |                |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS5~S8    |                |                |                |                |
| Data<br>Rate                | Channel<br>138 | Channel<br>155 |                |                |

|                       |             |             |  |  |
|-----------------------|-------------|-------------|--|--|
| Target (dBm)          | 14          | 14          |  |  |
| Tune-up(dB)           | 14± 1       | 14± 1       |  |  |
| WiFi 802.11ac-80 MCS9 |             |             |  |  |
| Channel               | Channel 138 | Channel 155 |  |  |
| Target (dBm)          | 14          | 14          |  |  |
| Tune-up(dB)           | 14± 1       | 14± 1       |  |  |

The average conducted power for Wi-Fi 5G is as following – DSI0

| 802.11a(dBm)      |       |
|-------------------|-------|
| Channel\data rate | 6Mbps |
| 36(5180 MHz)      | 18.68 |
| 40(5200 MHz)      | 18.88 |
| 44(5220 MHz)      | 18.71 |
| 48(5240 MHz)      | 18.81 |
| 52(5260 MHz)      | 18.70 |
| 56(5280 MHz)      | 18.61 |
| 60(5300 MHz)      | 18.11 |
| 64(5320 MHz)      | 18.24 |
| 100(5500 MHz)     | 18.67 |
| 104(5520 MHz)     | 18.11 |
| 108(5540 MHz)     | 18.35 |
| 112(5560 MHz)     | 18.35 |
| 116(5580 MHz)     | 18.22 |
| 120(5600 MHz)     | 18.21 |
| 124(5620 MHz)     | 18.35 |
| 128(5640 MHz)     | 18.32 |
| 132(5660 MHz)     | 18.44 |
| 136(5680 MHz)     | 18.69 |
| 140(5700 MHz)     | 18.84 |
| 144(5720 MHz)     | 18.88 |
| 149(5745 MHz)     | 18.79 |
| 153(5765 MHz)     | 18.94 |
| 157(5785 MHz)     | 18.91 |
| 161(5805 MHz)     | 18.87 |
| 165(5825 MHz)     | 18.95 |
| Tune up           | 19.50 |

**The tune up power for Wi-Fi 5G is as following – DSI1**

| WiFi 802.11a (5GHz) Low |                  |                    |                    |                    |                    |
|-------------------------|------------------|--------------------|--------------------|--------------------|--------------------|
| 6Mbps~12Mbps            |                  |                    |                    |                    |                    |
| Channel                 | Channel<br>36~48 | Channel<br>100~104 | Channel<br>108~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)         | 14.5             | 14.5               | 14.5               | 14.5               | 14.5               |
| Tune-<br>up(dB)         | 14.5± 1          | 14.5± 1            | 14.5± 1            | 14.5± 1            | 14.5± 1            |
| 18Mbps~36Mbps           |                  |                    |                    |                    |                    |
| Channel                 | Channel<br>36~48 | Channel<br>100~108 | Channel<br>112~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)         | 11.5             | 11.5               | 11.5               | 11.5               | 11.5               |
| Tune-<br>up(dB)         | 11.5± 1          | 11.5± 1            | 11.5± 1            | 11.5± 1            | 11.5± 1            |
| 48Mbps~54Mbps           |                  |                    |                    |                    |                    |
| Data<br>Rate            | Channel<br>36~48 | Channel<br>100~108 | Channel<br>112~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)         | 11.5             | 11.5               | 11.5               | 11.5               | 11.5               |
| Tune-<br>up(dB)         | 11.5± 1          | 11.5± 1            | 11.5± 1            | 11.5± 1            | 11.5± 1            |

| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |               |                  |               |  |
|----------------------------------|---------------|------------------|---------------|--|
| Channel                          | Channel<br>36 | Channel<br>40/44 | Channel<br>48 |  |
| Target<br>(dBm)                  | 11.5          | 11.5             | 11.5          |  |
| Tune-<br>up(dB)                  | 11.5± 1       | 11.5± 1          | 11.5± 1       |  |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |               |                  |               |  |
| Channel                          | Channel<br>36 | Channel<br>40/44 | Channel<br>48 |  |
| Target<br>(dBm)                  | 10.5          | 10.5             | 10.5          |  |
| Tune-<br>up(dB)                  | 10.5± 1       | 10.5± 1          | 10.5± 1       |  |
| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |               |                  |               |  |

| Channel                          | Channel<br>56  | Channel<br>60/64 | Channel<br>100~136 | Channel<br>140/144 |
|----------------------------------|----------------|------------------|--------------------|--------------------|
| Target<br>(dBm)                  | 11.5           | 11.5             | 11.5               | 11.5               |
| Tune-<br>up(dB)                  | 11.5± 1        | 11.5± 1          | 11.5± 1            | 11.5± 1            |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |                |                  |                    |                    |
| Channel                          | Channel<br>56  | Channel<br>60/64 | Channel<br>100~136 | Channel<br>140/144 |
| Target<br>(dBm)                  | 10.5           | 10.5             | 10.5               | 10.5               |
| Tune-<br>up(dB)                  | 10.5± 1        | 10.5± 1          | 10.5± 1            | 10.5± 1            |
| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |                |                  |                    |                    |
| Channel                          | Channel<br>149 | Channel<br>153   | Channel<br>157/161 | Channel<br>165     |
| Target<br>(dBm)                  | 10.5           | 10.5             | 10.5               | 10.5               |
| Tune-<br>up(dB)                  | 10.5± 1        | 10.5± 1          | 10.5± 1            | 10.5± 1            |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |                |                  |                    |                    |
| Channel                          | Channel<br>149 | Channel<br>153   | Channel<br>157/161 | Channel<br>165     |
| Target<br>(dBm)                  | 10.5           | 10.5             | 10.5               | 10.5               |
| Tune-<br>up(dB)                  | 10.5± 1        | 10.5± 1          | 10.5± 1            | 10.5± 1            |

| WiFi 802.11n-40 (5GHz) MCS0~MCS4 |               |               |  |  |
|----------------------------------|---------------|---------------|--|--|
| Channel                          | Channel<br>38 | Channel<br>46 |  |  |
| Target<br>(dBm)                  | 11            | 11            |  |  |
| Tune-<br>up(dB)                  | 11± 1         | 11± 1         |  |  |
| WiFi 802.11n-40 (5GHz) MCS5~MCS7 |               |               |  |  |

|                                    |                |                    |                |                |
|------------------------------------|----------------|--------------------|----------------|----------------|
| Channel                            | Channel<br>38  | Channel<br>46      |                |                |
| Target<br>(dBm)                    | 11             | 11                 |                |                |
| Tune-<br>up(dB)                    | 11± 1          | 11± 1              |                |                |
| WiFi 802.11n-40 (5GHz) MCS0~MCS4   |                |                    |                |                |
| Channel                            | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                    | 11             | 11                 | 11             | 11             |
| Tune-<br>up(dB)                    | 11± 1          | 11± 1              | 11± 1          | 11± 1          |
| WiFi 802.11n-40 (5GHz) MCS5~MCS7   |                |                    |                |                |
| Channel                            | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                    | 11             | 11                 | 11             | 11             |
| Tune-<br>up(dB)                    | 11± 1          | 11± 1              | 11± 1          | 11± 1          |
| WiFi 802.11n-40 (5.7GHz) MCS0~MCS4 |                |                    |                |                |
| Channel                            | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                    | 11             | 11                 | 11             | 11             |
| Tune-<br>up(dB)                    | 11± 1          | 11± 1              | 11± 1          | 11± 1          |
| WiFi 802.11n-40 (5.7GHz) MCS5~MCS7 |                |                    |                |                |
| Channel                            | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                    | 11             | 11                 | 11             | 11             |
| Tune-<br>up(dB)                    | 11± 1          | 11± 1              | 11± 1          | 11± 1          |

|                                 |
|---------------------------------|
| WiFi 802.11ac-20 (5.2GHz)MCS0~4 |
|---------------------------------|

|                                     |             |               |                 |                 |             |
|-------------------------------------|-------------|---------------|-----------------|-----------------|-------------|
| Channel                             | Channel 36  | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 11          | 11            | 11              |                 |             |
| Tune-up(dB)                         | 11± 1       | 11± 1         | 11± 1           |                 |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.2GHz)MCS5~MCS8  |             |               |                 |                 |             |
| Channel                             | Channel 36  | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 11          | 11            | 11              |                 |             |
| Tune-up(dB)                         | 11± 1       | 11± 1         | 11± 1           |                 |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.2GHz)MCS9       |             |               |                 |                 |             |
| Channel                             | Channel 36  | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 11          | 11            | 11              |                 |             |
| Tune-up(dB)                         | 11± 1       | 11± 1         | 11± 1           |                 |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz)MCS0~4     |             |               |                 |                 |             |
| Channel                             | Channel 56  | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 11          | 11            | 11              | 11              |             |
| Tune-up(dB)                         | 11± 1       | 11± 1         | 11± 1           | 11± 1           |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz)MCS5~ MCS8 |             |               |                 |                 |             |
| Channel                             | Channel 56  | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 11          | 11            | 11              | 11              |             |
| Tune-up(dB)                         | 11± 1       | 11± 1         | 11± 1           | 11± 1           |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz) MCS9      |             |               |                 |                 |             |
| Channel                             | Channel 56  | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 11          | 11            | 11              | 11              |             |
| Tune-up(dB)                         | 11± 1       | 11± 1         | 11± 1           | 11± 1           |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.8GHz)MCS0~4     |             |               |                 |                 |             |
| Channel                             | Channel 149 | Channel 153   | Channel 157     | Channel 161     | Channel 165 |
| Target (dBm)                        | 11          | 11            | 11              | 11              | 11          |



|                                    |             |             |             |             |             |
|------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Tune-up(dB)                        | 11± 1       | 11± 1       | 11± 1       | 11± 1       | 11± 1       |
| WiFi 802.11ac-20 (5.8GHz)MCS5~MCS8 |             |             |             |             |             |
| Channel                            | Channel 149 | Channel 153 | Channel 157 | Channel 161 | Channel 165 |
| Target (dBm)                       | 11          | 11          | 11          | 11          | 11          |
| Tune-up(dB)                        | 11± 1       | 11± 1       | 11± 1       | 11± 1       | 11± 1       |
| WiFi 802.11ac-20 (5.8GHz)MCS9      |             |             |             |             |             |
| Channel                            | Channel 149 | Channel 153 | Channel 157 | Channel 161 | Channel 165 |
| Target (dBm)                       | 11          | 11          | 11          | 11          | 11          |
| Tune-up(dB)                        | 11± 1       | 11± 1       | 11± 1       | 11± 1       | 11± 1       |

|                                          |            |            |  |  |
|------------------------------------------|------------|------------|--|--|
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS0~ MCS4 |            |            |  |  |
| Channel                                  | Channel 38 | Channel 46 |  |  |
| Target (dBm)                             | 11         | 11         |  |  |
| Tune-up(dB)                              | 11± 1      | 11± 1      |  |  |
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS5~CS8   |            |            |  |  |
| Channel                                  | Channel 38 | Channel 46 |  |  |
| Target (dBm)                             | 11         | 11         |  |  |
| Tune-up(dB)                              | 11± 1      | 11± 1      |  |  |
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS9       |            |            |  |  |
| Channel                                  | Channel 38 | Channel 46 |  |  |
| Target (dBm)                             | 11         | 11         |  |  |
| Tune-up(dB)                              | 11± 1      | 11± 1      |  |  |

|                                          |                |                    |                |                |
|------------------------------------------|----------------|--------------------|----------------|----------------|
| WiFi 802.11ac-40 (5.5~5.6GHz) MCS0~ MCS4 |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 11             | 11                 | 11             | 11             |
| Tune-<br>up(dB)                          | 11± 1          | 11± 1              | 11± 1          | 11± 1          |
| WiFi 802.11ac-40 (5.5~5.6GHz) MCS5~ MCS8 |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 11             | 11                 | 11             | 11             |
| Tune-<br>up(dB)                          | 11± 1          | 11± 1              | 11± 1          | 11± 1          |
| WiFi 802.11ac-40 (5.5~5.6GHz) CS9        |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 11             | 11                 | 11             | 11             |
| Tune-<br>up(dB)                          | 11± 1          | 11± 1              | 11± 1          | 11± 1          |
| WiFi 802.11ac-40 (5.8GHz) MCS0~ MCS4     |                |                    |                |                |
| Data<br>Rate                             | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                          | 11             | 11                 |                |                |
| Tune-<br>up(dB)                          | 11± 1          | 11± 1              |                |                |
| WiFi 802.11ac-40 (5.8GHz) MCS5~ MCS8     |                |                    |                |                |
| Data<br>Rate                             | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                          | 11             | 11                 |                |                |
| Tune-<br>up(dB)                          | 11± 1          | 11± 1              |                |                |
| WiFi 802.11ac-40 (5.8GHz) MCS9           |                |                    |                |                |

|                 |                |                |  |  |
|-----------------|----------------|----------------|--|--|
| Channel         | Channel<br>151 | Channel<br>159 |  |  |
| Target<br>(dBm) | 11             | 11             |  |  |
| Tune-<br>up(dB) | 11± 1          | 11± 1          |  |  |
|                 |                |                |  |  |

|                             |                |                |                |                |
|-----------------------------|----------------|----------------|----------------|----------------|
| WiFi 802.11ac-80 MCS0~ MCS4 |                |                |                |                |
| Data<br>Rate                | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 11             | 11             | 11             | 11             |
| Tune-<br>up(dB)             | 11± 1          | 11± 1          | 11± 1          | 11± 1          |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS5~S8    |                |                |                |                |
| Data<br>Rate                | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 11             | 11             | 11             | 11             |
| Tune-<br>up(dB)             | 11± 1          | 11± 1          | 11± 1          | 11± 1          |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS9       |                |                |                |                |
| Channel                     | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 11             | 11             | 11             | 11             |
| Tune-<br>up(dB)             | 11± 1          | 11± 1          | 11± 1          | 11± 1          |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS0~ MCS4 |                |                |                |                |
| Data<br>Rate                | Channel<br>138 | Channel<br>155 |                |                |
| Target<br>(dBm)             | 11             | 11             |                |                |
| Tune-<br>up(dB)             | 11± 1          | 11± 1          |                |                |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS5~S8    |                |                |                |                |
| Data<br>Rate                | Channel<br>138 | Channel<br>155 |                |                |

|                       |             |             |  |  |
|-----------------------|-------------|-------------|--|--|
| Target (dBm)          | 11          | 11          |  |  |
| Tune-up(dB)           | 11± 1       | 11± 1       |  |  |
| WiFi 802.11ac-80 MCS9 |             |             |  |  |
| Channel               | Channel 138 | Channel 155 |  |  |
| Target (dBm)          | 11          | 11          |  |  |
| Tune-up(dB)           | 11± 1       | 11± 1       |  |  |

The average conducted power for Wi-Fi 5G is as following – DSI1

| 802.11a(dBm)      |       |
|-------------------|-------|
| Channel\data rate | 6Mbps |
| 36(5180 MHz)      | 14.28 |
| 40(5200 MHz)      | 14.46 |
| 44(5220 MHz)      | 14.55 |
| 48(5240 MHz)      | 14.52 |
| 52(5260 MHz)      | 14.55 |
| 56(5280 MHz)      | 14.46 |
| 60(5300 MHz)      | 14.39 |
| 64(5320 MHz)      | 14.46 |
| 100(5500 MHz)     | 14.69 |
| 104(5520 MHz)     | 14.84 |
| 108(5540 MHz)     | 14.76 |
| 112(5560 MHz)     | 14.81 |
| 116(5580 MHz)     | 15.06 |
| 120(5600 MHz)     | 15.04 |
| 124(5620 MHz)     | 15.08 |
| 128(5640 MHz)     | 15.26 |
| 132(5660 MHz)     | 15.21 |
| 136(5680 MHz)     | 15.38 |
| 140(5700 MHz)     | 15.46 |
| 144(5720 MHz)     | 15.42 |
| 149(5745 MHz)     | 15.33 |
| 153(5765 MHz)     | 15.21 |
| 157(5785 MHz)     | 15.22 |
| 161(5805 MHz)     | 15.44 |
| 165(5825 MHz)     | 15.43 |
| Tune up           | 15.50 |

**The tune up power for Wi-Fi 5G is as following – DSI2**

| WiFi 802.11a (5GHz) Low |                  |                    |                    |                    |                    |
|-------------------------|------------------|--------------------|--------------------|--------------------|--------------------|
| 6Mbps~12Mbps            |                  |                    |                    |                    |                    |
| Channel                 | Channel<br>36~48 | Channel<br>100~104 | Channel<br>108~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)         | 17               | 17                 | 17                 | 17                 | 17                 |
| Tune-<br>up(dB)         | 17± 1            | 17± 1              | 17± 1              | 17± 1              | 17± 1              |
| 18Mbps~36Mbps           |                  |                    |                    |                    |                    |
| Channel                 | Channel<br>36~48 | Channel<br>100~108 | Channel<br>112~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)         | 14               | 14                 | 14                 | 14                 | 14                 |
| Tune-<br>up(dB)         | 14± 1            | 14± 1              | 14± 1              | 14± 1              | 14± 1              |
| 48Mbps~54Mbps           |                  |                    |                    |                    |                    |
| Data<br>Rate            | Channel<br>36~48 | Channel<br>100~108 | Channel<br>112~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)         | 14               | 14                 | 14                 | 14                 | 14                 |
| Tune-<br>up(dB)         | 14± 1            | 14± 1              | 14± 1              | 14± 1              | 14± 1              |

| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |               |                  |               |  |
|----------------------------------|---------------|------------------|---------------|--|
| Channel                          | Channel<br>36 | Channel<br>40/44 | Channel<br>48 |  |
| Target<br>(dBm)                  | 14            | 14               | 14            |  |
| Tune-<br>up(dB)                  | 14± 1         | 14± 1            | 14± 1         |  |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |               |                  |               |  |
| Channel                          | Channel<br>36 | Channel<br>40/44 | Channel<br>48 |  |
| Target<br>(dBm)                  | 13            | 13               | 13            |  |
| Tune-<br>up(dB)                  | 13± 1         | 13± 1            | 13± 1         |  |
| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |               |                  |               |  |

| Channel                          | Channel<br>56  | Channel<br>60/64 | Channel<br>100~136 | Channel<br>140/144 |
|----------------------------------|----------------|------------------|--------------------|--------------------|
| Target<br>(dBm)                  | 14             | 14               | 14                 | 14                 |
| Tune-<br>up(dB)                  | 14± 1          | 14± 1            | 14± 1              | 14± 1              |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |                |                  |                    |                    |
| Channel                          | Channel<br>56  | Channel<br>60/64 | Channel<br>100~136 | Channel<br>140/144 |
| Target<br>(dBm)                  | 13             | 13               | 13                 | 13                 |
| Tune-<br>up(dB)                  | 13± 1          | 13± 1            | 13± 1              | 13± 1              |
| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |                |                  |                    |                    |
| Channel                          | Channel<br>149 | Channel<br>153   | Channel<br>157/161 | Channel<br>165     |
| Target<br>(dBm)                  | 13             | 13               | 13                 | 13                 |
| Tune-<br>up(dB)                  | 13± 1          | 13± 1            | 13± 1              | 13± 1              |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |                |                  |                    |                    |
| Channel                          | Channel<br>149 | Channel<br>153   | Channel<br>157/161 | Channel<br>165     |
| Target<br>(dBm)                  | 13             | 13               | 13                 | 13                 |
| Tune-<br>up(dB)                  | 13± 1          | 13± 1            | 13± 1              | 13± 1              |

| WiFi 802.11n-40 (5GHz) MCS0~MCS4 |               |               |  |  |
|----------------------------------|---------------|---------------|--|--|
| Channel                          | Channel<br>38 | Channel<br>46 |  |  |
| Target<br>(dBm)                  | 13            | 13            |  |  |
| Tune-<br>up(dB)                  | 13± 1         | 13± 1         |  |  |
| WiFi 802.11n-40 (5GHz) MCS5~MCS7 |               |               |  |  |

|                                    |                |                    |                |                |
|------------------------------------|----------------|--------------------|----------------|----------------|
| Channel                            | Channel<br>38  | Channel<br>46      |                |                |
| Target<br>(dBm)                    | 13             | 13                 |                |                |
| Tune-<br>up(dB)                    | 13± 1          | 13± 1              |                |                |
| WiFi 802.11n-40 (5GHz) MCS0~MCS4   |                |                    |                |                |
| Channel                            | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                    | 13             | 13                 | 13             | 13             |
| Tune-<br>up(dB)                    | 13± 1          | 13± 1              | 13± 1          | 13± 1          |
| WiFi 802.11n-40 (5GHz) MCS5~MCS7   |                |                    |                |                |
| Channel                            | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                    | 13             | 13                 | 13             | 13             |
| Tune-<br>up(dB)                    | 13± 1          | 13± 1              | 13± 1          | 13± 1          |
| WiFi 802.11n-40 (5.7GHz) MCS0~MCS4 |                |                    |                |                |
| Channel                            | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                    | 13             | 13                 | 13             | 13             |
| Tune-<br>up(dB)                    | 13± 1          | 13± 1              | 13± 1          | 13± 1          |
| WiFi 802.11n-40 (5.7GHz) MCS5~MCS7 |                |                    |                |                |
| Channel                            | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                    | 13             | 13                 | 13             | 13             |
| Tune-<br>up(dB)                    | 13± 1          | 13± 1              | 13± 1          | 13± 1          |

|                                 |
|---------------------------------|
| WiFi 802.11ac-20 (5.2GHz)MCS0~4 |
|---------------------------------|

|                                     |             |               |                 |                 |             |
|-------------------------------------|-------------|---------------|-----------------|-----------------|-------------|
| Channel                             | Channel 36  | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 13.5        | 13.5          | 13.5            |                 |             |
| Tune-up(dB)                         | 13.5± 1     | 13.5± 1       | 13.5± 1         |                 |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.2GHz)MCS5~MCS8  |             |               |                 |                 |             |
| Channel                             | Channel 36  | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 13.5        | 13.5          | 13.5            |                 |             |
| Tune-up(dB)                         | 13.5± 1     | 13.5± 1       | 13.5± 1         |                 |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.2GHz)MCS9       |             |               |                 |                 |             |
| Channel                             | Channel 36  | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 13.5        | 13.5          | 13.5            |                 |             |
| Tune-up(dB)                         | 13.5± 1     | 13.5± 1       | 13.5± 1         |                 |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz)MCS0~4     |             |               |                 |                 |             |
| Channel                             | Channel 56  | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 13.5        | 13.5          | 13.5            | 13.5            |             |
| Tune-up(dB)                         | 13.5± 1     | 13.5± 1       | 13.5± 1         | 13.5± 1         |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz)MCS5~ MCS8 |             |               |                 |                 |             |
| Channel                             | Channel 56  | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 13.5        | 13.5          | 13.5            | 13.5            |             |
| Tune-up(dB)                         | 13.5± 1     | 13.5± 1       | 13.5± 1         | 13.5± 1         |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz) MCS9      |             |               |                 |                 |             |
| Channel                             | Channel 56  | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 13.5        | 13.5          | 13.5            | 13.5            |             |
| Tune-up(dB)                         | 13.5± 1     | 13.5± 1       | 13.5± 1         | 13.5± 1         |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.8GHz)MCS0~4     |             |               |                 |                 |             |
| Channel                             | Channel 149 | Channel 153   | Channel 157     | Channel 161     | Channel 165 |
| Target (dBm)                        | 13.5        | 13.5          | 13.5            | 13.5            | 13.5        |



|                                    |             |             |             |             |             |
|------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Tune-up(dB)                        | 13.5± 1     | 13.5± 1     | 13.5± 1     | 13.5± 1     | 13.5± 1     |
| WiFi 802.11ac-20 (5.8GHz)MCS5~MCS8 |             |             |             |             |             |
| Channel                            | Channel 149 | Channel 153 | Channel 157 | Channel 161 | Channel 165 |
| Target (dBm)                       | 13.5        | 13.5        | 13.5        | 13.5        | 13.5        |
| Tune-up(dB)                        | 13.5± 1     | 13.5± 1     | 13.5± 1     | 13.5± 1     | 13.5± 1     |
| WiFi 802.11ac-20 (5.8GHz)MCS9      |             |             |             |             |             |
| Channel                            | Channel 149 | Channel 153 | Channel 157 | Channel 161 | Channel 165 |
| Target (dBm)                       | 13.5        | 13.5        | 13.5        | 13.5        | 13.5        |
| Tune-up(dB)                        | 13.5± 1     | 13.5± 1     | 13.5± 1     | 13.5± 1     | 13.5± 1     |

|                                          |            |            |  |  |
|------------------------------------------|------------|------------|--|--|
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS0~ MCS4 |            |            |  |  |
| Channel                                  | Channel 38 | Channel 46 |  |  |
| Target (dBm)                             | 13.5       | 13.5       |  |  |
| Tune-up(dB)                              | 13.5± 1    | 13.5± 1    |  |  |
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS5~CS8   |            |            |  |  |
| Channel                                  | Channel 38 | Channel 46 |  |  |
| Target (dBm)                             | 13.5       | 13.5       |  |  |
| Tune-up(dB)                              | 13.5± 1    | 13.5± 1    |  |  |
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS9       |            |            |  |  |
| Channel                                  | Channel 38 | Channel 46 |  |  |
| Target (dBm)                             | 13.5       | 13.5       |  |  |
| Tune-up(dB)                              | 13.5± 1    | 13.5± 1    |  |  |

|                                          |                |                    |                |                |
|------------------------------------------|----------------|--------------------|----------------|----------------|
| WiFi 802.11ac-40 (5.5~5.6GHz) MCS0~ MCS4 |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 13.5           | 13.5               | 13.5           | 13.5           |
| Tune-<br>up(dB)                          | 13.5± 1        | 13.5± 1            | 13.5± 1        | 13.5± 1        |
| WiFi 802.11ac-40 (5.5~5.6GHz) MCS5~ MCS8 |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 13.5           | 13.5               | 13.5           | 13.5           |
| Tune-<br>up(dB)                          | 13.5± 1        | 13.5± 1            | 13.5± 1        | 13.5± 1        |
| WiFi 802.11ac-40 (5.5~5.6GHz) CS9        |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 13.5           | 13.5               | 13.5           | 13.5           |
| Tune-<br>up(dB)                          | 13.5± 1        | 13.5± 1            | 13.5± 1        | 13.5± 1        |
| WiFi 802.11ac-40 (5.8GHz) MCS0~ MCS4     |                |                    |                |                |
| Data<br>Rate                             | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                          | 13.5           | 13.5               |                |                |
| Tune-<br>up(dB)                          | 13.5± 1        | 13.5± 1            |                |                |
| WiFi 802.11ac-40 (5.8GHz) MCS5~ MCS8     |                |                    |                |                |
| Data<br>Rate                             | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                          | 13.5           | 13.5               |                |                |
| Tune-<br>up(dB)                          | 13.5± 1        | 13.5± 1            |                |                |
| WiFi 802.11ac-40 (5.8GHz) MCS9           |                |                    |                |                |

|                 |                |                |  |  |
|-----------------|----------------|----------------|--|--|
| Channel         | Channel<br>151 | Channel<br>159 |  |  |
| Target<br>(dBm) | 13.5           | 13.5           |  |  |
| Tune-<br>up(dB) | 13.5± 1        | 13.5± 1        |  |  |
|                 |                |                |  |  |

| WiFi 802.11ac-80 MCS0~ MCS4 |                |                |                |                |
|-----------------------------|----------------|----------------|----------------|----------------|
| Data<br>Rate                | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 13.5           | 13.5           | 13.5           | 13.5           |
| Tune-<br>up(dB)             | 13.5± 1        | 13.5± 1        | 13.5± 1        | 13.5± 1        |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS5~S8    |                |                |                |                |
| Data<br>Rate                | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 13.5           | 13.5           | 13.5           | 13.5           |
| Tune-<br>up(dB)             | 13.5± 1        | 13.5± 1        | 13.5± 1        | 13.5± 1        |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS9       |                |                |                |                |
| Channel                     | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 13.5           | 13.5           | 13.5           | 13.5           |
| Tune-<br>up(dB)             | 13.5± 1        | 13.5± 1        | 13.5± 1        | 13.5± 1        |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS0~ MCS4 |                |                |                |                |
| Data<br>Rate                | Channel<br>138 | Channel<br>155 |                |                |
| Target<br>(dBm)             | 13.5           | 13.5           |                |                |
| Tune-<br>up(dB)             | 13.5± 1        | 13.5± 1        |                |                |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS5~S8    |                |                |                |                |
| Data<br>Rate                | Channel<br>138 | Channel<br>155 |                |                |

|                       |             |             |  |  |
|-----------------------|-------------|-------------|--|--|
| Target (dBm)          | 13.5        | 13.5        |  |  |
| Tune-up(dB)           | 13.5± 1     | 13.5± 1     |  |  |
| WiFi 802.11ac-80 MCS9 |             |             |  |  |
| Channel               | Channel 138 | Channel 155 |  |  |
| Target (dBm)          | 13.5        | 13.5        |  |  |
| Tune-up(dB)           | 13.5± 1     | 13.5± 1     |  |  |

The average conducted power for Wi-Fi 5G is as following – DSI2

| 802.11a(dBm)      |       |
|-------------------|-------|
| Channel\data rate | 6Mbps |
| 36(5180 MHz)      | 16.43 |
| 40(5200 MHz)      | 16.42 |
| 44(5220 MHz)      | 16.34 |
| 48(5240 MHz)      | 16.33 |
| 52(5260 MHz)      | 16.46 |
| 56(5280 MHz)      | 16.42 |
| 60(5300 MHz)      | 16.33 |
| 64(5320 MHz)      | 16.37 |
| 100(5500 MHz)     | 16.93 |
| 104(5520 MHz)     | 16.84 |
| 108(5540 MHz)     | 16.82 |
| 112(5560 MHz)     | 16.95 |
| 116(5580 MHz)     | 16.82 |
| 120(5600 MHz)     | 16.78 |
| 124(5620 MHz)     | 17.13 |
| 128(5640 MHz)     | 17.01 |
| 132(5660 MHz)     | 17.12 |
| 136(5680 MHz)     | 17.28 |
| 140(5700 MHz)     | 17.37 |
| 144(5720 MHz)     | 17.34 |
| 149(5745 MHz)     | 17.25 |
| 153(5765 MHz)     | 17.32 |
| 157(5785 MHz)     | 17.35 |
| 161(5805 MHz)     | 17.42 |
| 165(5825 MHz)     | 17.46 |
| Tune up           | 18.00 |

**The tune up power for Wi-Fi 5G is as following – DSI3**

| WiFi 802.11a (5GHz) Low |                  |                    |                    |                    |                    |
|-------------------------|------------------|--------------------|--------------------|--------------------|--------------------|
| 6Mbps~12Mbps            |                  |                    |                    |                    |                    |
| Channel                 | Channel<br>36~48 | Channel<br>100~104 | Channel<br>108~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)         | 13               | 13                 | 13                 | 13                 | 13                 |
| Tune-<br>up(dB)         | 13± 1            | 13± 1              | 13± 1              | 13± 1              | 13± 1              |
| 18Mbps~36Mbps           |                  |                    |                    |                    |                    |
| Channel                 | Channel<br>36~48 | Channel<br>100~108 | Channel<br>112~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)         | 10               | 10                 | 10                 | 10                 | 10                 |
| Tune-<br>up(dB)         | 10± 1            | 10± 1              | 10± 1              | 10± 1              | 10± 1              |
| 48Mbps~54Mbps           |                  |                    |                    |                    |                    |
| Data<br>Rate            | Channel<br>36~48 | Channel<br>100~108 | Channel<br>112~124 | Channel<br>128~144 | Channel<br>149~165 |
| Target<br>(dBm)         | 10               | 10                 | 10                 | 10                 | 10                 |
| Tune-<br>up(dB)         | 10± 1            | 10± 1              | 10± 1              | 10± 1              | 10± 1              |

| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |               |                  |               |  |
|----------------------------------|---------------|------------------|---------------|--|
| Channel                          | Channel<br>36 | Channel<br>40/44 | Channel<br>48 |  |
| Target<br>(dBm)                  | 10            | 10               | 10            |  |
| Tune-<br>up(dB)                  | 10± 1         | 10± 1            | 10± 1         |  |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |               |                  |               |  |
| Channel                          | Channel<br>36 | Channel<br>40/44 | Channel<br>48 |  |
| Target<br>(dBm)                  | 9             | 9                | 9             |  |
| Tune-<br>up(dB)                  | 9± 1          | 9± 1             | 9± 1          |  |
| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |               |                  |               |  |

| Channel                          | Channel<br>56  | Channel<br>60/64 | Channel<br>100~136 | Channel<br>140/144 |
|----------------------------------|----------------|------------------|--------------------|--------------------|
| Target<br>(dBm)                  | 10             | 10               | 10                 | 10                 |
| Tune-<br>up(dB)                  | 10± 1          | 10± 1            | 10± 1              | 10± 1              |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |                |                  |                    |                    |
| Channel                          | Channel<br>56  | Channel<br>60/64 | Channel<br>100~136 | Channel<br>140/144 |
| Target<br>(dBm)                  | 9              | 9                | 9                  | 9                  |
| Tune-<br>up(dB)                  | 9± 1           | 9± 1             | 9± 1               | 9± 1               |
| WiFi 802.11n-20 (5GHz) MCS0~MCS4 |                |                  |                    |                    |
| Channel                          | Channel<br>149 | Channel<br>153   | Channel<br>157/161 | Channel<br>165     |
| Target<br>(dBm)                  | 9              | 9                | 9                  | 9                  |
| Tune-<br>up(dB)                  | 9± 1           | 9± 1             | 9± 1               | 9± 1               |
| WiFi 802.11n-20 (5GHz) MCS5~MCS7 |                |                  |                    |                    |
| Channel                          | Channel<br>149 | Channel<br>153   | Channel<br>157/161 | Channel<br>165     |
| Target<br>(dBm)                  | 9              | 9                | 9                  | 9                  |
| Tune-<br>up(dB)                  | 9± 1           | 9± 1             | 9± 1               | 9± 1               |

| WiFi 802.11n-40 (5GHz) MCS0~MCS4 |               |               |  |  |
|----------------------------------|---------------|---------------|--|--|
| Channel                          | Channel<br>38 | Channel<br>46 |  |  |
| Target<br>(dBm)                  | 9             | 9             |  |  |
| Tune-<br>up(dB)                  | 9± 1          | 9± 1          |  |  |
| WiFi 802.11n-40 (5GHz) MCS5~MCS7 |               |               |  |  |

|                                    |                |                    |                |                |
|------------------------------------|----------------|--------------------|----------------|----------------|
| Channel                            | Channel<br>38  | Channel<br>46      |                |                |
| Target<br>(dBm)                    | 9              | 9                  |                |                |
| Tune-<br>up(dB)                    | 9± 1           | 9± 1               |                |                |
| WiFi 802.11n-40 (5GHz) MCS0~MCS4   |                |                    |                |                |
| Channel                            | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                    | 9              | 9                  | 9              | 9              |
| Tune-<br>up(dB)                    | 9± 1           | 9± 1               | 9± 1           | 9± 1           |
| WiFi 802.11n-40 (5GHz) MCS5~MCS7   |                |                    |                |                |
| Channel                            | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                    | 9              | 9                  | 9              | 9              |
| Tune-<br>up(dB)                    | 9± 1           | 9± 1               | 9± 1           | 9± 1           |
| WiFi 802.11n-40 (5.7GHz) MCS0~MCS4 |                |                    |                |                |
| Channel                            | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                    | 9              | 9                  | 9              | 9              |
| Tune-<br>up(dB)                    | 9± 1           | 9± 1               | 9± 1           | 9± 1           |
| WiFi 802.11n-40 (5.7GHz) MCS5~MCS7 |                |                    |                |                |
| Channel                            | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                    | 9              | 9                  | 9              | 9              |
| Tune-<br>up(dB)                    | 9± 1           | 9± 1               | 9± 1           | 9± 1           |

|                                 |
|---------------------------------|
| WiFi 802.11ac-20 (5.2GHz)MCS0~4 |
|---------------------------------|

|                                     |             |               |                 |                 |             |
|-------------------------------------|-------------|---------------|-----------------|-----------------|-------------|
| Channel                             | Channel 36  | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 9           | 9             | 9               |                 |             |
| Tune-up(dB)                         | 9± 1        | 9± 1          | 9± 1            |                 |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.2GHz)MCS5~MCS8  |             |               |                 |                 |             |
| Channel                             | Channel 36  | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 9           | 9             | 9               |                 |             |
| Tune-up(dB)                         | 9± 1        | 9± 1          | 9± 1            |                 |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.2GHz)MCS9       |             |               |                 |                 |             |
| Channel                             | Channel 36  | Channel 40/44 | Channel 48      |                 |             |
| Target (dBm)                        | 9           | 9             | 9               |                 |             |
| Tune-up(dB)                         | 9± 1        | 9± 1          | 9± 1            |                 |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz)MCS0~4     |             |               |                 |                 |             |
| Channel                             | Channel 56  | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 9           | 9             | 9               | 9               |             |
| Tune-up(dB)                         | 9± 1        | 9± 1          | 9± 1            | 9± 1            |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz)MCS5~ MCS8 |             |               |                 |                 |             |
| Channel                             | Channel 56  | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 9           | 9             | 9               | 9               |             |
| Tune-up(dB)                         | 9± 1        | 9± 1          | 9± 1            | 9± 1            |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.3GHz) MCS9      |             |               |                 |                 |             |
| Channel                             | Channel 56  | Channel 60/64 | Channel 100~136 | Channel 140/144 |             |
| Target (dBm)                        | 9           | 9             | 9               | 9               |             |
| Tune-up(dB)                         | 9± 1        | 9± 1          | 9± 1            | 9± 1            |             |
|                                     |             |               |                 |                 |             |
| WiFi 802.11ac-20 (5.8GHz)MCS0~4     |             |               |                 |                 |             |
| Channel                             | Channel 149 | Channel 153   | Channel 157     | Channel 161     | Channel 165 |
| Target (dBm)                        | 9           | 9             | 9               | 9               | 9           |



|                                    |             |             |             |             |             |
|------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Tune-up(dB)                        | 9± 1        | 9± 1        | 9± 1        | 9± 1        | 9± 1        |
| WiFi 802.11ac-20 (5.8GHz)MCS5~MCS8 |             |             |             |             |             |
| Channel                            | Channel 149 | Channel 153 | Channel 157 | Channel 161 | Channel 165 |
| Target (dBm)                       | 9           | 9           | 9           | 9           | 9           |
| Tune-up(dB)                        | 9± 1        | 9± 1        | 9± 1        | 9± 1        | 9± 1        |
| WiFi 802.11ac-20 (5.8GHz)MCS9      |             |             |             |             |             |
| Channel                            | Channel 149 | Channel 153 | Channel 157 | Channel 161 | Channel 165 |
| Target (dBm)                       | 9           | 9           | 9           | 9           | 9           |
| Tune-up(dB)                        | 9± 1        | 9± 1        | 9± 1        | 9± 1        | 9± 1        |

|                                          |            |            |  |  |
|------------------------------------------|------------|------------|--|--|
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS0~ MCS4 |            |            |  |  |
| Channel                                  | Channel 38 | Channel 46 |  |  |
| Target (dBm)                             | 9          | 9          |  |  |
| Tune-up(dB)                              | 9± 1       | 9± 1       |  |  |
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS5~CS8   |            |            |  |  |
| Channel                                  | Channel 38 | Channel 46 |  |  |
| Target (dBm)                             | 9          | 9          |  |  |
| Tune-up(dB)                              | 9± 1       | 9± 1       |  |  |
| WiFi 802.11ac-40 (5.2~5.3GHz) MCS9       |            |            |  |  |
| Channel                                  | Channel 38 | Channel 46 |  |  |
| Target (dBm)                             | 9          | 9          |  |  |
| Tune-up(dB)                              | 9± 1       | 9± 1       |  |  |

|                                          |                |                    |                |                |
|------------------------------------------|----------------|--------------------|----------------|----------------|
| WiFi 802.11ac-40 (5.5~5.6GHz) MCS0~ MCS4 |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 9              | 9                  | 9              | 9              |
| Tune-<br>up(dB)                          | 9± 1           | 9± 1               | 9± 1           | 9± 1           |
| WiFi 802.11ac-40 (5.5~5.6GHz) MCS5~ MCS8 |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 9              | 9                  | 9              | 9              |
| Tune-<br>up(dB)                          | 9± 1           | 9± 1               | 9± 1           | 9± 1           |
| WiFi 802.11ac-40 (5.5~5.6GHz) CS9        |                |                    |                |                |
| Channel                                  | Channel<br>102 | Channel<br>110~126 | Channel<br>134 | Channel<br>142 |
| Target<br>(dBm)                          | 9              | 9                  | 9              | 9              |
| Tune-<br>up(dB)                          | 9± 1           | 9± 1               | 9± 1           | 9± 1           |
| WiFi 802.11ac-40 (5.8GHz) MCS0~ MCS4     |                |                    |                |                |
| Data<br>Rate                             | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                          | 9              | 9                  |                |                |
| Tune-<br>up(dB)                          | 9± 1           | 9± 1               |                |                |
| WiFi 802.11ac-40 (5.8GHz) MCS5~ MCS8     |                |                    |                |                |
| Data<br>Rate                             | Channel<br>151 | Channel<br>159     |                |                |
| Target<br>(dBm)                          | 9              | 9                  |                |                |
| Tune-<br>up(dB)                          | 9± 1           | 9± 1               |                |                |
| WiFi 802.11ac-40 (5.8GHz) MCS9           |                |                    |                |                |

|                 |                |                |  |  |
|-----------------|----------------|----------------|--|--|
| Channel         | Channel<br>151 | Channel<br>159 |  |  |
| Target<br>(dBm) | 9              | 9              |  |  |
| Tune-<br>up(dB) | 9± 1           | 9± 1           |  |  |
|                 |                |                |  |  |

|                             |                |                |                |                |
|-----------------------------|----------------|----------------|----------------|----------------|
| WiFi 802.11ac-80 MCS0~ MCS4 |                |                |                |                |
| Data<br>Rate                | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 9              | 9              | 9              | 9              |
| Tune-<br>up(dB)             | 9± 1           | 9± 1           | 9± 1           | 9± 1           |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS5~S8    |                |                |                |                |
| Data<br>Rate                | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 9              | 9              | 9              | 9              |
| Tune-<br>up(dB)             | 9± 1           | 9± 1           | 9± 1           | 9± 1           |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS9       |                |                |                |                |
| Channel                     | Channel<br>42  | Channel<br>58  | Channel<br>106 | Channel<br>122 |
| Target<br>(dBm)             | 9              | 9              | 9              | 9              |
| Tune-<br>up(dB)             | 9± 1           | 9± 1           | 9± 1           | 9± 1           |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS0~ MCS4 |                |                |                |                |
| Data<br>Rate                | Channel<br>138 | Channel<br>155 |                |                |
| Target<br>(dBm)             | 9              | 9              |                |                |
| Tune-<br>up(dB)             | 9± 1           | 9± 1           |                |                |
|                             |                |                |                |                |
| WiFi 802.11ac-80 MCS5~S8    |                |                |                |                |
| Data<br>Rate                | Channel<br>138 | Channel<br>155 |                |                |

|                       |             |             |  |  |
|-----------------------|-------------|-------------|--|--|
| Target (dBm)          | 9           | 9           |  |  |
| Tune-up(dB)           | 9± 1        | 9± 1        |  |  |
| WiFi 802.11ac-80 MCS9 |             |             |  |  |
| Channel               | Channel 138 | Channel 155 |  |  |
| Target (dBm)          | 9           | 9           |  |  |
| Tune-up(dB)           | 9± 1        | 9± 1        |  |  |

The average conducted power for Wi-Fi 5G is as following – DSI3

| 802.11a(dBm)      |       |
|-------------------|-------|
| Channel\data rate | 6Mbps |
| 36(5180 MHz)      | 12.45 |
| 40(5200 MHz)      | 12.81 |
| 44(5220 MHz)      | 12.88 |
| 48(5240 MHz)      | 12.84 |
| 52(5260 MHz)      | 13.11 |
| 56(5280 MHz)      | 12.87 |
| 60(5300 MHz)      | 12.74 |
| 64(5320 MHz)      | 13.03 |
| 100(5500 MHz)     | 12.99 |
| 104(5520 MHz)     | 13.02 |
| 108(5540 MHz)     | 13.24 |
| 112(5560 MHz)     | 13.26 |
| 116(5580 MHz)     | 13.29 |
| 120(5600 MHz)     | 13.17 |
| 124(5620 MHz)     | 13.35 |
| 128(5640 MHz)     | 13.53 |
| 132(5660 MHz)     | 13.46 |
| 136(5680 MHz)     | 13.88 |
| 140(5700 MHz)     | 13.91 |
| 144(5720 MHz)     | 13.89 |
| 149(5745 MHz)     | 13.64 |
| 153(5765 MHz)     | 13.56 |
| 157(5785 MHz)     | 13.83 |
| 161(5805 MHz)     | 13.89 |
| 165(5825 MHz)     | 13.92 |
| Tune up           | 14.00 |


## 12 Simultaneous TX SAR Considerations

### 12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

### 12.2 Transmit Antenna Separation Distances

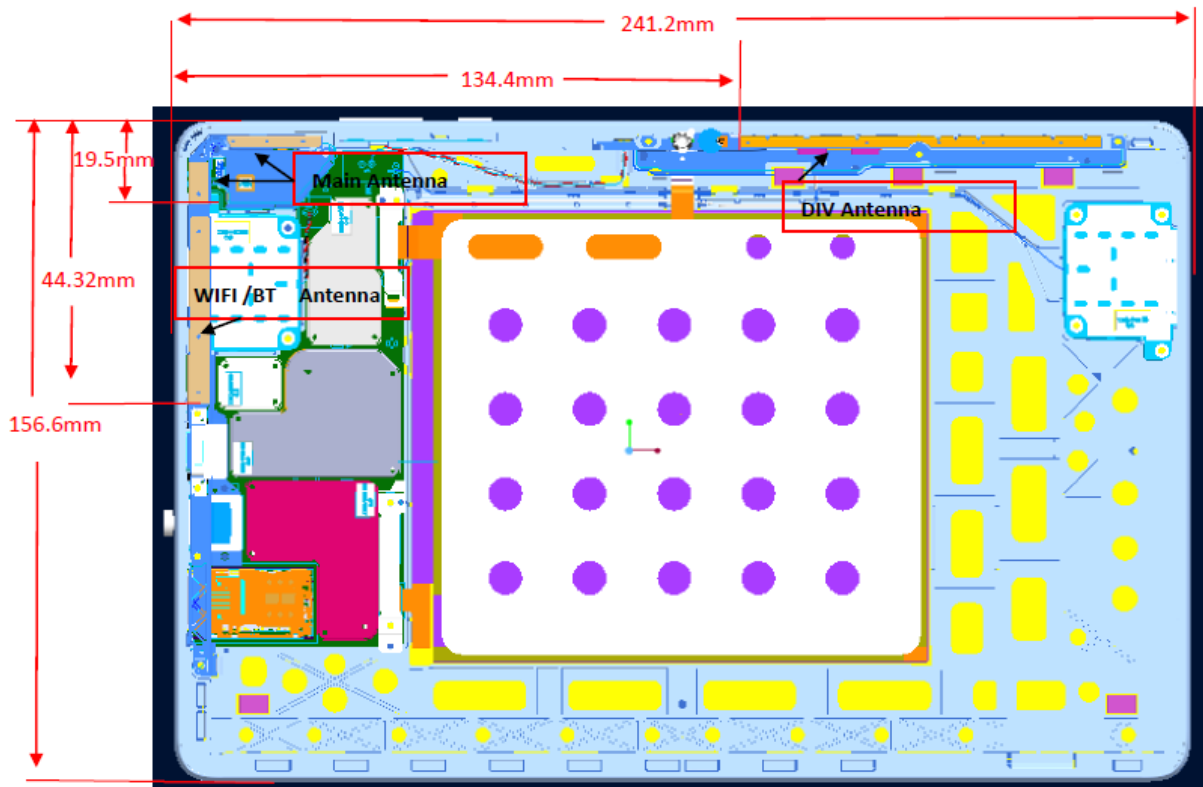

Picture 23 Antenna Locations

### 12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

| SAR measurement positions |       |      |           |            |          |             |
|---------------------------|-------|------|-----------|------------|----------|-------------|
| Mode                      | Front | Rear | Left edge | Right edge | Top edge | Bottom edge |
| WWAN                      | No    | Yes  | Yes       | No         | Yes      | No          |
| WIFI ANT                  | No    | Yes  | Yes       | No         | Yes      | No          |

### 13 Evaluation of Simultaneous

**Table 13.1: The sum of SAR values for Main antenna + WiFi-2.4G**

|                                   | Position                 | Main antenna | WiFi-2.4G | Sum         |
|-----------------------------------|--------------------------|--------------|-----------|-------------|
| <b>Highest SAR value for Body</b> | Rear 0mm<br>(LTE B66)    | 0.72         | 0.64      | <b>1.36</b> |
| <b>Highest SAR value for Body</b> | Left 0mm<br>(WCDMA 1900) | 0.53         | 0.98      | <b>1.51</b> |

**Table 13.2: The sum of SAR values for Main antenna + WiFi-5G +BT**

|                                   | Position                 | Main antenna | WiFi-5G | BT   | Sum         |
|-----------------------------------|--------------------------|--------------|---------|------|-------------|
| <b>Highest SAR value for Body</b> | Rear 0mm<br>(LTE B66)    | 0.72         | 0.68    | 0.08 | <b>1.48</b> |
| <b>Highest SAR value for Body</b> | Left 0mm<br>(WCDMA 1900) | 0.53         | 0.65    | 0.24 | <b>1.42</b> |

#### Conclusion:

According to the above tables, the sum of reported SAR values is <1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

## 14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10 mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where  $P_{\text{Target}}$  is the power of manufacturing upper limit;

$P_{\text{Measured}}$  is the measured power in chapter 11.

**Table 14.1: Duty Cycle**

| Mode                | Duty Cycle |
|---------------------|------------|
| GPRS/EGPRS 850/1900 | 1:4        |
| WCDMA&LTE FDD       | 1:1        |
| LTE TDD             | 1:1.58     |

## 14.1 SAR results for 2G/3G/4G

**Table 14.1-1: SAR Values - GSM 850/GSM1900**

| Test Position | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position   | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|---------------|----------------|----------------|-----------------|-----------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| Body          | GSM850         | 251            | 848.8           | GPRS2/Rear 17mm       | /            | 30.03                    | 31            | 0.177                  | <b>0.22</b>              | 0.121                   | <b>0.15</b>               | -0.06       |
| Body          | GSM850         | 190            | 836.6           | GPRS2/Rear 17mm       | /            | 30.03                    | 31            | 0.161                  | <b>0.20</b>              | 0.11                    | <b>0.14</b>               | -0.03       |
| Body          | GSM850         | 128            | 824.2           | GPRS2/Rear 17mm       | /            | 30.02                    | 31            | 0.13                   | <b>0.16</b>              | 0.088                   | <b>0.11</b>               | -0.15       |
| Body          | GSM850         | 190            | 836.6           | GPRS2/Left Edge 11mm  | /            | 30.03                    | 31            | 0.139                  | <b>0.17</b>              | 0.094                   | <b>0.12</b>               | 0.05        |
| Body          | GSM850         | 190            | 836.6           | GPRS2/Top Edge 11mm   | /            | 30.03                    | 31            | 0.117                  | <b>0.15</b>              | 0.078                   | <b>0.10</b>               | 0.14        |
| Body          | GSM850         | 251            | 848.8           | EGPRS2/Rear 17mm      | /            | 30.02                    | 31            | 0.173                  | <b>0.22</b>              | 0.117                   | <b>0.15</b>               | 0.15        |
| Body          | GSM850         | 251            | 848.8           | GPRS2/Rear 0mm        | Note1        | 23.99                    | 25            | 0.43                   | <b>0.54</b>              | 0.169                   | <b>0.21</b>               | -0.13       |
| Body          | GSM850         | 190            | 836.6           | GPRS2/Rear 0mm        | Note1        | 24.13                    | 25            | 0.451                  | <b>0.55</b>              | 0.178                   | <b>0.22</b>               | -0.03       |
| Body          | GSM850         | 128            | 824.2           | GPRS2/Rear 0mm        | Note1/1      | 24.29                    | 25            | 0.474                  | <b>0.56</b>              | 0.191                   | <b>0.22</b>               | -0.14       |
| Body          | GSM850         | 190            | 836.6           | GPRS2/Left Edge 0mm   | Note1        | 24.13                    | 25            | 0.201                  | <b>0.25</b>              | 0.083                   | <b>0.10</b>               | 0.12        |
| Body          | GSM850         | 190            | 836.6           | GPRS2/Top Edge 0mm    | Note1        | 24.13                    | 25            | 0.256                  | <b>0.31</b>              | 0.117                   | <b>0.14</b>               | -0.04       |
| Body          | GSM850         | 128            | 824.2           | EGPRS2/Rear 0mm       | Note1        | 24.27                    | 25            | 0.463                  | <b>0.55</b>              | 0.184                   | <b>0.22</b>               | 0.06        |
| Body          | GSM1900        | 661            | 1880            | GPRS2/Rear 17mm       | /            | 27.46                    | 28.5          | 0.22                   | <b>0.28</b>              | 0.131                   | <b>0.17</b>               | -0.18       |
| Body          | GSM1900        | 810            | 1909.8          | GPRS2/Left Edge 11mm  | /            | 27.61                    | 28.5          | 0.244                  | <b>0.30</b>              | 0.147                   | <b>0.18</b>               | -0.09       |
| Body          | GSM1900        | 661            | 1880            | GPRS2/Left Edge 11mm  | /            | 27.46                    | 28.5          | 0.258                  | <b>0.33</b>              | 0.152                   | <b>0.19</b>               | -0.02       |
| Body          | GSM1900        | 512            | 1850.2          | GPRS2/Left Edge 11mm  | /            | 27.18                    | 28.5          | 0.237                  | <b>0.32</b>              | 0.151                   | <b>0.20</b>               | 0.16        |
| Body          | GSM1900        | 661            | 1880            | GPRS2/Top Edge 11mm   | /            | 27.46                    | 28.5          | 0.251                  | <b>0.32</b>              | 0.147                   | <b>0.19</b>               | -0.18       |
| Body          | GSM1900        | 661            | 1880            | EGPRS2/Left Edge 11mm | /            | 27.39                    | 28.5          | 0.241                  | <b>0.31</b>              | 0.144                   | <b>0.19</b>               | 0.15        |
| Body          | GSM1900        | 810            | 1909.8          | GPRS2/Rear 0mm        | Note1        | 20.01                    | 21            | 0.459                  | <b>0.58</b>              | 0.22                    | <b>0.28</b>               | 0.13        |
| Body          | GSM1900        | 661            | 1880            | GPRS2/Rear 0mm        | Note1/2      | 19.75                    | 21            | 0.462                  | <b>0.62</b>              | 0.226                   | <b>0.30</b>               | -0.01       |
| Body          | GSM1900        | 512            | 1850.2          | GPRS2/Rear 0mm        | Note1        | 19.54                    | 21            | 0.429                  | <b>0.60</b>              | 0.209                   | <b>0.29</b>               | -0.03       |
| Body          | GSM1900        | 661            | 1880            | GPRS2/Left Edge 0mm   | Note1        | 19.75                    | 21            | 0.393                  | <b>0.52</b>              | 0.188                   | <b>0.25</b>               | 0.16        |
| Body          | GSM1900        | 661            | 1880            | GPRS2/Top Edge 0mm    | Note1        | 19.75                    | 21            | 0.192                  | <b>0.26</b>              | 0.103                   | <b>0.14</b>               | 0.02        |
| Body          | GSM1900        | 661            | 1880            | EGPRS2/Rear 0mm       | Note1        | 19.72                    | 21            | 0.448                  | <b>0.60</b>              | 0.214                   | <b>0.29</b>               | 0.09        |

Note: The distance between the EUT and the phantom bottom is 11mm/17mm by sensor, the distance for other results is 0mm.

Note1: The results are for DSI1/DSI3.

**Table 14.1-2: SAR Values – WCDMA B2/B4/B5**

| Test Position | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|---------------|----------------|----------------|-----------------|---------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| Body          | WCDMA1900      | 9400           | 1880            | Rear 17mm           | /            | 23.28                    | 24            | 0.307                  | <b>0.36</b>              | 0.193                   | <b>0.23</b>               | -0.1        |
| Body          | WCDMA1900      | 9538           | 1907.6          | Left Edge 11mm      | /            | 23.24                    | 24            | 0.372                  | <b>0.44</b>              | 0.221                   | <b>0.26</b>               | -0.03       |
| Body          | WCDMA1900      | 9400           | 1880            | Left Edge 11mm      | /            | 23.28                    | 24            | 0.364                  | <b>0.43</b>              | 0.213                   | <b>0.25</b>               | 0.09        |
| Body          | WCDMA1900      | 9262           | 1852.4          | Left Edge 11mm      | /            | 23.26                    | 24            | 0.365                  | <b>0.43</b>              | 0.215                   | <b>0.25</b>               | 0.04        |
| Body          | WCDMA1900      | 9400           | 1880            | Top Edge 11mm       | /            | 23.28                    | 24            | 0.34                   | <b>0.40</b>              | 0.202                   | <b>0.24</b>               | 0.01        |
| Body          | WCDMA1900      | 9538           | 1907.6          | Rear 0mm            | Note1/3      | 14.41                    | 15.5          | 0.481                  | <b>0.62</b>              | 0.225                   | <b>0.29</b>               | -0.14       |
| Body          | WCDMA1900      | 9400           | 1880            | Rear 0mm            | Note1        | 14.37                    | 15.5          | 0.418                  | <b>0.54</b>              | 0.207                   | <b>0.27</b>               | 0.11        |
| Body          | WCDMA1900      | 9262           | 1852.4          | Rear 0mm            | Note1        | 14.34                    | 15.5          | 0.401                  | <b>0.52</b>              | 0.208                   | <b>0.27</b>               | -0.07       |
| Body          | WCDMA1900      | 9400           | 1880            | Left Edge 0mm       | Note1        | 14.37                    | 15.5          | 0.411                  | <b>0.53</b>              | 0.212                   | <b>0.28</b>               | 0.02        |
| Body          | WCDMA1900      | 9400           | 1880            | Top Edge 0mm        | Note1        | 14.37                    | 15.5          | 0.216                  | <b>0.28</b>              | 0.123                   | <b>0.16</b>               | -0.01       |
| Body          | WCDMA1700      | 1412           | 1732.5          | Rear 17mm           | /            | 22.97                    | 24            | 0.247                  | <b>0.31</b>              | 0.154                   | <b>0.20</b>               | -0.1        |
| Body          | WCDMA1700      | 1513           | 1752.6          | Left Edge 11mm      | /            | 23.01                    | 24            | 0.232                  | <b>0.29</b>              | 0.141                   | <b>0.18</b>               | 0.02        |
| Body          | WCDMA1700      | 1412           | 1732.5          | Left Edge 11mm      | /            | 22.97                    | 24            | 0.259                  | <b>0.33</b>              | 0.157                   | <b>0.20</b>               | 0.03        |
| Body          | WCDMA1700      | 1312           | 1712.4          | Left Edge 11mm      | /            | 22.93                    | 24            | 0.275                  | <b>0.35</b>              | 0.166                   | <b>0.21</b>               | -0.02       |
| Body          | WCDMA1700      | 1412           | 1732.5          | Top Edge 11mm       | /            | 22.97                    | 24            | 0.206                  | <b>0.26</b>              | 0.125                   | <b>0.16</b>               | 0.05        |
| Body          | WCDMA1700      | 1513           | 1752.6          | Rear 0mm            | Note1        | 14.06                    | 15.5          | 0.431                  | <b>0.60</b>              | 0.224                   | <b>0.31</b>               | -0.09       |
| Body          | WCDMA1700      | 1412           | 1732.5          | Rear 0mm            | Note1        | 14.12                    | 15.5          | 0.456                  | <b>0.63</b>              | 0.233                   | <b>0.32</b>               | -0.09       |
| Body          | WCDMA1700      | 1312           | 1712.4          | Rear 0mm            | Note1/4      | 14.13                    | 15.5          | 0.482                  | <b>0.66</b>              | 0.244                   | <b>0.33</b>               | -0.08       |
| Body          | WCDMA1700      | 1412           | 1732.5          | Left Edge 0mm       | Note1        | 14.12                    | 15.5          | 0.29                   | <b>0.40</b>              | 0.125                   | <b>0.17</b>               | -0.01       |
| Body          | WCDMA1700      | 1412           | 1732.5          | Top Edge 0mm        | Note1        | 14.12                    | 15.5          | 0.167                  | <b>0.23</b>              | 0.087                   | <b>0.12</b>               | 0.17        |
| Body          | WCDMA 850      | 4233           | 846.6           | Rear 17mm           | /            | 23.34                    | 24            | 0.172                  | <b>0.20</b>              | 0.119                   | <b>0.14</b>               | -0.08       |
| Body          | WCDMA 850      | 4183           | 836.6           | Rear 17mm           | /            | 23.29                    | 24            | 0.165                  | <b>0.19</b>              | 0.115                   | <b>0.14</b>               | 0.14        |
| Body          | WCDMA 850      | 4132           | 826.4           | Rear 17mm           | /            | 23.26                    | 24            | 0.157                  | <b>0.19</b>              | 0.108                   | <b>0.13</b>               | 0.16        |
| Body          | WCDMA 850      | 4183           | 836.6           | Left Edge 11mm      | /            | 23.29                    | 24            | 0.142                  | <b>0.17</b>              | 0.097                   | <b>0.11</b>               | -0.06       |
| Body          | WCDMA 850      | 4183           | 836.6           | Top Edge 11mm       | /            | 23.29                    | 24            | 0.13                   | <b>0.15</b>              | 0.087                   | <b>0.10</b>               | 0.17        |
| Body          | WCDMA 850      | 4233           | 846.6           | Rear 0mm            | Note1        | 15.93                    | 16.5          | 0.459                  | <b>0.52</b>              | 0.183                   | <b>0.21</b>               | 0.13        |
| Body          | WCDMA 850      | 4183           | 836.6           | Rear 0mm            | Note1/5      | 15.87                    | 16.5          | 0.469                  | <b>0.54</b>              | 0.188                   | <b>0.22</b>               | 0.06        |
| Body          | WCDMA 850      | 4132           | 826.4           | Rear 0mm            | Note1        | 15.85                    | 16.5          | 0.462                  | <b>0.54</b>              | 0.184                   | <b>0.21</b>               | -0.05       |
| Body          | WCDMA 850      | 4183           | 836.6           | Left Edge 0mm       | Note1        | 15.87                    | 16.5          | 0.131                  | <b>0.15</b>              | 0.055                   | <b>0.06</b>               | -0.17       |
| Body          | WCDMA 850      | 4183           | 836.6           | Top Edge 0mm        | Note1        | 15.87                    | 16.5          | 0.234                  | <b>0.27</b>              | 0.107                   | <b>0.12</b>               | 0.02        |

Note: The distance between the EUT and the phantom bottom is 11mm/17mm by sensor, the distance for other results is 0mm.

Note1: The results are for DSI1/DSI3.



**Table 14.1-3: SAR Values – LTE B2/B5**

| Test Position | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position     | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|---------------|----------------|----------------|-----------------|-------------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| Body          | LTE Band2      | 19100          | 1900            | 1RB-Mid Rear 17mm       | /            | 22.98                    | 24            | 0.303                  | <b>0.38</b>              | 0.133                   | <b>0.17</b>               | 0.12        |
| Body          | LTE Band2      | 19100          | 1900            | 1RB-Mid Left Edge 11mm  | /            | 22.98                    | 24            | 0.367                  | <b>0.46</b>              | 0.219                   | <b>0.28</b>               | -0.04       |
| Body          | LTE Band2      | 19100          | 1900            | 1RB-Mid Top Edge 11mm   | /            | 22.98                    | 24            | 0.301                  | <b>0.38</b>              | 0.129                   | <b>0.16</b>               | -0.11       |
| Body          | LTE Band2      | 19100          | 1900            | 50RB-Low Rear 17mm      | /            | 22.11                    | 23            | 0.247                  | <b>0.30</b>              | 0.108                   | <b>0.13</b>               | -0.12       |
| Body          | LTE Band2      | 19100          | 1900            | 50RB-Low Left Edge 11mm | /            | 22.11                    | 23            | 0.338                  | <b>0.41</b>              | 0.135                   | <b>0.17</b>               | 0.15        |
| Body          | LTE Band2      | 19100          | 1900            | 50RB-Low Top Edge 11mm  | /            | 22.11                    | 23            | 0.245                  | <b>0.30</b>              | 0.104                   | <b>0.13</b>               | 0.18        |
| Body          | LTE Band2      | 19100          | 1900            | 1RB-Mid Rear 0mm        | Note1/6      | 15.01                    | 16            | 0.479                  | <b>0.60</b>              | 0.228                   | <b>0.29</b>               | -0.05       |
| Body          | LTE Band2      | 19100          | 1900            | 1RB-Mid Left Edge 0mm   | Note1        | 15.01                    | 16            | 0.425                  | <b>0.53</b>              | 0.176                   | <b>0.22</b>               | -0.11       |
| Body          | LTE Band2      | 19100          | 1900            | 1RB-Mid Top Edge 0mm    | Note1        | 15.01                    | 16            | 0.247                  | <b>0.31</b>              | 0.116                   | <b>0.15</b>               | 0.16        |
| Body          | LTE Band2      | 19100          | 1900            | 50RB-Low Rear 0mm       | Note1        | 15.12                    | 16            | 0.476                  | <b>0.58</b>              | 0.216                   | <b>0.26</b>               | 0.04        |
| Body          | LTE Band2      | 19100          | 1900            | 50RB-Low Left Edge 0mm  | Note1        | 15.12                    | 16            | 0.405                  | <b>0.50</b>              | 0.18                    | <b>0.22</b>               | -0.06       |
| Body          | LTE Band2      | 19100          | 1900            | 50RB-Low Top Edge 0mm   | Note1        | 15.12                    | 16            | 0.24                   | <b>0.29</b>              | 0.113                   | <b>0.14</b>               | 0.04        |
| Body          | LTE Band5      | 20450          | 829             | 1RB-Mid Rear 17mm       | /            | 23.64                    | 24.5          | 0.161                  | <b>0.20</b>              | 0.111                   | <b>0.14</b>               | -0.12       |
| Body          | LTE Band5      | 20450          | 829             | 1RB-Mid Left Edge 11mm  | /            | 23.64                    | 24.5          | 0.146                  | <b>0.18</b>              | 0.097                   | <b>0.12</b>               | -0.17       |
| Body          | LTE Band5      | 20450          | 829             | 1RB-Mid Top Edge 11mm   | /            | 23.64                    | 24.5          | 0.128                  | <b>0.16</b>              | 0.084                   | <b>0.10</b>               | 0.16        |
| Body          | LTE Band5      | 20450          | 829             | 25RB-Low Rear 17mm      | /            | 22.78                    | 23.5          | 0.125                  | <b>0.15</b>              | 0.086                   | <b>0.10</b>               | -0.16       |
| Body          | LTE Band5      | 20450          | 829             | 25RB-Low Left Edge 11mm | /            | 22.78                    | 23.5          | 0.097                  | <b>0.11</b>              | 0.063                   | <b>0.07</b>               | -0.03       |
| Body          | LTE Band5      | 20450          | 829             | 25RB-Low Top Edge 11mm  | /            | 22.78                    | 23.5          | 0.12                   | <b>0.14</b>              | 0.076                   | <b>0.09</b>               | -0.09       |
| Body          | LTE Band5      | 20450          | 829             | 1RB-Mid Rear 0mm        | Note1/7      | 16.19                    | 17.5          | 0.5                    | <b>0.68</b>              | 0.202                   | <b>0.27</b>               | -0.08       |
| Body          | LTE Band5      | 20450          | 829             | 1RB-Mid Left Edge 0mm   | Note1        | 16.19                    | 17.5          | 0.106                  | <b>0.14</b>              | 0.05                    | <b>0.07</b>               | -0.07       |
| Body          | LTE Band5      | 20450          | 829             | 1RB-Mid Top Edge 0mm    | Note1        | 16.19                    | 17.5          | 0.189                  | <b>0.26</b>              | 0.106                   | <b>0.14</b>               | -0.01       |
| Body          | LTE Band5      | 20450          | 829             | 25RB-Low Rear 0mm       | Note1        | 16.23                    | 17.5          | 0.354                  | <b>0.47</b>              | 0.169                   | <b>0.23</b>               | -0.13       |
| Body          | LTE Band5      | 20450          | 829             | 25RB-Low Left Edge 0mm  | Note1        | 16.23                    | 17.5          | 0.117                  | <b>0.16</b>              | 0.052                   | <b>0.07</b>               | 0.1         |
| Body          | LTE Band5      | 20450          | 829             | 25RB-Low Top Edge 0mm   | Note1        | 16.23                    | 17.5          | 0.17                   | <b>0.23</b>              | 0.099                   | <b>0.13</b>               | -0.08       |

Note: The distance between the EUT and the phantom bottom is 11mm/17mm by sensor, the distance for other results is 0mm.

Note1: The results are for DSI1/DSI3.

**Table 14.1-4: SAR Values – LTE B7**

| Test Position | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position     | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|---------------|----------------|----------------|-----------------|-------------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| Body          | LTE Band7      | 21350          | 2560            | 1RB-Mid Rear 17mm       | /            | 23.3                     | 24            | 1                      | <b>1.17</b>              | 0.488                   | <b>0.57</b>               | 0.06        |
| Body          | LTE Band7      | 21100          | 2535            | 1RB-Mid Rear 17mm       | 8            | 23.38                    | 24            | 1.02                   | <b>1.18</b>              | 0.495                   | <b>0.57</b>               | -0.03       |
| Body          | LTE Band7      | 20850          | 2510            | 1RB-Mid Rear 17mm       | /            | 23.23                    | 24            | 0.862                  | <b>1.03</b>              | 0.433                   | <b>0.52</b>               | 0.01        |
| Body          | LTE Band7      | 21100          | 2535            | 100RB Rear 17mm         | /            | 22.3                     | 23            | 0.859                  | <b>1.01</b>              | 0.411                   | <b>0.48</b>               | 0.09        |
| Body          | LTE Band7      | 21100          | 2535            | 1RB-Mid Left Edge 11mm  | /            | 23.38                    | 24            | 0.674                  | <b>0.78</b>              | 0.356                   | <b>0.41</b>               | 0.11        |
| Body          | LTE Band7      | 21100          | 2535            | 1RB-Mid Top Edge 11mm   | /            | 23.38                    | 24            | 0.677                  | <b>0.78</b>              | 0.332                   | <b>0.38</b>               | -0.02       |
| Body          | LTE Band7      | 21350          | 2560            | 50RB-Low Rear 17mm      | /            | 22.33                    | 23            | 0.821                  | <b>0.96</b>              | 0.395                   | <b>0.46</b>               | 0.17        |
| Body          | LTE Band7      | 21100          | 2535            | 50RB-Low Rear 17mm      | /            | 22.35                    | 23            | 0.832                  | <b>0.97</b>              | 0.403                   | <b>0.47</b>               | 0.03        |
| Body          | LTE Band7      | 20850          | 2510            | 50RB-Low Rear 17mm      | /            | 22.31                    | 23            | 0.786                  | <b>0.92</b>              | 0.376                   | <b>0.44</b>               | -0.04       |
| Body          | LTE Band7      | 21100          | 2535            | 50RB-Low Left Edge 11mm | /            | 22.35                    | 23            | 0.56                   | <b>0.65</b>              | 0.295                   | <b>0.34</b>               | -0.03       |
| Body          | LTE Band7      | 21100          | 2535            | 50RB-Low Top Edge 11mm  | /            | 22.35                    | 23            | 0.561                  | <b>0.65</b>              | 0.274                   | <b>0.32</b>               | -0.07       |
| Body          | LTE Band7      | 21350          | 2560            | 1RB-Mid Rear 0mm        | Note1        | 11.91                    | 13            | 0.768                  | <b>0.99</b>              | 0.288                   | <b>0.37</b>               | -0.13       |
| Body          | LTE Band7      | 21100          | 2535            | 1RB-Mid Rear 0mm        | Note1        | 11.92                    | 13            | 0.791                  | <b>1.01</b>              | 0.296                   | <b>0.38</b>               | -0.03       |
| Body          | LTE Band7      | 20850          | 2510            | 1RB-Mid Rear 0mm        | Note1        | 11.81                    | 13            | 0.834                  | <b>1.10</b>              | 0.303                   | <b>0.40</b>               | -0.03       |
| Body          | LTE Band7      | 20850          | 2510            | 100RB Rear 0mm          | Note1        | 11.77                    | 13            | 0.806                  | <b>1.07</b>              | 0.285                   | <b>0.38</b>               | 0.09        |
| Body          | LTE Band7      | 21100          | 2535            | 1RB-Mid Left Edge 0mm   | Note1        | 11.92                    | 13            | 0.468                  | <b>0.60</b>              | 0.205                   | <b>0.26</b>               | 0.05        |
| Body          | LTE Band7      | 21100          | 2535            | 1RB-Mid Top Edge 0mm    | Note1        | 11.92                    | 13            | 0.475                  | <b>0.61</b>              | 0.177                   | <b>0.23</b>               | 0.15        |
| Body          | LTE Band7      | 21350          | 2560            | 50RB-Mid Rear 0mm       | Note1        | 11.94                    | 13            | 0.701                  | <b>0.89</b>              | 0.186                   | <b>0.24</b>               | 0.06        |
| Body          | LTE Band7      | 21100          | 2535            | 50RB-Mid Rear 0mm       | Note1        | 11.95                    | 13            | 0.75                   | <b>0.96</b>              | 0.219                   | <b>0.28</b>               | -0.16       |
| Body          | LTE Band7      | 20850          | 2510            | 50RB-Mid Rear 0mm       | Note1        | 11.83                    | 13            | 0.722                  | <b>0.95</b>              | 0.201                   | <b>0.26</b>               | -0.11       |
| Body          | LTE Band7      | 21100          | 2535            | 50RB-Mid Left Edge 0mm  | Note1        | 11.95                    | 13            | 0.46                   | <b>0.59</b>              | 0.196                   | <b>0.25</b>               | 0.11        |
| Body          | LTE Band7      | 21100          | 2535            | 50RB-Mid Top Edge 0mm   | Note1        | 11.95                    | 13            | 0.546                  | <b>0.70</b>              | 0.184                   | <b>0.23</b>               | -0.1        |
| Body          | LTE Band7      | 21100          | 2535            | 1RB-Mid Rear 0mm        | Note2        | 9.88                     | 11.5          | 0.482                  | <b>0.70</b>              | 0.174                   | <b>0.25</b>               | -0.03       |
| Body          | LTE Band7      | 21100          | 2535            | 1RB-Mid Left Edge 0mm   | Note2        | 9.88                     | 11.5          | 0.266                  | <b>0.39</b>              | 0.109                   | <b>0.16</b>               | -0.12       |
| Body          | LTE Band7      | 21100          | 2535            | 1RB-Mid Top Edge 0mm    | Note2        | 9.88                     | 11.5          | 0.305                  | <b>0.44</b>              | 0.104                   | <b>0.15</b>               | -0.17       |
| Body          | LTE Band7      | 21100          | 2535            | 50RB-Low Rear 0mm       | Note2        | 9.87                     | 11.5          | 0.48                   | <b>0.70</b>              | 0.178                   | <b>0.26</b>               | 0.01        |
| Body          | LTE Band7      | 21100          | 2535            | 50RB-Low Left Edge 0mm  | Note2        | 9.87                     | 11.5          | 0.254                  | <b>0.37</b>              | 0.107                   | <b>0.16</b>               | -0.04       |
| Body          | LTE Band7      | 21100          | 2535            | 50RB-Low Top Edge 0mm   | Note2        | 9.87                     | 11.5          | 0.295                  | <b>0.43</b>              | 0.102                   | <b>0.15</b>               | -0.08       |

Note: The distance between the EUT and the phantom bottom is 11mm/17mm by sensor, the distance for other results is 0mm.

Note1: The results are for DSI1.

Note2: The results are for DSI3.

Table 14.1-5: SAR Values – LTE B12/B13

| Test Position | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position     | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|---------------|----------------|----------------|-----------------|-------------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| Body          | LTE Band12     | 23095          | 707.5           | 1RB-Mid Rear 17mm       | /            | 23.55                    | 24.5          | 0.132                  | 0.16                     | 0.087                   | 0.11                      | 0.17        |
| Body          | LTE Band12     | 23095          | 707.5           | 1RB-Mid Left Edge 11mm  | /            | 23.55                    | 24.5          | 0.175                  | 0.22                     | 0.12                    | 0.15                      | 0.04        |
| Body          | LTE Band12     | 23095          | 707.5           | 1RB-Mid Top Edge 11mm   | /            | 23.55                    | 24.5          | 0.089                  | 0.11                     | 0.06                    | 0.07                      | -0.08       |
| Body          | LTE Band12     | 23095          | 707.5           | 25RB-Low Rear 17mm      | /            | 22.65                    | 23.5          | 0.09                   | 0.11                     | 0.06                    | 0.07                      | -0.03       |
| Body          | LTE Band12     | 23095          | 707.5           | 25RB-Low Left Edge 11mm | /            | 22.65                    | 23.5          | 0.124                  | 0.15                     | 0.085                   | 0.10                      | -0.12       |
| Body          | LTE Band12     | 23095          | 707.5           | 25RB-Low Top Edge 11mm  | /            | 22.65                    | 23.5          | 0.061                  | 0.07                     | 0.042                   | 0.05                      | -0.11       |
| Body          | LTE Band12     | 23095          | 707.5           | 1RB-Mid Rear 0mm        | Note1/9      | 16.68                    | 18.5          | 0.443                  | 0.67                     | 0.192                   | 0.29                      | -0.06       |
| Body          | LTE Band12     | 23095          | 707.5           | 1RB-Mid Left Edge 0mm   | Note1        | 16.68                    | 18.5          | 0.158                  | 0.24                     | 0.065                   | 0.10                      | -0.13       |
| Body          | LTE Band12     | 23095          | 707.5           | 1RB-Mid Top Edge 0mm    | Note1        | 16.68                    | 18.5          | 0.23                   | 0.35                     | 0.081                   | 0.12                      | 0.13        |
| Body          | LTE Band12     | 23095          | 707.5           | 25RB-High Rear 0mm      | Note1        | 16.65                    | 18.5          | 0.436                  | 0.67                     | 0.187                   | 0.29                      | 0.14        |
| Body          | LTE Band12     | 23095          | 707.5           | 25RB-High Left Edge 0mm | Note1        | 16.65                    | 18.5          | 0.111                  | 0.17                     | 0.066                   | 0.10                      | -0.17       |
| Body          | LTE Band12     | 23095          | 707.5           | 25RB-High Top Edge 0mm  | Note1        | 16.65                    | 18.5          | 0.178                  | 0.27                     | 0.069                   | 0.11                      | -0.1        |
| Body          | LTE Band13     | 23230          | 782             | 1RB-Mid Rear 17mm       | /            | 23.63                    | 24.5          | 0.14                   | 0.17                     | 0.096                   | 0.12                      | 0.17        |
| Body          | LTE Band13     | 23230          | 782             | 1RB-Mid Left Edge 11mm  | /            | 23.63                    | 24.5          | 0.19                   | 0.23                     | 0.13                    | 0.16                      | 0.04        |
| Body          | LTE Band13     | 23230          | 782             | 1RB-Mid Top Edge 11mm   | /            | 23.63                    | 24.5          | 0.097                  | 0.12                     | 0.066                   | 0.08                      | 0.14        |
| Body          | LTE Band13     | 23230          | 782             | 25RB-Low Rear 17mm      | /            | 22.69                    | 23.5          | 0.106                  | 0.13                     | 0.071                   | 0.09                      | -0.11       |
| Body          | LTE Band13     | 23230          | 782             | 25RB-Low Left Edge 11mm | /            | 22.69                    | 23.5          | 0.135                  | 0.16                     | 0.091                   | 0.11                      | 0.07        |
| Body          | LTE Band13     | 23230          | 782             | 25RB-Low Top Edge 11mm  | /            | 22.69                    | 23.5          | 0.079                  | 0.10                     | 0.052                   | 0.06                      | 0.06        |
| Body          | LTE Band13     | 23230          | 782             | 1RB-Mid Rear 0mm        | Note1/10     | 17.66                    | 19            | 0.494                  | 0.67                     | 0.208                   | 0.28                      | -0.01       |
| Body          | LTE Band13     | 23230          | 782             | 1RB-Mid Left Edge 0mm   | Note1        | 17.66                    | 19            | 0.118                  | 0.16                     | 0.058                   | 0.08                      | -0.12       |
| Body          | LTE Band13     | 23230          | 782             | 1RB-Mid Top Edge 0mm    | Note1        | 17.66                    | 19            | 0.226                  | 0.31                     | 0.093                   | 0.13                      | -0.08       |
| Body          | LTE Band13     | 23230          | 782             | 25RB-Low Rear 0mm       | Note1        | 17.66                    | 19            | 0.312                  | 0.42                     | 0.163                   | 0.22                      | 0.1         |
| Body          | LTE Band13     | 23230          | 782             | 25RB-Low Left Edge 0mm  | Note1        | 17.66                    | 19            | 0.115                  | 0.16                     | 0.054                   | 0.07                      | 0.04        |
| Body          | LTE Band13     | 23230          | 782             | 25RB-Low Top Edge 0mm   | Note1        | 17.66                    | 19            | 0.206                  | 0.28                     | 0.085                   | 0.12                      | 0.05        |

Note: The distance between the EUT and the phantom bottom is 11mm/17mm by sensor, the distance for other results is 0mm.

Note1: The results are for DSI1/DSI3.

Table 14.1-6: SAR Values – LTE B41

| Test Position | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position     | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|---------------|----------------|----------------|-----------------|-------------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| Body          | LTE Band41     | 41055          | 2636.5          | 1RB-Mid Rear 17mm       | /            | 23.35                    | 24            | 0.578                  | 0.67                     | 0.284                   | 0.33                      | -0.13       |
| Body          | LTE Band41     | 41055          | 2636.5          | 1RB-Mid Left Edge 11mm  | /            | 23.35                    | 24            | 0.537                  | 0.62                     | 0.283                   | 0.33                      | -0.18       |
| Body          | LTE Band41     | 41055          | 2636.5          | 1RB-Mid Top Edge 11mm   | /            | 23.35                    | 24            | 0.314                  | 0.36                     | 0.164                   | 0.19                      | 0.16        |
| Body          | LTE Band41     | 41055          | 2636.5          | 50RB-Low Rear 17mm      | /            | 22.28                    | 23            | 0.45                   | 0.53                     | 0.221                   | 0.26                      | -0.13       |
| Body          | LTE Band41     | 41055          | 2636.5          | 50RB-Low Left Edge 11mm | /            | 22.28                    | 23            | 0.405                  | 0.48                     | 0.214                   | 0.25                      | 0.09        |
| Body          | LTE Band41     | 41055          | 2636.5          | 50RB-Low Top Edge 11mm  | /            | 22.28                    | 23            | 0.262                  | 0.31                     | 0.136                   | 0.16                      | -0.14       |
| Body          | LTE Band41     | 41490          | 2680            | 1RB-Mid Rear 0mm        | Note1        | 14.35                    | 15.5          | 0.715                  | 0.93                     | 0.258                   | 0.34                      | -0.16       |
| Body          | LTE Band41     | 41055          | 2636.5          | 1RB-Mid Rear 0mm        | Note1        | 14.42                    | 15.5          | 0.768                  | 0.98                     | 0.279                   | 0.36                      | 0.12        |
| Body          | LTE Band41     | 40620          | 2593            | 1RB-Mid Rear 0mm        | Note1        | 14.33                    | 15.5          | 0.812                  | 1.06                     | 0.29                    | 0.38                      | -0.11       |
| Body          | LTE Band41     | 40185          | 2549.5          | 1RB-Mid Rear 0mm        | Note1        | 14.41                    | 15.5          | 0.843                  | 1.08                     | 0.301                   | 0.39                      | -0.18       |
| Body          | LTE Band41     | 39750          | 2506            | 1RB-Mid Rear 0mm        | Note1/11     | 14.33                    | 15.5          | 0.888                  | 1.16                     | 0.317                   | 0.42                      | -0.01       |
| Body          | LTE Band41     | 41055          | 2636.5          | 1RB-Mid Left Edge 0mm   | Note1        | 14.42                    | 15.5          | 0.485                  | 0.62                     | 0.194                   | 0.25                      | -0.04       |
| Body          | LTE Band41     | 41055          | 2636.5          | 1RB-Mid Top Edge 0mm    | Note1        | 14.42                    | 15.5          | 0.368                  | 0.47                     | 0.135                   | 0.17                      | 0.07        |
| Body          | LTE Band41     | 41490          | 2680            | 50RB-Low Rear 0mm       | Note1        | 14.31                    | 15.5          | 0.614                  | 0.81                     | 0.235                   | 0.31                      | -0.15       |
| Body          | LTE Band41     | 41055          | 2636.5          | 50RB-Low Rear 0mm       | Note1        | 14.32                    | 15.5          | 0.66                   | 0.87                     | 0.254                   | 0.33                      | -0.04       |
| Body          | LTE Band41     | 40620          | 2593            | 50RB-Low Rear 0mm       | Note1        | 14.18                    | 15.5          | 0.698                  | 0.95                     | 0.264                   | 0.36                      | 0.06        |
| Body          | LTE Band41     | 40185          | 2549.5          | 50RB-Low Rear 0mm       | Note1        | 14.22                    | 15.5          | 0.724                  | 0.97                     | 0.274                   | 0.37                      | -0.07       |
| Body          | LTE Band41     | 39750          | 2506            | 50RB-Low Rear 0mm       | Note1        | 14.08                    | 15.5          | 0.763                  | 1.06                     | 0.289                   | 0.40                      | 0.06        |
| Body          | LTE Band41     | 41055          | 2636.5          | 50RB-Low Left Edge 0mm  | Note1        | 14.32                    | 15.5          | 0.473                  | 0.62                     | 0.186                   | 0.24                      | 0.01        |
| Body          | LTE Band41     | 41055          | 2636.5          | 50RB-Low Top Edge 0mm   | Note1        | 14.32                    | 15.5          | 0.336                  | 0.44                     | 0.122                   | 0.16                      | -0.04       |
| Body          | LTE Band41     | 39750          | 2506            | 1RB-Mid Rear 0mm        | Note2        | 11.95                    | 13.5          | 0.471                  | 0.67                     | 0.168                   | 0.24                      | 0.01        |
| Body          | LTE Band41     | 39750          | 2506            | 1RB-Mid Left Edge 0mm   | Note2        | 11.95                    | 13.5          | 0.222                  | 0.32                     | 0.096                   | 0.14                      | 0.1         |
| Body          | LTE Band41     | 39750          | 2506            | 1RB-Mid Top Edge 0mm    | Note2        | 11.95                    | 13.5          | 0.159                  | 0.23                     | 0.062                   | 0.09                      | 0.12        |
| Body          | LTE Band41     | 41055          | 2636.5          | 50RB-Low Rear 0mm       | Note2        | 11.84                    | 13.5          | 0.311                  | 0.46                     | 0.138                   | 0.20                      | 0.06        |
| Body          | LTE Band41     | 41055          | 2636.5          | 50RB-Low Left Edge 0mm  | Note2        | 11.84                    | 13.5          | 0.245                  | 0.36                     | 0.095                   | 0.14                      | 0.15        |
| Body          | LTE Band41     | 41055          | 2636.5          | 50RB-Low Top Edge 0mm   | Note2        | 11.84                    | 13.5          | 0.155                  | 0.23                     | 0.06                    | 0.09                      | -0.16       |

Note: The distance between the EUT and the phantom bottom is 11mm/17mm by sensor, the distance for other results is 0mm.

Note1: The results are for DSI1.

Note2: The results are for DSI3.

**Table 14.1-7: SAR Values – LTE B66**

| Test Position | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position     | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|---------------|----------------|----------------|-----------------|-------------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| Body          | LTE Band66     | 132072         | 1720            | 1RB-Mid Rear 17mm       | /            | 23.25                    | 24            | 0.256                  | <b>0.30</b>              | 0.162                   | <b>0.19</b>               | -0.1        |
| Body          | LTE Band66     | 132072         | 1720            | 1RB-Mid Left Edge 11mm  | /            | 23.25                    | 24            | 0.323                  | <b>0.38</b>              | 0.194                   | <b>0.23</b>               | -0.05       |
| Body          | LTE Band66     | 132072         | 1720            | 1RB-Mid Top Edge 11mm   | /            | 23.25                    | 24            | 0.208                  | <b>0.25</b>              | 0.126                   | <b>0.15</b>               | -0.18       |
| Body          | LTE Band66     | 132072         | 1720            | 50RB-Low Rear 17mm      | /            | 22.29                    | 23            | 0.201                  | <b>0.24</b>              | 0.128                   | <b>0.15</b>               | 0.17        |
| Body          | LTE Band66     | 132072         | 1720            | 50RB-Low Left Edge 11mm | /            | 22.29                    | 23            | 0.233                  | <b>0.27</b>              | 0.141                   | <b>0.17</b>               | -0.06       |
| Body          | LTE Band66     | 132072         | 1720            | 50RB-Low Top Edge 11mm  | /            | 22.29                    | 23            | 0.183                  | <b>0.22</b>              | 0.108                   | <b>0.13</b>               | -0.01       |
| Body          | LTE Band66     | 132572         | 1770            | 1RB-Mid Rear 0mm        | Note1        | 17.32                    | 18            | 0.717                  | <b>0.84</b>              | 0.392                   | <b>0.46</b>               | 0.12        |
| Body          | LTE Band66     | 132322         | 1745            | 1RB-Mid Rear 0mm        | Note1/12     | 17.24                    | 18            | 0.824                  | <b>0.98</b>              | 0.419                   | <b>0.50</b>               | -0.05       |
| Body          | LTE Band66     | 132072         | 1720            | 1RB-Mid Rear 0mm        | Note1        | 17.35                    | 18            | 0.763                  | <b>0.89</b>              | 0.413                   | <b>0.48</b>               | -0.07       |
| Body          | LTE Band66     | 132322         | 1745            | 100RB Rear 0mm          | Note1        | 17.25                    | 18            | 0.803                  | <b>0.95</b>              | 0.4                     | <b>0.48</b>               | 0.05        |
| Body          | LTE Band66     | 132072         | 1720            | 1RB-Mid Left Edge 0mm   | Note1        | 17.35                    | 18            | 0.46                   | <b>0.53</b>              | 0.212                   | <b>0.25</b>               | 0.09        |
| Body          | LTE Band66     | 132072         | 1720            | 1RB-Mid Top Edge 0mm    | Note1        | 17.35                    | 18            | 0.287                  | <b>0.33</b>              | 0.149                   | <b>0.17</b>               | -0.15       |
| Body          | LTE Band66     | 132572         | 1770            | 50RB-Low Rear 0mm       | Note1        | 17.33                    | 18            | 0.69                   | <b>0.81</b>              | 0.386                   | <b>0.45</b>               | 0.09        |
| Body          | LTE Band66     | 132322         | 1745            | 50RB-Low Rear 0mm       | Note1        | 17.25                    | 18            | 0.793                  | <b>0.94</b>              | 0.413                   | <b>0.49</b>               | 0.11        |
| Body          | LTE Band66     | 132072         | 1720            | 50RB-Low Rear 0mm       | Note1        | 17.34                    | 18            | 0.735                  | <b>0.86</b>              | 0.406                   | <b>0.47</b>               | -0.02       |
| Body          | LTE Band66     | 132072         | 1720            | 50RB-Low Left Edge 0mm  | Note1        | 17.34                    | 18            | 0.455                  | <b>0.53</b>              | 0.212                   | <b>0.25</b>               | -0.08       |
| Body          | LTE Band66     | 132072         | 1720            | 50RB-Low Top Edge 0mm   | Note1        | 17.34                    | 18            | 0.249                  | <b>0.29</b>              | 0.134                   | <b>0.16</b>               | -0.18       |
| Body          | LTE Band66     | 132072         | 1720            | 1RB-Mid Rear 0mm        | Note2        | 15.12                    | 16.5          | 0.523                  | <b>0.72</b>              | 0.267                   | <b>0.37</b>               | -0.06       |
| Body          | LTE Band66     | 132072         | 1720            | 1RB-Mid Left Edge 0mm   | Note2        | 15.12                    | 16.5          | 0.287                  | <b>0.39</b>              | 0.134                   | <b>0.18</b>               | 0.09        |
| Body          | LTE Band66     | 132072         | 1720            | 1RB-Mid Top Edge 0mm    | Note2        | 15.12                    | 16.5          | 0.185                  | <b>0.25</b>              | 0.092                   | <b>0.13</b>               | 0.01        |
| Body          | LTE Band66     | 132072         | 1720            | 50RB-Low Rear 0mm       | Note2        | 15.15                    | 16.5          | 0.496                  | <b>0.68</b>              | 0.268                   | <b>0.37</b>               | 0.15        |
| Body          | LTE Band66     | 132072         | 1720            | 50RB-Low Left Edge 0mm  | Note2        | 15.15                    | 16.5          | 0.25                   | <b>0.34</b>              | 0.122                   | <b>0.17</b>               | -0.11       |
| Body          | LTE Band66     | 132072         | 1720            | 50RB-Low Top Edge 0mm   | Note2        | 15.15                    | 16.5          | 0.182                  | <b>0.25</b>              | 0.093                   | <b>0.13</b>               | -0.14       |

Note: The distance between the EUT and the phantom bottom is 11mm/17mm by sensor, the distance for other results is 0mm.

Note1: The results are for DSI1.

Note2: The results are for DSI3.

**Table 14.1-8: SAR Values – LTE B26**

| Test Position | Phantom position L/R/F | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position     | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|---------------|------------------------|----------------|----------------|-----------------|-------------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 1RB-Mid Rear 17mm       | /            | 23.67                    | 24.5          | 0.141                  | <b>0.17</b>              | 0.098                   | <b>0.12</b>               | 0.05        |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 1RB-Mid Left Edge 11mm  | /            | 23.67                    | 24.5          | 0.108                  | <b>0.13</b>              | 0.075                   | <b>0.09</b>               | -0.03       |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 1RB-Mid Top Edge 11mm   | /            | 23.67                    | 24.5          | 0.105                  | <b>0.13</b>              | 0.069                   | <b>0.08</b>               | -0.04       |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 36RB-Low Rear 17mm      | /            | 22.86                    | 23.5          | 0.11                   | <b>0.13</b>              | 0.076                   | <b>0.09</b>               | -0.02       |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 36RB-Low Left Edge 11mm | /            | 22.86                    | 23.5          | 0.066                  | <b>0.08</b>              | 0.043                   | <b>0.05</b>               | 0.16        |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 36RB-Low Top Edge 11mm  | /            | 22.86                    | 23.5          | 0.088                  | <b>0.10</b>              | 0.058                   | <b>0.07</b>               | 0.07        |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 1RB-Mid Rear 0mm        | Note1        | 16.7                     | 17.5          | 0.578                  | <b>0.69</b>              | 0.232                   | <b>0.28</b>               | 0.18        |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 1RB-Mid Left Edge 0mm   | Note1        | 16.7                     | 17.5          | 0.131                  | <b>0.16</b>              | 0.064                   | <b>0.08</b>               | -0.09       |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 1RB-Mid Top Edge 0mm    | Note1        | 16.7                     | 17.5          | 0.337                  | <b>0.41</b>              | 0.144                   | <b>0.17</b>               | -0.14       |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 36RB-Low Rear 0mm       | Note1/16     | 16.75                    | 17.5          | 0.603                  | <b>0.72</b>              | 0.241                   | <b>0.29</b>               | 0.15        |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 36RB-Low Left Edge 0mm  | Note1        | 16.75                    | 17.5          | 0.138                  | <b>0.16</b>              | 0.06                    | <b>0.07</b>               | -0.12       |
| Body          | F                      | LTE Band26     | 26775          | 822.5           | 36RB-Low Top Edge 0mm   | Note1        | 16.75                    | 17.5          | 0.333                  | <b>0.40</b>              | 0.147                   | <b>0.17</b>               | 0.19        |

Note: The distance between the EUT and the phantom bottom is 11mm/17mm by sensor, the distance for other results is 0mm.

Note1: The results are for DSI1/DSI3.

## 14.2 SAR Evaluation for WIFI


The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac/ax modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n ac then ax) is selected.


SAR Test reduction was applied from KDB 248227 guidance, when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

### Duty factor plot


#### CH6

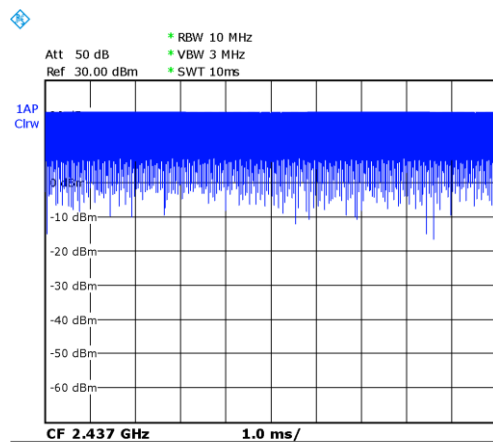


#### CH52

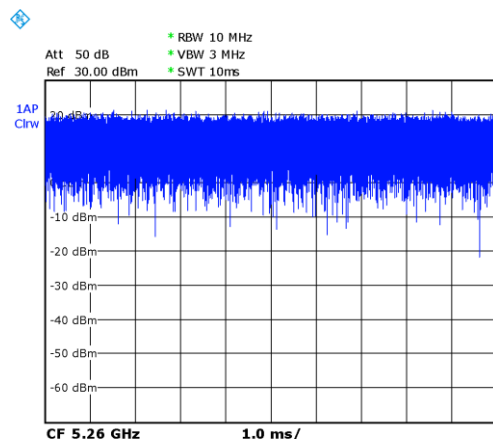

### CH140

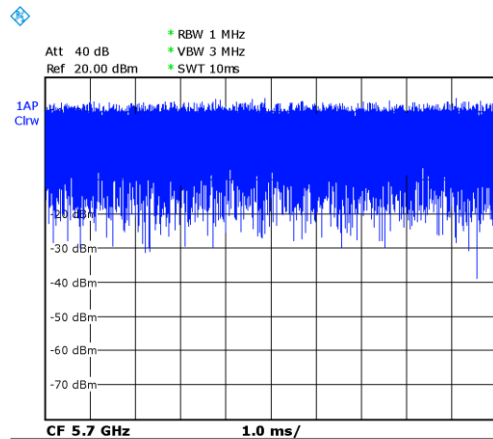

### CH165

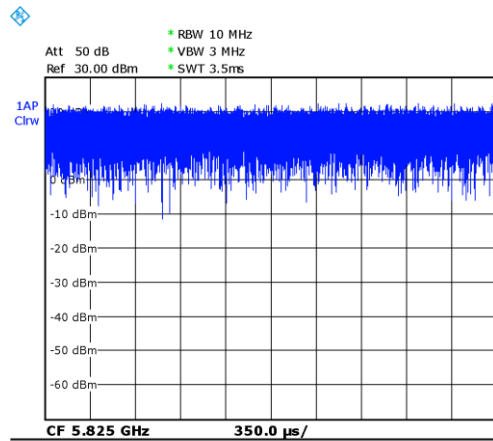

**Table 14.2-1: SAR Values - WiFi 2.4G**

| Test Position          | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|------------------------|----------------|----------------|-----------------|---------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| <b>802.11b 1M 21dB</b> |                |                |                 |                     |              |                          |               |                        |                          |                         |                           |             |
| Body                   | WiFi2.4G       | 6              | 2437            | Rear 0mm            | /            | 19.94                    | 20.5          | 0.559                  | <b>0.64</b>              | 0.219                   | <b>0.25</b>               | -0.09       |
| Body                   | WiFi2.4G       | 11             | 2462            | Left 5mm            | /            | 19.78                    | 20.5          | 0.781                  | <b>0.92</b>              | 0.325                   | <b>0.38</b>               | 0.12        |
| Body                   | WiFi2.4G       | 6              | 2437            | Left 5mm            | 13           | 19.94                    | 20.5          | 0.901                  | <b>1.03</b>              | 0.369                   | <b>0.42</b>               | 0.02        |
| Body                   | WiFi2.4G       | 1              | 2412            | Left 5mm            | /            | 19.65                    | 20.5          | 0.625                  | <b>0.76</b>              | 0.25                    | <b>0.30</b>               | 0.03        |
| Body                   | WiFi2.4G       | 6              | 2437            | Top 0mm             | /            | 19.94                    | 20.5          | 0.183                  | <b>0.21</b>              | 0.073                   | <b>0.08</b>               | -0.07       |
| Body                   | WiFi2.4G       | 6              | 2437            | Left 11mm           | /            | 19.94                    | 20.5          | 0.282                  | <b>0.32</b>              | 0.134                   | <b>0.15</b>               | 0.05        |
| Body                   | WiFi2.4G       | 6              | 2437            | Rear 17mm           | /            | 19.94                    | 20.5          | 0.052                  | <b>0.06</b>              | 0.022                   | <b>0.03</b>               | 0.06        |
| <b>802.11b 1M 16dB</b> |                |                |                 |                     |              |                          |               |                        |                          |                         |                           |             |
| Body                   | WiFi2.4G       | 11             | 2462            | Left 0mm            | Note1        | 14.79                    | 15            | 0.656                  | <b>0.69</b>              | 0.281                   | <b>0.29</b>               | -0.12       |
| Body                   | WiFi2.4G       | 6              | 2437            | Left 0mm            | Note1        | 14.82                    | 15            | 0.94                   | <b>0.98</b>              | 0.332                   | <b>0.35</b>               | 0.04        |
| Body                   | WiFi2.4G       | 1              | 2412            | Left 0mm            | Note1        | 14.43                    | 15            | 0.716                  | <b>0.82</b>              | 0.263                   | <b>0.30</b>               | 0.09        |

Note: The distance between the EUT and the phantom bottom is 11mm/17mm by sensor, the distance for other results is 0mm.

Note1: The results are for DSI1/DSI3.

Table 14.2-2: SAR Values - WiFi 5G

| Test Position            | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|--------------------------|----------------|----------------|-----------------|---------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| <b>802.11a 6M 20dB</b>   |                |                |                 |                     |              |                          |               |                        |                          |                         |                           |             |
| Body                     | WiFi5G         | 52             | 5260            | Rear 0mm            | Note1/14     | 18.7                     | 19.5          | 0.964                  | <b>1.16</b>              | 0.295                   | <b>0.35</b>               | -0.02       |
| Body                     | WiFi5G         | 56             | 5280            | Rear 0mm            | Note1        | 18.61                    | 19.5          | 0.934                  | <b>1.15</b>              | 0.286                   | <b>0.35</b>               | -0.04       |
| Body                     | WiFi5G         | 52             | 5260            | Left 5mm            | Note1        | 18.7                     | 19.5          | 0.613                  | <b>0.74</b>              | 0.198                   | <b>0.24</b>               | 0.12        |
| Body                     | WiFi5G         | 52             | 5260            | Top 0mm             | Note1        | 18.7                     | 19.5          | 0.082                  | <b>0.10</b>              | 0.028                   | <b>0.03</b>               | 0.06        |
| Body                     | WiFi5G         | 144            | 5720            | Rear 0mm            | Note1        | 18.88                    | 19.5          | 0.667                  | <b>0.77</b>              | 0.222                   | <b>0.26</b>               | -0.04       |
| Body                     | WiFi5G         | 144            | 5720            | Left 5mm            | Note1        | 18.88                    | 19.5          | 0.49                   | <b>0.57</b>              | 0.144                   | <b>0.17</b>               | 0.07        |
| Body                     | WiFi5G         | 144            | 5720            | Top 0mm             | Note1        | 18.88                    | 19.5          | 0.091                  | <b>0.10</b>              | 0.027                   | <b>0.03</b>               | -0.09       |
| <b>802.11a 6M 18.5dB</b> |                |                |                 |                     |              |                          |               |                        |                          |                         |                           |             |
| Body                     | WiFi5G         | 52             | 5260            | Rear 0mm            | Note2        | 16.46                    | 18            | 0.475                  | <b>0.68</b>              | 0.143                   | <b>0.20</b>               | 0.08        |
| Body                     | WiFi5G         | 52             | 5260            | Left 5mm            | Note2        | 16.46                    | 18            | 0.334                  | <b>0.48</b>              | 0.102                   | <b>0.15</b>               | 0.05        |
| Body                     | WiFi5G         | 52             | 5260            | Top 0mm             | Note2        | 16.46                    | 18            | 0.069                  | <b>0.10</b>              | 0.015                   | <b>0.02</b>               | -0.12       |
| Body                     | WiFi5G         | 140            | 5700            | Rear 0mm            | Note2        | 17.37                    | 18            | 0.523                  | <b>0.60</b>              | 0.163                   | <b>0.19</b>               | -0.09       |
| Body                     | WiFi5G         | 140            | 5700            | Left 5mm            | Note2        | 17.37                    | 18            | 0.256                  | <b>0.30</b>              | 0.078                   | <b>0.09</b>               | 0.11        |
| Body                     | WiFi5G         | 140            | 5700            | Top 0mm             | Note2        | 17.37                    | 18            | 0.042                  | <b>0.05</b>              | 0.014                   | <b>0.02</b>               | 0.03        |
| Body                     | WiFi5G         | 165            | 5825            | Rear 0mm            | Note2        | 17.46                    | 18            | 0.404                  | <b>0.46</b>              | 0.141                   | <b>0.16</b>               | -0.09       |
| Body                     | WiFi5G         | 165            | 5825            | Left 5mm            | Note2        | 17.46                    | 18            | 0.25                   | <b>0.28</b>              | 0.059                   | <b>0.07</b>               | -0.14       |
| Body                     | WiFi5G         | 165            | 5825            | Top 0mm             | Note2        | 17.46                    | 18            | 0.043                  | <b>0.05</b>              | 0.015                   | <b>0.02</b>               | 0.07        |
| Body                     | WiFi5G         | 52             | 5260            | Rear 17mm           | Note2        | 16.46                    | 18            | 0.085                  | <b>0.12</b>              | 0.027                   | <b>0.04</b>               | -0.11       |
| <b>802.11a 6M 16.5dB</b> |                |                |                 |                     |              |                          |               |                        |                          |                         |                           |             |
| Body                     | WiFi5G         | 52             | 5260            | Left 0mm            | Note3        | 14.55                    | 15.5          | 0.751                  | <b>0.93</b>              | 0.181                   | <b>0.23</b>               | -0.09       |
| Body                     | WiFi5G         | 56             | 5280            | Left 0mm            | Note3        | 14.46                    | 15.5          | 0.885                  | <b>1.12</b>              | 0.214                   | <b>0.27</b>               | 0.11        |
| Body                     | WiFi5G         | 140            | 5700            | Left 0mm            | Note3        | 15.46                    | 15.5          | 0.592                  | <b>0.60</b>              | 0.144                   | <b>0.15</b>               | -0.05       |
| Body                     | WiFi5G         | 165            | 5825            | Left 0mm            | Note3        | 15.43                    | 15.5          | 0.774                  | <b>0.79</b>              | 0.166                   | <b>0.17</b>               | 0.06        |
| <b>802.11a 6M 15dB</b>   |                |                |                 |                     |              |                          |               |                        |                          |                         |                           |             |
| Body                     | WiFi5G         | 52             | 5260            | Left 0mm            | Note4        | 13.11                    | 14            | 0.529                  | <b>0.65</b>              | 0.129                   | <b>0.16</b>               | -0.04       |
| Body                     | WiFi5G         | 140            | 5700            | Left 0mm            | Note4        | 13.91                    | 14            | 0.351                  | <b>0.36</b>              | 0.093                   | <b>0.09</b>               | 0.09        |
| Body                     | WiFi5G         | 165            | 5825            | Left 0mm            | Note4        | 13.92                    | 14            | 0.459                  | <b>0.47</b>              | 0.107                   | <b>0.11</b>               | -0.12       |

Note: The distance between the EUT and the phantom bottom is 11mm/17mm by sensor, the distance for other results is 0mm.

Note1: The results are for DSI0.

Note2: The results are for DSI2.

Note3: The results are for DSI1.

Note4: The results are for DSI3.

### 14.3 WLAN Evaluation For BT

**Table 14.3-1: SAR Values (BT - Body)**

| Test Position | Frequency Band | Channel Number | Frequency (MHz) | Test setup/Position | Note/Fig No. | EUT Measured Power (dBm) | Tune up (dBm) | Measured SAR 1g (W/kg) | Calculated SAR 1g (W/kg) | Measured SAR 10g (W/kg) | Calculated SAR 10g (W/kg) | Power Drift |
|---------------|----------------|----------------|-----------------|---------------------|--------------|--------------------------|---------------|------------------------|--------------------------|-------------------------|---------------------------|-------------|
| Body          | BT             | 78             | 2480            | DH5 Rear 0mm        | /            | 11                       | 11            | 0.079                  | <b>0.08</b>              | 0.047                   | <b>0.05</b>               | 0.09        |
| Body          | BT             | 78             | 2480            | DH5 Left 0mm        | 15           | 11                       | 11            | 0.235                  | <b>0.24</b>              | 0.081                   | <b>0.08</b>               | 0.12        |
| Body          | BT             | 78             | 2480            | DH5 Top 0mm         | /            | 11                       | 11            | <0.01                  | <0.01                    | <0.01                   | <0.01                     | /           |

## 15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$

| Band     | Frequency |      | Test Position | Original SAR (W/kg) | First Repeated SAR (W/kg) | The Ratio | Second Repeated SAR (W/kg) |
|----------|-----------|------|---------------|---------------------|---------------------------|-----------|----------------------------|
|          | Ch.       | MHz  |               |                     |                           |           |                            |
| LTE B7   | 21100     | 2535 | Rear 17mm     | 1.02                | 0.989                     | 1.03      | /                          |
| LTE B7   | 20850     | 2510 | Rear 0mm      | 0.834               | 0.811                     | 1.03      | /                          |
| LTE B41  | 39750     | 2506 | Rear 0mm      | 0.888               | 0.874                     | 1.02      | /                          |
| LTE B66  | 132322    | 1745 | Rear 0mm      | 0.824               | 0.816                     | 1.01      | /                          |
| WIFI2.4G | 6         | 2437 | Left 5mm      | 0.904               | 0.876                     | 1.03      | /                          |
| WIFI2.4G | 6         | 2437 | Left 0mm      | 0.94                | 0.923                     | 1.02      | /                          |
| WIFI5G   | 52        | 5260 | Rear 0mm      | 0.964               | 0.934                     | 1.03      | /                          |
| WIFI5G   | 56        | 5280 | Left 0mm      | 0.885               | 0.874                     | 1.01      | /                          |



## 16 Measurement Uncertainty

### 16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

| No.                        | Error Description                               | Type | Uncertainty value | Probably Distribution | Div.       | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|----------------------------|-------------------------------------------------|------|-------------------|-----------------------|------------|---------|----------|----------------|-----------------|-------------------|
| <b>Measurement system</b>  |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 1                          | Probe calibration                               | B    | 6.0               | N                     | 1          | 1       | 1        | 6.0            | 6.0             | $\infty$          |
| 2                          | Isotropy                                        | B    | 4.7               | R                     | $\sqrt{3}$ | 0.7     | 0.7      | 1.9            | 1.9             | $\infty$          |
| 3                          | Boundary effect                                 | B    | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 0.6            | 0.6             | $\infty$          |
| 4                          | Linearity                                       | B    | 4.7               | R                     | $\sqrt{3}$ | 1       | 1        | 2.7            | 2.7             | $\infty$          |
| 5                          | Detection limit                                 | B    | 1.0               | N                     | 1          | 1       | 1        | 0.6            | 0.6             | $\infty$          |
| 6                          | Readout electronics                             | B    | 0.3               | R                     | $\sqrt{3}$ | 1       | 1        | 0.3            | 0.3             | $\infty$          |
| 7                          | Response time                                   | B    | 0.8               | R                     | $\sqrt{3}$ | 1       | 1        | 0.5            | 0.5             | $\infty$          |
| 8                          | Integration time                                | B    | 2.6               | R                     | $\sqrt{3}$ | 1       | 1        | 1.5            | 1.5             | $\infty$          |
| 9                          | RF ambient conditions-noise                     | B    | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 0              | 0               | $\infty$          |
| 10                         | RF ambient conditions-reflection                | B    | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 0              | 0               | $\infty$          |
| 11                         | Probe positioned mech. restrictions             | B    | 0.4               | R                     | $\sqrt{3}$ | 1       | 1        | 0.2            | 0.2             | $\infty$          |
| 12                         | Probe positioning with respect to phantom shell | B    | 2.9               | R                     | $\sqrt{3}$ | 1       | 1        | 1.7            | 1.7             | $\infty$          |
| 13                         | Post-processing                                 | B    | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 0.6            | 0.6             | $\infty$          |
| <b>Test sample related</b> |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 14                         | Test sample positioning                         | A    | 3.3               | N                     | 1          | 1       | 1        | 3.3            | 3.3             | 71                |
| 15                         | Device holder uncertainty                       | A    | 3.4               | N                     | 1          | 1       | 1        | 3.4            | 3.4             | 5                 |
| 16                         | Drift of output power                           | B    | 5.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.9            | 2.9             | $\infty$          |
| <b>Phantom and set-up</b>  |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 17                         | Phantom uncertainty                             | B    | 4.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.3            | 2.3             | $\infty$          |
| 18                         | Liquid conductivity (target)                    | B    | 5.0               | R                     | $\sqrt{3}$ | 0.64    | 0.43     | 1.8            | 1.2             | $\infty$          |
| 19                         | Liquid conductivity (meas.)                     | A    | 2.06              | N                     | 1          | 0.64    | 0.43     | 1.32           | 0.89            | 43                |
| 20                         | Liquid permittivity (target)                    | B    | 5.0               | R                     | $\sqrt{3}$ | 0.6     | 0.49     | 1.7            | 1.4             | $\infty$          |
| 21                         | Liquid permittivity (meas.)                     | A    | 1.6               | N                     | 1          | 0.6     | 0.49     | 1.0            | 0.8             | 521               |

|                                                    |                                             |  |  |  |  |      |      |     |
|----------------------------------------------------|---------------------------------------------|--|--|--|--|------|------|-----|
| Combined standard uncertainty                      | $u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$ |  |  |  |  | 9.55 | 9.43 | 257 |
| Expanded uncertainty (confidence interval of 95 %) | $u_e = 2u_c$                                |  |  |  |  | 19.1 | 18.9 |     |

### 16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

| No.                        | Error Description                               | Type | Uncertainty value | Probably Distribution | Div.       | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|----------------------------|-------------------------------------------------|------|-------------------|-----------------------|------------|---------|----------|----------------|-----------------|-------------------|
| <b>Measurement system</b>  |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 1                          | Probe calibration                               | B    | 6.55              | N                     | 1          | 1       | 1        | 6.55           | 6.55            | $\infty$          |
| 2                          | Isotropy                                        | B    | 4.7               | R                     | $\sqrt{3}$ | 0.7     | 0.7      | 1.9            | 1.9             | $\infty$          |
| 3                          | Boundary effect                                 | B    | 2.0               | R                     | $\sqrt{3}$ | 1       | 1        | 1.2            | 1.2             | $\infty$          |
| 4                          | Linearity                                       | B    | 4.7               | R                     | $\sqrt{3}$ | 1       | 1        | 2.7            | 2.7             | $\infty$          |
| 5                          | Detection limit                                 | B    | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 0.6            | 0.6             | $\infty$          |
| 6                          | Readout electronics                             | B    | 0.3               | R                     | $\sqrt{3}$ | 1       | 1        | 0.3            | 0.3             | $\infty$          |
| 7                          | Response time                                   | B    | 0.8               | R                     | $\sqrt{3}$ | 1       | 1        | 0.5            | 0.5             | $\infty$          |
| 8                          | Integration time                                | B    | 2.6               | R                     | $\sqrt{3}$ | 1       | 1        | 1.5            | 1.5             | $\infty$          |
| 9                          | RF ambient conditions-noise                     | B    | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 0              | 0               | $\infty$          |
| 10                         | RFambient conditions-reflection                 | B    | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 0              | 0               | $\infty$          |
| 11                         | Probe positioned mech. restrictions             | B    | 0.8               | R                     | $\sqrt{3}$ | 1       | 1        | 0.5            | 0.5             | $\infty$          |
| 12                         | Probe positioning with respect to phantom shell | B    | 6.7               | R                     | $\sqrt{3}$ | 1       | 1        | 3.9            | 3.9             | $\infty$          |
| 13                         | Post-processing                                 | B    | 4.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.3            | 2.3             | $\infty$          |
| <b>Test sample related</b> |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 14                         | Test sample positioning                         | A    | 3.3               | N                     | 1          | 1       | 1        | 3.3            | 3.3             | 71                |
| 15                         | Device holder uncertainty                       | A    | 3.4               | N                     | 1          | 1       | 1        | 3.4            | 3.4             | 5                 |
| 16                         | Drift of output power                           | B    | 5.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.9            | 2.9             | $\infty$          |
| <b>Phantom and set-up</b>  |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 17                         | Phantom uncertainty                             | B    | 4.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.3            | 2.3             | $\infty$          |
| 18                         | Liquid conductivity (target)                    | B    | 5.0               | R                     | $\sqrt{3}$ | 0.64    | 0.43     | 1.8            | 1.2             | $\infty$          |
| 19                         | Liquid conductivity (meas.)                     | A    | 2.06              | N                     | 1          | 0.64    | 0.43     | 1.32           | 0.89            | 43                |
| 20                         | Liquid permittivity (target)                    | B    | 5.0               | R                     | $\sqrt{3}$ | 0.6     | 0.49     | 1.7            | 1.4             | $\infty$          |

|                                                    |                             |                                            |     |   |   |     |      |      |      |     |
|----------------------------------------------------|-----------------------------|--------------------------------------------|-----|---|---|-----|------|------|------|-----|
| 21                                                 | Liquid permittivity (meas.) | A                                          | 1.6 | N | 1 | 0.6 | 0.49 | 1.0  | 0.8  | 521 |
| Combined standard uncertainty                      |                             | $u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$ |     |   |   |     |      | 10.7 | 10.6 | 257 |
| Expanded uncertainty (confidence interval of 95 %) |                             | $u_e = 2u_c$                               |     |   |   |     |      | 21.4 | 21.1 |     |

### 16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

| No.                        | Error Description                               | Type | Uncertainty value | Probably Distribution | Div.       | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|----------------------------|-------------------------------------------------|------|-------------------|-----------------------|------------|---------|----------|----------------|-----------------|-------------------|
| <b>Measurement system</b>  |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 1                          | Probe calibration                               | B    | 6.0               | N                     | 1          | 1       | 1        | 6.0            | 6.0             | $\infty$          |
| 2                          | Isotropy                                        | B    | 4.7               | R                     | $\sqrt{3}$ | 0.7     | 0.7      | 1.9            | 1.9             | $\infty$          |
| 3                          | Boundary effect                                 | B    | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 0.6            | 0.6             | $\infty$          |
| 4                          | Linearity                                       | B    | 4.7               | R                     | $\sqrt{3}$ | 1       | 1        | 2.7            | 2.7             | $\infty$          |
| 5                          | Detection limit                                 | B    | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 0.6            | 0.6             | $\infty$          |
| 6                          | Readout electronics                             | B    | 0.3               | R                     | $\sqrt{3}$ | 1       | 1        | 0.3            | 0.3             | $\infty$          |
| 7                          | Response time                                   | B    | 0.8               | R                     | $\sqrt{3}$ | 1       | 1        | 0.5            | 0.5             | $\infty$          |
| 8                          | Integration time                                | B    | 2.6               | R                     | $\sqrt{3}$ | 1       | 1        | 1.5            | 1.5             | $\infty$          |
| 9                          | RF ambient conditions-noise                     | B    | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 0              | 0               | $\infty$          |
| 10                         | RF ambient conditions-reflection                | B    | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 0              | 0               | $\infty$          |
| 11                         | Probe positioned mech. Restrictions             | B    | 0.4               | R                     | $\sqrt{3}$ | 1       | 1        | 0.2            | 0.2             | $\infty$          |
| 12                         | Probe positioning with respect to phantom shell | B    | 2.9               | R                     | $\sqrt{3}$ | 1       | 1        | 1.7            | 1.7             | $\infty$          |
| 13                         | Post-processing                                 | B    | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 0.6            | 0.6             | $\infty$          |
| 14                         | Fast SAR z-Approximation                        | B    | 7.0               | R                     | $\sqrt{3}$ | 1       | 1        | 4.0            | 4.0             | $\infty$          |
| <b>Test sample related</b> |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 15                         | Test sample positioning                         | A    | 3.3               | N                     | 1          | 1       | 1        | 3.3            | 3.3             | 71                |
| 16                         | Device holder uncertainty                       | A    | 3.4               | N                     | 1          | 1       | 1        | 3.4            | 3.4             | 5                 |
| 17                         | Drift of output power                           | B    | 5.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.9            | 2.9             | $\infty$          |
| <b>Phantom and set-up</b>  |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 18                         | Phantom uncertainty                             | B    | 4.0               | R                     | $\sqrt{3}$ | 1       | 1        | 2.3            | 2.3             | $\infty$          |
| 19                         | Liquid conductivity (target)                    | B    | 5.0               | R                     | $\sqrt{3}$ | 0.64    | 0.43     | 1.8            | 1.2             | $\infty$          |

|                                                    |                              |                                             |      |   |            |      |      |      |      |          |
|----------------------------------------------------|------------------------------|---------------------------------------------|------|---|------------|------|------|------|------|----------|
| 20                                                 | Liquid conductivity (meas.)  | A                                           | 2.06 | N | 1          | 0.64 | 0.43 | 1.32 | 0.89 | 43       |
| 21                                                 | Liquid permittivity (target) | B                                           | 5.0  | R | $\sqrt{3}$ | 0.6  | 0.49 | 1.7  | 1.4  | $\infty$ |
| 22                                                 | Liquid permittivity (meas.)  | A                                           | 1.6  | N | 1          | 0.6  | 0.49 | 1.0  | 0.8  | 521      |
| Combined standard uncertainty                      |                              | $u_c' = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$ |      |   |            |      |      | 10.4 | 10.3 | 257      |
| Expanded uncertainty (confidence interval of 95 %) |                              | $u_e = 2u_c$                                |      |   |            |      |      | 20.8 | 20.6 |          |

#### 16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

| No.                        | Error Description                               | Type | Uncertainty value | Probably Distribution | Div.       | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|----------------------------|-------------------------------------------------|------|-------------------|-----------------------|------------|---------|----------|----------------|-----------------|-------------------|
| <b>Measurement system</b>  |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 1                          | Probe calibration                               | B    | 6.55              | N                     | 1          | 1       | 1        | 6.55           | 6.55            | $\infty$          |
| 2                          | Isotropy                                        | B    | 4.7               | R                     | $\sqrt{3}$ | 0.7     | 0.7      | 1.9            | 1.9             | $\infty$          |
| 3                          | Boundary effect                                 | B    | 2.0               | R                     | $\sqrt{3}$ | 1       | 1        | 1.2            | 1.2             | $\infty$          |
| 4                          | Linearity                                       | B    | 4.7               | R                     | $\sqrt{3}$ | 1       | 1        | 2.7            | 2.7             | $\infty$          |
| 5                          | Detection limit                                 | B    | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 0.6            | 0.6             | $\infty$          |
| 6                          | Readout electronics                             | B    | 0.3               | R                     | $\sqrt{3}$ | 1       | 1        | 0.3            | 0.3             | $\infty$          |
| 7                          | Response time                                   | B    | 0.8               | R                     | $\sqrt{3}$ | 1       | 1        | 0.5            | 0.5             | $\infty$          |
| 8                          | Integration time                                | B    | 2.6               | R                     | $\sqrt{3}$ | 1       | 1        | 1.5            | 1.5             | $\infty$          |
| 9                          | RF ambient conditions-noise                     | B    | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 0              | 0               | $\infty$          |
| 10                         | RF ambient conditions-reflection                | B    | 0                 | R                     | $\sqrt{3}$ | 1       | 1        | 0              | 0               | $\infty$          |
| 11                         | Probe positioned mech. Restrictions             | B    | 0.8               | R                     | $\sqrt{3}$ | 1       | 1        | 0.5            | 0.5             | $\infty$          |
| 12                         | Probe positioning with respect to phantom shell | B    | 6.7               | R                     | $\sqrt{3}$ | 1       | 1        | 3.9            | 3.9             | $\infty$          |
| 13                         | Post-processing                                 | B    | 1.0               | R                     | $\sqrt{3}$ | 1       | 1        | 0.6            | 0.6             | $\infty$          |
| 14                         | Fast SAR z-Approximation                        | B    | 14.0              | R                     | $\sqrt{3}$ | 1       | 1        | 8.1            | 8.1             | $\infty$          |
| <b>Test sample related</b> |                                                 |      |                   |                       |            |         |          |                |                 |                   |
| 15                         | Test sample positioning                         | A    | 3.3               | N                     | 1          | 1       | 1        | 3.3            | 3.3             | 71                |
| 16                         | Device holder uncertainty                       | A    | 3.4               | N                     | 1          | 1       | 1        | 3.4            | 3.4             | 5                 |

|                                                    |                              |                                            |      |   |            |      |      |      |      |          |
|----------------------------------------------------|------------------------------|--------------------------------------------|------|---|------------|------|------|------|------|----------|
| 17                                                 | Drift of output power        | B                                          | 5.0  | R | $\sqrt{3}$ | 1    | 1    | 2.9  | 2.9  | $\infty$ |
| <b>Phantom and set-up</b>                          |                              |                                            |      |   |            |      |      |      |      |          |
| 18                                                 | Phantom uncertainty          | B                                          | 4.0  | R | $\sqrt{3}$ | 1    | 1    | 2.3  | 2.3  | $\infty$ |
| 19                                                 | Liquid conductivity (target) | B                                          | 5.0  | R | $\sqrt{3}$ | 0.64 | 0.43 | 1.8  | 1.2  | $\infty$ |
| 20                                                 | Liquid conductivity (meas.)  | A                                          | 2.06 | N | 1          | 0.64 | 0.43 | 1.32 | 0.89 | 43       |
| 21                                                 | Liquid permittivity (target) | B                                          | 5.0  | R | $\sqrt{3}$ | 0.6  | 0.49 | 1.7  | 1.4  | $\infty$ |
| 22                                                 | Liquid permittivity (meas.)  | A                                          | 1.6  | N | 1          | 0.6  | 0.49 | 1.0  | 0.8  | 521      |
| Combined standard uncertainty                      |                              | $u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$ |      |   |            |      |      | 13.5 | 13.4 | 257      |
| Expanded uncertainty (confidence interval of 95 %) |                              | $u_e = 2u_c$                               |      |   |            |      |      | 27.0 | 26.8 |          |

## 17 MAIN TEST INSTRUMENTS

**Table 17.1: List of Main Instruments**

| No. | Name                  | Type          | Serial Number | Calibration Date         | Valid Period |
|-----|-----------------------|---------------|---------------|--------------------------|--------------|
| 01  | Network analyzer      | E5071C        | MY46110673    | January 10, 2023         | One year     |
| 02  | Power sensor          | NRP110T       | 101139        | January 13, 2023         | One year     |
| 03  | Power sensor          | NRP110T       | 101159        | January 13, 2023         | One year     |
| 04  | Signal Generator      | E4438C        | MY49071430    | January 19, 2023         | One year     |
| 05  | Amplifier             | 60S1G4        | 0331848       | No Calibration Requested |              |
| 06  | BTS                   | CMW500        | 159890        | January 12, 2023         | One year     |
| 07  | E-field Probe         | SPEAG EX3DV4  | 7727          | June 5, 2023             | One year     |
| 08  | DAE                   | SPEAG DAE4    | 1745          | August 31, 2022          | One year     |
| 09  | Dipole Validation Kit | SPEAG D750V3  | 1196          | May 24,,2023             | One year     |
| 10  | Dipole Validation Kit | SPEAG D835V2  | 4d260         | May 23,,2023             | One year     |
| 11  | Dipole Validation Kit | SPEAG D1800V2 | 2d222         | May 23,,2023             | One year     |
| 12  | Dipole Validation Kit | SPEAG D1900V2 | 5d234         | May 22,,2023             | One year     |
| 13  | Dipole Validation Kit | SPEAG D2450V2 | 1090          | November 15,2022         | One year     |
| 14  | Dipole Validation Kit | SPEAG D2550V2 | 1013          | May 24,,2023             | One year     |
| 15  | Dipole Validation Kit | SPEAG D5GHzV2 | 1060          | June 19,2023             | One year     |

**Table 17.2: List of Main Instruments for LTE B26**

| No. | Name                  | Type         | Serial Number | Calibration Date         | Valid Period |
|-----|-----------------------|--------------|---------------|--------------------------|--------------|
| 01  | Network analyzer      | N5239A       | MY55491241    | June 5, 2023             | One year     |
| 02  | Power sensor          | NRP6A        | 101368        | May 15, 2023             | One year     |
| 03  | Power sensor          | NRP6A        | 101369        | May 15, 2023             | One year     |
| 04  | Signal Generator      | E4438C       | MY49070393    | May 15, 2023             | One year     |
| 05  | Amplifier             | 60S1G4       | 0331848       | No Calibration Requested |              |
| 06  | BTS                   | CMW500       | 129942        | June 14, 2023            | One year     |
| 07  | E-field Probe         | SPEAG EX3DV4 | 7727          | June 5, 2023             | One year     |
| 08  | DAE                   | SPEAG DAE4   | 1807          | May 15, 2023             | One year     |
| 09  | Dipole Validation Kit | SPEAG D835V2 | 4d069         | July 14,2023             | One year     |

\*\*\*END OF REPORT BODY\*\*\*

## **Appendixes**

- ANNEX A Graph Results**
- ANNEX B System Verification Results**
- ANNEX C SAR Measurement Setup**
- ANNEX D Position of the wireless device in relation to the phantom**
- ANNEX E Equivalent Media Recipes**
- ANNEX F System Validation**
- ANNEX G Probe Calibration Certificate**
- ANNEX H Dipole Calibration Certificate**
- ANNEX I SAR Sensor Triggering Data Summary**
- ANNEX J Accreditation Certificate**