

Fig.56. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

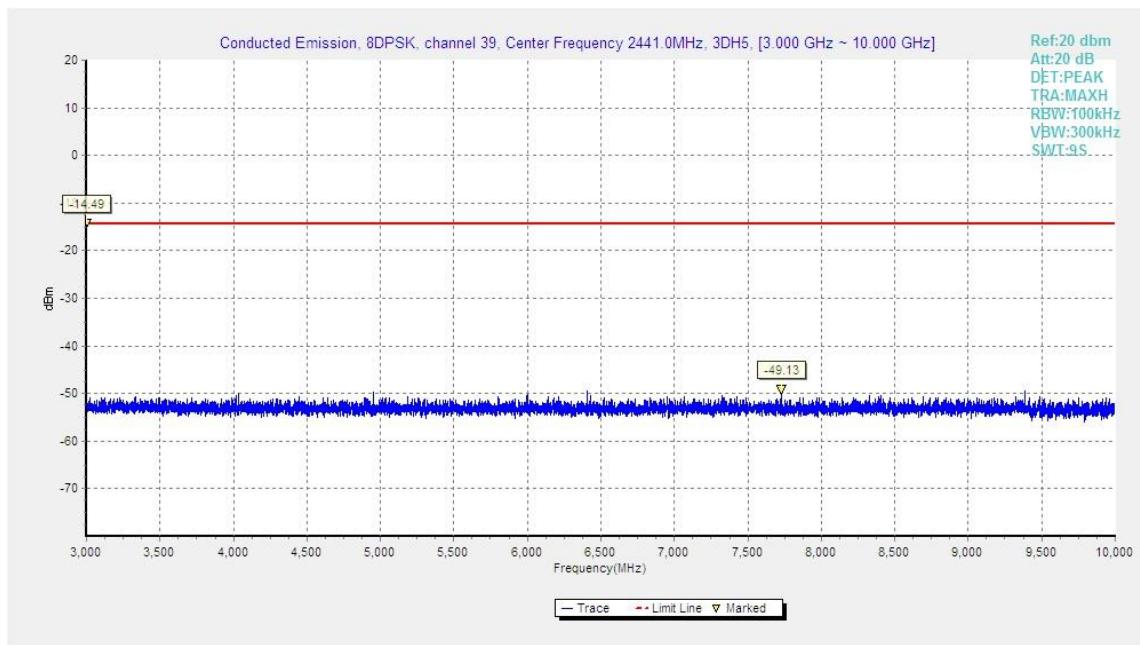


Fig.57. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

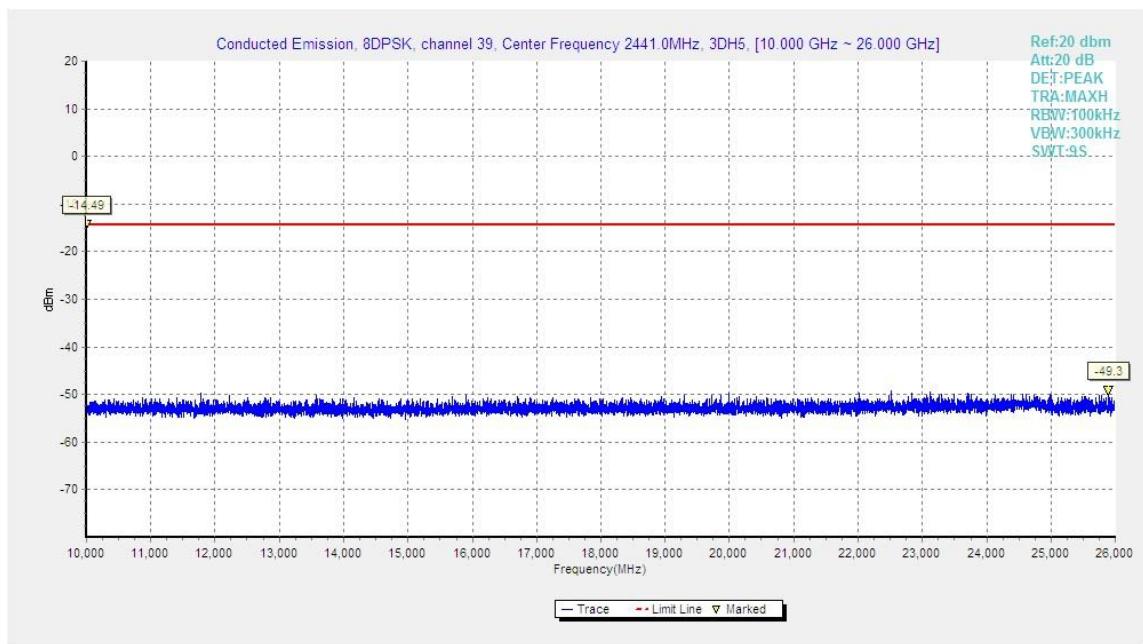


Fig.58. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

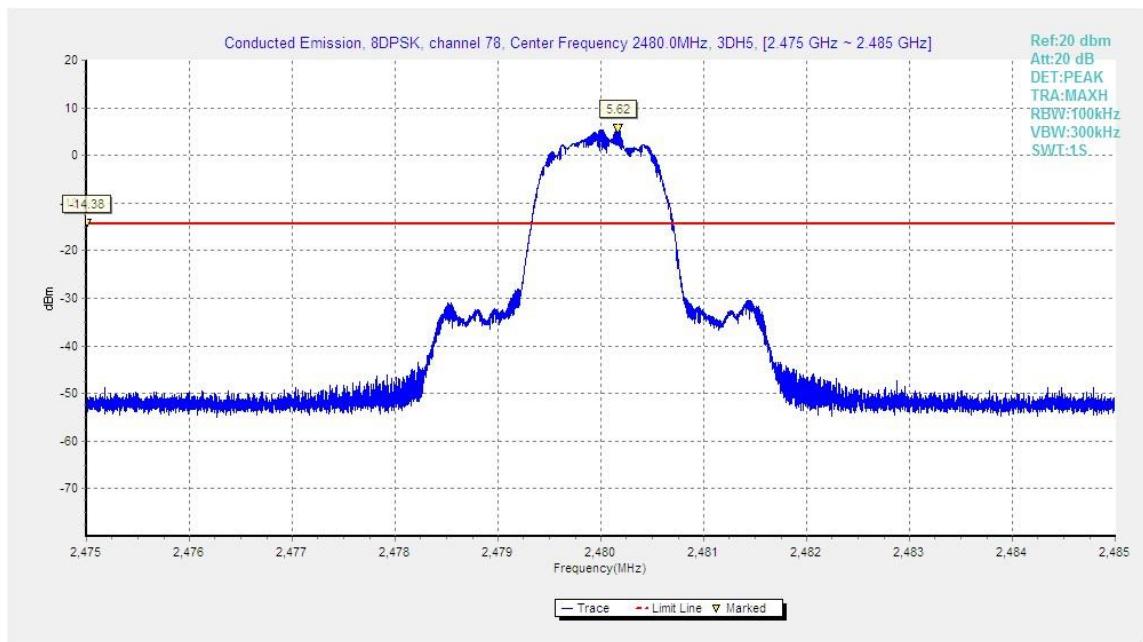


Fig.59. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

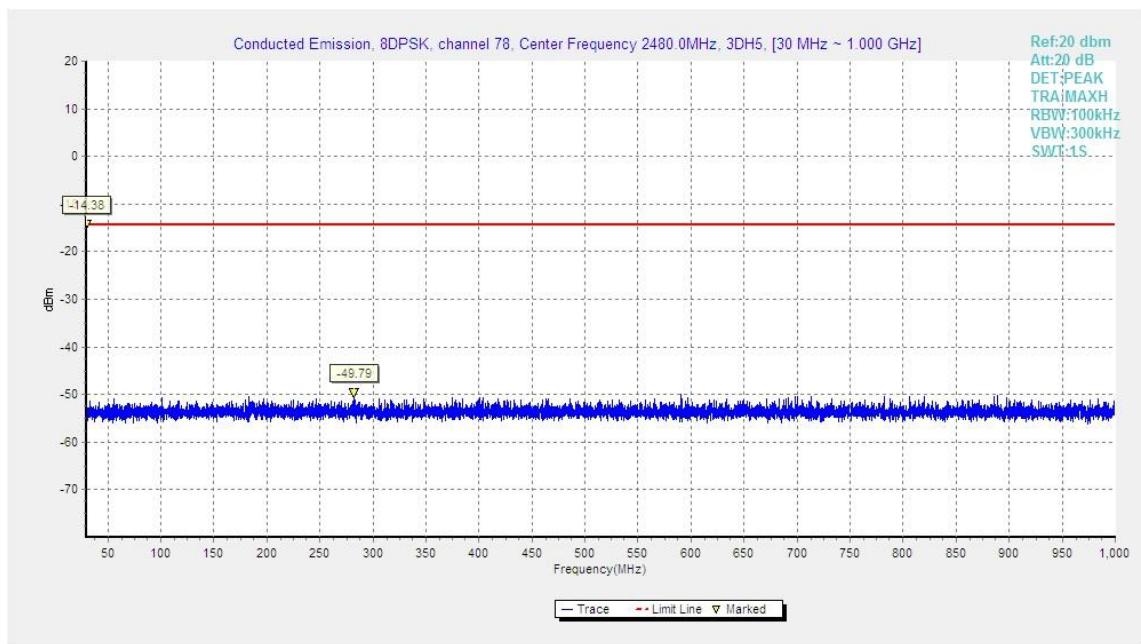


Fig.60. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

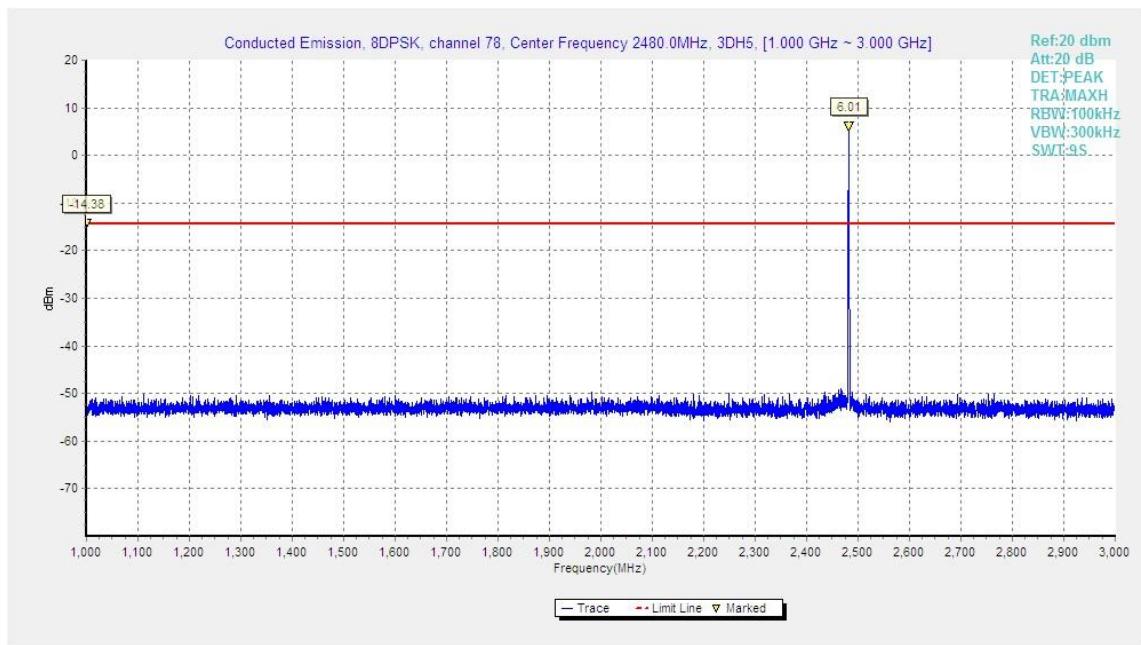


Fig.61. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

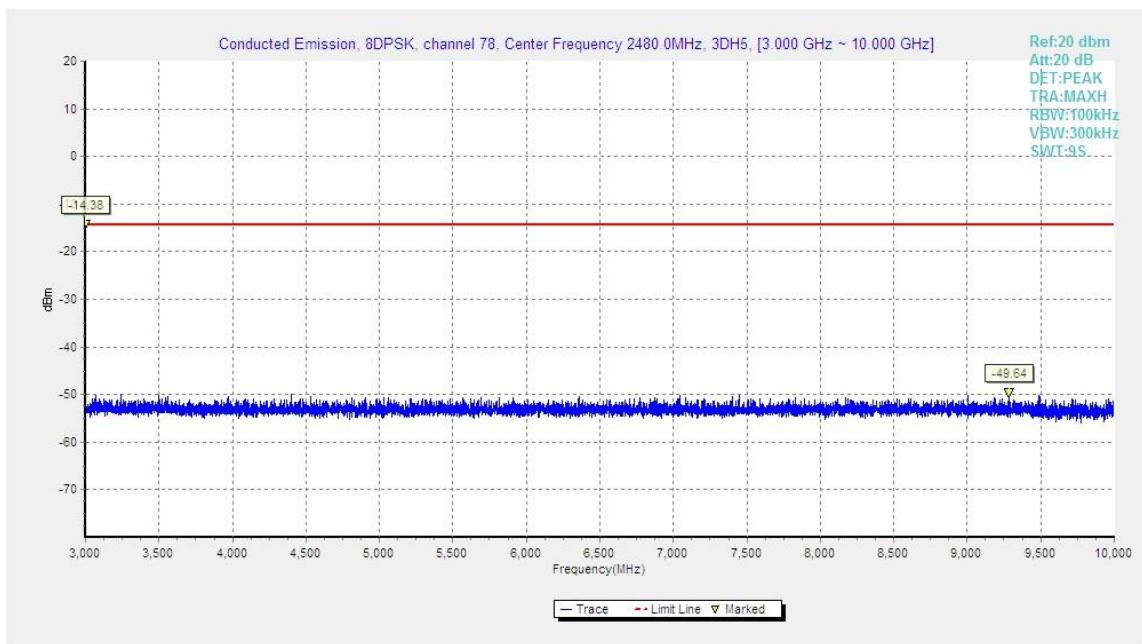


Fig.62. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

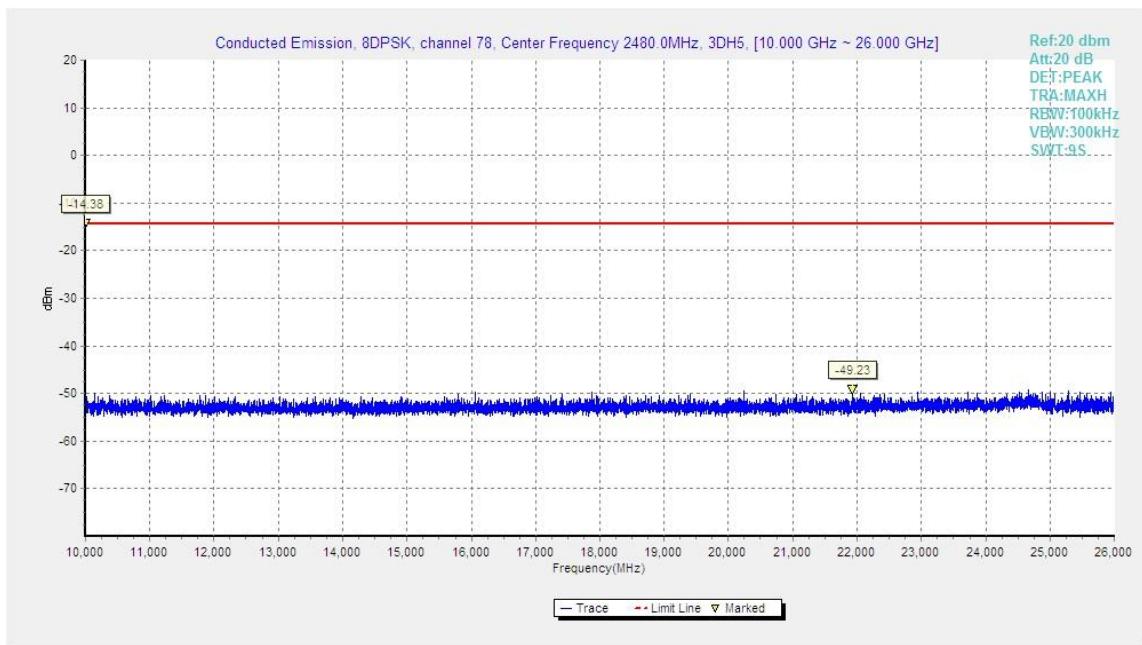


Fig.63. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

B.6. Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 &6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:


Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m

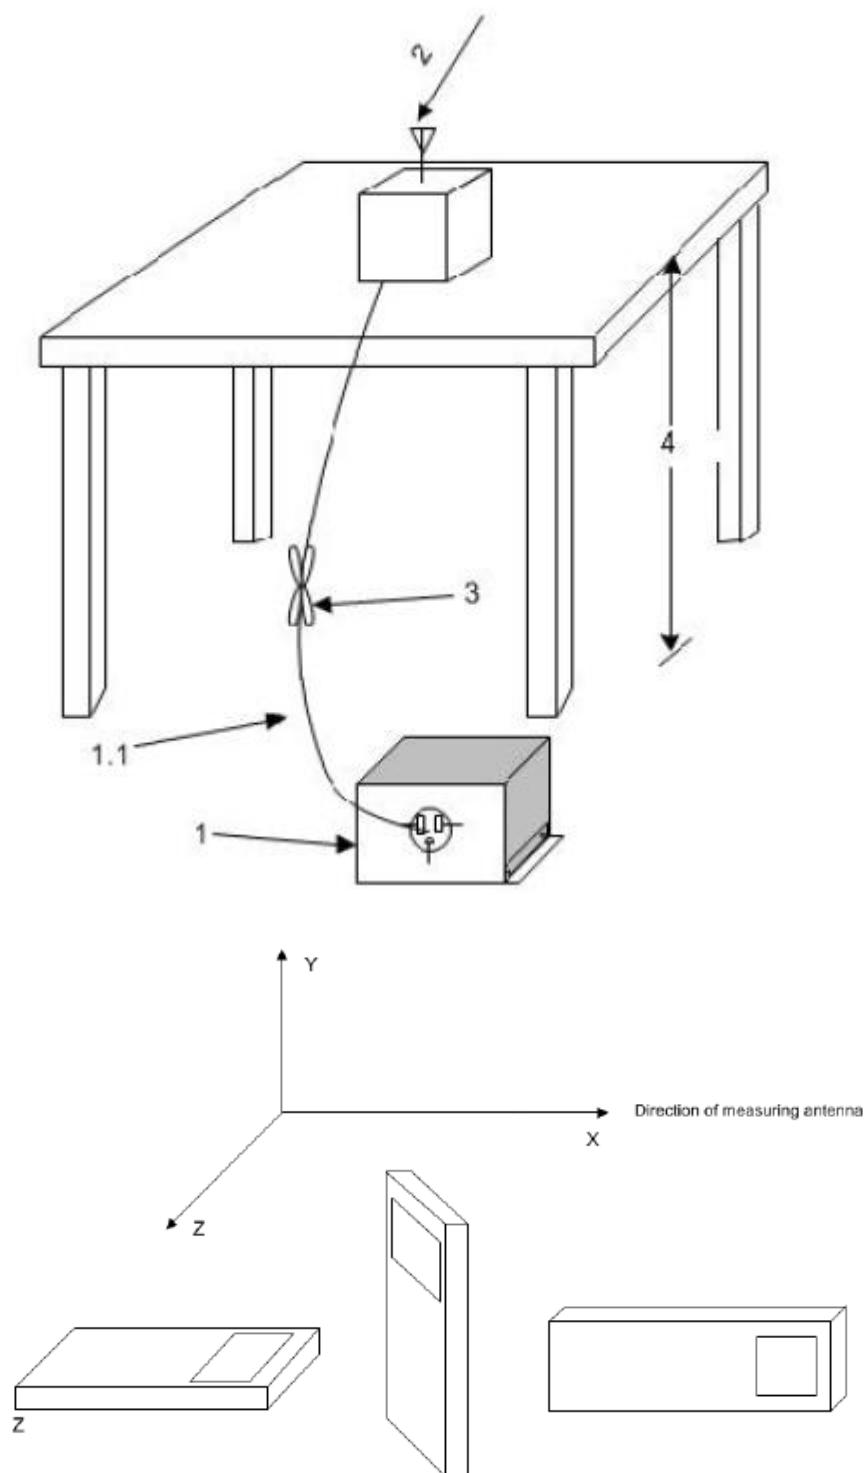The EUT and transmitting antenna shall be centered on the turntable.



Test Condition

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the

nominal rated supply voltage.

Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

Final radiated emissions measurements

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The receiver references:

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result = P_{Mea} + Cable Loss + Antenna Factor

Where:

P_{Mea} field strength recorded from the instrument

Peak Measurement results

GFSK Ch 0

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17995.5	57.7	-25.5	46.7	36.5	H
17990.5	57.5	-25.5	46.7	36.3	V
17942.5	57.4	-25.5	46.7	36.2	V
17625.5	57.3	-25.7	46.0	37.1	H
17983	57.3	-25.5	46.7	36.1	H
2323.2	55.7	-20.1	27.9	47.8	H

GFSK Ch 39

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17893.5	58.3	-25.5	46.7	37.1	H
17982.5	57.9	-25.5	46.7	36.7	H
17956.5	57.6	-25.5	46.7	36.4	H
17995	57.6	-25.5	46.7	36.4	V
17999	57.6	-25.5	46.7	36.4	H
17964	57.5	-25.5	46.7	36.3	H

GFSK Ch 78

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17996	58.2	-25.5	46.7	37.0	H
17915	57.7	-25.5	46.7	36.5	V
17974	57.7	-25.5	46.7	36.5	H
17919.5	57.3	-25.5	46.7	36.1	H
17947.5	57.2	-25.5	46.7	36.0	H
2486.6	55.5	-20.0	28.3	47.2	H

π/4 DQPSK Ch 0

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17942	57.5	-25.5	46.7	36.3	V
17958.5	57.3	-25.5	46.7	36.1	V
17907.5	57.1	-25.5	46.7	35.9	H
17951.5	56.9	-25.5	46.7	35.7	V
17975	56.8	-25.5	46.7	35.6	V
2380.1	55.4	-20.0	28.1	47.4	H

π/4 DQPSK Ch 39

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17942.5	57.5	-25.5	46.7	36.3	H
17936	57.4	-25.5	46.7	36.2	H
17921	57.3	-25.5	46.7	36.1	H
17974.5	57.2	-25.5	46.7	36.0	V
17782	57	-25.5	46.7	35.8	V
17981	57	-25.5	46.7	35.8	H

π/4 DQPSK Ch 78

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17938.5	57.7	-25.5	46.7	36.5	H
17970.5	57.6	-25.5	46.7	36.4	V
17868.5	57	-25.5	46.7	35.8	V
17895.5	56.9	-25.5	46.7	35.7	H
17965.5	56.9	-25.5	46.7	35.7	H
2498.9	55.5	-20.0	28.4	47.1	H

8DPSK Ch 0

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17935	57.5	-25.5	46.7	36.3	V
17960.5	57.5	-25.5	46.7	36.3	H
17956	57.4	-25.5	46.7	36.2	H
17920.5	57.2	-25.5	46.7	36.0	V
17964.5	57.1	-25.5	46.7	35.9	V
2348.1	55.3	-20.1	28.0	47.4	V

8DPSK Ch 39

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17927.5	57.6	-25.5	46.7	36.4	V
17943.5	57.6	-25.5	46.7	36.4	H
17859.5	57.3	-25.5	46.7	36.1	H
17609	57.2	-25.7	46.0	37.0	V
17908.5	57.2	-25.5	46.7	36.0	H
17993.5	57.2	-25.5	46.7	36.0	H

8DPSK Ch 78

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17932.5	57.4	-25.5	46.7	36.2	H
17963.5	57.1	-25.5	46.7	35.9	V
17967.5	57.1	-25.5	46.7	35.9	V
17984	57	-25.5	46.7	35.8	V
17876.5	56.9	-25.5	46.7	35.7	H
2486.9	55.6	-20.0	28.3	47.3	H

Average Measurement results
GFSK Ch 0

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17955.5	46.5	-25.5	46.7	25.3	H
17974.5	46.5	-25.5	46.7	25.3	H
17938.5	46.4	-25.5	46.7	25.2	V
17950	46.4	-25.5	46.7	25.2	V
17992.5	46.4	-25.5	46.7	25.2	H
2389.1	42.3	-20	28.1	34.3	H

GFSK Ch 39

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17982.5	46.7	-25.5	46.7	25.5	H
17962	46.6	-25.5	46.7	25.4	V
17973.5	46.4	-25.5	46.7	25.2	V
17988.5	46.4	-25.5	46.7	25.2	V
17938	46.3	-25.5	46.7	25.1	V
17974.5	46.3	-25.5	46.7	25.1	V

GFSK Ch 78

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17945.5	46.6	-25.5	46.7	25.4	V
17973.5	46.5	-25.5	46.7	25.3	H
17970	46.3	-25.5	46.7	25.1	V
17979	46.3	-25.5	46.7	25.1	V
17985	46.3	-25.5	46.7	25.1	V
2485.4	43.5	-20	28.3	35.2	H

π/4 DQPSK Ch 0

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17990	46.5	-25.5	46.7	25.3	V
17982.5	46.4	-25.5	46.7	25.2	H
17989	46.4	-25.5	46.7	25.2	V
17961.5	46.3	-25.5	46.7	25.1	H
17967	46.3	-25.5	46.7	25.1	V
2388	42.3	-20	28.1	34.3	H

π/4 DQPSK Ch 39

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17967.5	46.5	-25.5	46.7	25.3	H
17980	46.5	-25.5	46.7	25.3	V
17880.5	46.4	-25.5	46.7	25.2	V
17964	46.4	-25.5	46.7	25.2	V
17978	46.4	-25.5	46.7	25.2	V
17962	46.3	-25.5	46.7	25.1	H

π/4 DQPSK Ch 78

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17998.5	46.6	-25.5	46.7	25.4	V
17942	46.5	-25.5	46.7	25.3	V
17973.5	46.5	-25.5	46.7	25.3	H
17947	46.4	-25.5	46.7	25.2	V
17961	46.4	-25.5	46.7	25.2	V
2487	43.5	-20	28.3	35.2	H

8DPSK Ch 0

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17991	46.6	-25.5	46.7	25.4	H
17995	46.5	-25.5	46.7	25.3	V
17978.5	46.4	-25.5	46.7	25.2	H
17957.5	46.2	-25.5	46.7	25	H
17959.5	46.2	-25.5	46.7	25	V
2390	42.3	-20	28.1	34.3	H

8DPSK Ch 39

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17995	46.6	-25.5	46.7	25.4	H
17948.5	46.4	-25.5	46.7	25.2	H
17974	46.4	-25.5	46.7	25.2	V
17872.5	46.3	-25.5	46.7	25.1	H
17962	46.3	-25.5	46.7	25.1	H
17968.5	46.3	-25.5	46.7	25.1	V

8DPSK Ch 78

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17985	46.3	-25.5	46.7	25.1	V
17966.5	46.2	-25.5	46.7	25	V
17972	46.2	-25.5	46.7	25	V
17974	46.2	-25.5	46.7	25	V
17996.5	46.2	-25.5	46.7	25	V
2487.2	43.7	-20	28.3	35.4	H

Conclusion: Pass

B.7. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW \geq RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK


Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	DH1	Fig.64	0.38	Fig.65	320	121.6	P
	DH3	Fig.66	1.64	Fig.67	99	162.36	P
	DH5	Fig.68	2.89	Fig.69	77	222.53	P

For $\pi/4$ DQPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	2DH1	Fig.70	0.39	Fig.71	321	125.19	P
	2DH3	Fig.72	1.64	Fig.73	133	218.12	P
	2DH5	Fig.74	2.89	Fig.75	53	153.17	P

For 8DPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	3DH1	Fig.76	0.39	Fig.77	320	124.8	P
	3DH3	Fig.78	1.64	Fig.79	109	178.76	P
	3DH5	Fig.80	2.89	Fig.81	66	190.74	P

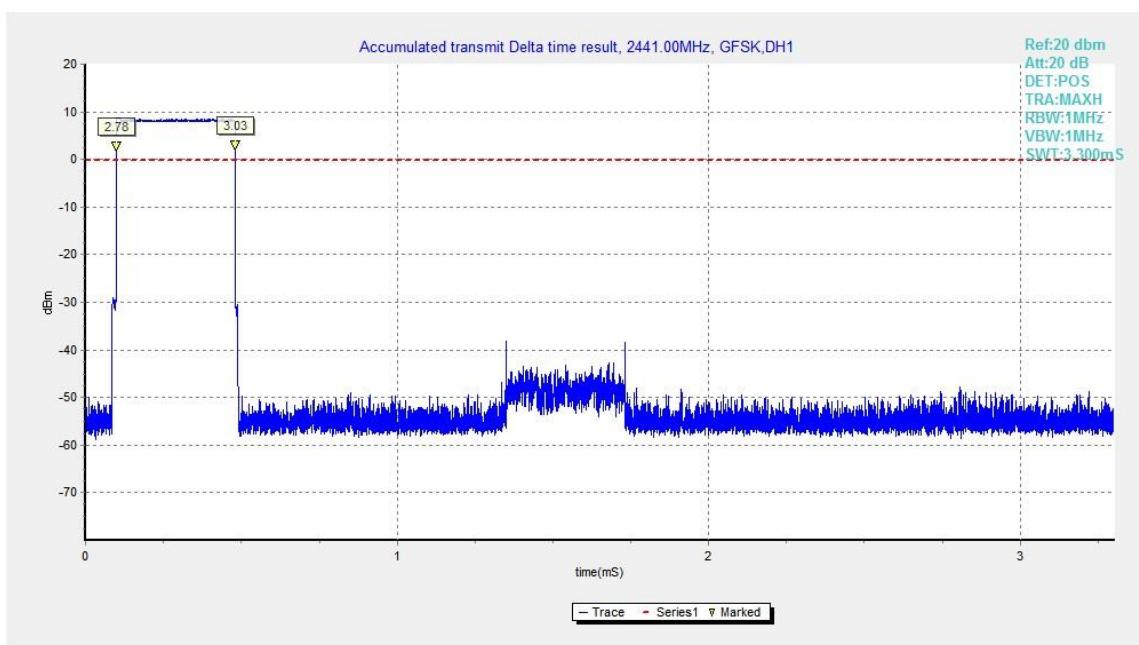Conclusion: PASS
Test graphs as below:

Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

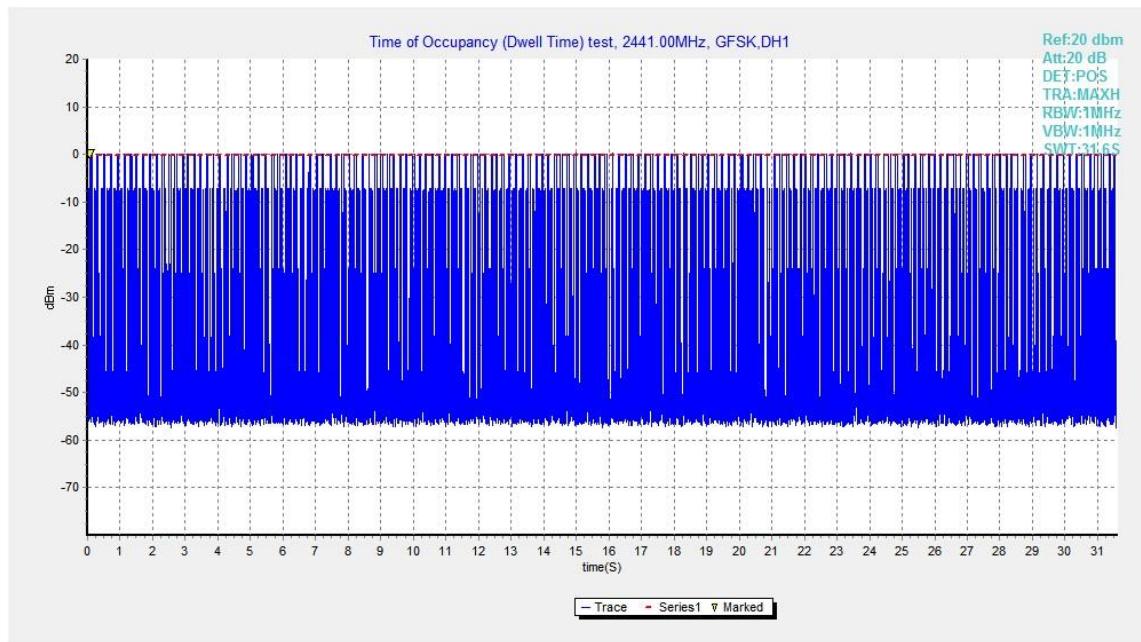


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

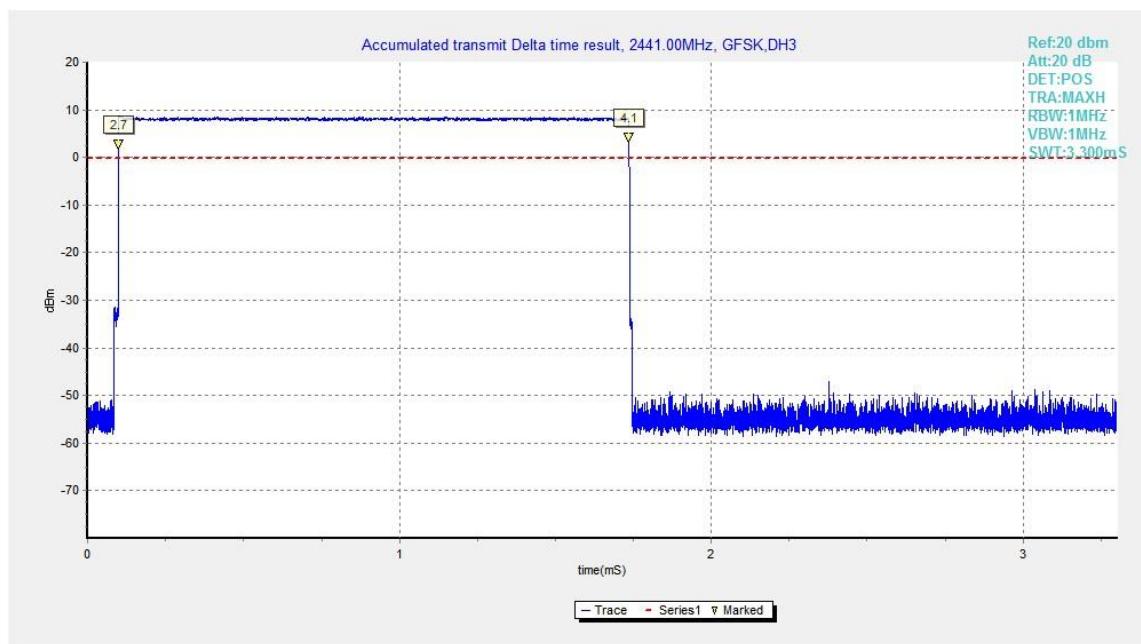


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

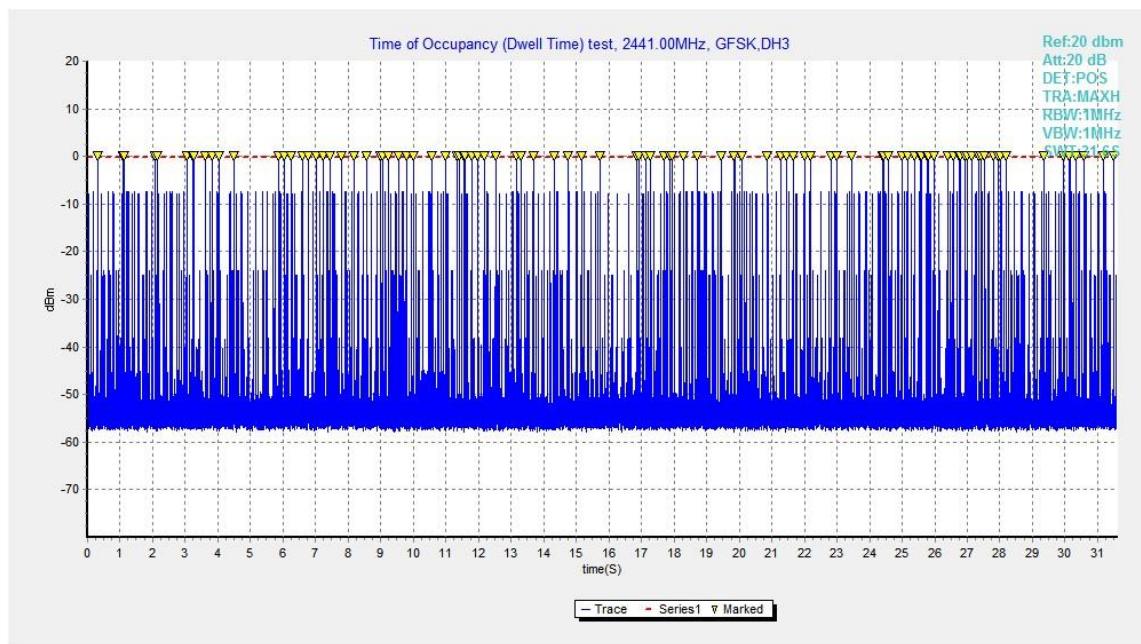


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3

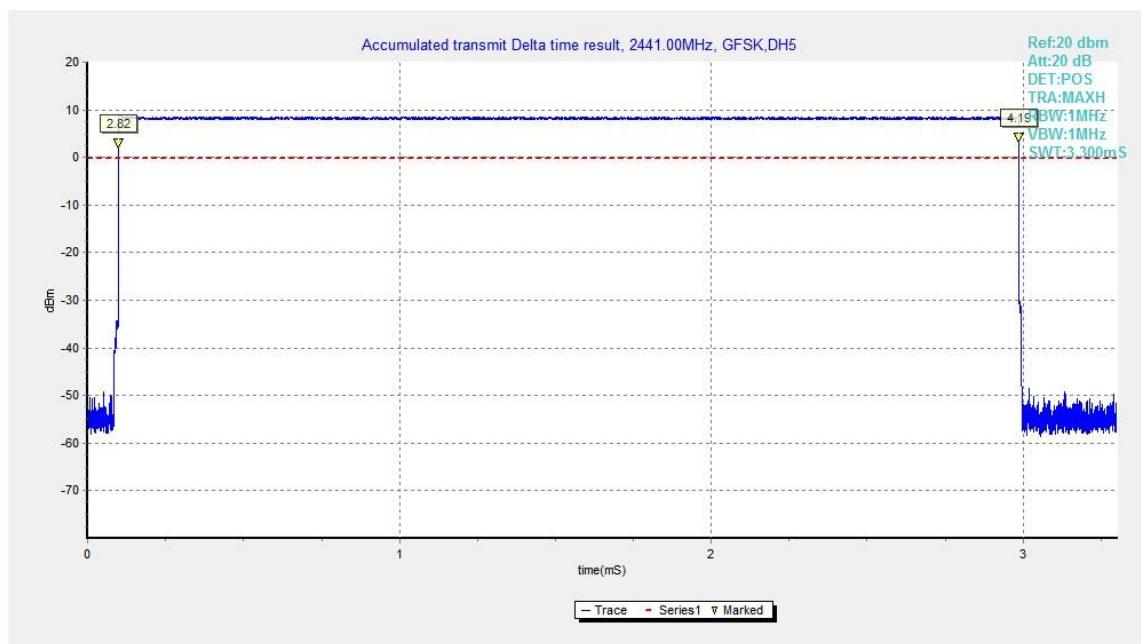


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

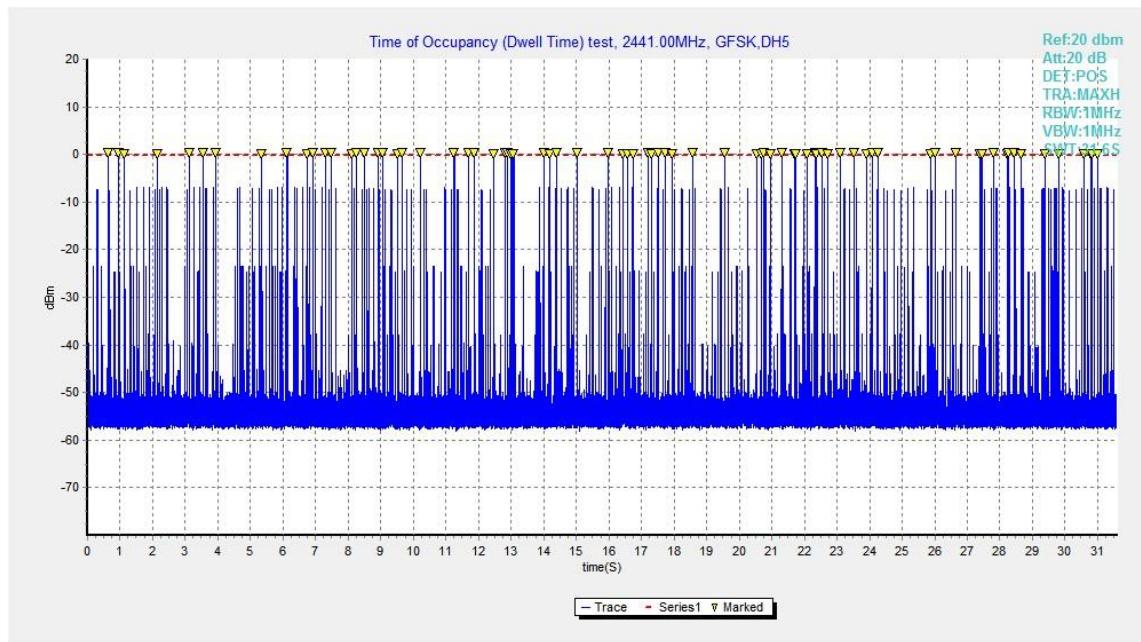


Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

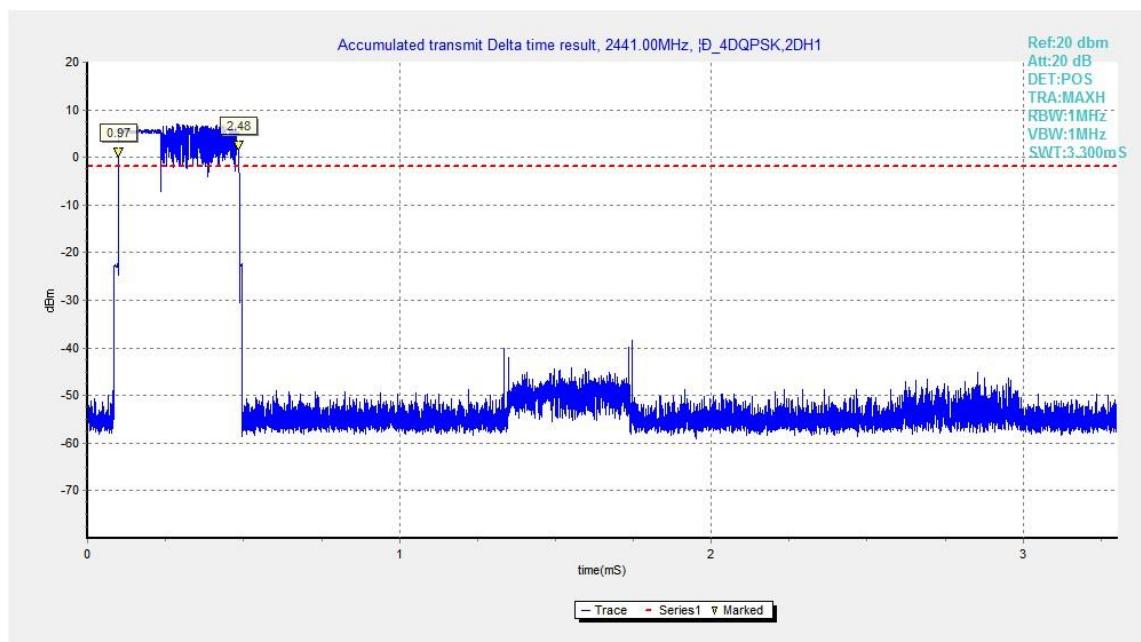


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

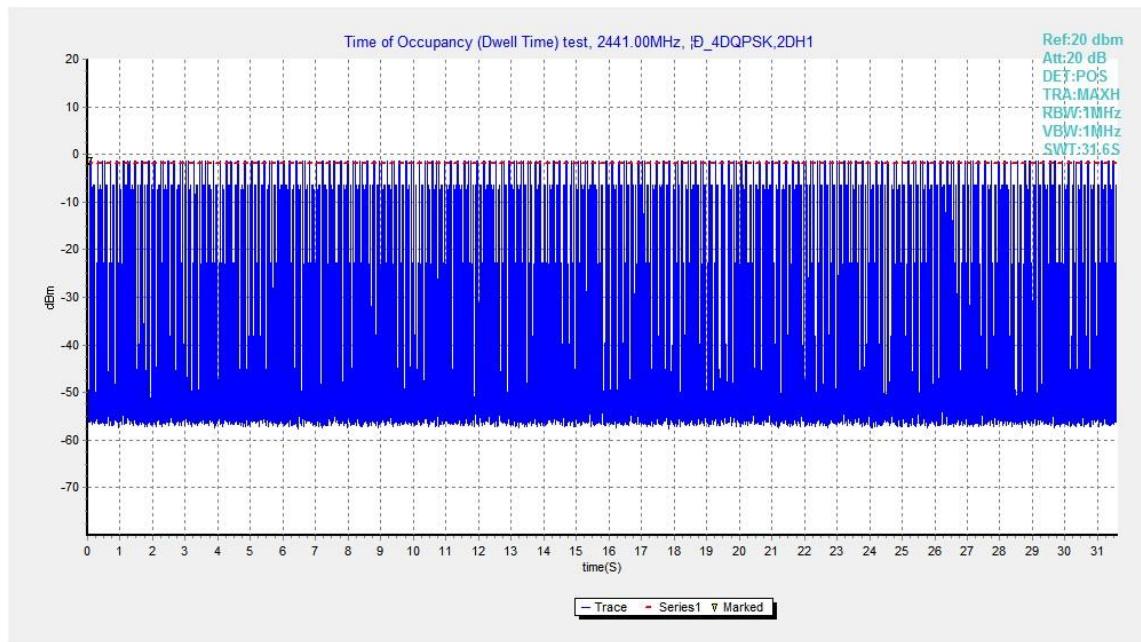


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

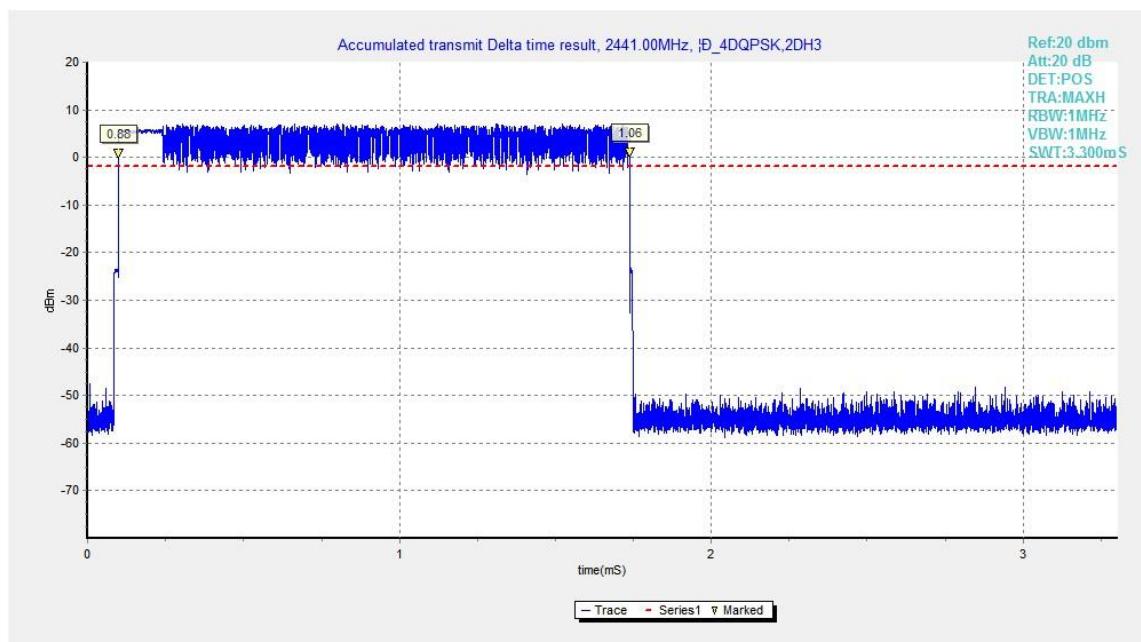


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

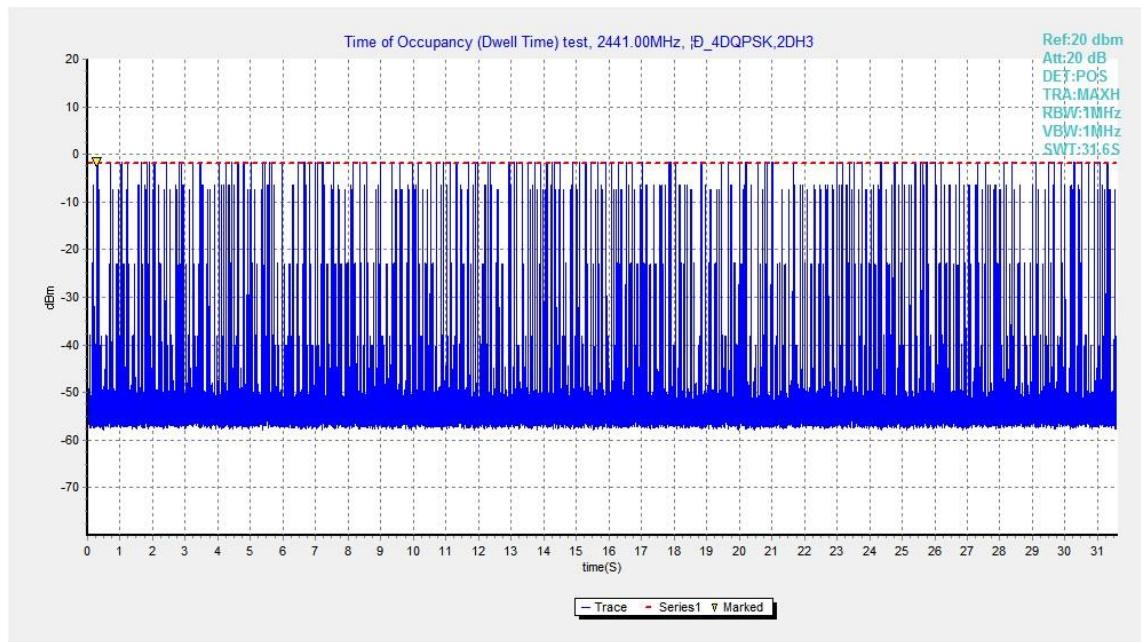


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

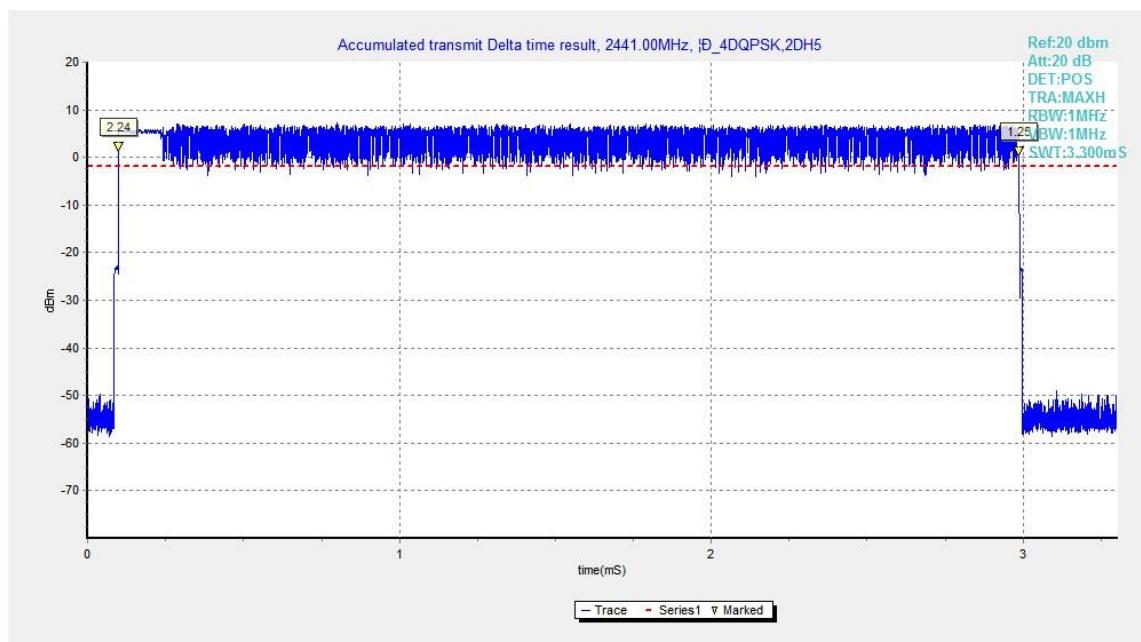


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

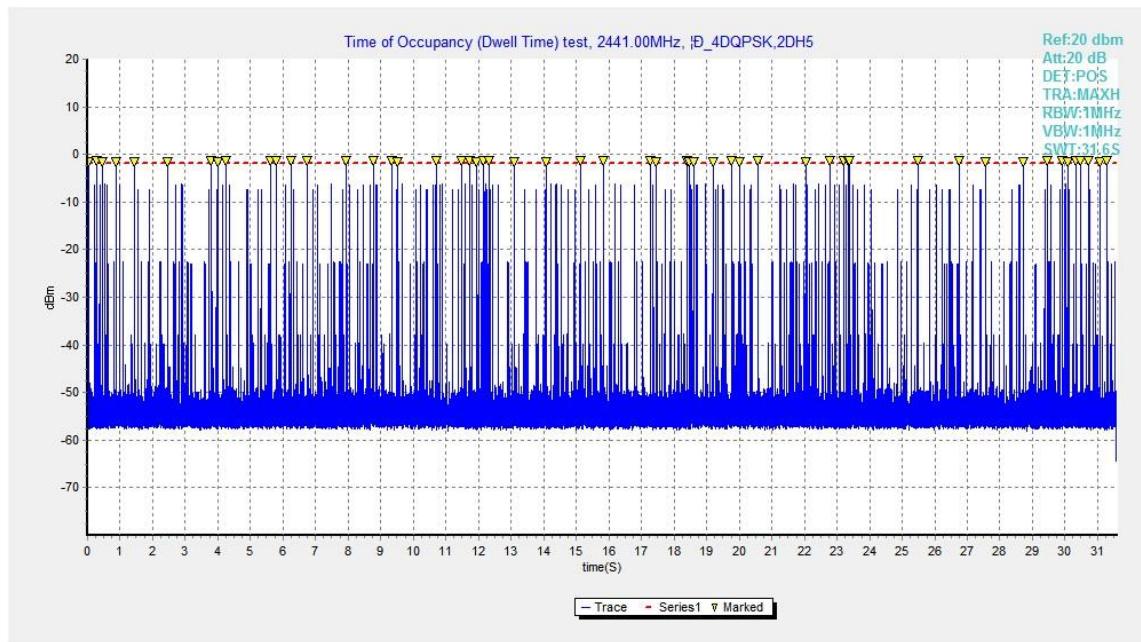


Fig.75. Number of Transmissions Measurement: Channel 39,Packet 2-DH5

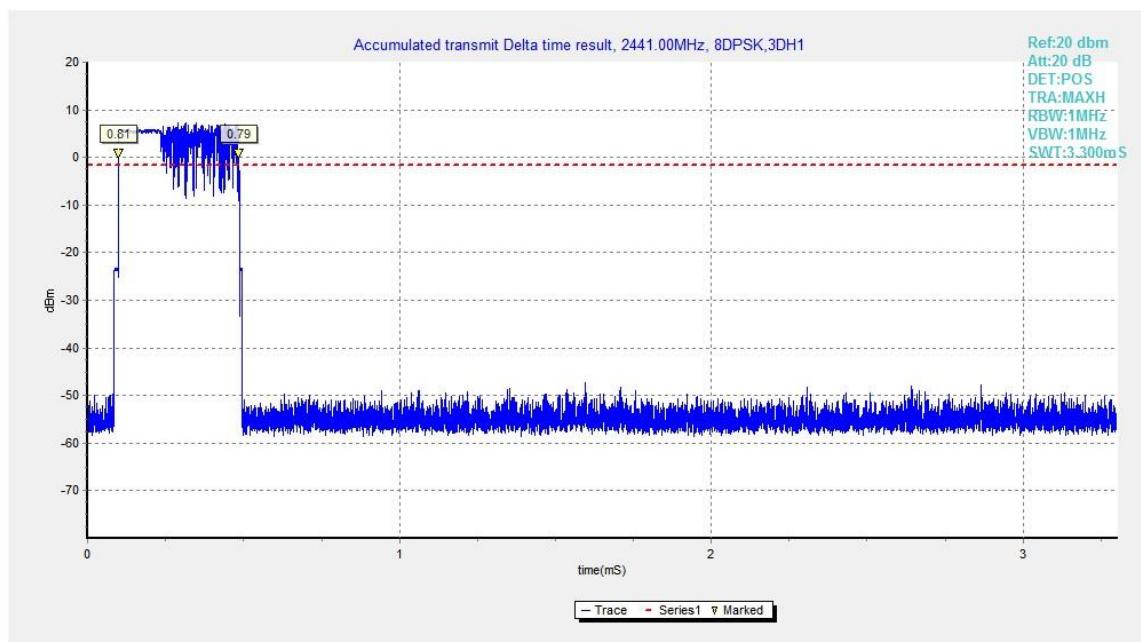


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

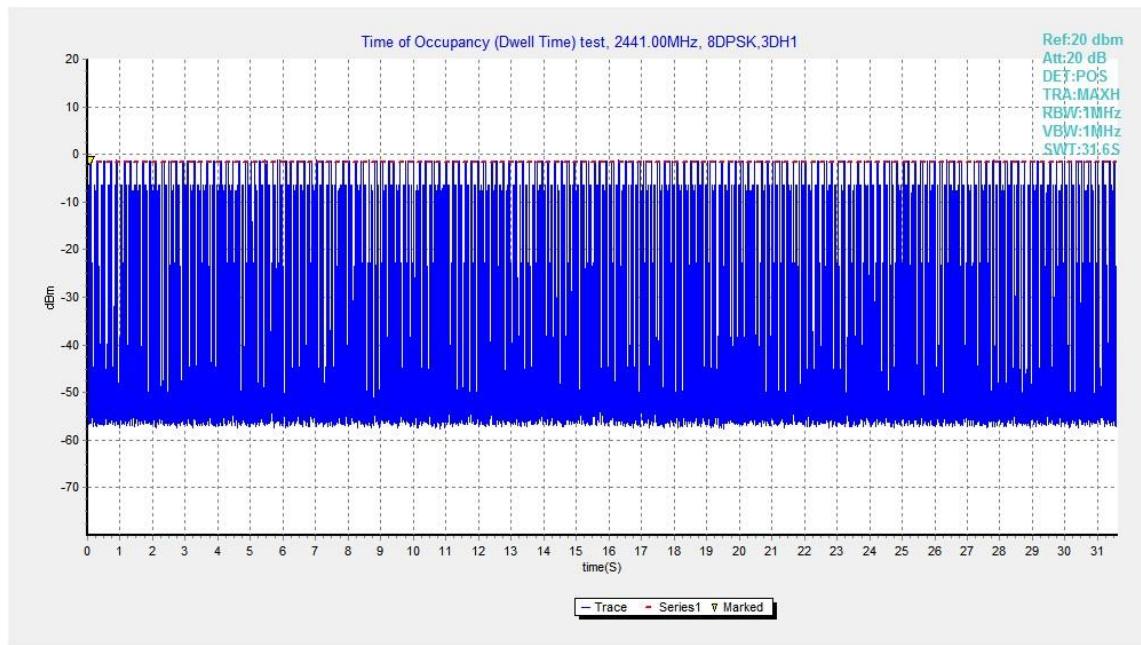


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

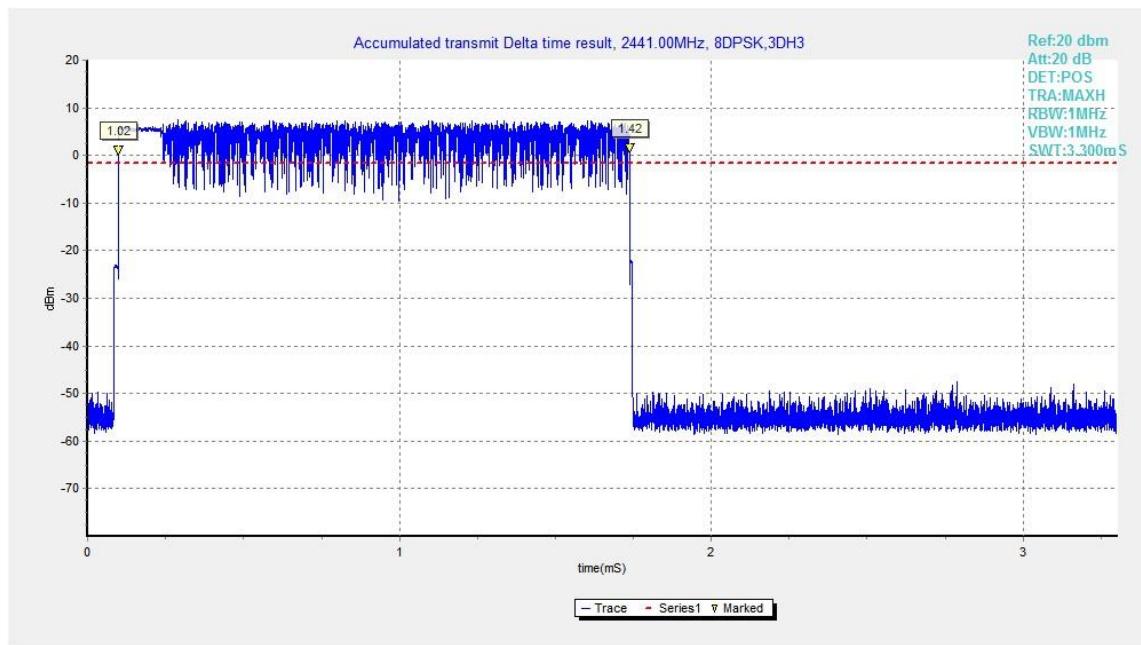


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

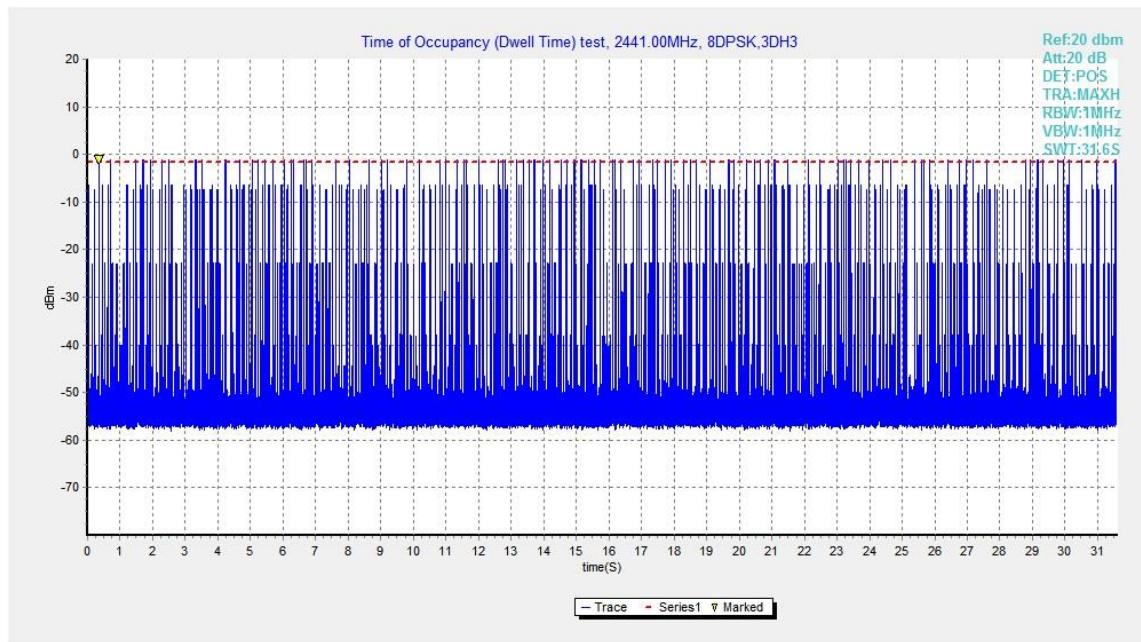


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

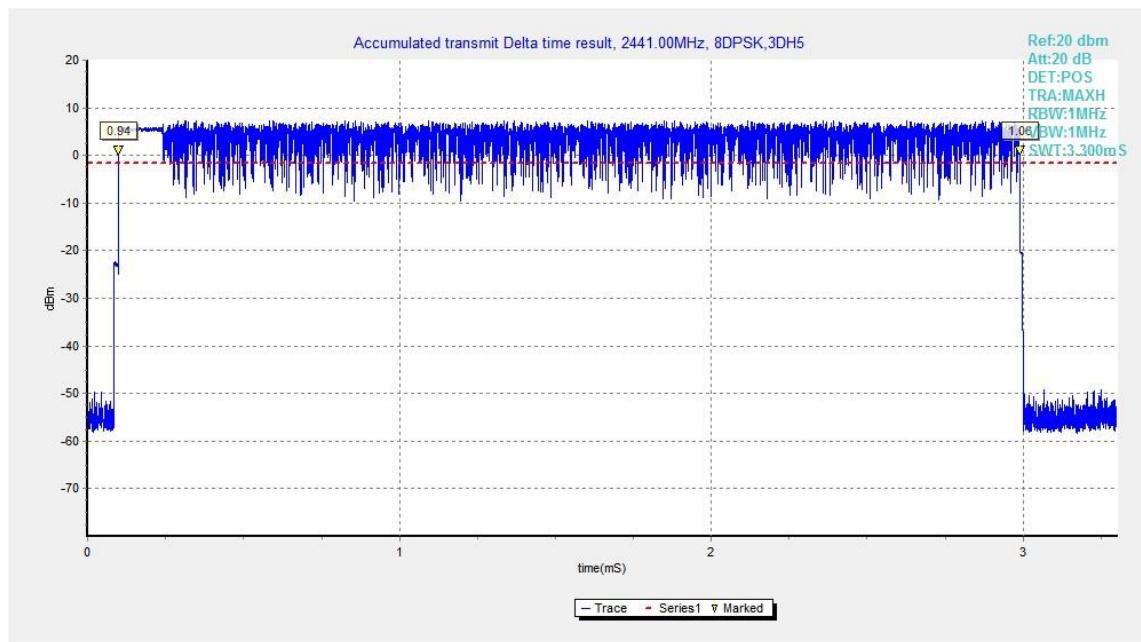


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

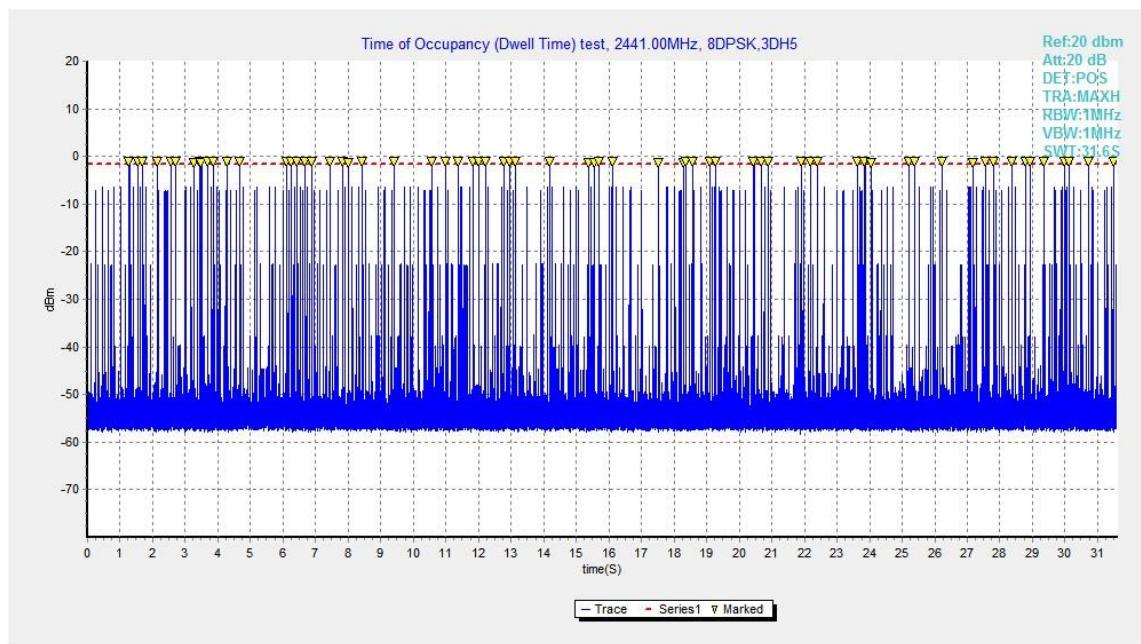


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5

B.8. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	927.75	NA
39	Fig.83	933.75	NA
78	Fig.84	928.50	NA

For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1315.50	NA
39	Fig.86	1284.00	NA
78	Fig.87	1284.00	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1279.50	NA
39	Fig.89	1281.75	NA
78	Fig.90	1299.00	NA

Conclusion: NA

Test graphs as below:

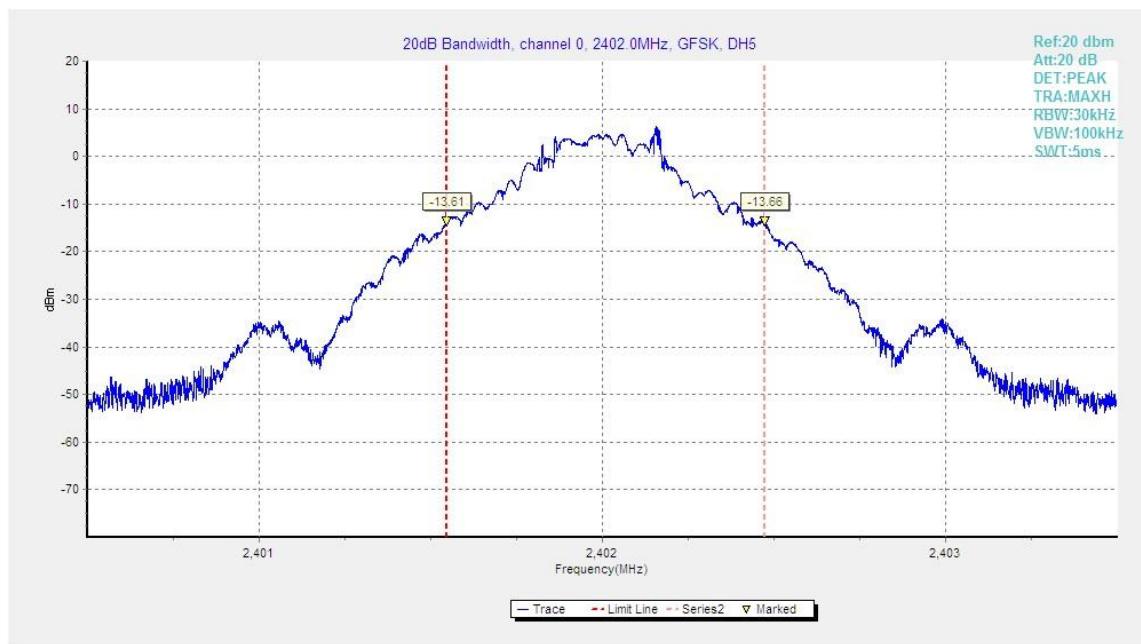


Fig.82. 20dB Bandwidth: GFSK, Channel 0

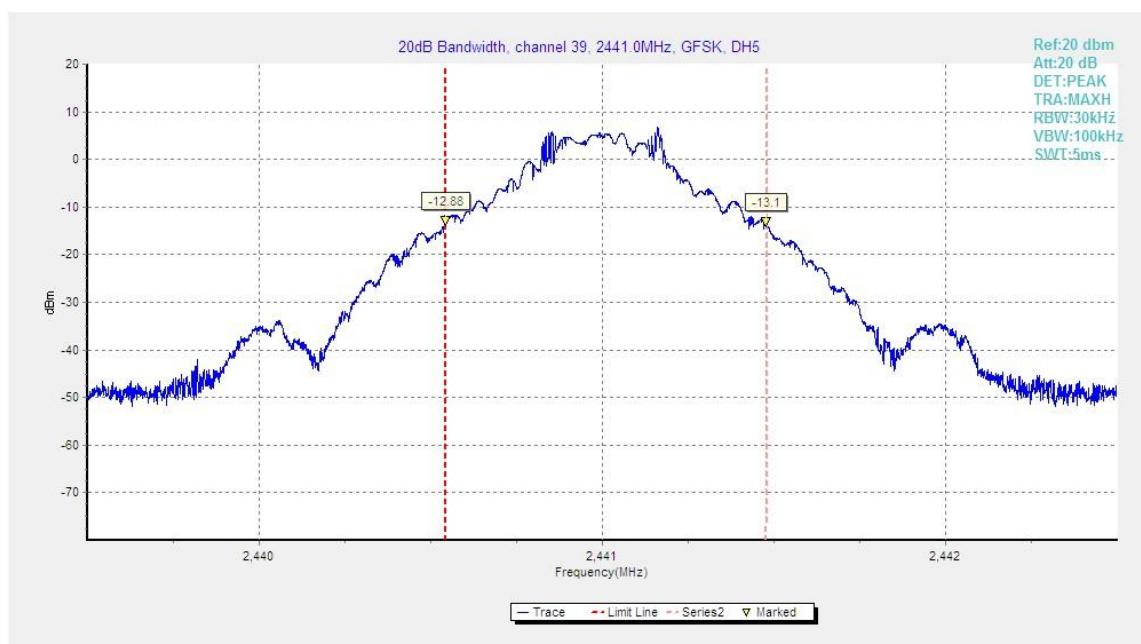


Fig.83. 20dB Bandwidth: GFSK, Channel 39

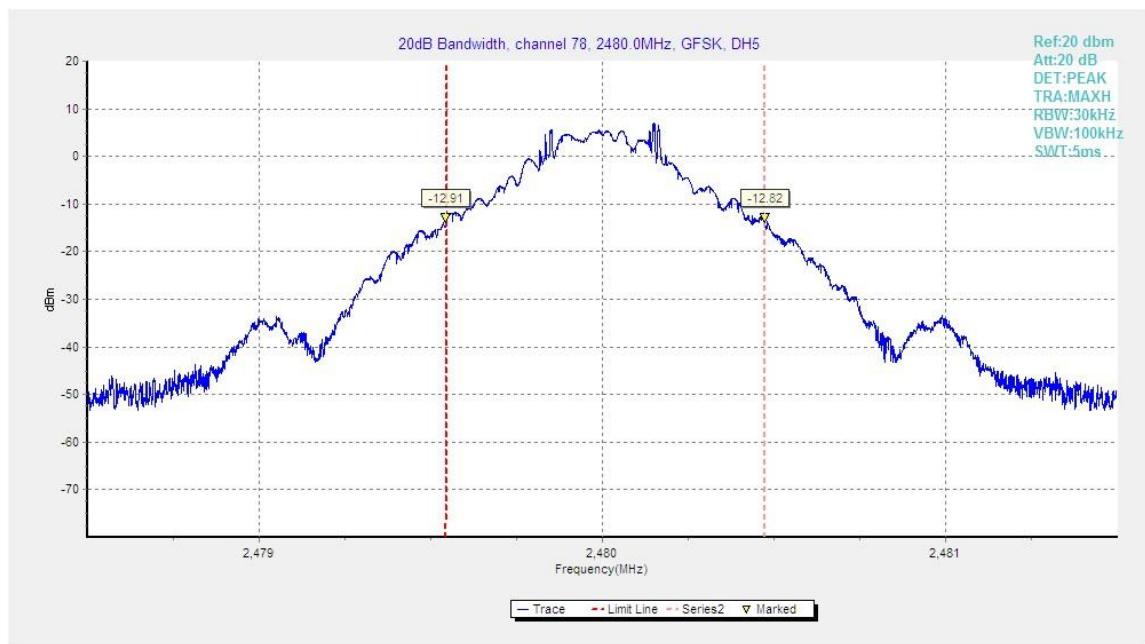


Fig.84. 20dB Bandwidth: GFSK, Channel 78

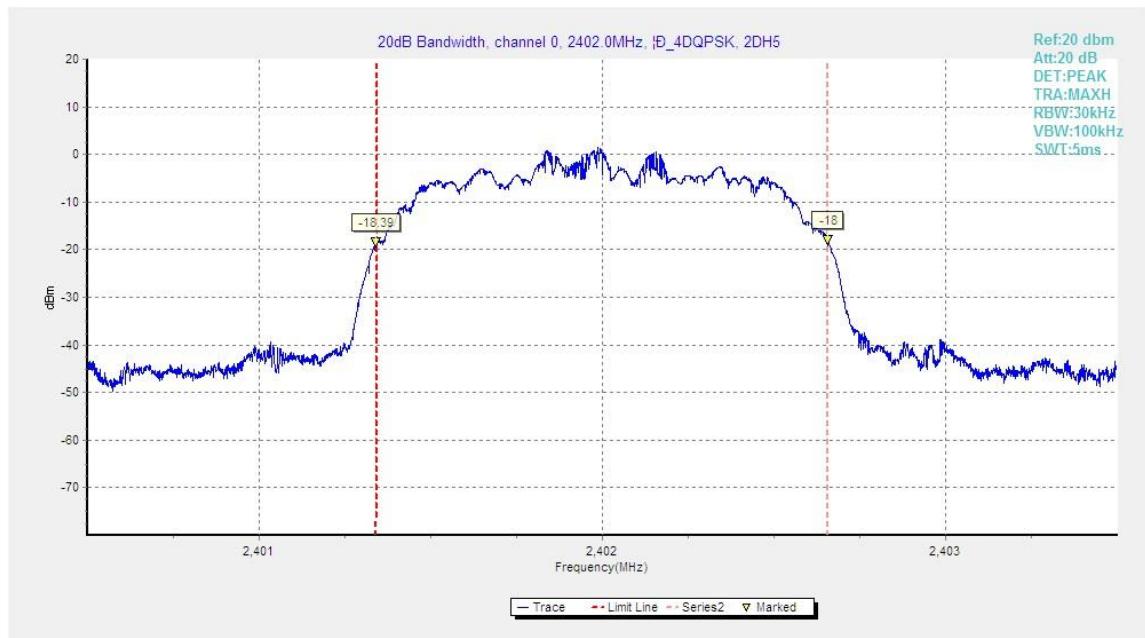


Fig.85. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 0

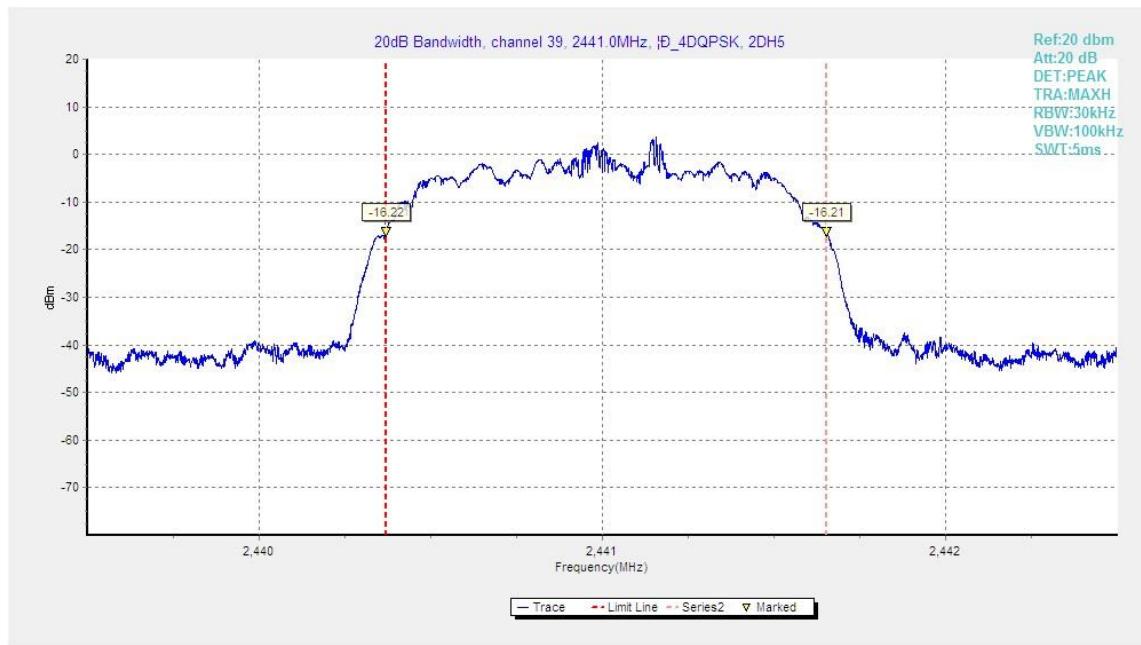


Fig.86. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 39

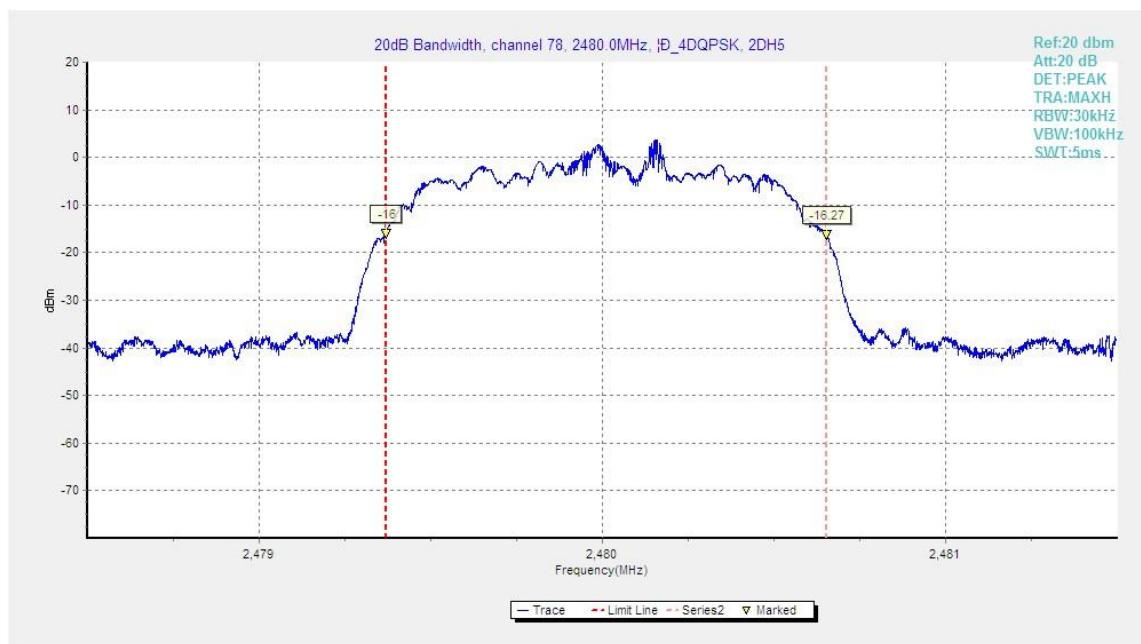


Fig.87. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 78

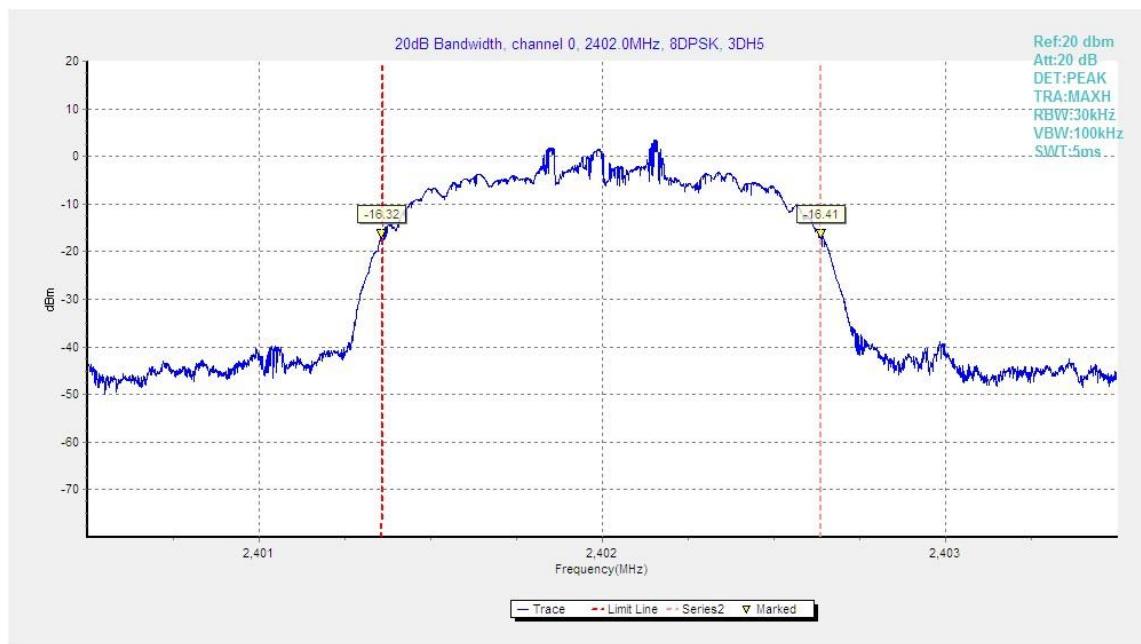


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

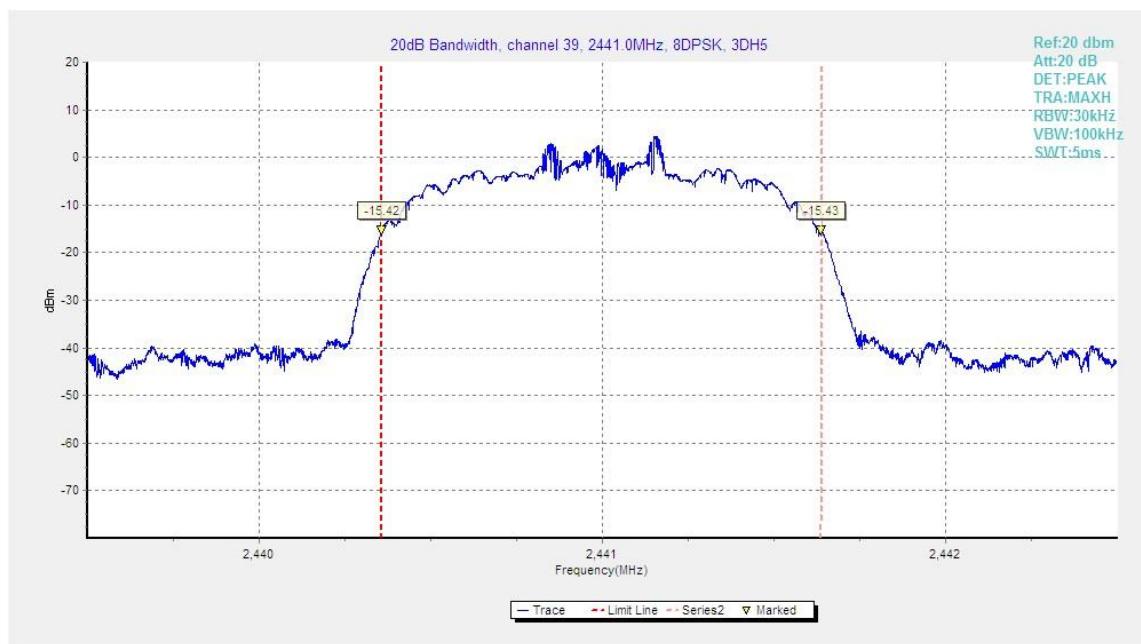


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

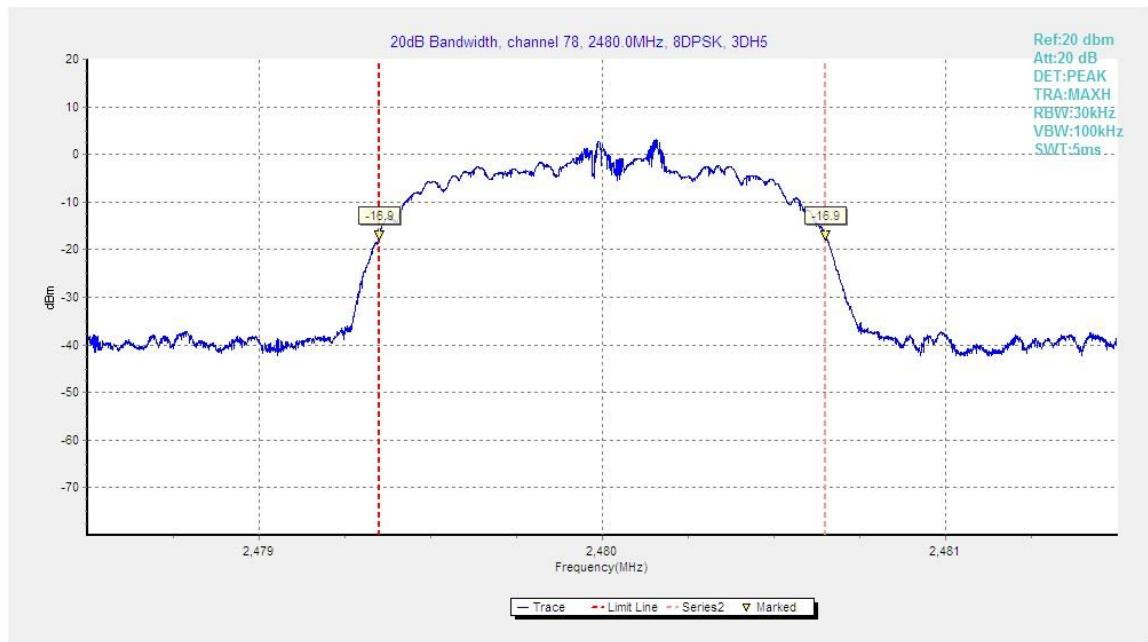


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

B.9. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)	Conclusion
39	Fig.91	1155.00

For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)	Conclusion
39	Fig.92	1020.75

For 8DPSK

Channel	Carrier frequency separation (kHz)	Conclusion
39	Fig.93	997.50

Conclusion: PASS

Test graphs as below:

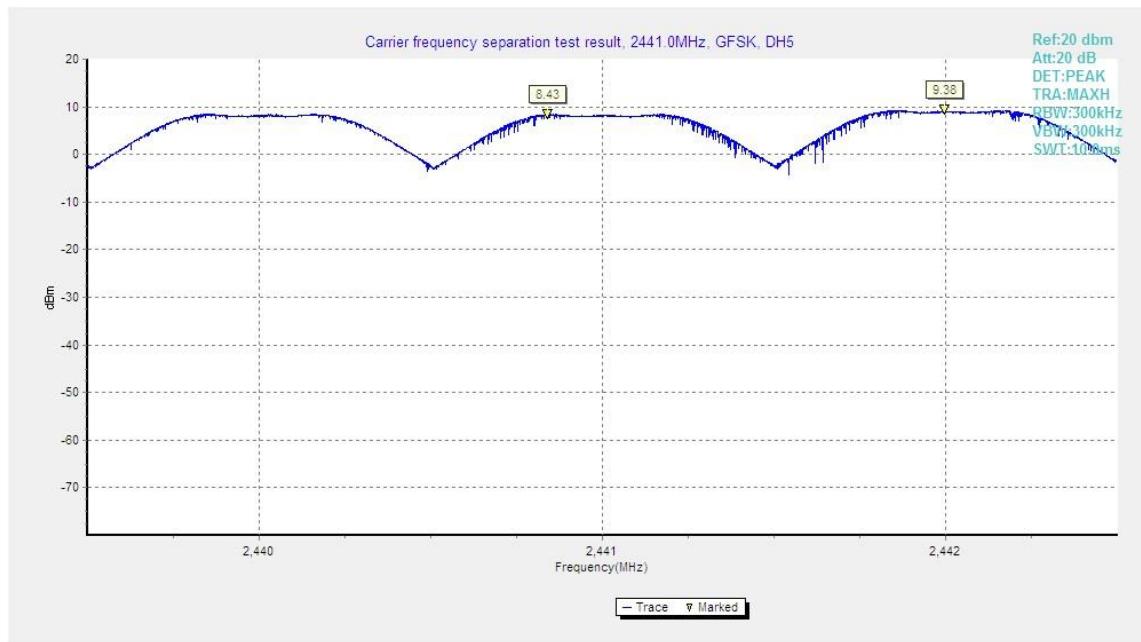


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

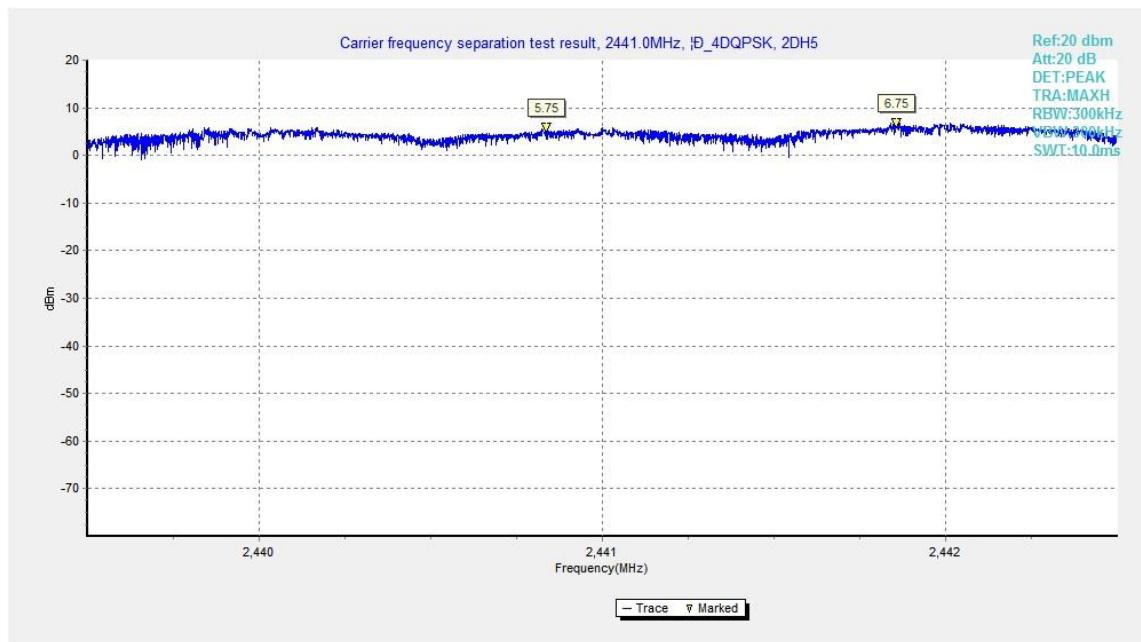


Fig.92. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

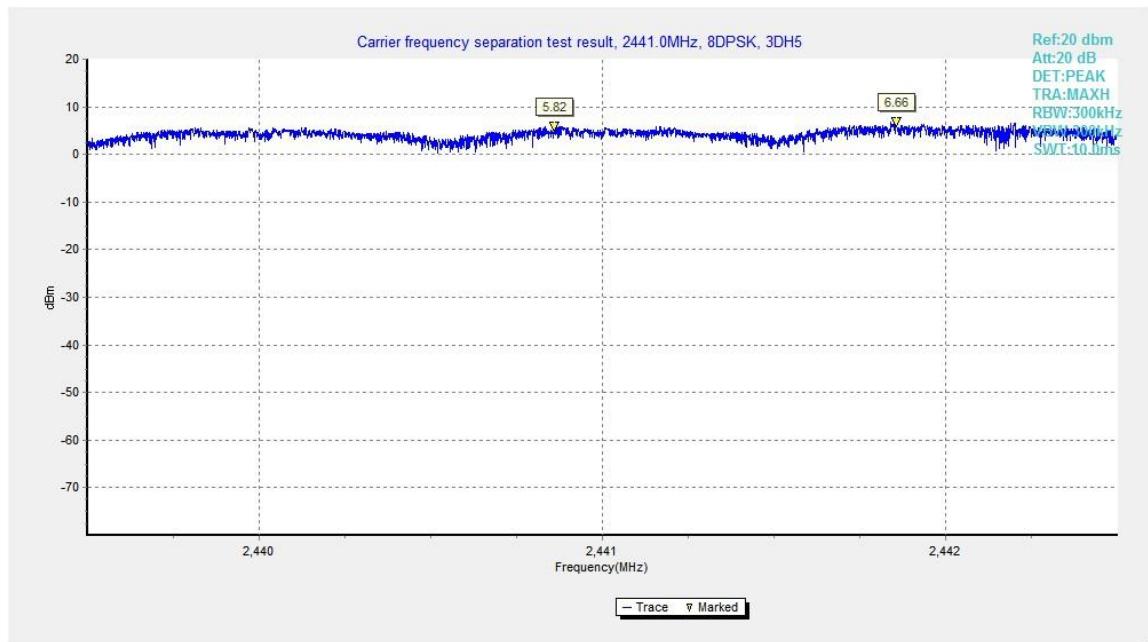


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

B.10. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.94	79
40~78	Fig.95	

For 1/4 DQPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.96	79
40~78	Fig.97	

For 8DPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.98	79
40~78	Fig.99	

Conclusion: PASS

Test graphs as below:

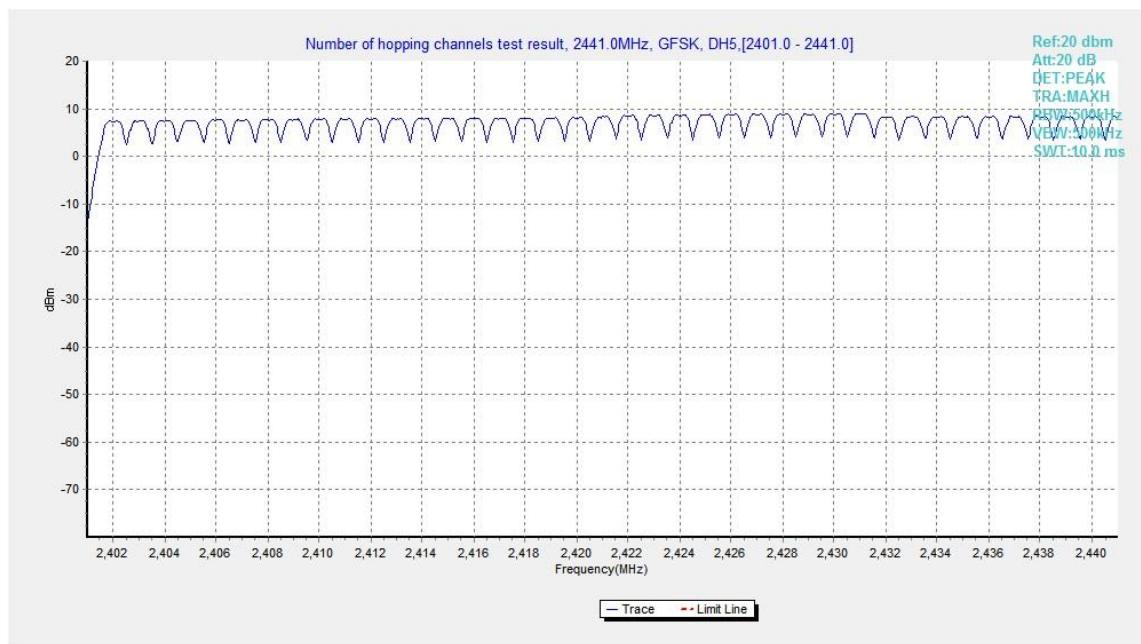


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

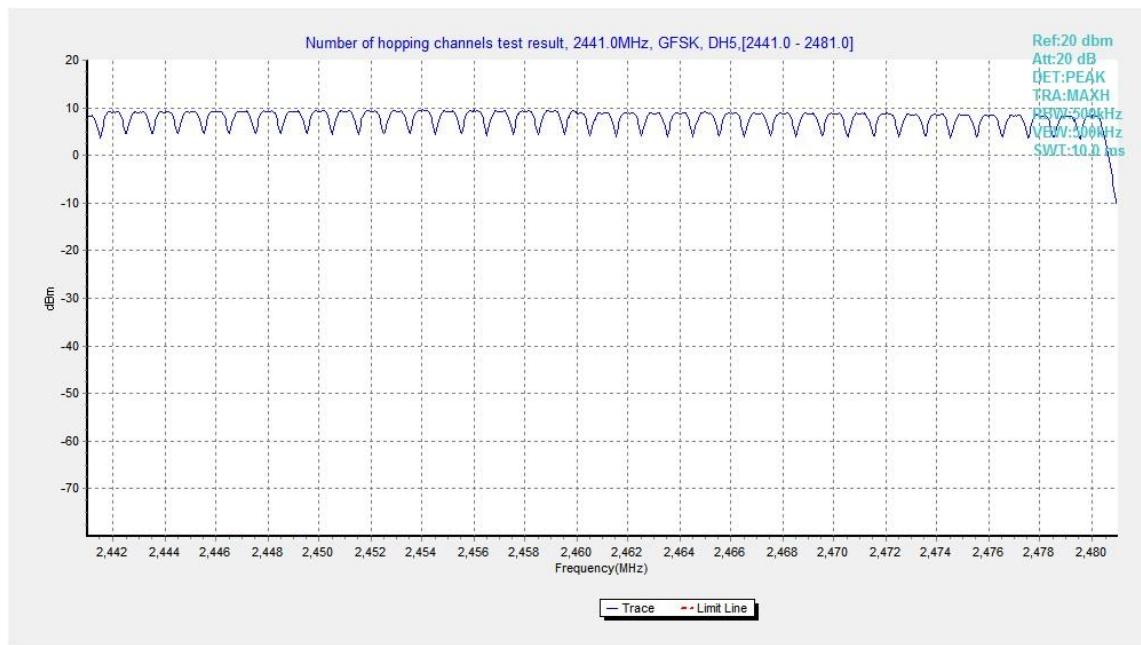


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

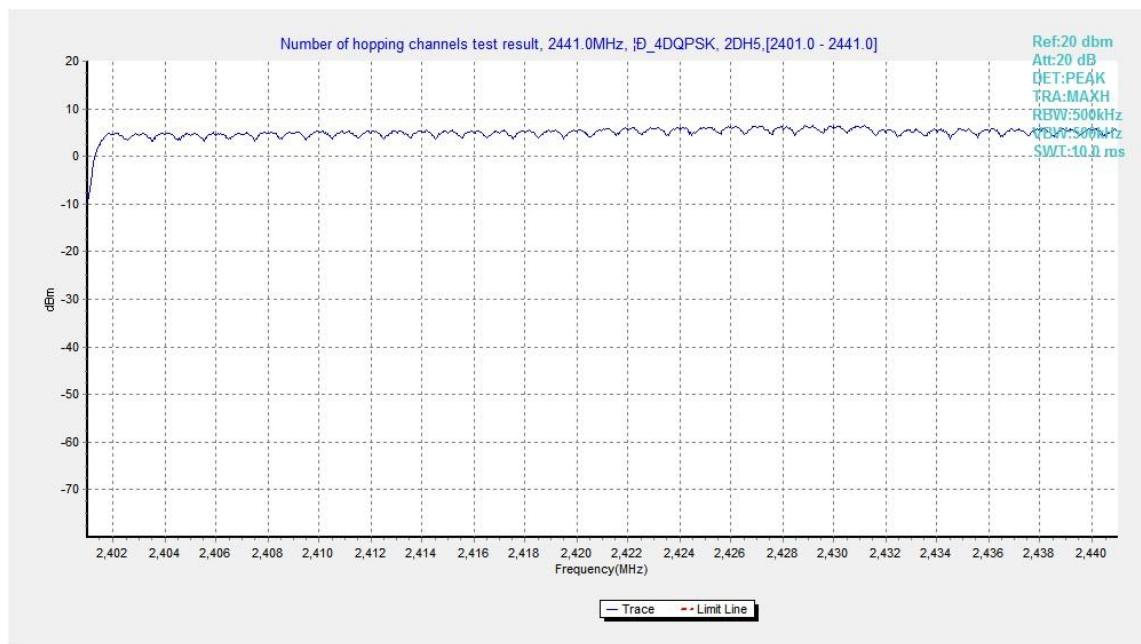


Fig.96. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

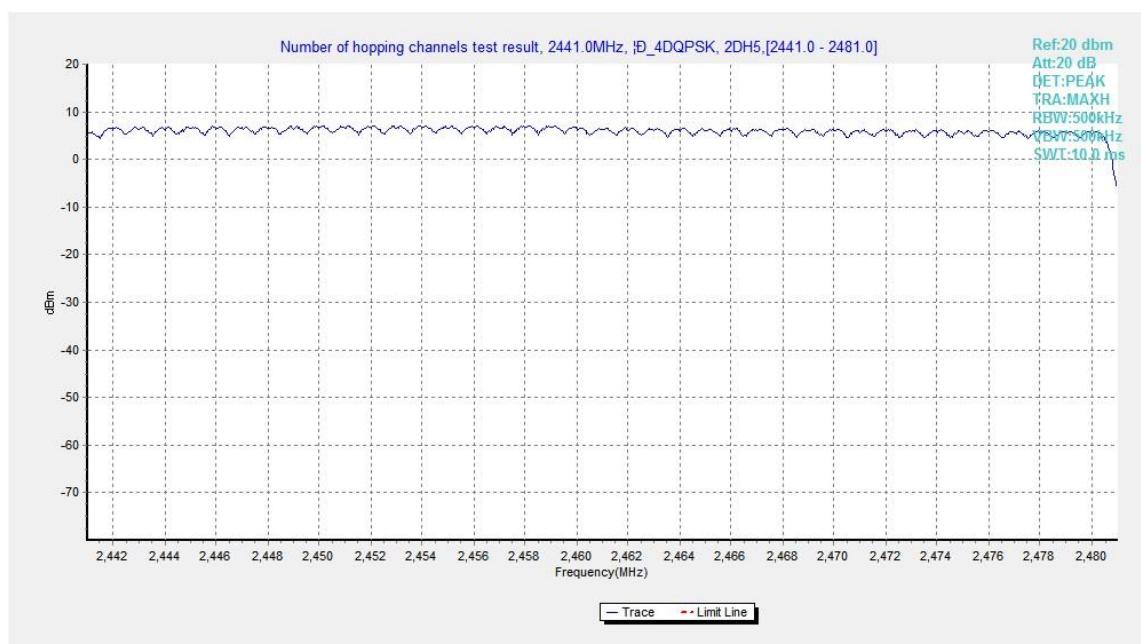


Fig.97. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

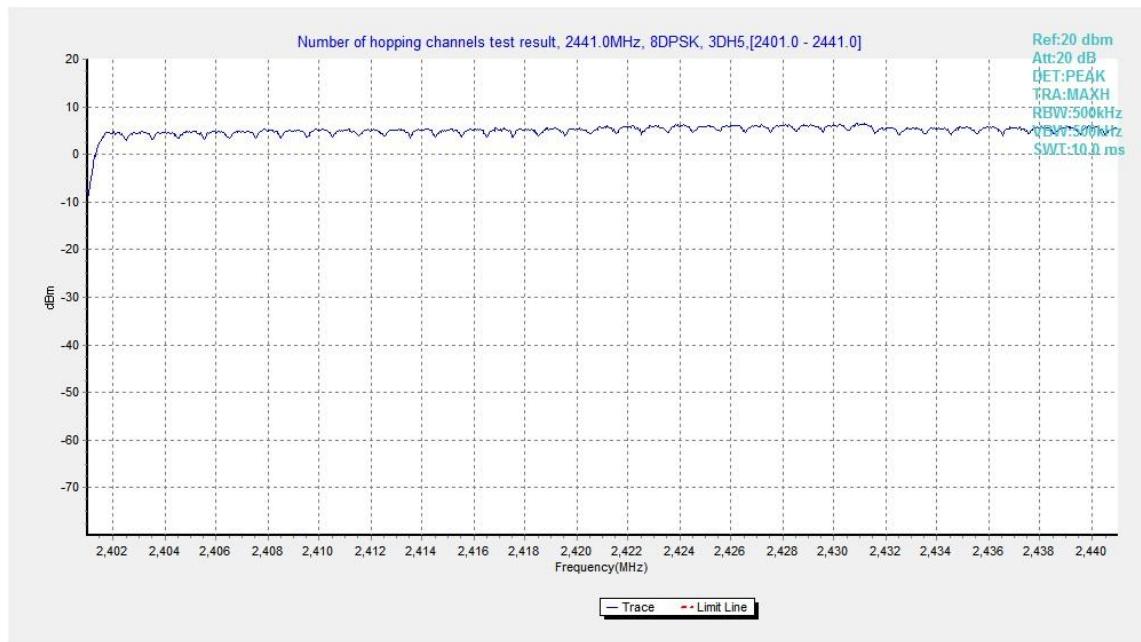


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

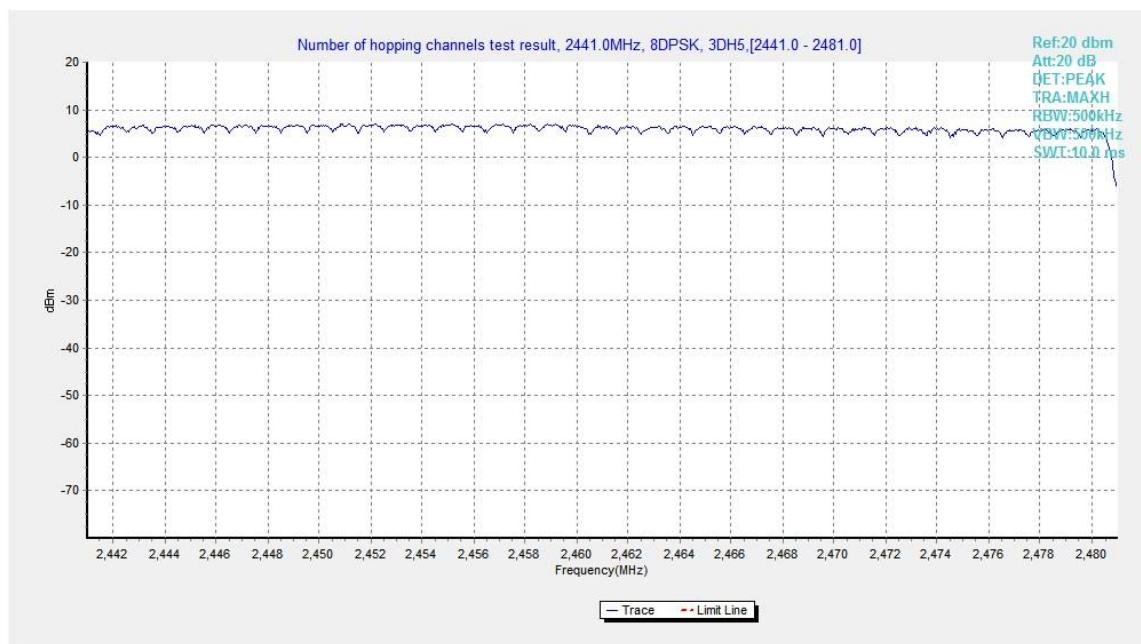


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

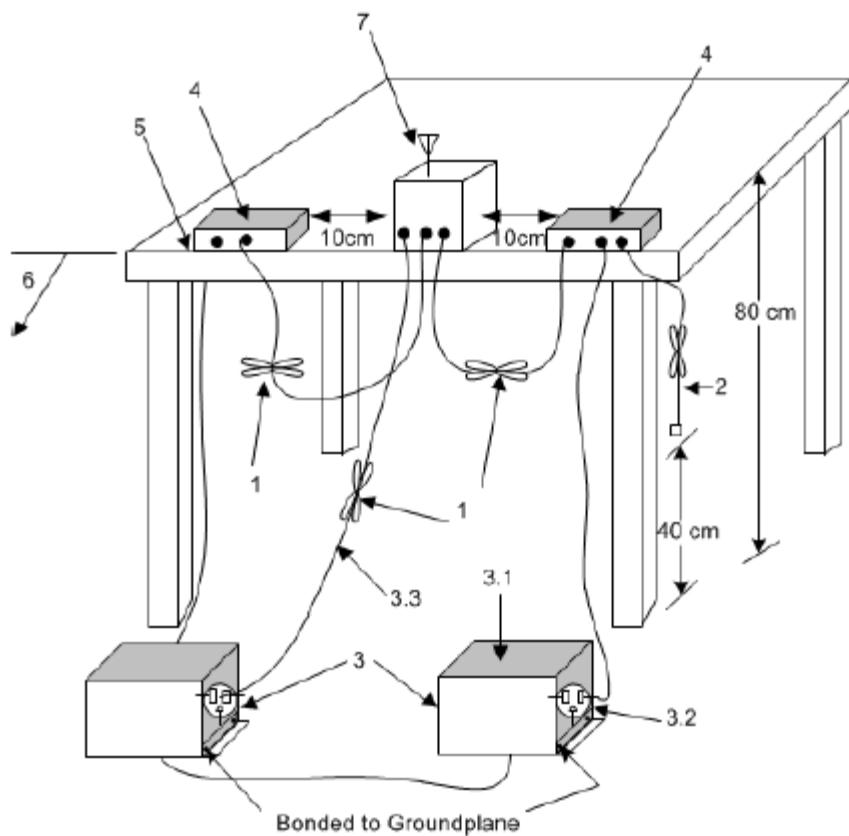
B.11. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2

Setup:

A stand-alone EUT shall be placed in the center along the back edge of the tabletop. For multiunit tabletop systems, the EUT shall be centered laterally (left to right facing the tabletop) on the tabletop and its rear shall be flush with the rear of the table.

Accessories that are part of an EUT system tested on a tabletop shall be placed in a test arrangement on one or both sides of the host with a 10 cm separation between the nearest points of the cabinets. The rear of the host and accessories shall be flush with the back of the supporting tabletop unless that would not be typical of normal use. If more than two accessories are present, then an equipment test arrangement shall be chosen that maintains 10 cm spacing between cabinets unless the equipment is normally located closer together.



Exploratory ac power-line conducted emission measurements

Exploratory measurements shall be used to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement. For each mode of operation and for each ac power current-carrying conductor, cable manipulation shall be performed within the range of likely configurations. For this measurement or series of measurements, the frequency spectrum of interest shall be monitored looking for the emission that has the highest amplitude relative to the limit. Once that emission is found for each current-carrying conductor of each power cord associated with the EUT (but not the cords associated with non-EUT equipment in the overall system), the one configuration and

arrangement and mode of operation that produces the emission closest to the limit over all of the measured conductors shall be recorded.

Final ac power-line conducted emission measurements

Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation. If the EUT is composed of equipment units that have their own separate ac power connections (e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network), then each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be measured separately. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

EUT ID: EUT1

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger AE5			
		bluetooth	Idle		
0.15 to 0.5	66 to 56				
0.5 to 5	56	Fig.B.11.1	Fig.B.11.2	P	
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger AE5			
		bluetooth	Idle		
0.15 to 0.5	56 to 46				
0.5 to 5	46	Fig.B.11.1	Fig.B.11.2	P	
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger AE6			
		bluetooth	Idle		
0.15 to 0.5	67 to 56	Fig.B.11.3	Fig.B.11.4	P	
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger AE6			
		bluetooth	Idle		
0.15 to 0.5	56 to 46	Fig.B.11.3	Fig.B.11.4	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger AE7			
		bluetooth	Idle		
0.15 to 0.5	68 to 56	Fig.B.11.5	Fig.B.11.6	P	
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger AE7			
		bluetooth	Idle		
0.15 to 0.5	56 to 46	Fig.B.11.5	Fig.B.11.6	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Quasi-peak Limit)


Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger AE8			
		bluetooth	Idle		
0.15 to 0.5	69 to 56	Fig.B.11.7	Fig.B.11.8	P	
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger AE8			
		bluetooth	Idle		
0.15 to 0.5	56 to 46	Fig.B.11.7	Fig.B.11.8	P	
0.5 to 5	46				
5 to 30	50				

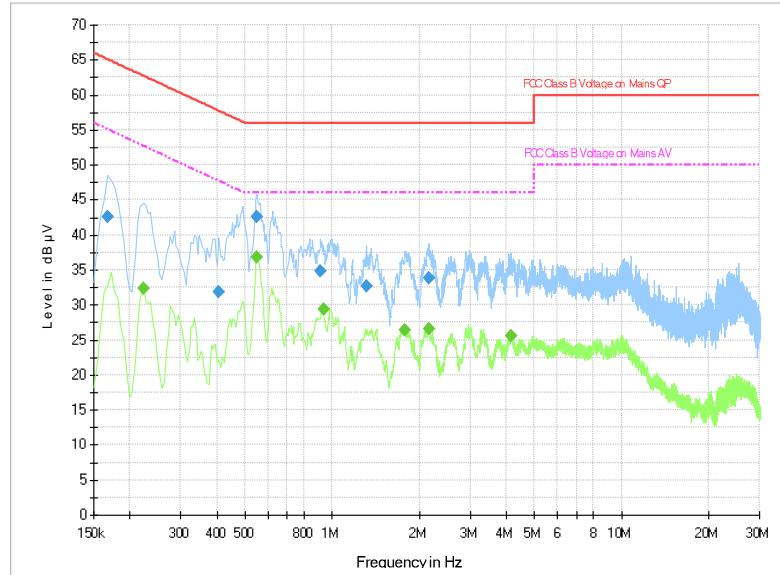NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:

Fig.B.11.1 AC Powerline Conducted Emission with Charger AE5- bluetooth

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.168000	42.5	1000.0	9.000	On	L1	19.7	22.5	65.1	
0.406500	31.9	1000.0	9.000	On	L1	19.6	25.8	57.7	
0.550500	42.6	1000.0	9.000	On	N	19.5	13.4	56.0	
0.910500	34.8	1000.0	9.000	On	L1	19.6	21.2	56.0	
1.311000	32.7	1000.0	9.000	On	L1	19.6	23.3	56.0	
2.170500	33.8	1000.0	9.000	On	L1	19.6	22.2	56.0	

Final Result 2

Frequency (MHz)	CAverage (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.222000	32.4	1000.0	9.000	On	N	19.6	20.3	52.7	
0.550500	36.7	1000.0	9.000	On	N	19.5	9.3	46.0	
0.933000	29.3	1000.0	9.000	On	N	19.6	16.7	46.0	
1.788000	26.4	1000.0	9.000	On	N	19.5	19.6	46.0	
2.170500	26.6	1000.0	9.000	On	L1	19.6	19.4	46.0	
4.137000	25.6	1000.0	9.000	On	L1	19.7	20.4	46.0	

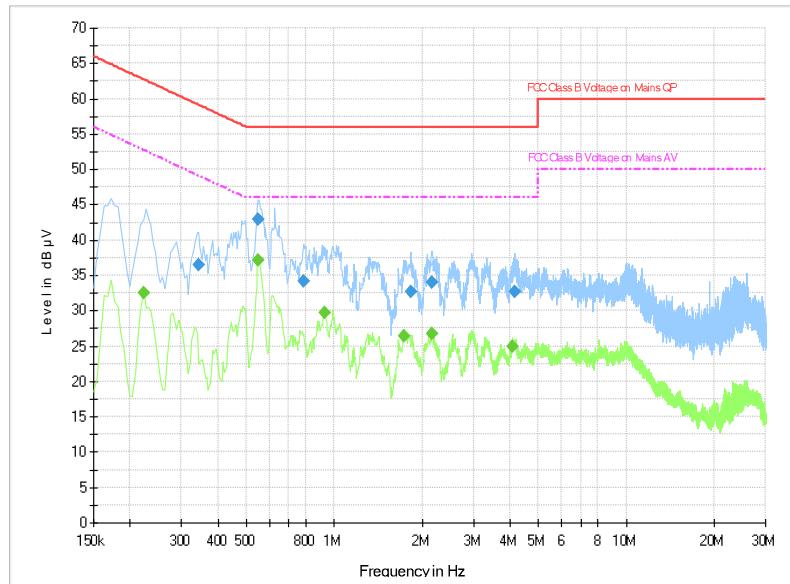


Fig.B.11.2 AC Powerline Conducted Emission with Charger AE5-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB _{μV})	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _{μV})	Comment
0.343500	36.4	1000.0	9.000	On	N	19.6	22.7	59.1	
0.550500	42.9	1000.0	9.000	On	L1	19.6	13.1	56.0	
0.789000	34.1	1000.0	9.000	On	L1	19.6	21.9	56.0	
1.833000	32.7	1000.0	9.000	On	N	19.5	23.3	56.0	
2.152500	34.0	1000.0	9.000	On	N	19.5	22.0	56.0	
4.146000	32.6	1000.0	9.000	On	L1	19.7	23.4	56.0	

Final Result 2

Frequency (MHz)	CAverage (dB _{μV})	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _{μV})	Comment
0.222000	32.6	1000.0	9.000	On	N	19.6	20.2	52.7	
0.550500	37.1	1000.0	9.000	On	L1	19.6	8.9	46.0	
0.928500	29.7	1000.0	9.000	On	N	19.6	16.3	46.0	
1.729500	26.3	1000.0	9.000	On	L1	19.5	19.7	46.0	
2.157000	26.8	1000.0	9.000	On	N	19.5	19.2	46.0	
4.083000	24.9	1000.0	9.000	On	N	19.7	21.1	46.0	

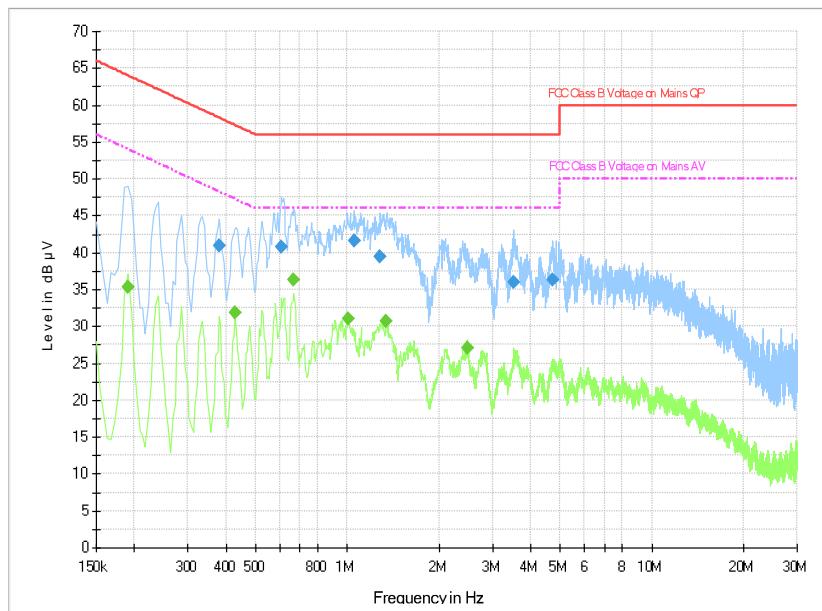


Fig.B.11.3 AC Powerline Conducted Emission with Charger AE6- bluetooth

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.379500	41.0	1000.0	9.000	On	L1	19.6	17.3	58.3	
0.609000	40.8	1000.0	9.000	On	L1	19.6	15.2	56.0	
1.050000	41.6	1000.0	9.000	On	L1	19.6	14.4	56.0	
1.284000	39.4	1000.0	9.000	On	L1	19.6	16.6	56.0	
3.525000	36.0	1000.0	9.000	On	N	19.6	20.0	56.0	
4.722000	36.4	1000.0	9.000	On	L1	19.8	19.6	56.0	

Final Result 2

Frequency (MHz)	CAverage (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.190500	35.4	1000.0	9.000	On	N	19.5	18.6	54.0	
0.429000	31.8	1000.0	9.000	On	L1	19.6	15.5	47.3	
0.667500	36.3	1000.0	9.000	On	L1	19.6	9.7	46.0	
1.009500	31.0	1000.0	9.000	On	L1	19.6	15.0	46.0	
1.338000	30.6	1000.0	9.000	On	N	19.6	15.4	46.0	
2.472000	27.1	1000.0	9.000	On	N	19.6	18.9	46.0	

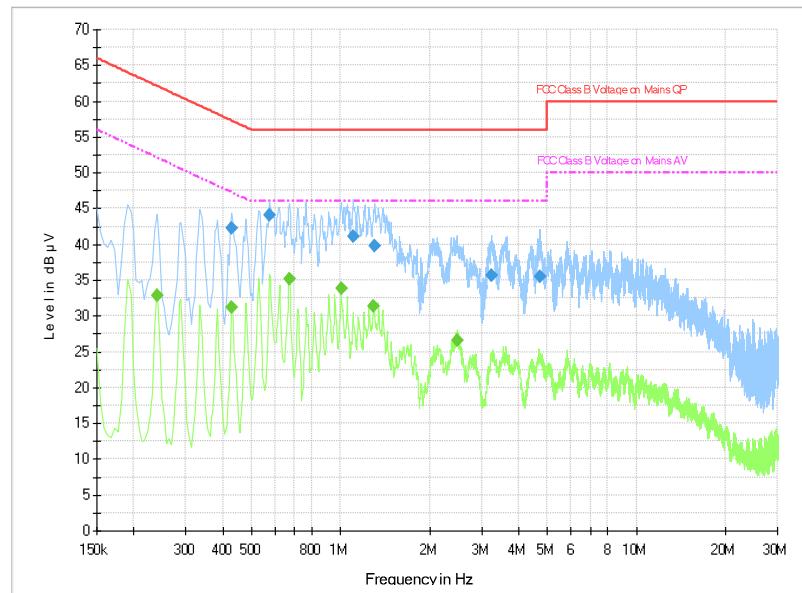


Fig.B.11.4 AC Powerline Conducted Emission with Charger AE6-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB _µ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _µ V)	Comment
0.429000	42.3	1000.0	9.000	On	N	19.6	15.0	57.3	
0.573000	44.1	1000.0	9.000	On	L1	19.6	11.9	56.0	
1.104000	41.2	1000.0	9.000	On	L1	19.6	14.8	56.0	
1.306500	39.8	1000.0	9.000	On	L1	19.6	16.2	56.0	
3.246000	35.6	1000.0	9.000	On	N	19.6	20.4	56.0	
4.708500	35.5	1000.0	9.000	On	L1	19.8	20.5	56.0	

Final Result 2

Frequency (MHz)	CAverage (dB _µ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _µ V)	Comment
0.240000	32.9	1000.0	9.000	On	N	19.6	19.2	52.1	
0.429000	31.1	1000.0	9.000	On	N	19.6	16.1	47.3	
0.672000	35.2	1000.0	9.000	On	L1	19.6	10.8	46.0	
1.005000	33.8	1000.0	9.000	On	N	19.6	12.2	46.0	
1.293000	31.3	1000.0	9.000	On	L1	19.6	14.7	46.0	
2.485500	26.6	1000.0	9.000	On	L1	19.6	19.4	46.0	

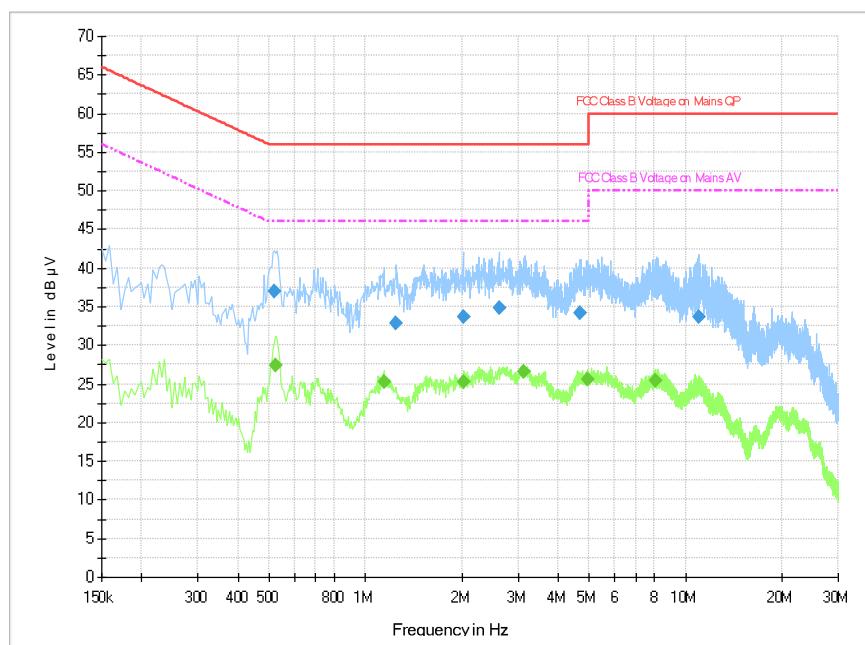


Fig.B.11.5 AC Powerline Conducted Emission with Charger AE7- bluetooth

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.519000	36.9	1000.0	9.000	On	N	19.5	19.1	56.0	
1.248000	32.8	1000.0	9.000	On	L1	19.6	23.2	56.0	
2.017500	33.7	1000.0	9.000	On	N	19.5	22.3	56.0	
2.611500	34.9	1000.0	9.000	On	L1	19.6	21.1	56.0	
4.672500	34.2	1000.0	9.000	On	N	19.7	21.8	56.0	
10.959000	33.7	1000.0	9.000	On	L1	19.9	26.3	60.0	

Final Result 2

Frequency (MHz)	CAverage (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.523500	27.3	1000.0	9.000	On	N	19.5	18.7	46.0	
1.144500	25.2	1000.0	9.000	On	N	19.6	20.8	46.0	
2.031000	25.2	1000.0	9.000	On	L1	19.5	20.8	46.0	
3.111000	26.5	1000.0	9.000	On	N	19.6	19.5	46.0	
4.933500	25.6	1000.0	9.000	On	L1	19.8	20.4	46.0	
8.034000	25.4	1000.0	9.000	On	L1	19.8	24.6	50.0	

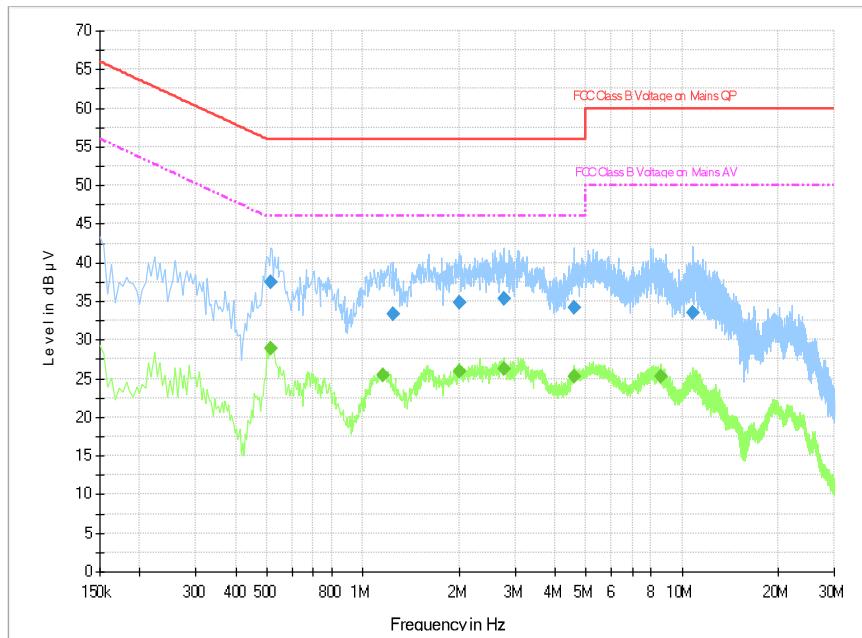


Fig.B.11.6 AC Powerline Conducted Emission with Charger AE7-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.514500	37.5	1000.0	9.000	On	N	19.5	18.5	56.0	
1.239000	33.3	1000.0	9.000	On	L1	19.6	22.7	56.0	
1.999500	34.9	1000.0	9.000	On	N	19.5	21.1	56.0	
2.760000	35.3	1000.0	9.000	On	N	19.6	20.7	56.0	
4.609500	34.1	1000.0	9.000	On	N	19.7	21.9	56.0	
10.824000	33.6	1000.0	9.000	On	N	19.8	26.4	60.0	

Final Result 2

Frequency (MHz)	CAverage (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.514500	28.9	1000.0	9.000	On	N	19.5	17.1	46.0	
1.153500	25.4	1000.0	9.000	On	L1	19.6	20.6	46.0	
1.999500	25.9	1000.0	9.000	On	N	19.5	20.1	46.0	
2.760000	26.3	1000.0	9.000	On	N	19.6	19.7	46.0	
4.609500	25.2	1000.0	9.000	On	N	19.7	20.8	46.0	
8.583000	25.3	1000.0	9.000	On	L1	19.8	24.7	50.0	

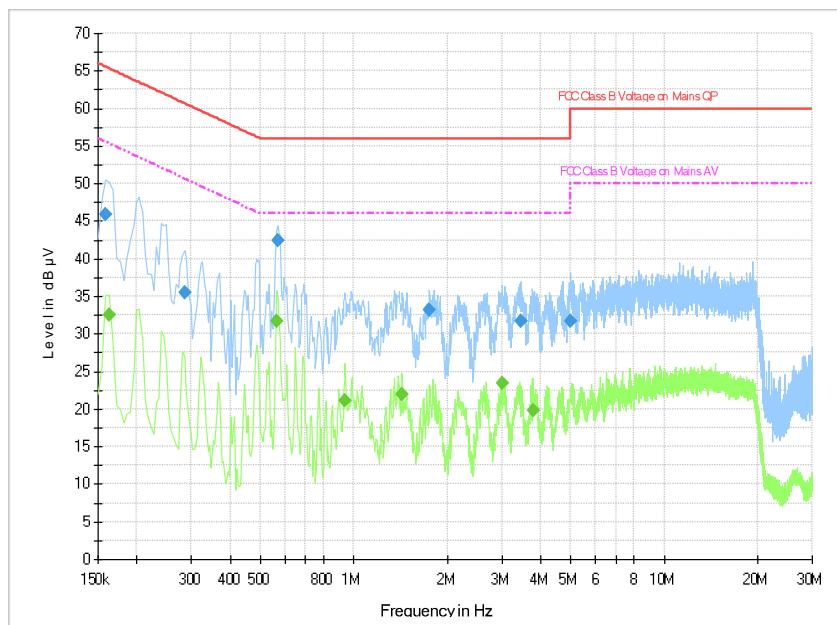


Fig.B.11.7 AC Powerline Conducted Emission with Charger AE8- bluetooth

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.159000	45.9	1000.0	9.000	On	L1	19.7	19.7	65.5	
0.285000	35.5	1000.0	9.000	On	L1	19.6	25.2	60.7	
0.568500	42.5	1000.0	9.000	On	N	19.5	13.5	56.0	
1.756500	33.1	1000.0	9.000	On	N	19.5	22.9	56.0	
3.466500	31.7	1000.0	9.000	On	N	19.6	24.3	56.0	
4.978500	31.8	1000.0	9.000	On	L1	19.8	24.2	56.0	

Final Result 2

Frequency (MHz)	CAverage (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.163500	32.5	1000.0	9.000	On	L1	19.7	22.7	55.3	
0.564000	31.7	1000.0	9.000	On	N	19.5	14.3	46.0	
0.937500	21.1	1000.0	9.000	On	N	19.6	24.9	46.0	
1.432500	22.0	1000.0	9.000	On	N	19.6	24.0	46.0	
3.016500	23.5	1000.0	9.000	On	N	19.6	22.5	46.0	
3.772500	19.9	1000.0	9.000	On	N	19.7	26.1	46.0	

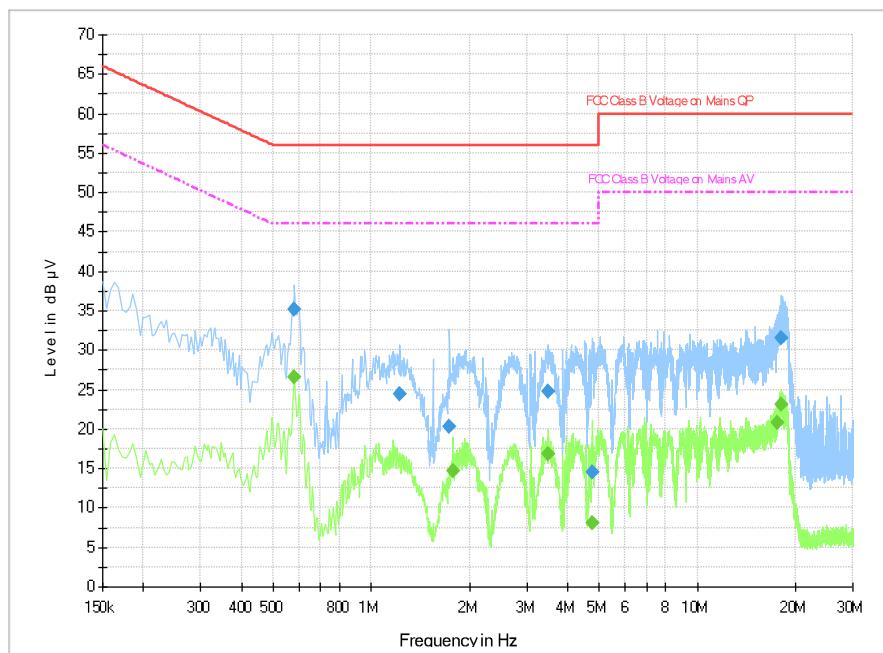


Fig.B.11.8 AC Powerline Conducted Emission with Charger AE8-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.582000	35.1	1000.0	9.000	On	N	19.5	20.9	56.0	
1.225500	24.4	1000.0	9.000	On	L1	19.6	31.6	56.0	
1.738500	20.2	1000.0	9.000	On	N	19.6	35.8	56.0	
3.493500	24.7	1000.0	9.000	On	N	19.6	31.3	56.0	
4.753500	14.5	1000.0	9.000	On	L1	19.8	41.5	56.0	
18.159000	31.5	1000.0	9.000	On	N	19.9	28.5	60.0	

Final Result 2

Frequency (MHz)	CAverage (dB _礦)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB _礦)	Comment
0.582000	26.6	1000.0	9.000	On	N	19.5	19.4	46.0	
1.779000	14.7	1000.0	9.000	On	N	19.5	31.3	46.0	
3.498000	16.9	1000.0	9.000	On	L1	19.7	29.1	46.0	
4.753500	8.0	1000.0	9.000	On	L1	19.8	38.0	46.0	
17.641500	20.9	1000.0	9.000	On	L1	19.8	29.2	50.0	
18.109500	23.2	1000.0	9.000	On	N	19.9	26.8	50.0	

ANNEX C: Accreditation Certificate

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 600118-0

Telecommunication Technology Labs, CAICT

Beijing
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications


*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).*

2020-09-29 through 2021-09-30

Effective Dates



For the National Voluntary Laboratory Accreditation Program



A handwritten signature in blue ink that reads "Daniel S. Laman".

*****END OF REPORT*****