



No.25T04Z100757-012



# HAC T-Coil TEST REPORT

No.25T04Z100757-012

For

**TCL Communication Ltd.**

**GSM/UMTS/LTE/NR Mobile phone**

**Model Name: T951P**

**with**

**Hardware Version: 05**

**Software Version: 9ESH**

**FCC ID: 2ACCJH188**

**HAC-2019 Compliance: PASS**

**Issued Date: 2025-06-23**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [cttl\\_terminals@caict.ac.cn](mailto:cttl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



No. 25T04Z100757-012

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Issue Date</b>	<b>Description</b>
25T04Z100757-012	Rev.0	2025-06-23	Initial creation of test report

## TABLE OF CONTENT

<b>1 TEST LABORATORY .....</b>	<b>5</b>
1.1 INTRODUCTION & ACCREDITATION .....	5
1.2 TESTING LOCATION .....	5
1.3 TESTING ENVIRONMENT .....	6
1.4 PROJECT DATA .....	6
1.5 SIGNATURE .....	6
<b>2 CLIENT INFORMATION .....</b>	<b>7</b>
2.1 APPLICANT INFORMATION .....	7
2.2 MANUFACTURER INFORMATION .....	7
<b>3 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
3.1 ABOUT EUT .....	8
3.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	8
3.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	8
3.4 AIR INTERFACES / BANDS INDICATING OPERATING MODES .....	9
<b>4 REFERENCE DOCUMENTS .....</b>	<b>10</b>
<b>5 OPERATIONAL CONDITIONS DURING TEST .....</b>	<b>11</b>
5.1 HAC MEASUREMENT SET-UP .....	11
5.2 AM1D PROBE .....	12
5.3 AMCC .....	12
5.4 AMMI .....	13
5.5 TEST ARCH PHANTOM & PHONE POSITIONER .....	13
5.6 ROBOTIC SYSTEM SPECIFICATIONS .....	14
5.7 T-COIL MEASUREMENT POINTS AND REFERENCE PLANE .....	14
<b>6 T-COIL TEST PROCEDURES .....</b>	<b>16</b>
<b>7 T-COIL PERFORMANCE REQUIREMENTS .....</b>	<b>18</b>
7.1 T-COIL COUPLING QUALIFYING FIELD STRENGTHS .....	18
7.2 FREQUENCY RESPONSE .....	18
7.3 DESIRED ABM SIGNAL, UNDESIRED ABM FIELD QUALIFICATION REQUIREMENTS .....	19
<b>8 2/3G VOICE DUT CONFIGURATION .....</b>	<b>20</b>
8.1 GSM CODEC INVESTIGATION .....	20
8.2 UMTS CODEC INVESTIGATION .....	20
<b>9 VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION .....</b>	<b>21</b>
9.1 TEST SYSTEM SETUP FOR VOLTE OVER IMS T-COIL TESTING .....	21
9.2 CODEC CONFIGURATION .....	22
9.3 RADIO CONFIGURATION .....	23
9.4 LTE TDD UPLINK-DOWNLINK CONFIGURATION INVESTIGATION .....	24
<b>10 VONR TEST SYSTEM SETUP AND DUT CONFIGURATION .....</b>	<b>25</b>
10.1 TEST SYSTEM SETUP FOR VONR OVER IMS T-COIL TESTING .....	25
10.2 CODEC CONFIGURATION .....	26
10.3 RADIO CONFIGURATION .....	26
<b>11 VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION .....</b>	<b>28</b>
11.1 TEST SYSTEM SETUP FOR VOWIFI OVER IMS T-COIL TESTING .....	28
11.2 CODEC CONFIGURATION .....	29
11.3 RADIO CONFIGURATION .....	30
<b>12 OTT VOIP TEST SYSTEM AND DUT CONFIGURATION .....</b>	<b>31</b>
12.1 TEST SYSTEM SETUP FOR OTT VOIP T-COIL TESTING .....	31
12.2 CODEC CONFIGURATION .....	32

<b>13 HAC T-COIL TEST DATA SUMMARY .....</b>	<b>34</b>
13.1 TEST RESULTS FOR 2/3G .....	34
13.2 TEST RESULTS FOR VOLTE .....	34
13.3 TEST RESULTS FOR VONR .....	34
13.4 TEST RESULTS FOR VoWiFi .....	36
13.5 TEST RESULTS FOR OTT VoIP .....	36
13.6 TOTAL MEASUREMENT CONCLUSION .....	40
<b>14 MEASUREMENT UNCERTAINTY .....</b>	<b>41</b>
<b>15 MAIN TEST INSTRUMENTS .....</b>	<b>42</b>
<b>ANNEX A TEST LAYOUT .....</b>	<b>43</b>
<b>ANNEX B TEST PLOTS .....</b>	<b>44</b>
<b>ANNEX C FREQUENCY RESPONSE CURVES .....</b>	<b>48</b>
<b>ANNEX D PROBE CALIBRATION CERTIFICATE .....</b>	<b>52</b>
<b>ANNEX E DAE CALIBRATION CERTIFICATE .....</b>	<b>55</b>



No. 25T04Z100757-012

## 1 Test Laboratory

### 1.1 Introduction & Accreditation

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

### 1.2 Testing Location

Company Name:	CTTL
Address:	No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.


### 1.3 Testing Environment

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

### 1.4 Project Data

Testing Start Date:	May 18, 2025
Testing End Date:	June 23, 2025

### 1.5 Signature



---

Wang Tian


(Prepared this test report)



---

Lin Jun

(Reviewed this test report)

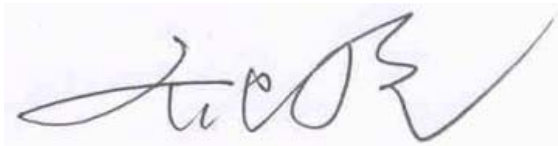

---

Qi Dianyuan

Deputy Director of the laboratory

(Approved this test report)

## 2 Client Information

### 2.1 Applicant Information

Company Name:	TCL Communication Ltd.
Address/Post:	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact Person:	Ting Wang
Contact Email:	ting.wang.hz@tcl.com
Telephone:	+86 752 2639091
Fax	+86 755 36612000-81722

### 2.2 Manufacturer Information

Company Name:	TCL Communication Ltd.
Address/Post:	5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact Person:	Ting Wang
Contact Email:	ting.wang.hz@tcl.com
Telephone:	+86 752 2639091
Fax	+86 755 36612000-81722

### 3 Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1 About EUT

Description:	GSM/UMTS/LTE/NR Mobile phone
Model name:	T951P
Testing mode(s):	GSM 850/1900 WCDMA B2/4/5 LTE Band:2/4/5/7/12/13/14/17/25/26/30/38/41/48/66/71 5G NR N2/5/7/12/38/41/48/66/71/78 BT, Wi-Fi(2.4G), Wi-Fi(5G), Wi-Fi(6E),NFC

#### 3.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	356448870204667/356448870204709	05	9ESH
EUT2	356448870204683/356448870204725	05	9ESH

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	TLp050D7	\	VEKEN

\*AE ID: is used to identify the test sample in the lab internally.



### 3.4 Air Interfaces / Bands Indicating Operating Modes

Air-interface	Band(MHz)	Type	C63.19/te sted	Simultaneous Transmissions Not Tested <sup>(1)</sup>	Name of Voice Service
GSM	850	VO	Yes	BT, WLAN	CMRS Voice
	1900				
GPRS/EDGE	850	DT	Yes		MEET
	1900				
WCDMA (UMTS)	850	VO	Yes	BT, WLAN	CMRS Voice
	1700				
	1900				
	HSPA	DT	Yes		MEET
LTE TDD	Band38/41/48	V/D	Yes	BT, WLAN	VoLTE, MEET
LTE FDD	Band2/4/5/7/12/13/14/ 17/25/26/30/66/71	V/D	Yes	BT, WLAN	VoLTE, MEET
NR	N2/n5/n7/n12/n38/n41 /n48/n66/n71/n78	V/D	Yes	BT, WLAN	VoNR, MEET
BT	2450	DT	NA	WWAN	NA
WLAN	2450	V/D	Yes	WWAN	VoWiFi, MEET
WLAN	5G	V/D	Yes	WWAN	VoWiFi, MEET
WLAN	6E	V/D	Yes	WWAN	VoWiFi, MEET

NA: Not Applicable VO: Voice Only V/D: CMRS and IP Voice Service over Digital Transport DT: Digital Transport

Note1= The device have similar frequency in some bands: 2/25, 4/66, 12/17, 5/26, 38/41 since the supported frequency spans for the smaller bands are completely cover by the larger bands, therefore, only larger bands were required to be tested for hearing-aid compliance.

## 4 Reference Documents


The following document listed in this section is referred for testing.

Reference	Title	Version
ANSI C63.19	American National Standard Methods of Measurement of Compatibility Between Wireless Communications Devices and Hearing Aids	2019 Edition
KDB285076 D01v06r04	Equipment Authorization Guidance for Hearing Aid Compatibility	2023 Edition
KDB285076 D02v04	Guidance for performing T-Coil tests for air interfaces supporting voice over IP (e.g., LTE and WiFi) to support CMRS based telephone services	2022 Edition
KDB285076 D03v01r07	Hearing aid compatibility frequently asked questions	2024 Edition

## 5 OPERATIONAL CONDITIONS DURING TEST


## 5.1 HAC MEASUREMENT SET-UP

These measurements are performed using the DASY6/8 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Intel Core21.86 GHz computer with Windows 10 system and HAC Measurement Software DASY6/8, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

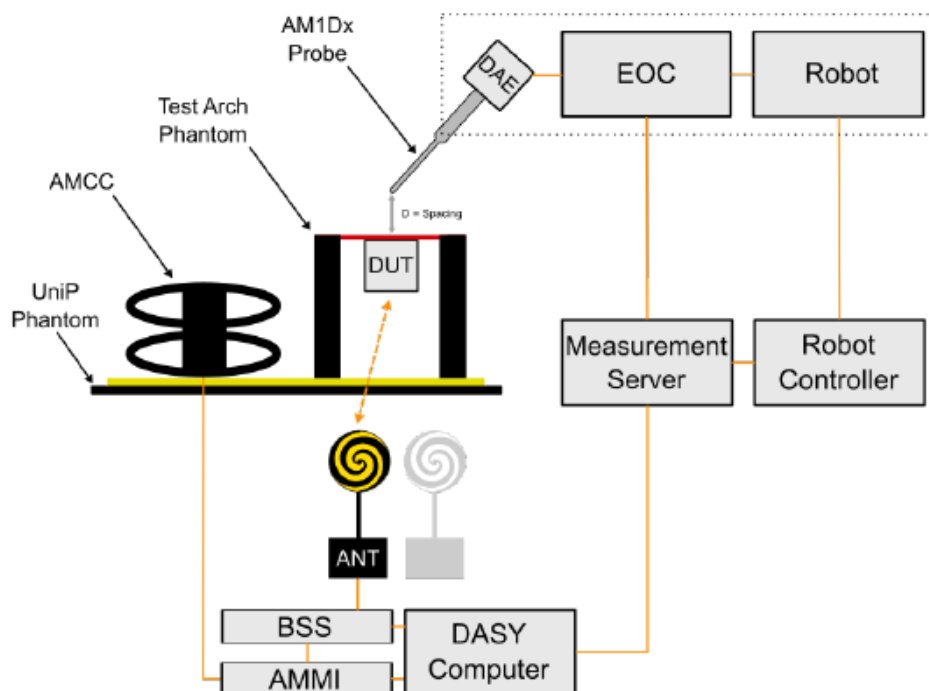

**Figure 5.1 HAC Test Measurement Set-up**

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

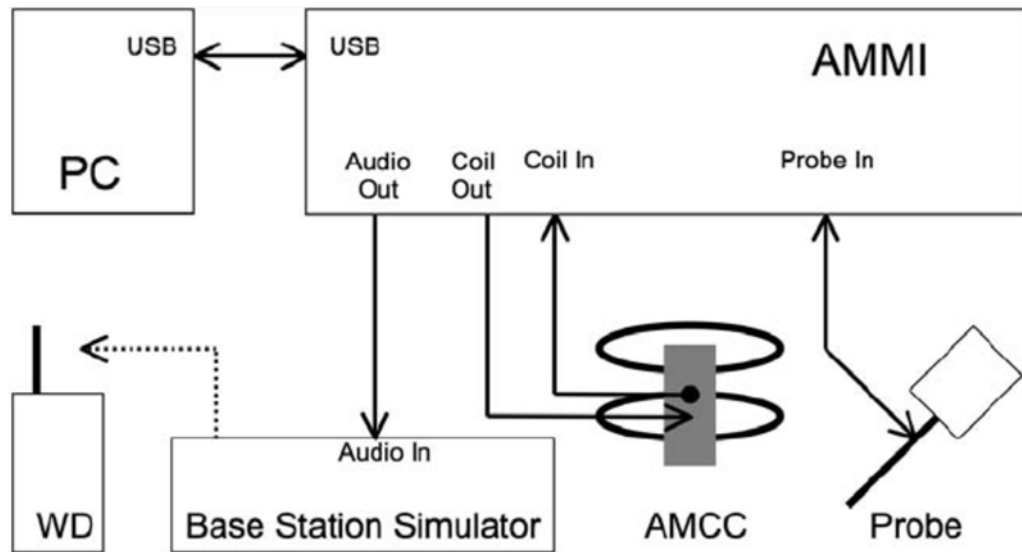

**Figure 5.2 T-Coil setup with HAC Test Arch and AMCC**

## 5.2 AM1D probe

The AM1D probe is an active probe with a single sensor. It is fully RF-shielded and has a rounded tip 6mm in diameter incorporating a pickup coil with its center offset 3mm from the tip and the sides. The symmetric signal preamplifier in the probe is fed via the shielded symmetric output cable from the AMMI with a 48V "phantom" voltage supply. The 7-pin connector on the back in the axis of the probe does not carry any signals. It is mounted to the DAE for the correct orientation of the sensor. If the probe axis is tilted 54.7 degree from the vertical, the sensor is approximately vertical when the signal connector is at the underside of the probe (cable hanging downwards).

Specification:

<b>Frequency range</b>	0.1~20kHz (RF sensitivity < -100dB, fully RF shielded)
<b>Sensitivity</b>	< -50dB A/m @ 1kHz
<b>Pre-amplifier</b>	40dB, symmetric
<b>Dimensions</b>	Tip diameter/length: 6/290mm, sensor according to ANSI-C63.19

## 5.3 AMCC

The Audio Magnetic Calibration coil is a Helmholtz Coil designed for calibration of the AM1D probe. The two horizontal coils generate a homogeneous magnetic field in the z direction. The DC input resistance is adjusted by a series resistor to approximately 500ohm, and a shunt resistor of 100ohm permits monitoring the current with a scale of 1:10

Port description:

<b>Signal</b>	<b>Connector</b>	<b>Resistance</b>
Coil In	BNC	Typically 500ohm
Coil Monitor	BNO	100ohm±1% (100mV corresponding to 1 A/m)

Specification:

<b>Dimensions</b>	370 x 370 x 196 mm, according to ANSI-C63.19
-------------------	--

## 5.4 AMMI



**Figure 5.3 AMMI front panel**

The Audio Magnetic Measuring Instrument (AMMI) is a desktop 19-inch unit containing a sampling unit, a waveform generator for test and calibration signals, and a USB interface.


Specification:

<b>Sampling rate</b>	48 kHz / 24 bit
<b>Dynamic range</b>	85 dB
<b>Test signal generation</b>	User selectable and predefined (vis PC)
<b>Calibration</b>	Auto-calibration / full system calibration using AMCC with monitor output
<b>Dimensions</b>	482 x 65 x 270 mm

## 5.5 Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field  $< \pm 0.5$  dB.

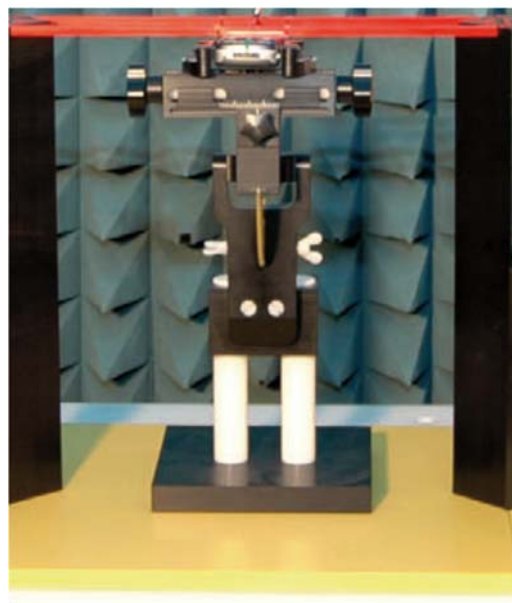

**Figure 5.4 HAC Phantom & Device Holder**

## 5.6 Robotic System Specifications

### Specifications

**Positioner:** Stäubli Unimation Corp. Robot Model: TX90 XL

**Repeatability:**  $\pm 0.02$  mm

**No. of Axis:** 6

### Data Acquisition Electronic (DAE) System

#### Cell Controller

**Processor:** Intel Core2

**Clock Speed:** 1.86GHz

**Operating System:** Windows 10

#### Data Converter

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic

**Software:** DASY6/8 cD6 HAC


**Connecting Lines:** Optical downlink for data and status info.

Optical uplink for commands and clock

## 5.7 T-Coil measurement points and reference plane

The T-Coil measurement plane, reference plane and other measurement parameters shall be:

- a) The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the WD handset, which, in normal handset use, rest against the ear.
- b) The measurement plane is parallel to, and 10 mm in front of, the reference plane
- c) The reference axis is normal to the reference plane and passes through the center of the acoustic output (or the center of the hole array); or may be centered on or near a secondary inductive source. The actual location of the reference axis and resultant measurement area shall be noted in the test report.
- d) The measurement area shall be 50 mm by 50 mm. The measurement area for both desired ABM signal and undesired ABM field may be located where the transverse magnetic measurements are optimum with regard to the requirements. However, the measurement area should be in the vicinity of the acoustic output of the WD and shall be located in the same half of the phone as the WD receiver. In a WD handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.
- e) Measurements of desired ABM signal strength and undesired ABM field are made at 2.0 mm  $\pm 0.5$  mm or 4 mm intervals in an X-Y measurement area pattern over the entire measurement area (676 measurement points total); either all measured, or measured plus interpolated.
- f) Desired ABM signal frequency response is measured at a single location at or near the maximum desired ABM signal strength location.
- g) The actual locations of the measurement points shall be noted in the test report.

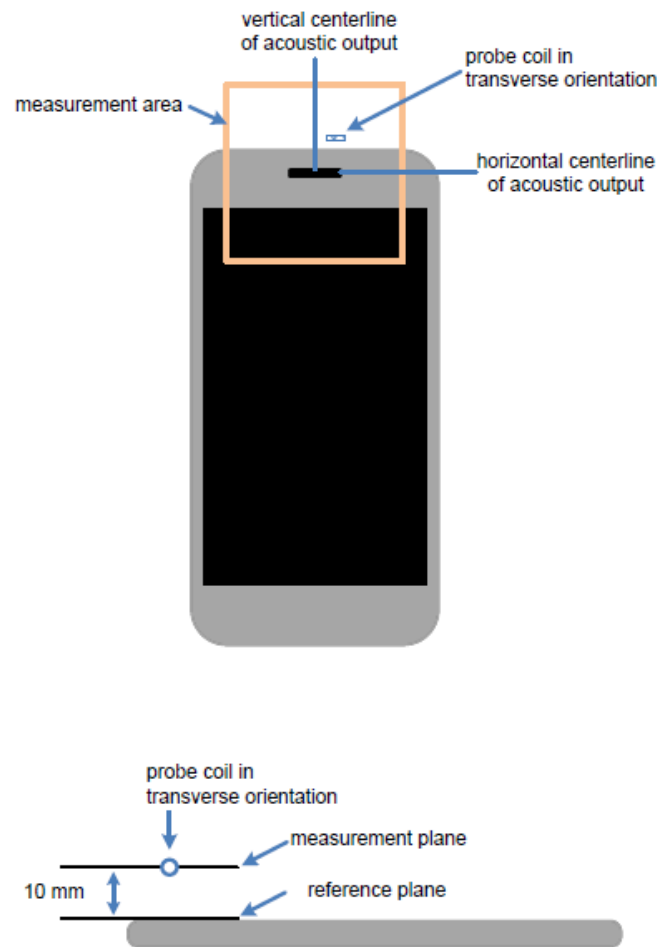

**Figure 5.5 Measurement and reference planes probe orientation for WD audio frequency magnetic field measurements**

## 6 T-Coil TEST PROCEDURES

**The following steps summarize the basic test flow for determining desired ABM signal and undesired ABM field:**

- a) A validation of the test setup and instrumentation shall be performed. This may be done using a TMFS or Helmholtz Coil. Measure the emissions and confirm that they are within tolerance of the expected values.
- b) Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in C63.19-2019 section 6.3.2.
- c) Position the WD in the test setup and connect the WD RF connector or coupling to a base station simulator.
- d) The drive level to the WD is set such that the reference input level specified in Table 6-1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (desired ABM signal) at  $f = 1$  kHz. Either a sine wave at 1025 Hz, or a voice-like signal, band-limited to the 1 kHz 1/3 octave, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.<sup>35</sup> The same drive level will be used for the desired ABM signal frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- e) At each measurement location over the measurement area and in the transverse orientation, measure and record the desired 1 kHz T-Coil magnetic signal (desired ABM signal) as described in Step c).
- f) At or near a location representing a maximum in the just-measured desired ABM signal, measure and record the desired T-Coil magnetic signals (desired ABM signal at  $f_i$ ) in each individual ISO 266:1975 R10 standard 1/3 octave band. The desired audio band input frequency ( $f_i$ ) shall be centered in each 1/3 octave band maintaining the same drive level as determined in Step c), and the reading taken for that band.<sup>36</sup> Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated or half-band integrated probe output, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB(A/m).) Compare the frequency response found to the requirements of section 7.
- g) At the same locations measured in Step d), measure and record the undesired broadband audio magnetic signal (undesired ABM field) with no audio signal applied (or digital zero applied, if appropriate) using the specified spectral weighting, the half-band integrator followed by the temporal weighting.
- h) Calculate and record the location and number of the measurement points that satisfy both the minimum desired ABM signal level and the maximum undesired ABM field level specified. Compare this to the requirements section 7 and record the result.
- i) Calculate and record the location and number of the measurement points that satisfy the maximum undesired ABM field level and distribution requirements specified in section 7.



**Table 6-1:T-Coil signal quality categories**

Standard	Protocol	Input (dBm0)
TIA-2000	CDMA	-18
TIA/EIA-136	TDMA (50 Hz)	-18
J-STD-007	GSM (217 Hz)	-16
T1/T1P1/3GPP (See Note 1)	UMTS (WCDMA)	-16
iDEN®	TDMA (22 Hz and 11 Hz)	-18
VoIP a (See Note 2)	Voice over Internet Protocol	-16

NOTE 1—For UMTS (Universal Mobile Telecommunications System), refer to 3GPP TS26.131 and TS26.132 (<http://www.3gpp.org>).

NOTE 2—VoIP is used in this table as a general term specifying a group of voice services that use -16 dBm0 as their normal acoustic level. The group includes a variety of voice services, including Voice-over-LTE (VoLTE), Voice-over-IP-multimedia-subsystem (VoIMS), Voice-over-Wi-Fi (VoWiFi) and similar services. For 3G, LTE, and WLAN terminals used for Commercial Mobile Radio Service (CMRS) based telephony, refer to 3GPP TS26.131 and TS26.132.

## 7 T-Coil PERFORMANCE REQUIREMENTS

In order to comply with the requirements for T-Coil use, a WD's tested operating modes shall simultaneously meet the requirements for minimum desired ABM signal level and maximum undesired ABM field contained in this part at the minimum specified number of scanned locations

### 7.1 T-Coil coupling qualifying field strengths


When measured as specified in ANSI C63.19, there are two groups of qualifying measurement points:

**Primary group:** A qualifying measurement point shall have its T-Coil signal, desired ABM signal,  $\geq -18$  dB(A/m) at 1 kHz, in a 1/3 octave band filter. These measurements shall be made with the WD operating at a reference input level as specified in Table 6.1. Simultaneously, the qualifying measurement point shall have its weighted magnetic noise, undesired ABM field  $\leq -38$  dB(A/m).


**Secondary group:** A qualifying measurement point shall have its weighted magnetic noise, undesired ABM field  $\leq -38$  dB(A/m). This group inherently includes all the members of the primary group.

### 7.2 Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. Figure 7.1 and Figure 7.2 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

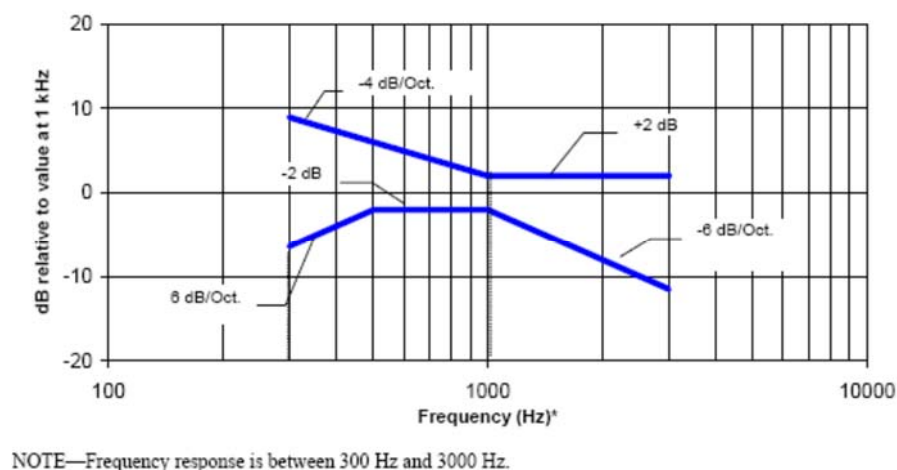

**Figure 7.1—Magnetic field frequency response for WDs with a field  $\leq -15$  dB (A/m) at 1 kHz**

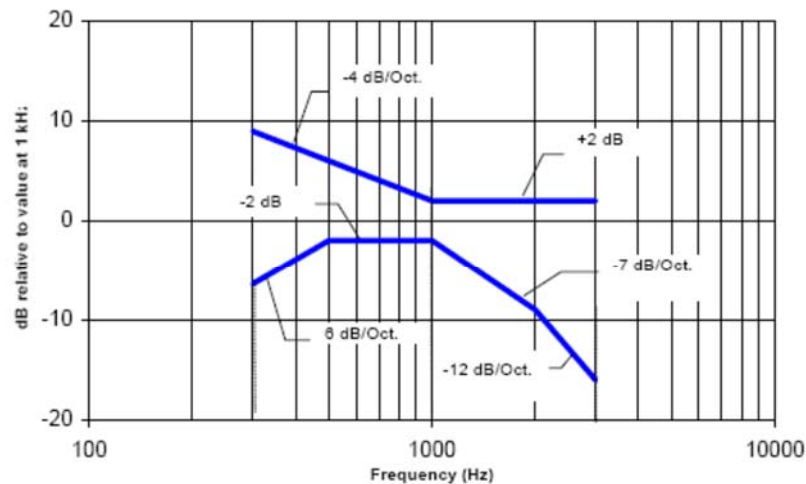

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Figure 7.2—Magnetic field frequency response for WDs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

### 7.3 Desired ABM signal, undesired ABM field qualification requirements

For a WD that is expected to operate primarily in radio access technologies that include 2G GSM for legacy support, the WD shall be qualified for telecoil compatibility one of two ways:

- The WD shall be rated for telecoil use for all other voice operating modes, exclusive of 2G GSM, according to the section 7.3.1.
- If the WD is to be rated for telecoil use in its 2G GSM operating modes, these modes shall be qualified according to the section 7.3.2.

#### 7.3.1 Non-2G GSM operating modes

The goal of this requirement is to ensure an adequate area where desired ABM signal is sufficiently strong to be heard clearly and a larger area where undesired ABM field is sufficiently low as to avoid undue annoyance. Qualifying measurement points shall fulfill the requirements of 7.1; both the primary and secondary group requirements shall be met:

- ☐ *The primary group shall include at least 75 measurement points.*
- ☐ *The secondary group shall include at least 300 contiguous measurement points.*

Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying points and at least one transverse row containing at least 15 contiguous qualifying points.

#### 7.3.2 2G GSM operating modes

If the 2G GSM operating mode(s) are selected for qualification, the qualifying measurement points shall fulfill the requirements of 6.6.2; both the primary and secondary group requirements shall be met:

- ☐ *The primary group shall include at least 25 measurement points.*
- ☐ *The secondary group shall include at least 125 contiguous measurement points.*

## 8 2/3G Voice DUT CONFIGURATION

### 8.1 GSM Codec Investigation

An investigation was performed to determine the audio codec configuration to be used for testing, the following tests results which the worst case codec would be remarked to be used for the testing for the DUT.

**GSM CMRS Codec Investigation**

Codec Setting	NB FR	NB HR	EFR	Orientation	Band	Channel
Secondary Group Point Count	374	364	363	Y(transverse)	GSM1900	661
Frequency Response	PASS	PASS	PASS			
Primary Group Contiguous Point Count	265	211	206			

### 8.2 UMTS Codec Investigation

An investigation was performed to determine the audio codec configuration to be used for testing, the following tests results which the worst case codec would be remarked to be used for the testing for the DUT.

**WCDMA/UMTS CMRS Codec Investigation**


Codec Setting	NB 12.2 kbps	NB 4.75 kbps	WB 23.85 kbps	WB 6.6 kbps	Orientation	Band	Channel
Secondary Group Point Count	643	651	648	654	Y(transverse)	WCDMA 1900	9400
Frequency Response	PASS	PASS	PASS	PASS			
Primary Group Contiguous Point Count	477	528	478	475			

## 9 VoLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

### 9.1 Test System Setup for VoLTE over IMS T-coil Testing

The general test setup used for VoLTE over I Multimedia Subsystem (IMS) server.

MS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

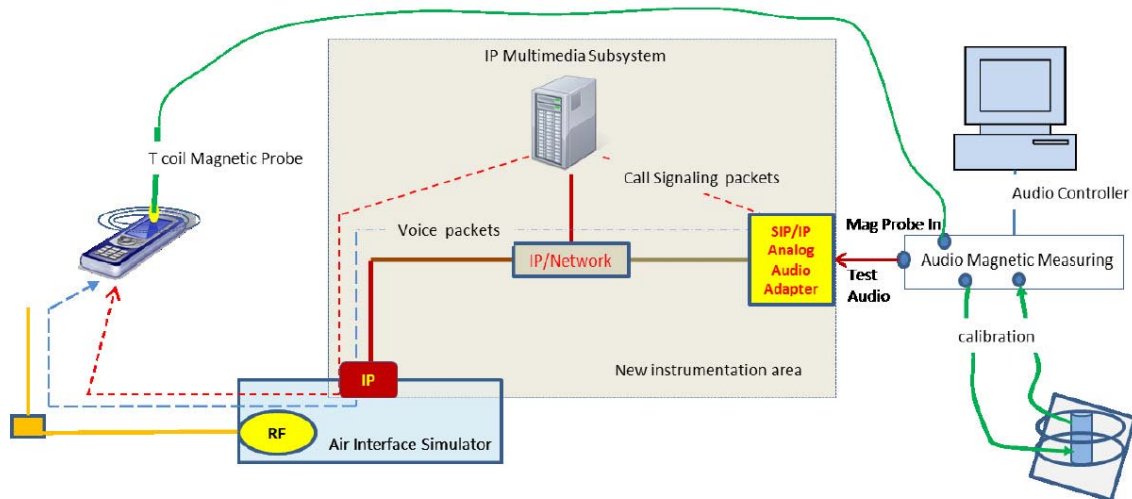

**Figure 9.1 Test Setup for VoLTE over IMS T-coil Measurements**

The following software/firmware was used to simulate the VoLTE server for testing:

Firmware	License Keys	Software Name
for LTE	KS500	LTE FDD R8 SIG BASIC
	KS550	LTE TDD R8 SIG BASIC
	KA100	IP APPL ENABLING IPv4
	KA150	IP APPL ENABLING IPv6
for Audio	KAA20	IP APPL IMS BASIC
	KM050	DATA APPL MEAS
	KS104	EVS SPEECH CODEC

## 9.2 Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. EVS Primary NB 5.9kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

**AMR Codec Investigation – VoLTE over IMS**

Codec Setting	WB AMR 23.85 kbps	WB AMR 6.60 kbps	NB AMR 12.2 kbps	NB AMR 4.75 kbps	Orientation	Band/BW	Channel
Secondary Group Point Count	455	460	462	460	Y(transverse)	B41/20M	40620
Frequency Response	PASS	PASS	PASS	PASS			
Primary Group Contiguous Point Count	343	325	318	330			

**EVS Codec Investigation – VoLTE over IMS**

Codec Setting	EVS Primary SWB 13.2kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 13.2kbps	EVS Primary WB 5.9kbps	EVS Primary NB 13.2kbps	EVS Primary NB 5.9kbps	Orientation	Band /BW	Channel
Secondary Group Point Count	450	450	466	465	455	454	Y(transverse)	B41/20M	40620
Frequency Response	PASS	PASS	PASS	PASS	PASS	PASS			
Primary Group Contiguous Point Count	333	335	319	311	344	307			

### 9.3 Radio Configuration

An investigation was performed to determine the modulation, the bandwidth configuration and RB configuration to be used for testing. 20MHz BW, QPSK, 1RB, 50RB offset was used for the testing as the worst-case configuration for the handset. See below table for comparisons between different radio configurations:

**VoLTE over IMS SNR by Radio Configuration**

Band	Channel	Band width [MHz]	Modulation	RB Size	RB Offset	Primary Group Contiguous Point Count	Secondary Group Point Count
LTE B41	40620	20	QPSK	1	0	312	457
LTE B41	40620	20	QPSK	1	50	307	454
LTE B41	40620	20	QPSK	1	99	317	451
LTE B41	40620	20	QPSK	50	25	315	449
LTE B41	40620	20	QPSK	100	0	320	457
LTE B41	40620	20	16QAM	1	50	322	460
LTE B41	40620	20	64QAM	1	50	318	461
LTE B41	40620	15	QPSK	1	50	311	457
LTE B41	40620	10	QPSK	1	50	309	463
LTE B41	40620	5	QPSK	1	50	314	417

## 9.4 LTE TDD Uplink-Downlink Configuration Investigation

An investigation was performed to determine the worst-case Uplink-Downlink configuration for LTE TDD T-coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length  $T_f=307200 \cdot T_s=10$  ms, where  $T_s$  is a number of time units equal to  $1/(150002048)$  seconds. Additionally, each radio frame consists of 10 subframes, each of length  $30720 \cdot T_s=1$  ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is  $2192 \cdot T_s$  which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

**Uplink-Downlink Configurations for Type 2 Frame Structures**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number										Calculated Transmission Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

### a. Power Class 3 Uplink-Downlink Configuration Investigation

Power Class 3 was evaluated with the following radio configurations: channel 40620, 20MHz BW, QPSK, 1RB, 50RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst SNR was used for full testing. Uplink-Downlink configuration 0 was used as the worst-case configuration for LTE TDD T-coil testing. See table below for the SNR comparison between each Uplink-Downlink configuration:

**LTE TDD Power Class 3 SNR by UL-DL Configuration**

Frequency [MHz]	Channel	Band width [MHz]	Modulation	RB Size	RB Offset	UL-Configuration	Primary Group Contiguous Point Count	Secondary Group Point Count
2593	40620	20	QPSK	1	50	0	307	454
2593	40620	20	QPSK	1	50	3	309	450
2593	40620	20	QPSK	1	50	6	310	451

### b. Conclusion

Per the investigations above, UL-DL Configuration 0 was used to evaluate LTE TDD Power Class 3.




## 10 VoNR TEST SYSTEM SETUP AND DUT CONFIGURATION

### 10.1 Test System Setup for VoNR over IMS T-coil Testing

The general test setup used for VoNR over IP Multimedia Subsystem (IMS) server.

MS is shown below. The callbox used when performing VoNR over IMS T-coil measurements is a CMX500. The Data Application Unit (DAU) of the CMX500 was used to simulate the IP Multimedia Subsystem (IMS) server. An external USB audio interface is used to perform the A/D conversion and ensure proper speech input level to the DUT.

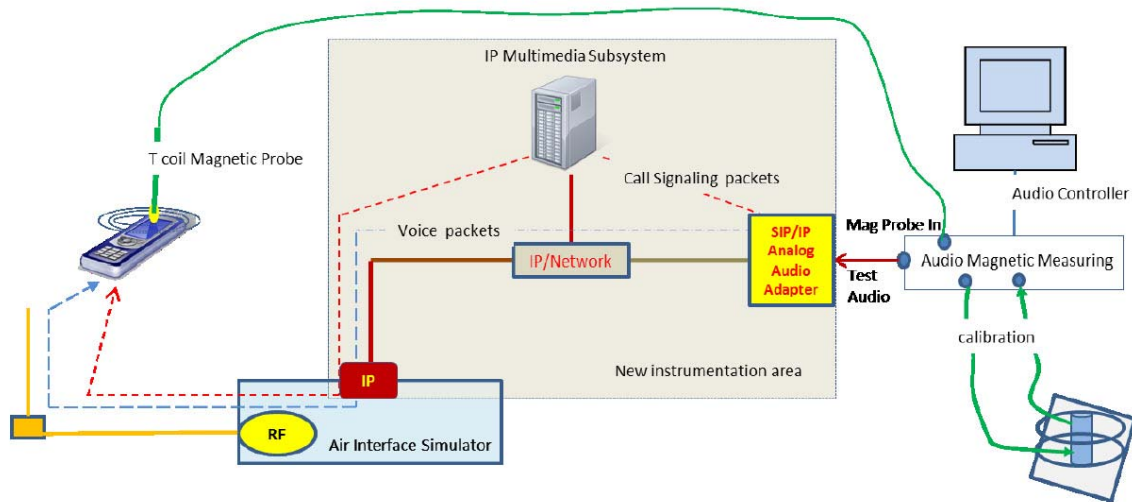

**Figure 10.1 Test Setup for VoNR over IMS T-coil Measurements**

The following software/firmware was used to simulate the VoNR server for testing:

Firmware	License Keys	Software Name
for VoNR	KS600B	VONR processing option

## 10.2 Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. EVS Primary WB 5.9kbps setting was used for the audio codec on the CMX500 for VoNR over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

**AMR Codec Investigation – VoNR over IMS**

Codec Setting	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band/BW	Channel
Secondary Group Point Count	368	372	372	373	Y(transverse)	n78/100M	636666
Frequency Response	PASS	PASS	PASS	PASS			
Primary Group Contiguous Point Count	203	199	211	206			

**EVS Codec Investigation – VoNR over IMS**

Codec Setting	EVS Primary SWB 13.2kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 13.2kbps	EVS Primary WB 5.9kbps	EVS Primary NB 13.2kbps	EVS Primary NB 5.9kbps	Orientation	Band/BW	Channel
Secondary Group Point Count	370	371	366	366	366	370	Y(transverse)	n78/100M	636666
Frequency Response	PASS	PASS	PASS	PASS	PASS	PASS			
Primary Group Contiguous Point Count	272	272	210	113	210	138			

## 10.3 Radio Configuration

An investigation was performed to determine the modulation, the bandwidth configuration and RB configuration to be used for testing. 100MHz BW, QPSK, 1RB, 104RB offset was used for the

testing as the worst-case configuration for the handset. See below table for comparisons between different radio configurations:


**VoNR over IMS SNR by Radio Configuration**

Band	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Primary Group Contiguous Point Count	Secondary Group Point Count
n78	636666	100	DFT-s-OFDM QPSK	50	25	120	369
n78	636666	100	DFT-s-OFDM QPSK	1	104	113	366
n78	636666	100	DFT-s-OFDM QPSK	1	1	117	361
n78	636666	100	DFT-s-OFDM QPSK	2	0	115	370
n78	636666	100	DFT-s-OFDM QPSK	2	104	118	371
n78	636666	100	DFT-s-OFDM QPSK	100	0	121	358
n78	636666	100	DFT-s-OFDM 16QAM	50	25	119	364
n78	636666	100	DFT-s-OFDM 64QAM	50	25	125	361
n78	636666	100	DFT-s-OFDM 256QAM	50	25	118	364
n78	636666	100	DFT-s-OFDM PI/2 BPSK	50	25	116	360
n78	636666	100	CP-OFDM QPSK	53	26	119	364

## 11 VoWiFi TEST SYSTEM SETUP AND DUT CONFIGURATION

### 11.1 Test System Setup for VoWiFi over IMS T-coil Testing

The general test setup used for VoWiFi over IMS, or CMRS WiFi Calling, is shown below. The callbox used when performing VoWiFi over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

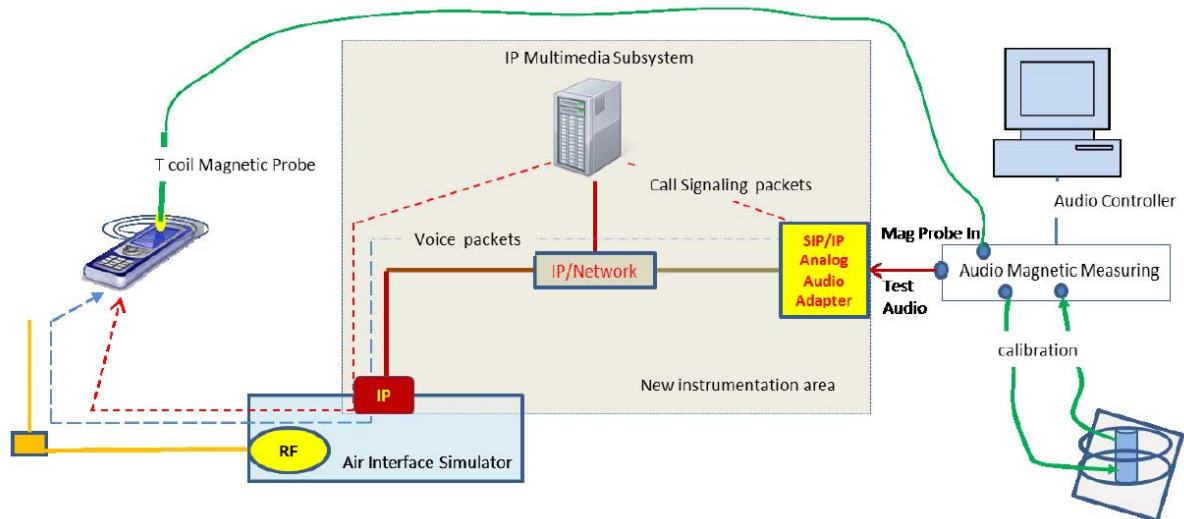

**Figure 11.1 Test Setup for VoWiFi over IMS T-coil Measurements**

The following software/firmware was used to simulate the VoWiFi server for testing:

Firmware	License Keys	Software Name
for WLAN	KS650	WLAN A/B/G SIG BASIC
	KS651	WLAN N SIG BASIC
	KA100	IP APPL ENABLING IPv4
	KA150	IP APPL ENABLING IPv6
for Audio	KAA20	IP APPL IMS BASIC
	KM050	DATA APPL MEAS
	KS104	EVS SPEECH CODEC

## 11.2 Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The EVS Primary WB 13.2kbps setting was used for the audio codec on the CMW500 for VoWiFi over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

**AMR Codec Investigation – VoWiFi over IMS**

Codec Setting	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Mode	Channel
Secondary Group Point Count	513	501	504	496	Y(transverse)	2.4GHz 802.11b	6
Frequency Response	PASS	PASS	PASS	PASS			
Primary Group Contiguous Point Count	423	410	416	411			

**EVS Codec Investigation – VoWiFi over IMS**

Codec Setting	EVS Primary SWB 13.2kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 13.2kbps	EVS Primary WB 5.9kbps	EVS Primary NB 13.2kbps	EVS Primary NB 5.9kbps	Orientation	Mode	Channel
Secondary Group Point Count	521	484	528	522	515	521	Y(transverse)	2.4GHz 802.11b	6
Frequency Response	PASS	PASS	PASS	PASS	PASS	PASS			
Primary Group Contiguous Point Count	443	409	335	342	437	406			

### 11.3 Radio Configuration

An investigation was performed on applicable data rates and modulations to determine the radio configuration to be used for testing. See below table for comparisons between different radio configurations in each 802.11 standard:

Mode	Bandwidth [MHz]	Channel	Modulation	Data Rate [Mbps]	Primary Group Contiguous Point Count	Secondary Group Point Count
802.11b	20	6	DSSS	1	335	528
802.11b	20	6	CCK	11	338	530
802.11g	20	6	BPSK	6	374	472
802.11g	20	6	64-QAM	54	377	470
802.11n	20	6	BPSK	6.5	383	463
802.11n	20	6	64-QAM	65	385	465
802.11n	40	46	BPSK	13.5	408	670
802.11n	40	46	256-QAM	180	415	668
802.11ac	80	42	BPSK	29.3	390	636
802.11ac	80	42	256-QAM	390	392	638
802.11ax	20	5	BPSK	29.3	510	619
802.11ax	20	5	256-QAM	390	513	618

## 12 OTT VoIP TEST SYSTEM AND DUT CONFIGURATION

### 12.1 Test System Setup for OTT VoIP T-coil Testing


#### OTT VoIP Application

Google MEET is a pre-installed application on the DUT which allows for VoIP calls in a head-to-ear scenario. MEET uses the OPUS audio codec and supports a bitrate range of 6kbps to 75kbps. All air interfaces capable of a data connection were evaluated with Google MEET. When HAC testing we are using the Google MEET version is 26.0.179825522.alpha.DEV and the bitrate configuration can find at settings → Voice call parameters settings → Audio codec bitrate(6-75kbps).

#### Test Procedure and Equipment Setup

The test procedure for OTT testing is identical to the section above, except for how the signal is sent to the DUT, as outlined in the diagram below.

The AMMI is connected to the support device's Mic via Audio Data Line. The support device is connected to the Internet via Wi-Fi and the DUT is connected to the mobile base station via the technology under test. Using the DUT's OTT application, a VoIP call is established with the support device. The test signal is sent from the DASY PC to the AMMI, from the AMMI to the support device, and finally to the DUT. To exercise the license antenna, the DUT was simultaneously connected to an external AP and to a mobile base station.

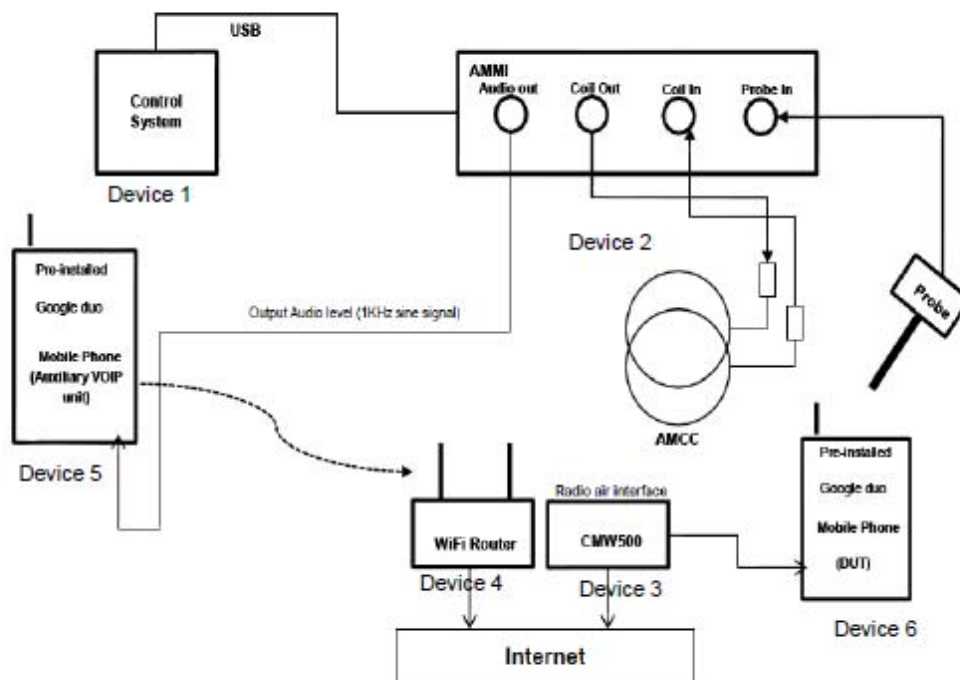

### **Codec Bit-rate Investigation**

For a voice service/air interface, investigate the variations of bit-rate configurations and document the parameters (ABM1, ABM2, frequency response) for that voice service. It is only necessary to document this for one channel/band, the following tests results which the worst case codec would be remarked to be used for the testing for the handset.

### **Air Interface Investigation**

Using the worst-case bit-rate and Radio Configuration, a limited set of bands/channel/ bandwidths were then tested to confirm that there is no effect to the test compliance when changing the band/channel/bandwidth, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface. The summary of evaluation results is described in section 13.5

## **12.2 Codec Configuration**

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The 6kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

**Codec Investigation – OTT over EDGE**

Codec Setting:	64kbps	6kbps	Orientation	Band	Channel
Secondary Group Point Count	450	450	Y(transverse)	GSM1900	661
Frequency Response	Pass	Pass			
Primary Group Contiguous Point Count	200	197			

**Codec Investigation – OTT over HSPA**

Codec Setting:	64kbps	6kbps	Orientation	Band	Channel
Secondary Group Point Count	617	615	Y(transverse)	WCDMA 1900	9800
Frequency Response	Pass	Pass			
Primary Group Contiguous Point Count	471	468			

**Codec Investigation – OTT over LTE**

Codec Setting:	64kbps	6kbps	Orientation	Band/BW	Channel
Secondary Group Point Count	520	521	Y(transverse)	B41/20M	40620



Frequency Response	Pass	Pass			
Primary Group Contiguous Point Count	330	327			

#### Codec Investigation – OTT over NR

Codec Setting:	64kbps	6kbps	Orientation	Band/BW	Channel
Secondary Group Point Count	371	367	Y(transverse)	n78/100M	636666
Frequency Response	Pass	Pass			
Primary Group Contiguous Point Count	184	181			

#### Codec Investigation – OTT over WiFi

Codec Setting:	64kbps	6kbps	Orientation	Band/BW	Channel
Secondary Group Point Count	337	338	Y(transverse)	2.4GHz 802.11b	6
Frequency Response	Pass	Pass			
Primary Group Contiguous Point Count	144	142			

## 13 HAC T-Coil TEST DATA SUMMARY

### 13.1 Test Results for 2/3G

Band	Ch.	Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response
<b>GSM 850</b>	190	169	275	20	26	<b>PASS</b>
<b>PCS 1900</b>	661	206	363	20	26	<b>PASS</b>
<b>W850</b>	4407	447	625	26	26	<b>PASS</b>
<b>W1900</b>	9800	475	654	26	26	<b>PASS</b>
<b>W1700</b>	1637	444	613	26	26	<b>PASS</b>

Note:

1. Bluetooth and WiFi function is turn off and microphone is muted.
2. The volume is adjusted to maximum level during T-Coil testing.
3. For GSM air interfaces,C63.19-2019 sections 6.6.4.3 2G GSM operating modes was used

### 13.2 Test Results for VoLTE

Band	Ch.	Band width	Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response
<b>LTE B7</b>	21100	20M	408	529	26	26	<b>PASS</b>
<b>LTE B12</b>	23095	10M	340	502	25	26	<b>PASS</b>
<b>LTE B13</b>	23230	10M	395	509	24	26	<b>PASS</b>
<b>LTE B14</b>	23330	10M	410	526	25	26	<b>PASS</b>
<b>LTE B25</b>	26365	20M	349	464	26	26	<b>PASS</b>
<b>LTE B26</b>	26865	10M	421	545	26	26	<b>PASS</b>
<b>LTE B30</b>	27710	10M	387	511	26	26	<b>PASS</b>
<b>LTE B66</b>	132322	20M	357	475	26	26	<b>PASS</b>
<b>LTE B71</b>	133322	20M	439	584	26	26	<b>PASS</b>
<b>LTE B41</b>	40620	20M	307	454	22	26	<b>PASS</b>
<b>LTE B48</b>	55990	20M	352	465	24	26	<b>PASS</b>

Note:

1. Bluetooth and WiFi function is turn off and microphone is muted.
2. The volume is adjusted to maximum level during T-Coil testing.

### 13.3 Test Results for VoNR

Test results for 5G NR with SA mode

Band	Ch.	Bandwidth	Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response
n2	376000	20M	219	410	20	26	PASS
n5	167300	20M	221	436	23	26	PASS
n7	507000	20M	207	416	20	26	PASS
n12	141500	10M	246	496	24	26	PASS
n66	349000	20M	205	414	20	26	PASS
n71	136100	20M	210	433	23	26	PASS
n38	519000	20M	243	469	23	26	PASS
n41	518598	100M	187	390	20	26	PASS
n48	641667	20M	206	411	19	26	PASS
n78	636666	100M	113	366	18	26	PASS

Note:

1. Bluetooth and WiFi function is turn off and microphone is muted.
2. The volume is adjusted to maximum level during T-Coil testing.

#### Test results for 5G NR with NSA mode

Band	ANT	Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response
B2-n5/66	2-1/3	183	369	19	26	PASS
B2-n71/41/78	3-0/4/7	137	338	17	26	PASS
B4-n78	3-7	161	331	17	26	PASS
B5-n2/66/7/78	1-2/4/7	178	363	17	26	PASS
B7-n78	4-2	129	324	16	26	PASS
B12-n2/66/41/78	1-2/4/7	164	372	17	26	PASS
B14-n2/66	1-3	222	412	24	26	PASS
B30-n5/2/66	4-1/3	219	422	24	26	PASS
B66-n5/2/7/66	2-1/3	214	414	23	26	PASS
B66-n71/41/78	3-0/4/7	147	336	17	26	PASS
B38-n78	4-2	164	341	17	26	PASS
B48-n66	7-3	171	375	20	26	PASS

### 13.4 Test Results for VoWiFi

Mode	AN T	Ch.	Fre	Ban dwid th	Primary Group Contigu ous Point Count	Second ary Group Point Count	Seconda ry Group Max Longitud inal	Second ary Group Max Transve rse	Freque ncy Respon se
802.11b	8	6	2437	20M	335	528	26	26	PASS
	9	6	2437	40M	357	611	26	26	PASS
802.11g	8	6	2437	20M	374	472	24	26	PASS
802.11n	8	6	2437	20M	383	463	24	26	PASS
802.11n	8	6	2437	40M	467	548	23	26	PASS
802.11a UNII-1	6	44	5220	20M	387	632	26	26	PASS
802.11n UNII-1	6	46	5230	40M	408	670	26	26	PASS
802.11a c UNII-1	6	42	5210	80M	390	636	26	26	PASS
802.11a UNII-2A	6	60	5300	20M	410	665	26	26	PASS
802.11a UNII-2C	6	124	5620	20M	386	648	26	26	PASS
802.11a UNII-3	6	157	5795	20M	385	651	26	26	PASS
802.11a x UNII-5	6	5	5975	20M	510	619	26	26	PASS

Note:

1. The volume is adjusted to maximum level during T-Coil testing.

### 13.5 Test Results for OTT VoIP

#### Test results for 2/3G

Band	Ch.	Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response
EDGE850	190	210	415	22	26	PASS
EDGE1900	661	197	450	22	26	PASS
W850	4407	473	624	26	26	PASS
W1900	9800	468	615	26	26	PASS

<b>W1700</b>	1637	469	616	26	26	<b>PASS</b>
--------------	------	-----	-----	----	----	-------------

Note: 1. Bluetooth and WiFi function is turn off and microphone is muted.

2. The volume is adjusted to maximum level during T-Coil testing.

3. For GSM air interfaces,C63.19-2019 sections 6.6.4.3 2G GSM operating modes was used

#### Test results for LTE

<b>Band</b>	<b>Ch.</b>	<b>Bandwidth</b>	<b>Primary Group Contiguous Point Count</b>	<b>Secondary Group Point Count</b>	<b>Secondary Group Max Longitudinal</b>	<b>Secondary Group Max Transverse</b>	<b>Frequency Response</b>
<b>LTE B7</b>	21100	20M	278	472	26	26	<b>PASS</b>
<b>LTE B12</b>	23095	10M	390	541	26	26	<b>PASS</b>
<b>LTE B13</b>	23230	10M	381	529	26	26	<b>PASS</b>
<b>LTE B14</b>	23330	10M	389	567	26	26	<b>PASS</b>
<b>LTE B25</b>	26365	20M	351	552	26	26	<b>PASS</b>
<b>LTE B26</b>	26865	10M	302	534	25	26	<b>PASS</b>
<b>LTE B30</b>	27710	10M	339	534	26	26	<b>PASS</b>
<b>LTE B66</b>	132322	20M	341	538	26	26	<b>PASS</b>
<b>LTE B71</b>	133322	20M	341	532	26	26	<b>PASS</b>
<b>LTE B41</b>	40620	20M	327	521	26	26	<b>PASS</b>
<b>LTE B48</b>	55990	20M	284	477	26	26	<b>PASS</b>

Note:

1. Bluetooth and WiFi function is turn off and microphone is muted.

2. The volume is adjusted to maximum level during T-Coil testing.

#### Test results for 5G NR with SA mode

<b>Band</b>	<b>Ch.</b>	<b>Bandwidth</b>	<b>Primary Group Contiguous Point Count</b>	<b>Secondary Group Point Count</b>	<b>Secondary Group Max Longitudinal</b>	<b>Secondary Group Max Transverse</b>	<b>Frequency Response</b>
<b>n2</b>	376000	20M	228	414	20	26	<b>PASS</b>
<b>n5</b>	167300	20M	253	434	23	26	<b>PASS</b>
<b>n7</b>	507000	20M	249	433	22	26	<b>PASS</b>
<b>n12</b>	141500	10M	251	446	23	26	<b>PASS</b>
<b>n66</b>	349000	20M	232	414	20	26	<b>PASS</b>
<b>n71</b>	136100	20M	252	435	23	26	<b>PASS</b>
<b>n38</b>	519000	100M	268	459	22	26	<b>PASS</b>
<b>n41</b>	518598	100M	199	384	19	26	<b>PASS</b>
<b>n48</b>	641667	40M	214	397	19	26	<b>PASS</b>
<b>n78</b>	636666	100M	181	367	18	26	<b>PASS</b>

Note:

1. Bluetooth and WiFi function is turn off and microphone is muted.
2. The volume is adjusted to maximum level during T-Coil testing.

#### Test results for 5G NR with NSA mode

Band	ANT	Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response
B2-n5/66	2-1/3	212	390	20	26	PASS
B2-n71/41/78	3-0/4/7	145	332	16	26	PASS
B4-n78	3-7	146	337	17	26	PASS
B5-n2/66/7/78	1-2/4/7	157	342	17	26	PASS
B7-n78	4-2	141	320	16	26	PASS
B12-n2/66/41/78	1-2/4/7	168	345	17	26	PASS
B14-n2/66	1-3	202	383	19	26	PASS
B30-n5/2/66	4-1/3	126	382	19	26	PASS
B66-n5/2/7/66	2-3/1	210	397	23	26	PASS
B66-n71/41/78	3-0/4/7	152	343	17	26	PASS
B38-n78	4-2	149	332	17	26	PASS
B48-n66	7-3	183	371	19	26	PASS

#### Test results for WiFi

Mode	ANT	Ch.	Frequency	Bandwidth	Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response
802.11b	8	6	2437	20M	142	338	22	26	PASS
	9	6	2437	20M	252	421	26	26	PASS
802.11g	8	6	2437	20M	366	609	26	26	PASS
802.11n	8	6	2437	20M	342	533	26	26	PASS
802.11n	8	6	2437	40M	363	573	26	26	PASS
802.11a UNII-1	6	44	5220	20M	158	624	26	26	PASS
802.11n UNII-1	6	46	5230	40M	349	577	26	26	PASS
802.11ac UNII-1	6	42	5210	80M	320	556	26	26	PASS
802.11a UNII-2A	6	60	5300	20M	358	586	26	26	PASS

<b>802.11a UNII-2C</b>	6	124	5620	20M	359	592	26	26	<b>PASS</b>
<b>802.11a UNII-3</b>	6	157	5785	20M	383	616	26	26	<b>PASS</b>
<b>802.11ax UNII-5</b>	6	5	5975	20M	376	543	26	26	<b>PASS</b>

Note:

1. The volume is adjusted to maximum level during T-Coil testing.

### 13.6 Total Measurement Conclusion

Probe Position	Frequency Band(MHz)	Compliance
Transverse	GSM 850	PASS
	GSM 1900	PASS
	WCDMA 850	PASS
	WCDMA 1700	PASS
	WCDMA 1900	PASS
	LTE B2/25	PASS
	LTE B4/66	PASS
	LTE B5/26	PASS
	LTE B7	PASS
	LTE B12/17	PASS
	LTE B13	PASS
	LTE B14	PASS
	LTE B30	PASS
	LTE B71	PASS
	LTE B38/41	PASS
	LTE B48	PASS
	n2	PASS
	n5	PASS
	n7	PASS
	n12	PASS
	n66	PASS
	n71	PASS
	n38	PASS
	n41	PASS
	n48	PASS
	n78	PASS
	WLAN 2.4GHz	PASS
	WLAN 5GHz	PASS
	WLAN 6E	PASS



## 14 MEASUREMENT UNCERTAINTY

Error Description	Unc. Value	Prob. Dist.	Div.	(ci) ABMd	(ci) ABMu	Std. Unc. ABMd	Std. Unc. ABMu
<b>Probe Sensitivity</b>							
Reference Level	±3.0 %	<i>N</i>	1	1	1	±3.0 %	±3.0 %
AMCC Geometry	±0.4 %	<i>R</i>	√3	1	1	±0.2 %	±0.2 %
AMCC Current	±1.0 %	<i>R</i>	√3	1	1	±0.6 %	±0.6 %
Probe Positioning during Calibr.	±0.1 %	<i>R</i>	√3	1	1	±0.1 %	±0.1 %
Noise Contribution	±0.7 %	<i>R</i>	√3	0.0143	1	±0.0 %	±0.4 %
Frequency Slope	±5.9 %	<i>R</i>	√3	0.1	1.0	±0.3 %	±3.5 %
<b>Probe System</b>							
Repeatability / Drift	±1.0 %	<i>R</i>	√3	1	1	±0.6 %	±0.6 %
Linearity / Dynamic Range	±0.6 %	<i>R</i>	√3	1	1	±0.4 %	±0.4 %
Acoustic Noise	±1.0 %	<i>R</i>	√3	0.1	1	±0.1 %	±0.6 %
Probe Angle	±1 %	<i>R</i>	√3	1	1	±0.6 %	±0.6 %
Spectral Processing	±0.9 %	<i>R</i>	√3	1	1	±0.5 %	±0.5 %
Integration Time	±0.6 %	<i>N</i>	1	1	5	±0.6 %	±3.0 %
Field Disturbance	±0.2 %	<i>R</i>	√3	1	1	±0.1 %	±0.1 %
<b>Test Signal</b>							
Ref. Signal Spectral Response	±0.6 %	<i>R</i>	√3	0	1	±0.0 %	±0.4 %
<b>Positioning</b>							
Probe Positioning	±1.9 %	<i>R</i>	√3	1	1	±1.1 %	±1.1 %
Phantom Thickness	±0.9 %	<i>R</i>	√3	1	1	±0.5 %	±0.5 %
DUT Positioning	±1.9 %	<i>R</i>	√3	1	1	±1.1 %	±1.1 %
<b>External Contributions</b>							
RF Interference	±0.0 %	<i>R</i>	√3	1	0.3	±0.0 %	±0.0 %
Test Signal Variation	±2.0 %	<i>R</i>	√3	1	1	±1.2 %	±1.2 %
<b>Combined Uncertainty</b>							
Combined Std. Uncertainty (ABM Field)						±3.9 %	±6.0 %
<b>Expanded Std. Uncertainty</b>						±7.8 %	±11.9 %


## 15 MAIN TEST INSTRUMENTS

List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Audio Magnetic 1D Field Probe	AM1DV2	1064	July 11, 2024	One year
02	Audio Magnetic Calibration Coil	AMCC	1163	NCR	NCR
03	Audio Measuring Instrument	AMMI	1177	NCR	NCR
04	HAC Test Arch	N/A	1014	NCR	NCR
05	DAE	DAE4	1524	October 18, 2024	One year
06	Software	cDASY6_Module_HAC V1.2	N/A	NCR	NCR
07	BTS	CMW 500	166370	July 4, 2024	One year
08	BTS	CMX 500	102288	May 22, 2025	One year

\*\*\*END OF REPORT BODY\*\*\*

## ANNEX A TEST LAYOUT

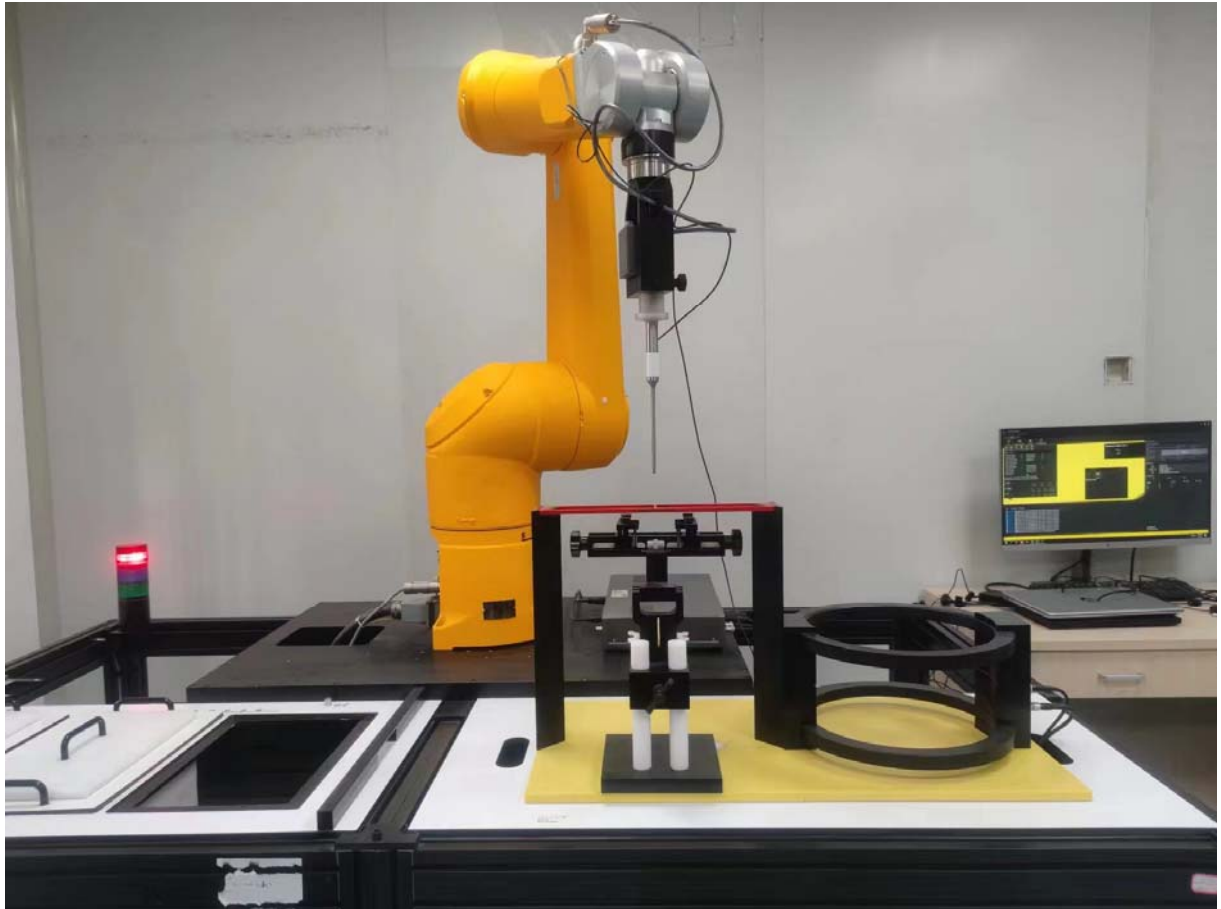

Picture A1: HAC T-Coil System Layout

## ANNEX B TEST PLOTS

### T-Coil GSM850 Transverse

## T-Coil Coupling Mode Test Report

### Results

Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse
169	275	20	26

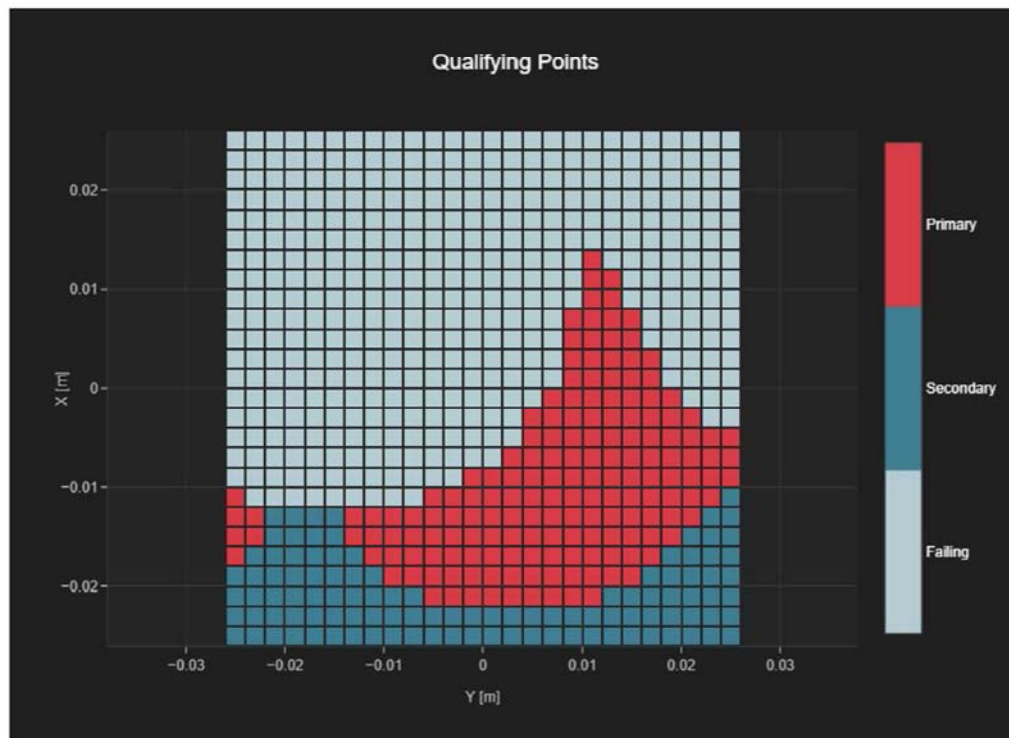



Fig B.1 T-Coil GSM850

## T-Coil NR n78 Transverse

# T-Coil Coupling Mode Test Report

## Results

Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse
113	366	18	26

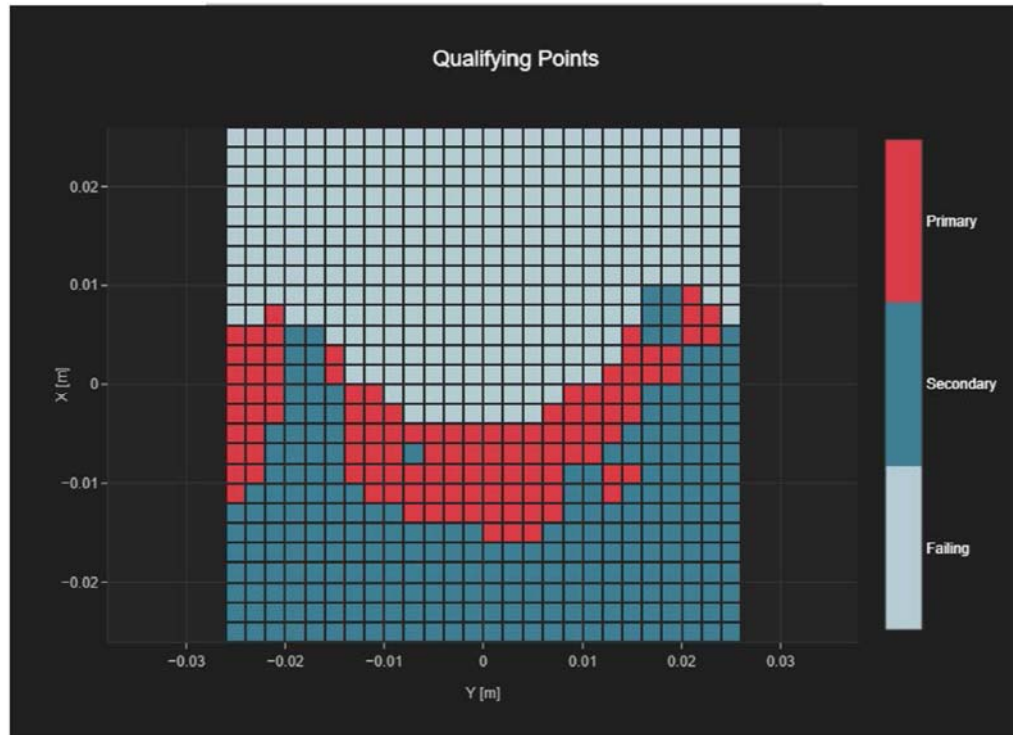

**Fig B.2 T-Coil NR N78**

# T-Coil GSM1900 Transverse - OTT VoIP

## T-Coil Coupling Mode Test Report

### Results

Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse
197	450	22	26



Fig B.3 T-Coil GSM1900-OTT

## T-Coil NR B30-n66 Transverse - OTT VoIP

# T-Coil Coupling Mode Test Report

## Results

Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse
126	382	19	26

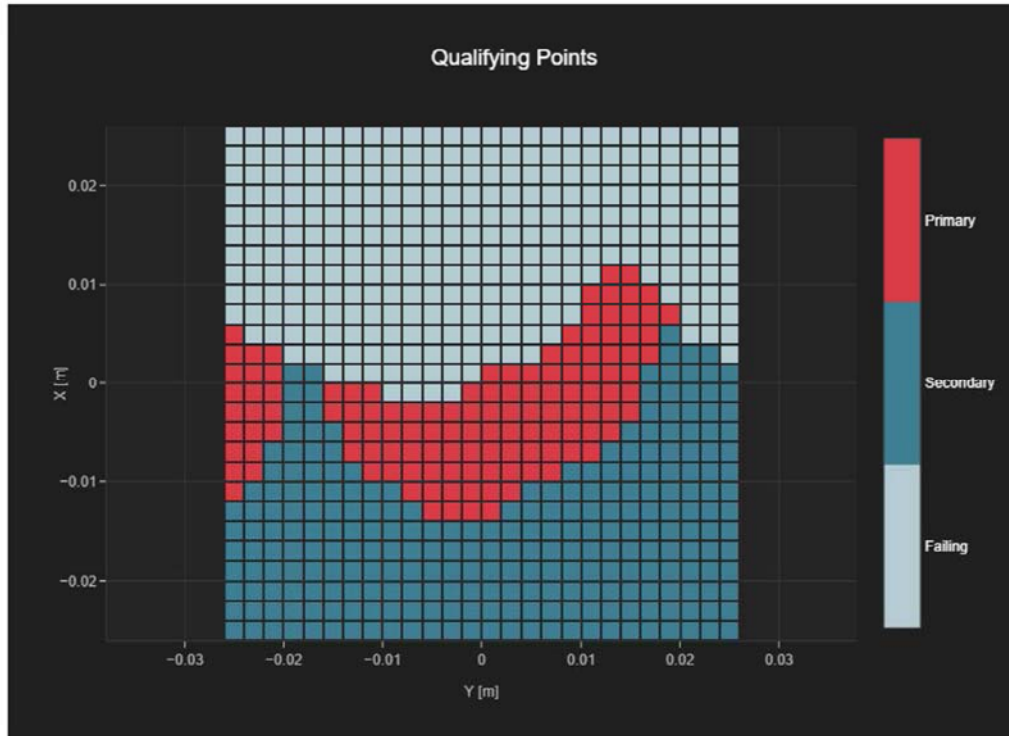


Fig B.4 T-Coil NR B30-n66-OTT



## ANNEX C FREQUENCY REPOSENSE CURVES


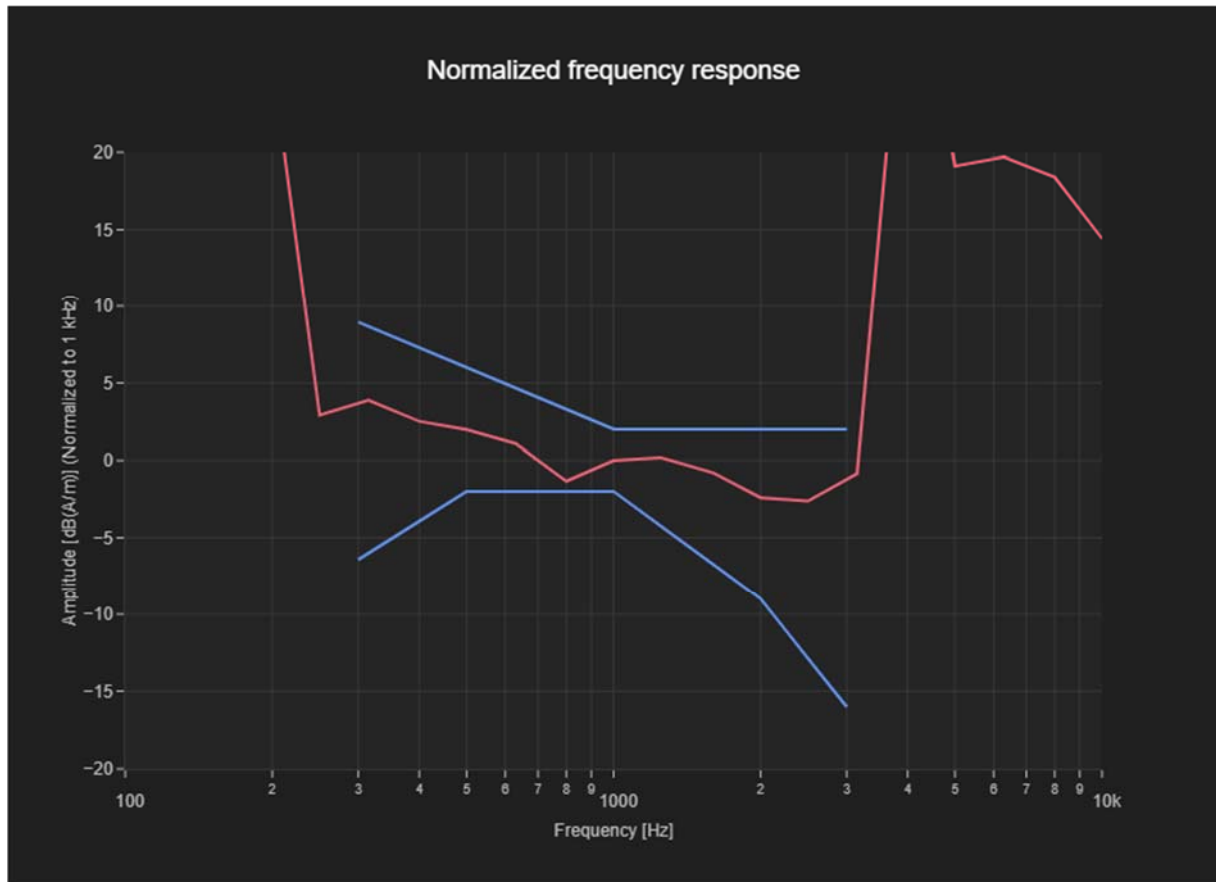


Figure C.1 Frequency Response of GSM850



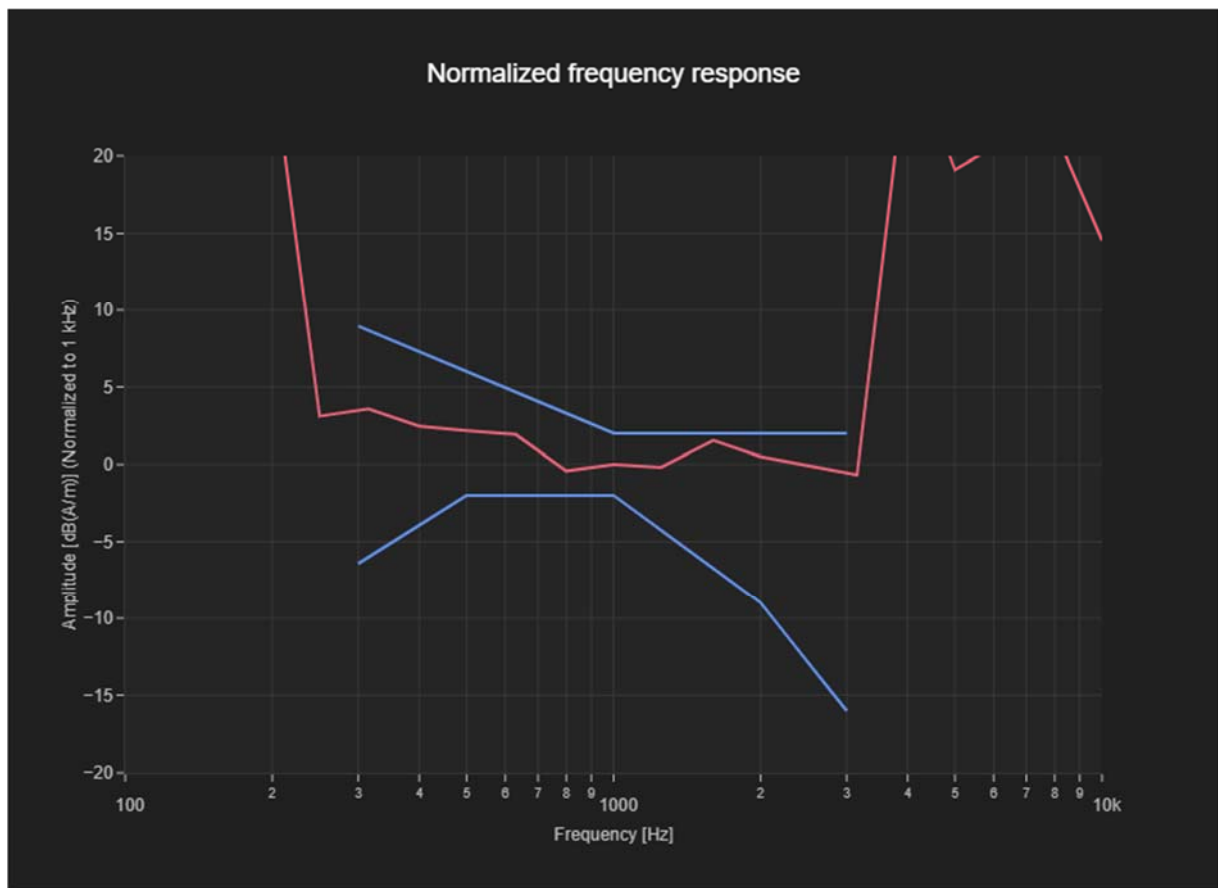

**Figure C.2 Frequency Response of NR n78**

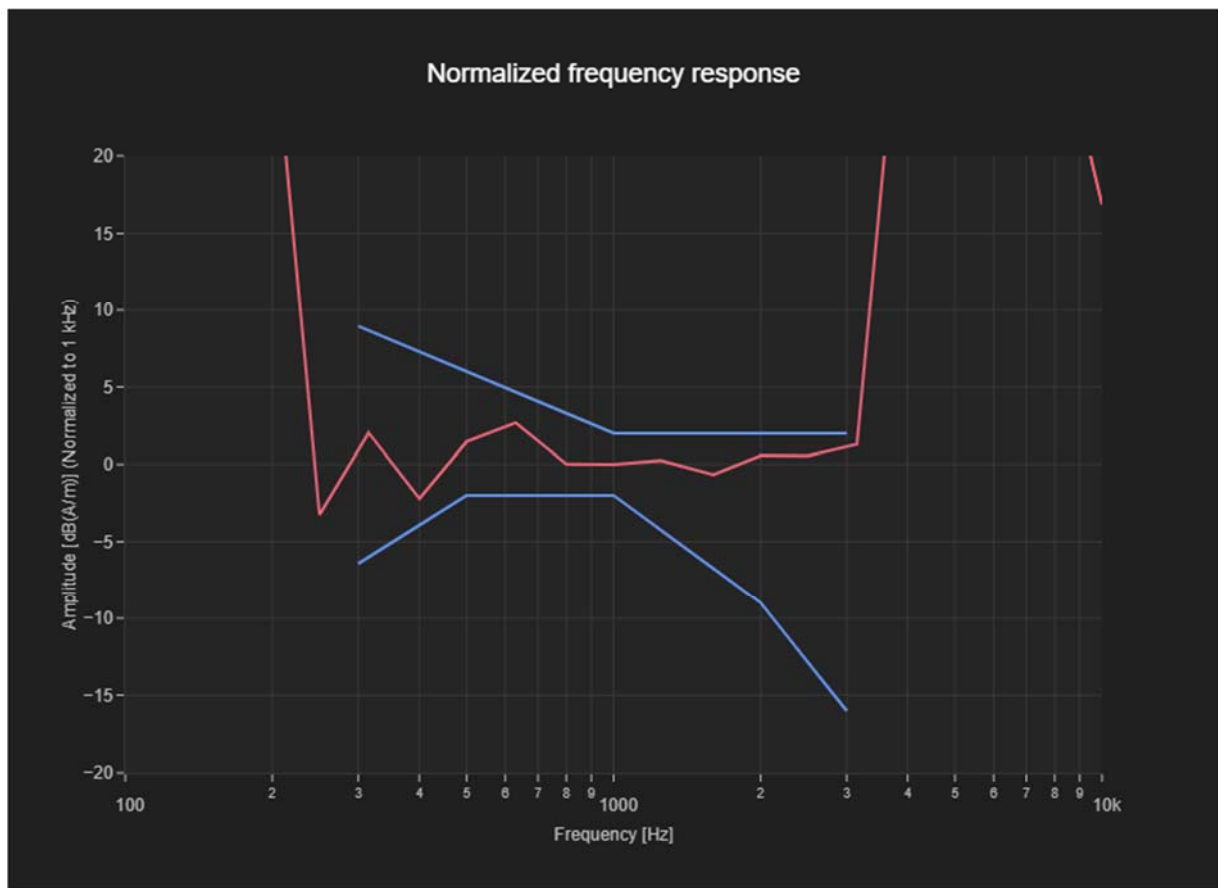


Figure C.3 Frequency Response of GSM1900-OTT

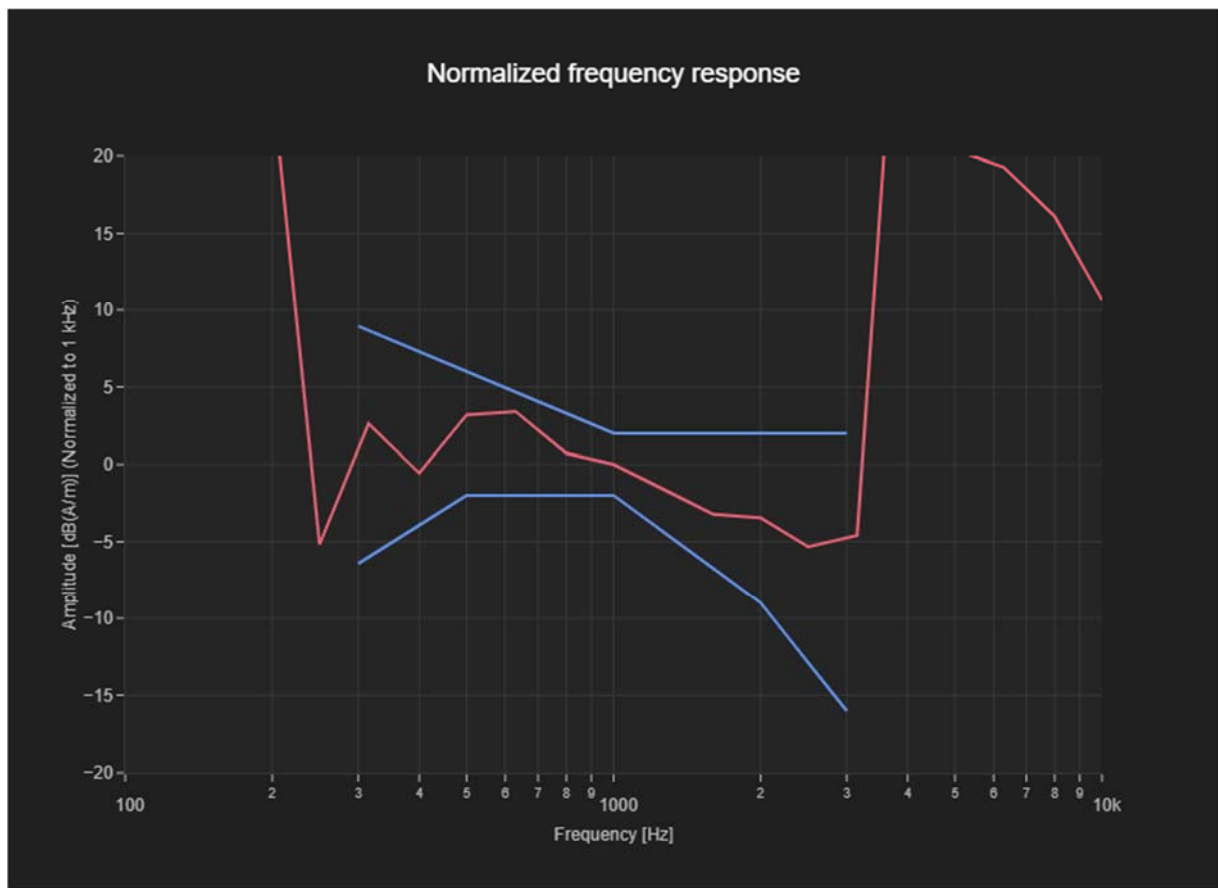


Figure C.4 Frequency Response of NR B30-n66-OTT

## ANNEX D PROBE CALIBRATION CERTIFICATE

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **CTTL**  
**Beijing**

Certificate No. **AM1DV2-1064\_Jul24**

### CALIBRATION CERTIFICATE

Object **AM1DV2 - SN: 1064**

Calibration procedure(s) **QA CAL-24.v4**  
**Calibration procedure for AM1D magnetic field probes and TMFS in the**  
**audio range**

Calibration date: **July 11, 2024**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	29-Aug-23 (No. 37421)	Aug-24
Reference Probe AM1DV2	SN: 1008	13-Dec-23 (No. AM1DV2-1008_Dec23)	Dec-24
DAE4	SN: 781	16-Feb-24 (No. DAE4-781_Feb24)	Feb-25

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
AMCC	SN: 1050	01-Oct-13 (in house check Sep-23)	Sep-26
AMMI Audio Measuring Instrument	SN: 1062	26-Sep-12 (in house check Sep-23)	Sep-26

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Approved by: **Sven Kühn** **Technical Manager**

Signature




Issued: July 12, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

## References

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2019 (ANSI-C63.19-2011)  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY System Handbook

## Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.


## Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

## Methods Applied and Interpretation of Parameters

- **Coordinate System:** The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- **Functional Test:** The functional test preceding calibration includes test of Noise level  
RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected.  
Frequency response verification from 100 Hz to 10 kHz.
- **Connector Rotation:** The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- **Sensor Angle:** The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.


**Sensitivity:** With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.






No. 25T04Z100757-012

## ANNEX E DAE CALIBRATION CERTIFICATE









No. 25T04Z100757-012

**The photos of HAC test are presented in the additional document:**

Appendix to test report No. 25T04Z100757-011/012

The photos of HAC test