



# WCDMA TEST REPORT

No. 25T04Z100690-008

for

**TCL Communication Ltd.**

**GSM/UMTS/LTE Mobile phone**

**Model Name: T452A**

**FCC ID: 2ACCJH192**

with

**Hardware Version: 05**

**Software Version: 452AVA25\_FCC**

**Issued Date: 2025-05-12**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [cttl\\_terminals@caict.ac.cn](mailto:cttl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



No.25T04Z100690-008

## **REPORT HISTORY**

Report Number	Revision	Description	Issue Date
25T04Z100690-008	Rev.0	1 <sup>st</sup> edition	2025-05-12

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
1.1. INTRODUCTION & ACCREDITATION .....	4
1.2. TESTING LOCATION .....	4
1.3. TESTING ENVIRONMENT .....	4
1.4. PROJECT DATA .....	4
1.5. SIGNATURE .....	4
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
2.1. APPLICANT INFORMATION .....	5
2.2. MANUFACTURER INFORMATION .....	5
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
3.1. ABOUT EUT .....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	6
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	7
4.2. REFERENCE DOCUMENTS FOR TESTING .....	7
<b>5. SUMMARY OF TEST RESULT .....</b>	<b>8</b>
<b>6. TEST EQUIPMENT UTILIZED .....</b>	<b>10</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>
A.1 OUTPUT POWER .....	12
A.2 EMISSION LIMIT .....	17
A.3 FREQUENCY STABILITY .....	23
A.4 OCCUPIED BANDWIDTH .....	26
A.5 EMISSION BANDWIDTH .....	39
A.6 BAND EDGE COMPLIANCE .....	52
A.7 CONDUCTED SPURIOUS EMISSION .....	56
A.8 PEAK-TO-AVERAGE POWER RATIO .....	65
<b>ANNEX B: ACCREDITATION CERTIFICATE .....</b>	<b>66</b>

## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

### **1.2. Testing Location**

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

Location 2: CTTL (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology  
Development Area, Beijing, P. R. China 100176

### **1.3. Testing Environment**

Normal Temperature: 15-35℃


Relative Humidity: 20-75%

### **1.4. Project Data**

Testing Start Date: 2025-04-14

Testing End Date: 2025-05-08


### **1.5. Signature**



---

Wang Xing


(Prepared this test report)



---

Zhou Yu

(Reviewed this test report)



---

Zhao Hui Lin

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science  
Park, Shatin, NT, Hong Kong  
Contact: Ting Wang  
Email: ting.wang.hz@tcl.com  
Telephone: +86 752 2639091  
Fax: +86 755 36612000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science  
Park, Shatin, NT, Hong Kong  
Contact: Ting Wang  
Email: ting.wang.hz@tcl.com  
Telephone: +86 752 2639091  
Fax: +86 755 36612000-81722

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	GSM/UMTS/LTE Mobile phone
Model Name	T452A
FCC ID	2ACCJH192
Antenna	Embedded
Output power	21.15 dBm maximum EIRP measured for WCDMA Band IV
Extreme Voltage	3.6VDC to 4.35VDC (nominal: 3.8VDC)
Extreme Temperature	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT09a	350442530001833/	05	452AVA25_FCC	2025-04-07
	350442530001841			
UT07a	350442530001858/	05	452AVA25_FCC	2025-04-08
	350442530001866			

UT07a was used for emission limit test and UT09a was used for other testing cases.

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description
--------	-------------

AE1	Battery
-----	---------

AE2	Battery
-----	---------

##### **AE1**

Model	TLi029F9
Manufacturer	Guangdong Fenghua New Energy Co., Ltd.
Capacitance	Rated 2950mAh/Typical 3000mAh

##### **AE2**

Model	TLi029FB
Manufacturer	Shenzhen Aerospace Electronic Co., Ltd.
Capacitance	Rated 2950mAh/Typical 3000mAh

\*AE ID: is used to identify the test sample in the lab internally.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT parameters are supplied by the customer, which are the bases of testing. CAICT is not responsible for the accuracy of customer supplied technical information that may affect the test results (for example, antenna gain and loss of customer supplied cable).

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-23 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-23 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-23 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

## 5. Summary of Test Result

### WCDMA Band II

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232	P
2	Emission Limit	2.1051/24.238	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	24.238	P
6	Band Edge Compliance	24.238	P
7	Conducted Spurious Emission	24.238	P
8	Peak-to-Average Power Ratio	24.232	P

### WCDMA Band V

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	P
2	Emission Limit	2.1051/22.917	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	22.917	P
6	Band Edge Compliance	22.917	P
7	Conducted Spurious Emission	22.917	P

### WCDMA Band IV

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P



## Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

All the test results are based on normal power.

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

## Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results. Output power was measured on QPSK and 16QAM modulations. It was found that QPSK was the worst case. All testing was performed using QPSK modulations to represent the worst case unless otherwise stated. The test results shown in the following sections represent the worst case emission.

## 6. Test Equipment Utilized

Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
Wideband Radio Communication Tester	CMW500	159082	R&S	2025-12-03	1 year
Spectrum Analyzer	FSV	101576	R&S	2025-05-08	1 year
Climate chamber	SH-241	92004642	ESPEC	2025-10-29	1 year
Test Receiver	ESW44	103144	R&S	2026-01-05	1 year
EMI Antenna	VULB9163	9163-482	Schwarzbeck	2025-05-19	1 year
EMI Antenna	9117	167	Schwarzbeck	2026-10-15	2 years
EMI Antenna	LB-7180-NF	J2030013000005	A-INFO	2025-05-16	1 year
EMI Antenna	3115	00146404	ETS-Lindgren	2025-05-16	1 year
Universal Radio Communication Tester	CMW500	143008	R&S	2026-01-15	1 year
Signal Generator	SMF100A	101295	R&S	2026-02-16	1 year

## 7. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.26. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

Test item		Measurement uncertainty
Output Power(dB)		1.17
Emission Limit(dB)		3.44
Frequency Stability	FE(ppm)	1.16
	F <sub>L</sub> F <sub>H</sub> (kHz)	6.10
Occupied Bandwidth(%)		0.35
Emission Bandwidth(%)		0.39
Band Edge Compliance(dB)		1.59
Conducted Spurious Emission(dB)		4.78
Peak-to-Average Power Ratio(dB)		1.44

## **Annex A: Measurement Results**

### **A.1 Output Power**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

The results below include a correction factor for cable loss that is provided by the customer.

##### **A.1.2.2 Measurement Result**

#### **WCDMA Band II**

##### **QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	22.02
	9400	1880.0	21.88
	9538	1907.6	21.95

##### **16QAM**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	21.77
	9400	1880.0	21.83
	9538	1907.6	21.80

#### **WCDMA Band V**

##### **QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	22.25
	4183	836.6	22.23
	4233	846.6	22.24

##### **16QAM**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	21.81
	4183	836.6	21.75
	4233	846.6	21.92

**WCDMA Band IV****QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band IV)	1312	1712.4	22.83
	1412	1732.4	23.00
	1513	1752.6	23.03

**16QAM**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band IV)	1312	1712.4	21.92
	1412	1732.4	21.88
	1513	1752.6	21.95

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts".

Part 24.232(c) specifies "Mobile and portable stations are limited to 2 watts EIRP".

Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695–1710 MHz and 1755–1780 MHz bands are limited to 1 watt EIRP".

#### A.1.3.2 Method of Measurement

According to KDB 412172 D01 and ANSI C63.26 the relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{ERP or EIRP} = P_T + G_T - L_C$$

where;

- **ERP or EIRP** = effective radiated power or equivalent isotropically radiated power(expressed in the same units as  $P_T$ ).
- **$P_T$**  = transmitter output power, in this report the unit express as dBm;
- **$G_T$**  = gain of the transmitting antenna, in dBd(ERP) or dBi(EIRP);
- **$L_C$**  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Alternatively, the EIRP can be determined from Equation above and then converted to ERP based on the maximum antenna gain relationship by applying the following equation:

$$\text{ERP} = \text{EIRP} - 2.15\text{dB}$$

Note: The antenna gain informations were provided by the client. The laboratory is not responsible for identifying its authenticity during the test.

### A.1.3.3 Limits and Measurement Results

#### WCDMA Band II-EIRP

##### Limits

Band	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm

##### QPSK

WCDMA (Band II)	CH	Frequency (MHz)	output power (dBm)	EIRP(dBm) ( $G_T - L_C = -1.93$ )
	9262	1852.4	22.02	20.09
	9400	1880.0	21.88	19.95
	9538	1907.6	21.95	20.02

##### 16QAM

WCDMA (Band II)	CH	Frequency (MHz)	output power (dBm)	EIRP(dBm) ( $G_T - L_C = -1.93$ )
	9262	1852.4	21.77	19.84
	9400	1880.0	21.83	19.90
	9538	1907.6	21.80	19.87

#### WCDMA Band V-ERP

##### Limits

Band	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm

##### QPSK

WCDMA (Band V)	CH	Frequency (MHz)	output power (dBm)	ERP(dBm) ( $G_T - L_C = -0.41$ )
	4132	826.4	22.25	19.69
	4183	836.6	22.23	19.67
	4233	846.6	22.24	19.68

##### 16QAM

WCDMA (Band V)	CH	Frequency (MHz)	output power (dBm)	ERP(dBm) ( $G_T - L_C = -0.41$ )
	4132	826.4	21.81	19.25
	4183	836.6	21.75	19.19
	4233	846.6	21.92	19.36

## WCDMA Band IV-EIRP

### Limits

Band	Burst Peak EIRP (dBm)
WCDMA Band IV	≤30dBm

### QPSK

WCDMA (Band IV)	CH	Frequency (MHz)	output power (dBm)	EIRP(dBm) ( $G_T - L_C = -1.88$ )
	1312	1712.4	22.83	20.95
	1412	1732.4	23.00	21.12
	1513	1752.6	23.03	21.15

### 16QAM

WCDMA (Band IV)	CH	Frequency (MHz)	output power (dBm)	EIRP(dBm) ( $G_T - L_C = -1.88$ )
	1312	1712.4	21.92	20.04
	1412	1732.4	21.88	20.00
	1513	1752.6	21.95	20.07



## A.2 Emission Limit


### A.2.1 Measurement Method

The measurement procedures in TIA-603E-2016 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917, Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

#### The procedure of radiated spurious emissions is as follows:

For measurements performed at frequencies less than or equal to 1 GHz, the EUT was placed on a 80cm-high non-conductive support; For measurements performed at frequencies above 1GHz, EUT was placed on a 1.5-meter-high non-conductive support. A measurement antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. In the initial test, the height of the measurement antenna was varied from 1 m to 4 m for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

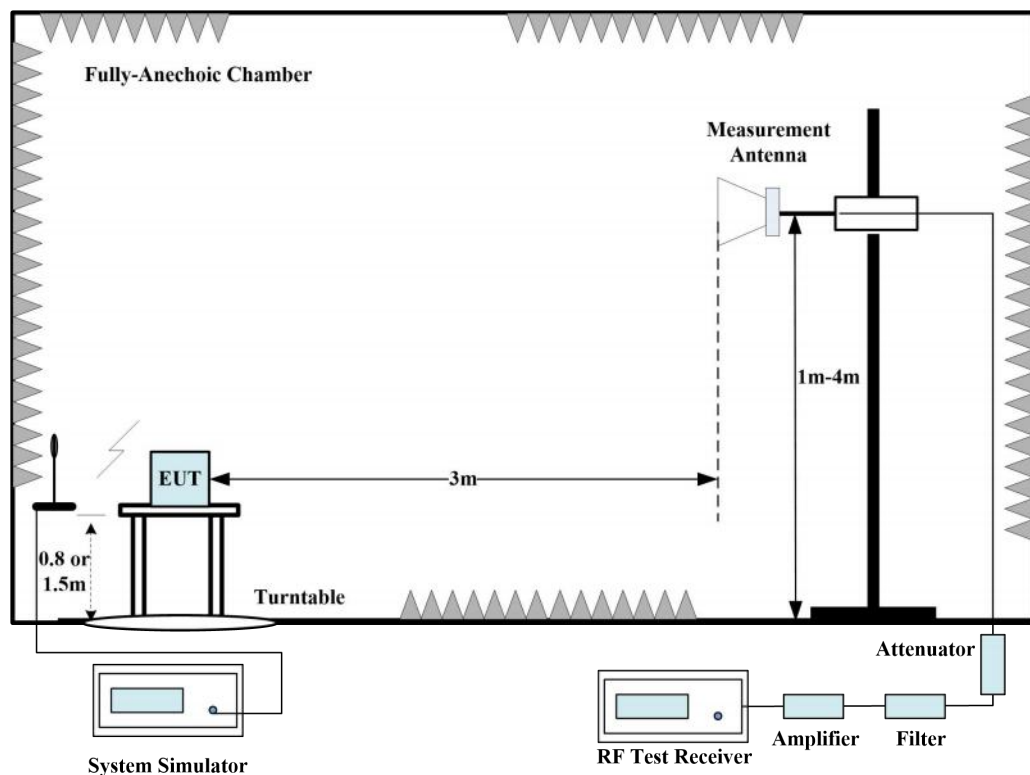

1. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
2. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

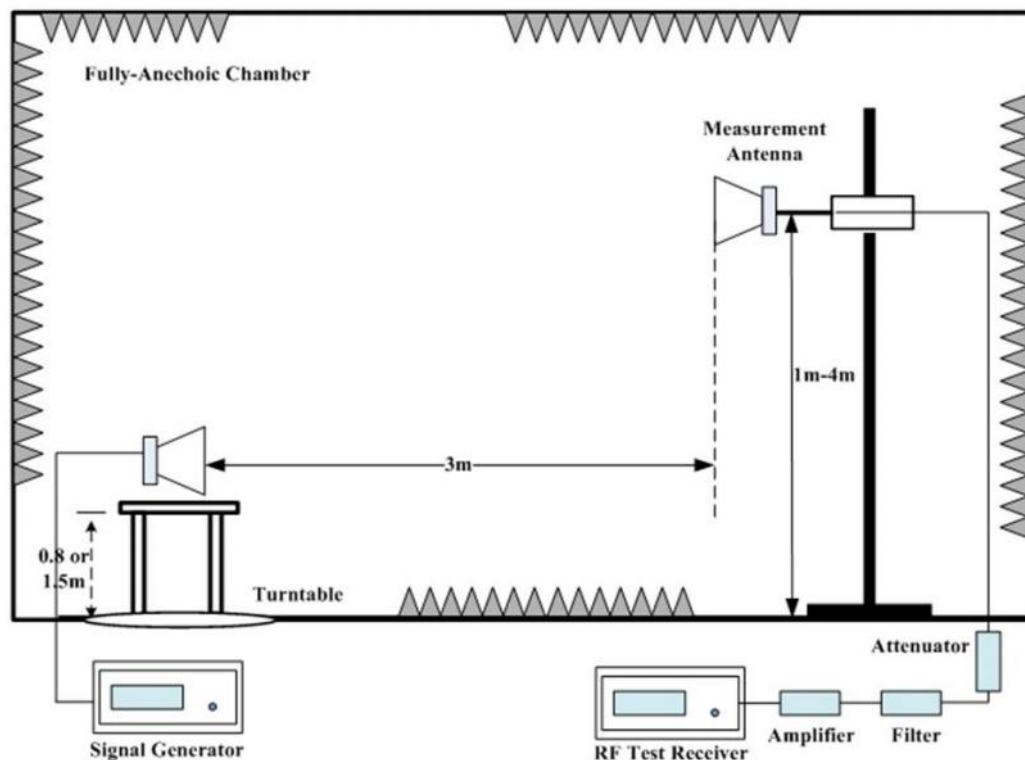

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. The height of measurement antenna varied between 1 m to 4 m to maximize the received signal amplitude for each emission that was detected and measured in the initial test. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test was performed with the measurement antenna in both vertical and horizontal polarization.

3. The Path loss ( $P_{pl}$ ) between the Signal Source and the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) were recorded after test. A amplifier was connected in for the test. The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.
4. The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### A.2.2 Measurement Limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10\log(P)$  dB.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz), WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV(1712.4MHz, 1732.4MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

### A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	9kHz-10GHz	Pass
	Middle	9kHz-10GHz	Pass
	High	9kHz-10GHz	Pass
WCDMA Band II	Low	9kHz-20GHz	Pass
	Middle	9kHz-20GHz	Pass
	High	9kHz-20GHz	Pass
WCDMA Band IV	Low	9kHz-20GHz	Pass
	Middle	9kHz-20GHz	Pass
	High	9kHz-20GHz	Pass

### A.2.5 Sweep Table

Subrange	RBW	VBW
9~150 kHz	0.2kHz	0.6kHz
150kHz~30MHz	9kHz	27kHz
30MHz~1 GHz	100KHz	300KHz
1~20 GHz	1 MHz	3 MHz

### A.2.6 Measurement Result

#### WCDMA BAND II Mode Channel 9262/1852.4MHz

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3703.00	-58.51	3.47	10.39	-51.59	-13.00	38.59	H
5554.00	-57.90	5.33	11.21	-52.02	-13.00	39.02	V
7413.50	-47.57	8.02	10.10	-45.49	-13.00	32.49	V
9276.00	-49.73	8.45	11.70	-46.48	-13.00	33.48	H
11128.00	-49.06	9.94	12.63	-46.37	-13.00	33.37	H
12970.50	-45.00	12.54	12.73	-44.81	-13.00	31.81	V

#### WCDMA BAND II Mode Channel 9400/1880MHz

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3762.50	-59.37	3.80	10.15	-53.02	-13.00	40.02	H
5635.50	-59.14	5.61	11.37	-53.38	-13.00	40.38	H
7515.00	-49.08	7.71	10.23	-46.56	-13.00	33.56	V
9390.00	-50.06	9.13	11.50	-47.69	-13.00	34.69	H
11273.50	-47.36	10.64	12.63	-45.37	-13.00	32.37	V
13165.00	-45.12	13.19	12.54	-45.77	-13.00	32.77	H

#### WCDMA BAND II Mode Channel 9538/1907.6MHz

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3813.00	-60.50	3.94	9.97	-54.47	-13.00	41.47	V
5720.00	-57.47	5.91	11.36	-52.02	-13.00	39.02	H
7634.50	-49.89	6.75	10.37	-46.27	-13.00	33.27	V
9542.00	-50.55	9.11	11.88	-47.78	-13.00	34.78	H
11451.00	-46.75	12.39	12.55	-46.59	-13.00	33.59	V
13366.50	-43.92	13.10	12.43	-44.59	-13.00	31.59	H

**WCDMA BAND V Mode Channel 4132/826.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1650.50	-61.17	2.59	9.50	2.15	-56.41	-13.00	43.41	H
2468.00	-54.73	4.32	10.36	2.15	-50.84	-13.00	37.84	V
5781.00	-59.66	5.69	11.11	2.15	-56.39	-13.00	43.39	V
6617.00	-55.80	6.94	10.33	2.15	-54.56	-13.00	41.56	V
7436.00	-51.75	7.89	10.10	2.15	-51.69	-13.00	38.69	V
8263.50	-52.37	7.60	11.20	2.15	-50.92	-13.00	37.92	V

**WCDMA BAND V Mode Channel 4183/836.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2512.50	-53.51	4.29	10.30	2.15	-49.65	-13.00	36.65	H
5017.50	-60.01	5.11	11.40	2.15	-55.87	-13.00	42.87	V
5852.00	-59.44	5.60	10.99	2.15	-56.20	-13.00	43.20	V
6699.50	-55.84	6.21	10.50	2.15	-53.70	-13.00	40.70	H
7524.00	-51.74	7.71	10.25	2.15	-51.35	-13.00	38.35	V
8354.00	-51.97	8.27	11.30	2.15	-51.09	-13.00	38.09	H

**WCDMA BAND V Mode Channel 4233/846.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1690.50	-58.80	2.96	9.42	2.15	-54.49	-13.00	41.49	H
2542.50	-53.74	4.63	10.30	2.15	-50.22	-13.00	37.22	H
5925.50	-58.10	6.08	10.75	2.15	-55.58	-13.00	42.58	H
6786.50	-54.98	6.39	10.37	2.15	-53.15	-13.00	40.15	H
7608.00	-52.89	6.57	10.32	2.15	-51.29	-13.00	38.29	H
8456.00	-52.54	8.02	11.30	2.15	-51.41	-13.00	38.41	V

**WCDMA BAND IV Mode Channel 1312/1712.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3423.00	-61.10	3.25	10.05	-54.30	-13.00	41.30	V
8566.00	-52.94	8.46	11.20	-50.20	-13.00	37.20	V
11985.50	-55.95	12.23	13.07	-55.11	-13.00	42.11	V
13698.50	-52.48	13.05	12.20	-53.33	-13.00	40.33	H
15400.50	-56.48	14.89	15.40	-55.97	-13.00	42.97	H
17135.50	-44.95	20.07	13.46	-51.56	-13.00	38.56	H

**WCDMA BAND IV Mode Channel 1412/1732.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3463.00	-58.91	3.84	10.10	-52.65	-13.00	39.65	H
5199.50	-58.37	5.70	11.70	-52.37	-13.00	39.37	H
8666.50	-53.80	8.55	11.17	-51.18	-13.00	38.18	V
13853.00	-52.24	13.09	12.10	-53.23	-13.00	40.23	H
15578.50	-54.32	16.59	15.60	-55.31	-13.00	42.31	H
17313.00	-44.29	19.25	13.17	-50.37	-13.00	37.37	H

**WCDMA BAND IV Mode Channel 1513/1752.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3503.50	-60.22	3.05	10.11	-53.16	-13.00	40.16	H
5255.00	-59.67	4.90	11.71	-52.86	-13.00	39.86	V
7013.50	-57.91	7.61	10.43	-55.09	-13.00	42.09	V
8767.50	-50.68	7.95	11.14	-47.49	-13.00	34.49	V
14018.50	-51.61	14.26	12.22	-53.65	-13.00	40.65	V
17535.00	-43.37	19.67	13.14	-49.90	-13.00	36.90	V

Note: Peak EIRP (dBm) = P<sub>Mea</sub>(dBm) - Path Loss(dB) + Antenna Gain(dBi)

## **A.3 Frequency Stability**

### **A.3.1 Method of Measurement**

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $F_L$  and  $F_H$  respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of CMW500.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on mid channel of each band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C decrements from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

### A.3.2 Measurement results

#### WCDMA Band II-QPSK

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	1850.160	1909.830		
50				-0.82	0.0004
40				0.48	0.0003
30				6.53	0.0035
10				-0.67	0.0004
0				3.28	0.0017
-10				-5.82	0.0031
-20				-2.67	0.0014
-30				0.33	0.0002

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	1850.160	1909.830	-10.64	0.0057
4.35				-3.58	0.0019

#### WCDMA Band IV-QPSK

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	1710.170	1754.840		
50				10.15	0.0059
40				9.42	0.0054
30				-3.48	0.0020
10				1.72	0.0010
0				7.78	0.0045
-10				-0.12	0.0001
-20				5.19	0.0030
-30				7.55	0.0044

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	1710.170	1754.840	6.39	0.0037
4.35				8.61	0.0050



# WCDMA Band V-QPSK

## Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	824.170	848.830		
50				-5.10	0.0061
40				-3.10	0.0037
30				-5.04	0.0060
10				-3.09	0.0037
0				-3.29	0.0039
-10				-2.12	0.0025
-20				-1.62	0.0019
-30				-1.26	0.0015

## Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	824.170	848.830	-3.34	0.0040
4.35				-1.51	0.0018

#### **A.4 Occupied Bandwidth**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

### WCDMA Band II (99%)-QPSK


Frequency (MHz)	Occupied Bandwidth (99%) (MHz)
1852.4	4.172
1880	4.172
1907.6	4.152

### WCDMA Band II (99%)


#### Channel 9262-Occupied Bandwidth (99% BW)

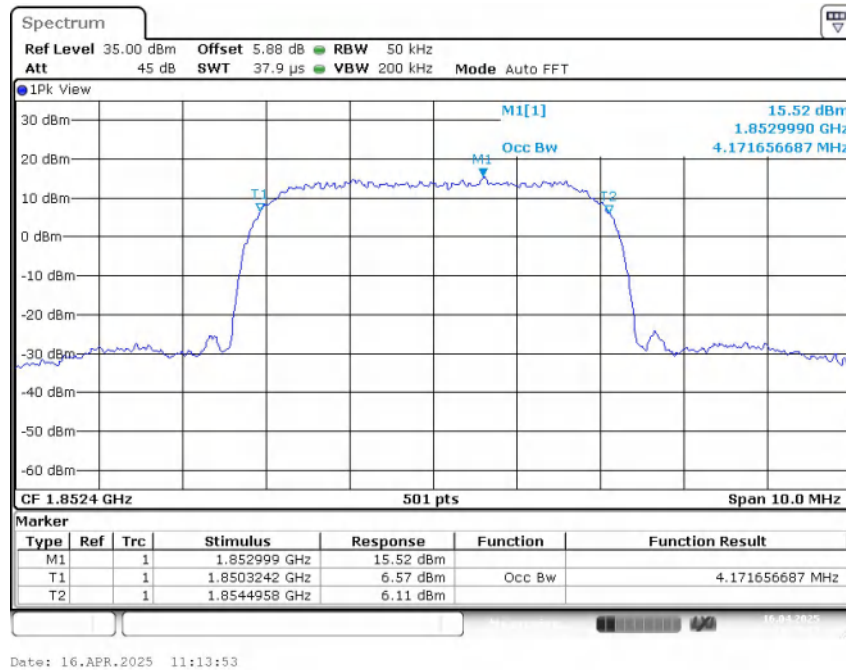

#### Channel 9400-Occupied Bandwidth (99% BW)

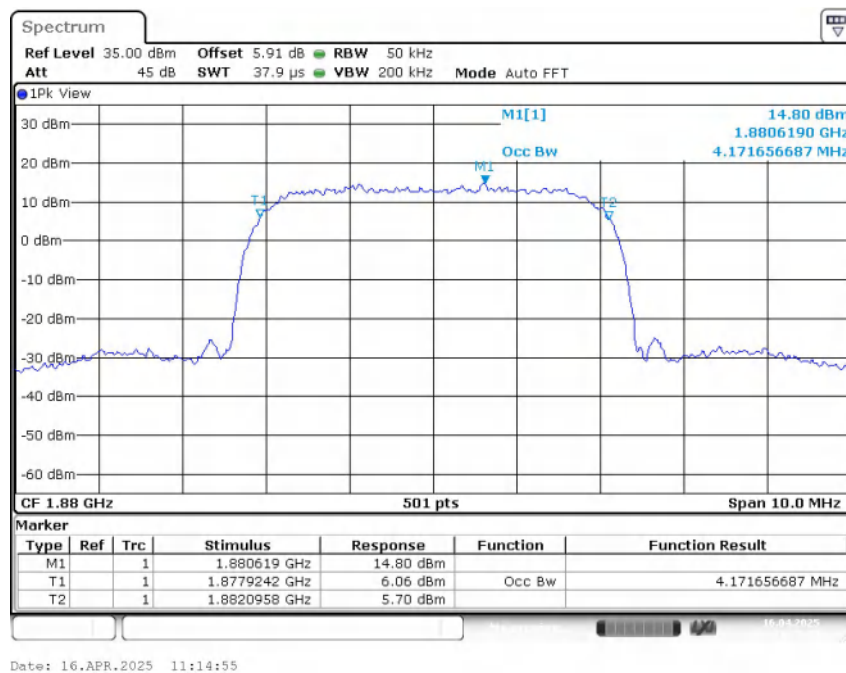

## Channel 9538-Occupied Bandwidth (99% BW)

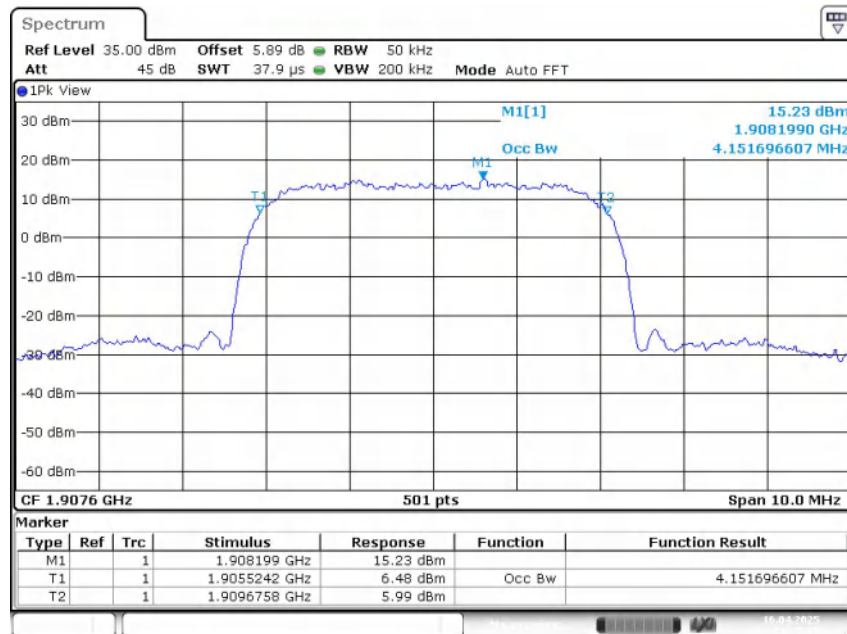


### WCDMA Band II (99%)-16QAM


Frequency (MHz)	Occupied Bandwidth (99%) (MHz)
1852.4	4.172
1880	4.152
1907.6	4.152

### WCDMA Band II (99%)


#### Channel 9262-Occupied Bandwidth (99% BW)

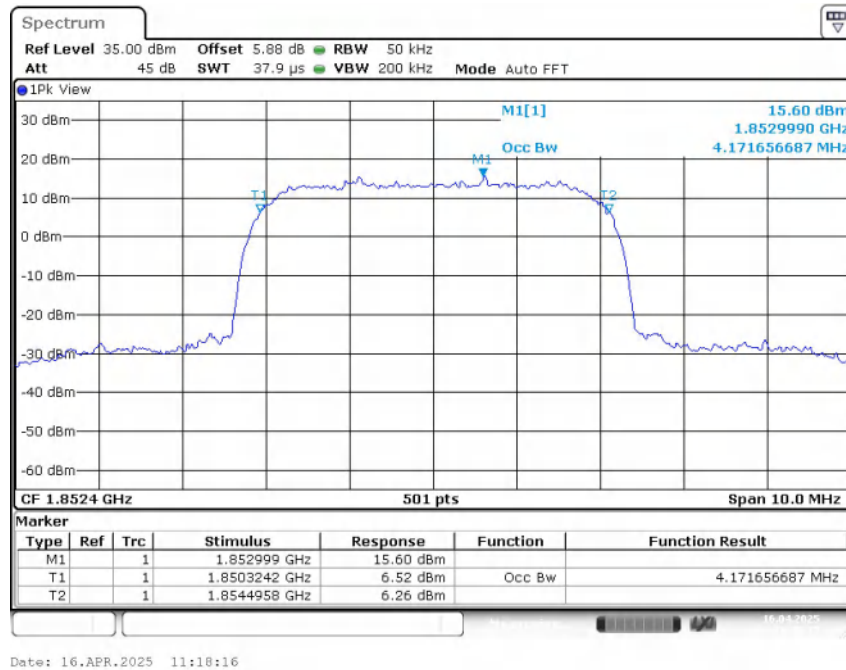

#### Channel 9400-Occupied Bandwidth (99% BW)

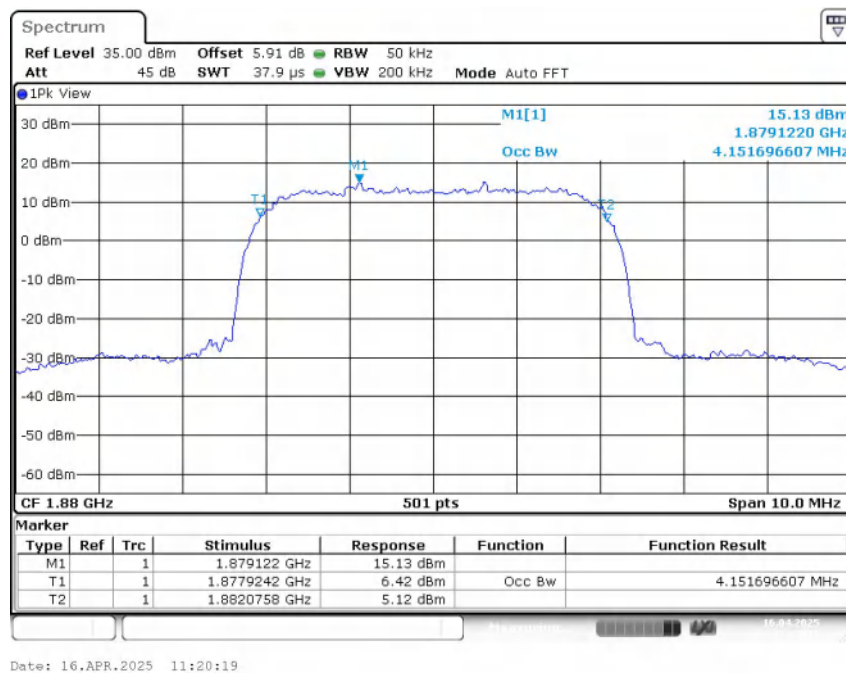

## Channel 9538-Occupied Bandwidth (99% BW)

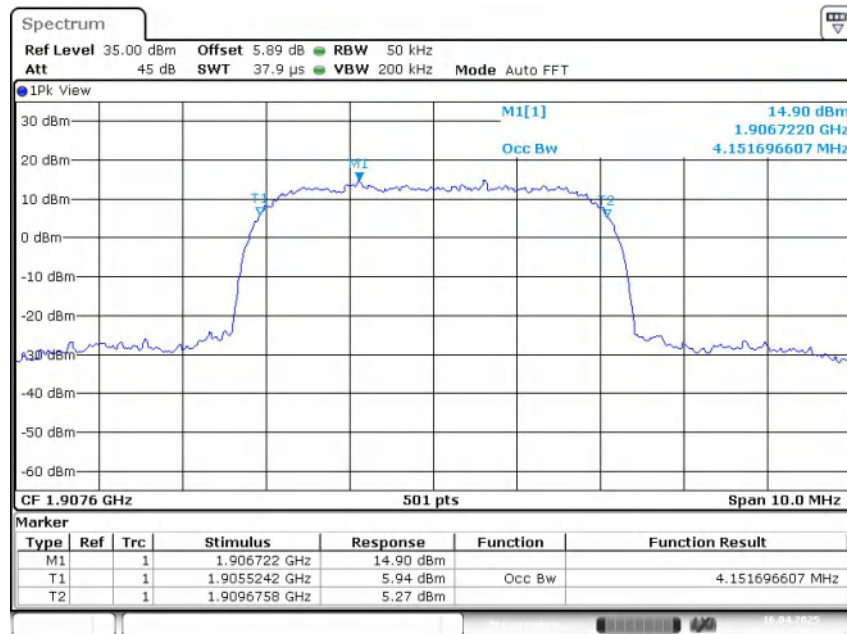


Date: 16.APR.2025 11:22:22

### WCDMA Band IV (99%)-QPSK


Frequency (MHz)	Occupied Bandwidth (99%) (MHz)
1712.4	4.152
1732.4	4.172
1752.6	4.152

### WCDMA Band IV (99%)


#### Channel 1312-Occupied Bandwidth (99% BW)

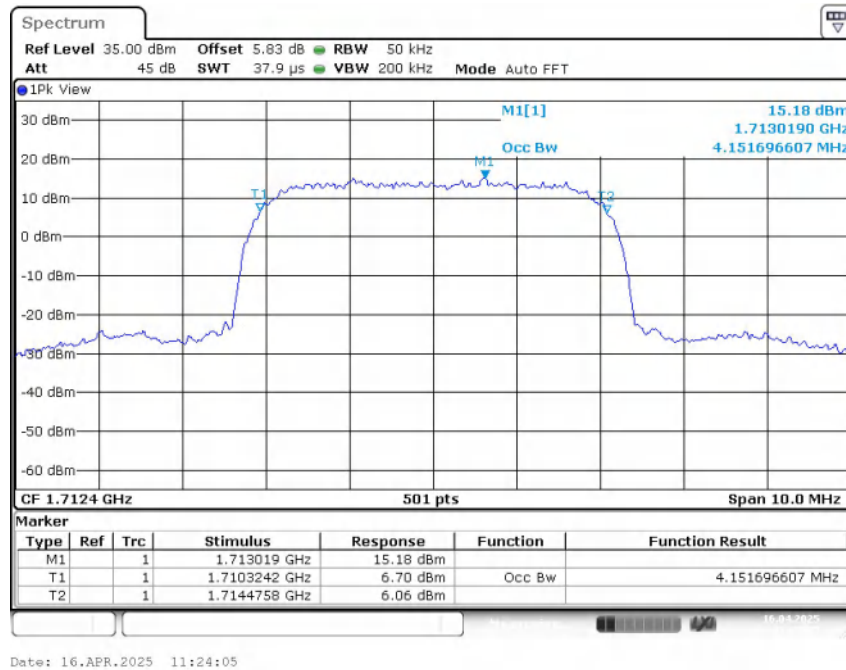

#### Channel 1412-Occupied Bandwidth (99% BW)

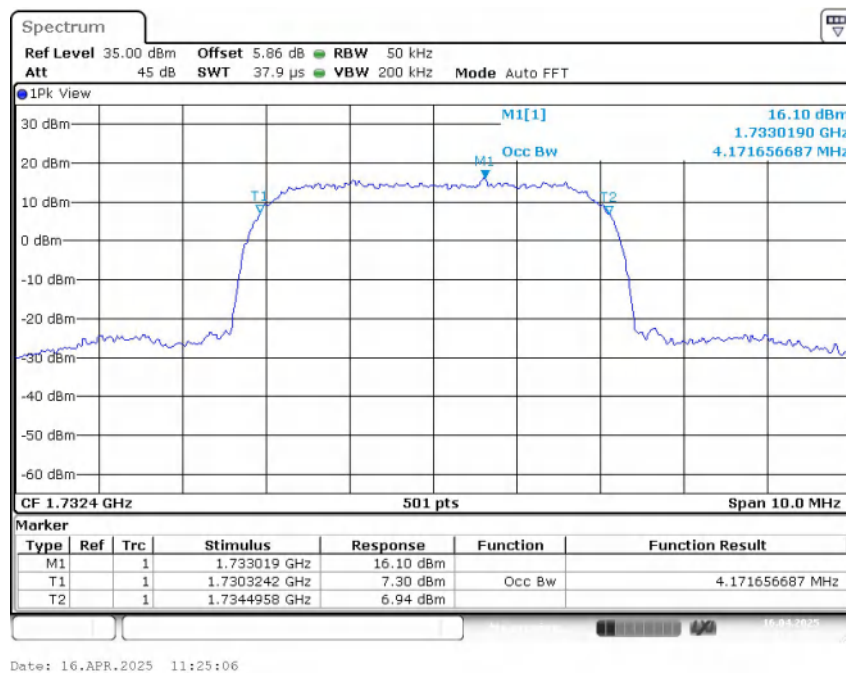

## Channel 1513-Occupied Bandwidth (99% BW)

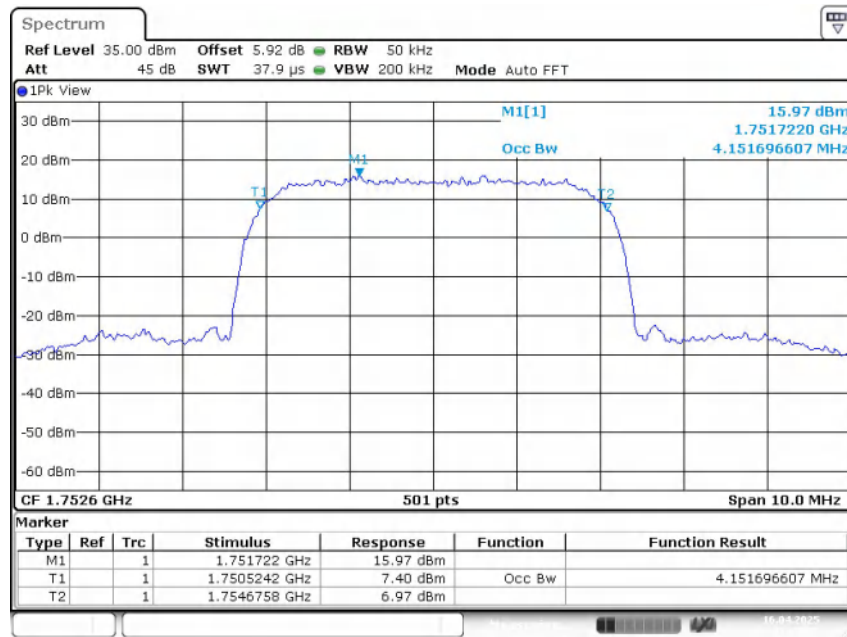

Date: 16.APR.2025 11:26:08




### WCDMA Band IV (99%)-16QAM


Frequency (MHz)	Occupied Bandwidth (99%) (MHz)
1712.4	4.172
1732.4	4.172
1752.6	4.152

### WCDMA Band IV (99%)


#### Channel 1312-Occupied Bandwidth (99% BW)

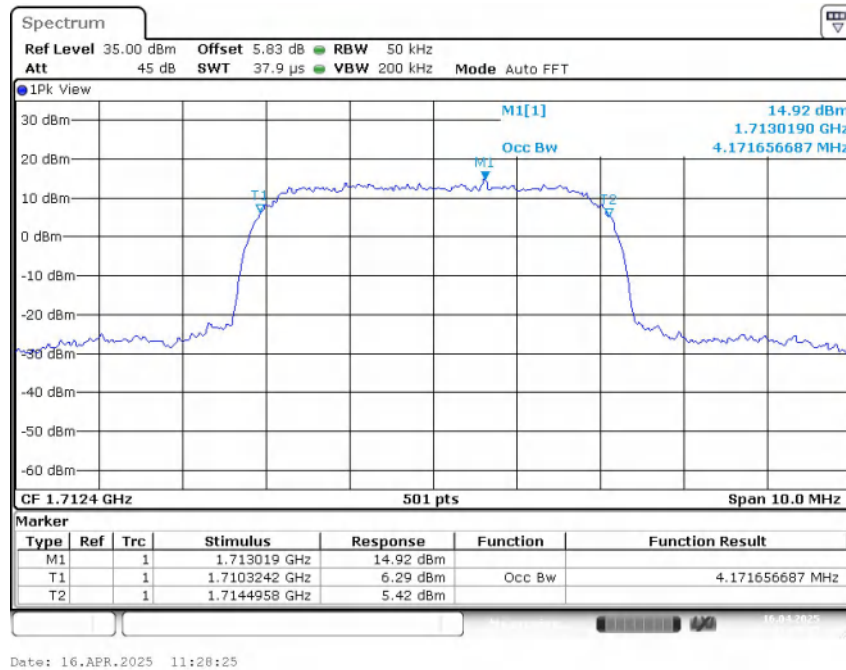

#### Channel 1412-Occupied Bandwidth (99% BW)

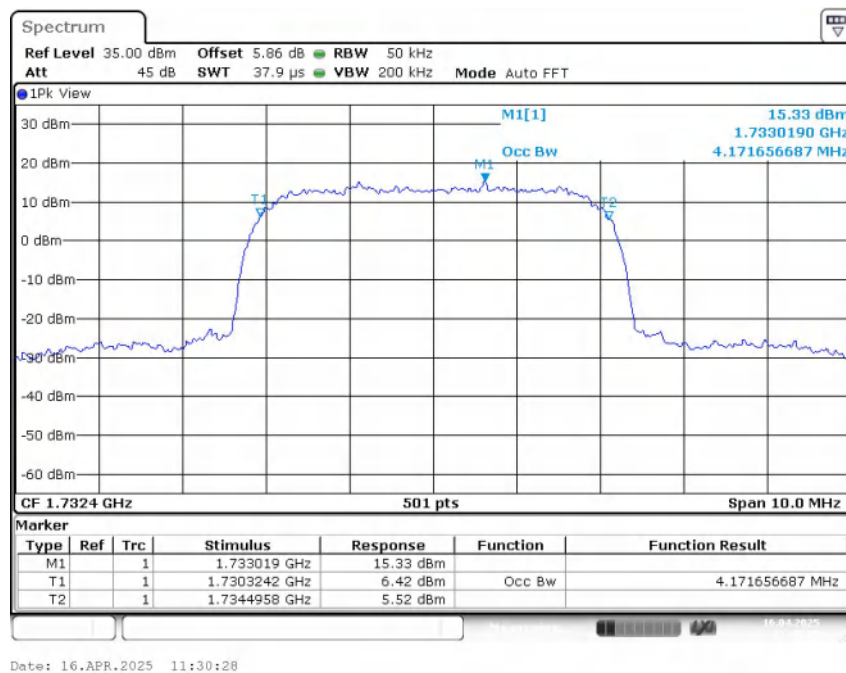

## Channel 1513-Occupied Bandwidth (99% BW)

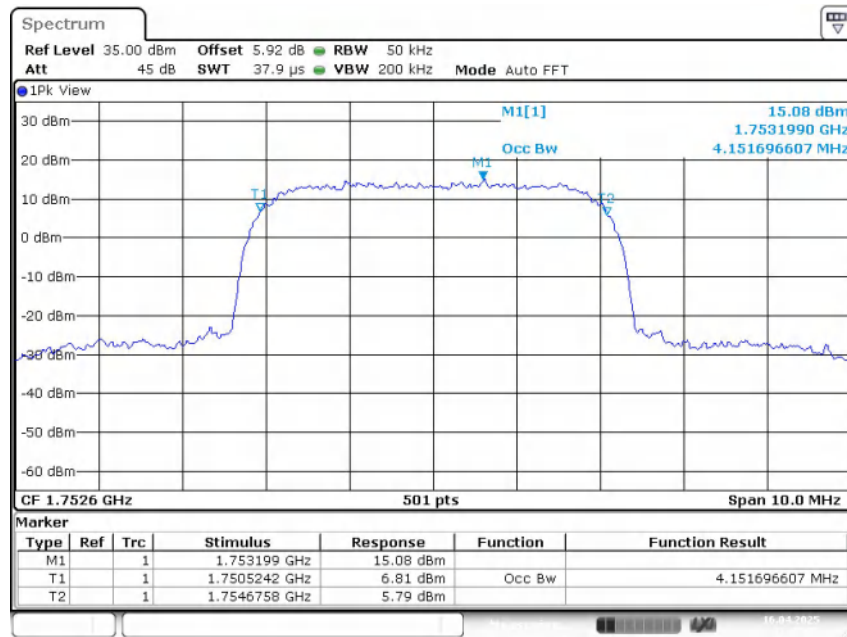


Date: 16.APR.2025 11:32:31

### WCDMA Band V (99%)-QPSK


Frequency (MHz)	Occupied Bandwidth (99%) (MHz)
826.4	4.152
836.6	4.152
846.6	4.152

### WCDMA Band V (99%)


#### Channel 4132-Occupied Bandwidth (99% BW)

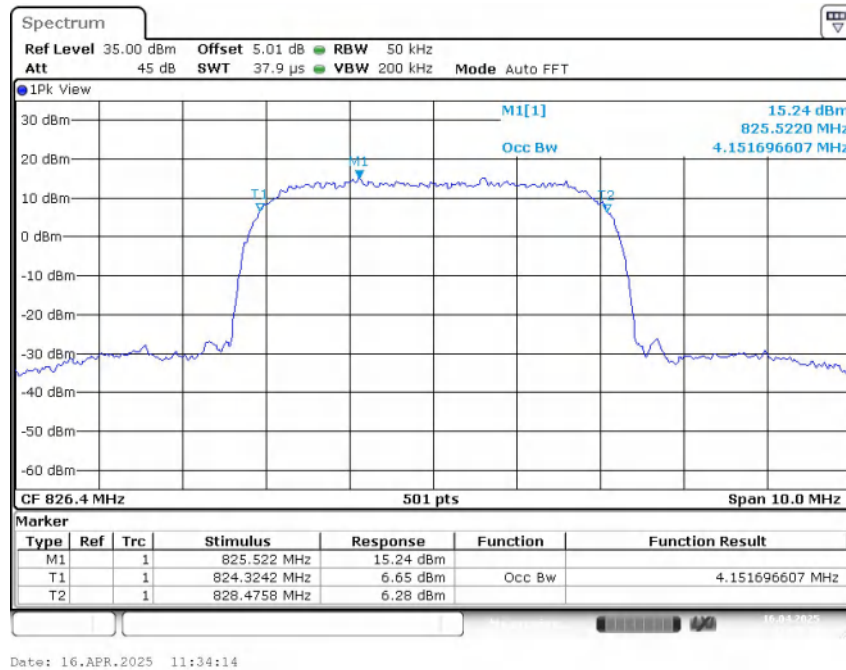

#### Channel 4183-Occupied Bandwidth (99% BW)

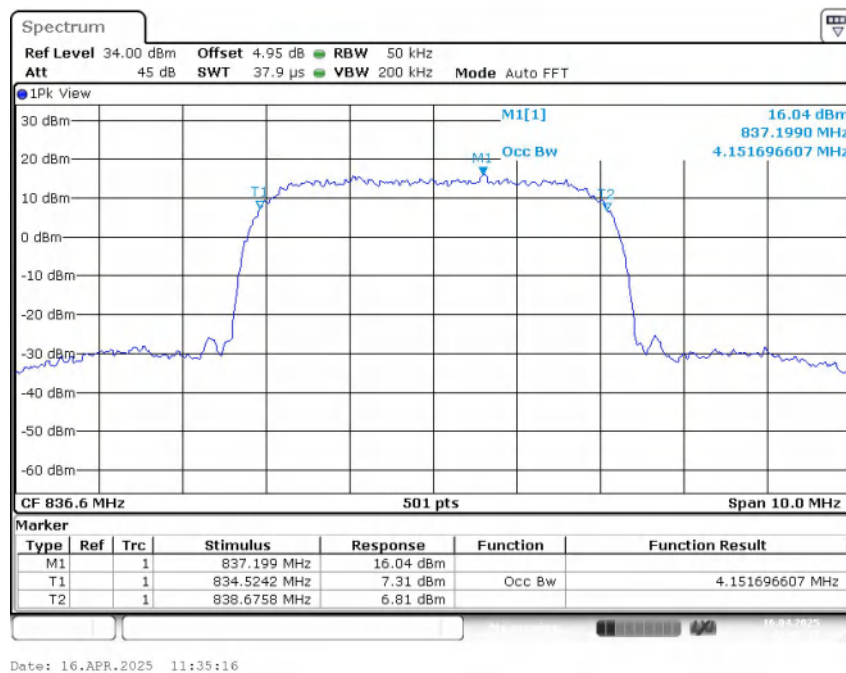

## Channel 4233-Occupied Bandwidth (99% BW)

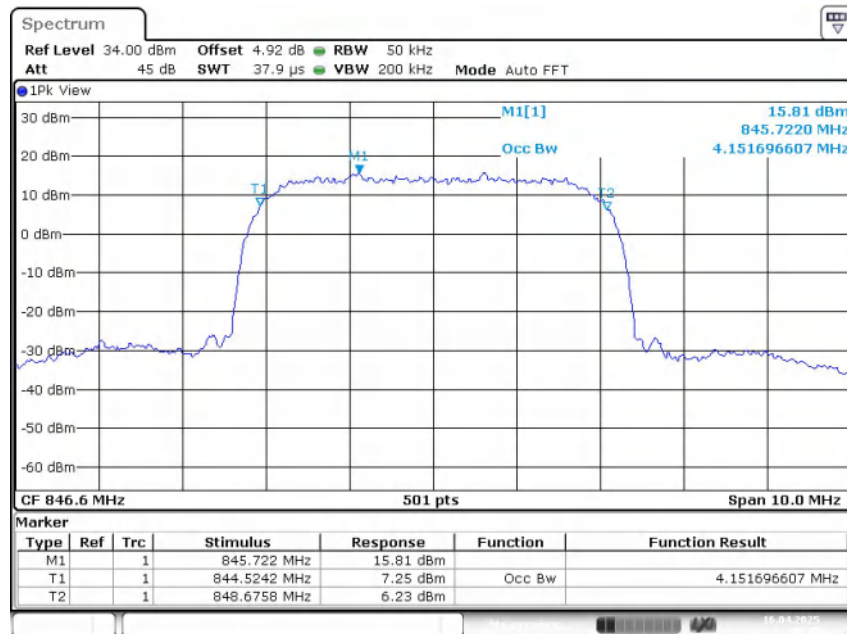


Date: 16.APR.2025 11:36:17

### WCDMA Band V (99%)-16QAM


Frequency (MHz)	Occupied Bandwidth (99%) (MHz)
826.4	4.152
836.6	4.152
846.6	4.152

### WCDMA Band V (99%)


#### Channel 4132-Occupied Bandwidth (99% BW)

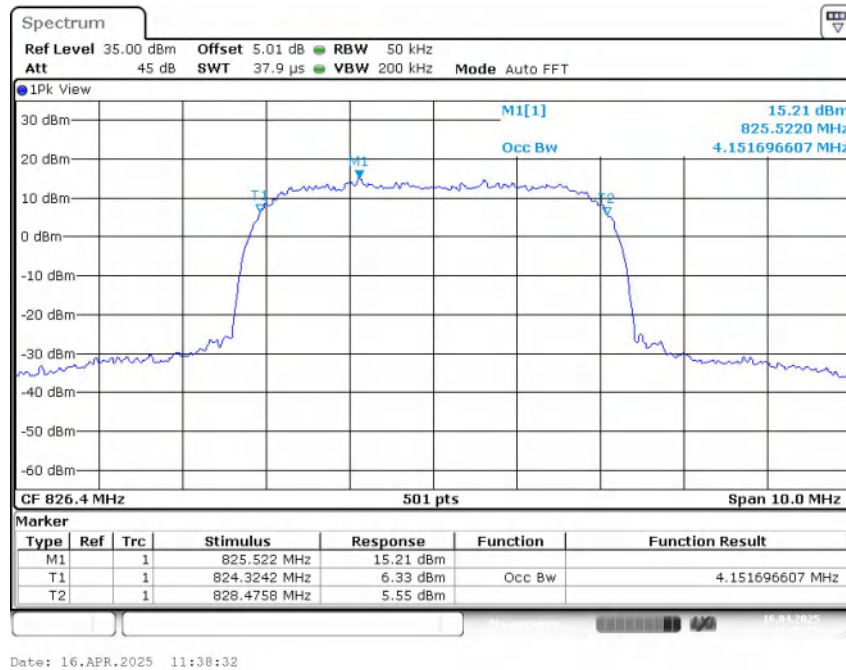

#### Channel 4183-Occupied Bandwidth (99% BW)

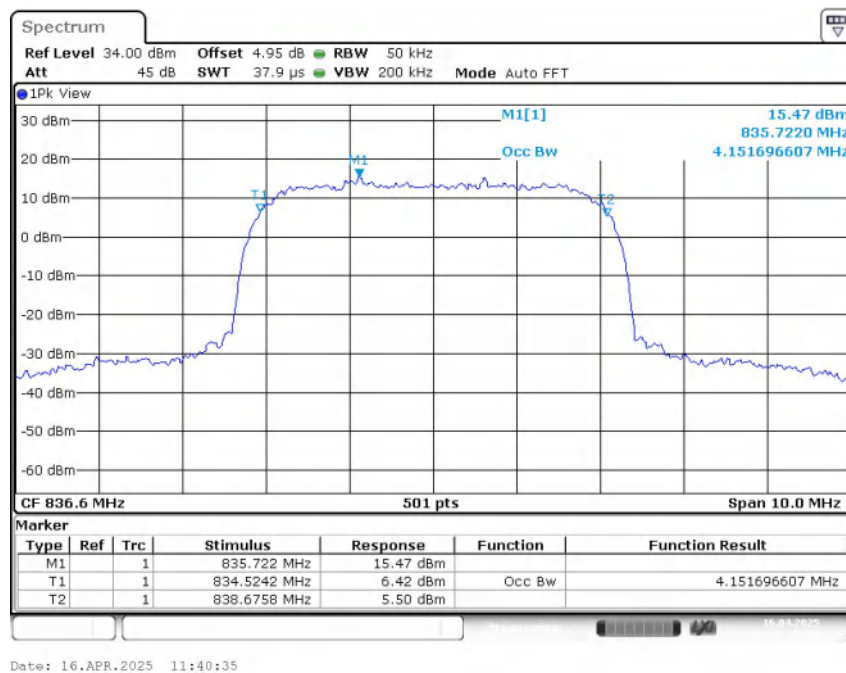

## Channel 4233-Occupied Bandwidth (99% BW)

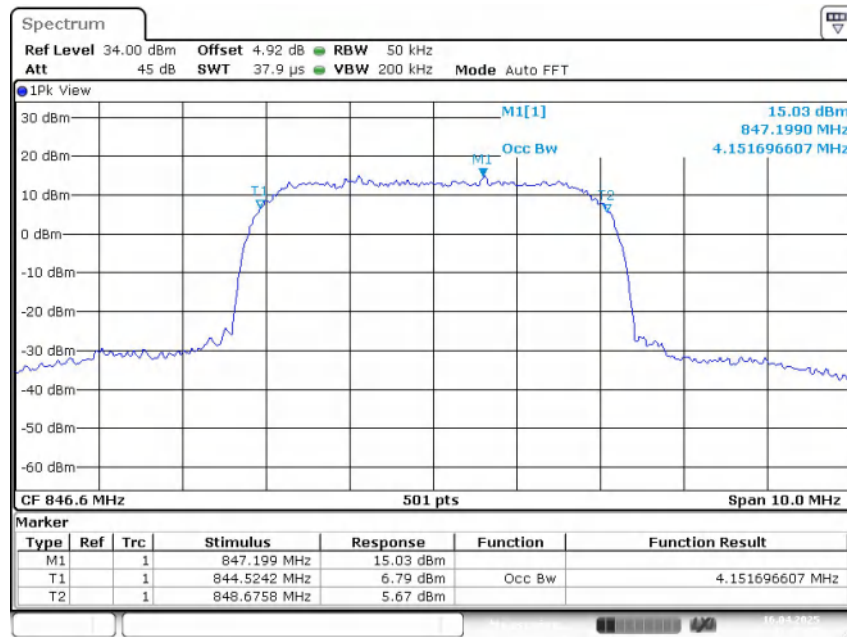

## **A.5 Emission Bandwidth**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

### WCDMA Band II (-26dBc)-QPSK


Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)
1852.4	4.660
1880	4.660
1907.6	4.660

### WCDMA Band II (-26dBc)

#### Channel 9262-Emission Bandwidth (-26dBc BW)

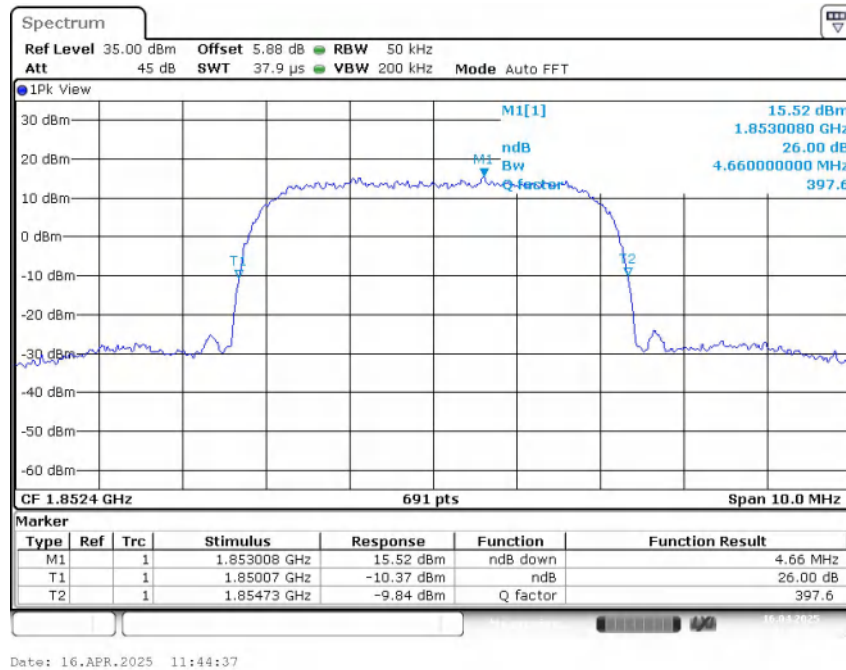


#### Channel 9400-Emission Bandwidth (-26dBc BW)

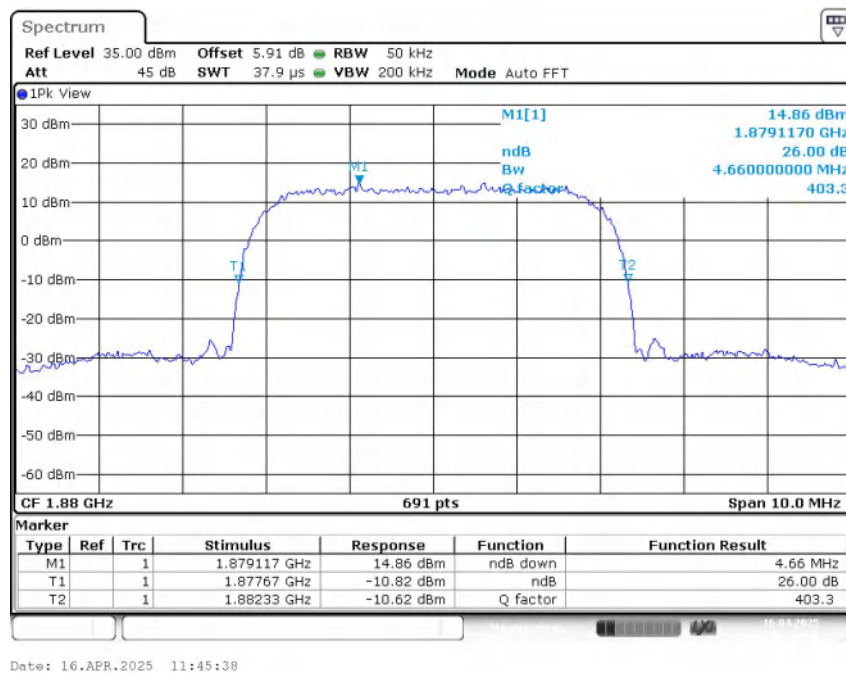



## Channel 9538-Emission Bandwidth (-26dBc BW)

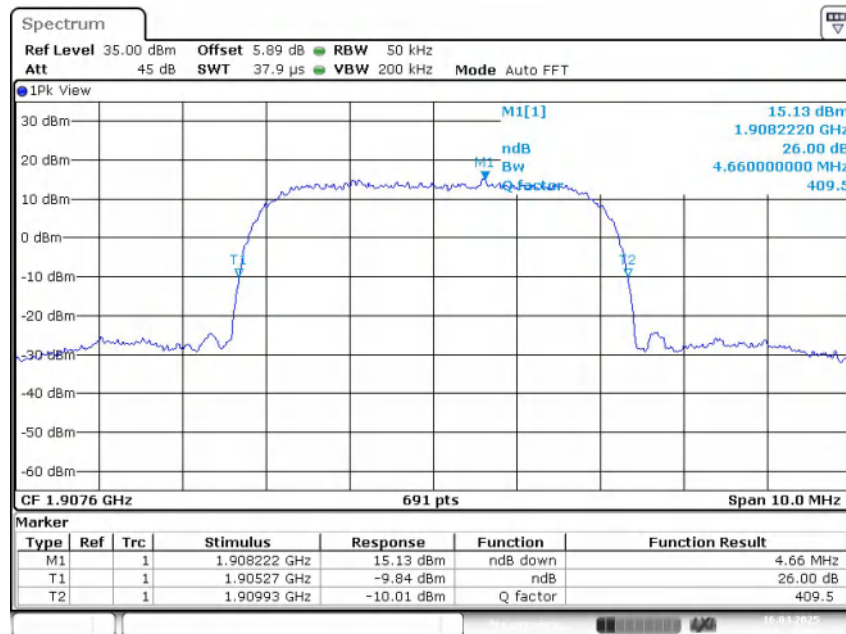


### WCDMA Band II (-26dBc)-16QAM


Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)
1852.4	4.660
1880	4.660
1907.6	4.660

### WCDMA Band II (-26dBc)


#### Channel 9262-Emission Bandwidth (-26dBc BW)

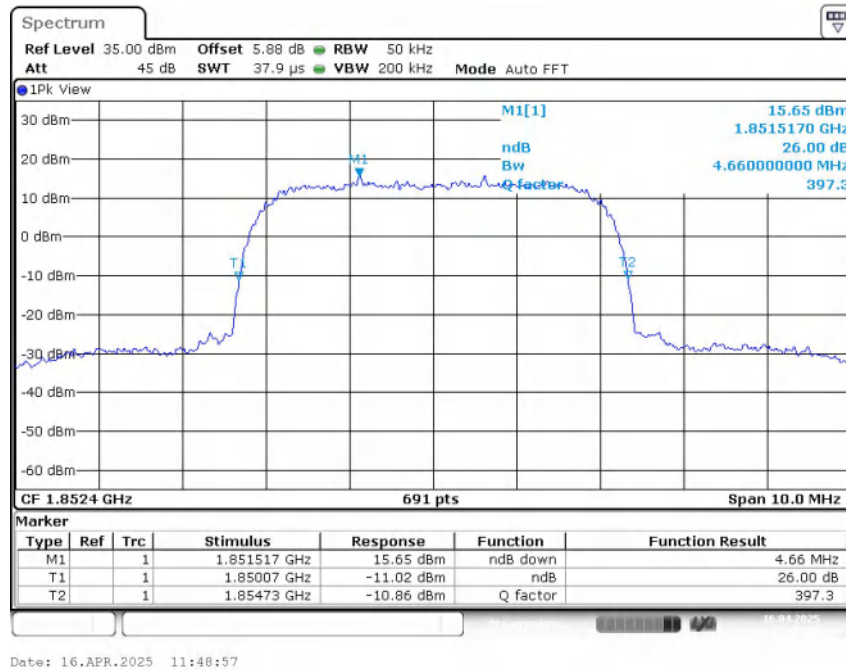

#### Channel 9400-Emission Bandwidth (-26dBc BW)

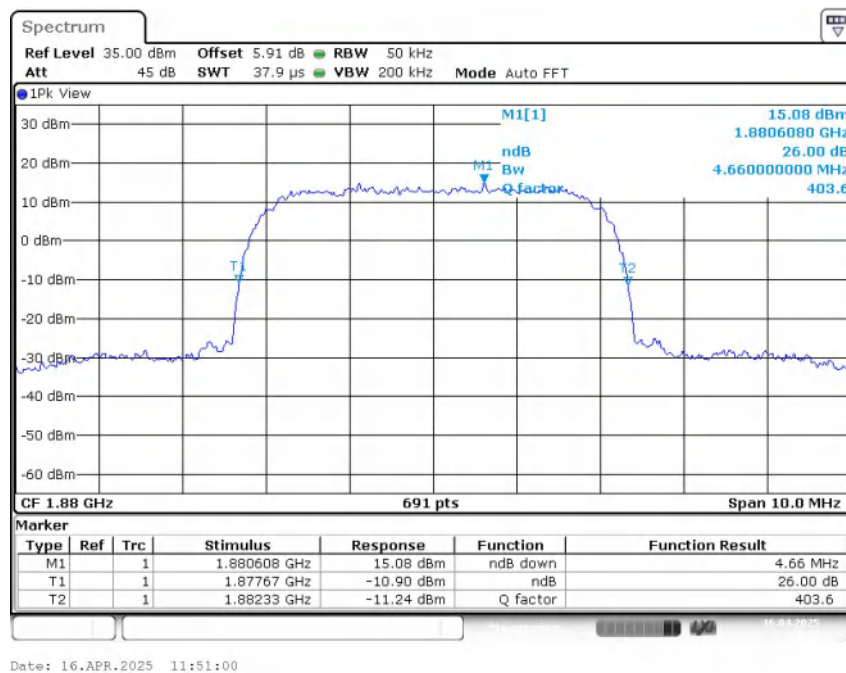

# Channel 9538-Emission Bandwidth (-26dBc BW)

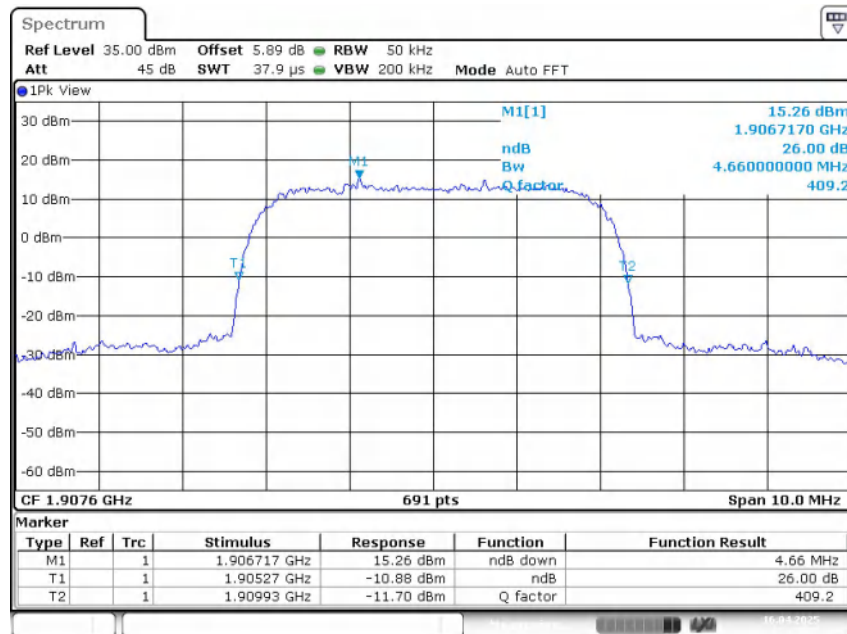


Date: 16.APR.2025 11:53:02

### WCDMA Band IV (-26dBc)-QPSK


Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)
1712.4	4.660
1732.4	4.660
1752.6	4.660

### WCDMA Band IV (-26dBc)


#### Channel 1312-Emission Bandwidth (-26dBc BW)

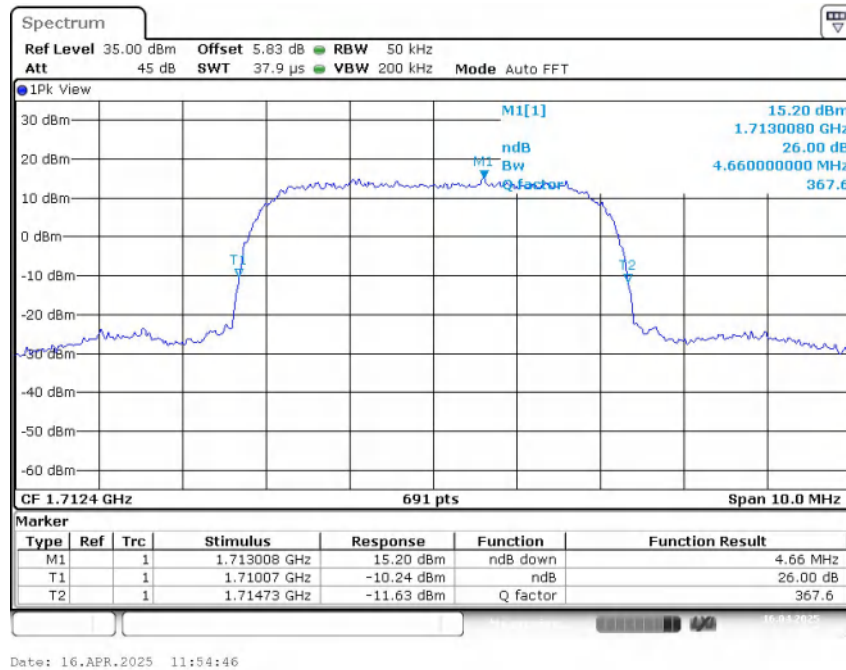

#### Channel 1412-Emission Bandwidth (-26dBc BW)

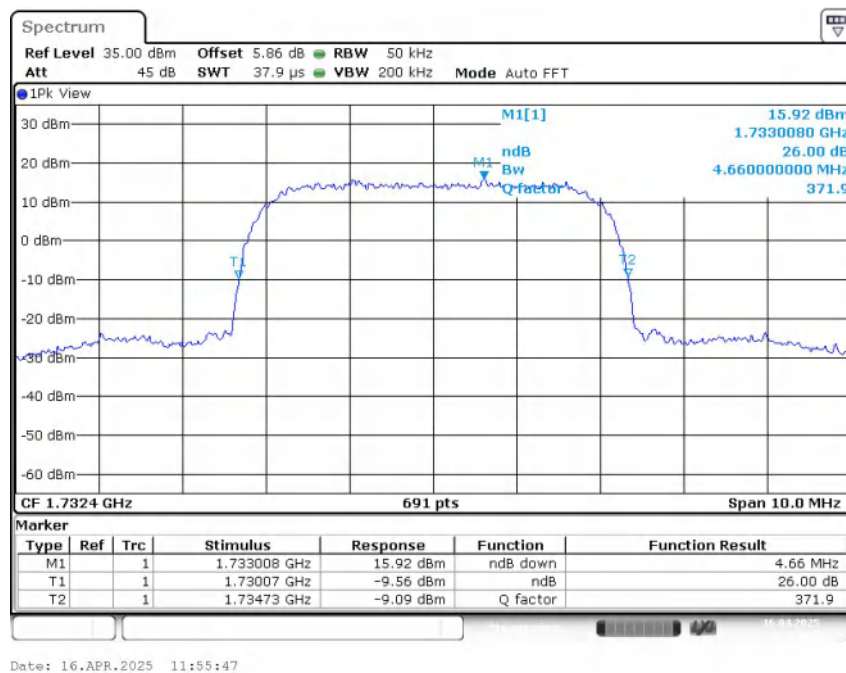

## Channel 1513-Emission Bandwidth (-26dBc BW)

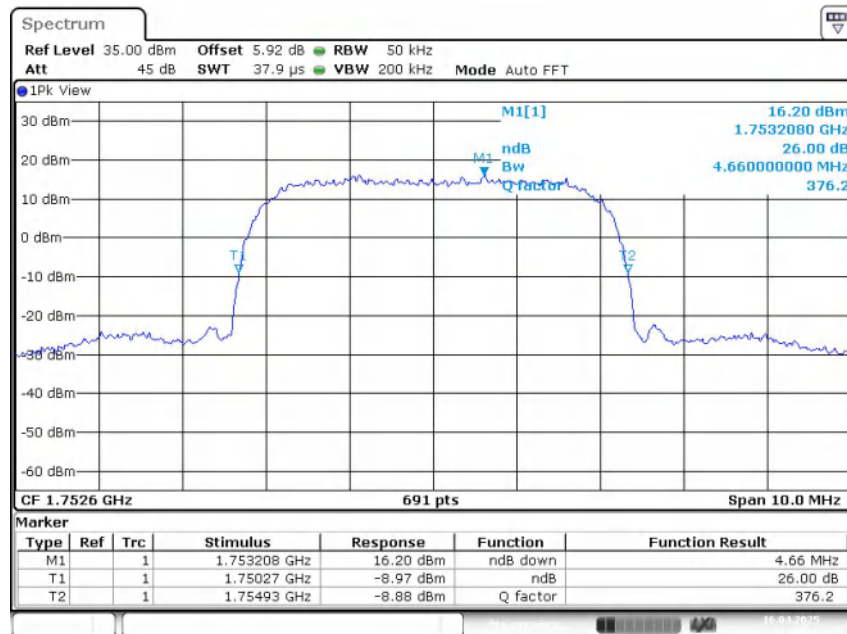


### WCDMA Band IV (-26dBc)-16QAM


Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)
1712.4	4.660
1732.4	4.660
1752.6	4.660

### WCDMA Band IV (-26dBc)


#### Channel 1312-Emission Bandwidth (-26dBc BW)

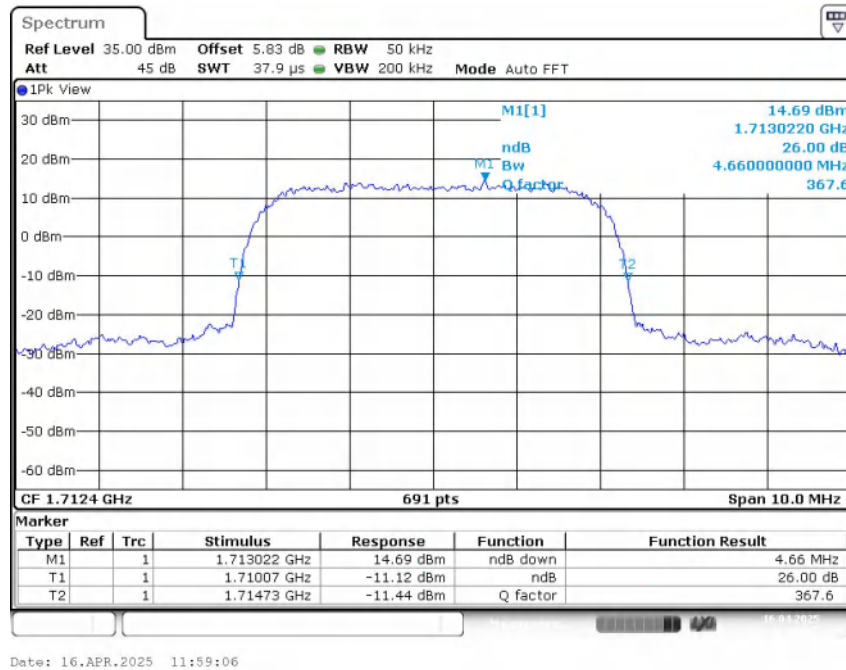

#### Channel 1412-Emission Bandwidth (-26dBc BW)

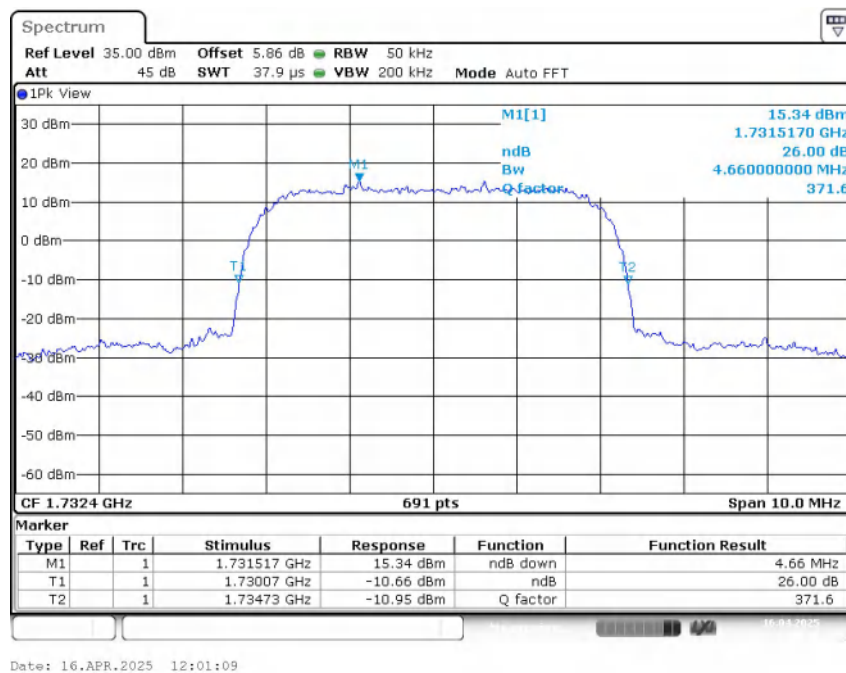

## Channel 1513-Emission Bandwidth (-26dBc BW)

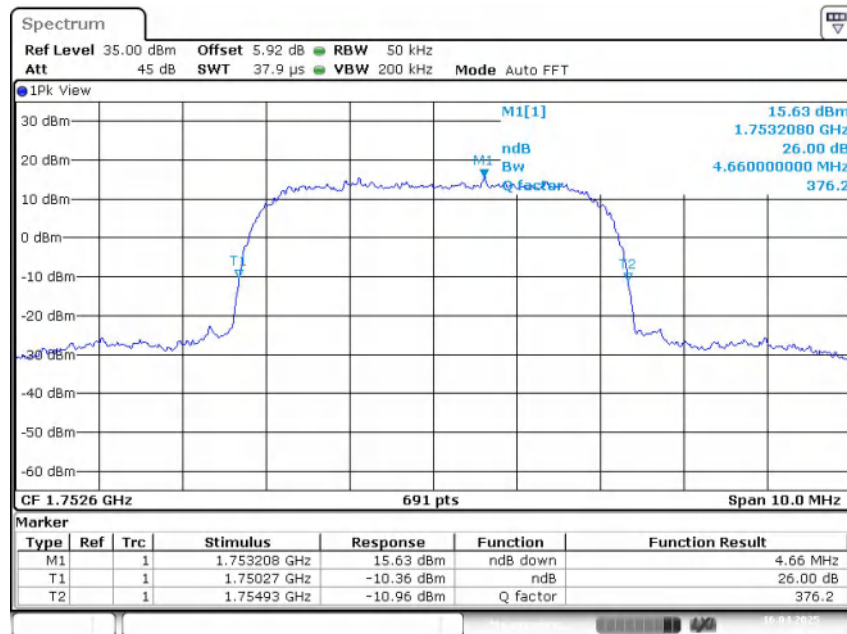


Date: 16.APR.2025 12:03:12

### WCDMA Band V (-26dBc)-QPSK


Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)
826.4	4.660
836.6	4.660
846.6	4.660

### WCDMA Band V (-26dBc)

#### Channel 4132-Emission Bandwidth (-26dBc BW)

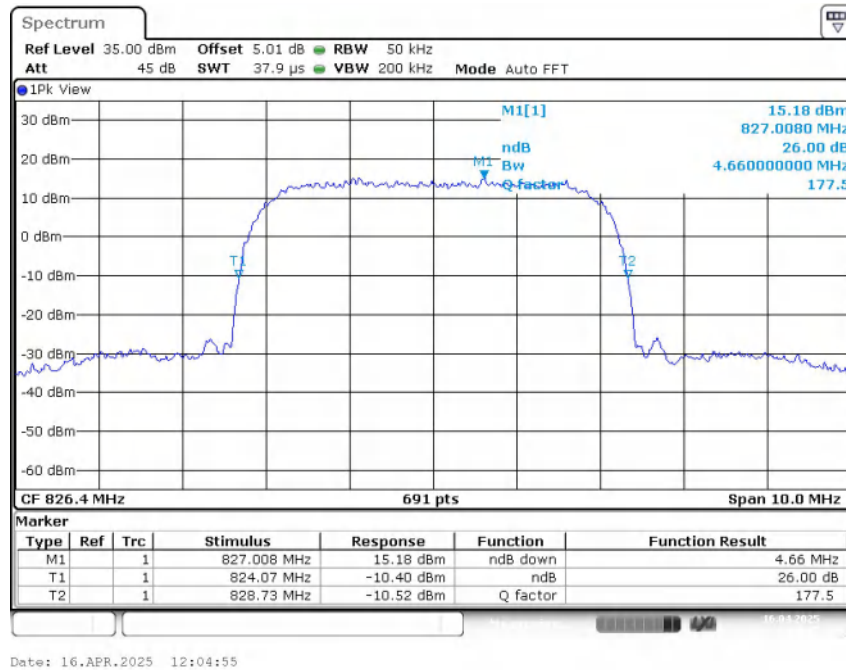


#### Channel 4183-Emission Bandwidth (-26dBc BW)

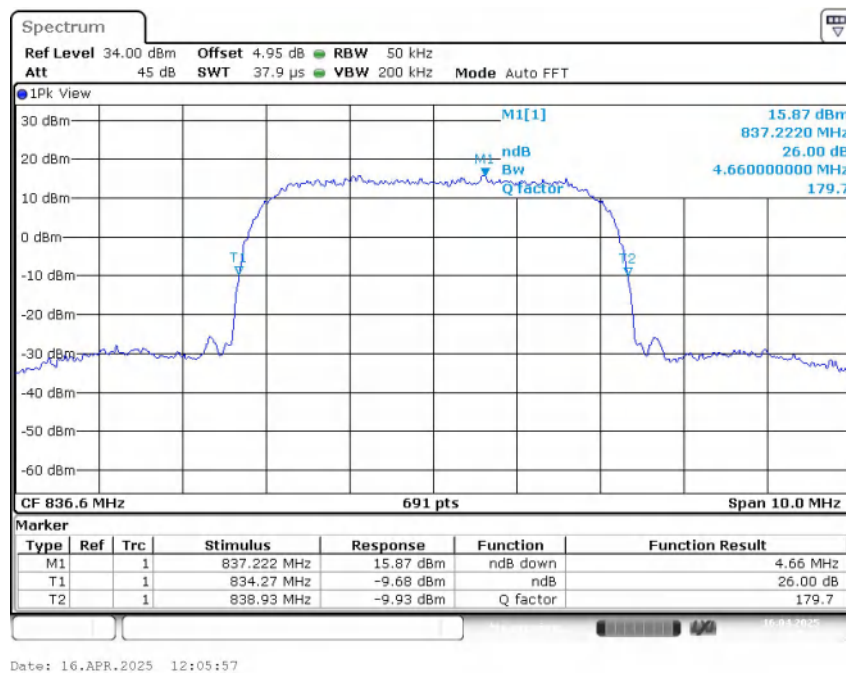



## Channel 4233-Emission Bandwidth (-26dBc BW)

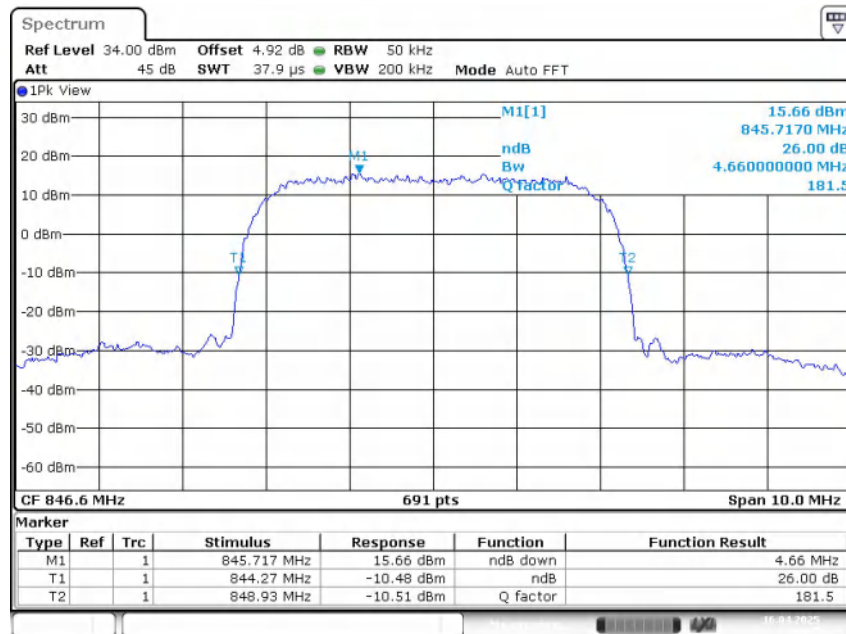


Date: 16.APR.2025 12:06:58

### WCDMA Band V (-26dBc)-16QAM


Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)
826.4	4.660
836.6	4.660
846.6	4.645

### WCDMA Band V (-26dBc)


#### Channel 4132-Emission Bandwidth (-26dBc BW)

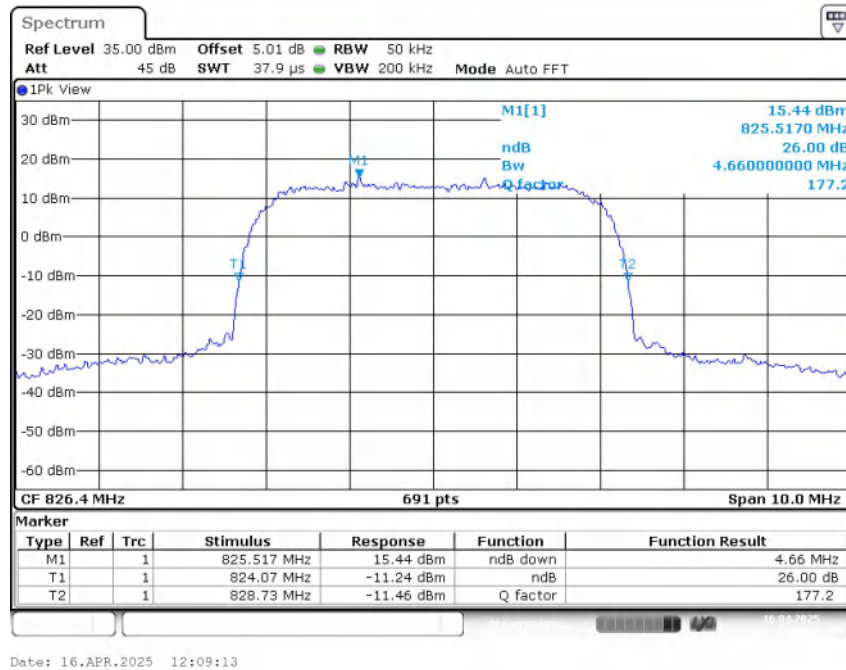

#### Channel 4183-Emission Bandwidth (-26dBc BW)

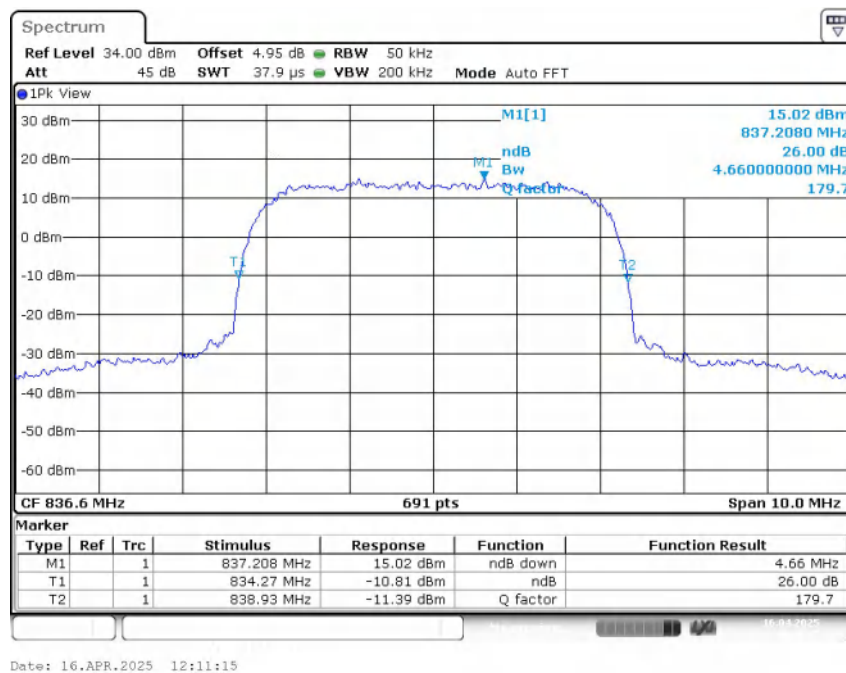

# Channel 4233-Emission Bandwidth (-26dBc BW)

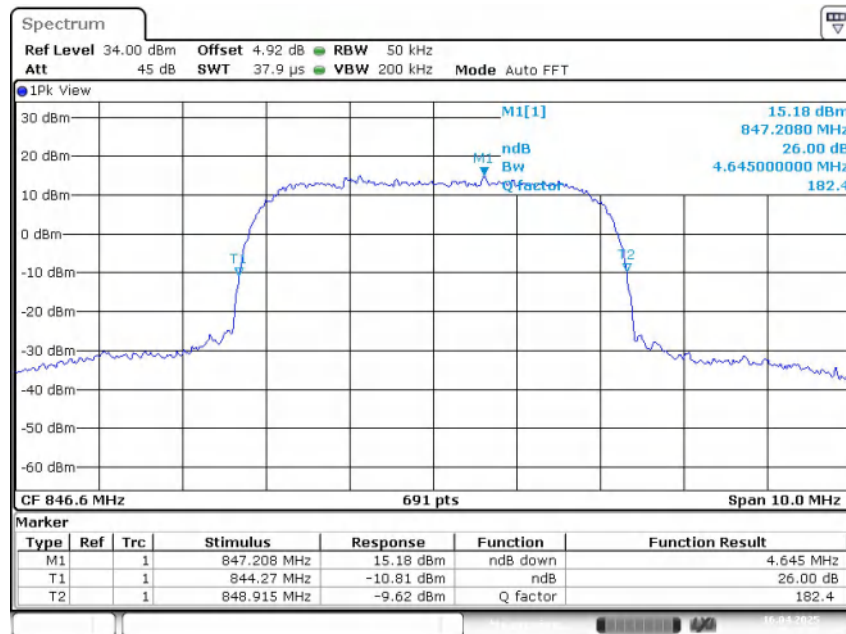

Date: 16.APR.2025 12:13:18

## **A.6 Band Edge Compliance**

### **A.6.1 Measurement limit**


Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to KDB 971168, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.


## A.6.2 Measurement result

### WCDMA Band II-QPSK


### Channel 9262

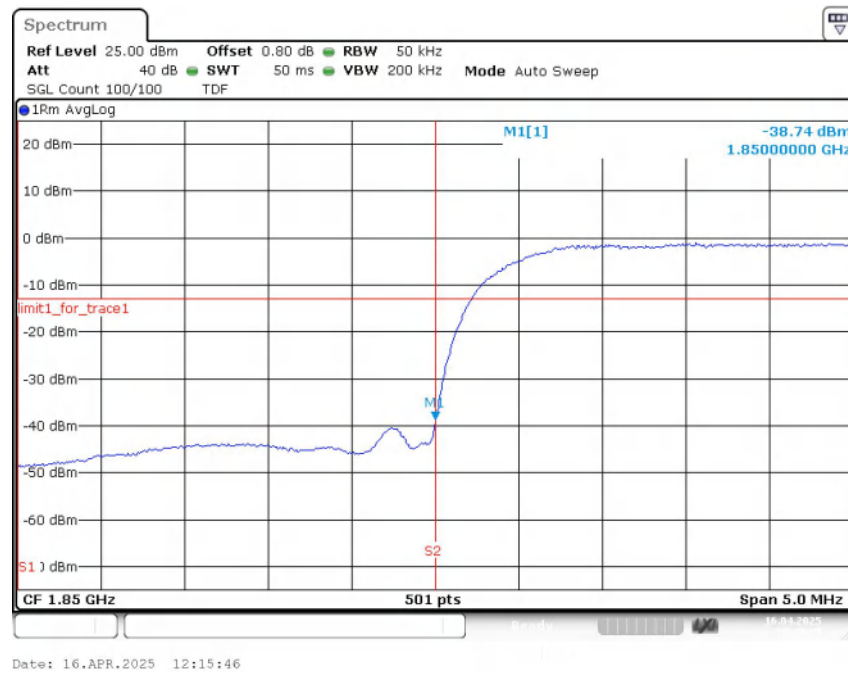

### Channel 9538

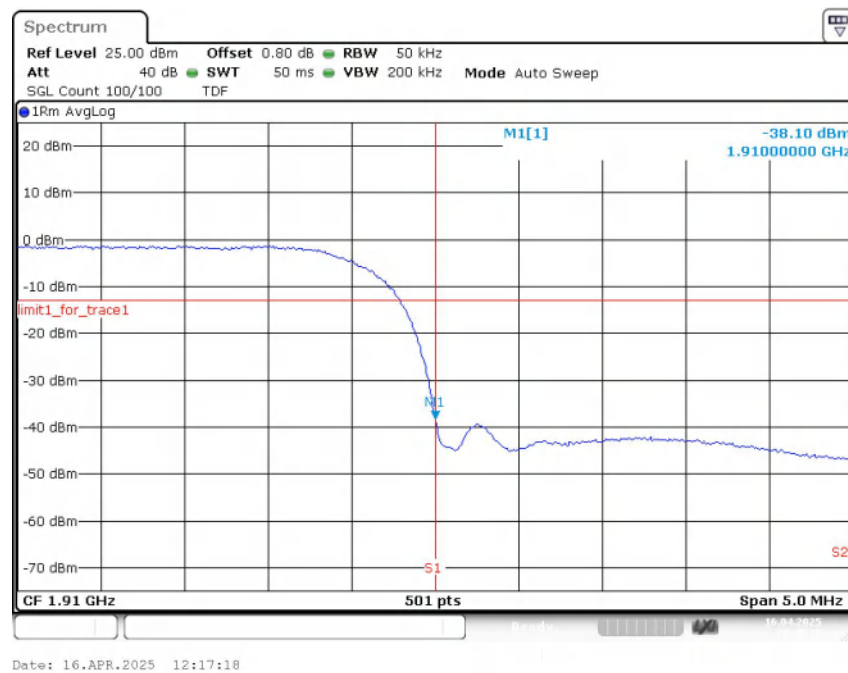


## WCDMA Band IV-QPSK Channel 1312

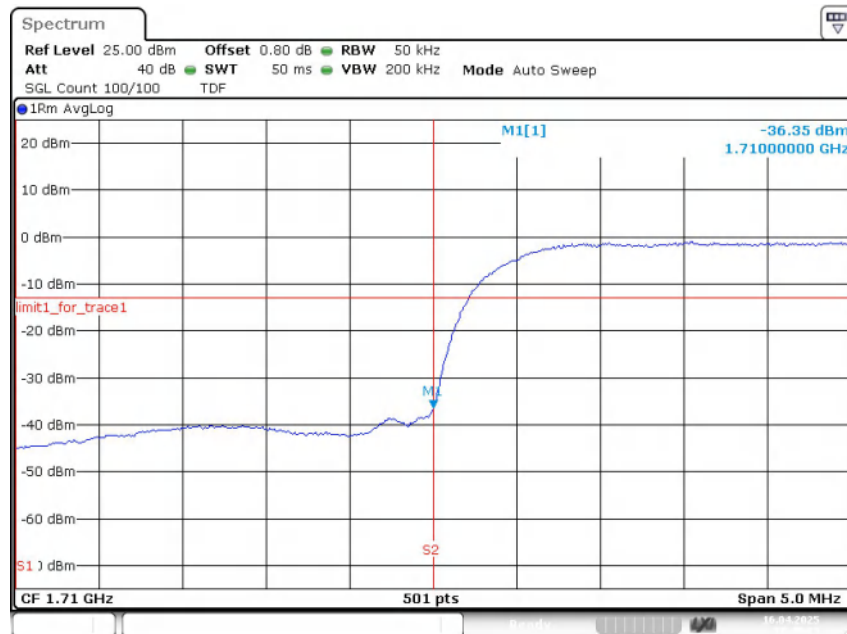


Date: 16.APR.2025 12:18:53

## Channel 1513

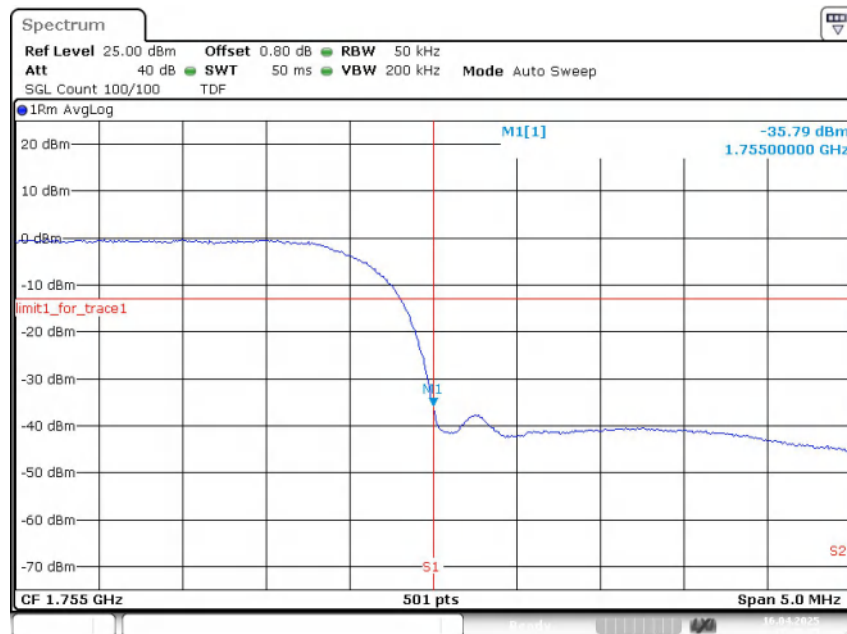

Date: 16.APR.2025 12:20:25

## WCDMA Band V-QPSK Channel 4132

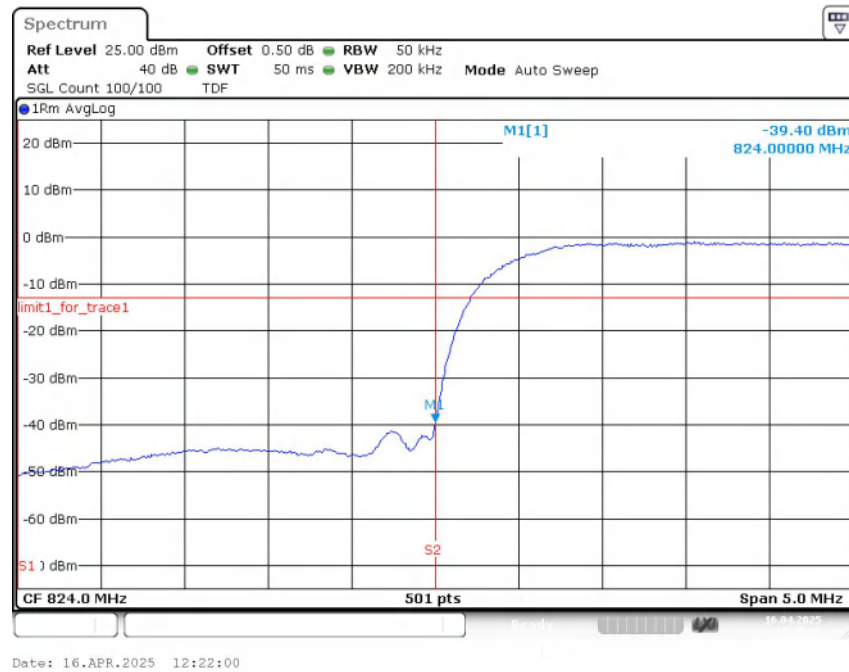

## Channel 4233



## **A.7 Conducted Spurious Emission**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is greater than  $2 \times \text{span} / \text{RBW}$ .

### **A. 7.2 Measurement Limit**

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.





### A.7.3 Measurement result

#### WCDMA Band II-QPSK



Channel 9262:

NOTE: peak above the limit line is the carrier frequency.

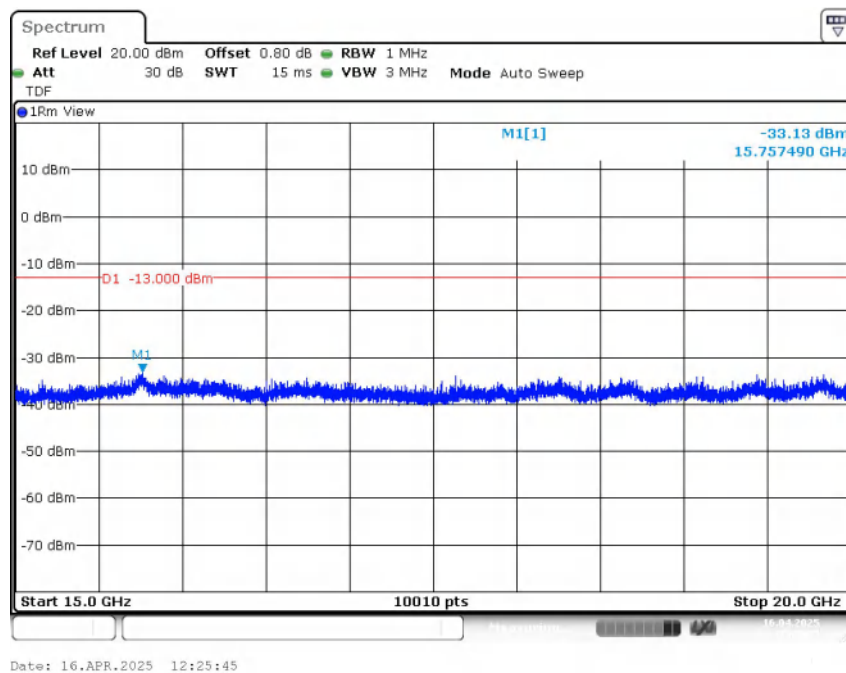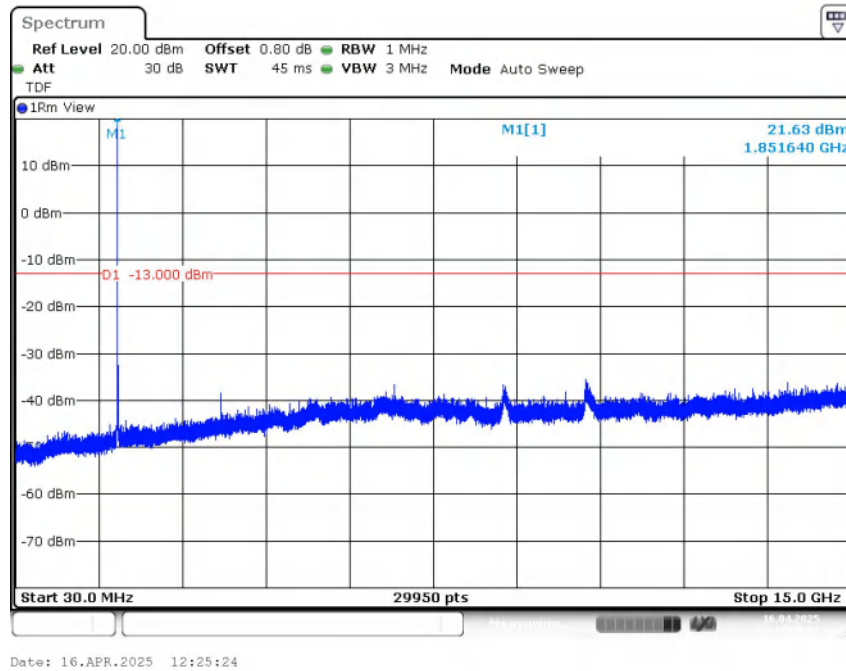



Channel 9400:

NOTE: peak above the limit line is the carrier frequency.

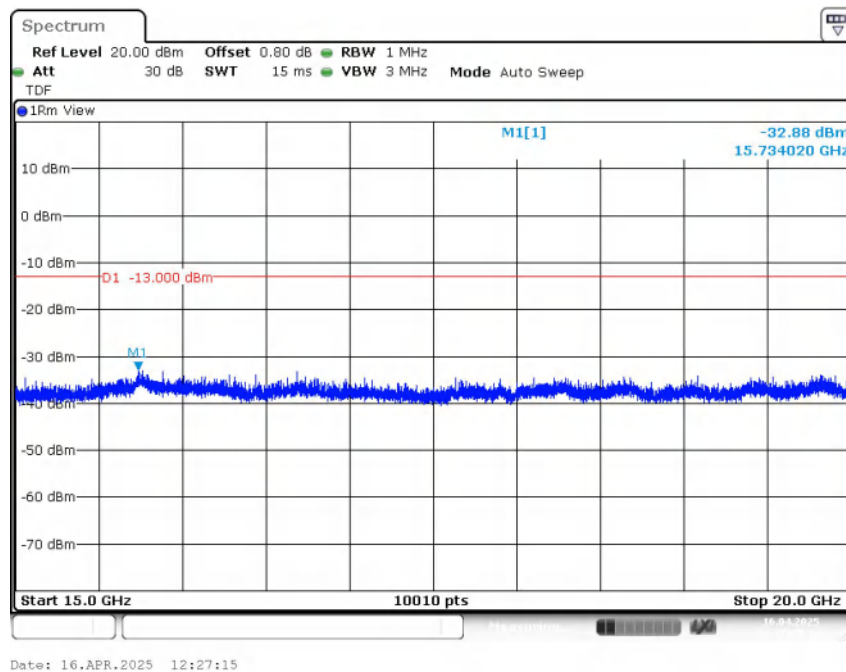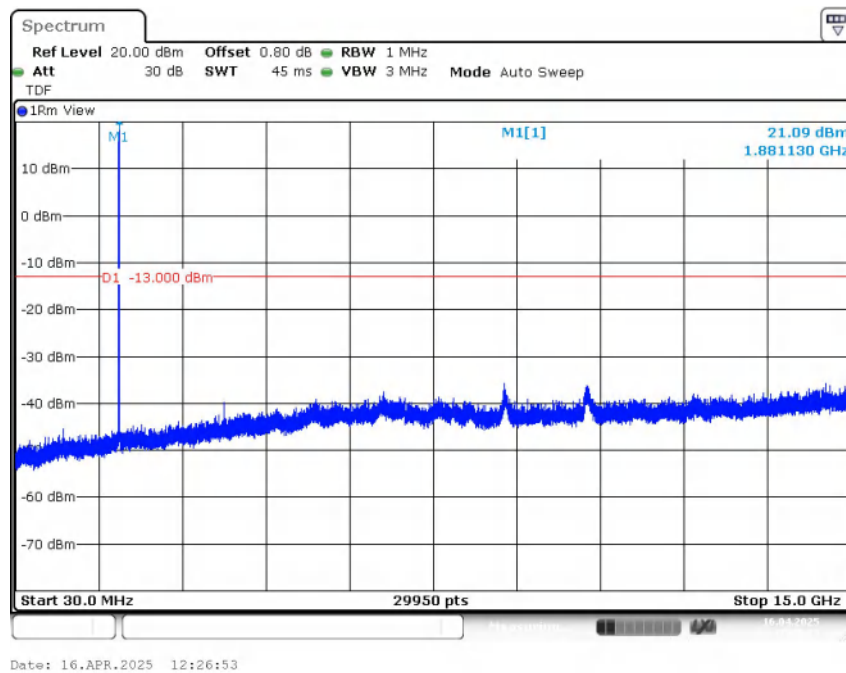

Channel 9538:


NOTE: peak above the limit line is the carrier frequency.

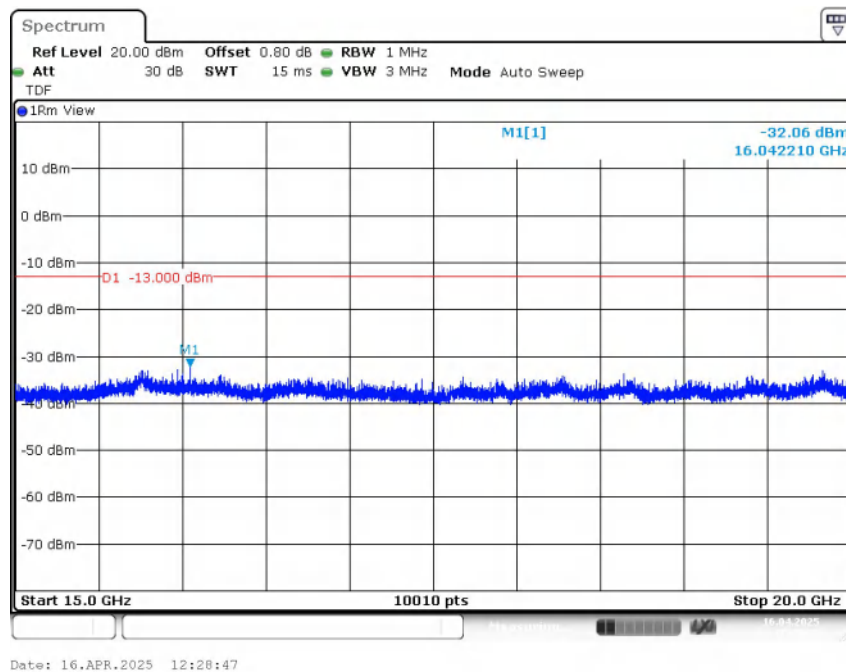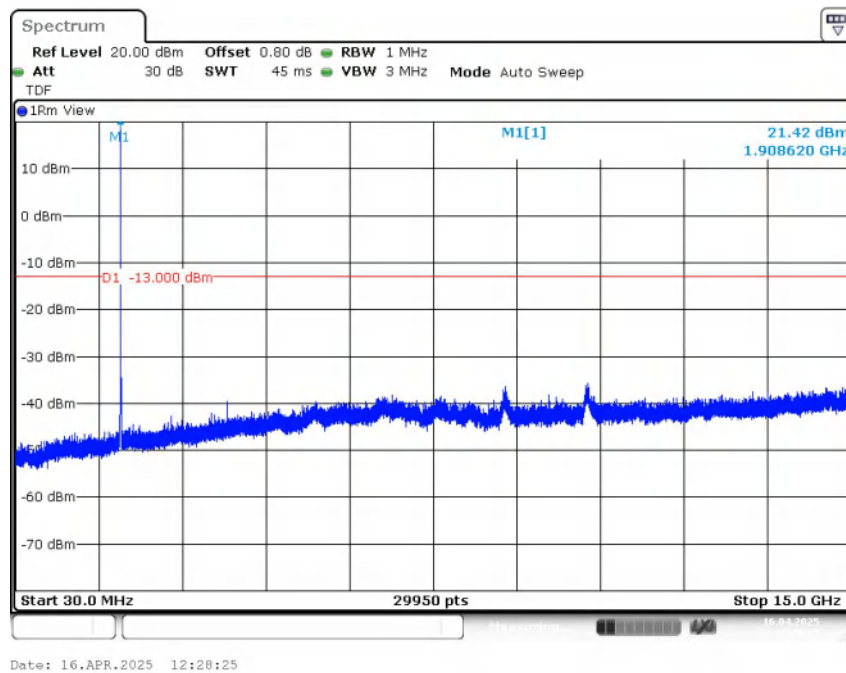


## WCDMA Band IV-QPSK

Channel 1312:

NOTE: peak above the limit line is the carrier frequency.

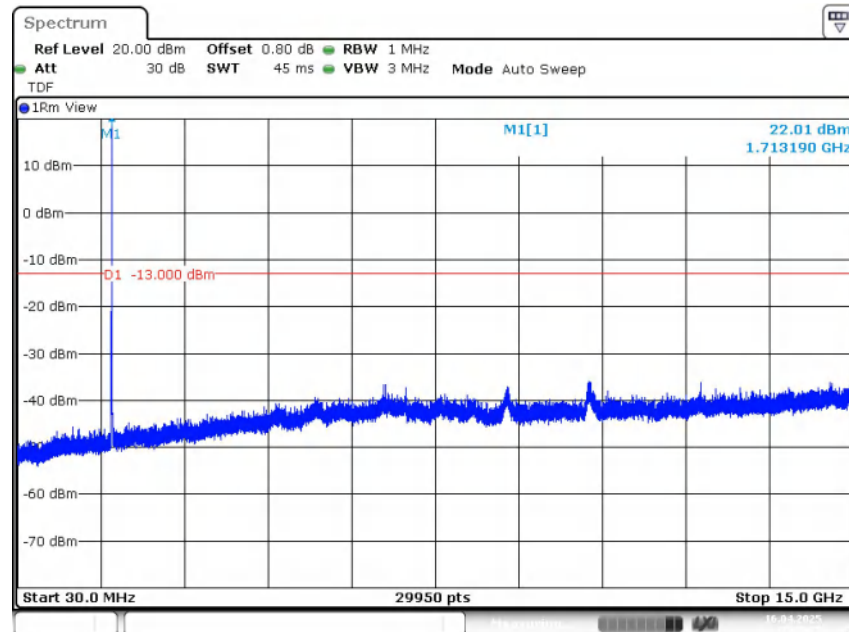



Date: 16.APR.2025 12:29:58

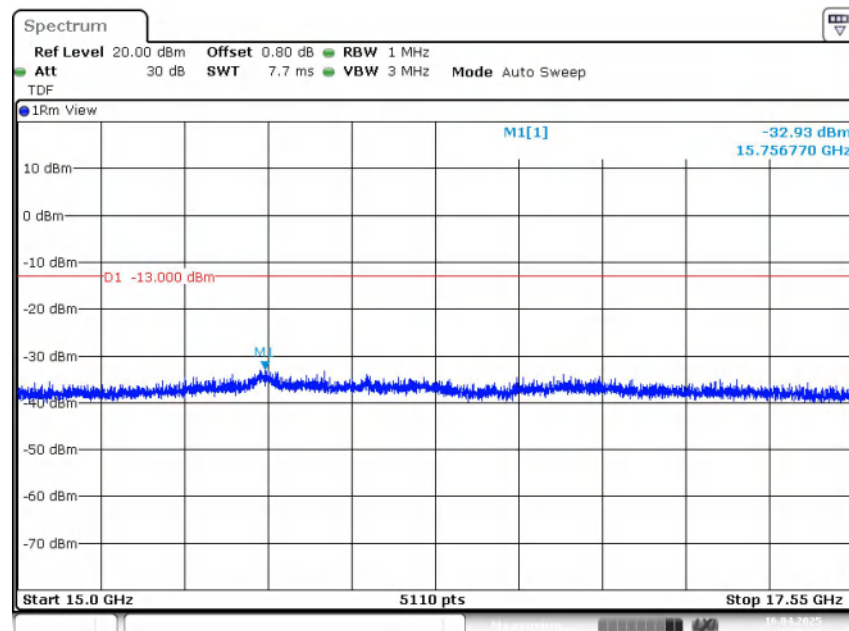

Date: 16.APR.2025 12:30:19



Channel 1412:

NOTE: peak above the limit line is the carrier frequency.

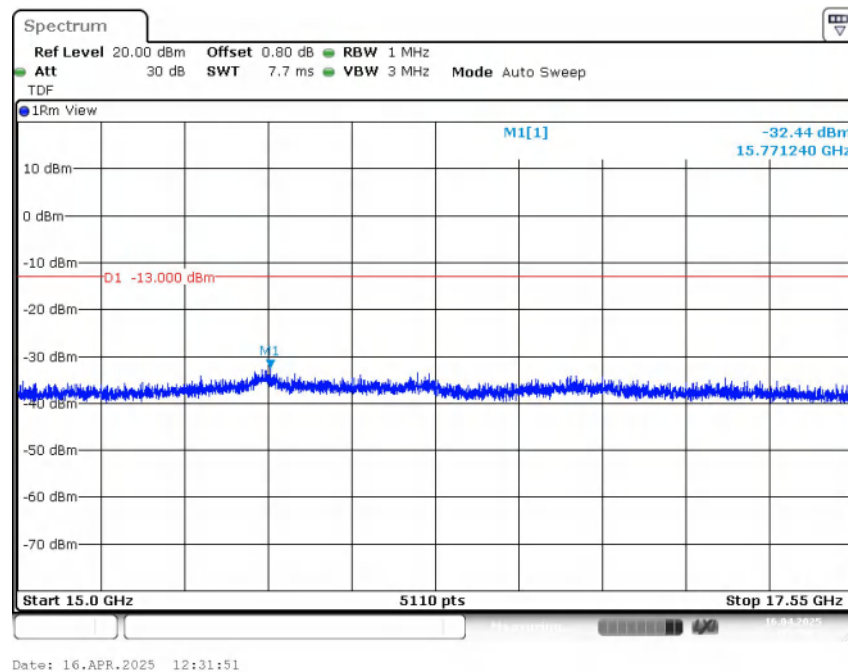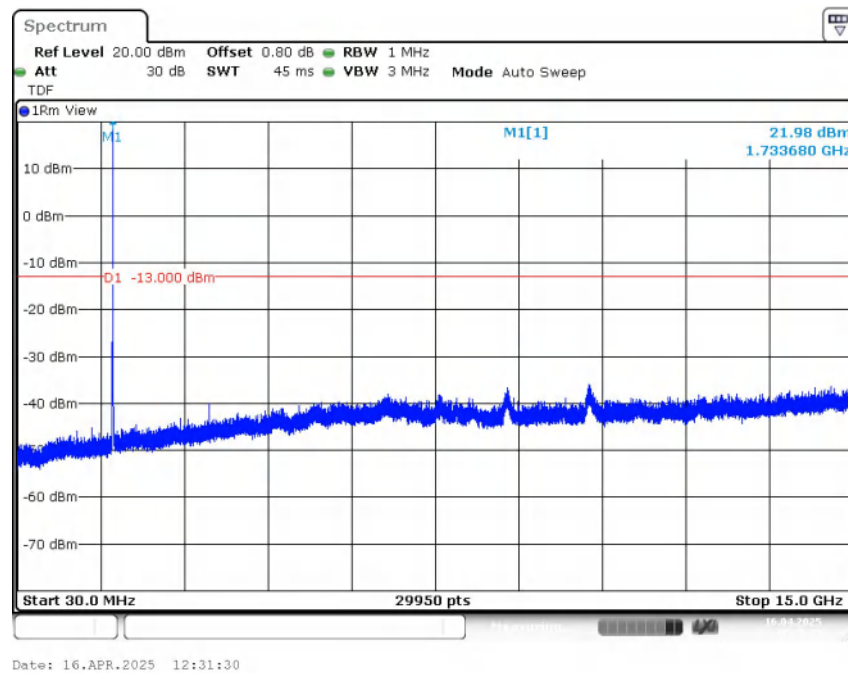

Channel 1513:


NOTE: peak above the limit line is the carrier frequency.

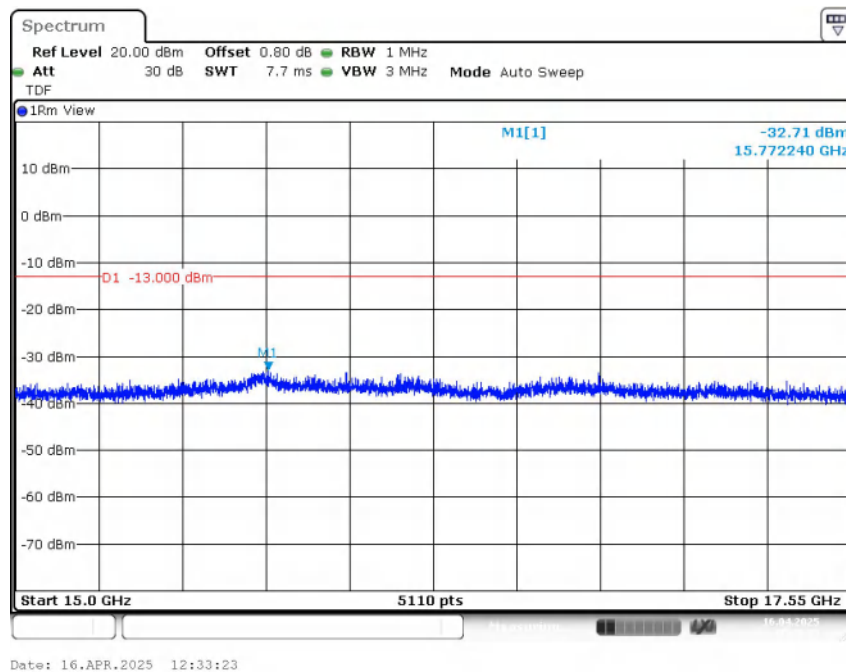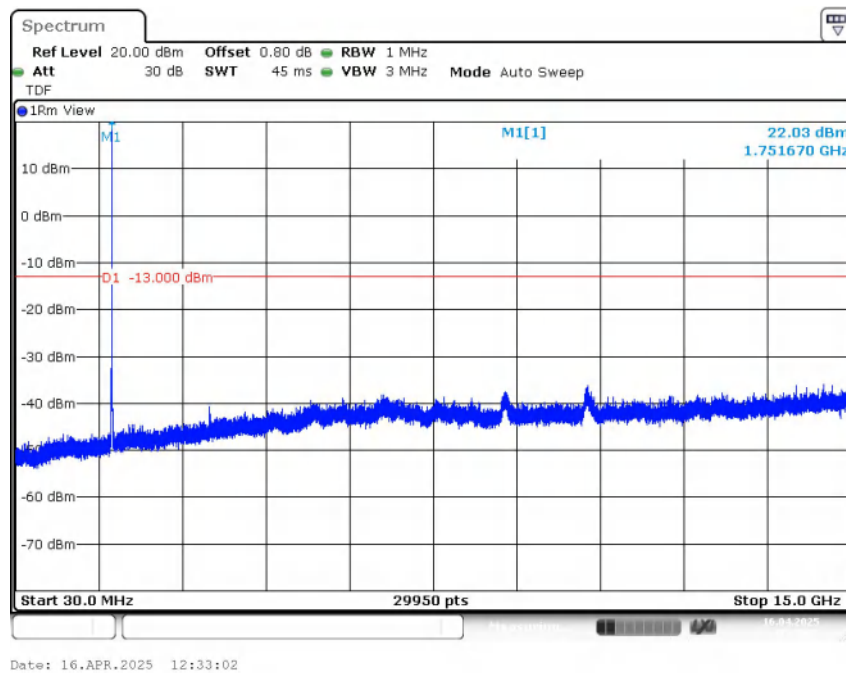

## WCDMA Band V-QPSK


Channel 4132:

NOTE: peak above the limit line is the carrier frequency.

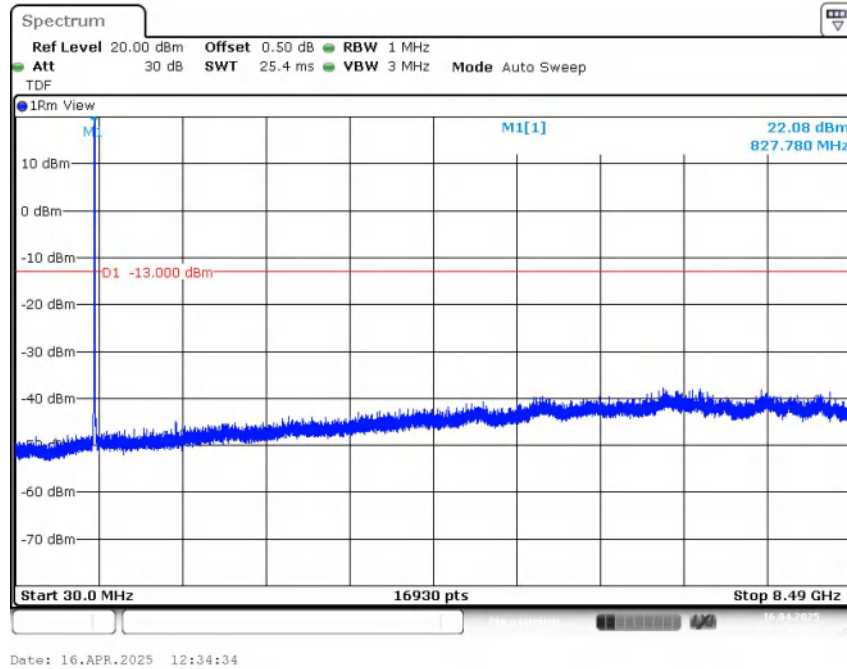


Channel 4183:

NOTE: peak above the limit line is the carrier frequency.

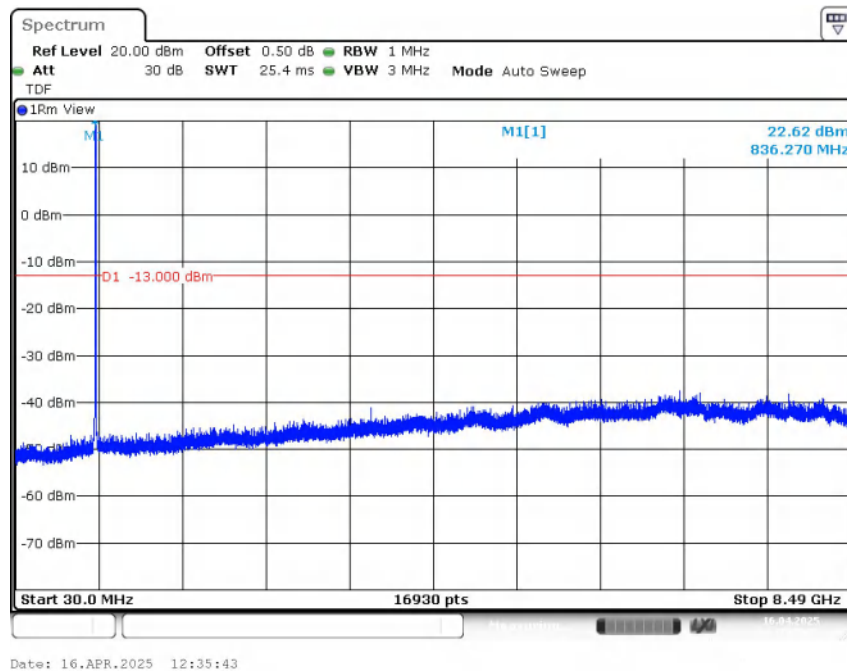

Channel 4233:

NOTE: peak above the limit line is the carrier frequency.

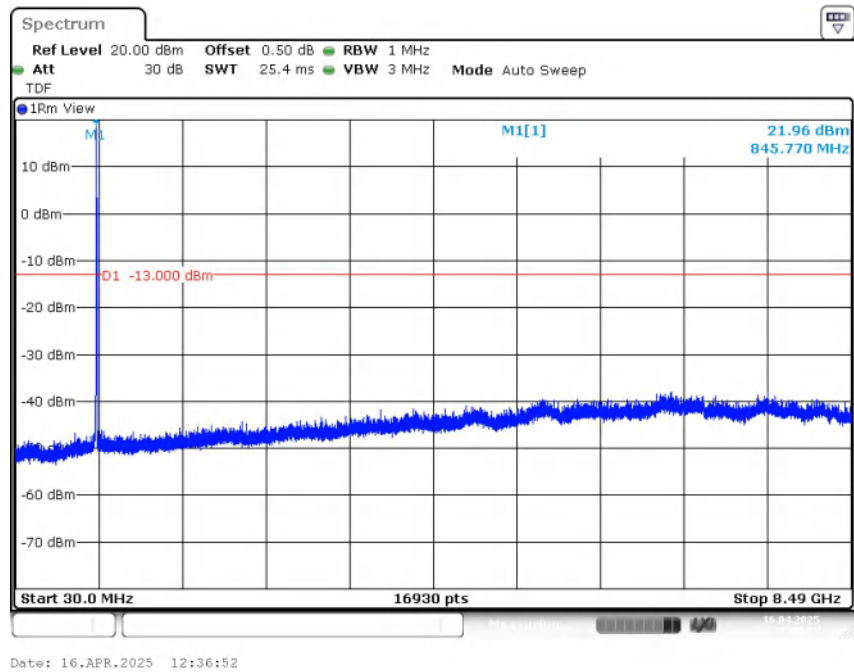



## **A.8 Peak-to-Average Power Ratio**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

### **WCDMA Band II-QPSK**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
9400	1880	2.90

### **WCDMA Band II-16QAM**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
9400	1880	4.61

### **WCDMA Band IV-QPSK**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	2.90

### **WCDMA Band IV-16QAM**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	3.74

## Annex B: Accreditation Certificate



\*\*\*END OF REPORT\*\*\*