


Label and Label location:


Smart Timer Box
Model: PTW01

Specifications
Input: 120VAC 60HZ
Output: 40A Resistive 120VAC
2HP 120VAC

Not for Water Immersion.
CAUTION: Risk of Electric Shock-More than one disconnect switch may be required to de-energize the device before servicing.
For supply connections, use copper wire AWG 8-14 suitable for 90°C(194°F).
Use Copper Conductors Only. Always close the door after use.




Conforms to UL
STD.60730-1 and
60730-2-7




5023586




Certified to CSA
STD.E60730-1
and E60730-2-7


120VAC Application Controlling One 120VAC Load



120VAC Application Controlling Two 120VAC Loads








FCC ID: 2A4G9-016
IC: 26865-014

Made in China

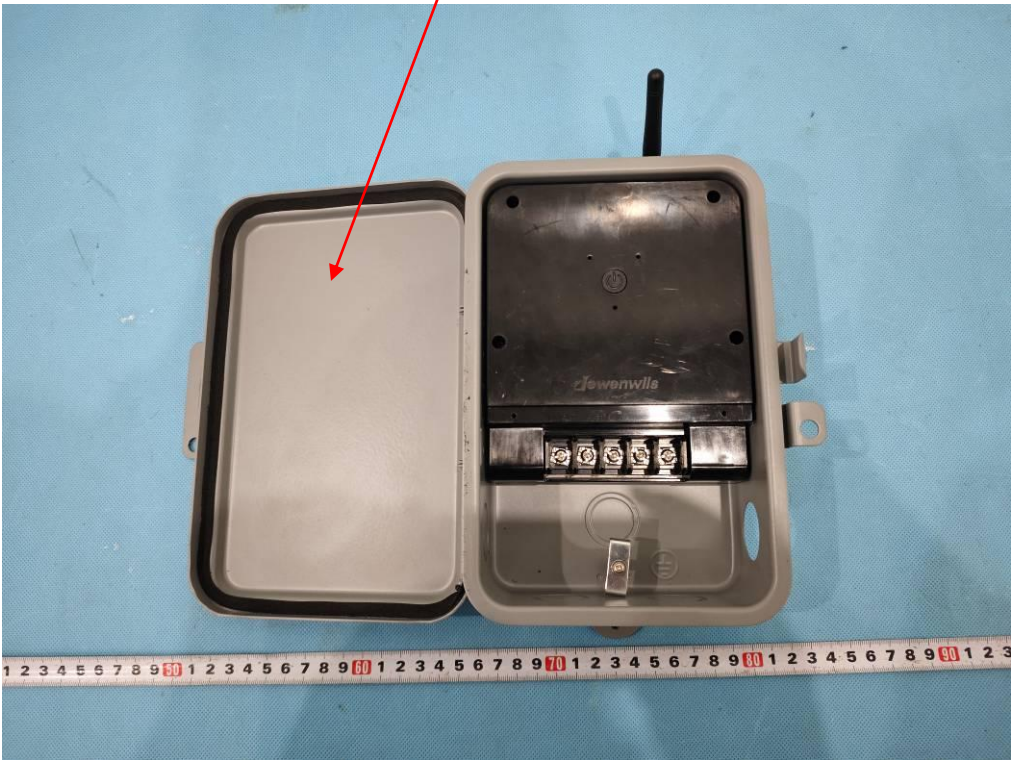

Smart Timer Box

Model: PTW02

Specifications

Input: 240VAC 60HZ

Output: 40A Resistive 240VAC
3HP 240VAC




Conforms to UL
STD.60730-1 and
60730-2-7

Certified to CSA
STD.E60730-1
and E60730-2-7

Not for Water Immersion.


CAUTION: Risk of Electric Shock-More than one disconnect switch may be required to de-energize the device before servicing.
For supply connections, use copper wire AWG 8-14 suitable for 90°C(194°F).
Use Copper Conductors Only, Always close the door after use.

240VAC Application Controlling One 240VAC Load



FCC ID: 2A4G9-016
IC: 26865-014

Made in China

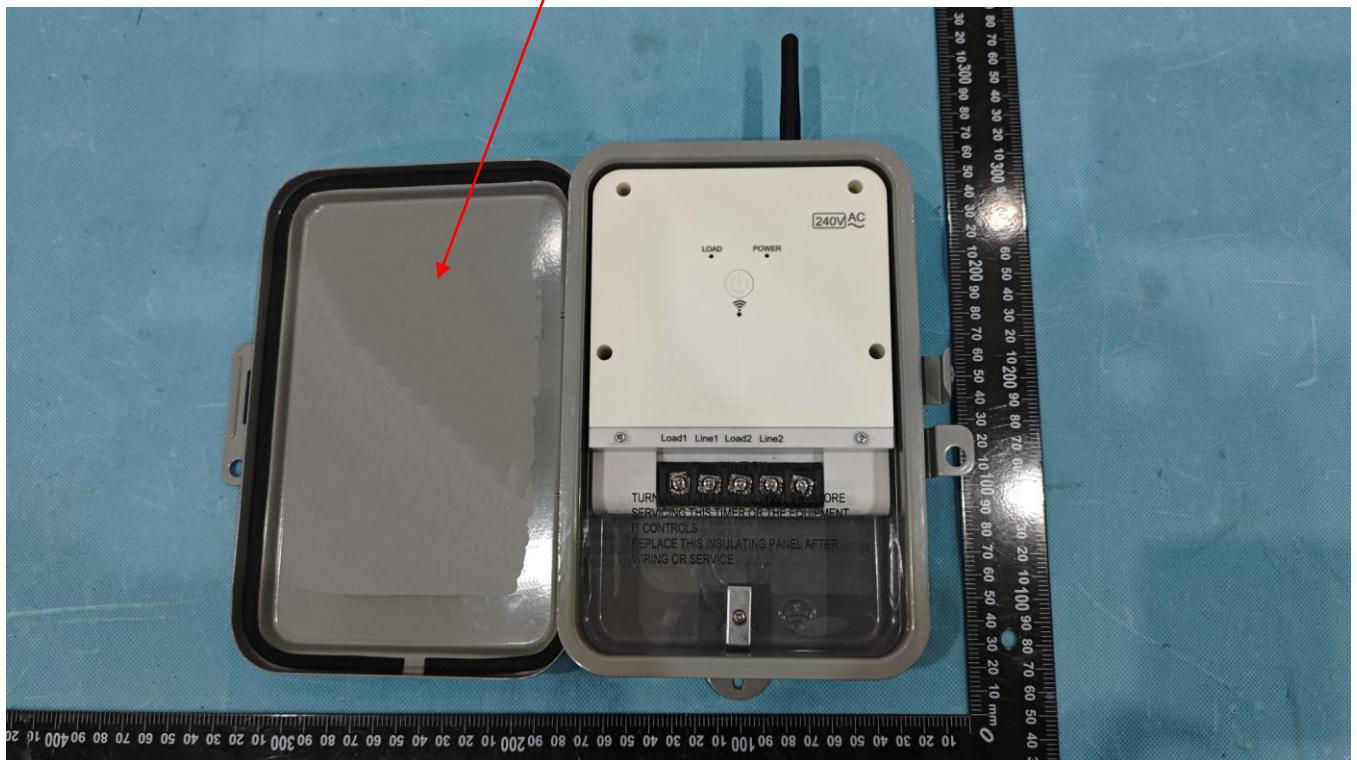

Smart Timer Box

Model: PTW03

Specifications

Input: 120VAC 60HZ

Output: 40A Resistive 120VAC

2HP 120VAC



Conforms to UL
STD.60730-1 and
60730-2-7


Certified to CSA
STD.E60730-1
and E60730-2-7

Not for Water Immersion.


CAUTION: Risk of Electric Shock-More than one disconnect switch may be required to de-energize the device before servicing.

For supply connections, use copper wire AWG 8-14 suitable for 90°C(194°F). Use Copper Conductors Only. Always close the door after use.

120VAC Application Controlling One 120VAC Load




120VAC Application Controlling Two 120VAC Loads



FCC ID: 2A4G9-016
IC: 26865-014

Made in China

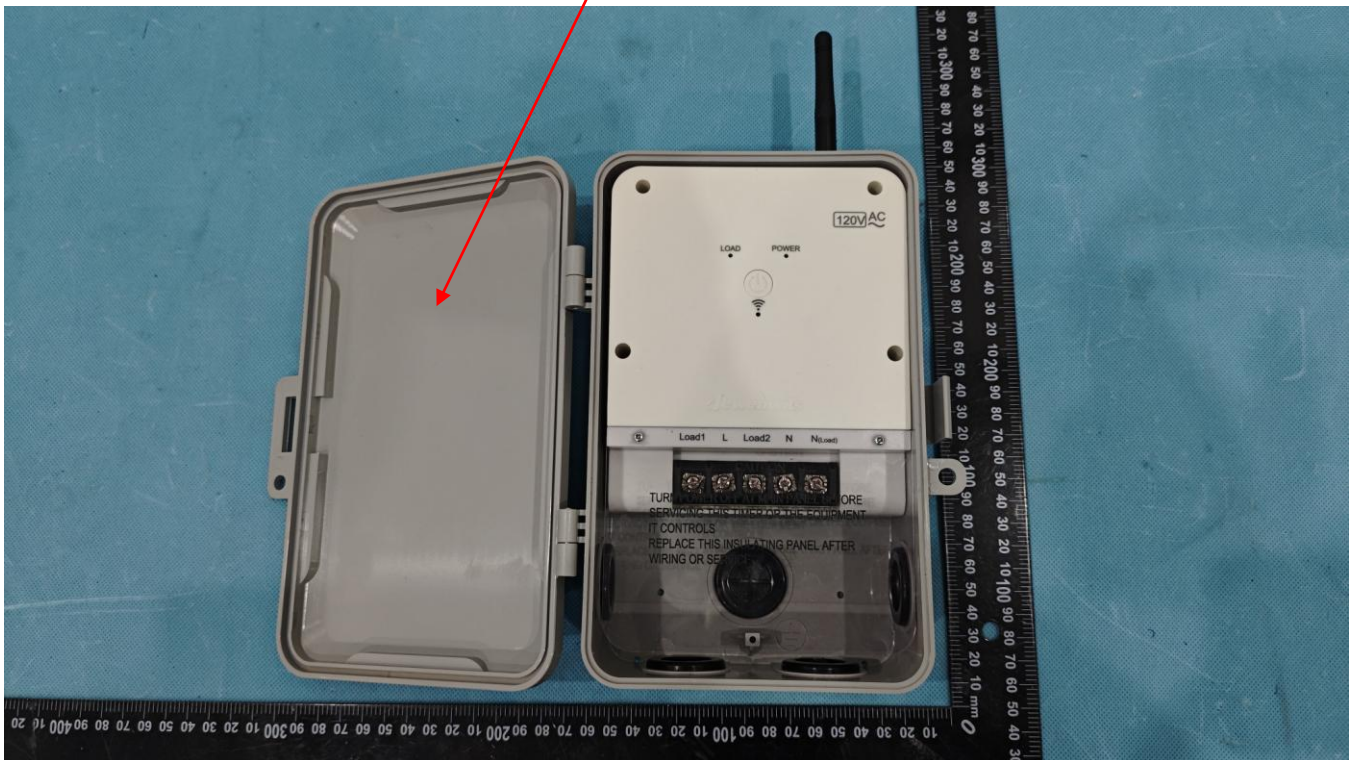

Smart Timer Box

Model: PTW04

Specifications

Input: 240VAC 60HZ

Output: 40A Resistive 240VAC
3HP 240VAC




Conforms to UL
STD.60730-1 and
60730-2-7

Certified to CSA
STD.E60730-1
and E60730-2-7

Not for Water Immersion.

CAUTION: Risk of Electric Shock-More than one disconnect switch may be required to de-energize the device before servicing.
For supply connections, use copper wire AWG 8-14 suitable for 90°C(194°F).
Use Copper Conductors Only, Always close the door after use.

240VAC Application Controlling One 240VAC Load



FCC ID: 2A4G9-016
IC: 26865-014

Made in China

